

**System Check\_Head\_835MHz****DUT: D835V2 - SN4d060**

Communication System: CW; Frequency: 835.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 835.000$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 44.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=24.0dBm/Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 2.45 W/kg; SAR (10g) = 1.61 W/kg;

TSL Correction: Positive only

**Pin=24.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 2.42 W/kg; SAR (8g) = 1.70 W/kg; SAR (10g) = 1.61 W/kg

Smallest distance from peaks to all points 3 dB below = 19.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.8 %

TSL Correction: Positive only

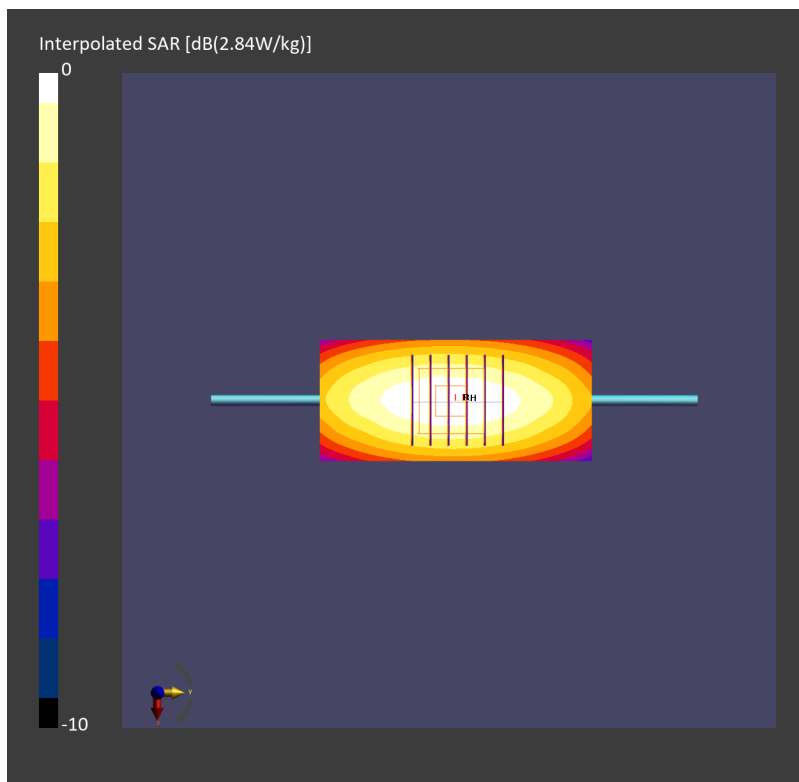

**System Check\_Head\_1750MHz****DUT: D1750V2 - SN1112**

Communication System: CW; Frequency: 1750.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 1750.000$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.01, 7.32); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.82 W/kg; SAR (10g) = 0.999 W/kg;

TSL Correction: Positive only

**Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 1.82 W/kg; SAR (8g) = 1.05 W/kg; SAR (10g) = 0.965 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

TSL Correction: Positive only

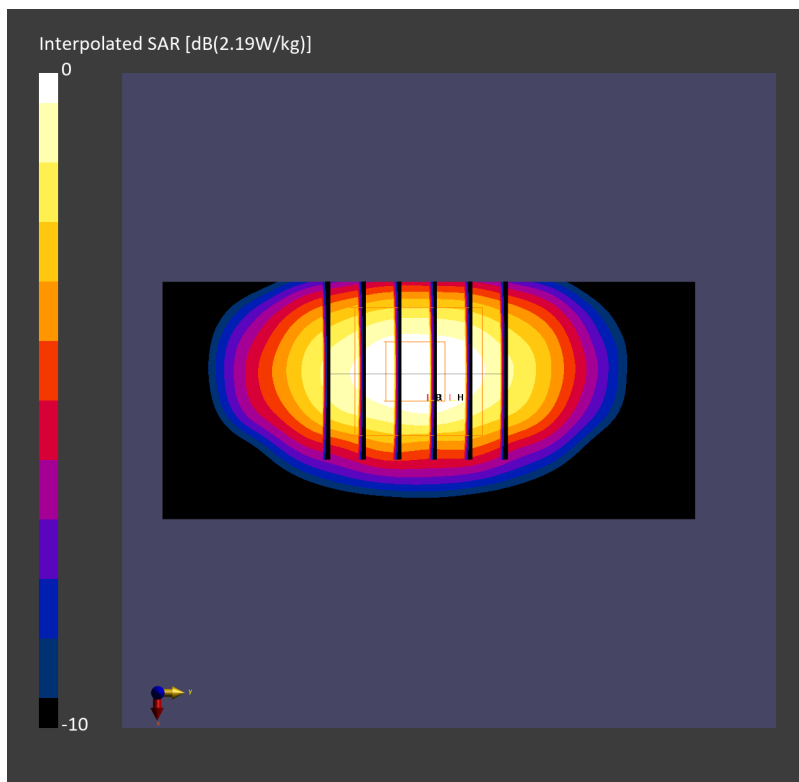

**System Check\_Head\_1900MHz****DUT: D1900V2 - SN5d185**

Communication System: CW; Frequency: 1900.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 1900.000$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=17.0dBm/Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 1.96 W/kg; SAR (10g) = 1.03 W/kg;

TSL Correction: Positive only

**Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 1.93 W/kg; SAR (8g) = 1.09 W/kg; SAR (10g) = 1.01 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

TSL Correction: Positive only

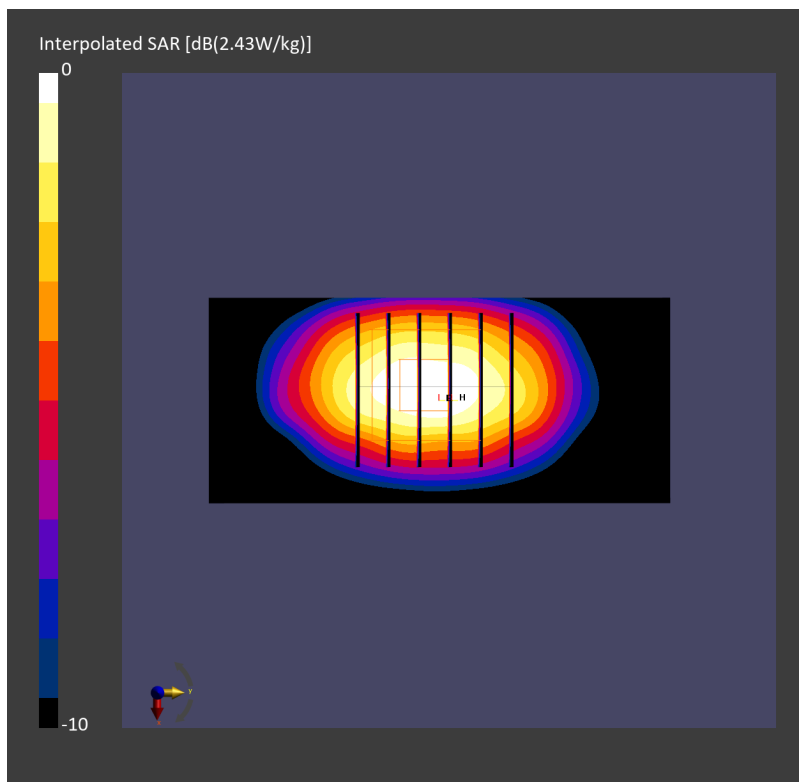

**System Check\_Head\_2600MHz****DUT: D2600V2 - SN1078**

Communication System: CW; Frequency: 2600.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 2600.000$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 41.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.62 W/kg; SAR (10g) = 1.16 W/kg;

TSL Correction: Positive only

**Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 2.55 W/kg; SAR (8g) = 1.27 W/kg; SAR (10g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

TSL Correction: Positive only

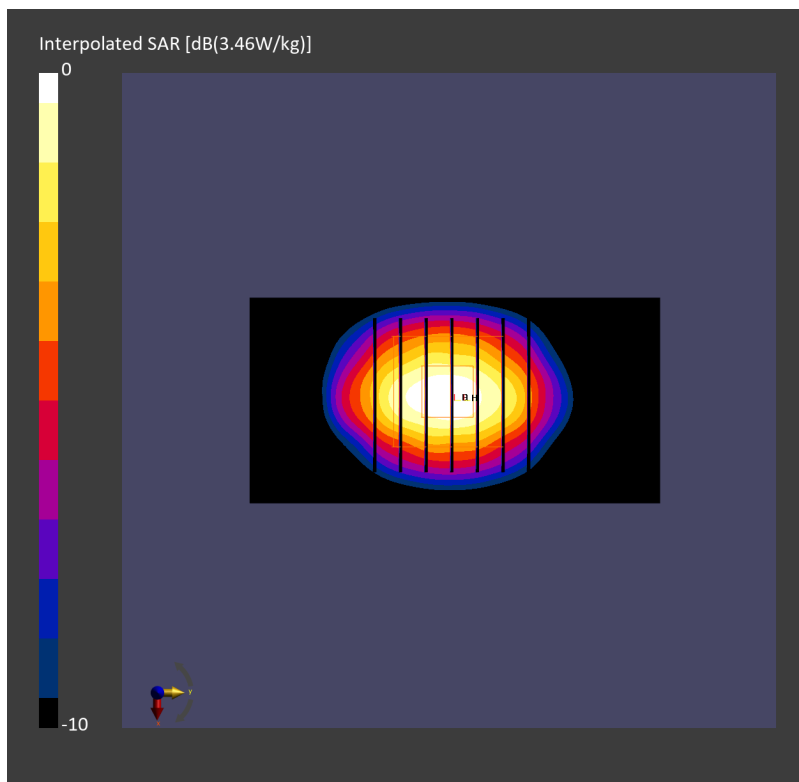

**System Check\_Head 2450MHz****DUT: D2450V2 - SN929**

Communication System: CW; Frequency: 2450.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 2450.000$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.53 W/kg; SAR (10g) = 1.19 W/kg;

TSL Correction: Positive only

**Pin=17.0dBm/Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 2.58 W/kg; SAR (8g) = 1.33 W/kg; SAR (10g) = 1.20 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

TSL Correction: Positive only

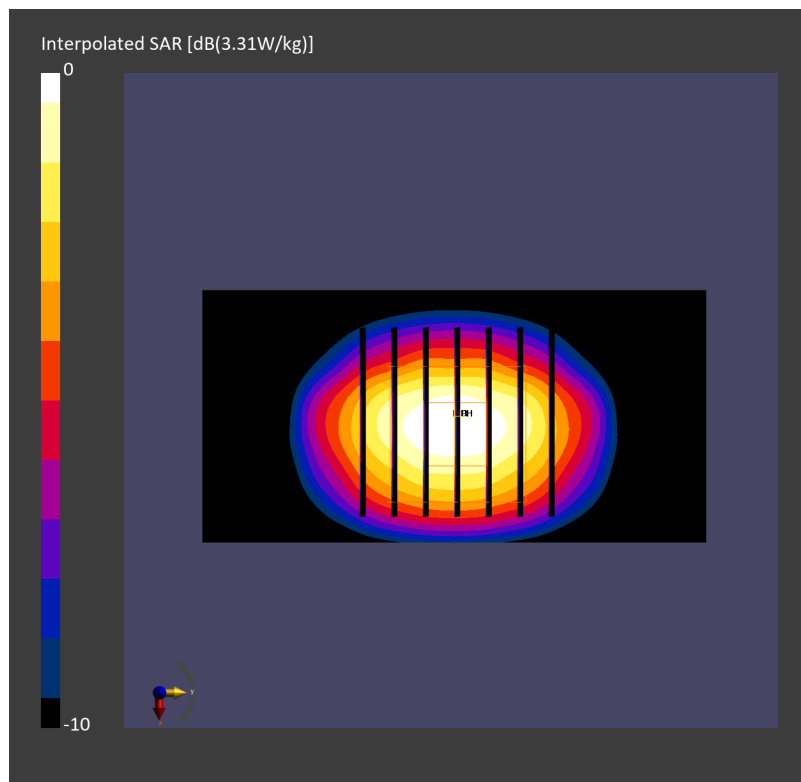

**System Check\_Head 5800MHz****DUT: D5GHzV2 - SN1006**

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL\_600-7200\_260921 Medium parameters used:  $f = 5800.000$  MHz;  $\sigma = 5.31$  S/m;  $\epsilon_r = 36.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.90, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2026-05-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

**Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.97 W/kg; SAR (10g) = 1.14 W/kg;

TSL Correction: Positive only

**Pin=17.0dBm/Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 4.25 W/kg; SAR (8g) = 1.41 W/kg; SAR (10g) = 1.21 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.6 %

TSL Correction: Positive only

