



FCC RADIO TEST REPORT

FCC ID : IHDT56AY1
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2701-1, XT2701-2
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL
60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL
60654 USA
Standard : FCC Part 15 Subpart C §15.209

The product was received on Aug. 13, 2026 and testing was performed from Aug. 14, 2026 to Sep. 18, 2026. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2. Test Configuration of Equipment Under Test.....	7
2.1 Descriptions of Test Mode	7
2.2 Connection Diagram of Test System	8
2.3 EUT Operation Test Setup	8
3. Test Results	9
3.1 AC Power Line Conducted Emissions Measurement	9
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	11
3.3 Radiated Emissions Measurement.....	12
3.4 Antenna Requirements.....	15
4. List of Measuring Equipment	16
5. Measurement Uncertainty.....	17
Appendix A. Test Results of Conducted Emission Test	
Appendix B. Test Results of Near Field Test Items	
Appendix C. Test Results of Radiated Test Items	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	



History of this test report

Report No.	Version	Description	Issue Date
FR672113H	01	Initial issue of report	Sep. 23, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	-
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Reporting only	-
3.3	15.209	Field Strength of Fundamental Emissions	Pass	-
		Radiated Emissions	Pass	-
3.4	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Aya Yang

1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be, NFC, UWB, WPT and GNSS.
Antenna Type subject to this standard	WPT: Copper Coil Antenna
Sample 1	P+E-SIM
Sample 2	P+P-SIM

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. All test items were performed with Sample 1.
3. The models XT2701-1, XT2701-2 are only for market differentiation, all the others are the same.

EUT Information List	
IMEI	Performed Test Item
353070500009572	Conducted
353070500007832	Conducted Emission
353070500008095 353070500008103	Radiated Spurious Emission

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-901
AC Adapter 1(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-902
AC Adapter 1(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-903
AC Adapter 1(AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-906
AC Adapter 1(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-907
AC Adapter 1(CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-909
AC Adapter 2(IN)	Brand Name	Motorola (Salcomp)	Model Name	MC-904
AC Adapter 2(IN Local)	Brand Name	Motorola (Salcomp)	Model Name	MC-904
AC Adapter 3(US)	Brand Name	Motorola (AOHAI)	Model Name	MC-901
AC Adapter 3(EU)	Brand Name	Motorola (AOHAI)	Model Name	MC-902
AC Adapter 3(UK)	Brand Name	Motorola (AOHAI)	Model Name	MC-903
AC Adapter 3(AR)	Brand Name	Motorola (AOHAI)	Model Name	MC-906
AC Adapter 3(BR)	Brand Name	Motorola (AOHAI)	Model Name	MC-907
AC Adapter 3(CHILE)	Brand Name	Motorola (AOHAI)	Model Name	MC-909
AC Adapter 4(IN)	Brand Name	Motorola (AOHAI)	Model Name	MC-904

AC Adapter 4(IN Local)	Brand Name	Motorola (XIHI)	Model Name	MC-904
Battery	Brand Name	Motorola (ATL)	Model Name	TZ70
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18E08103
USB Cable 3	Brand Name	Motorola (Saibao)	Model Name	SC18D71644
USB Cable 4	Brand Name	Motorola (Luxshare)	Model Name	SC18E08104
Protective case	Brand Name	Motorola (Techson)	Model Name	SS68F43462

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 1190 and 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

FCC designation No.: TW1190 and TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.209
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and three receiving antenna orientations (parallel, perpendicular, and ground-parallel) for Coil Antenna, and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Test Cases	
AC Conducted Emission	Mode 1 : Wireless Charging + Battery < 10% Mode 2 : Wireless Charging + Battery = 50% (40%~60%) Mode 3 : Wireless Charging + Battery > 90% for 0mm Mode 4 : Wireless Charging + Battery > 90% for 2mm
Radiated Spurious Emission	Mode 1 : Wireless Charging + Battery < 10% Mode 2 : Wireless Charging + Battery = 50% (40%~60%) Mode 3 : Wireless Charging + Battery > 90% for 0mm Mode 4 : Wireless Charging + Battery > 90% for 2mm

2.2 Connection Diagram of Test System

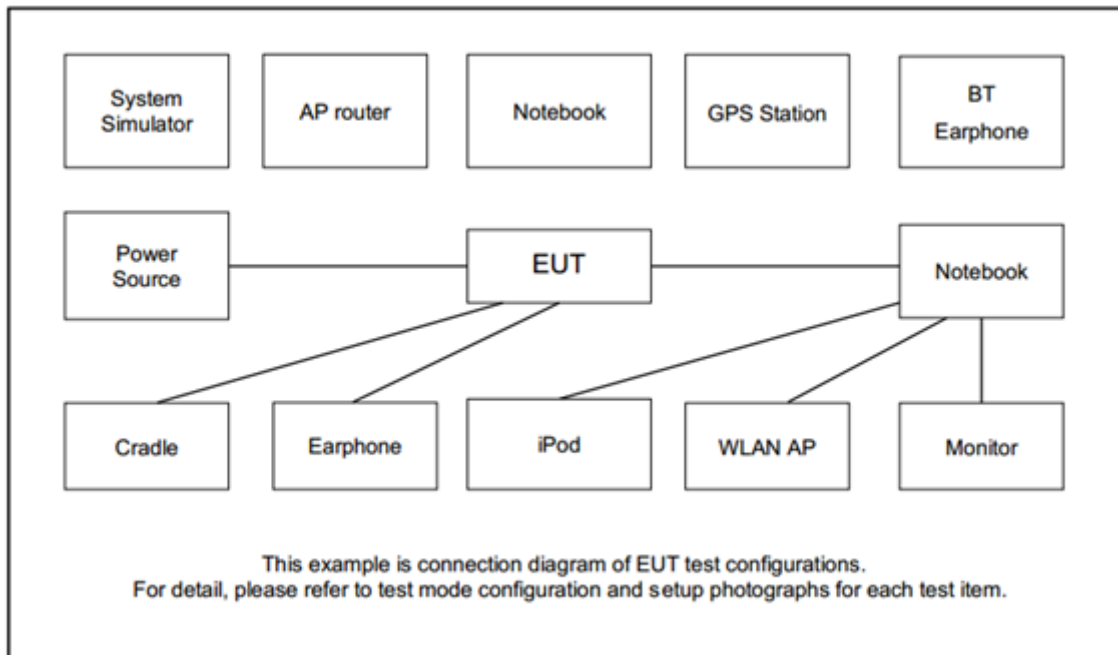

2.3 EUT Operation Test Setup

EUT is charging to the Phone via wireless power transfer function.

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

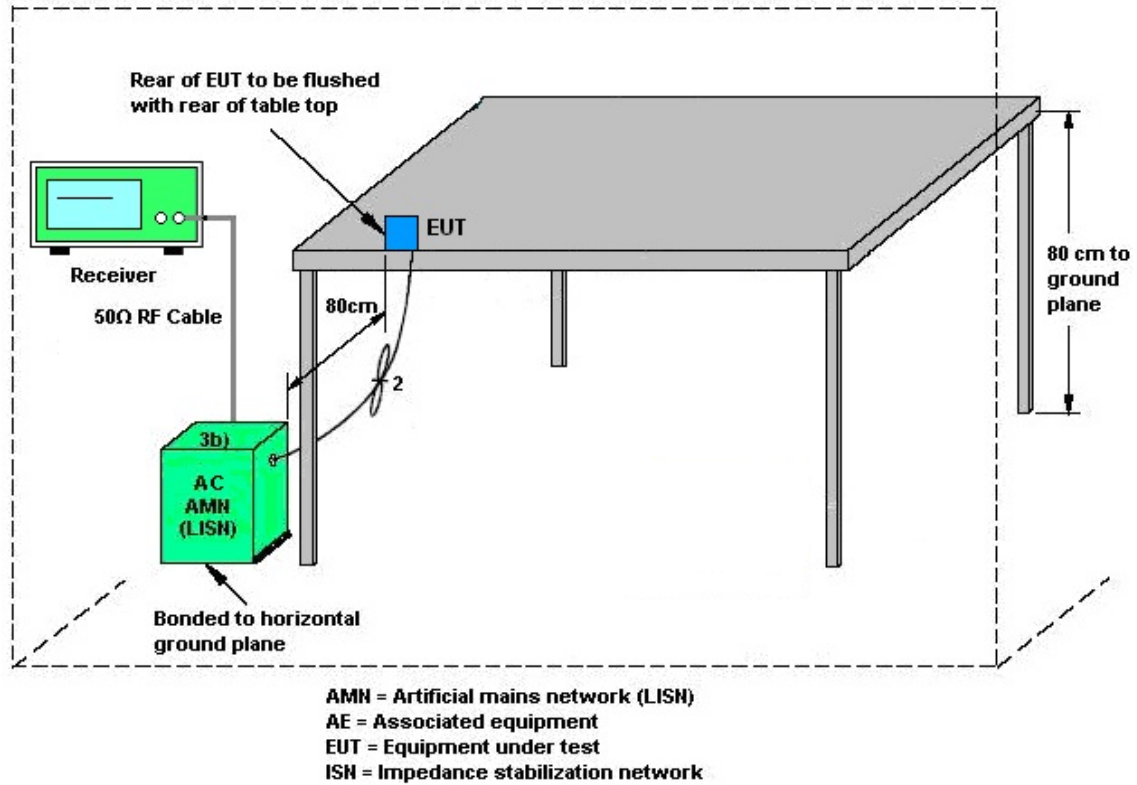

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Reporting only


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1kHz and the video bandwidth of 3kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

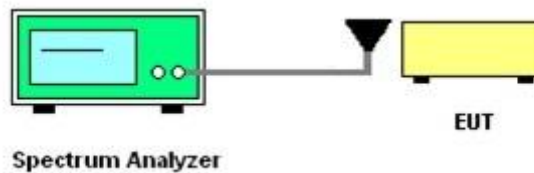

3.2.5 Test Result of Near Field Test Items

Please refer to Appendix B.

3.3 Radiated Emissions Measurement

3.3.1 Limit

The field strength of any emissions which appear band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

3.3.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower is scanned (from 1 M to 4 M) and then the turntable is rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30 MHz, loop antenna has to be used for measurement and the recorded data shall be QP measured by receiver.
8. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

3.3.5 Test Setup

For radiated test below 30MHz

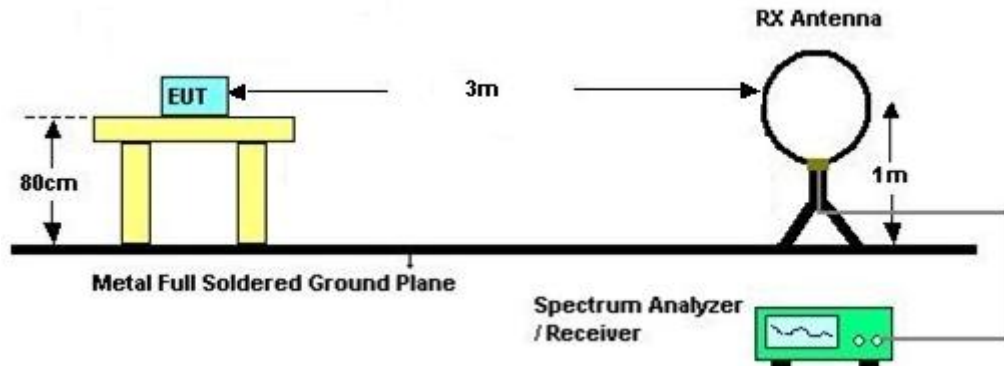

For radiated test above 30MHz

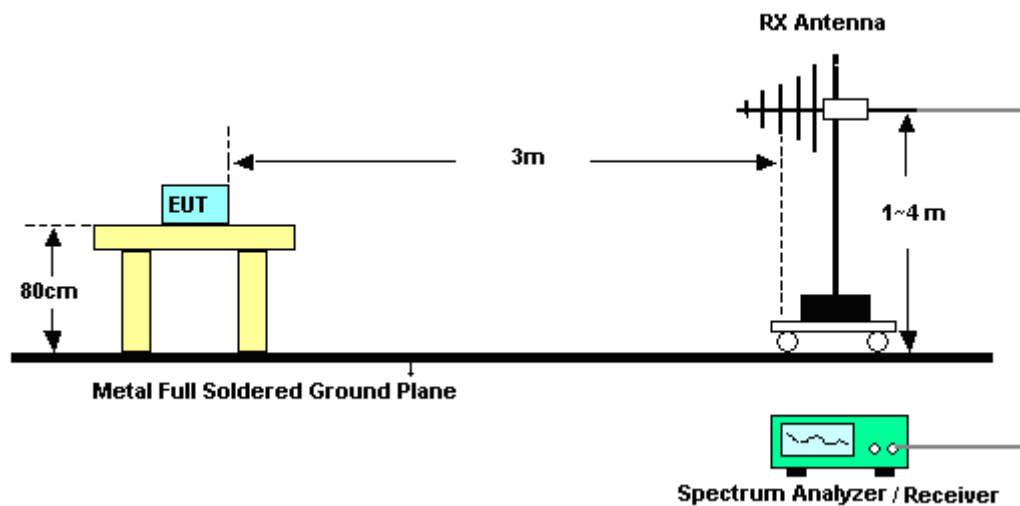

3.3.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark:

1. There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. After pre-scan three receiving antenna orientations parallel (horizontal), perpendicular(vertical), and ground-parallel for Loop Antenna, the worst case is receiving antenna parallel.



3.4 Antenna Requirements

3.4.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.4.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Mar. 21,2026	Aug. 14, 2026~ Aug. 15, 2026	Mar. 20,2027	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 16,2026	Aug. 14, 2026~ Aug. 15, 2026	Mar. 15,2027	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Sep. 30,2025	Aug. 14, 2026~ Aug. 15, 2026	Sep. 29,2026	Radiation (03CH07-HY)
Signal Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Apr. 09,2026	Aug. 14, 2026~ Aug. 15, 2026	Apr. 08,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 19,2026	Aug. 14, 2026~ Aug. 15, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 19,2026	Aug. 14, 2026~ Aug. 15, 2026	Feb. 18,2027	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Aug. 14, 2026~ Aug. 15, 2026	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Aug. 14, 2026~ Aug. 15, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Aug. 14, 2026~ Aug. 15, 2026	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Aug. 14, 2026~ Aug. 15, 2026	N/A	Radiation (03CH07-HY)
Software	Audix	E3	RK-002396	N/A	N/A	Aug. 14, 2026~ Aug. 15, 2026	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 02,2026	Aug. 14, 2026~ Aug. 15, 2026	Mar. 01,2027	Radiation (03CH07-HY)
AC Power Source	ALL	APC-130	N/A	N/A	N/A	Aug. 20, 2026~ Aug. 21, 2026	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	N/A	Dec. 16, 2025	Aug. 20, 2026~ Aug. 21, 2026	Dec. 15, 2026	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP210031	N/A	Jun. 15, 2026	Aug. 20, 2026~ Aug. 21, 2026	Jun. 14, 2027	Conduction (CO05-HY)
Two-Line V-Network	Rohde & Schwarz	ENV 216 +EMCI-EXP-US S	100080+N-02 1	N/A	Apr. 22, 2026	Aug. 20, 2026~ Aug. 21, 2026	Apr. 21, 2027	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Aug. 20, 2026~ Aug. 21, 2026	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Aug. 07, 2026	Aug. 20, 2026~ Aug. 21, 2026	Aug. 06, 2027	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	N/A	Oct. 14, 2025	Aug. 20, 2026~ Aug. 21, 2026	Oct. 13, 2026	Conduction (CO05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Mar.10 2026	Sep.18 ,2026	Mar. 09, 2027	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 17, 2026	Sep.18 ,2026	Apr. 16, 2027	Conducted (TH05-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	Feb 23, 2026	Sep.18 ,2026	Feb 22, 2027	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303A	TP224371	N/A	Jun. 15, 2026	Sep.18 ,2026	Jun. 14, 2027	Conducted (TH05-HY)

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.02 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.10 dB
--	---------




Appendix A. Test Results of Conducted Emission Test

EUT Information

Report NO : 672113
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

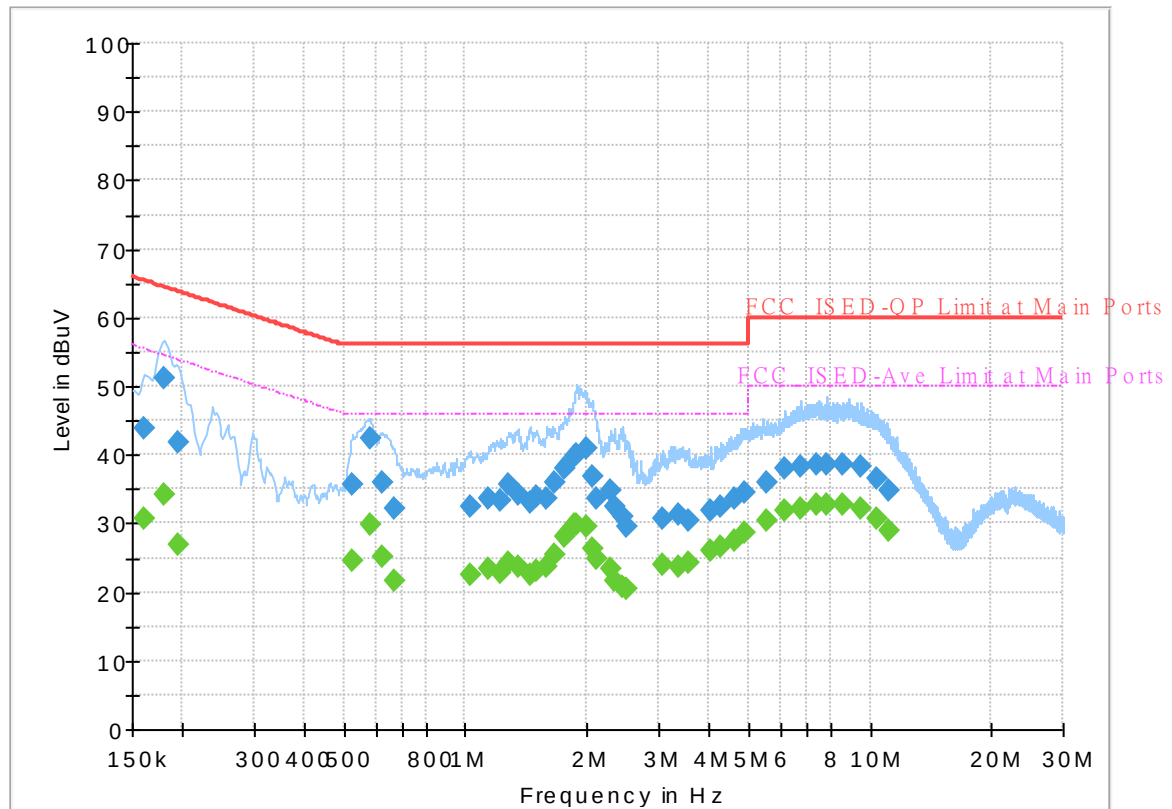

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	30.57	55.40	24.83	L1	OFF	19.9
0.161250	43.80	---	65.40	21.60	L1	OFF	19.9
0.179250	---	34.27	54.52	20.25	L1	OFF	19.9
0.179250	51.24	---	64.52	13.28	L1	OFF	19.9
0.195000	---	26.92	53.82	26.90	L1	OFF	19.9
0.195000	41.90	---	63.82	21.92	L1	OFF	19.9
0.525750	---	24.55	46.00	21.45	L1	OFF	19.9
0.525750	35.64	---	56.00	20.36	L1	OFF	19.9
0.579750	---	29.77	46.00	16.23	L1	OFF	19.9
0.579750	42.39	---	56.00	13.61	L1	OFF	19.9
0.622500	---	25.22	46.00	20.78	L1	OFF	19.9
0.622500	35.88	---	56.00	20.12	L1	OFF	19.9
0.667500	---	21.57	46.00	24.43	L1	OFF	19.9
0.667500	32.02	---	56.00	23.98	L1	OFF	19.9
1.025250	---	22.60	46.00	23.40	L1	OFF	20.0
1.025250	32.54	---	56.00	23.46	L1	OFF	20.0
1.137750	---	23.27	46.00	22.73	L1	OFF	20.0
1.137750	33.65	---	56.00	22.35	L1	OFF	20.0
1.214250	---	22.87	46.00	23.13	L1	OFF	20.0
1.214250	33.42	---	56.00	22.58	L1	OFF	20.0
1.275000	---	24.40	46.00	21.60	L1	OFF	20.0

1.275000	35.64	---	56.00	20.36	L1	OFF	20.0
1.347000	---	23.67	46.00	22.33	L1	OFF	20.0
1.347000	34.18	---	56.00	21.82	L1	OFF	20.0
1.441500	---	22.64	46.00	23.36	L1	OFF	20.0
1.441500	33.01	---	56.00	22.99	L1	OFF	20.0
1.500000	---	22.97	46.00	23.03	L1	OFF	20.0
1.500000	34.06	---	56.00	21.94	L1	OFF	20.0
1.592250	---	23.62	46.00	22.38	L1	OFF	20.0
1.592250	33.60	---	56.00	22.40	L1	OFF	20.0
1.659750	---	25.34	46.00	20.66	L1	OFF	20.0
1.659750	35.94	---	56.00	20.06	L1	OFF	20.0
1.765500	---	27.98	46.00	18.02	L1	OFF	20.0
1.765500	37.95	---	56.00	18.05	L1	OFF	20.0
1.851000	---	29.76	46.00	16.24	L1	OFF	20.0
1.851000	39.91	---	56.00	16.09	L1	OFF	20.0
1.889250	---	29.80	46.00	16.20	L1	OFF	20.0
1.889250	39.94	---	56.00	16.06	L1	OFF	20.0
1.988250	---	29.64	46.00	16.36	L1	OFF	20.0
1.988250	40.91	---	56.00	15.09	L1	OFF	20.0
2.067000	---	26.30	46.00	19.70	L1	OFF	20.0
2.067000	36.88	---	56.00	19.12	L1	OFF	20.0
2.114250	---	24.85	46.00	21.15	L1	OFF	20.0
2.114250	33.66	---	56.00	22.34	L1	OFF	20.0
2.276250	---	23.44	46.00	22.56	L1	OFF	20.0
2.276250	34.68	---	56.00	21.32	L1	OFF	20.0
2.337000	---	21.56	46.00	24.44	L1	OFF	20.0
2.337000	32.45	---	56.00	23.55	L1	OFF	20.0
2.449500	---	20.65	46.00	25.35	L1	OFF	20.0
2.449500	31.06	---	56.00	24.94	L1	OFF	20.0
2.514750	---	20.57	46.00	25.43	L1	OFF	20.0
2.514750	29.43	---	56.00	26.57	L1	OFF	20.0
3.079500	---	23.98	46.00	22.02	L1	OFF	20.0
3.079500	30.70	---	56.00	25.30	L1	OFF	20.0
3.347250	---	23.80	46.00	22.20	L1	OFF	20.1
3.347250	31.21	---	56.00	24.79	L1	OFF	20.1
3.558750	---	24.37	46.00	21.63	L1	OFF	20.1
3.558750	30.53	---	56.00	25.47	L1	OFF	20.1
4.017750	---	25.89	46.00	20.11	L1	OFF	20.1
4.017750	31.93	---	56.00	24.07	L1	OFF	20.1
4.267500	---	26.53	46.00	19.47	L1	OFF	20.1
4.267500	32.57	---	56.00	23.43	L1	OFF	20.1
4.627500	---	27.49	46.00	18.51	L1	OFF	20.1
4.627500	33.67	---	56.00	22.33	L1	OFF	20.1
4.929000	---	28.66	46.00	17.34	L1	OFF	20.2
4.929000	34.48	---	56.00	21.52	L1	OFF	20.2
5.586000	---	30.36	50.00	19.64	L1	OFF	20.2
5.586000	36.03	---	60.00	23.97	L1	OFF	20.2
6.166500	---	31.83	50.00	18.17	L1	OFF	20.3
6.166500	37.90	---	60.00	22.10	L1	OFF	20.3
6.756000	---	32.15	50.00	17.85	L1	OFF	20.3
6.756000	38.36	---	60.00	21.64	L1	OFF	20.3
7.356750	---	32.61	50.00	17.39	L1	OFF	20.3
7.356750	38.68	---	60.00	21.32	L1	OFF	20.3
7.829250	---	32.71	50.00	17.29	L1	OFF	20.4
7.829250	38.66	---	60.00	21.34	L1	OFF	20.4
8.540250	---	32.68	50.00	17.32	L1	OFF	20.4
8.540250	38.70	---	60.00	21.30	L1	OFF	20.4
9.489750	---	32.08	50.00	17.92	L1	OFF	20.5
9.489750	38.22	---	60.00	21.78	L1	OFF	20.5
10.414500	---	30.82	50.00	19.18	L1	OFF	20.5
10.414500	36.69	---	60.00	23.31	L1	OFF	20.5
11.078250	---	29.00	50.00	21.00	L1	OFF	20.6
11.078250	34.83	---	60.00	25.17	L1	OFF	20.6

EUT Information

Report NO : 672113
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

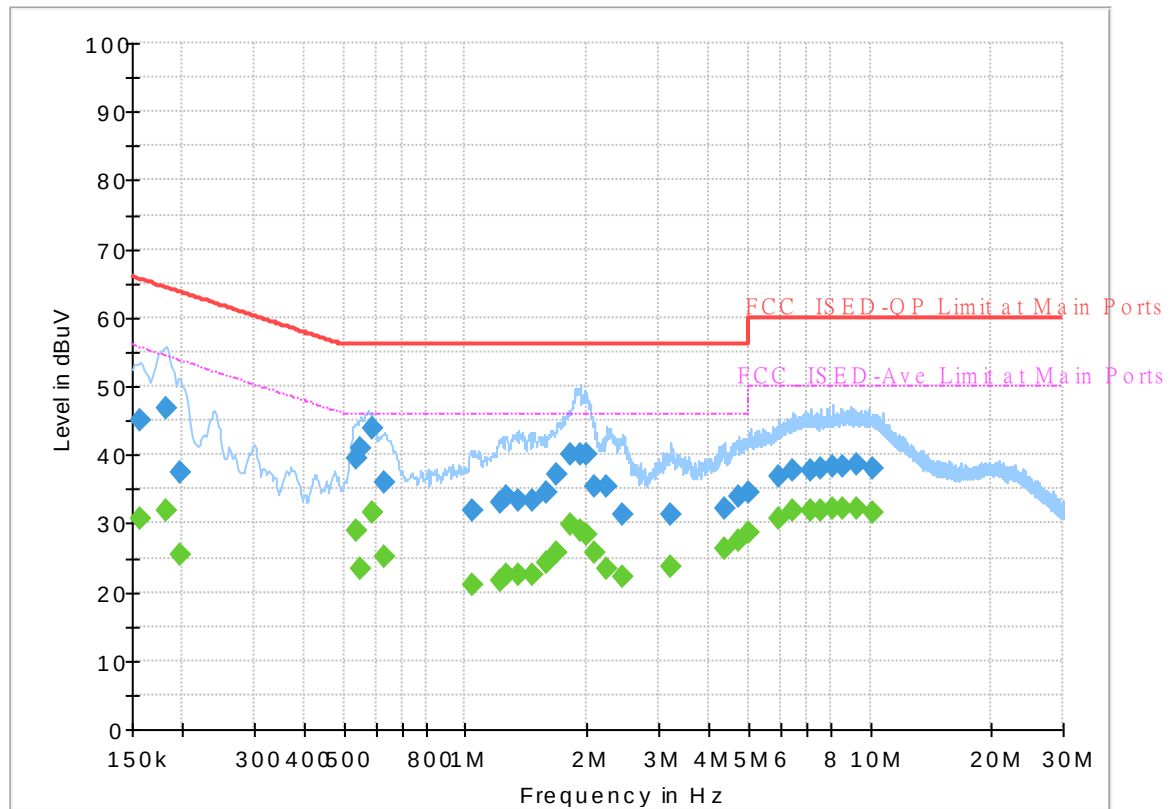

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	30.77	55.63	24.86	N	OFF	19.9
0.156750	44.90	---	65.63	20.73	N	OFF	19.9
0.181500	---	31.79	54.42	22.63	N	OFF	19.9
0.181500	46.79	---	64.42	17.63	N	OFF	19.9
0.197250	---	25.55	53.73	28.18	N	OFF	19.9
0.197250	37.42	---	63.73	26.31	N	OFF	19.9
0.537000	---	28.89	46.00	17.11	N	OFF	19.9
0.537000	39.34	---	56.00	16.66	N	OFF	19.9
0.552750	---	23.30	46.00	22.70	N	OFF	19.9
0.552750	40.96	---	56.00	15.04	N	OFF	19.9
0.586500	---	31.64	46.00	14.36	N	OFF	19.9
0.586500	43.86	---	56.00	12.14	N	OFF	19.9
0.631500	---	25.21	46.00	20.79	N	OFF	19.9
0.631500	35.93	---	56.00	20.07	N	OFF	19.9
1.036500	---	21.13	46.00	24.87	N	OFF	20.0
1.036500	31.96	---	56.00	24.04	N	OFF	20.0
1.214250	---	21.58	46.00	24.42	N	OFF	20.0
1.214250	33.11	---	56.00	22.89	N	OFF	20.0
1.266000	---	22.41	46.00	23.59	N	OFF	20.0
1.266000	34.05	---	56.00	21.95	N	OFF	20.0
1.356000	---	22.47	46.00	23.53	N	OFF	20.0

1.356000	33.45	---	56.00	22.55	N	OFF	20.0
1.470750	---	22.48	46.00	23.52	N	OFF	20.0
1.470750	33.36	---	56.00	22.64	N	OFF	20.0
1.581000	---	24.37	46.00	21.63	N	OFF	20.0
1.581000	34.56	---	56.00	21.44	N	OFF	20.0
1.689000	---	25.74	46.00	20.26	N	OFF	20.0
1.689000	37.20	---	56.00	18.80	N	OFF	20.0
1.810500	---	29.70	46.00	16.30	N	OFF	20.0
1.810500	40.06	---	56.00	15.94	N	OFF	20.0
1.927500	---	28.89	46.00	17.11	N	OFF	20.0
1.927500	40.08	---	56.00	15.92	N	OFF	20.0
1.997250	---	28.39	46.00	17.61	N	OFF	20.0
1.997250	39.97	---	56.00	16.03	N	OFF	20.0
2.076000	---	25.85	46.00	20.15	N	OFF	20.0
2.076000	35.36	---	56.00	20.64	N	OFF	20.0
2.240250	---	23.42	46.00	22.58	N	OFF	20.0
2.240250	35.37	---	56.00	20.63	N	OFF	20.0
2.454000	---	22.34	46.00	23.66	N	OFF	20.0
2.454000	31.29	---	56.00	24.71	N	OFF	20.0
3.219000	---	23.60	46.00	22.40	N	OFF	20.1
3.219000	31.35	---	56.00	24.65	N	OFF	20.1
4.368750	---	26.32	46.00	19.68	N	OFF	20.1
4.368750	32.18	---	56.00	23.82	N	OFF	20.1
4.715250	---	27.53	46.00	18.47	N	OFF	20.2
4.715250	33.84	---	56.00	22.16	N	OFF	20.2
5.030250	---	28.62	50.00	21.38	N	OFF	20.2
5.030250	34.42	---	60.00	25.58	N	OFF	20.2
5.973000	---	30.60	50.00	19.40	N	OFF	20.3
5.973000	36.78	---	60.00	23.22	N	OFF	20.3
6.441000	---	31.78	50.00	18.22	N	OFF	20.4
6.441000	37.74	---	60.00	22.26	N	OFF	20.4
7.131750	---	31.80	50.00	18.20	N	OFF	20.4
7.131750	37.85	---	60.00	22.15	N	OFF	20.4
7.590750	---	31.88	50.00	18.12	N	OFF	20.5
7.590750	38.01	---	60.00	21.99	N	OFF	20.5
8.052000	---	32.22	50.00	17.78	N	OFF	20.5
8.052000	38.19	---	60.00	21.81	N	OFF	20.5
8.578500	---	32.16	50.00	17.84	N	OFF	20.5
8.578500	38.39	---	60.00	21.61	N	OFF	20.5
9.316500	---	32.24	50.00	17.76	N	OFF	20.6
9.316500	38.59	---	60.00	21.41	N	OFF	20.6
10.119750	---	31.70	50.00	18.30	N	OFF	20.7
10.119750	37.96	---	60.00	22.04	N	OFF	20.7

EUT Information

Report NO : 672113
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

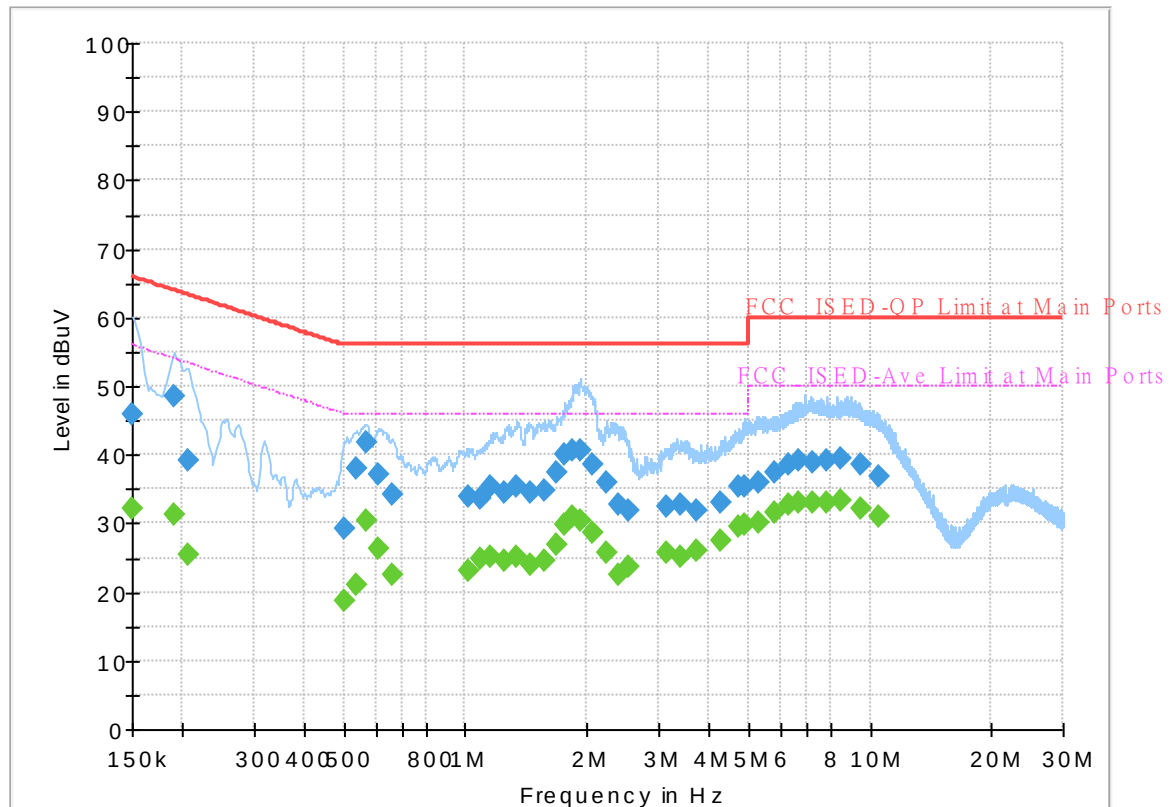

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.25	56.00	23.75	L1	OFF	19.9
0.150000	46.05	---	66.00	19.95	L1	OFF	19.9
0.190500	---	31.41	54.02	22.61	L1	OFF	19.9
0.190500	48.56	---	64.02	15.46	L1	OFF	19.9
0.206250	---	25.37	53.36	27.99	L1	OFF	19.9
0.206250	39.26	---	63.36	24.10	L1	OFF	19.9
0.501000	---	18.81	46.00	27.19	L1	OFF	19.9
0.501000	29.33	---	56.00	26.67	L1	OFF	19.9
0.537000	---	20.94	46.00	25.06	L1	OFF	19.9
0.537000	38.12	---	56.00	17.88	L1	OFF	19.9
0.568500	---	30.53	46.00	15.47	L1	OFF	19.9
0.568500	41.69	---	56.00	14.31	L1	OFF	19.9
0.611250	---	26.30	46.00	19.70	L1	OFF	19.9
0.611250	37.15	---	56.00	18.85	L1	OFF	19.9
0.663000	---	22.42	46.00	23.58	L1	OFF	19.9
0.663000	34.10	---	56.00	21.90	L1	OFF	19.9
1.020750	---	23.08	46.00	22.92	L1	OFF	20.0
1.020750	34.02	---	56.00	21.98	L1	OFF	20.0
1.083750	---	24.79	46.00	21.21	L1	OFF	20.0
1.083750	33.70	---	56.00	22.30	L1	OFF	20.0
1.153500	---	25.11	46.00	20.89	L1	OFF	20.0

1.153500	35.34	---	56.00	20.66	L1	OFF	20.0
1.254750	---	24.51	46.00	21.49	L1	OFF	20.0
1.254750	34.39	---	56.00	21.61	L1	OFF	20.0
1.342500	---	25.19	46.00	20.81	L1	OFF	20.0
1.342500	35.27	---	56.00	20.73	L1	OFF	20.0
1.443750	---	23.85	46.00	22.15	L1	OFF	20.0
1.443750	34.60	---	56.00	21.40	L1	OFF	20.0
1.563000	---	24.57	46.00	21.43	L1	OFF	20.0
1.563000	34.71	---	56.00	21.29	L1	OFF	20.0
1.682250	---	26.87	46.00	19.13	L1	OFF	20.0
1.682250	37.34	---	56.00	18.66	L1	OFF	20.0
1.763250	---	29.88	46.00	16.12	L1	OFF	20.0
1.763250	39.98	---	56.00	16.02	L1	OFF	20.0
1.842000	---	31.12	46.00	14.88	L1	OFF	20.0
1.842000	40.62	---	56.00	15.38	L1	OFF	20.0
1.923000	---	30.45	46.00	15.55	L1	OFF	20.0
1.923000	40.60	---	56.00	15.40	L1	OFF	20.0
2.051250	---	28.68	46.00	17.32	L1	OFF	20.0
2.051250	38.74	---	56.00	17.26	L1	OFF	20.0
2.244750	---	25.69	46.00	20.31	L1	OFF	20.0
2.244750	35.97	---	56.00	20.03	L1	OFF	20.0
2.397750	---	22.44	46.00	23.56	L1	OFF	20.0
2.397750	32.76	---	56.00	23.24	L1	OFF	20.0
2.530500	---	23.64	46.00	22.36	L1	OFF	20.0
2.530500	31.93	---	56.00	24.07	L1	OFF	20.0
3.156000	---	25.85	46.00	20.15	L1	OFF	20.0
3.156000	32.35	---	56.00	23.65	L1	OFF	20.0
3.408000	---	25.19	46.00	20.81	L1	OFF	20.1
3.408000	32.75	---	56.00	23.25	L1	OFF	20.1
3.725250	---	25.97	46.00	20.03	L1	OFF	20.1
3.725250	31.73	---	56.00	24.27	L1	OFF	20.1
4.269750	---	27.55	46.00	18.45	L1	OFF	20.1
4.269750	33.16	---	56.00	22.84	L1	OFF	20.1
4.713000	---	29.63	46.00	16.37	L1	OFF	20.1
4.713000	35.51	---	56.00	20.49	L1	OFF	20.1
4.917750	---	29.75	46.00	16.25	L1	OFF	20.2
4.917750	35.28	---	56.00	20.72	L1	OFF	20.2
5.293500	---	30.10	50.00	19.90	L1	OFF	20.2
5.293500	36.10	---	60.00	23.90	L1	OFF	20.2
5.820000	---	31.59	50.00	18.41	L1	OFF	20.2
5.820000	37.52	---	60.00	22.48	L1	OFF	20.2
6.328500	---	32.68	50.00	17.32	L1	OFF	20.3
6.328500	38.68	---	60.00	21.32	L1	OFF	20.3
6.672750	---	32.90	50.00	17.10	L1	OFF	20.3
6.672750	39.08	---	60.00	20.92	L1	OFF	20.3
7.181250	---	33.07	50.00	16.93	L1	OFF	20.3
7.181250	38.90	---	60.00	21.10	L1	OFF	20.3
7.824750	---	32.99	50.00	17.01	L1	OFF	20.4
7.824750	39.20	---	60.00	20.80	L1	OFF	20.4
8.513250	---	33.20	50.00	16.80	L1	OFF	20.4
8.513250	39.37	---	60.00	20.63	L1	OFF	20.4
9.514500	---	32.25	50.00	17.75	L1	OFF	20.5
9.514500	38.50	---	60.00	21.50	L1	OFF	20.5
10.486500	---	30.85	50.00	19.15	L1	OFF	20.5
10.486500	36.90	---	60.00	23.10	L1	OFF	20.5

EUT Information

Report NO : 672113
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

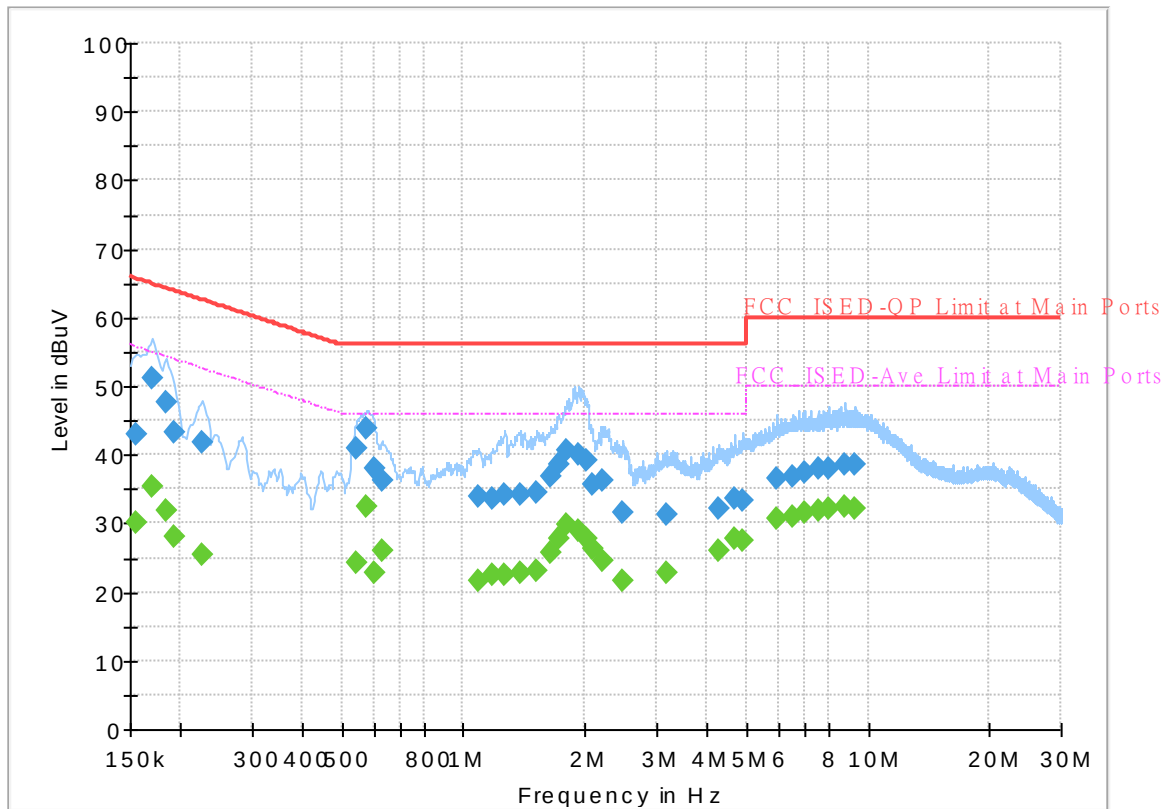

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	30.01	55.75	25.74	N	OFF	19.9
0.154500	43.11	---	65.75	22.64	N	OFF	19.9
0.170250	---	35.41	54.95	19.54	N	OFF	19.9
0.170250	51.25	---	64.95	13.70	N	OFF	19.9
0.183750	---	31.98	54.31	22.33	N	OFF	19.9
0.183750	47.55	---	64.31	16.76	N	OFF	19.9
0.192750	---	28.01	53.92	25.91	N	OFF	19.9
0.192750	43.16	---	63.92	20.76	N	OFF	19.9
0.226500	---	25.53	52.58	27.05	N	OFF	19.9
0.226500	41.78	---	62.58	20.80	N	OFF	19.9
0.546000	---	24.32	46.00	21.68	N	OFF	19.9
0.546000	40.80	---	56.00	15.20	N	OFF	19.9
0.577500	---	32.45	46.00	13.55	N	OFF	19.9
0.577500	43.71	---	56.00	12.29	N	OFF	19.9
0.600000	---	22.92	46.00	23.08	N	OFF	19.9
0.600000	37.99	---	56.00	18.01	N	OFF	19.9
0.627000	---	26.05	46.00	19.95	N	OFF	19.9
0.627000	36.20	---	56.00	19.80	N	OFF	19.9
1.086000	---	21.74	46.00	24.26	N	OFF	20.0
1.086000	34.06	---	56.00	21.94	N	OFF	20.0
1.176000	---	22.44	46.00	23.56	N	OFF	20.0

1.176000	33.68	---	56.00	22.32	N	OFF	20.0
1.266000	---	22.54	46.00	23.46	N	OFF	20.0
1.266000	34.19	---	56.00	21.81	N	OFF	20.0
1.380750	---	22.68	46.00	23.32	N	OFF	20.0
1.380750	34.22	---	56.00	21.78	N	OFF	20.0
1.518000	---	22.99	46.00	23.01	N	OFF	20.0
1.518000	34.40	---	56.00	21.60	N	OFF	20.0
1.635000	---	25.72	46.00	20.28	N	OFF	20.0
1.635000	36.82	---	56.00	19.18	N	OFF	20.0
1.718250	---	27.64	46.00	18.36	N	OFF	20.0
1.718250	38.63	---	56.00	17.37	N	OFF	20.0
1.806000	---	29.96	46.00	16.04	N	OFF	20.0
1.806000	40.50	---	56.00	15.50	N	OFF	20.0
1.920750	---	29.07	46.00	16.93	N	OFF	20.0
1.920750	40.16	---	56.00	15.84	N	OFF	20.0
2.015250	---	27.85	46.00	18.15	N	OFF	20.0
2.015250	39.22	---	56.00	16.78	N	OFF	20.0
2.076000	---	26.26	46.00	19.74	N	OFF	20.0
2.076000	35.59	---	56.00	20.41	N	OFF	20.0
2.206500	---	24.58	46.00	21.42	N	OFF	20.0
2.206500	36.36	---	56.00	19.64	N	OFF	20.0
2.481000	---	21.50	46.00	24.50	N	OFF	20.0
2.481000	31.46	---	56.00	24.54	N	OFF	20.0
3.183000	---	22.76	46.00	23.24	N	OFF	20.1
3.183000	31.15	---	56.00	24.85	N	OFF	20.1
4.276500	---	26.03	46.00	19.97	N	OFF	20.1
4.276500	32.18	---	56.00	23.82	N	OFF	20.1
4.665750	---	27.90	46.00	18.10	N	OFF	20.2
4.665750	33.60	---	56.00	22.40	N	OFF	20.2
4.922250	---	27.42	46.00	18.58	N	OFF	20.2
4.922250	33.42	---	56.00	22.58	N	OFF	20.2
5.959500	---	30.65	50.00	19.35	N	OFF	20.3
5.959500	36.57	---	60.00	23.43	N	OFF	20.3
6.486000	---	30.97	50.00	19.03	N	OFF	20.4
6.486000	36.95	---	60.00	23.05	N	OFF	20.4
6.999000	---	31.68	50.00	18.32	N	OFF	20.4
6.999000	37.40	---	60.00	22.60	N	OFF	20.4
7.514250	---	31.96	50.00	18.04	N	OFF	20.4
7.514250	37.98	---	60.00	22.02	N	OFF	20.4
8.036250	---	32.27	50.00	17.73	N	OFF	20.5
8.036250	38.08	---	60.00	21.92	N	OFF	20.5
8.810250	---	32.38	50.00	17.62	N	OFF	20.6
8.810250	38.55	---	60.00	21.45	N	OFF	20.6
9.325500	---	32.24	50.00	17.76	N	OFF	20.6
9.325500	38.46	---	60.00	21.54	N	OFF	20.6

EUT Information

Report NO : 672113
 Test Mode : Mode 3
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

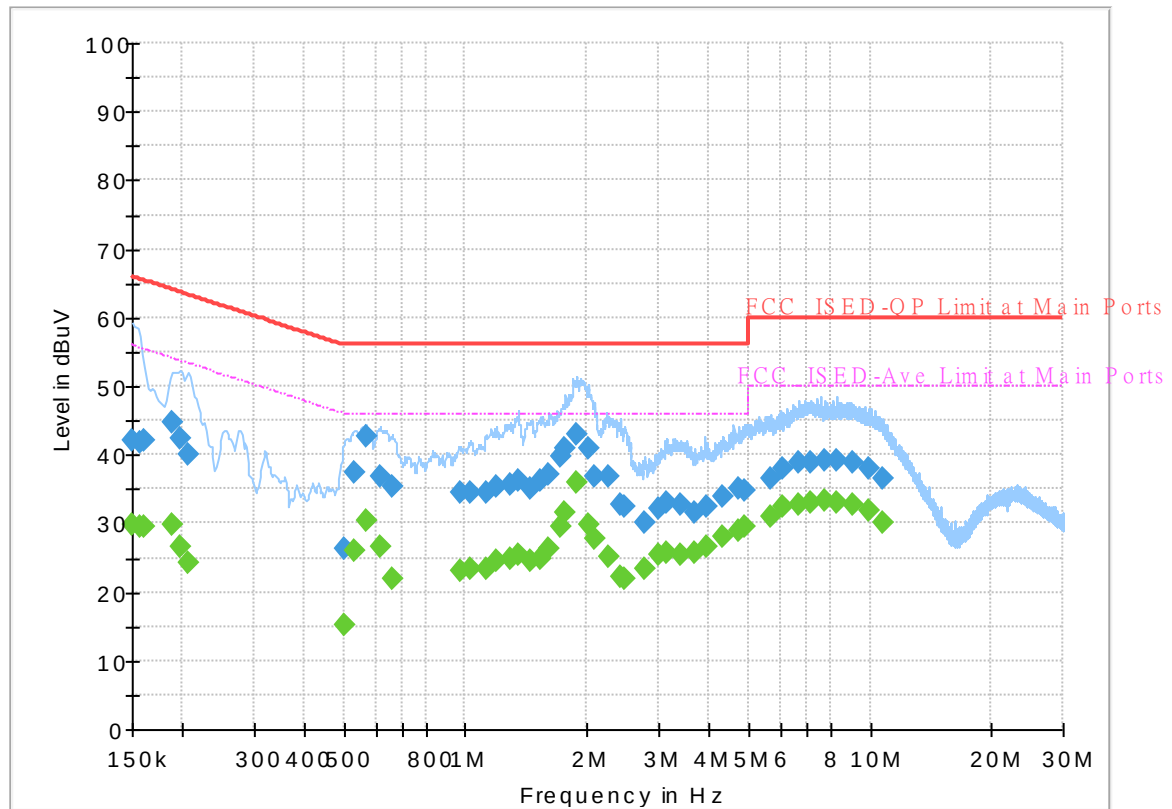

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	29.86	56.00	26.14	L1	OFF	19.9
0.150000	42.17	---	66.00	23.83	L1	OFF	19.9
0.156750	---	29.47	55.63	26.16	L1	OFF	19.9
0.156750	41.80	---	65.63	23.83	L1	OFF	19.9
0.161250	---	29.43	55.40	25.97	L1	OFF	19.9
0.161250	42.04	---	65.40	23.36	L1	OFF	19.9
0.188250	---	29.94	54.11	24.17	L1	OFF	19.9
0.188250	44.83	---	64.11	19.28	L1	OFF	19.9
0.197250	---	26.71	53.73	27.02	L1	OFF	19.9
0.197250	42.33	---	63.73	21.40	L1	OFF	19.9
0.206250	---	24.25	53.36	29.11	L1	OFF	19.9
0.206250	39.94	---	63.36	23.42	L1	OFF	19.9
0.503250	---	15.13	46.00	30.87	L1	OFF	19.9
0.503250	26.34	---	56.00	29.66	L1	OFF	19.9
0.530250	---	26.06	46.00	19.94	L1	OFF	19.9
0.530250	37.36	---	56.00	18.64	L1	OFF	19.9
0.568500	---	30.32	46.00	15.68	L1	OFF	19.9
0.568500	42.76	---	56.00	13.24	L1	OFF	19.9
0.615750	---	26.69	46.00	19.31	L1	OFF	19.9
0.615750	36.83	---	56.00	19.17	L1	OFF	19.9
0.658500	---	22.06	46.00	23.94	L1	OFF	19.9

0.658500	35.27	---	56.00	20.73	L1	OFF	19.9
0.969000	---	23.15	46.00	22.85	L1	OFF	20.0
0.969000	34.64	---	56.00	21.36	L1	OFF	20.0
1.032000	---	23.40	46.00	22.60	L1	OFF	20.0
1.032000	34.58	---	56.00	21.42	L1	OFF	20.0
1.122000	---	23.25	46.00	22.75	L1	OFF	20.0
1.122000	34.61	---	56.00	21.39	L1	OFF	20.0
1.196250	---	24.68	46.00	21.32	L1	OFF	20.0
1.196250	35.46	---	56.00	20.54	L1	OFF	20.0
1.293000	---	24.97	46.00	21.03	L1	OFF	20.0
1.293000	35.63	---	56.00	20.37	L1	OFF	20.0
1.349250	---	25.37	46.00	20.63	L1	OFF	20.0
1.349250	36.32	---	56.00	19.68	L1	OFF	20.0
1.443750	---	24.44	46.00	21.56	L1	OFF	20.0
1.443750	35.20	---	56.00	20.80	L1	OFF	20.0
1.524750	---	24.90	46.00	21.10	L1	OFF	20.0
1.524750	36.26	---	56.00	19.74	L1	OFF	20.0
1.612500	---	26.40	46.00	19.60	L1	OFF	20.0
1.612500	37.16	---	56.00	18.84	L1	OFF	20.0
1.716000	---	29.41	46.00	16.59	L1	OFF	20.0
1.716000	39.72	---	56.00	16.28	L1	OFF	20.0
1.763250	---	31.46	46.00	14.54	L1	OFF	20.0
1.763250	41.01	---	56.00	14.99	L1	OFF	20.0
1.880250	---	36.00	46.00	10.00	L1	OFF	20.0
1.880250	42.98	---	56.00	13.02	L1	OFF	20.0
2.010750	---	29.79	46.00	16.21	L1	OFF	20.0
2.010750	40.97	---	56.00	15.03	L1	OFF	20.0
2.085000	---	27.89	46.00	18.11	L1	OFF	20.0
2.085000	36.75	---	56.00	19.25	L1	OFF	20.0
2.267250	---	25.11	46.00	20.89	L1	OFF	20.0
2.267250	36.95	---	56.00	19.05	L1	OFF	20.0
2.418000	---	22.24	46.00	23.76	L1	OFF	20.0
2.418000	32.71	---	56.00	23.29	L1	OFF	20.0
2.485500	---	22.01	46.00	23.99	L1	OFF	20.0
2.485500	32.53	---	56.00	23.47	L1	OFF	20.0
2.764500	---	23.25	46.00	22.75	L1	OFF	20.0
2.764500	30.15	---	56.00	25.85	L1	OFF	20.0
3.003000	---	25.42	46.00	20.58	L1	OFF	20.0
3.003000	32.12	---	56.00	23.88	L1	OFF	20.0
3.149250	---	25.74	46.00	20.26	L1	OFF	20.0
3.149250	33.17	---	56.00	22.83	L1	OFF	20.0
3.392250	---	25.32	46.00	20.68	L1	OFF	20.1
3.392250	32.76	---	56.00	23.24	L1	OFF	20.1
3.684750	---	25.70	46.00	20.30	L1	OFF	20.1
3.684750	31.60	---	56.00	24.40	L1	OFF	20.1
3.936750	---	26.60	46.00	19.40	L1	OFF	20.1
3.936750	32.44	---	56.00	23.56	L1	OFF	20.1
4.312500	---	28.00	46.00	18.00	L1	OFF	20.1
4.312500	33.86	---	56.00	22.14	L1	OFF	20.1
4.719750	---	28.88	46.00	17.12	L1	OFF	20.1
4.719750	35.03	---	56.00	20.97	L1	OFF	20.1
4.908750	---	29.43	46.00	16.57	L1	OFF	20.2
4.908750	34.89	---	56.00	21.11	L1	OFF	20.2
5.662500	---	31.05	50.00	18.95	L1	OFF	20.2
5.662500	36.57	---	60.00	23.43	L1	OFF	20.2
6.119250	---	32.36	50.00	17.64	L1	OFF	20.3
6.119250	38.12	---	60.00	21.88	L1	OFF	20.3
6.672750	---	32.86	50.00	17.14	L1	OFF	20.3
6.672750	38.79	---	60.00	21.21	L1	OFF	20.3
7.136250	---	32.99	50.00	17.01	L1	OFF	20.3
7.136250	38.82	---	60.00	21.18	L1	OFF	20.3
7.737000	---	33.24	50.00	16.76	L1	OFF	20.4
7.737000	39.23	---	60.00	20.77	L1	OFF	20.4
8.283750	---	32.96	50.00	17.04	L1	OFF	20.4
8.283750	39.08	---	60.00	20.92	L1	OFF	20.4
9.026250	---	32.70	50.00	17.30	L1	OFF	20.5
9.026250	38.82	---	60.00	21.18	L1	OFF	20.5
9.892500	---	31.88	50.00	18.12	L1	OFF	20.5
9.892500	38.10	---	60.00	21.90	L1	OFF	20.5
10.698000	---	30.26	50.00	19.74	L1	OFF	20.6
10.698000	36.41	---	60.00	23.59	L1	OFF	20.6

EUT Information

Report NO : 672113
 Test Mode : Mode 3
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

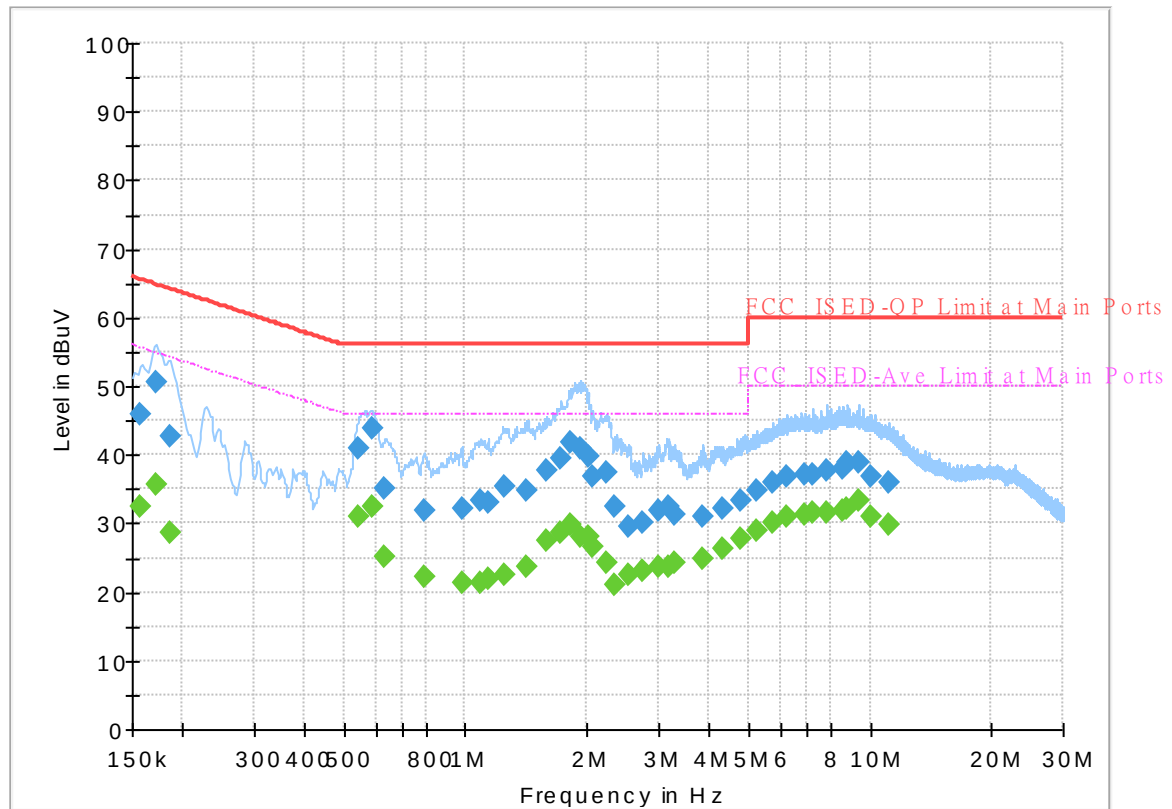

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	32.47	55.63	23.16	N	OFF	19.9
0.156750	46.03	---	65.63	19.60	N	OFF	19.9
0.172500	---	35.64	54.84	19.20	N	OFF	19.9
0.172500	50.67	---	64.84	14.17	N	OFF	19.9
0.186000	---	28.76	54.21	25.45	N	OFF	19.9
0.186000	42.63	---	64.21	21.58	N	OFF	19.9
0.543750	---	30.87	46.00	15.13	N	OFF	19.9
0.543750	40.81	---	56.00	15.19	N	OFF	19.9
0.586500	---	32.48	46.00	13.52	N	OFF	19.9
0.586500	43.97	---	56.00	12.03	N	OFF	19.9
0.633750	---	25.15	46.00	20.85	N	OFF	19.9
0.633750	35.00	---	56.00	21.00	N	OFF	19.9
0.791250	---	22.31	46.00	23.69	N	OFF	20.0
0.791250	31.90	---	56.00	24.10	N	OFF	20.0
0.978000	---	21.26	46.00	24.74	N	OFF	20.0
0.978000	32.22	---	56.00	23.78	N	OFF	20.0
1.088250	---	21.21	46.00	24.79	N	OFF	20.0
1.088250	33.35	---	56.00	22.65	N	OFF	20.0
1.142250	---	22.05	46.00	23.95	N	OFF	20.0
1.142250	32.95	---	56.00	23.05	N	OFF	20.0
1.252500	---	22.65	46.00	23.35	N	OFF	20.0

1.252500	35.38	---	56.00	20.62	N	OFF	20.0
1.416750	---	23.68	46.00	22.32	N	OFF	20.0
1.416750	34.77	---	56.00	21.23	N	OFF	20.0
1.590000	---	27.59	46.00	18.41	N	OFF	20.0
1.590000	37.77	---	56.00	18.23	N	OFF	20.0
1.711500	---	28.74	46.00	17.26	N	OFF	20.0
1.711500	39.60	---	56.00	16.40	N	OFF	20.0
1.812750	---	29.81	46.00	16.19	N	OFF	20.0
1.812750	41.69	---	56.00	14.31	N	OFF	20.0
1.927500	---	28.18	46.00	17.82	N	OFF	20.0
1.927500	41.04	---	56.00	14.96	N	OFF	20.0
2.008500	---	28.10	46.00	17.90	N	OFF	20.0
2.008500	39.78	---	56.00	16.22	N	OFF	20.0
2.060250	---	26.52	46.00	19.48	N	OFF	20.0
2.060250	36.95	---	56.00	19.05	N	OFF	20.0
2.233500	---	24.33	46.00	21.67	N	OFF	20.0
2.233500	37.41	---	56.00	18.59	N	OFF	20.0
2.343750	---	21.15	46.00	24.85	N	OFF	20.0
2.343750	32.60	---	56.00	23.40	N	OFF	20.0
2.537250	---	22.51	46.00	23.49	N	OFF	20.0
2.537250	29.60	---	56.00	26.40	N	OFF	20.0
2.744250	---	22.97	46.00	23.03	N	OFF	20.1
2.744250	30.19	---	56.00	25.81	N	OFF	20.1
2.989500	---	23.58	46.00	22.42	N	OFF	20.1
2.989500	31.89	---	56.00	24.11	N	OFF	20.1
3.165000	---	23.68	46.00	22.32	N	OFF	20.1
3.165000	32.38	---	56.00	23.62	N	OFF	20.1
3.291000	---	24.41	46.00	21.59	N	OFF	20.1
3.291000	31.16	---	56.00	24.84	N	OFF	20.1
3.853500	---	24.73	46.00	21.27	N	OFF	20.1
3.853500	31.01	---	56.00	24.99	N	OFF	20.1
4.303500	---	26.45	46.00	19.55	N	OFF	20.1
4.303500	32.02	---	56.00	23.98	N	OFF	20.1
4.771500	---	27.64	46.00	18.36	N	OFF	20.2
4.771500	33.31	---	56.00	22.69	N	OFF	20.2
5.223750	---	28.84	50.00	21.16	N	OFF	20.2
5.223750	34.82	---	60.00	25.18	N	OFF	20.2
5.718750	---	30.22	50.00	19.78	N	OFF	20.3
5.718750	35.98	---	60.00	24.02	N	OFF	20.3
6.258750	---	31.00	50.00	19.00	N	OFF	20.3
6.258750	36.94	---	60.00	23.06	N	OFF	20.3
6.866250	---	31.14	50.00	18.86	N	OFF	20.4
6.866250	37.14	---	60.00	22.86	N	OFF	20.4
7.257750	---	31.55	50.00	18.45	N	OFF	20.4
7.257750	37.22	---	60.00	22.78	N	OFF	20.4
7.800000	---	31.64	50.00	18.36	N	OFF	20.5
7.800000	37.86	---	60.00	22.14	N	OFF	20.5
8.551500	---	31.86	50.00	18.14	N	OFF	20.5
8.551500	38.13	---	60.00	21.87	N	OFF	20.5
8.812500	---	32.15	50.00	17.85	N	OFF	20.6
8.812500	38.77	---	60.00	21.23	N	OFF	20.6
9.361500	---	33.26	50.00	16.74	N	OFF	20.6
9.361500	38.76	---	60.00	21.24	N	OFF	20.6
10.095000	---	30.96	50.00	19.04	N	OFF	20.7
10.095000	36.97	---	60.00	23.03	N	OFF	20.7
11.085000	---	29.85	50.00	20.15	N	OFF	20.7
11.085000	35.82	---	60.00	24.18	N	OFF	20.7

EUT Information

Report NO : 672113
 Test Mode : Mode 4
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

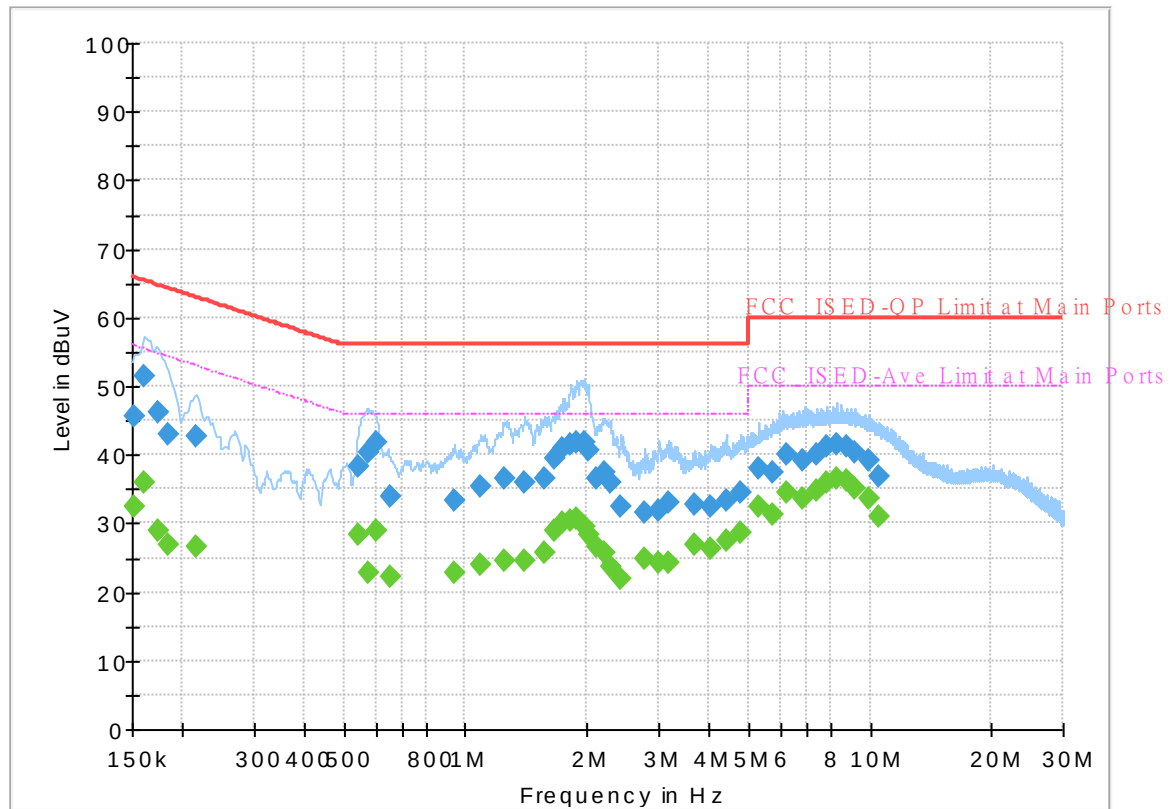

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	32.57	55.88	23.31	L1	OFF	19.9
0.152250	45.68	---	65.88	20.20	L1	OFF	19.9
0.161250	---	35.95	55.40	19.45	L1	OFF	19.9
0.161250	51.35	---	65.40	14.05	L1	OFF	19.9
0.174750	---	29.00	54.73	25.73	L1	OFF	19.9
0.174750	46.23	---	64.73	18.50	L1	OFF	19.9
0.183750	---	27.00	54.31	27.31	L1	OFF	19.9
0.183750	42.85	---	64.31	21.46	L1	OFF	19.9
0.215250	---	26.50	53.00	26.50	L1	OFF	19.9
0.215250	42.68	---	63.00	20.32	L1	OFF	19.9
0.543750	---	28.41	46.00	17.59	L1	OFF	19.9
0.543750	38.18	---	56.00	17.82	L1	OFF	19.9
0.573000	---	22.74	46.00	23.26	L1	OFF	19.9
0.573000	40.46	---	56.00	15.54	L1	OFF	19.9
0.600000	---	28.96	46.00	17.04	L1	OFF	19.9
0.600000	41.72	---	56.00	14.28	L1	OFF	19.9
0.651750	---	22.14	46.00	23.86	L1	OFF	19.9
0.651750	33.89	---	56.00	22.11	L1	OFF	19.9
0.942000	---	22.83	46.00	23.17	L1	OFF	20.0
0.942000	33.25	---	56.00	22.75	L1	OFF	20.0
1.095000	---	24.11	46.00	21.89	L1	OFF	20.0

1.095000	35.25	---	56.00	20.75	L1	OFF	20.0
1.248000	---	24.50	46.00	21.50	L1	OFF	20.0
1.248000	36.44	---	56.00	19.56	L1	OFF	20.0
1.401000	---	24.42	46.00	21.58	L1	OFF	20.0
1.401000	35.99	---	56.00	20.01	L1	OFF	20.0
1.563000	---	25.83	46.00	20.17	L1	OFF	20.0
1.563000	36.43	---	56.00	19.57	L1	OFF	20.0
1.666500	---	28.88	46.00	17.12	L1	OFF	20.0
1.666500	39.44	---	56.00	16.56	L1	OFF	20.0
1.743000	---	30.14	46.00	15.86	L1	OFF	20.0
1.743000	40.87	---	56.00	15.13	L1	OFF	20.0
1.824000	---	30.45	46.00	15.55	L1	OFF	20.0
1.824000	41.63	---	56.00	14.37	L1	OFF	20.0
1.887000	---	30.57	46.00	15.43	L1	OFF	20.0
1.887000	41.70	---	56.00	14.30	L1	OFF	20.0
1.959000	---	29.42	46.00	16.58	L1	OFF	20.0
1.959000	41.86	---	56.00	14.14	L1	OFF	20.0
2.008500	---	28.40	46.00	17.60	L1	OFF	20.0
2.008500	40.51	---	56.00	15.49	L1	OFF	20.0
2.118750	---	26.63	46.00	19.37	L1	OFF	20.0
2.118750	36.59	---	56.00	19.41	L1	OFF	20.0
2.202000	---	25.65	46.00	20.35	L1	OFF	20.0
2.202000	37.50	---	56.00	18.50	L1	OFF	20.0
2.278500	---	23.69	46.00	22.31	L1	OFF	20.0
2.278500	35.95	---	56.00	20.05	L1	OFF	20.0
2.429250	---	21.95	46.00	24.05	L1	OFF	20.0
2.429250	32.39	---	56.00	23.61	L1	OFF	20.0
2.762250	---	24.90	46.00	21.10	L1	OFF	20.0
2.762250	31.59	---	56.00	24.41	L1	OFF	20.0
3.003000	---	24.21	46.00	21.79	L1	OFF	20.0
3.003000	32.01	---	56.00	23.99	L1	OFF	20.0
3.165000	---	24.20	46.00	21.80	L1	OFF	20.0
3.165000	32.94	---	56.00	23.06	L1	OFF	20.0
3.678000	---	26.98	46.00	19.02	L1	OFF	20.1
3.678000	32.87	---	56.00	23.13	L1	OFF	20.1
4.044750	---	26.36	46.00	19.64	L1	OFF	20.1
4.044750	32.33	---	56.00	23.67	L1	OFF	20.1
4.402500	---	27.56	46.00	18.44	L1	OFF	20.1
4.402500	33.47	---	56.00	22.53	L1	OFF	20.1
4.812000	---	28.70	46.00	17.30	L1	OFF	20.1
4.812000	34.63	---	56.00	21.37	L1	OFF	20.1
5.291250	---	32.46	50.00	17.54	L1	OFF	20.2
5.291250	37.88	---	60.00	22.12	L1	OFF	20.2
5.781750	---	31.29	50.00	18.71	L1	OFF	20.2
5.781750	37.30	---	60.00	22.70	L1	OFF	20.2
6.211500	---	34.49	50.00	15.51	L1	OFF	20.3
6.211500	39.92	---	60.00	20.08	L1	OFF	20.3
6.787500	---	33.51	50.00	16.49	L1	OFF	20.3
6.787500	39.27	---	60.00	20.73	L1	OFF	20.3
7.363500	---	34.81	50.00	15.19	L1	OFF	20.3
7.363500	40.17	---	60.00	19.83	L1	OFF	20.3
7.820250	---	36.00	50.00	14.00	L1	OFF	20.4
7.820250	41.18	---	60.00	18.82	L1	OFF	20.4
8.281500	---	36.45	50.00	13.55	L1	OFF	20.4
8.281500	41.45	---	60.00	18.55	L1	OFF	20.4
8.740500	---	36.13	50.00	13.87	L1	OFF	20.4
8.740500	41.12	---	60.00	18.88	L1	OFF	20.4
9.199500	---	35.17	50.00	14.83	L1	OFF	20.5
9.199500	40.41	---	60.00	19.59	L1	OFF	20.5
9.892500	---	33.49	50.00	16.51	L1	OFF	20.5
9.892500	39.04	---	60.00	20.96	L1	OFF	20.5
10.468500	---	31.13	50.00	18.87	L1	OFF	20.5
10.468500	36.85	---	60.00	23.15	L1	OFF	20.5

EUT Information

Report NO : 672113
 Test Mode : Mode 4
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

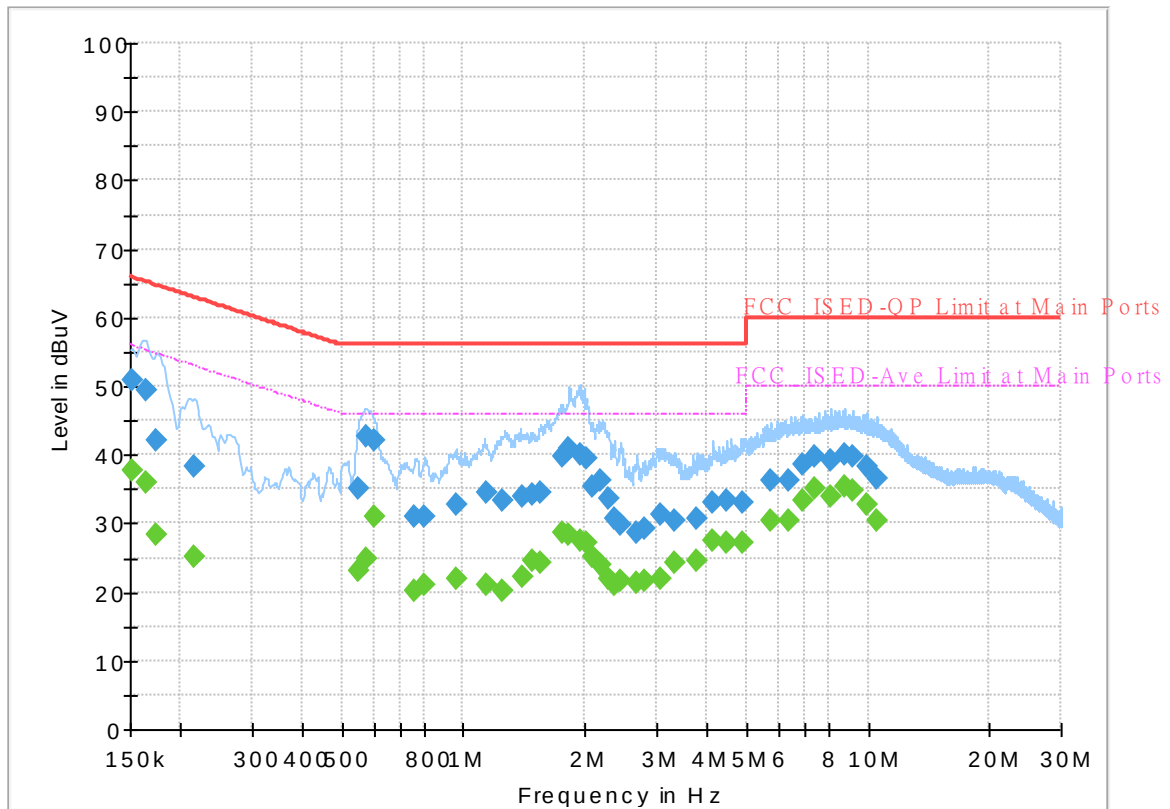

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.81	55.88	18.07	N	OFF	19.9
0.152250	50.92	---	65.88	14.96	N	OFF	19.9
0.163500	---	35.90	55.28	19.38	N	OFF	19.9
0.163500	49.43	---	65.28	15.85	N	OFF	19.9
0.174750	---	28.45	54.73	26.28	N	OFF	19.9
0.174750	42.08	---	64.73	22.65	N	OFF	19.9
0.215250	---	25.21	53.00	27.79	N	OFF	19.9
0.215250	38.44	---	63.00	24.56	N	OFF	19.9
0.548250	---	23.07	46.00	22.93	N	OFF	19.9
0.548250	35.22	---	56.00	20.78	N	OFF	19.9
0.573000	---	24.96	46.00	21.04	N	OFF	19.9
0.573000	42.80	---	56.00	13.20	N	OFF	19.9
0.604500	---	31.00	46.00	15.00	N	OFF	19.9
0.604500	42.15	---	56.00	13.85	N	OFF	19.9
0.757500	---	20.19	46.00	25.81	N	OFF	20.0
0.757500	30.91	---	56.00	25.09	N	OFF	20.0
0.804750	---	21.17	46.00	24.83	N	OFF	20.0
0.804750	31.05	---	56.00	24.95	N	OFF	20.0
0.955500	---	22.04	46.00	23.96	N	OFF	20.0
0.955500	32.61	---	56.00	23.39	N	OFF	20.0
1.140000	---	20.94	46.00	25.06	N	OFF	20.0

1.140000	34.48	---	56.00	21.52	N	OFF	20.0
1.248000	---	20.22	46.00	25.78	N	OFF	20.0
1.248000	33.48	---	56.00	22.52	N	OFF	20.0
1.401000	---	22.27	46.00	23.73	N	OFF	20.0
1.401000	33.83	---	56.00	22.17	N	OFF	20.0
1.486500	---	24.45	46.00	21.55	N	OFF	20.0
1.486500	34.13	---	56.00	21.87	N	OFF	20.0
1.551750	---	24.32	46.00	21.68	N	OFF	20.0
1.551750	34.55	---	56.00	21.45	N	OFF	20.0
1.767750	---	28.52	46.00	17.48	N	OFF	20.0
1.767750	39.90	---	56.00	16.10	N	OFF	20.0
1.828500	---	28.29	46.00	17.71	N	OFF	20.0
1.828500	40.86	---	56.00	15.14	N	OFF	20.0
1.938750	---	27.56	46.00	18.44	N	OFF	20.0
1.938750	39.92	---	56.00	16.08	N	OFF	20.0
2.015250	---	27.26	46.00	18.74	N	OFF	20.0
2.015250	39.57	---	56.00	16.43	N	OFF	20.0
2.076000	---	25.19	46.00	20.81	N	OFF	20.0
2.076000	35.48	---	56.00	20.52	N	OFF	20.0
2.184000	---	23.86	46.00	22.14	N	OFF	20.0
2.184000	36.38	---	56.00	19.62	N	OFF	20.0
2.285250	---	21.87	46.00	24.13	N	OFF	20.0
2.285250	33.62	---	56.00	22.38	N	OFF	20.0
2.364000	---	21.06	46.00	24.94	N	OFF	20.0
2.364000	30.66	---	56.00	25.34	N	OFF	20.0
2.436000	---	21.60	46.00	24.40	N	OFF	20.0
2.436000	29.92	---	56.00	26.08	N	OFF	20.0
2.688000	---	21.24	46.00	24.76	N	OFF	20.0
2.688000	28.52	---	56.00	27.48	N	OFF	20.0
2.816250	---	21.71	46.00	24.29	N	OFF	20.1
2.816250	29.26	---	56.00	26.74	N	OFF	20.1
3.070500	---	22.06	46.00	23.94	N	OFF	20.1
3.070500	31.26	---	56.00	24.74	N	OFF	20.1
3.333750	---	24.13	46.00	21.87	N	OFF	20.1
3.333750	30.43	---	56.00	25.57	N	OFF	20.1
3.792750	---	24.43	46.00	21.57	N	OFF	20.1
3.792750	30.77	---	56.00	25.23	N	OFF	20.1
4.139250	---	27.57	46.00	18.43	N	OFF	20.1
4.139250	33.04	---	56.00	22.96	N	OFF	20.1
4.488000	---	27.33	46.00	18.67	N	OFF	20.2
4.488000	33.22	---	56.00	22.78	N	OFF	20.2
4.897500	---	27.28	46.00	18.72	N	OFF	20.2
4.897500	33.14	---	56.00	22.86	N	OFF	20.2
5.748000	---	30.53	50.00	19.47	N	OFF	20.3
5.748000	36.18	---	60.00	23.82	N	OFF	20.3
6.369000	---	30.34	50.00	19.66	N	OFF	20.3
6.369000	36.38	---	60.00	23.62	N	OFF	20.3
6.900000	---	33.43	50.00	16.57	N	OFF	20.4
6.900000	38.68	---	60.00	21.32	N	OFF	20.4
7.363500	---	35.04	50.00	14.96	N	OFF	20.4
7.363500	39.78	---	60.00	20.22	N	OFF	20.4
8.049750	---	33.90	50.00	16.10	N	OFF	20.5
8.049750	39.23	---	60.00	20.77	N	OFF	20.5
8.742750	---	35.42	50.00	14.58	N	OFF	20.5
8.742750	40.17	---	60.00	19.83	N	OFF	20.5
9.204000	---	34.80	50.00	15.20	N	OFF	20.6
9.204000	39.77	---	60.00	20.23	N	OFF	20.6
9.892500	---	32.68	50.00	17.32	N	OFF	20.6
9.892500	38.36	---	60.00	21.64	N	OFF	20.6
10.524750	---	30.38	50.00	19.62	N	OFF	20.7
10.524750	36.43	---	60.00	23.57	N	OFF	20.7



Appendix B. Test Results of RF Near Field Test Items

Mode 1_battery below 10%



Test mode		WPT Charging	
Ref: 20 dBm Att: 30 dB BW: 1 kHz VM: 3 kHz SWT: 70 ms Marker 1 [T1] 3.36 dBm 122.80000000 kHz 2.68000000 kHz -16.56 dBm 121.66000000 kHz -16.83 dBm 124.14000000 kHz Date: 18.SEP.2026 10:31:58		Ref: 20 dBm Att: 30 dB BW: 1 kHz VM: 3 kHz SWT: 70 ms Marker 1 [T1] 3.28 dBm 122.80000000 kHz 2.68000000 kHz -16.56 dBm 121.66000000 kHz -16.83 dBm 124.14000000 kHz Date: 18.SEP.2026 10:32:25	
20dB Bandwidth (kHz)		2.68	99% Occupied BW(kHz)
			2.26

Mode 2_battery level 50%



Test mode		WPT Charging	
Ref: 20 dBm Att: 30 dB BW: 1 kHz VM: 3 kHz SWT: 70 ms Marker 1 [T1] 2.89 dBm 145.36000000 kHz 2.68000000 kHz -17.31 dBm 144.02000000 kHz -17.35 dBm 146.70000000 kHz Date: 18.SEP.2026 11:05:07		Ref: 20 dBm Att: 30 dB BW: 1 kHz VM: 3 kHz SWT: 70 ms Marker 1 [T1] 3.47 dBm 145.40000000 kHz 2.68000000 kHz -17.31 dBm 144.02000000 kHz -17.35 dBm 146.70000000 kHz Date: 18.SEP.2026 11:07:32	
20dB Bandwidth (kHz)		2.68	99% Occupied BW(kHz)
			2.28



Mode 3_battery above 90%

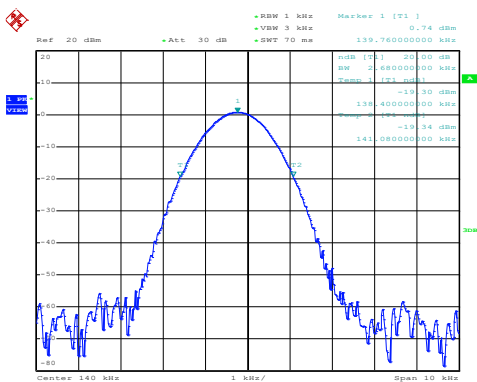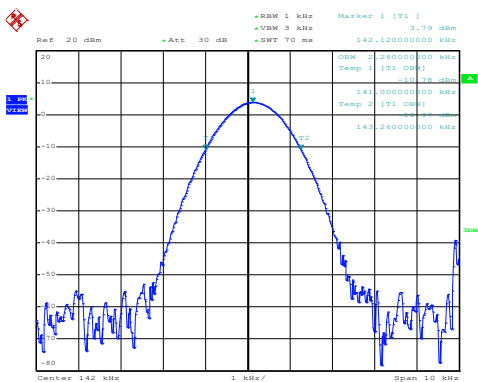Test mode		WPT Charging	
 Date: 18.SEP.2026 12:34:23		 Date: 18.SEP.2026 12:36:47	
20dB Bandwidth (kHz)	2.68	99% Occupied BW(kHz)	2.26


Mode 4_battery level 50% 2mm

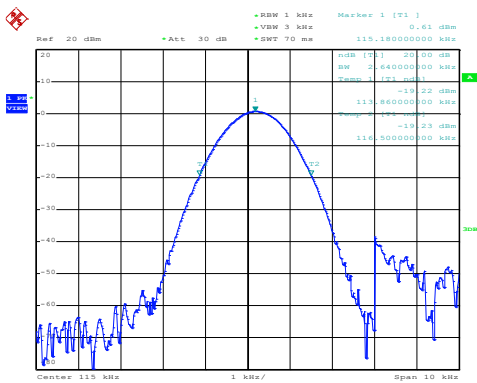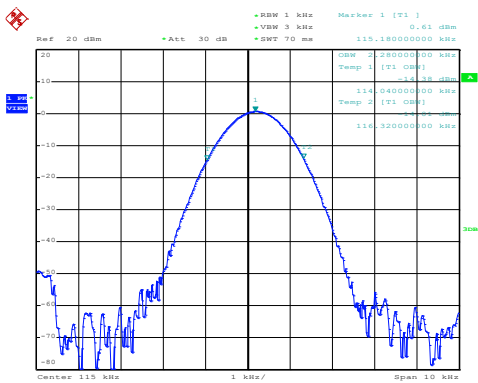
Test mode		WPT Charging	
 Date: 18.SEP.2026 14:28:10		 Date: 18.SEP.2026 14:27:42	
20dB Bandwidth (kHz)	2.64	99% Occupied BW(kHz)	2.28

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.


Appendix C. Test Results of Radiated Test Items


C1. Test Result of Field Strength of Fundamental Emissions

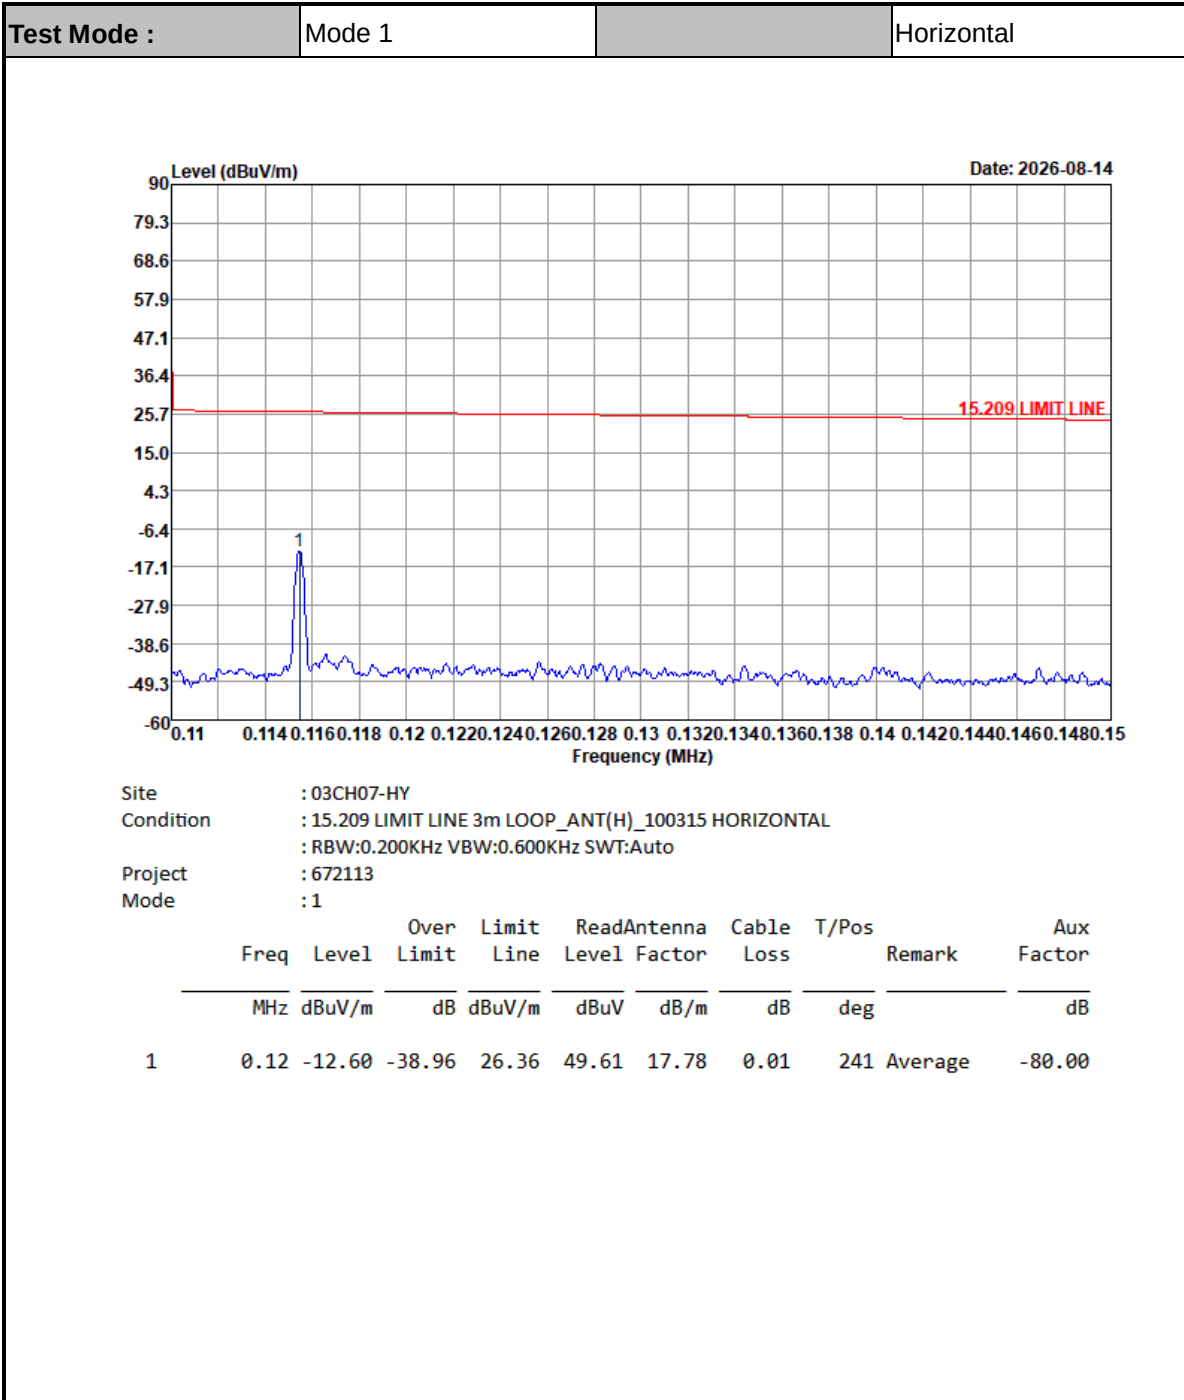

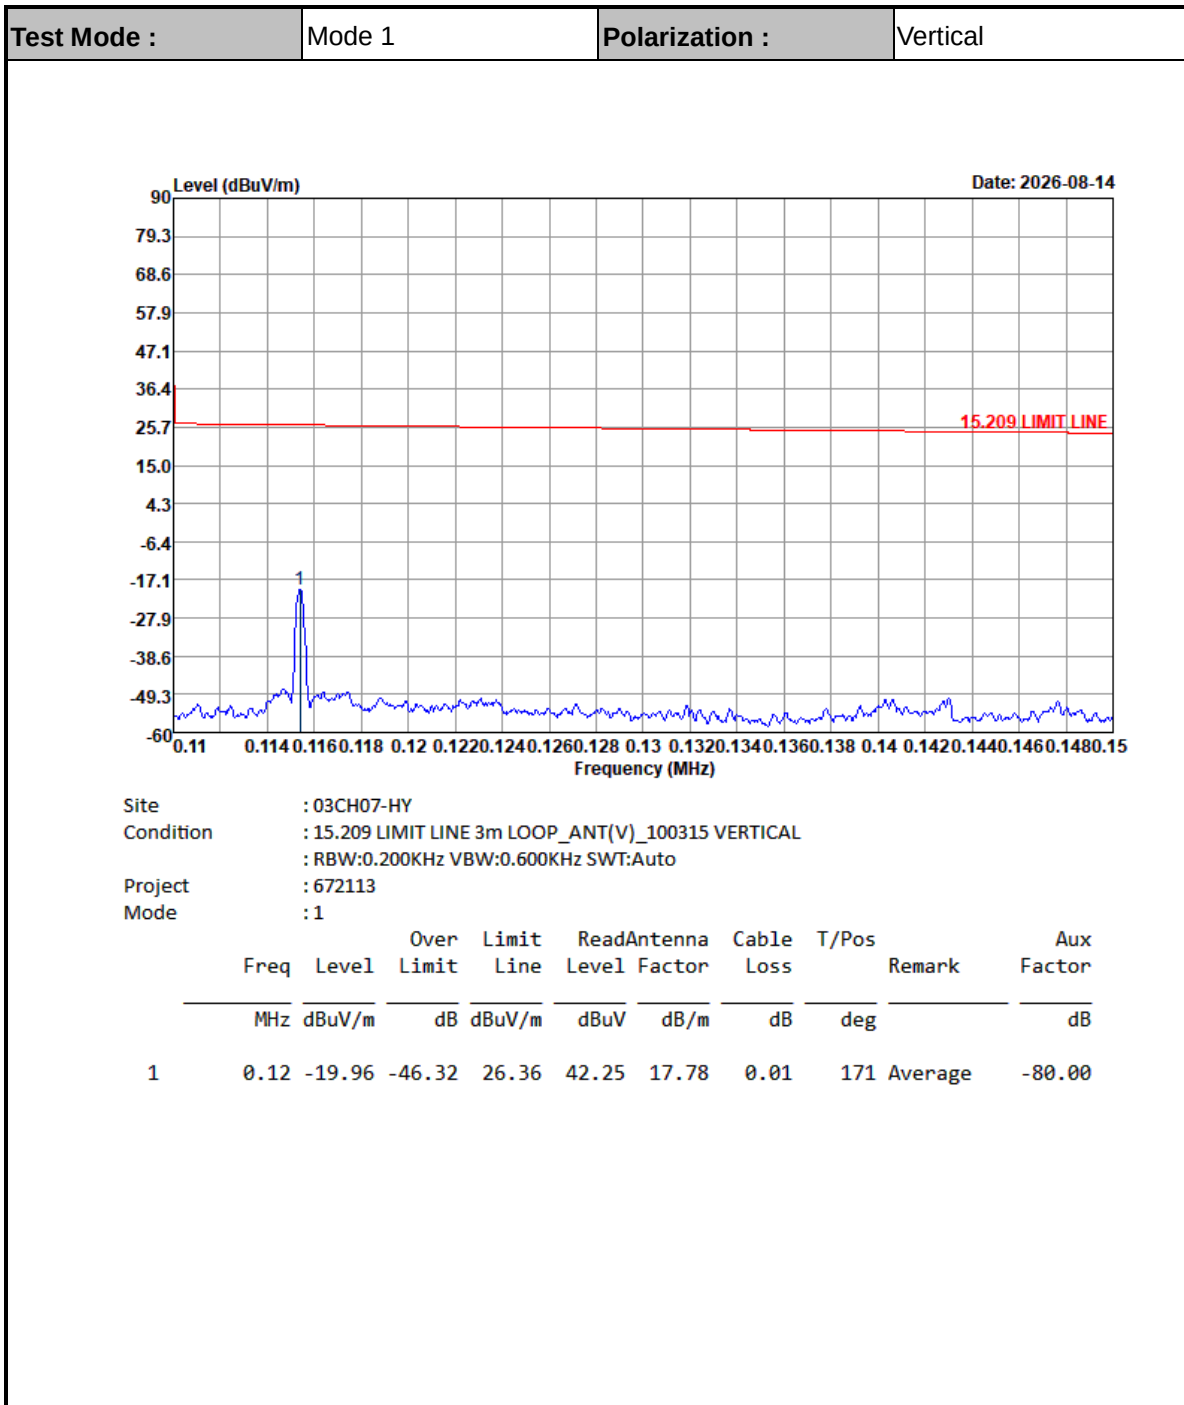
**Note:**


- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB) = $40 \log (300/3) = 80$ (dB)
- Level= Read Level + Antenna Factor + Cable loss - distance extrapolation factor.

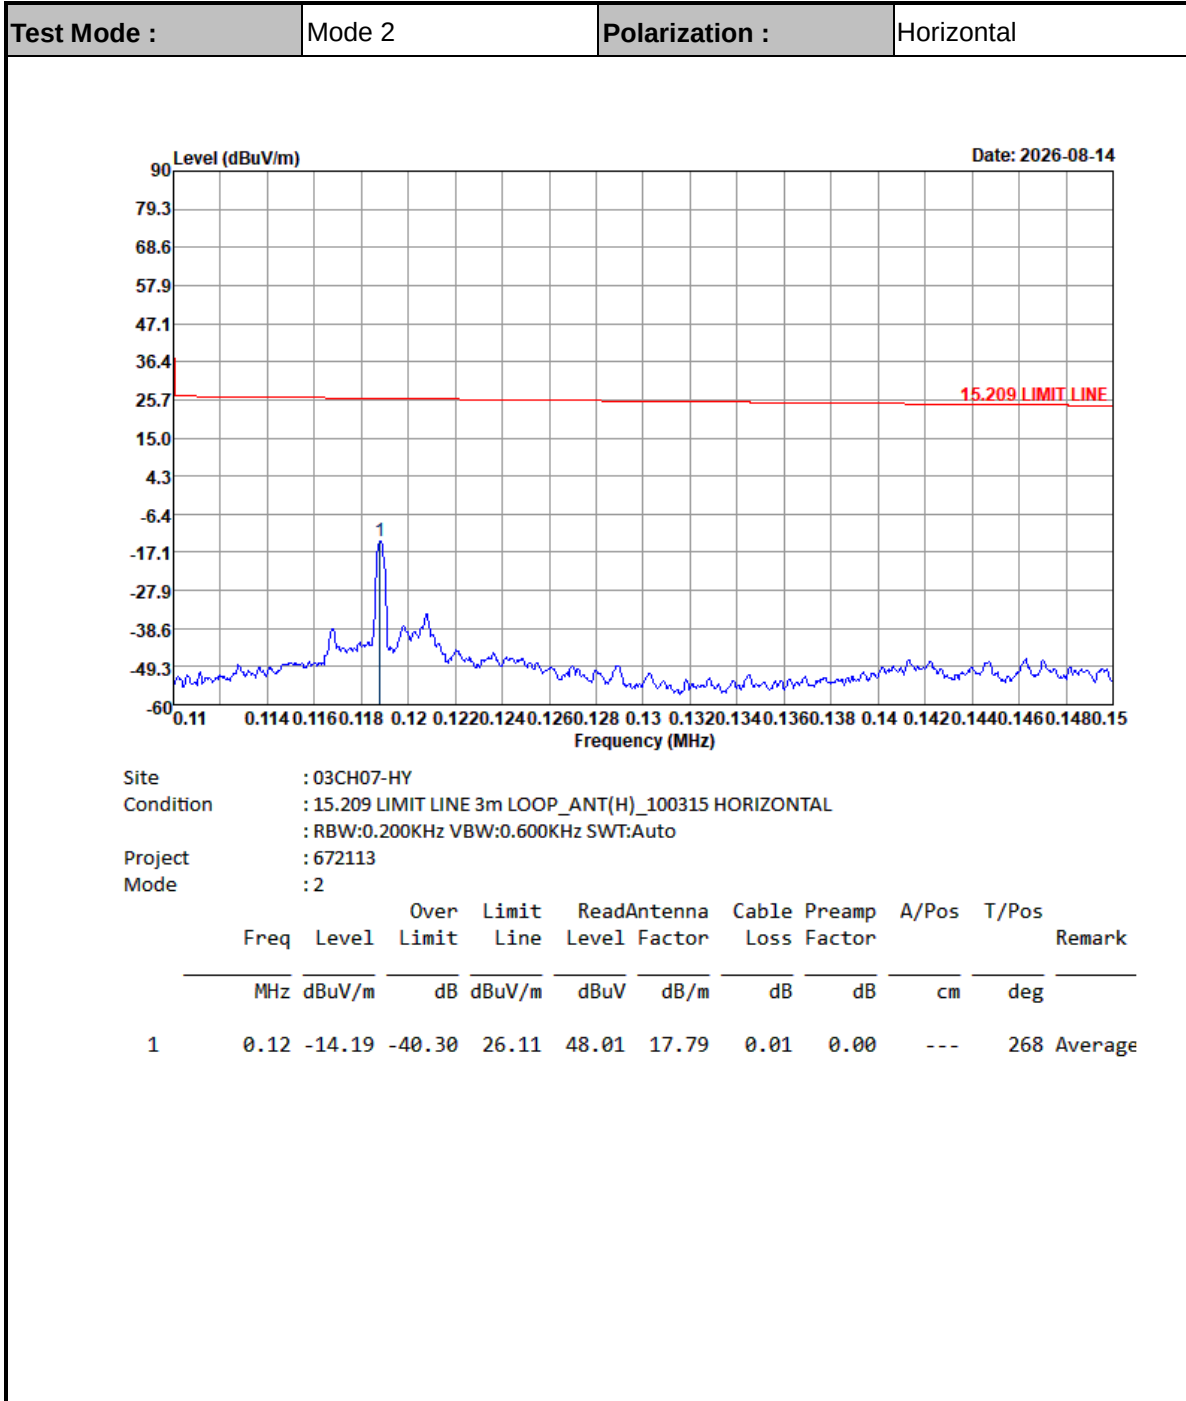

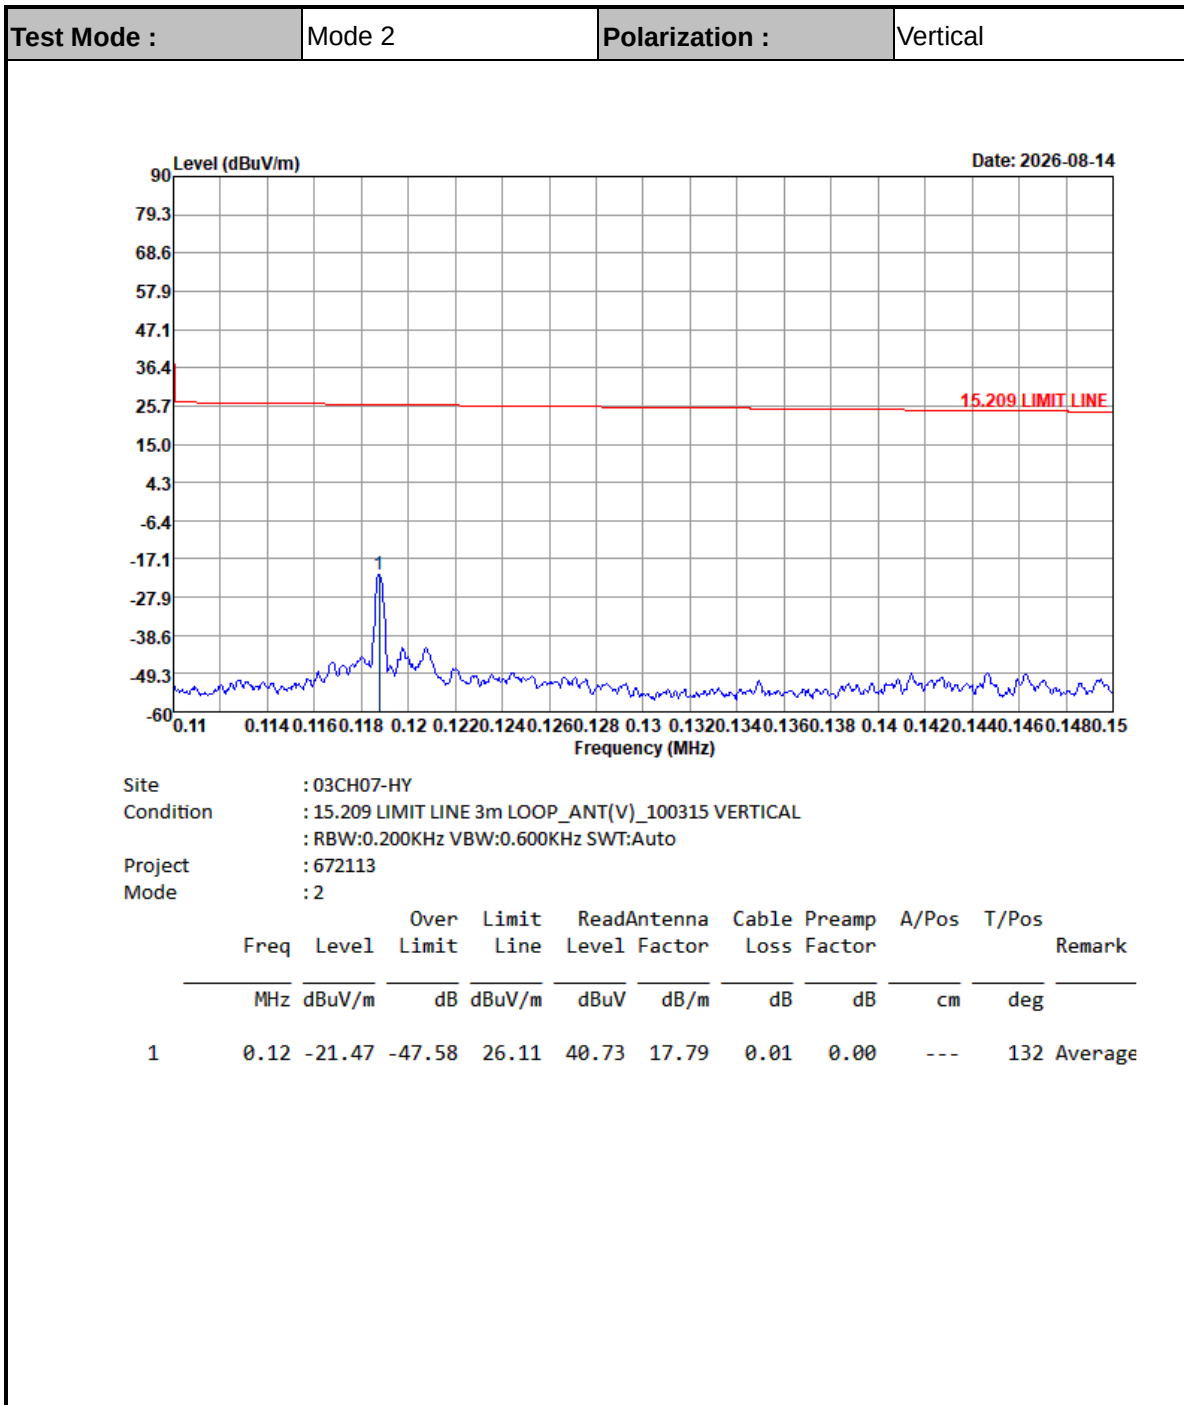

Note:


1. Distance extrapolation factor = 40 log (specific distance / test distance) (dB) = 40 log (300/3) = 80 (dB)
2. Level= Read Level + Antenna Factor + Cable loss - distance extrapolation factor.

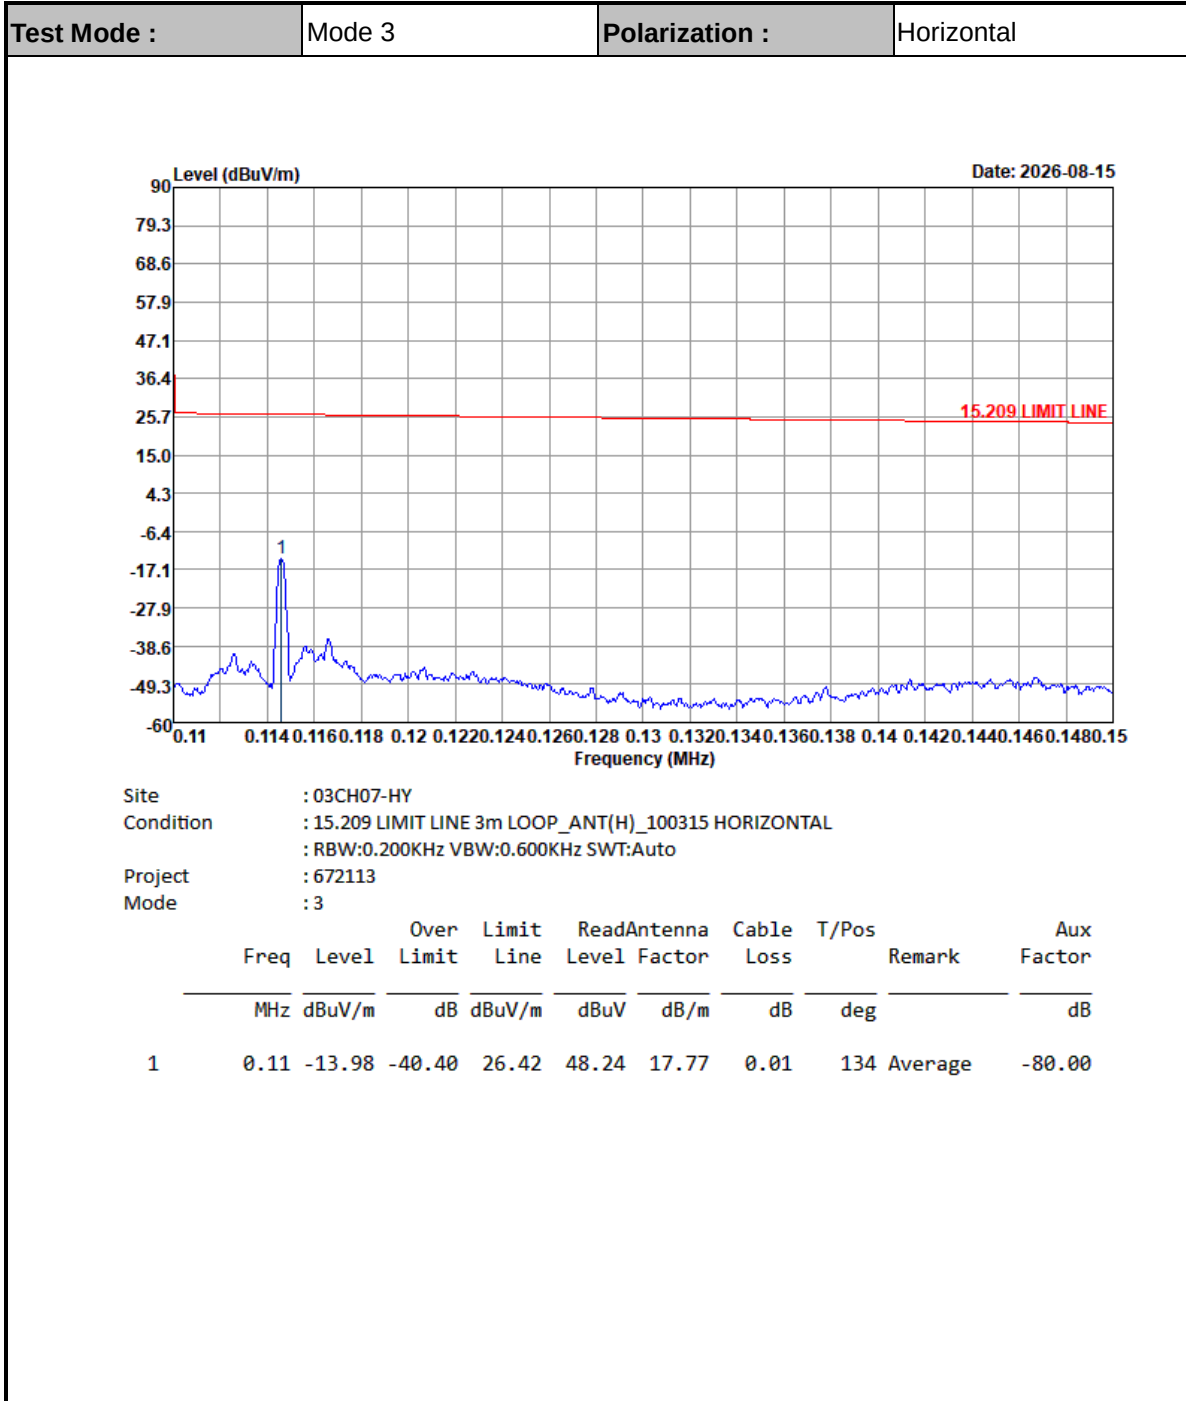

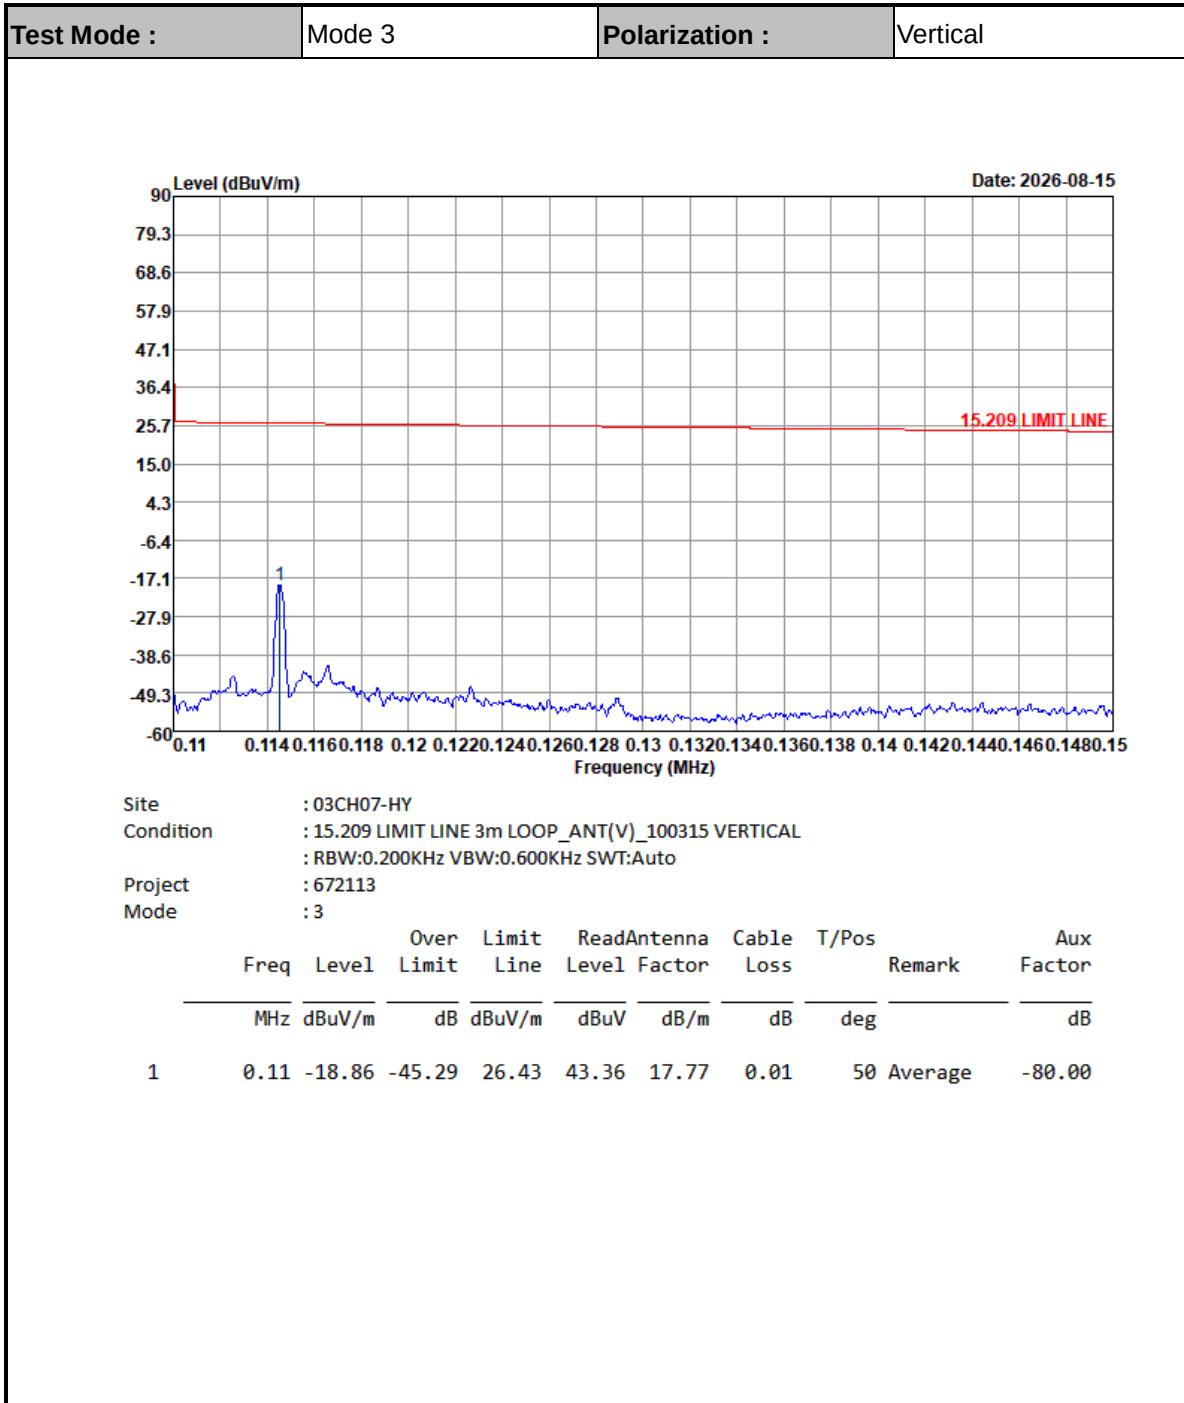**Note:**

- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB) = $40 \log (300/3) = 80$ (dB)
- Level= Read Level + Antenna Factor + Cable loss - distance extrapolation factor.

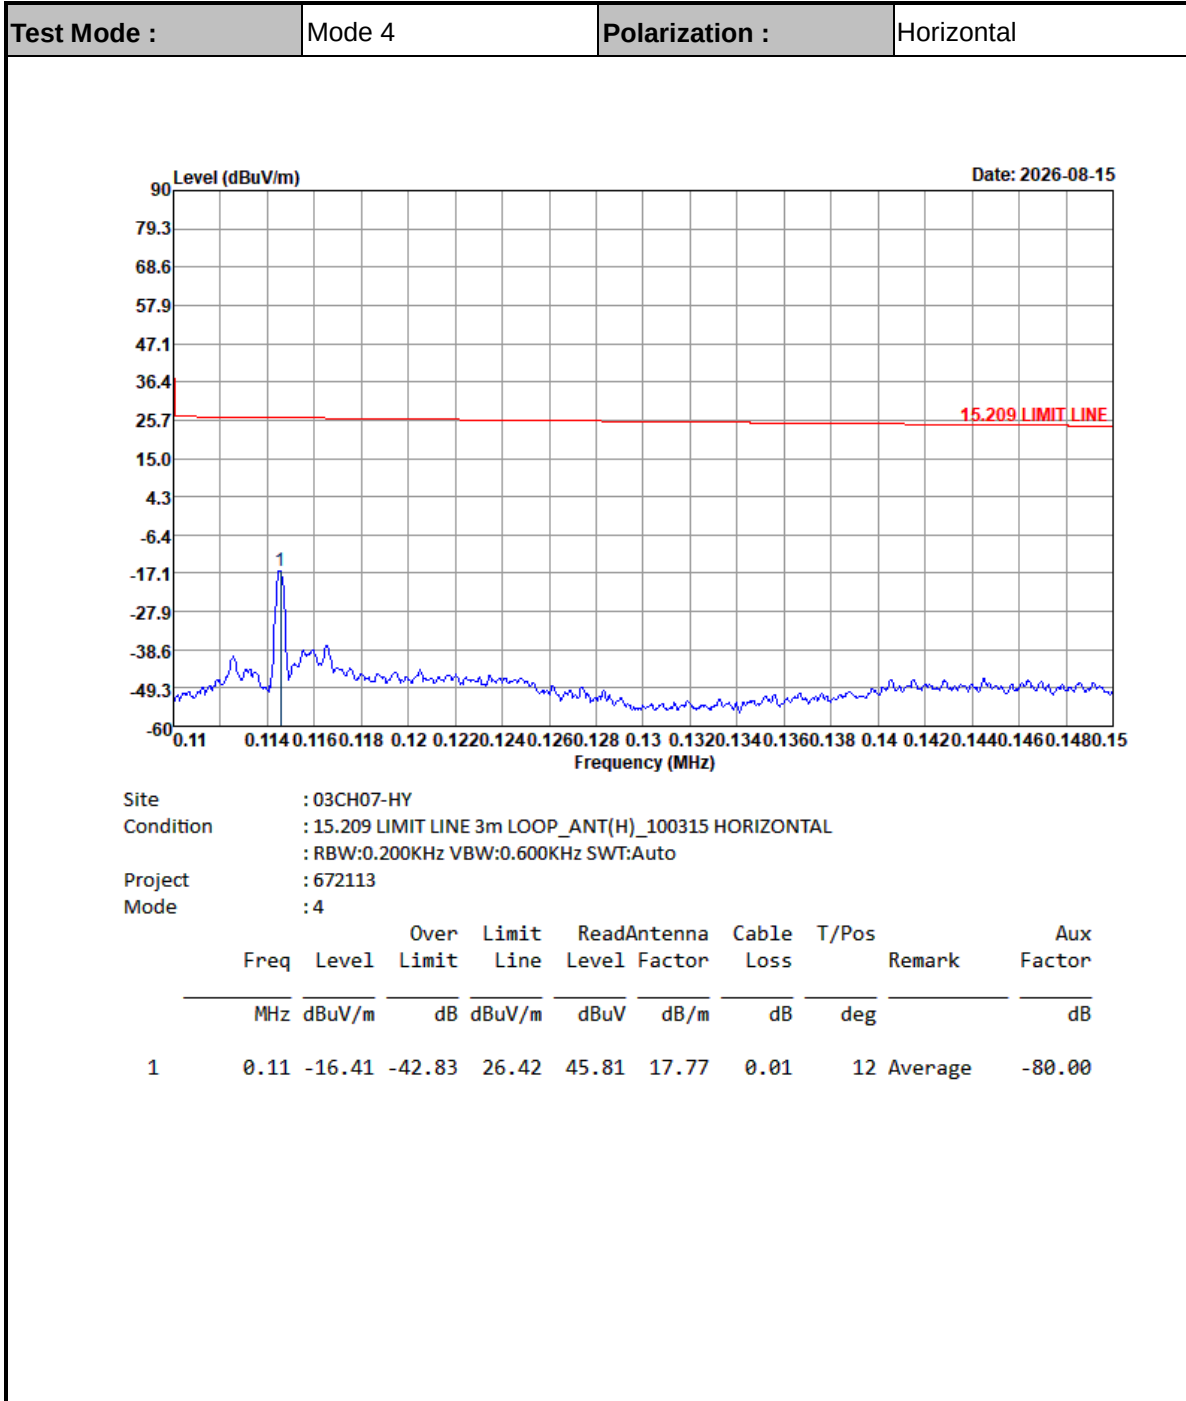


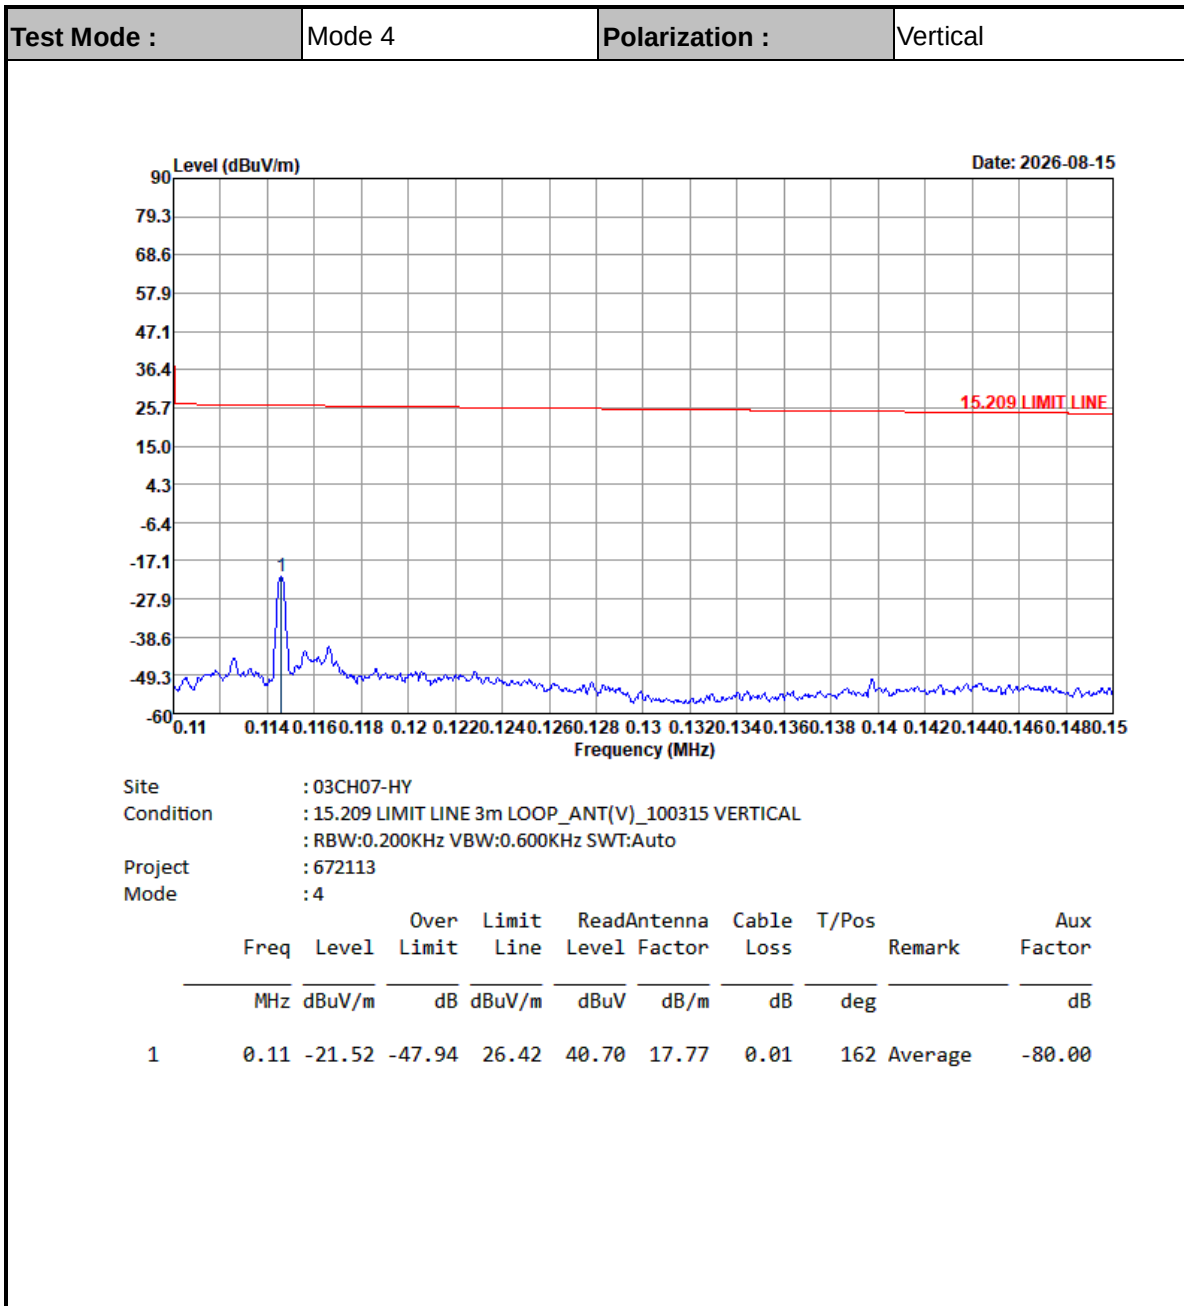
Note:

1. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB) = $40 \log (300/3) = 80$ (dB)
2. Level= Read Level + Antenna Factor + Cable loss - distance extrapolation factor.


C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :	Mode 1	Polarization :	Horizontal
--------------------	--------	-----------------------	------------

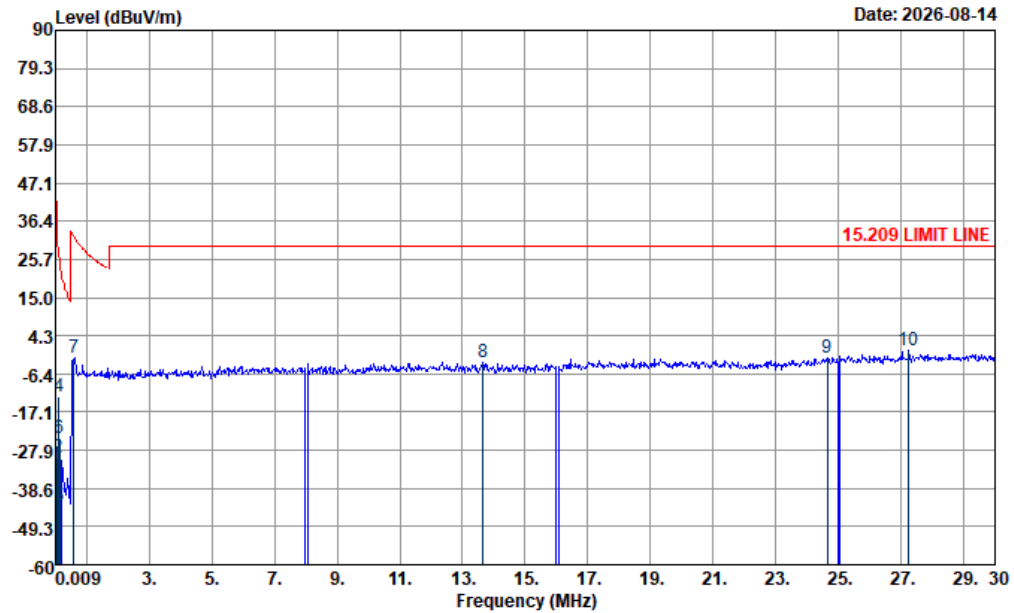



Site : 03CH07-HY
 Condition : 15.209 LIMIT LINE 3m LOOP_ANT(H)_100315 HORIZONTAL
 Project : 672113
 Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	T/Pos	Remark	Aux Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg		dB
1	0.04	-32.01	-67.32	35.31	29.18	18.80	0.01	---	Average	-80.00
2	0.06	-30.01	-61.87	31.86	31.88	18.10	0.01	---	Average	-80.00
3	0.10	-41.47	-69.43	27.96	20.78	17.74	0.01	---	QP	-80.00
4	0.12	-12.60	-38.96	26.36	49.61	17.78	0.01	---	Average	-80.00
5	0.13	-43.91	-69.53	25.62	18.24	17.83	0.02	---	Average	-80.00
6	0.15	-24.31	-48.39	24.08	37.72	17.95	0.02	---	Average	-80.00
7	0.60	-1.75	-33.86	32.11	19.88	18.30	0.07	---	QP	-40.00
8	13.65	-3.17	-32.67	29.50	15.73	20.70	0.40	---	QP	-40.00
9	24.66	-1.73	-31.23	29.50	14.47	23.22	0.58	---	QP	-40.00
10	27.22	-0.01	-29.51	29.50	15.72	23.52	0.75	---	QP	-40.00

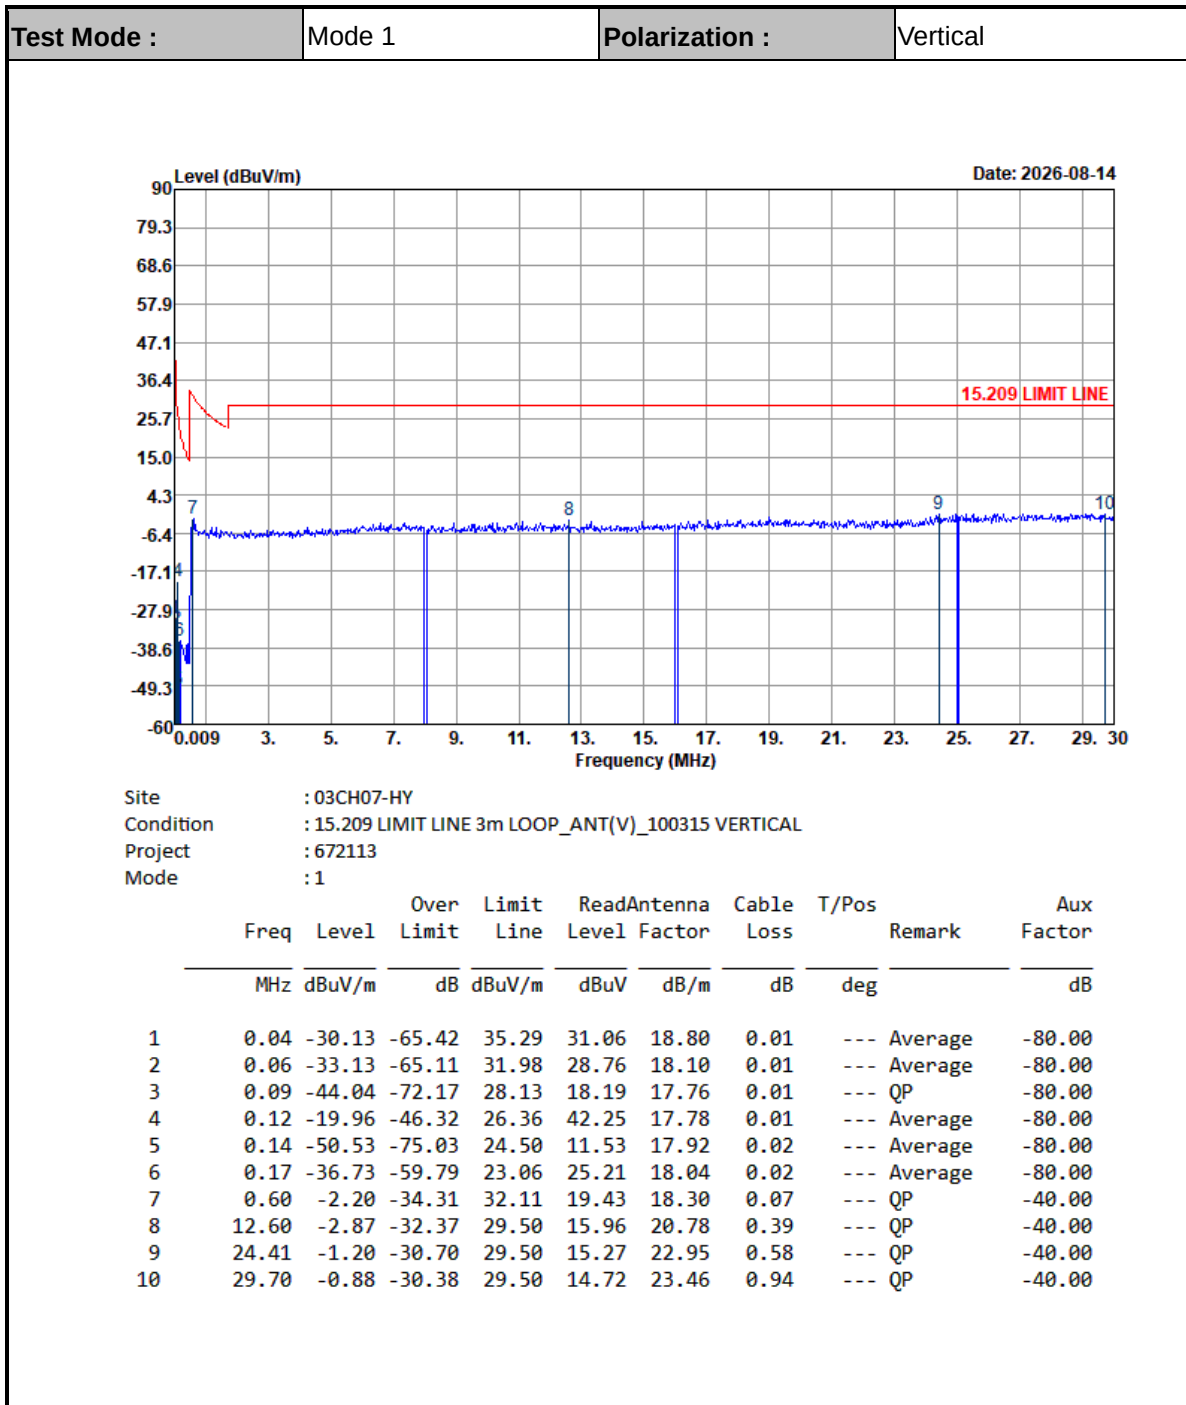

Note :


- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
EX.:
For below 490kHz Distance extrapolation factor = 40 log (300/3) = 80 (dB)
For 490kHz to 30MHz Distance extrapolation factor = 40 log (30/3) = 40 (dB)
- Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.

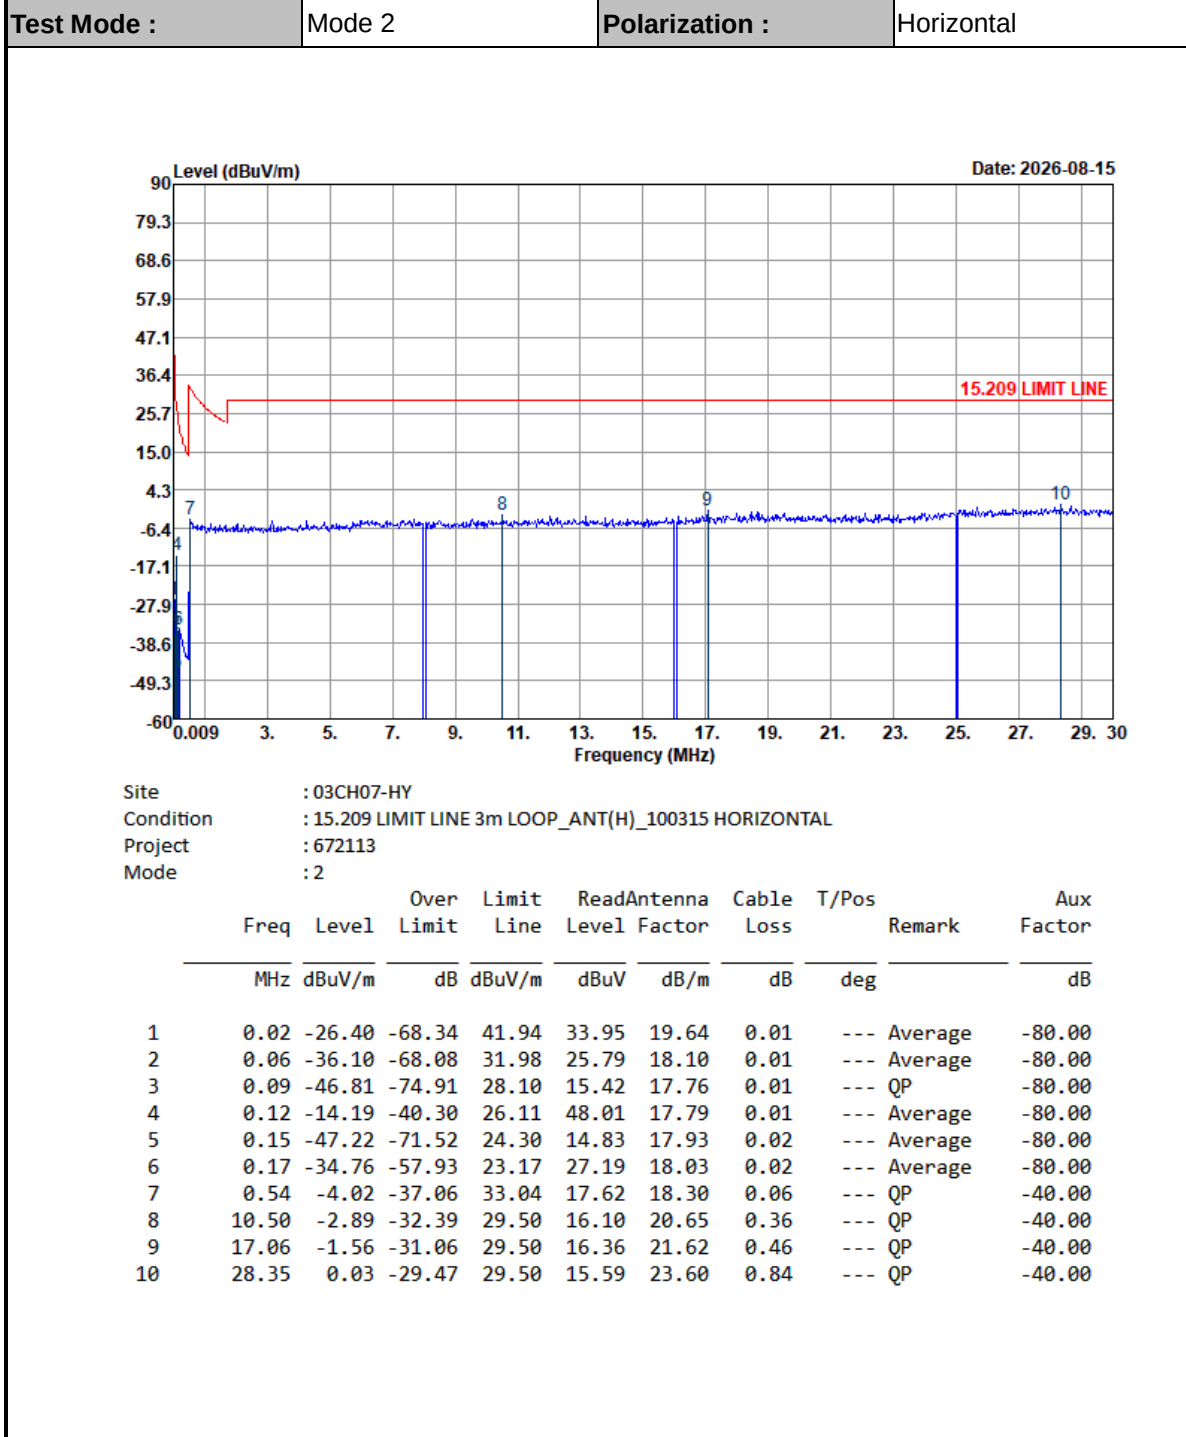

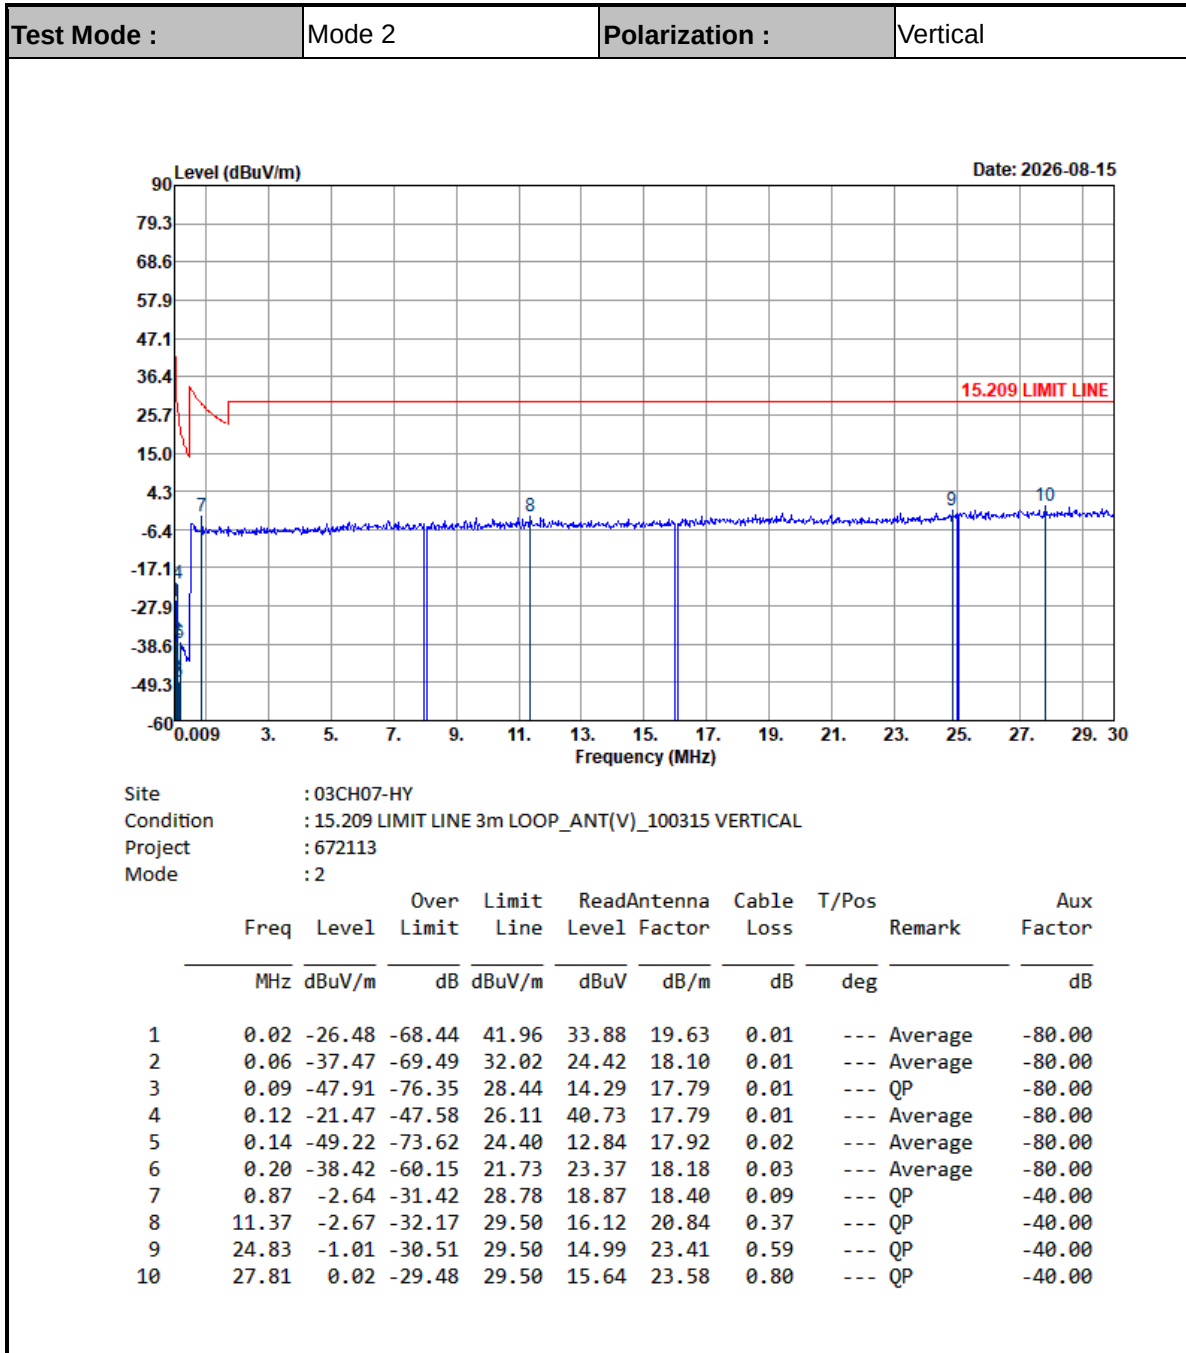

Note :


- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
EX.:
For below 490kHz Distance extrapolation factor = $40 \log (300/3) = 80$ (dB)
For 490kHz to 30MHz Distance extrapolation factor = $40 \log (30/3) = 40$ (dB)
- Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.

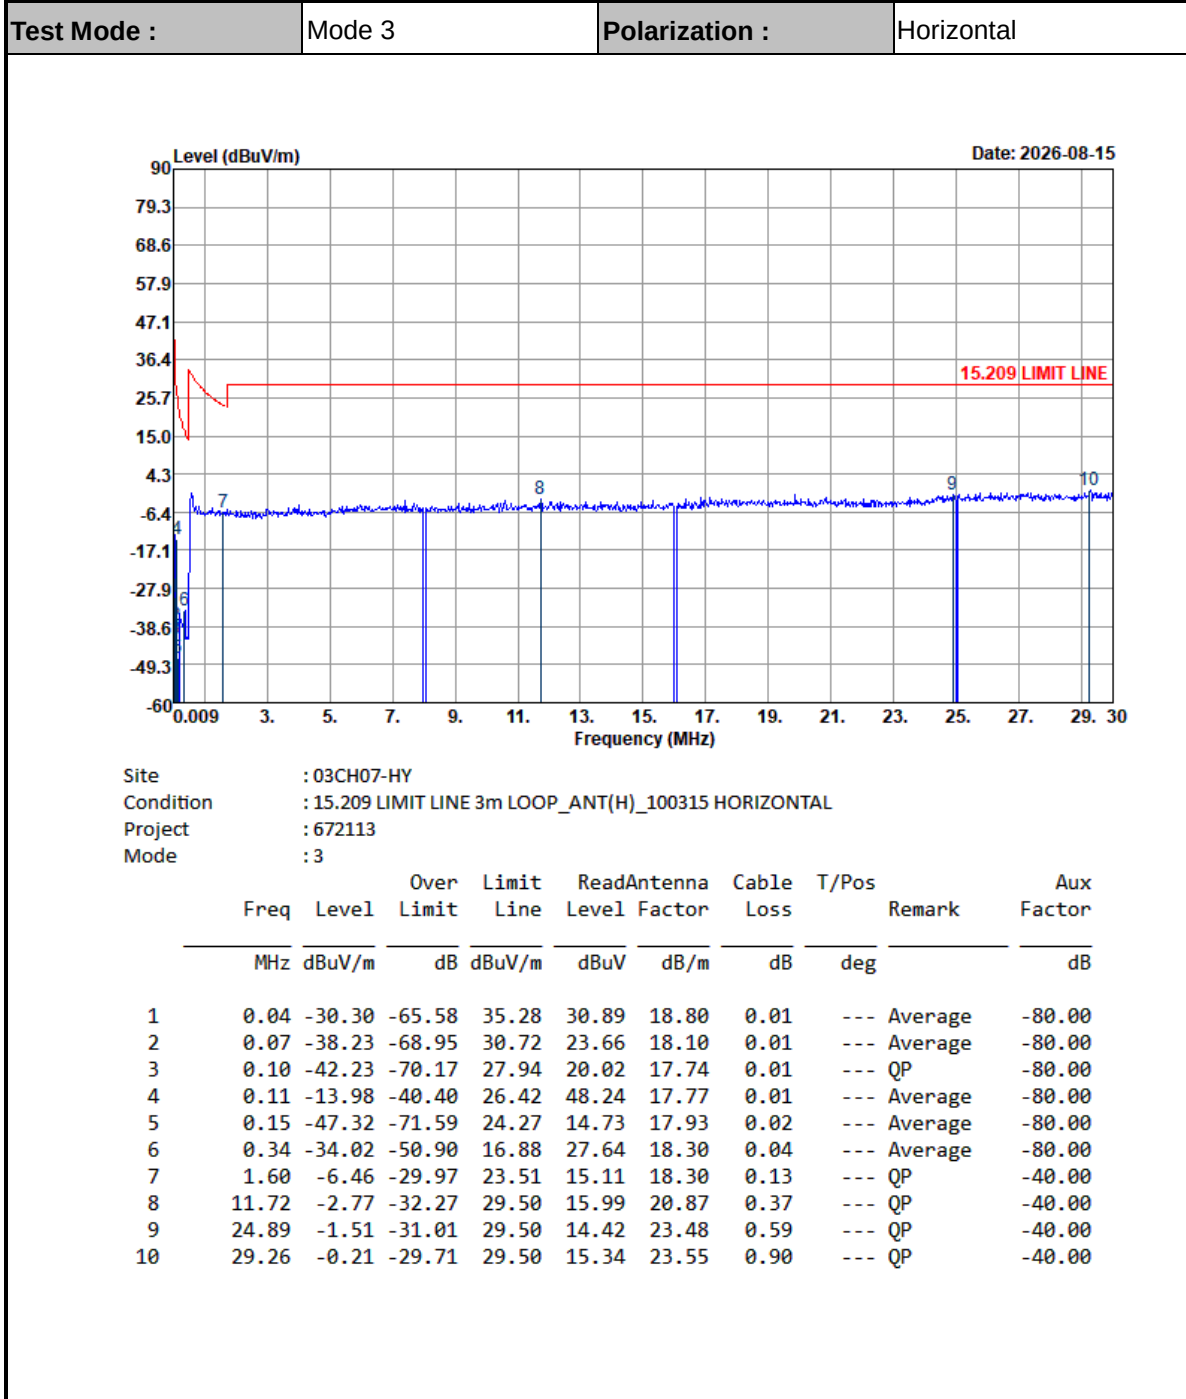

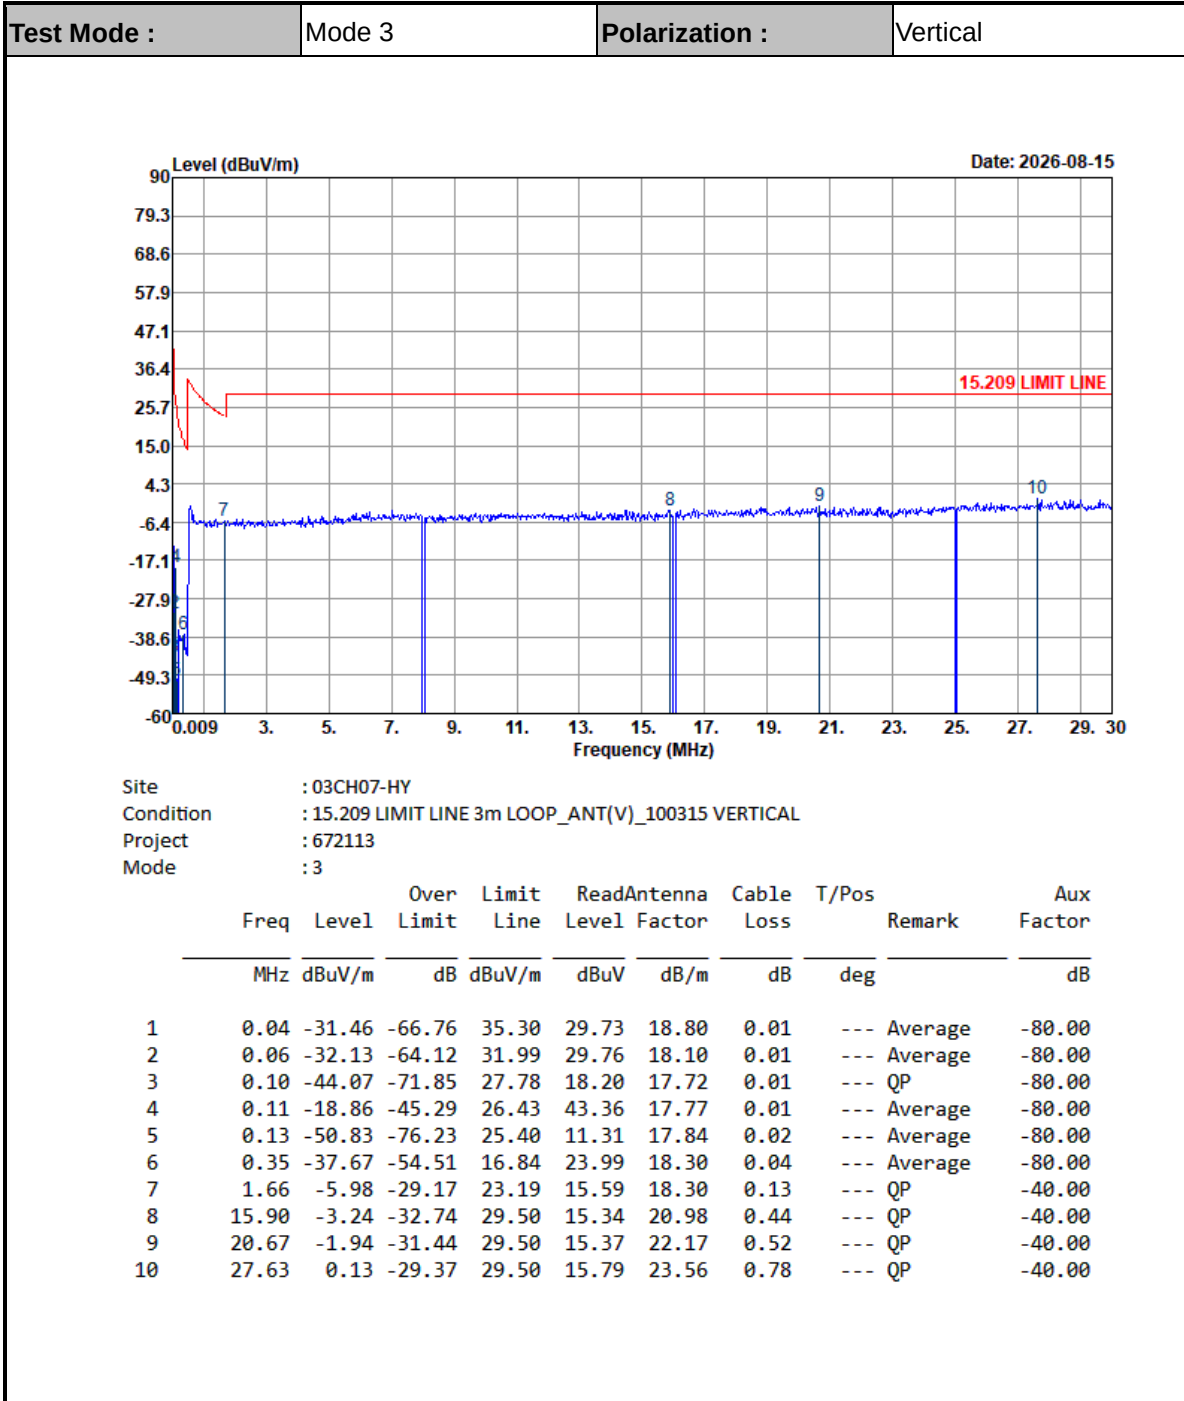

Note :


- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
EX.:
For below 490kHz Distance extrapolation factor = $40 \log (300/3) = 80$ (dB)
For 490kHz to 30MHz Distance extrapolation factor = $40 \log (30/3) = 40$ (dB)
- Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.

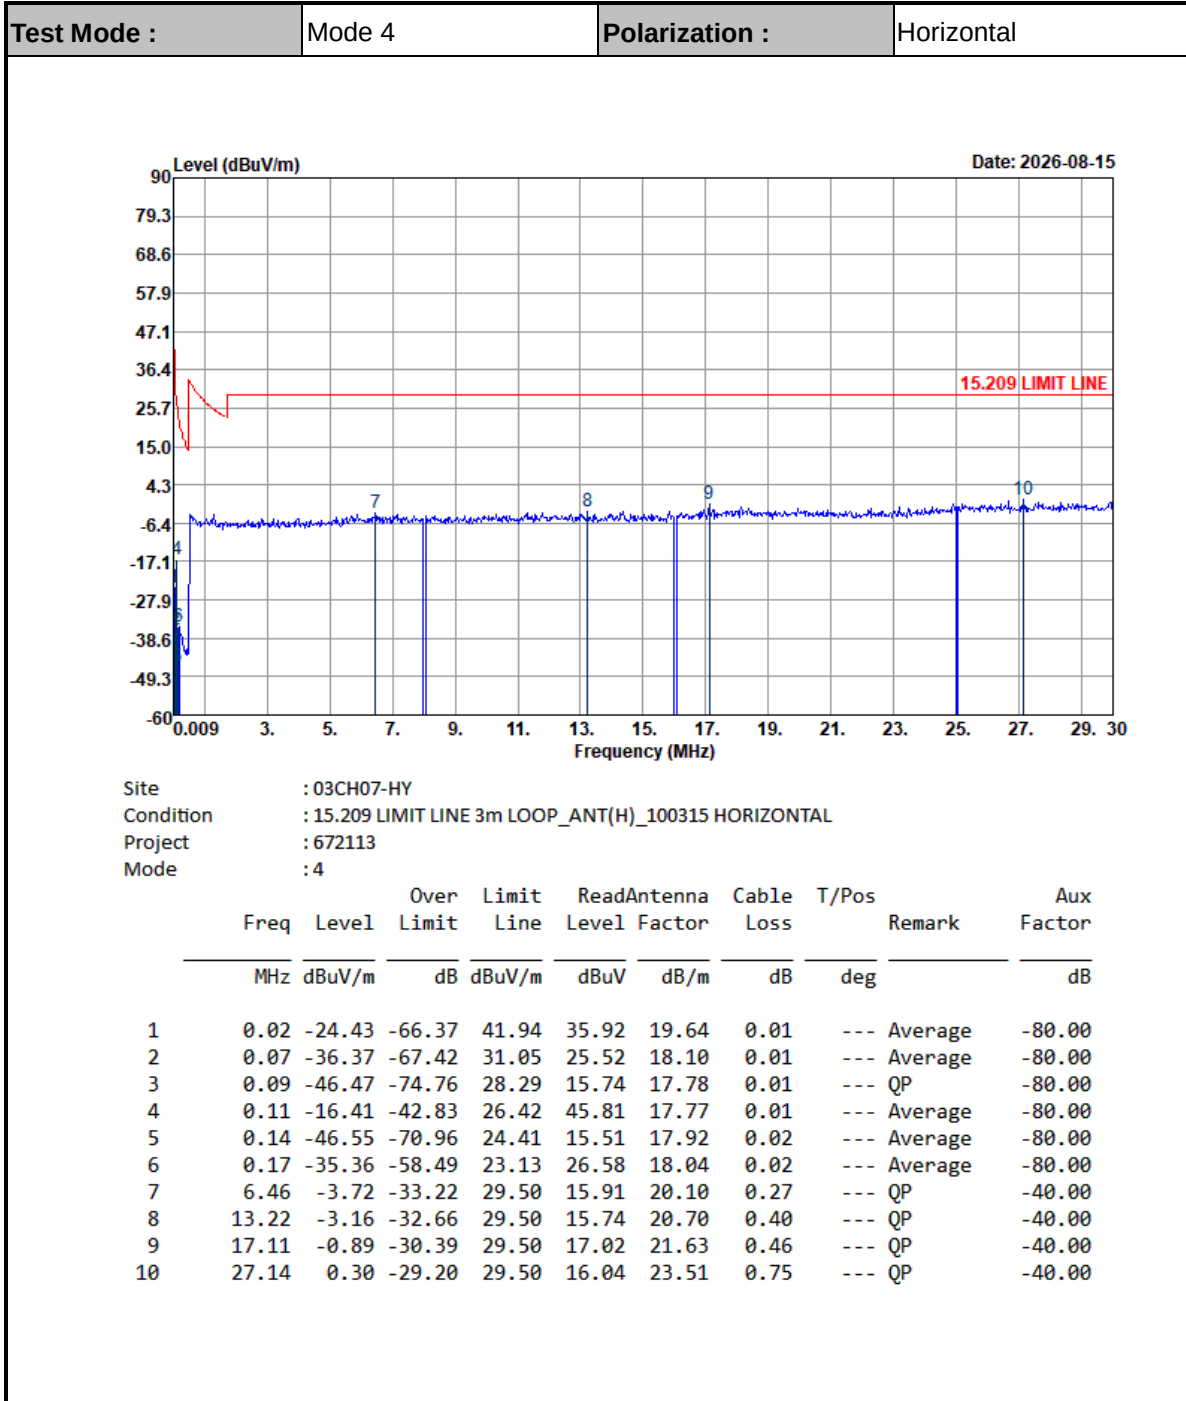

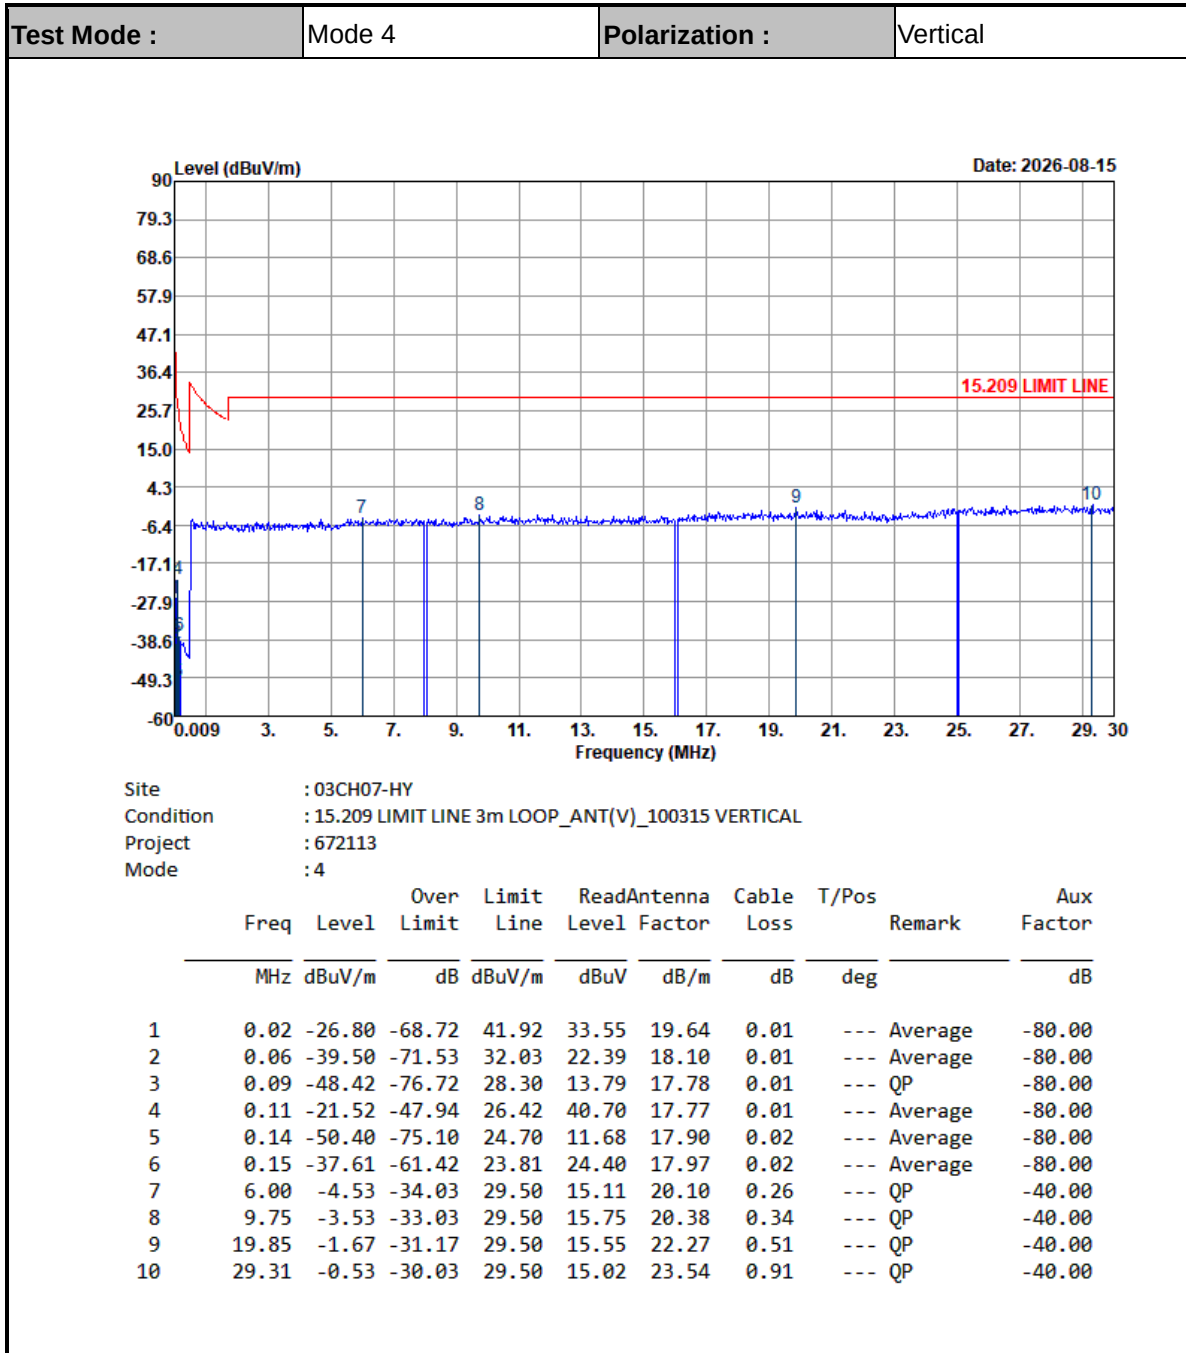

Note :


4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
EX.:
For below 490kHz Distance extrapolation factor = $40 \log (300/3) = 80$ (dB)
For 490kHz to 30MHz Distance extrapolation factor = $40 \log (30/3) = 40$ (dB)
6. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.

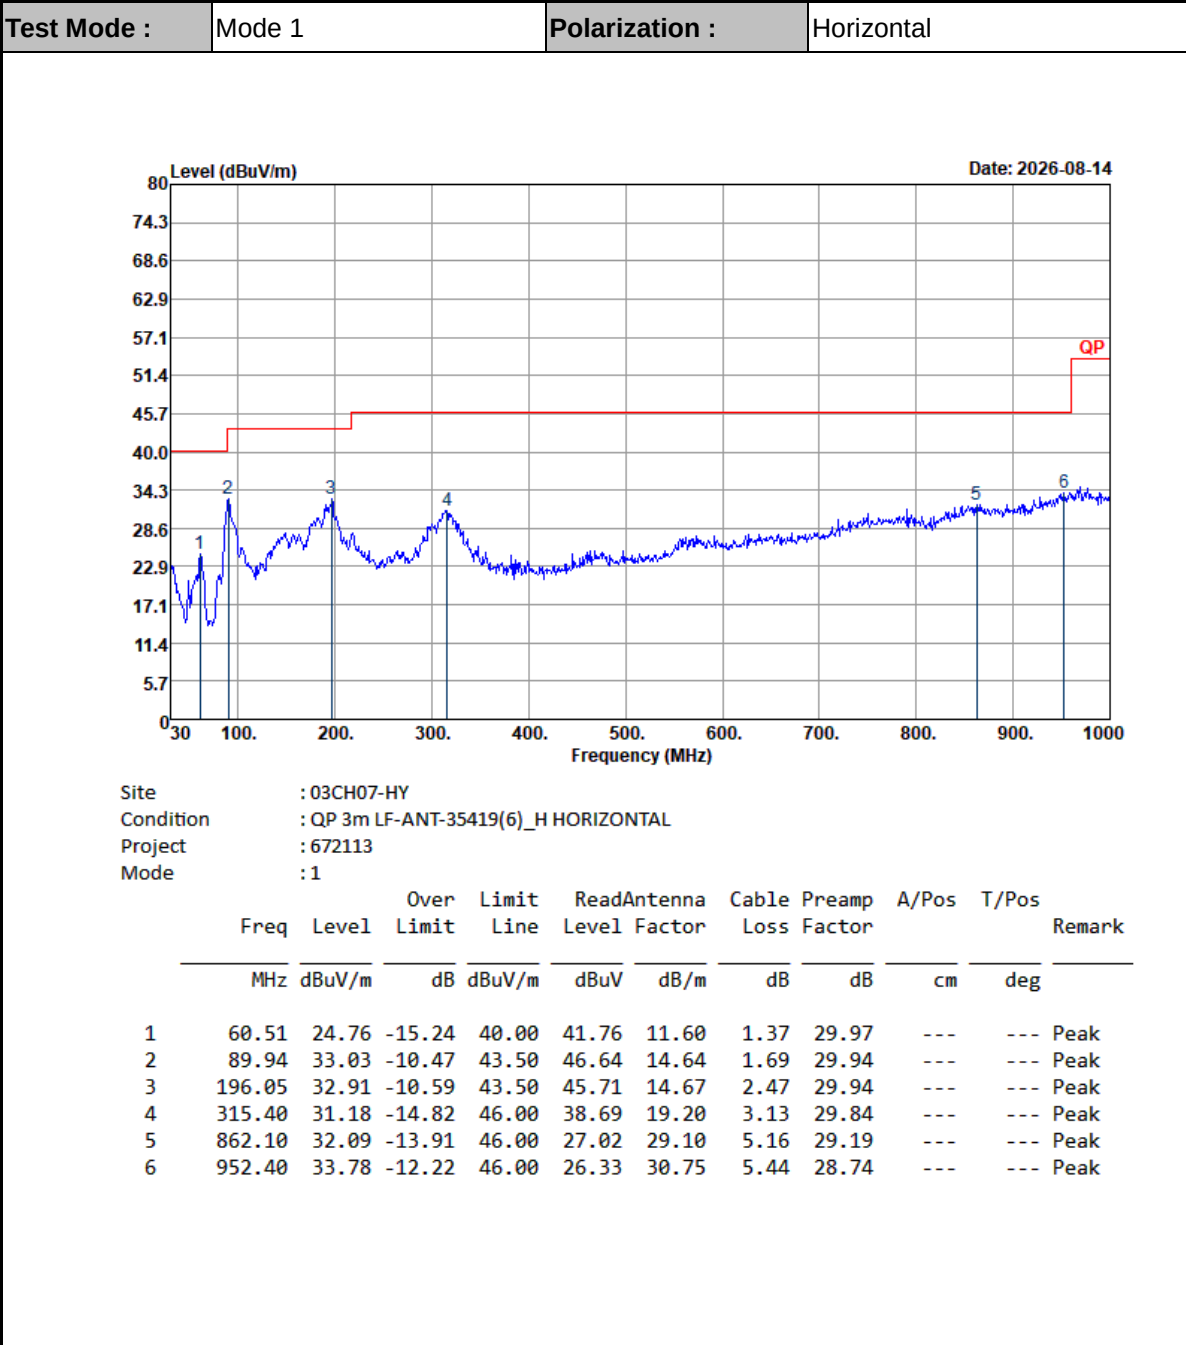C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

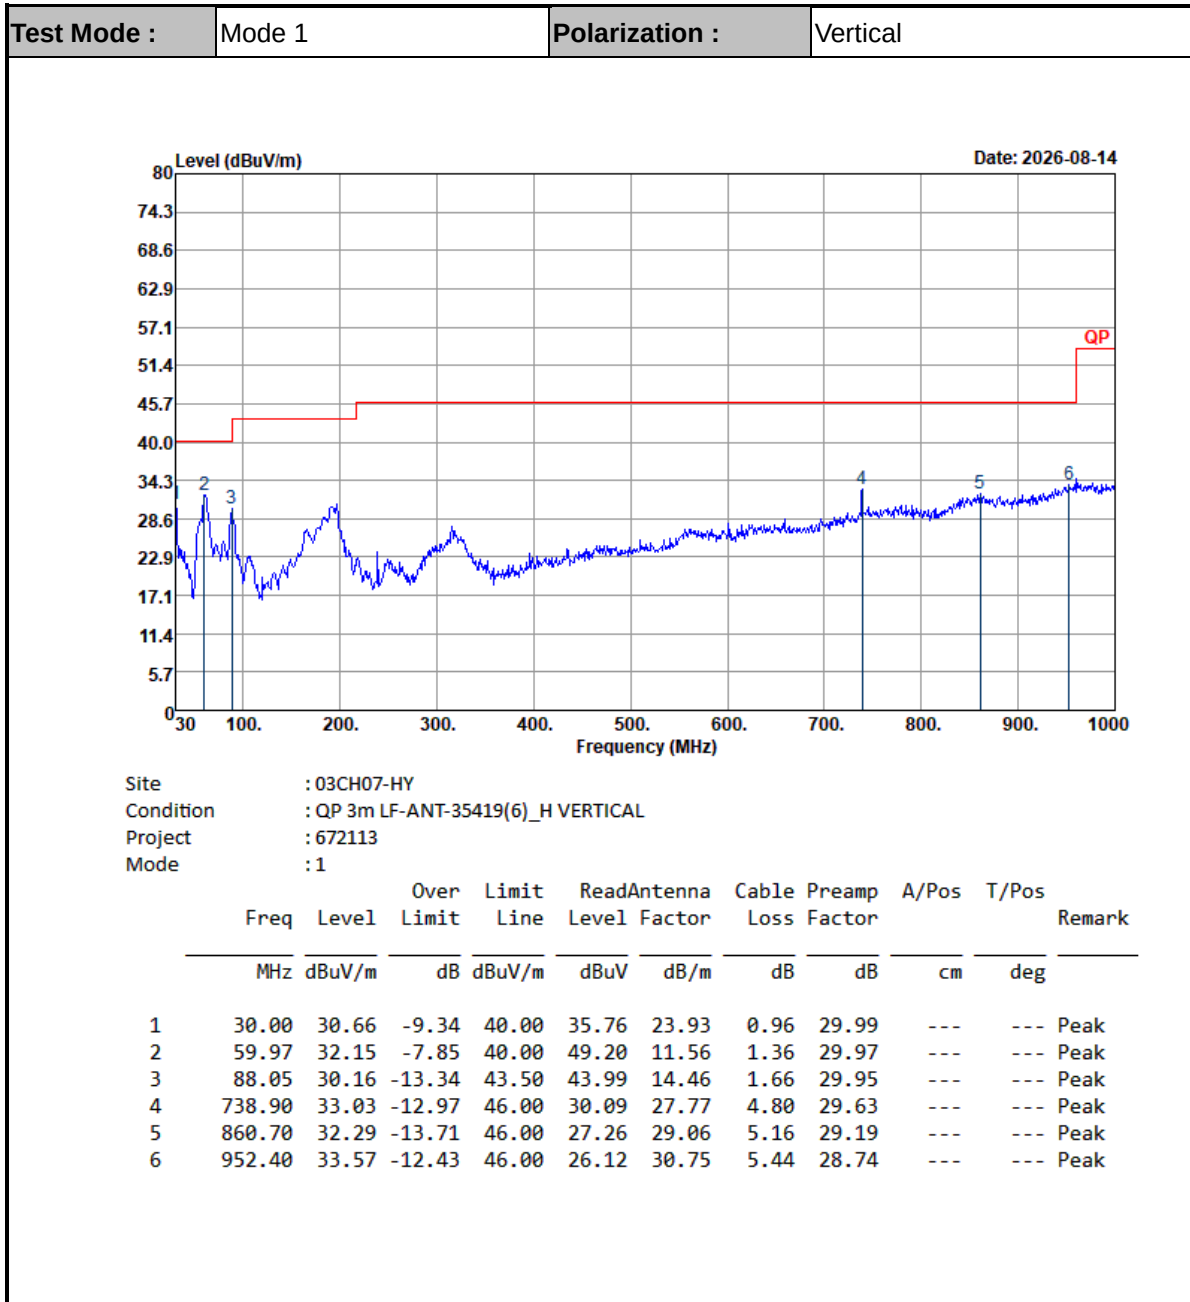
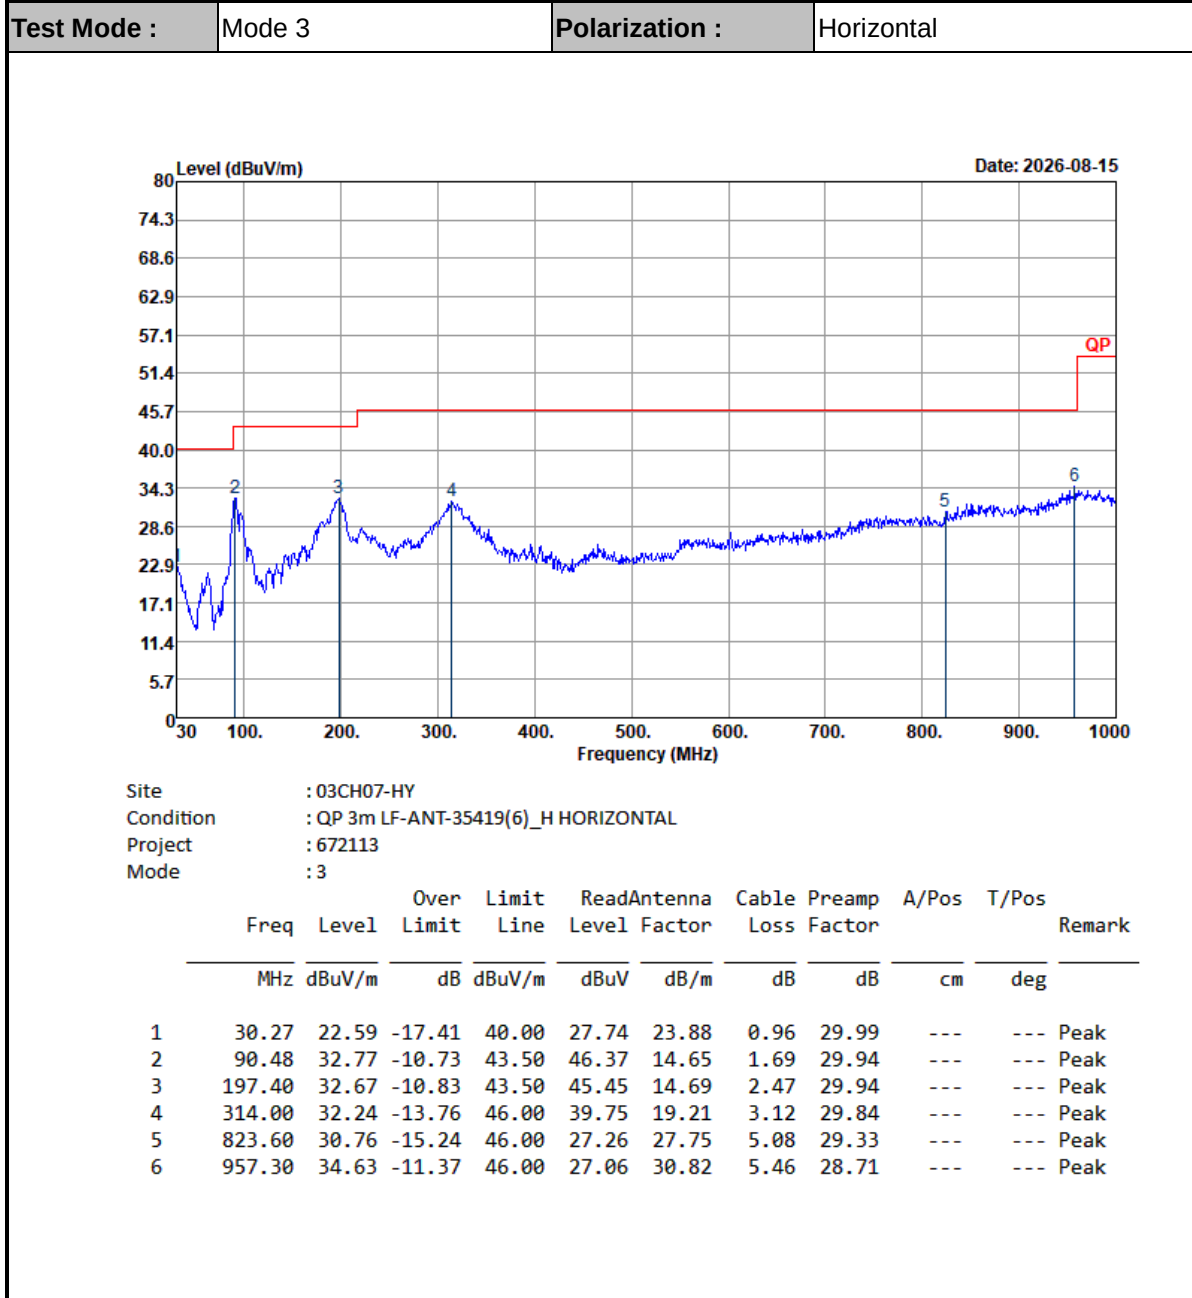

Note:


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

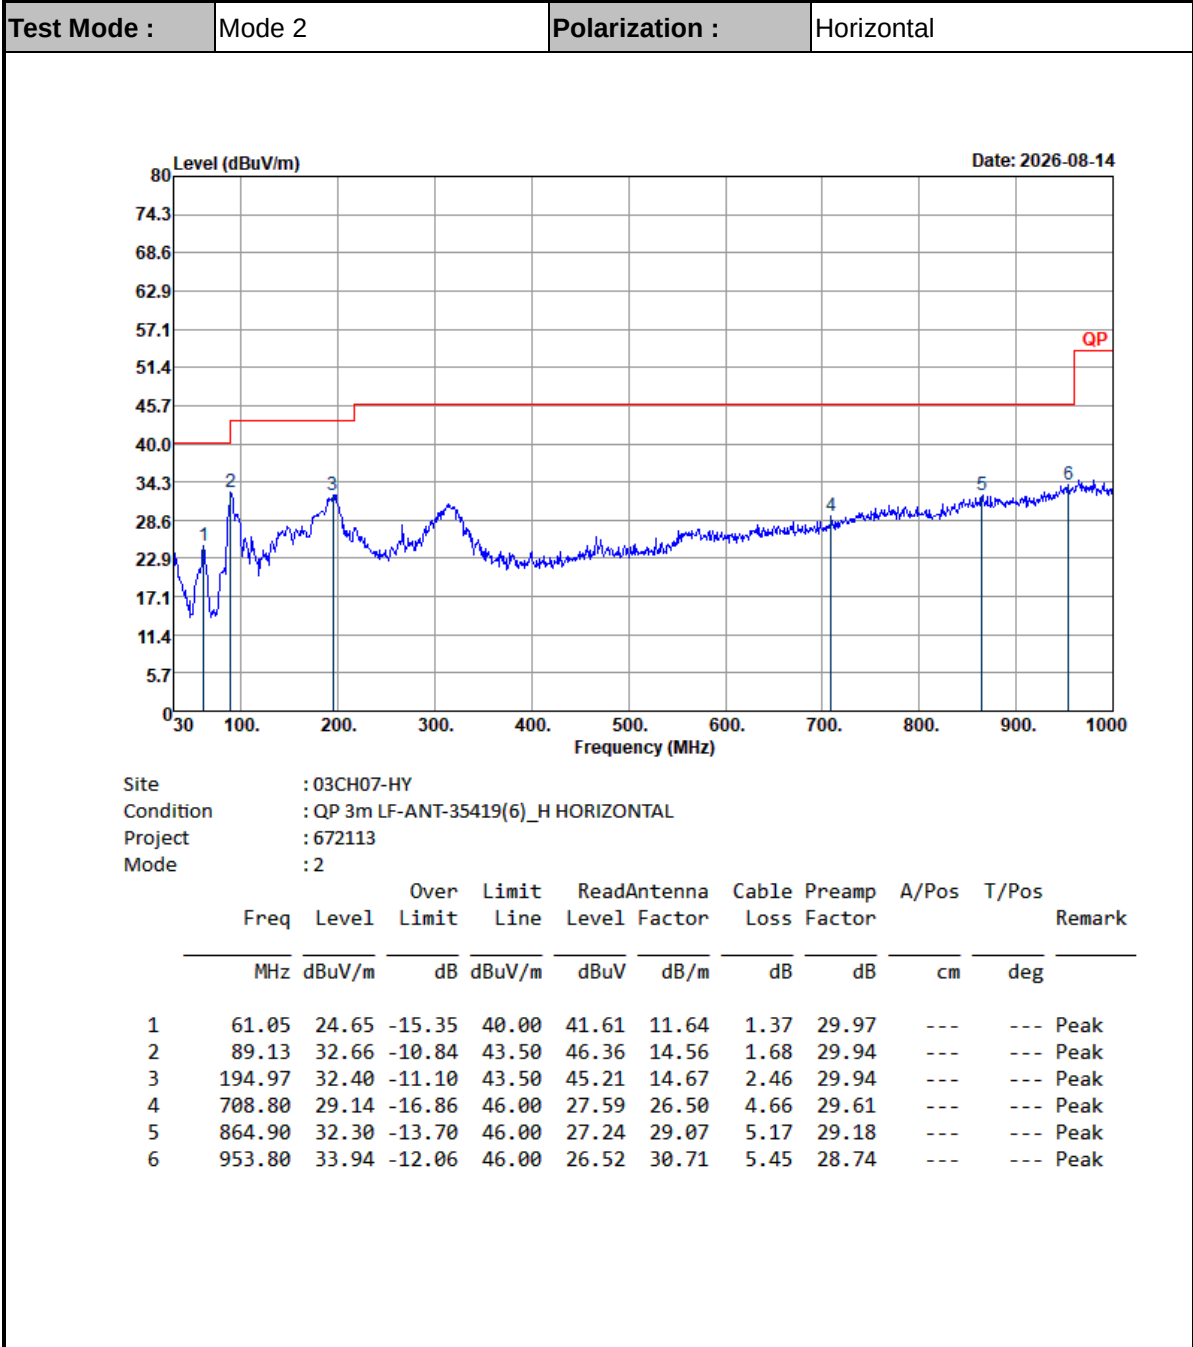

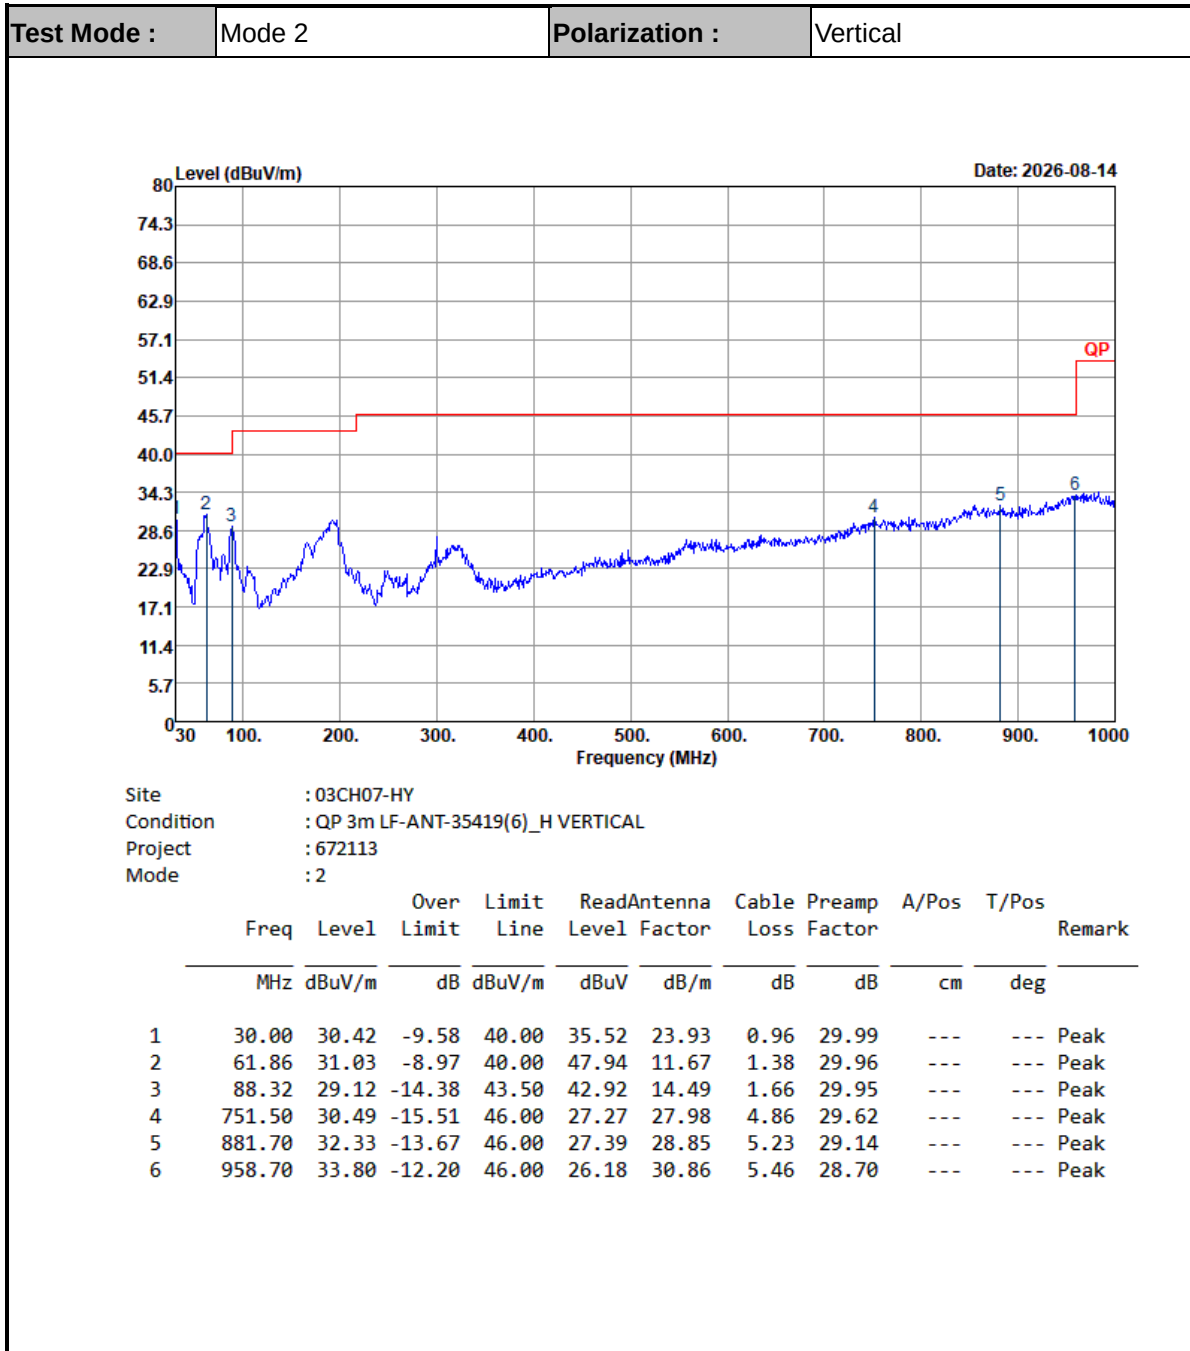
**Note:**


1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

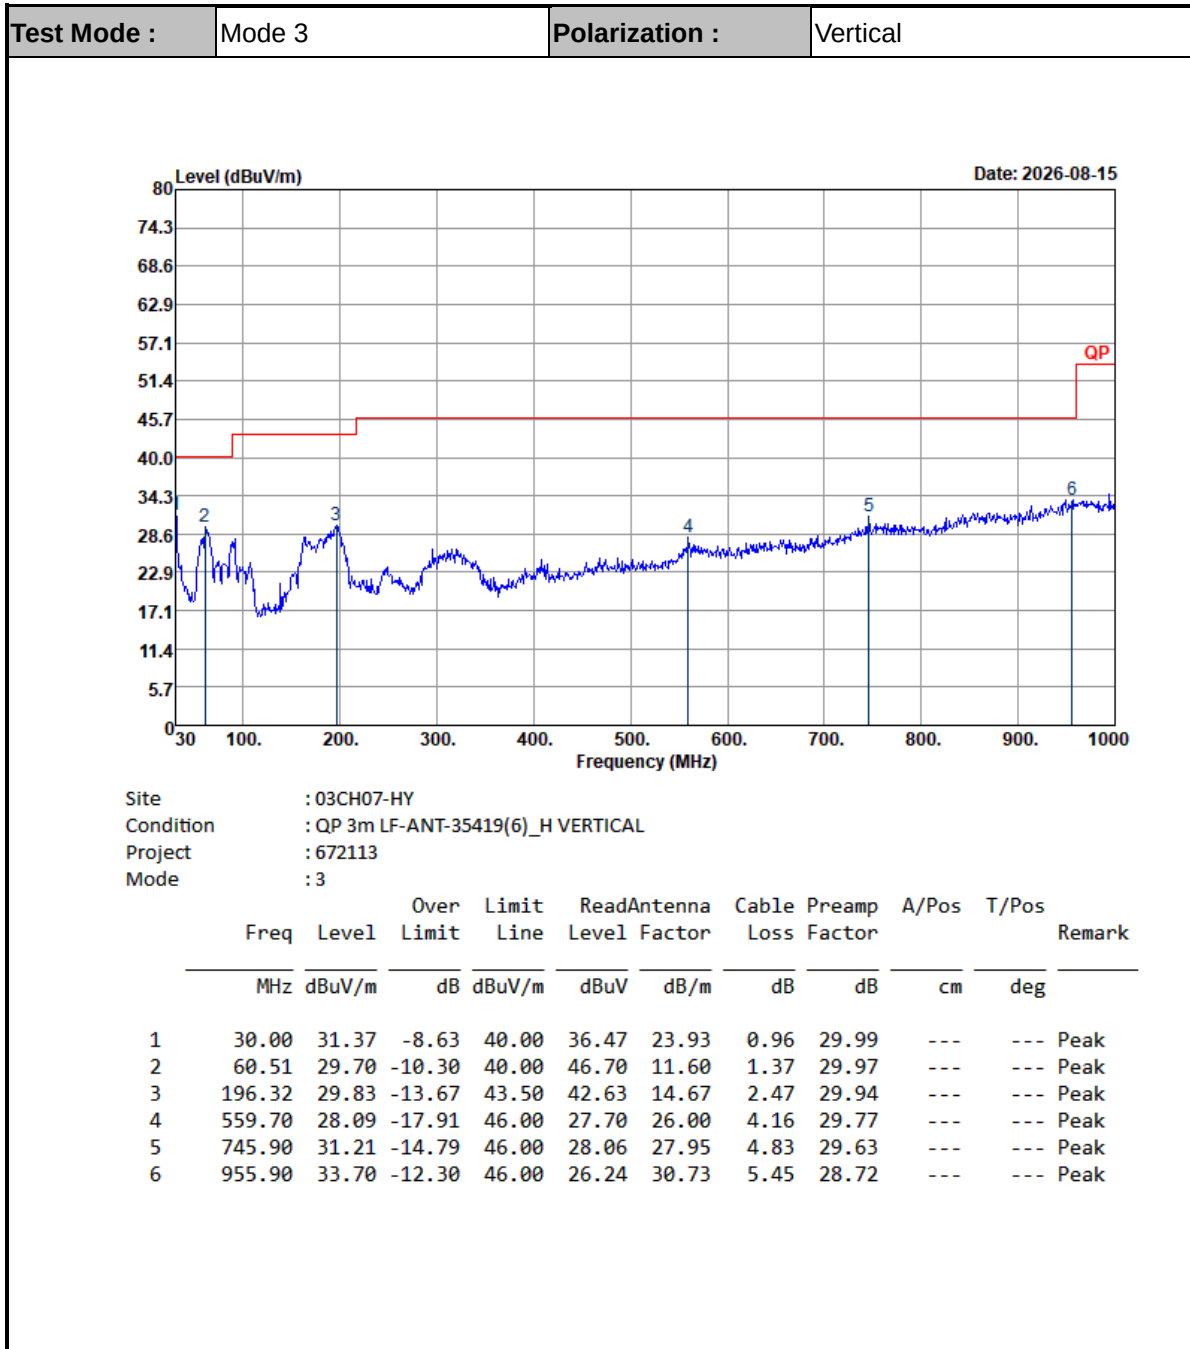


Note:

- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

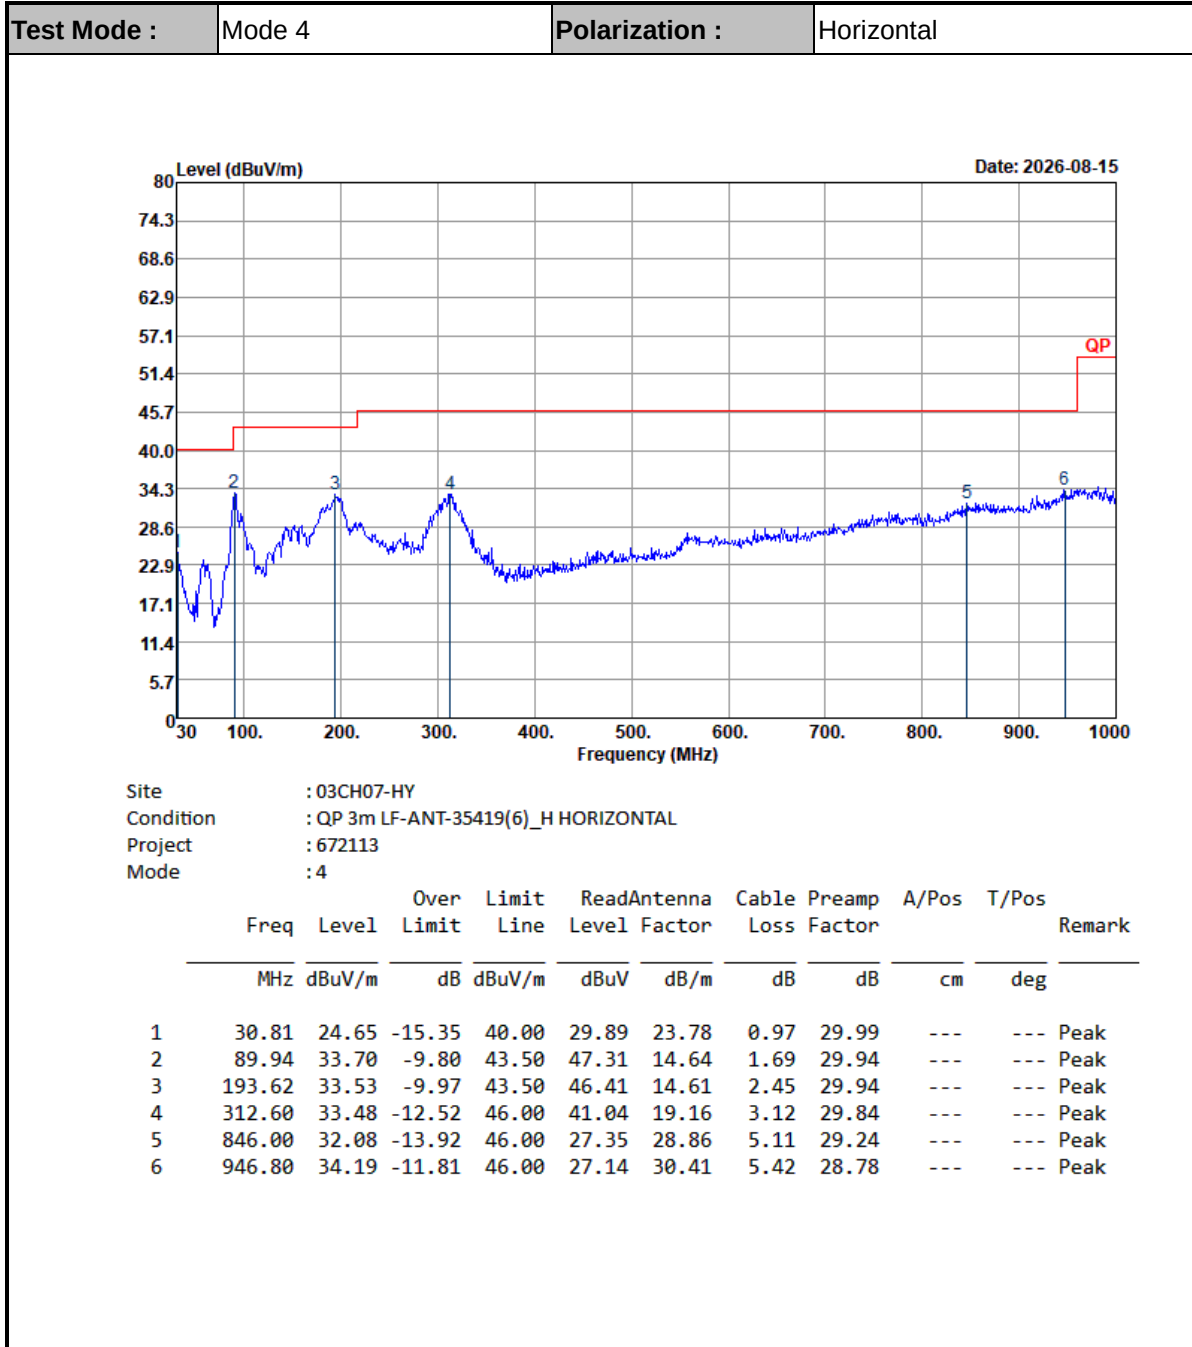

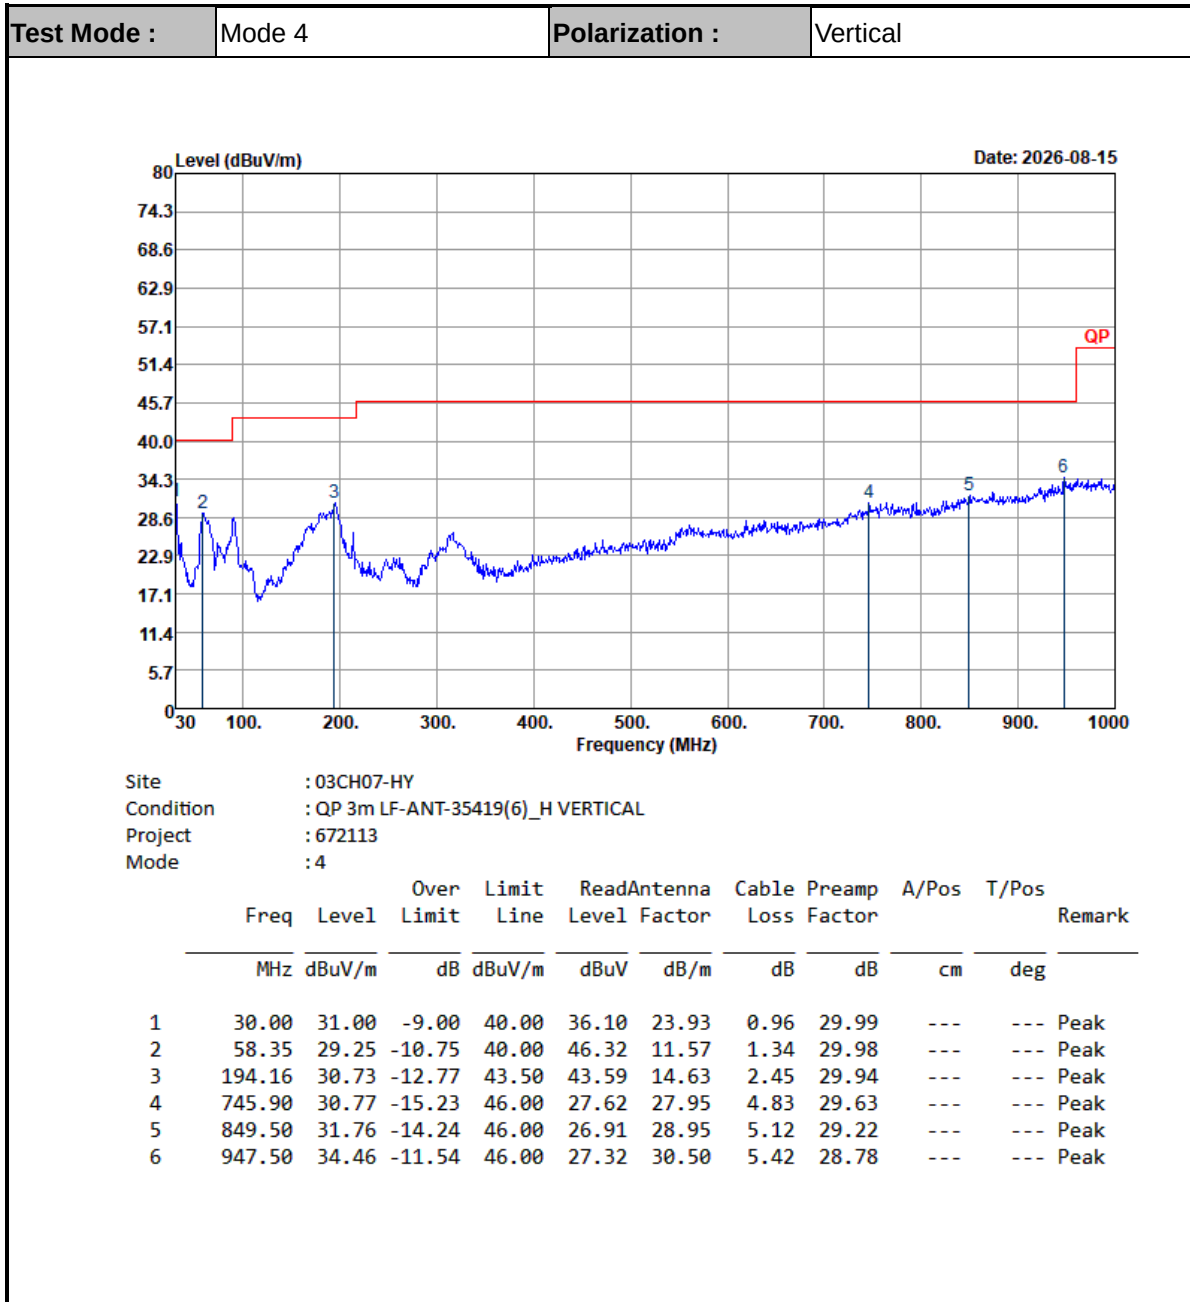**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBuV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.