Mode	19	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	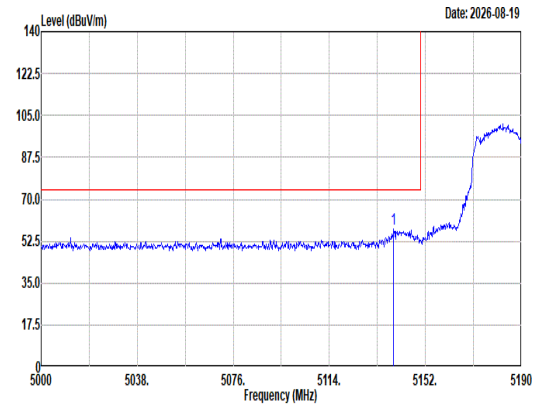 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5139.46 57.48 74.00 -16.52 49.09 33.08 11.50 36.19 0.00 101 305 Peak	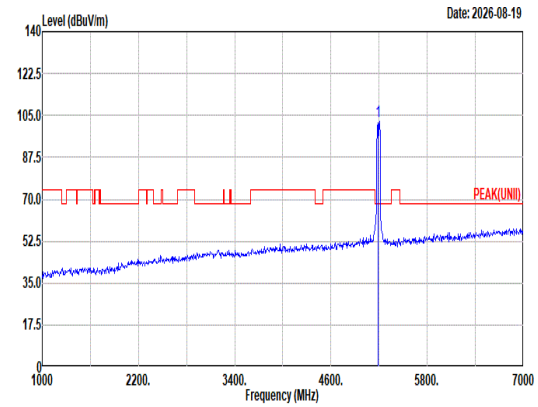 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 102.41 ------ ------ 94.05 33.00 11.55 36.19 0.00 101 305 Peak
Avg	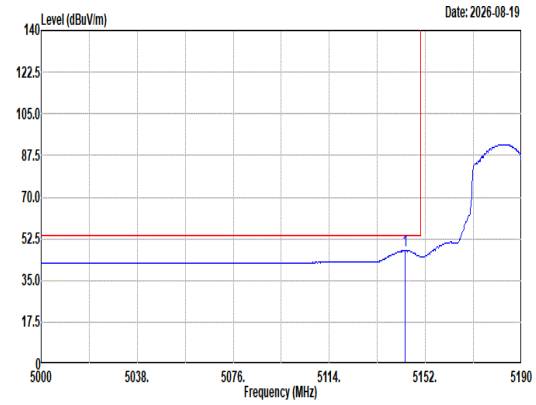 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.02 47.56 54.00 -6.44 39.15 33.09 11.51 36.19 0.00 101 305 Average	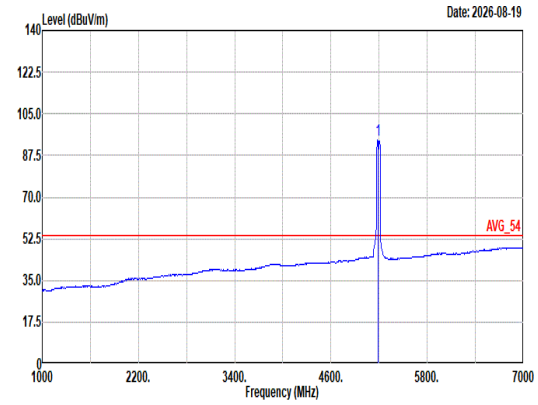 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 94.16 ------ ------ 85.78 33.04 11.53 36.19 0.00 101 305 Average

Mode	19	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	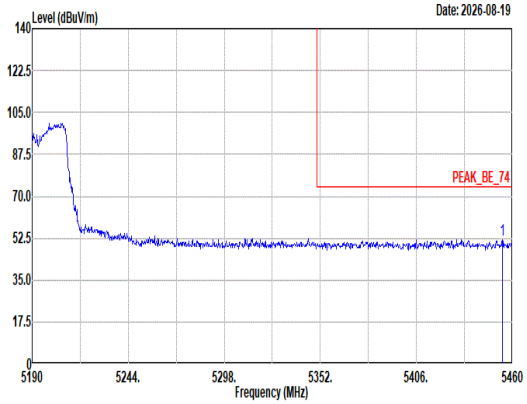 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.33 51.96 74.00 -22.04 43.49 32.82 11.87 36.22 0.00 101 305 Peak	Blank
Avg	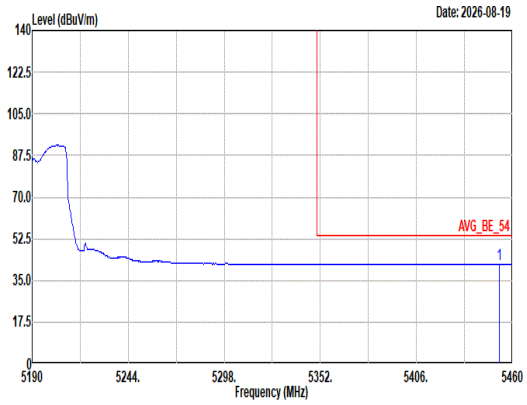 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.71 41.97 54.00 -12.03 33.51 32.81 11.87 36.22 0.00 101 305 Average	Blank

Mode	19	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	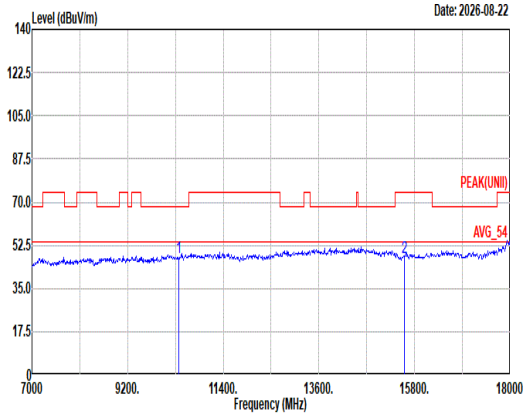 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 47.81 68.20 -20.39 59.09 38.50 16.11 66.86 0.97 -- -- Peak 2 15570.00 47.38 74.00 -26.62 55.48 37.90 19.78 66.44 0.66 -- -- Peak	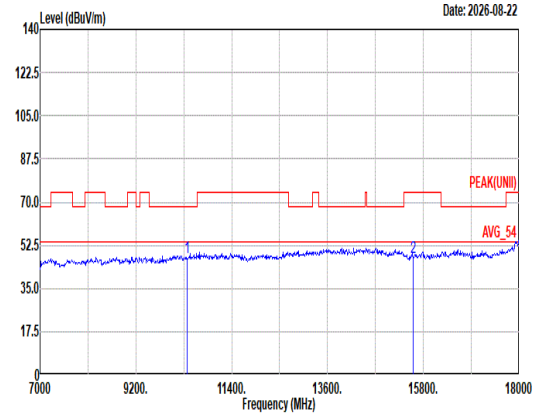 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 47.44 68.20 -20.76 58.72 38.50 16.11 66.86 0.97 -- -- Peak 2 15570.00 47.42 74.00 -26.58 55.52 37.90 19.78 66.44 0.66 -- -- Peak

Mode	19	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full RU_5190MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	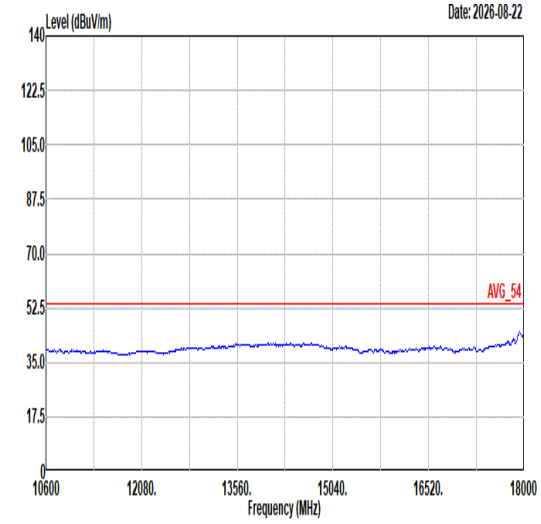	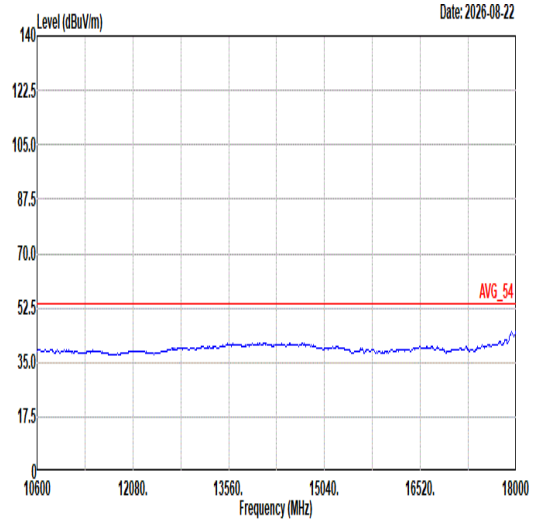

Mode	20	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	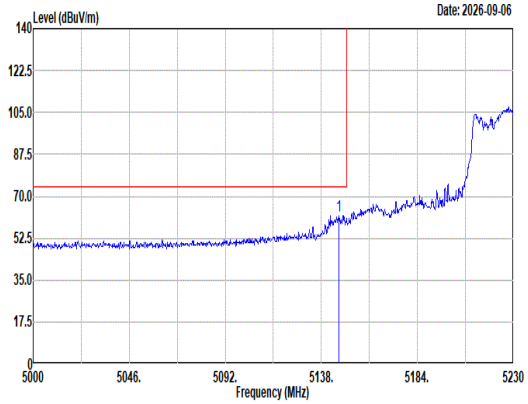 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5146.51 62.05 74.00 -11.95 53.64 33.09 11.51 36.19 0.00 111 307 Peak	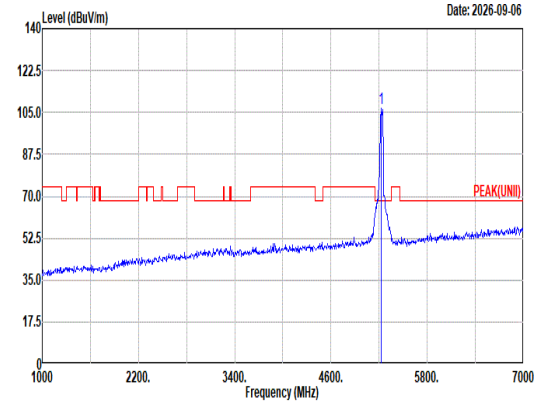 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5230.00 106.56 ------ ------ 98.18 33.00 11.58 36.20 0.00 111 307 Peak
Avg	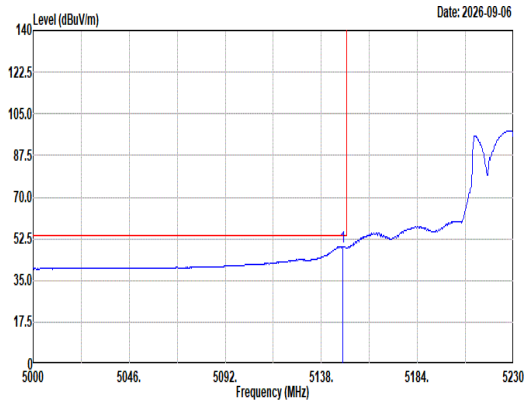 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5148.35 49.11 54.00 -4.89 40.69 33.10 11.51 36.19 0.00 111 307 Average	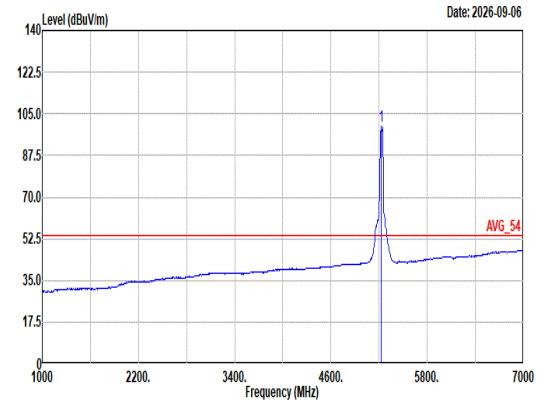 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5230.00 99.85 ------ ------ 91.47 33.00 11.58 36.20 0.00 111 307 Average

Mode	20	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	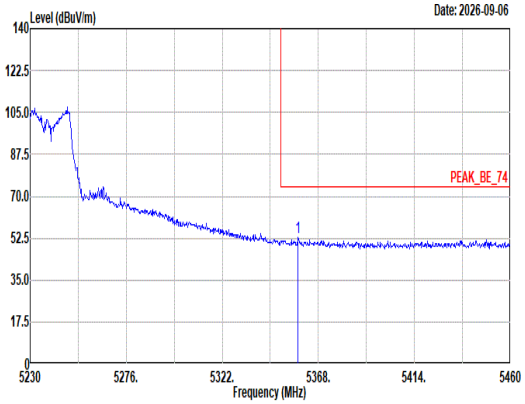 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.34 52.72 74.00 -21.28 44.30 32.87 11.76 36.21 0.00 111 307 Peak	Blank
Avg	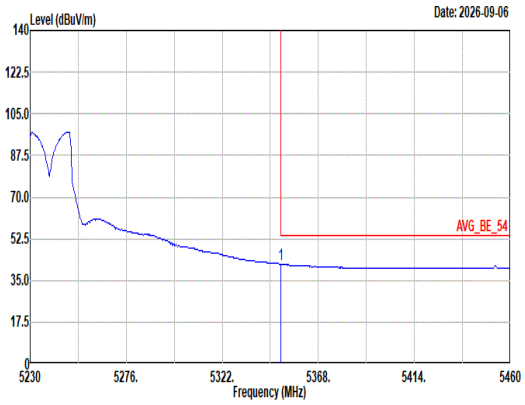 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.06 41.89 54.00 -12.11 33.45 32.90 11.75 36.21 0.00 111 307 Average	Blank

Mode	20	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	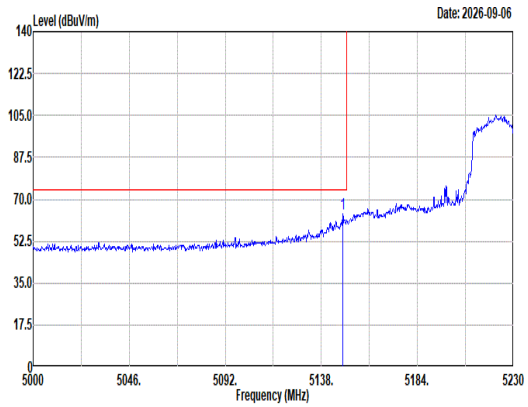 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.35 63.99 74.00 -10.01 55.57 33.10 11.51 36.19 0.00 100 307 Peak	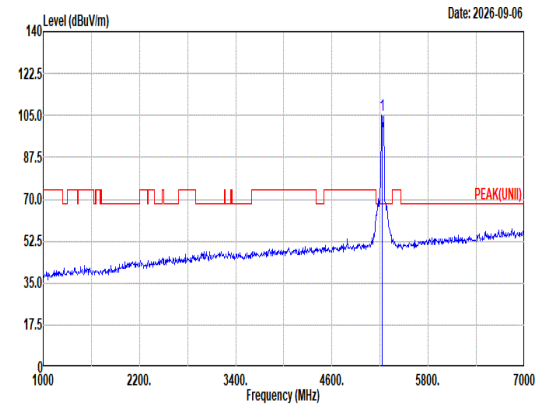 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 105.10 ------ ------ 96.73 33.00 11.57 36.20 0.00 100 307 Peak
Avg	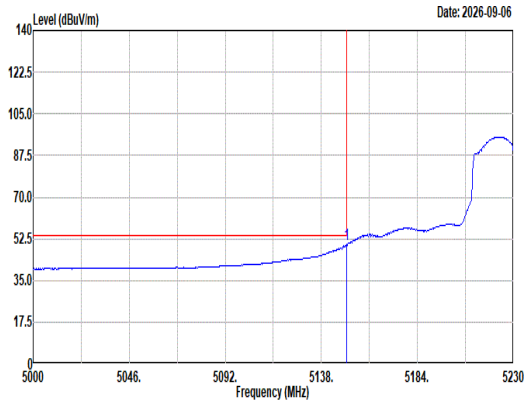 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.96 49.97 54.00 -4.03 41.55 33.10 11.51 36.19 0.00 100 307 Average	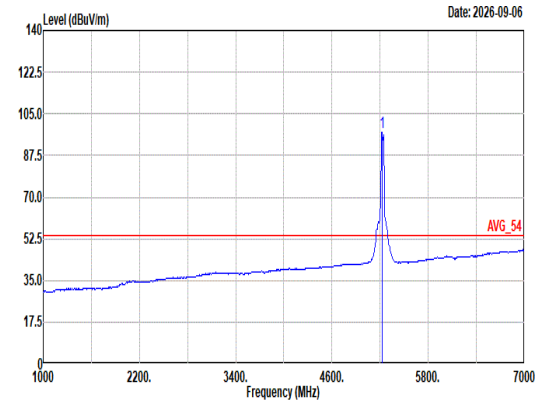 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 97.29 ------ ------ 88.92 33.00 11.57 36.20 0.00 100 307 Average

Mode	20	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	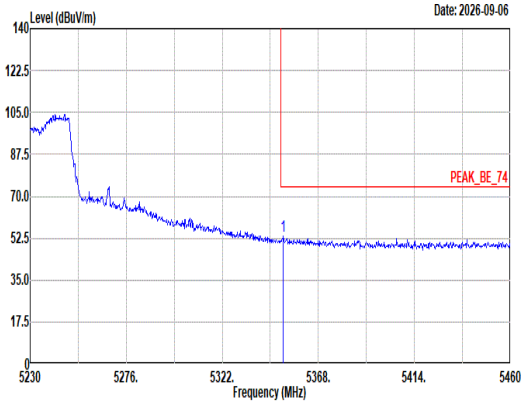 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.21 53.35 74.00 -20.65 44.91 32.90 11.75 36.21 0.00 100 307 Peak	Blank
Avg	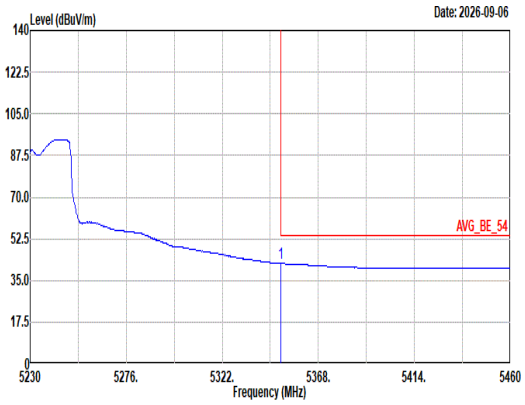 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.06 42.18 54.00 -11.82 33.74 32.90 11.75 36.21 0.00 100 307 Average	Blank

Mode	20	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	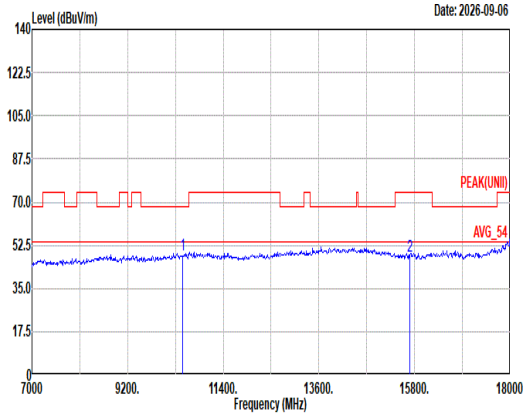 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 48.68 68.20 -19.52 59.74 38.60 16.17 66.79 0.96 -- -- Peak 2 15690.00 47.93 74.00 -26.07 56.25 37.70 19.86 66.55 0.67 -- -- Peak	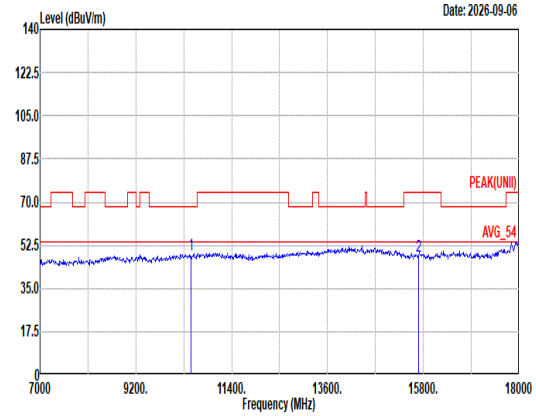 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 48.43 68.20 -19.77 59.49 38.60 16.17 66.79 0.96 -- -- Peak 2 15690.00 47.95 74.00 -26.05 56.27 37.70 19.86 66.55 0.67 -- -- Peak

Mode	20	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full RU_5230MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	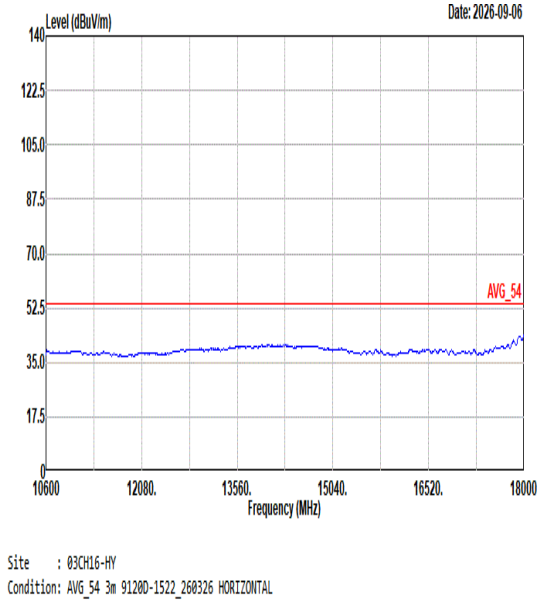	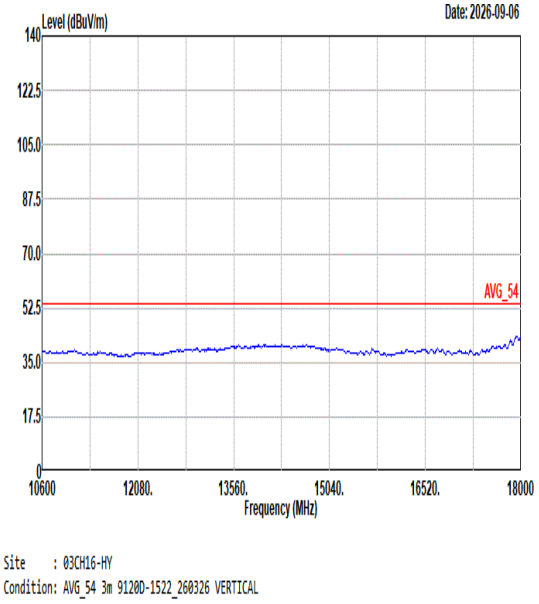

Mode	21	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	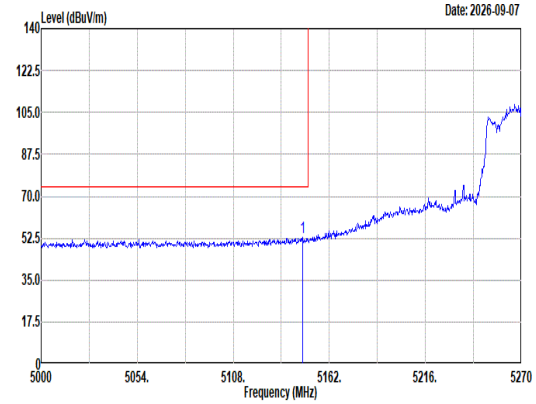 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.88 53.03 74.00 -20.97 44.62 33.09 11.51 36.19 0.00 273 307 Peak	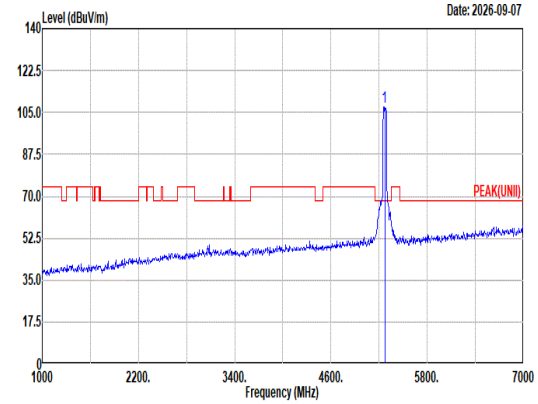 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 107.34 ------ ------ 98.94 32.98 11.62 36.20 0.00 273 307 Peak
Avg	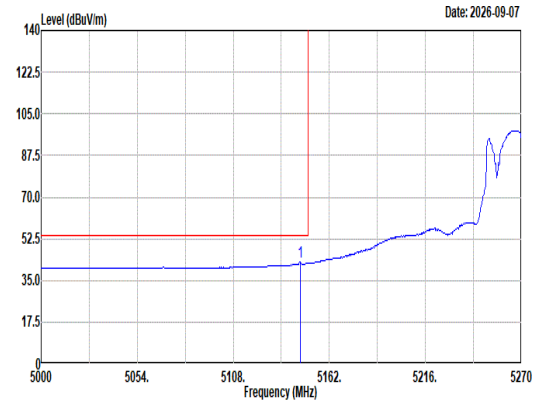 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.53 43.00 54.00 -11.00 34.59 33.09 11.51 36.19 0.00 273 307 Average	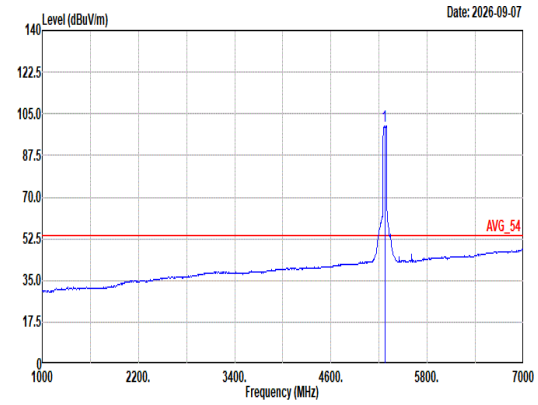 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 100.06 ------ ------ 91.66 32.97 11.63 36.20 0.00 273 307 Average

Mode	21	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	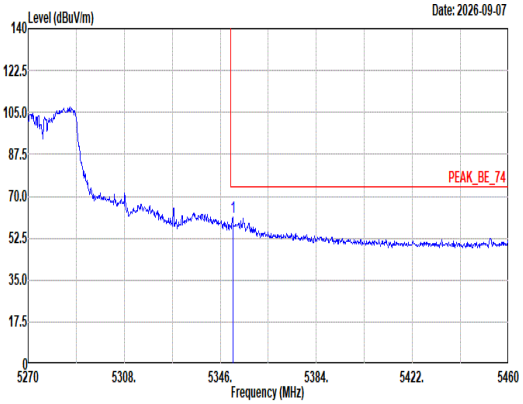 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.94 61.28 74.00 -12.72 52.84 32.90 11.75 36.21 0.00 273 307 Peak	Blank
Avg	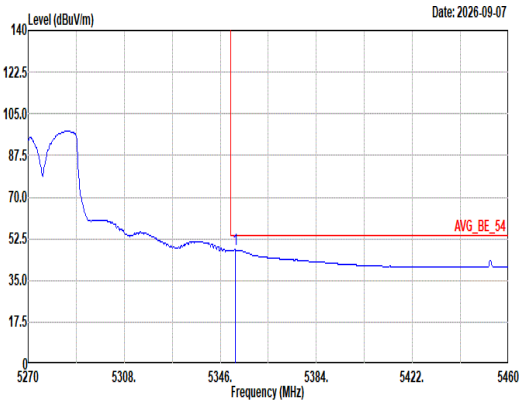 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.89 47.88 54.00 -6.12 39.45 32.89 11.75 36.21 0.00 273 307 Average	Blank

Mode	21
	Band Edge - L
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz
ANT	5+4

Pol.	Vertical	Fundamental
Peak	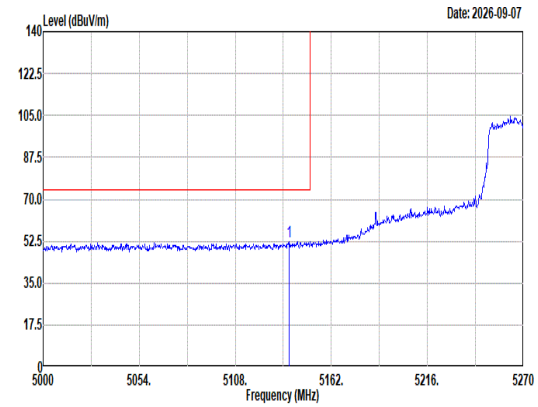 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5138.24 52.43 74.00 -21.57 44.04 33.08 11.50 36.19 0.00 100 201 Peak	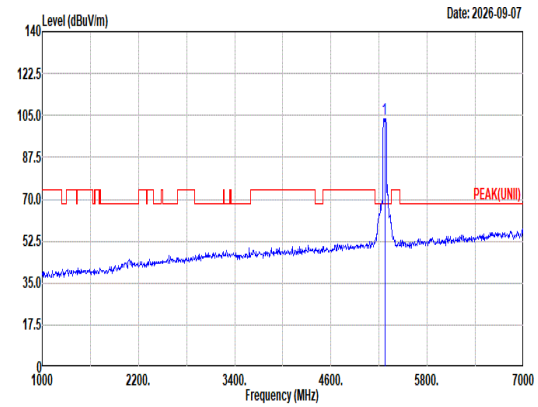 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5270.00 103.60 ------ ------ 95.20 32.98 11.62 36.20 0.00 100 201 Peak
Avg	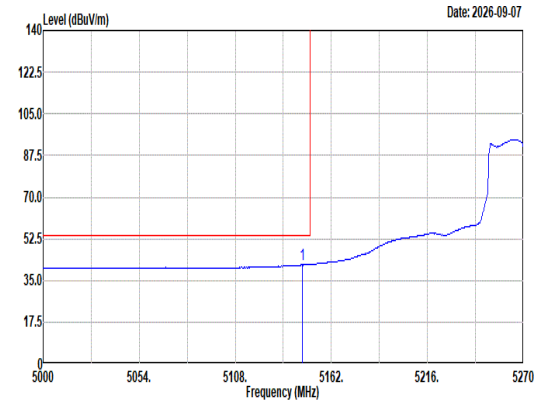 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5145.53 41.95 54.00 -12.05 33.54 33.09 11.51 36.19 0.00 100 201 Average	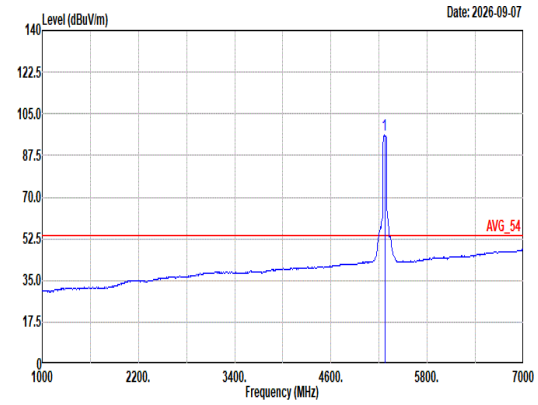 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5270.00 96.03 ------ ------ 87.63 32.97 11.63 36.20 0.00 100 201 Average

Mode	21	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	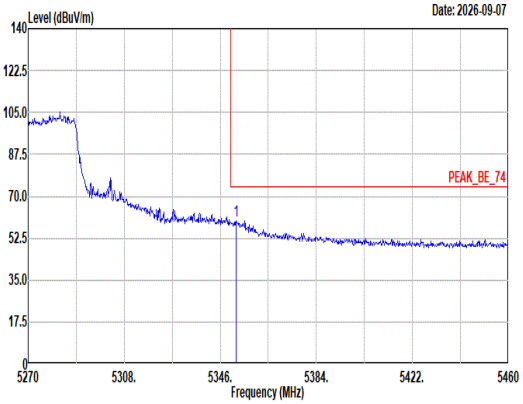 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.27 59.74 74.00 -14.26 51.31 32.89 11.75 36.21 0.00 100 201 Peak	Blank
Avg	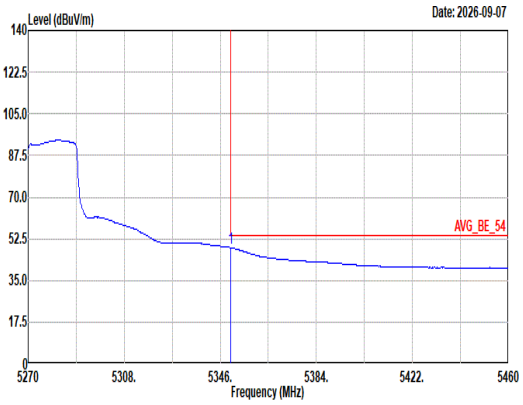 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.18 48.82 54.00 -5.18 40.38 32.90 11.75 36.21 0.00 100 201 Average	Blank

Mode	21	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	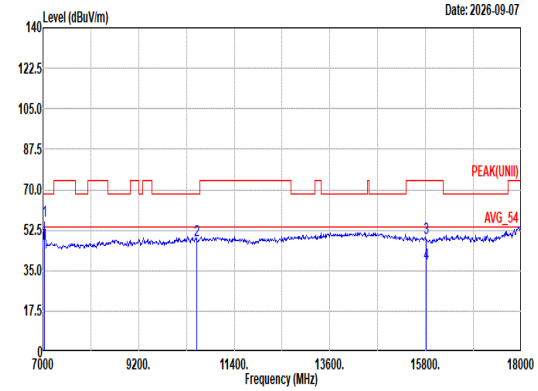 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL 1 7044.00 56.77 68.20 -11.43 71.79 36.08 13.34 65.65 1.21 265 335 Peak 2 10540.00 47.83 68.20 -20.37 58.76 38.60 16.22 66.69 0.94 -- -- Peak 3 15810.00 49.26 74.00 -24.74 57.64 37.66 19.94 66.65 0.67 100 229 Peak 4 15810.00 38.27 54.00 -15.73 46.65 37.66 19.94 66.65 0.67 100 229 Average	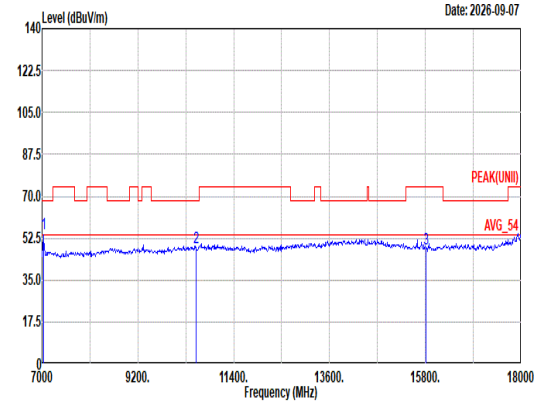 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL 1 7044.00 54.43 68.20 -13.77 69.45 36.08 13.34 65.65 1.21 102 15 Peak 2 10540.00 48.64 68.20 -19.56 59.57 38.60 16.22 66.69 0.94 -- -- Peak 3 15810.00 47.88 74.00 -26.12 56.26 37.66 19.94 66.65 0.67 -- -- Peak

Mode	21	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full RU_5270MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	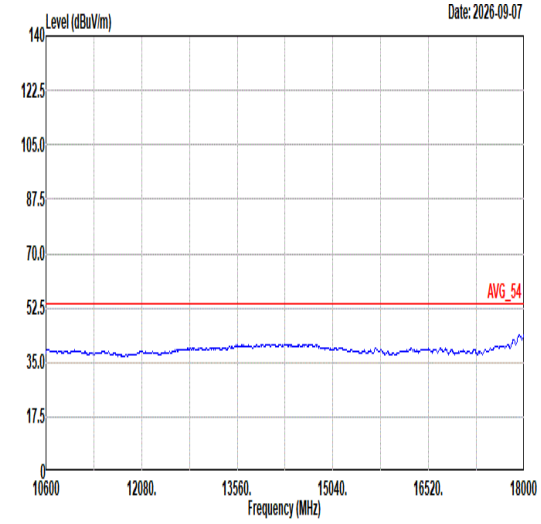 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	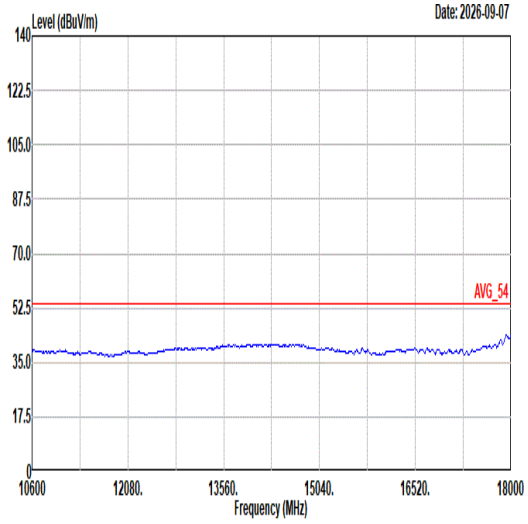 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	22	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	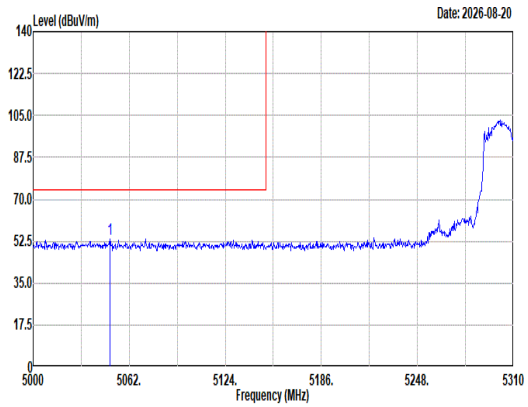 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5049.60 53.50 74.00 -20.50 45.23 33.00 11.45 36.18 0.00 100 3 Peak	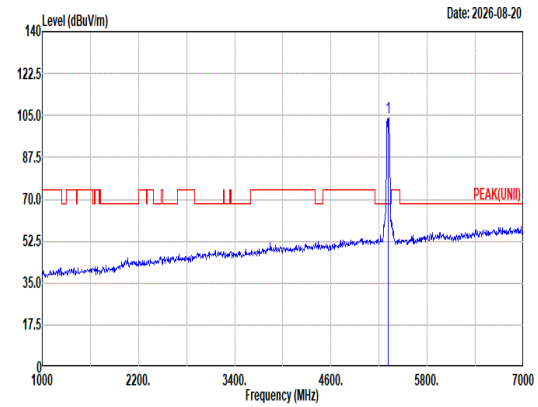 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 104.32 ------ ------ 95.92 32.90 11.71 36.21 0.00 100 3 Peak
Avg	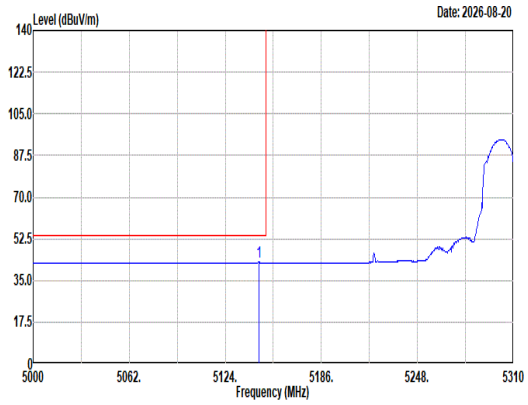 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.70 42.78 54.00 -11.22 34.37 33.09 11.51 36.19 0.00 100 3 Average	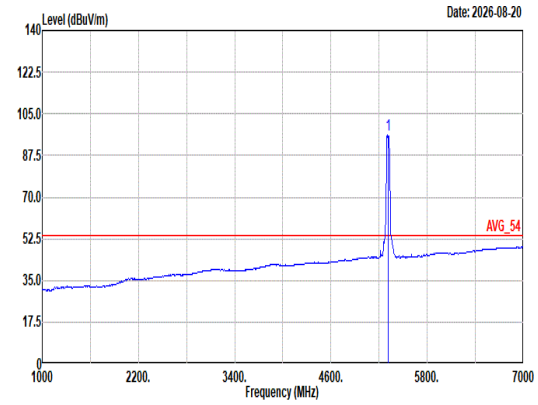 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 96.16 ------ ------ 87.79 32.90 11.68 36.21 0.00 100 3 Average

Mode	22	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	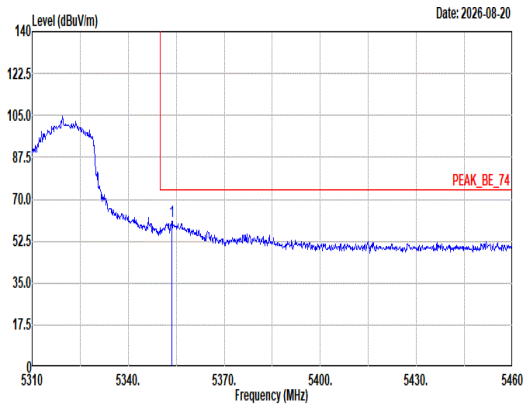 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.65 60.93 74.00 -13.07 52.49 32.89 11.76 36.21 0.00 100 3 Peak	Blank
Avg	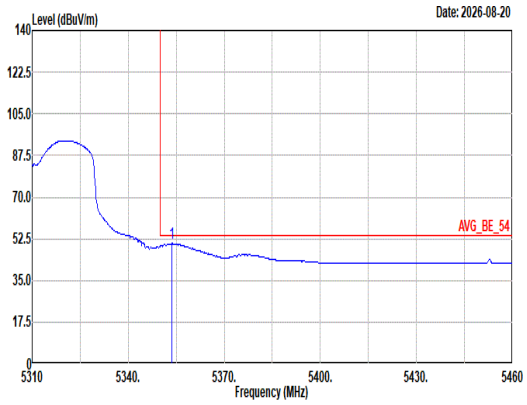 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.65 50.52 54.00 -3.48 42.08 32.89 11.76 36.21 0.00 100 3 Average	Blank

Mode	22	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	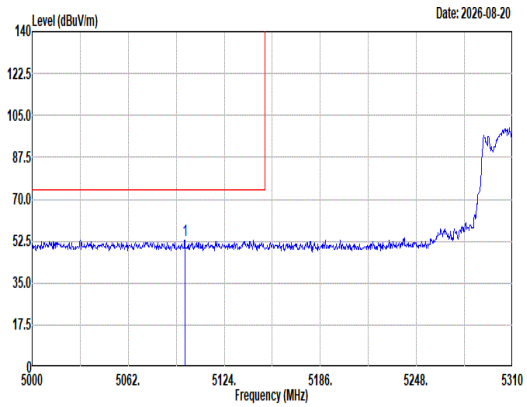 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5098.58 52.84 74.00 -21.16 44.54 33.00 11.48 36.18 0.00 100 160 Peak	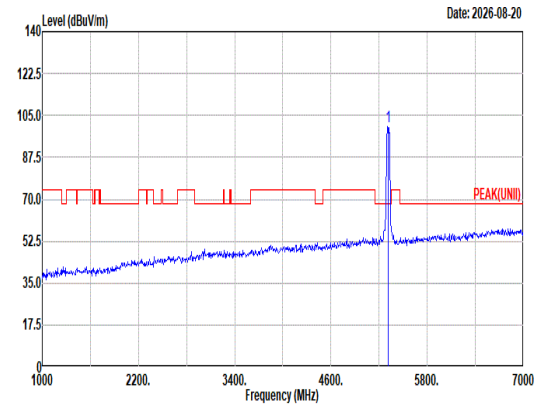 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 100.15 ------ ------ 91.77 32.90 11.69 36.21 0.00 100 160 Peak
Avg	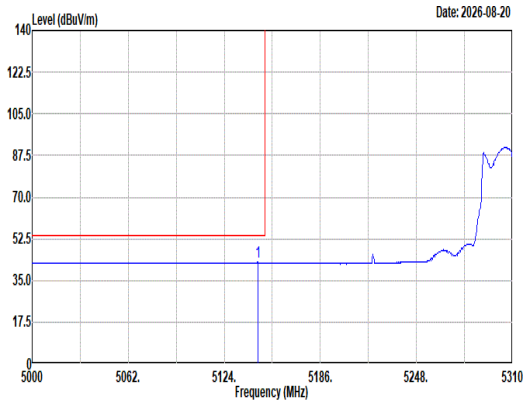 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.70 42.60 54.00 -11.40 34.19 33.09 11.51 36.19 0.00 100 160 Average	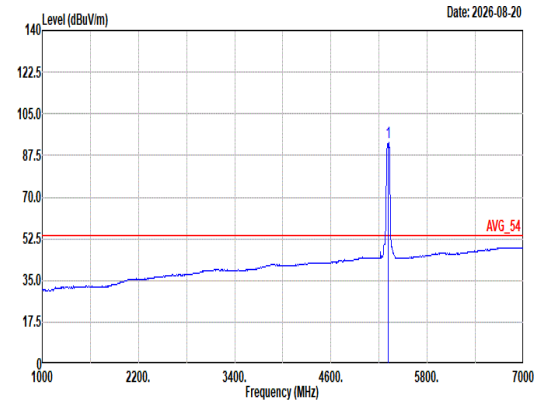 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 92.84 ------ ------ 84.43 32.90 11.72 36.21 0.00 100 160 Average

Mode	22	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	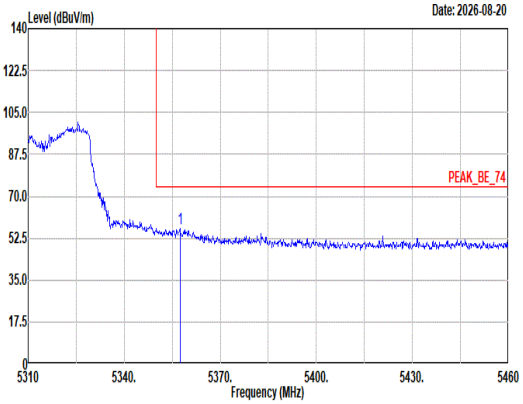 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.40 56.59 74.00 -17.41 48.17 32.87 11.76 36.21 0.00 100 160 Peak	Blank
Avg	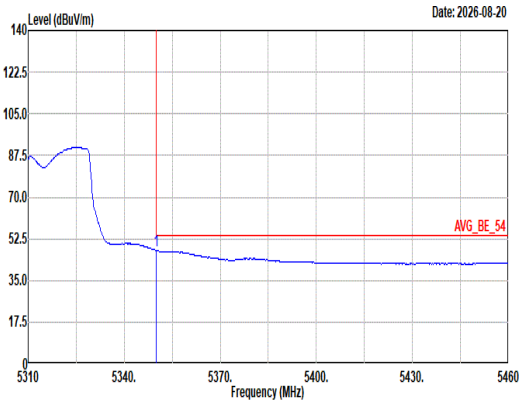 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.05 47.60 54.00 -6.40 39.16 32.90 11.75 36.21 0.00 100 160 Average	Blank

Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	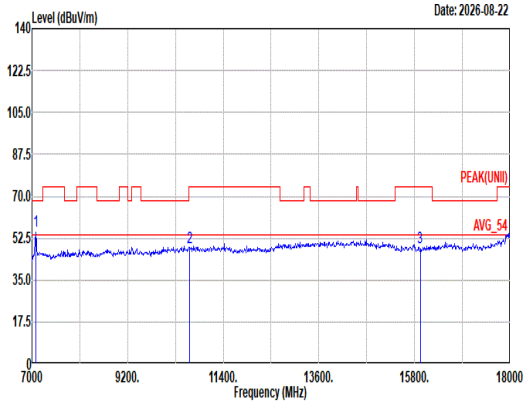 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7088.00 55.61 68.20 -12.59 70.52 36.25 13.38 65.67 1.13 100 343 Peak 2 10620.00 48.85 74.00 -25.15 59.21 38.98 16.28 66.55 0.93 -- -- Peak 3 15930.00 48.43 74.00 -25.57 57.02 37.48 20.01 66.76 0.68 -- -- Peak	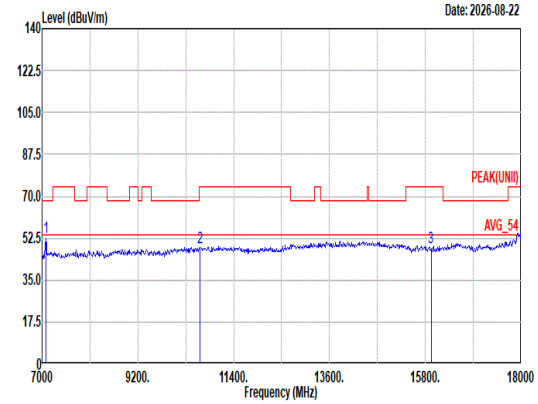 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7088.00 53.02 68.20 -15.18 67.93 36.25 13.38 65.67 1.13 202 0 Peak 2 10620.00 48.55 74.00 -25.45 58.91 38.98 16.28 66.55 0.93 -- -- Peak 3 15930.00 48.66 74.00 -25.34 57.25 37.48 20.01 66.76 0.68 -- -- Peak

Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full RU_5310MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	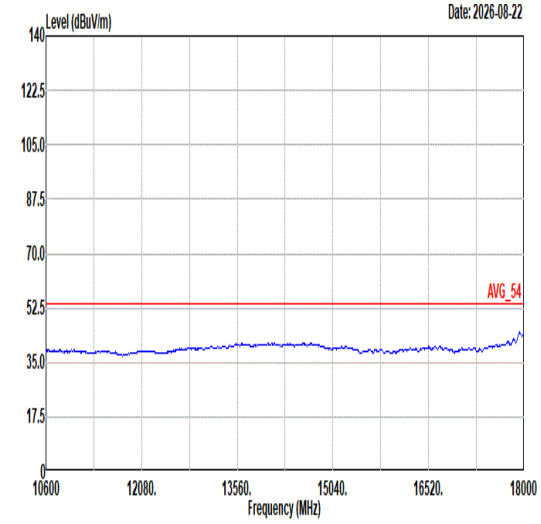	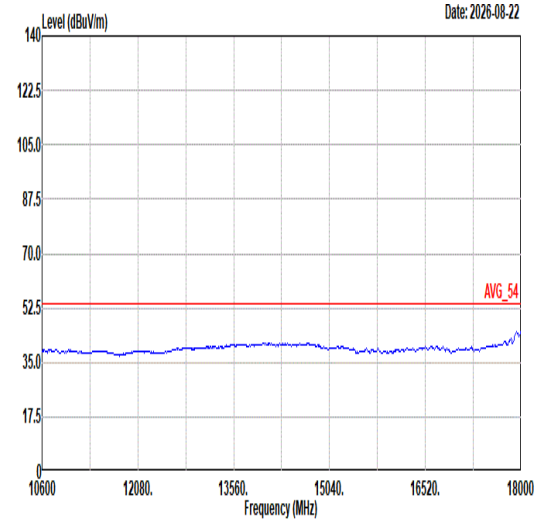

Mode	23	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	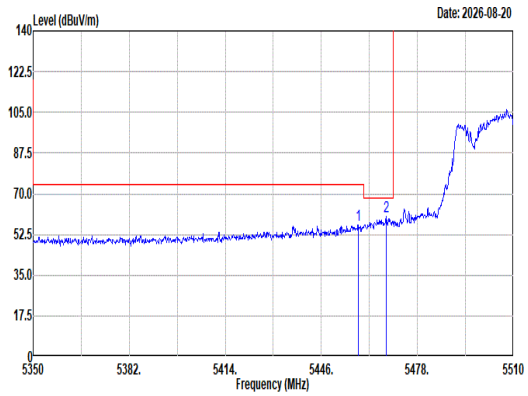 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.32 56.63 74.00 -17.37 48.14 32.83 11.88 36.22 0.00 300 331 Peak 2 5467.60 60.35 68.20 -7.85 51.82 32.87 11.89 36.23 0.00 300 331 Peak	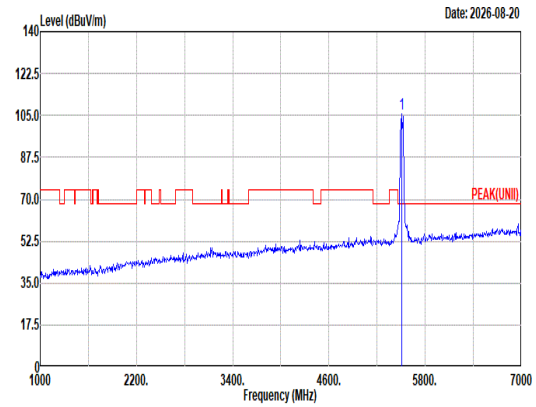 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 105.67 ------ ------ 96.99 32.98 11.93 36.23 0.00 300 331 Peak
Avg	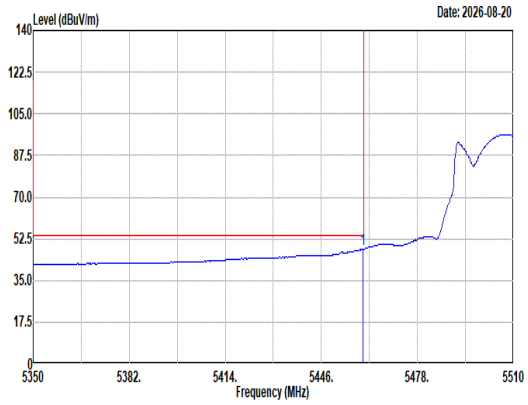 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 48.17 54.00 -5.83 39.68 32.84 11.88 36.23 0.00 300 331 Average	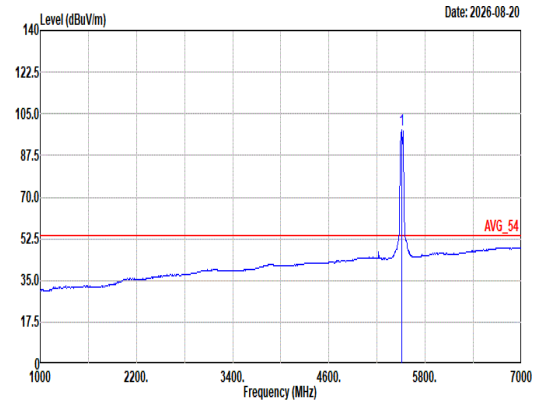 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 98.25 ------ ------ 89.57 32.98 11.93 36.23 0.00 300 331 Average

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	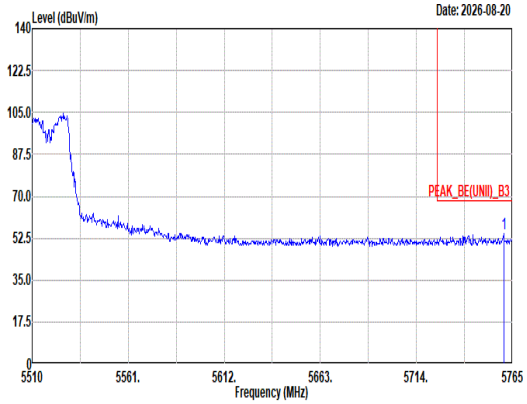 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.41 54.31 68.20 -13.89 44.88 33.56 12.17 36.30 0.00 300 331 Peak	Blank

Mode	23
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz
ANT	5+4

Pol.	Vertical	Fundamental
Peak	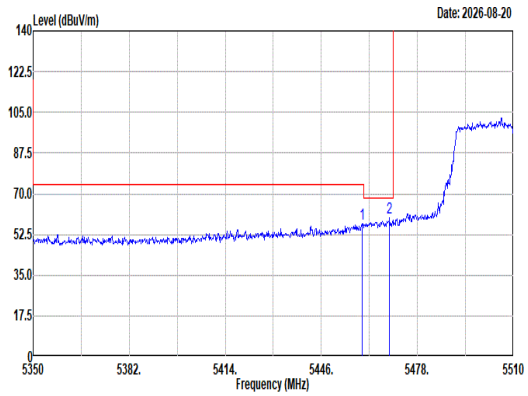 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5459.60 57.07 74.00 -16.93 48.58 32.84 11.88 36.23 0.00 113 312 Peak 2 5468.72 59.48 68.20 -8.72 50.95 32.87 11.89 36.23 0.00 113 312 Peak	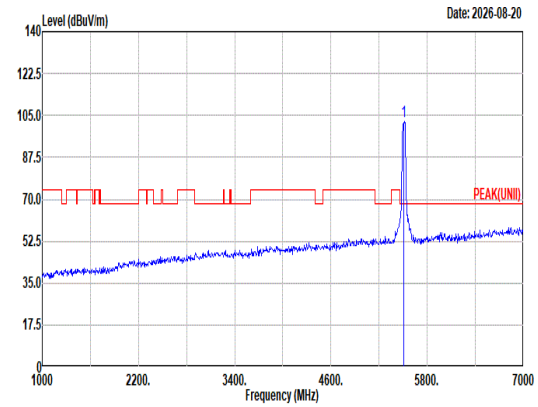 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5510.00 102.59 ------ ------ 93.95 32.93 11.94 36.23 0.00 113 312 Peak
Avg	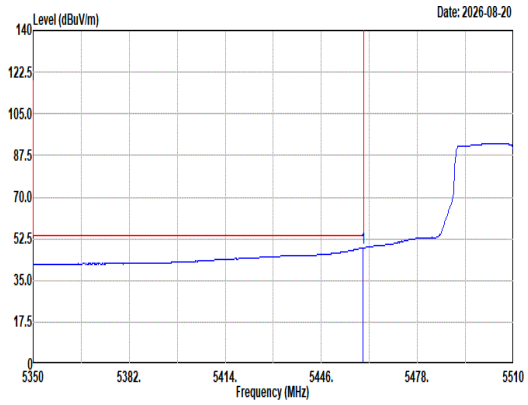 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.92 48.72 54.00 -5.28 40.23 32.84 11.88 36.23 0.00 113 312 Average	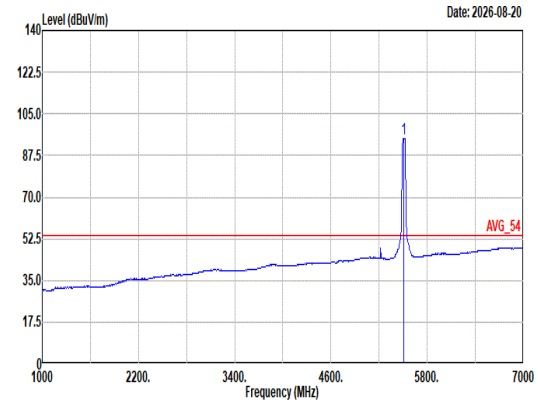 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5510.00 94.82 ------ ------ 86.18 32.93 11.94 36.23 0.00 113 312 Average

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	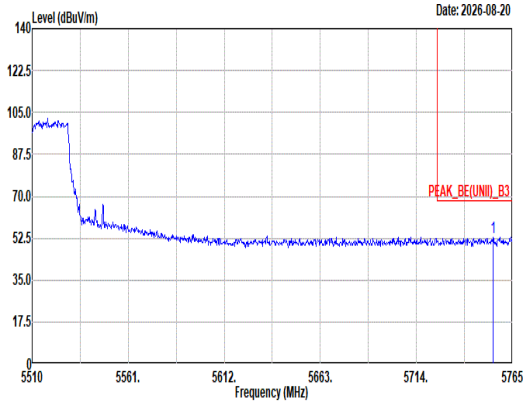 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5754.55 52.72 68.20 -15.48 43.32 33.53 12.17 36.30 0.00 113 312 Peak	Blank

Mode	23	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	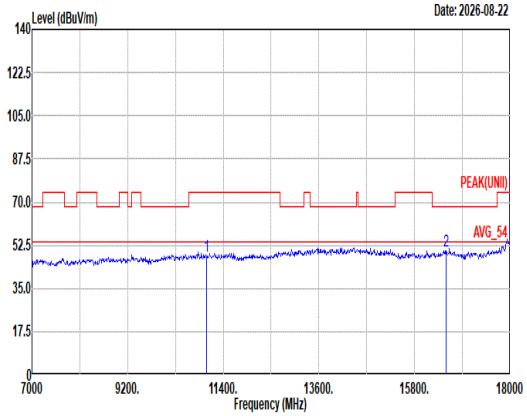 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 47.91 74.00 -26.09 57.57 38.80 16.56 65.88 0.86 -- -- Peak 2 16530.00 50.00 68.20 -18.20 57.56 38.42 20.37 67.08 0.73 -- -- Peak	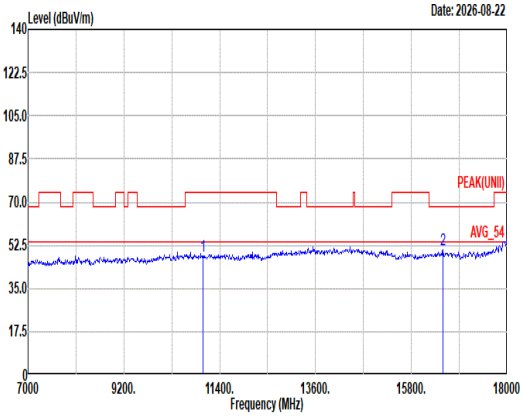 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 47.97 74.00 -26.03 57.63 38.80 16.56 65.88 0.86 -- -- Peak 2 16530.00 50.71 68.20 -17.49 58.27 38.42 20.37 67.08 0.73 -- -- Peak

Mode	23	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full RU_5510MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	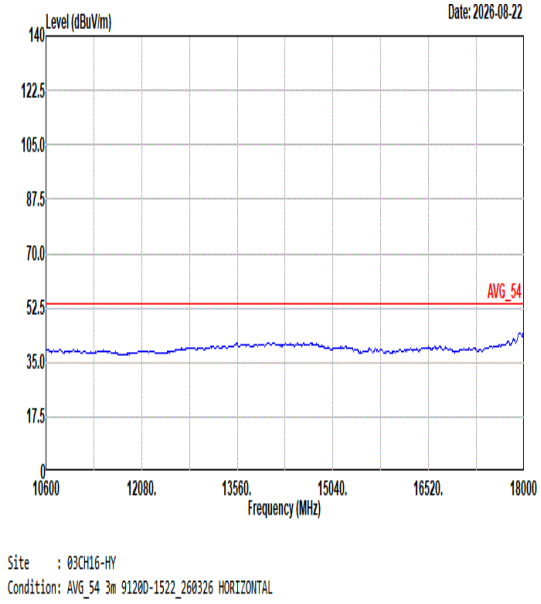	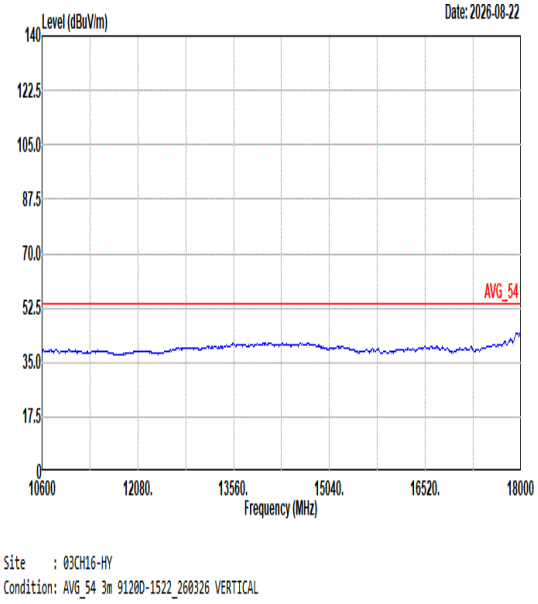

Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_Full RU_5550MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	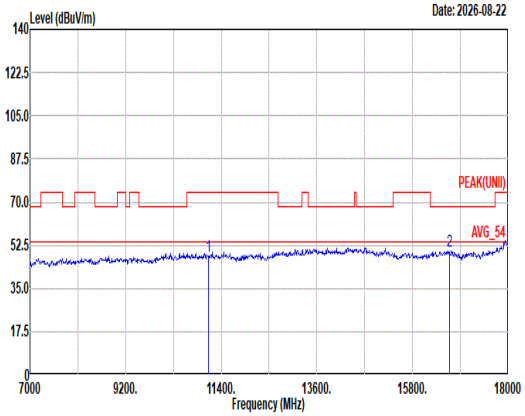 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 47.90 74.00 -26.10 57.64 38.70 16.62 65.90 0.84 -- -- Peak 2 16650.00 50.05 68.20 -18.15 57.57 38.20 20.44 66.90 0.74 -- -- Peak	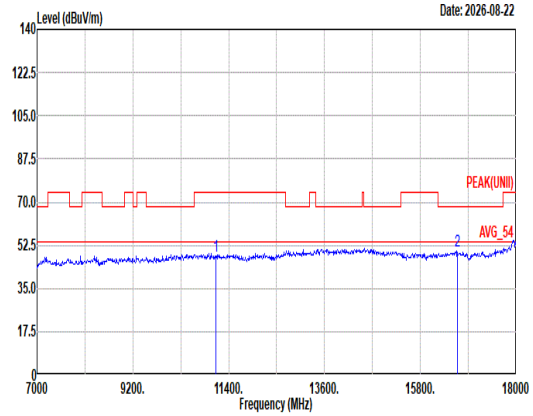 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 47.91 74.00 -26.09 57.65 38.70 16.62 65.90 0.84 -- -- Peak 2 16650.00 50.08 68.20 -18.12 57.60 38.20 20.44 66.90 0.74 -- -- Peak

Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_Full RU_5550MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	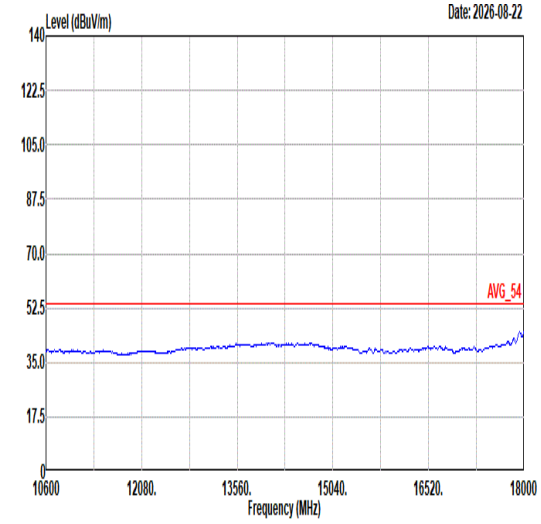	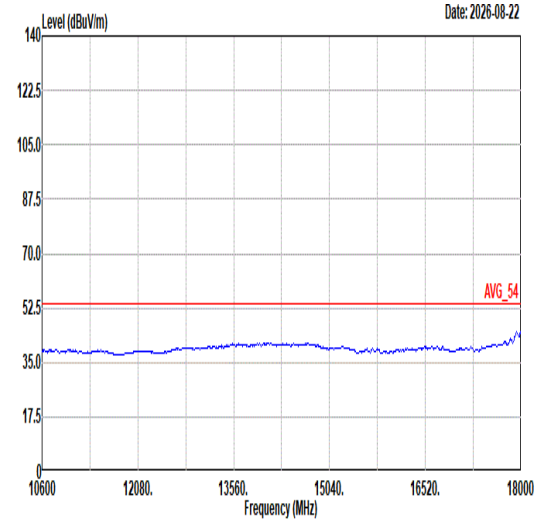

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	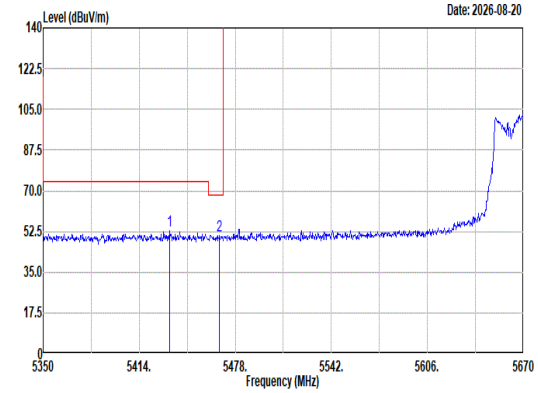 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5434.48 52.71 74.00 -21.29 44.31 32.77 11.85 36.22 0.00 400 118 Peak 2 5467.44 50.95 68.20 -17.25 42.42 32.87 11.89 36.23 0.00 400 118 Peak	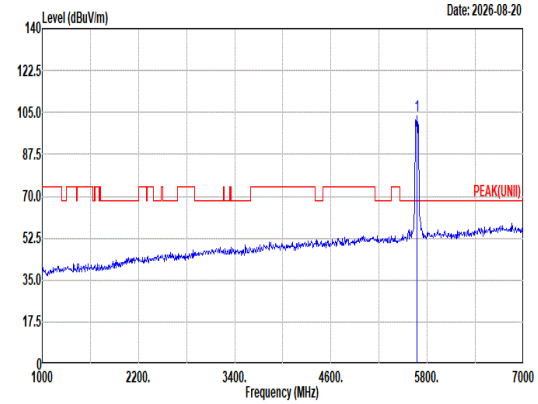 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 103.57 ------ ------ 94.52 33.24 12.09 36.28 0.00 400 118 Peak
Avg	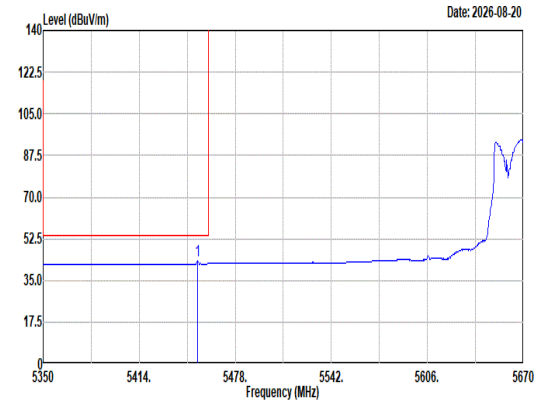 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.72 43.33 54.00 -10.67 34.87 32.81 11.87 36.22 0.00 400 118 Average	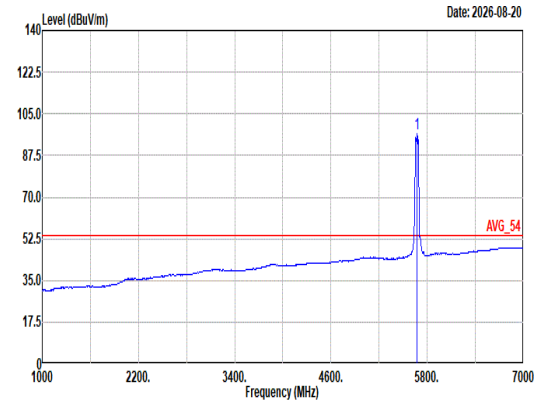 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 96.43 ------ ------ 87.38 33.24 12.09 36.28 0.00 400 118 Average

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	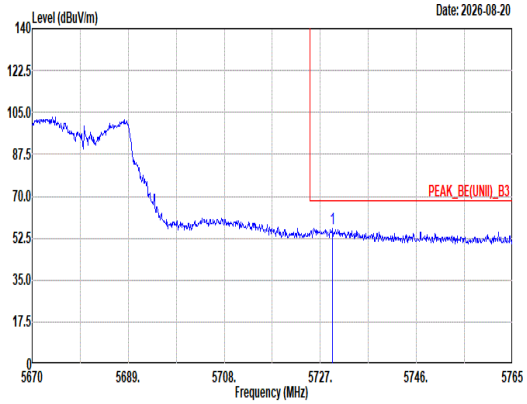 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5729.47 56.55 68.20 -11.65 47.24 33.46 12.14 36.29 0.00 400 118 Peak	Blank

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	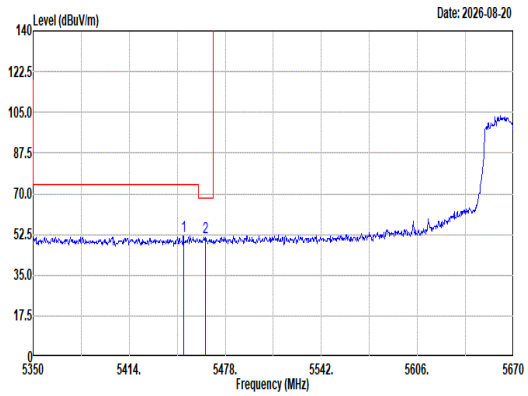 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.16 51.90 74.00 -22.10 43.45 32.80 11.87 36.22 0.00 103 148 Peak 2 5464.56 51.33 68.20 -16.87 42.82 32.86 11.88 36.23 0.00 103 148 Peak	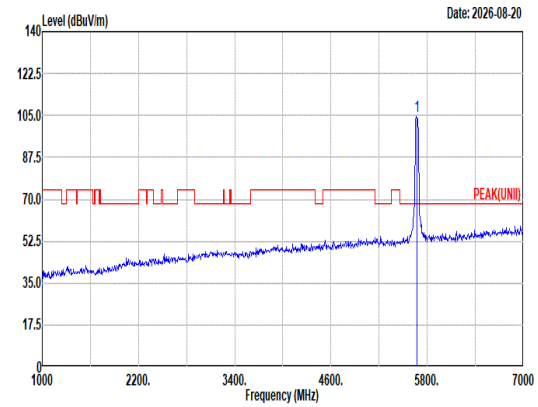 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 104.49 ------ ------ 95.51 33.17 12.08 36.27 0.00 103 148 Peak
Avg	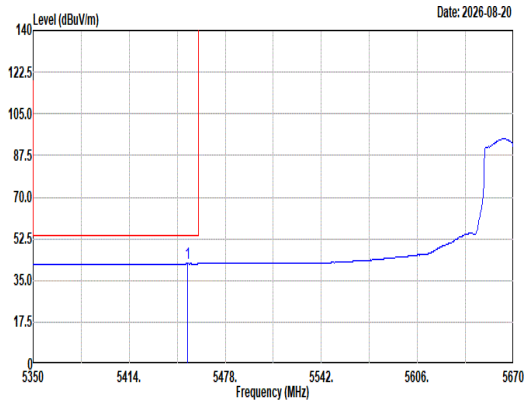 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.72 42.36 54.00 -11.64 33.90 32.81 11.87 36.22 0.00 103 148 Average	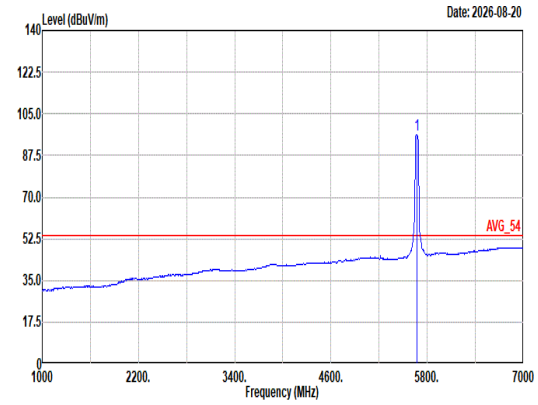 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 96.40 ------ ------ 87.42 33.17 12.08 36.27 0.00 103 148 Average

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	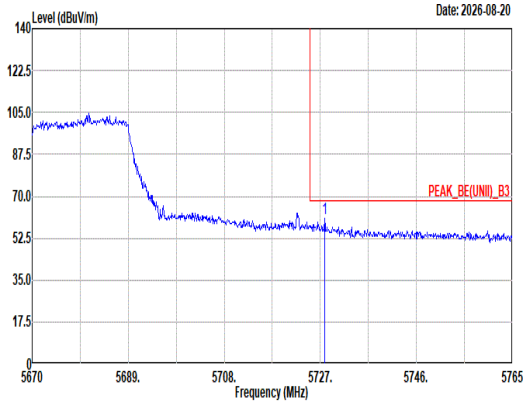 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.86 60.50 68.20 -7.70 51.19 33.46 12.14 36.29 0.00 103 148 Peak	Blank

Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	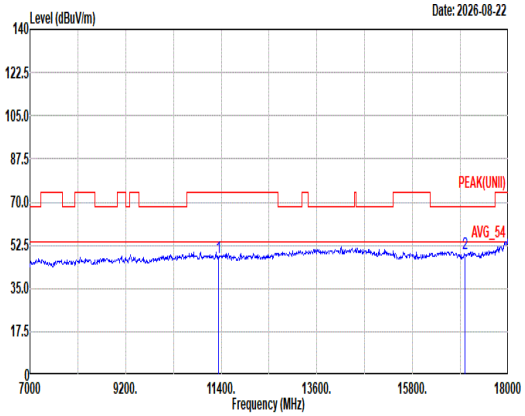 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.47 74.00 -26.53 56.77 39.08 16.80 65.98 0.80 -- -- Peak 2 17010.00 48.98 68.20 -19.22 55.87 38.04 20.65 66.36 0.78 -- -- Peak	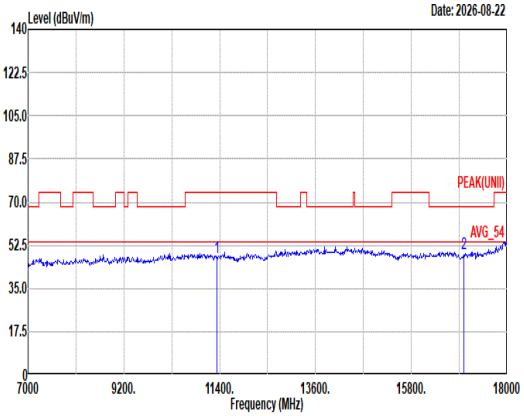 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.55 74.00 -26.45 56.85 39.08 16.80 65.98 0.80 -- -- Peak 2 17010.00 49.14 68.20 -19.06 56.03 38.04 20.65 66.36 0.78 -- -- Peak

Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full RU_5670MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	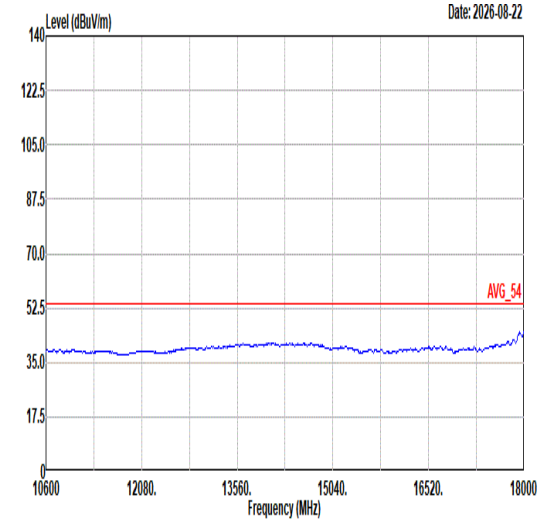	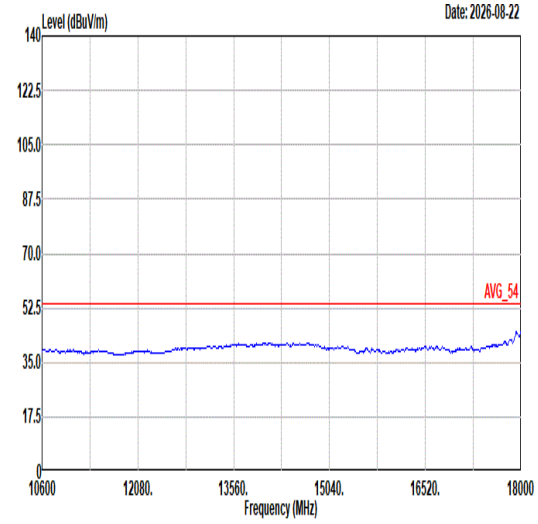

Mode	26	
	Band Edge - L	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	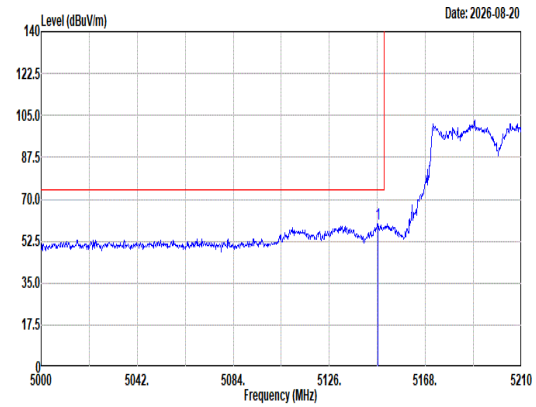 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.21 59.61 74.00 -14.39 51.20 33.09 11.51 36.19 0.00 104 306 Peak	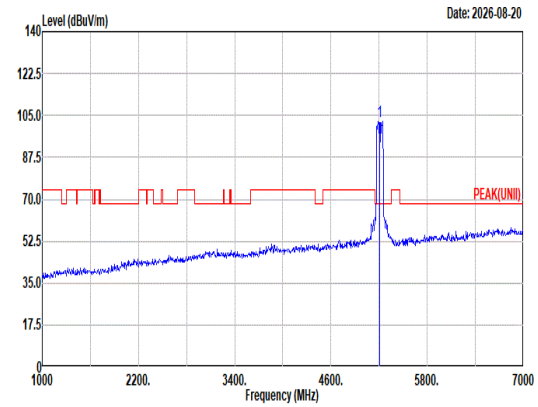 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 102.54 ------ ------ 94.13 33.00 11.61 36.20 0.00 104 306 Peak
Avg	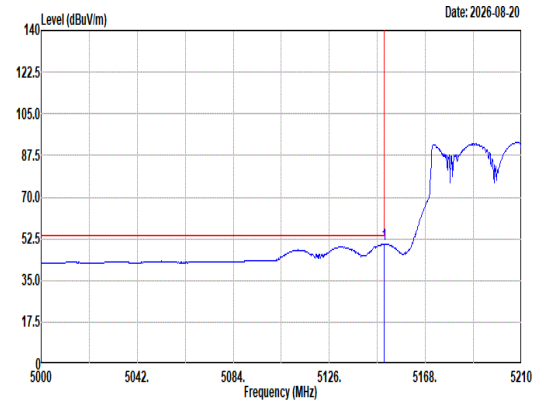 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 50.20 54.00 -3.80 41.78 33.10 11.51 36.19 0.00 104 306 Average	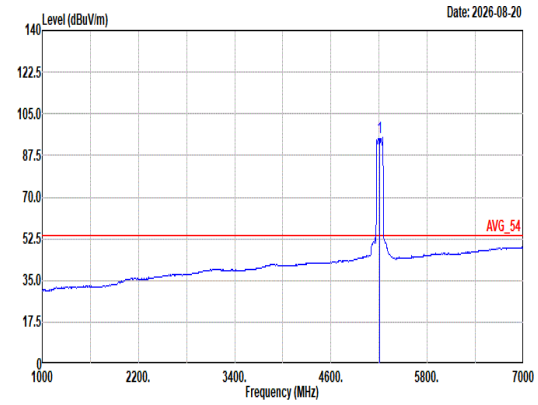 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 95.00 ------ ------ 86.59 33.00 11.61 36.20 0.00 104 306 Average

Mode	26	
	Band Edge - R	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	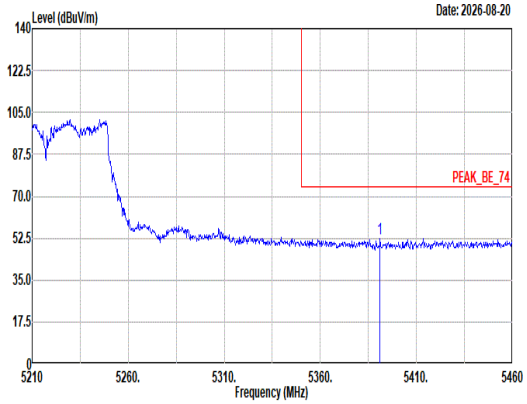 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.00 52.13 74.00 -21.87 43.80 32.74 11.81 36.22 0.00 104 306 Peak	Blank
Avg	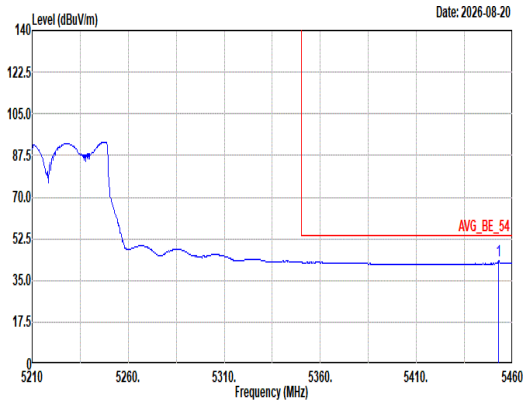 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.75 43.11 54.00 -10.89 34.65 32.81 11.87 36.22 0.00 104 306 Average	Blank

Mode	26	
	Band Edge - L	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	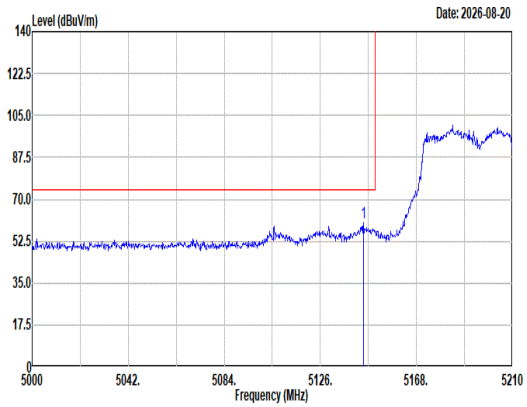 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.90 60.38 74.00 -13.62 51.97 33.09 11.51 36.19 0.00 102 309 Peak	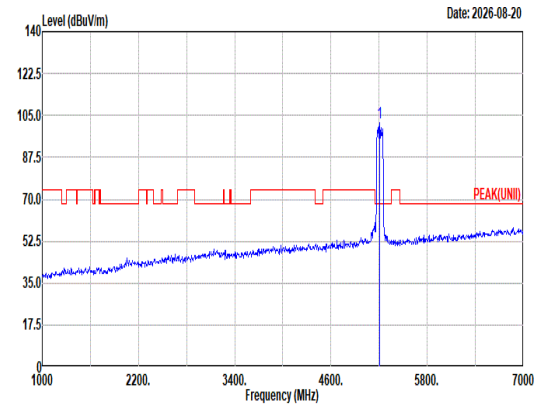 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 101.85 ------ ------ 93.49 33.00 11.55 36.19 0.00 102 309 Peak
Avg	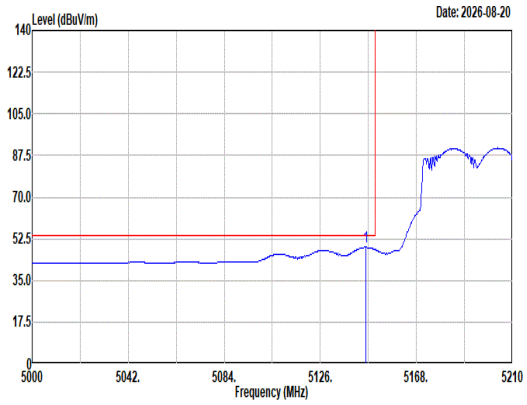 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.74 49.09 54.00 -4.91 40.68 33.09 11.51 36.19 0.00 102 309 Average	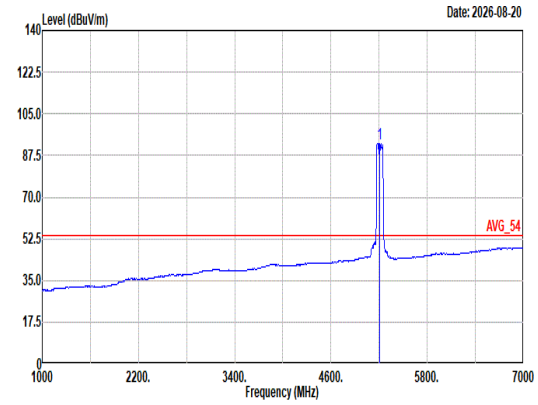 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 92.49 ------ ------ 84.13 33.00 11.55 36.19 0.00 102 309 Average

Mode	26	
	Band Edge - R	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	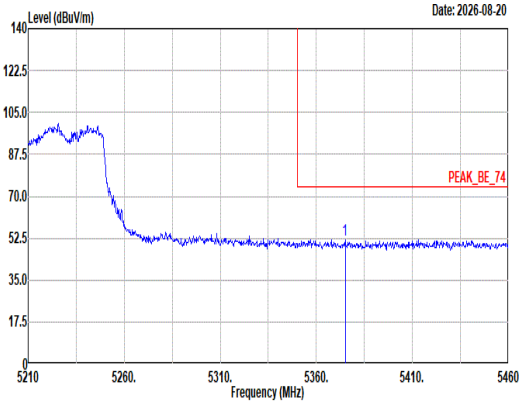 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5375.00 51.93 74.00 -22.07 43.57 32.80 11.78 36.22 0.00 102 309 Peak	Blank
Avg	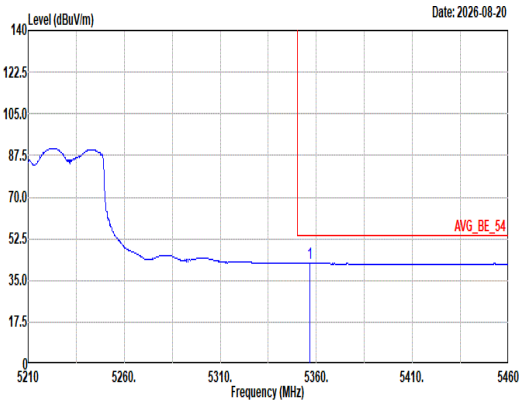 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.75 42.17 54.00 -11.83 33.75 32.87 11.76 36.21 0.00 102 309 Average	Blank

Mode	26	
	Harmonic	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	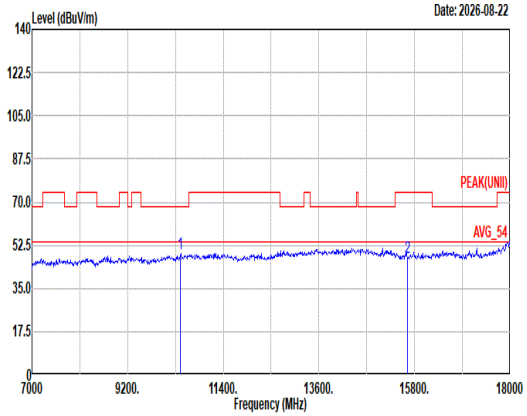 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 48.94 68.20 -19.26 60.13 38.54 16.14 66.83 0.96 -- -- Peak 2 15630.00 47.65 74.00 -26.35 55.90 37.76 19.82 66.50 0.67 -- -- Peak	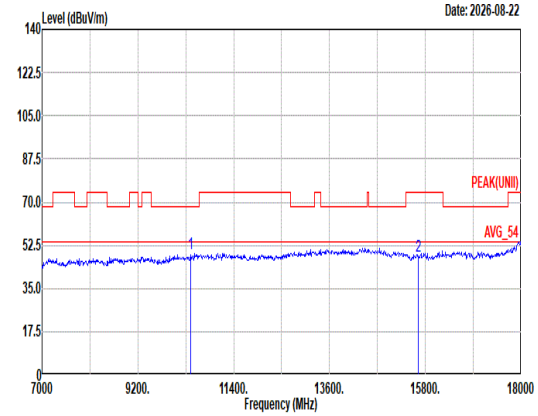 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 49.09 68.20 -19.11 60.28 38.54 16.14 66.83 0.96 -- -- Peak 2 15630.00 47.96 74.00 -26.04 56.21 37.76 19.82 66.50 0.67 -- -- Peak

Mode	26	
	Harmonic	
	U-NII-1_5.47-5.725_802.11be EHT80_CH42_Full RU_5210MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	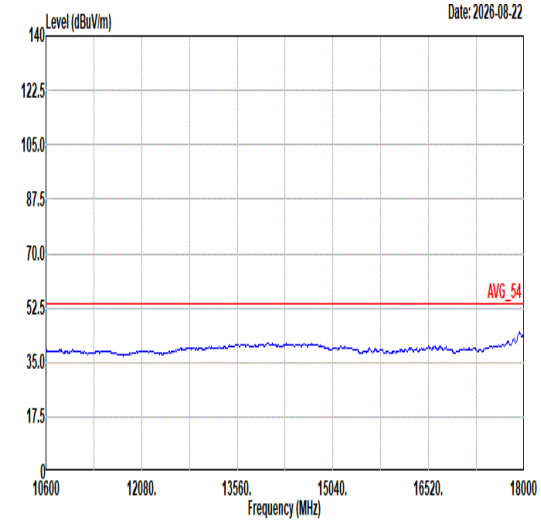 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	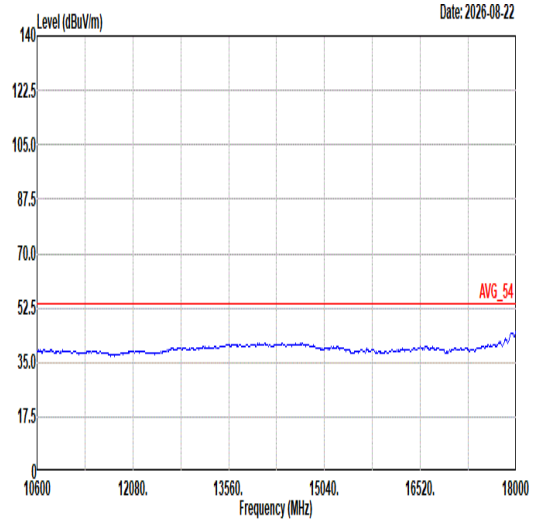 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	27	
	Band Edge - L	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	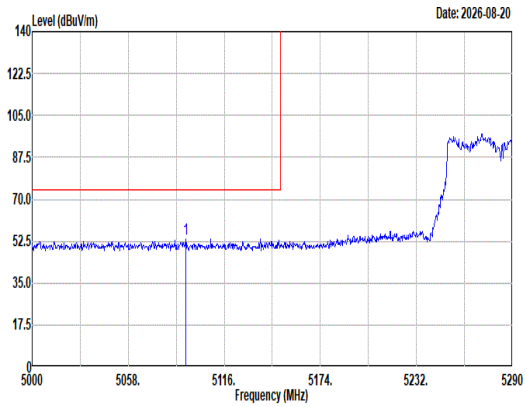 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5092.80 53.60 74.00 -20.40 45.30 33.00 11.48 36.18 0.00 300 343 Peak	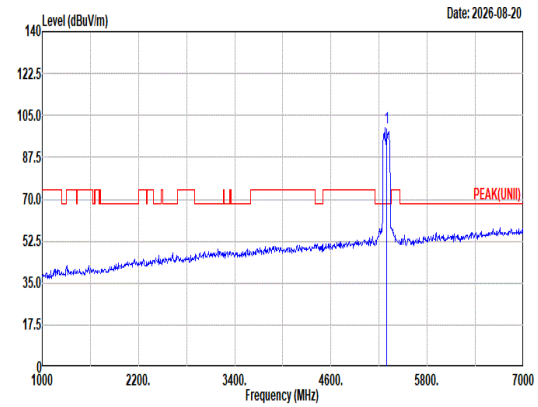 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5290.00 99.81 ------ ------ 91.41 32.96 11.64 36.20 0.00 300 343 Peak
Avg	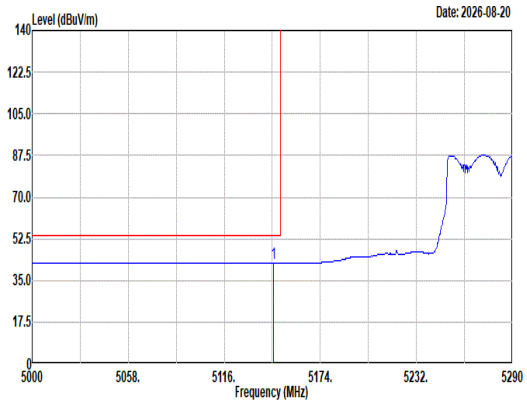 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5145.58 42.37 54.00 -11.63 33.96 33.09 11.51 36.19 0.00 300 343 Average	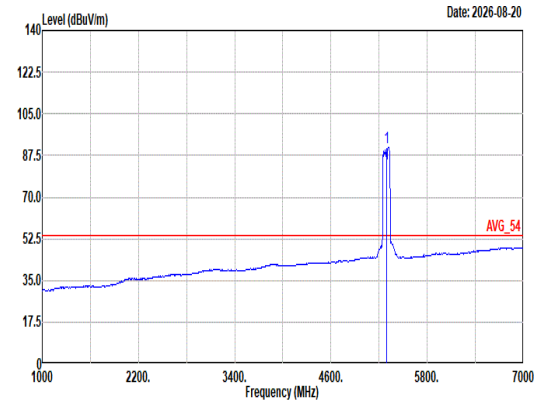 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5290.00 91.11 ------ ------ 82.71 32.90 11.71 36.21 0.00 300 343 Average

Mode	27	
	Band Edge - R	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	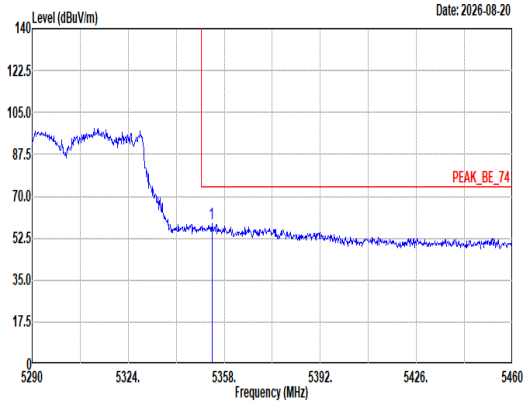 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.58 58.78 74.00 -15.22 50.34 32.89 11.76 36.21 0.00 300 343 Peak	Blank
Avg	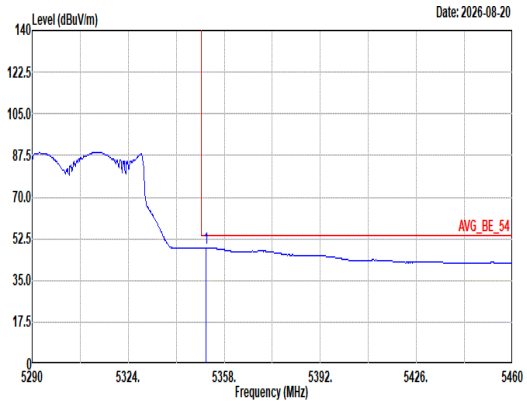 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.54 48.80 54.00 -5.20 40.37 32.89 11.75 36.21 0.00 300 343 Average	Blank

Mode	27	
	Band Edge - L	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	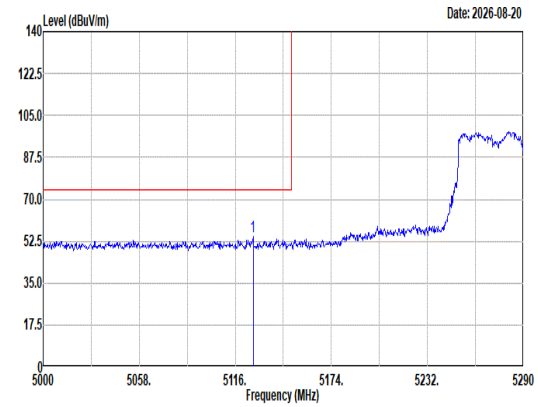 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5126.73 54.57 74.00 -19.43 46.21 33.05 11.50 36.19 0.00 108 306 Peak	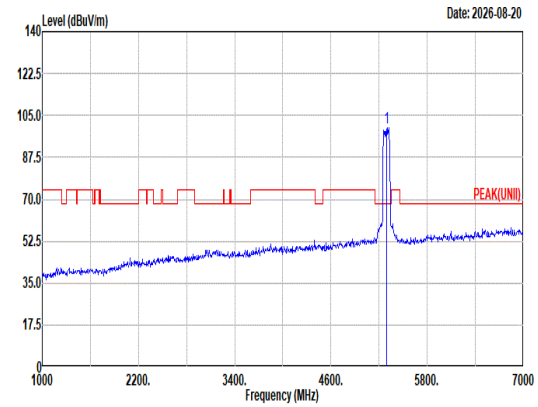 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 99.94 ------ ------ 91.57 32.90 11.68 36.21 0.00 108 306 Peak
Avg	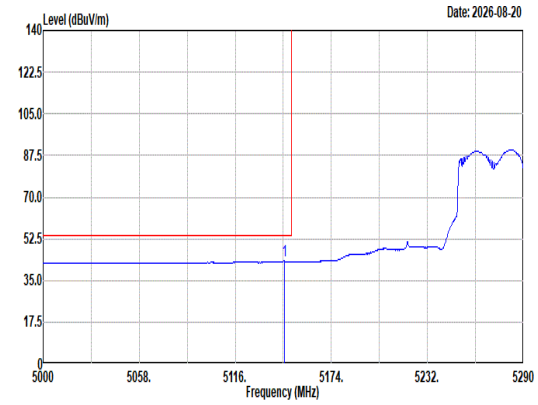 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.58 43.30 54.00 -10.70 34.89 33.09 11.51 36.19 0.00 108 306 Average	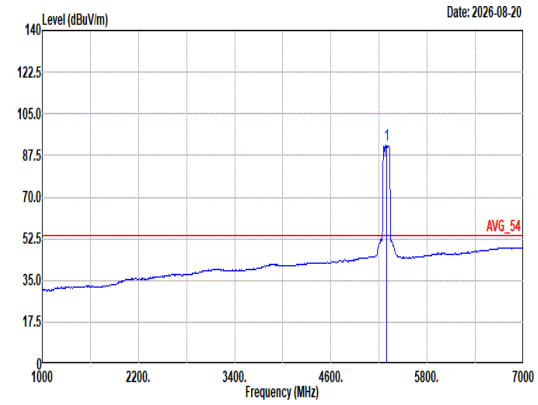 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 91.66 ------ ------ 83.27 32.93 11.66 36.20 0.00 108 306 Average

Mode	27	
	Band Edge - R	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	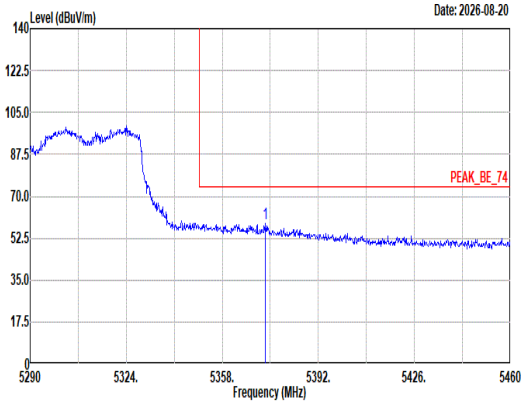 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5373.30 58.54 74.00 -15.46 50.16 32.81 11.78 36.21 0.00 108 306 Peak	Blank
Avg	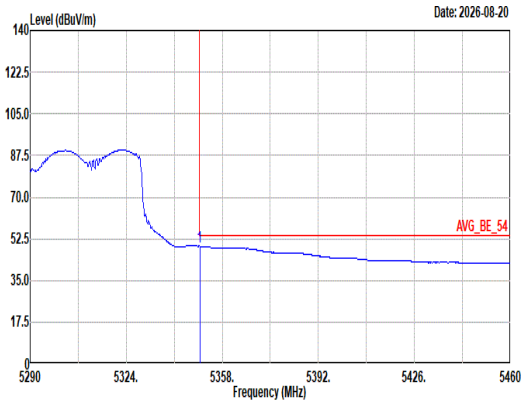 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.01 49.36 54.00 -4.64 40.92 32.90 11.75 36.21 0.00 108 306 Average	Blank

Mode	27	
	Harmonic	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	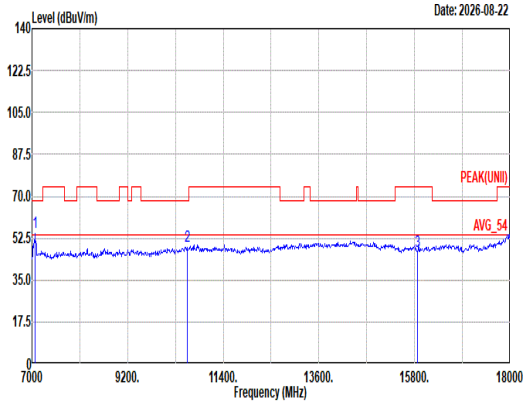 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7066.00 54.98 68.20 -13.22 69.95 36.16 13.36 65.66 1.17 100 343 Peak 2 10580.00 49.17 68.20 -19.03 59.82 38.78 16.25 66.62 0.94 -- -- Peak 3 15870.00 47.06 74.00 -26.94 55.59 37.53 19.97 66.70 0.67 -- -- Peak	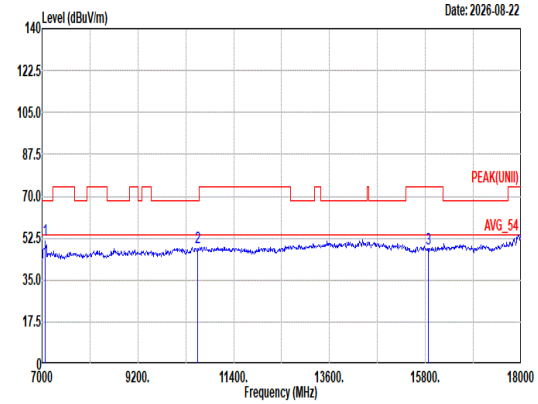 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7066.00 51.55 68.20 -16.65 66.52 36.16 13.36 65.66 1.17 100 3 Peak 2 10580.00 48.76 68.20 -19.44 59.41 38.78 16.25 66.62 0.94 -- -- Peak 3 15870.00 47.82 74.00 -26.18 56.35 37.53 19.97 66.70 0.67 -- -- Peak

Mode	27	
	Harmonic	
	U-NII-2A_5.47-5.725_802.11be EHT80_CH58_Full RU_5290MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	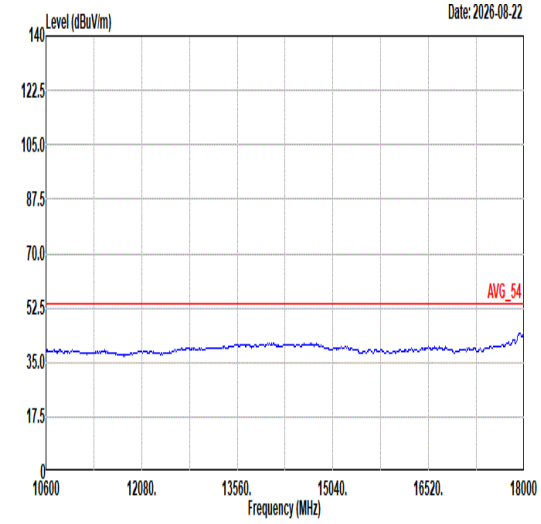 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	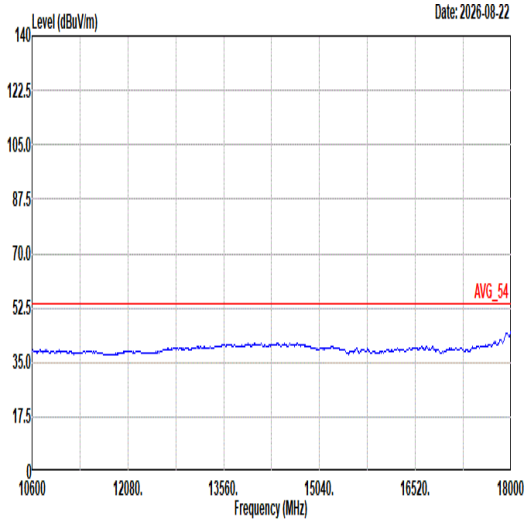 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	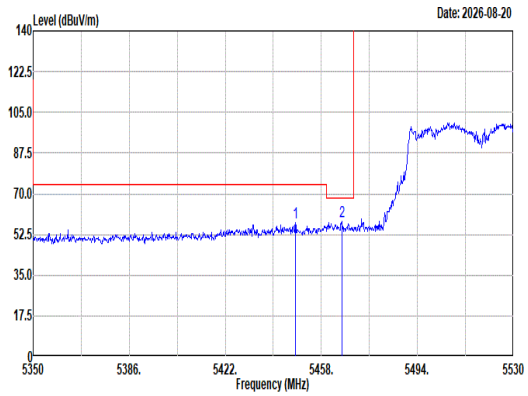 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5448.28 57.49 74.00 -16.51 49.04 32.80 11.87 36.22 0.00 300 325 Peak 2 5465.74 57.87 68.20 -10.33 49.35 32.86 11.89 36.23 0.00 300 325 Peak	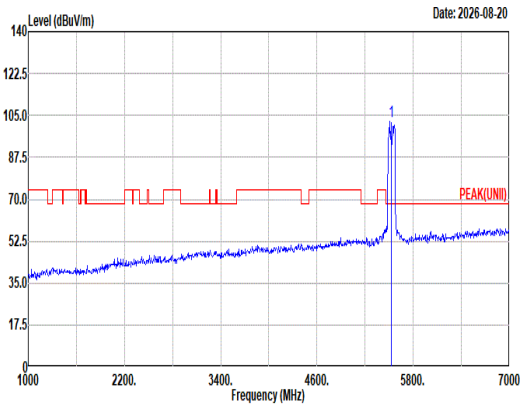 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5530.00 102.59 ------ ------ 93.91 32.98 11.93 36.23 0.00 300 325 Peak
Avg	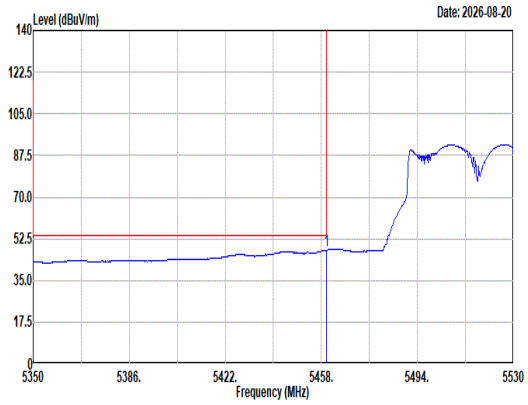 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.98 47.74 54.00 -6.26 39.25 32.84 11.88 36.23 0.00 300 325 Average	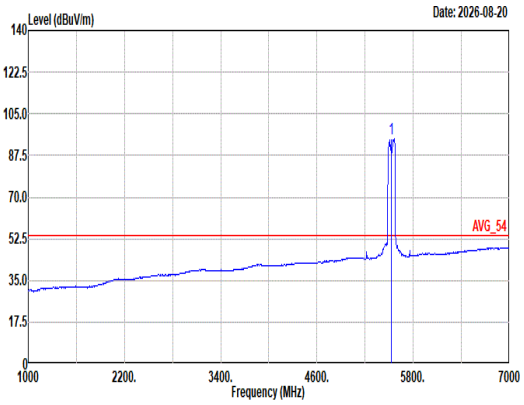 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5530.00 94.31 ------ ------ 85.74 32.83 11.99 36.25 0.00 300 325 Average

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	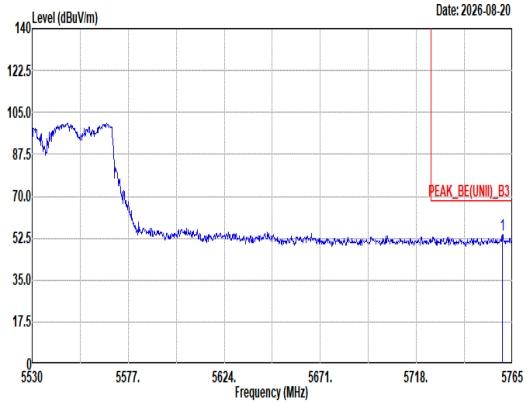 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.07 54.13 68.20 -14.07 44.70 33.56 12.17 36.30 0.00 300 325 Peak	Blank

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	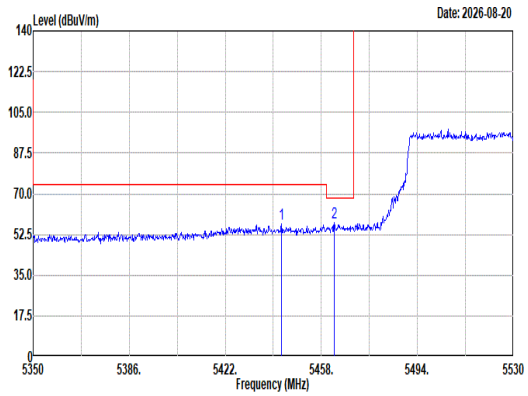 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.06 57.05 74.00 -16.95 48.62 32.79 11.86 36.22 0.00 129 311 Peak 2 5462.86 57.75 68.20 -10.45 49.25 32.85 11.88 36.23 0.00 129 311 Peak	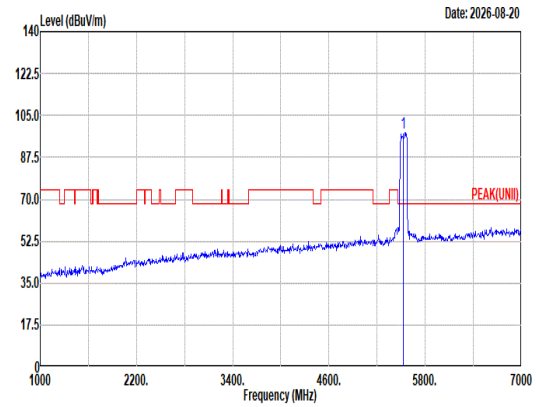 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 97.59 ------ ------ 89.05 32.81 11.97 36.24 0.00 129 311 Peak
Avg	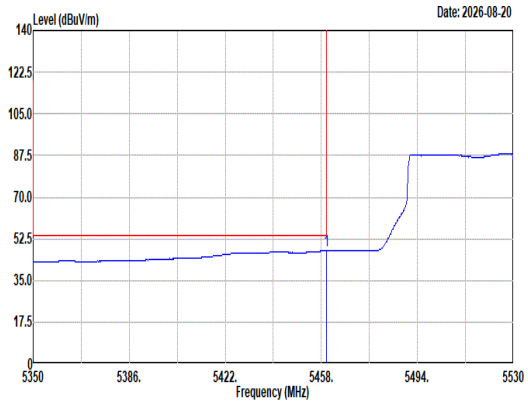 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.98 47.51 54.00 -6.49 39.02 32.84 11.88 36.23 0.00 129 311 Average	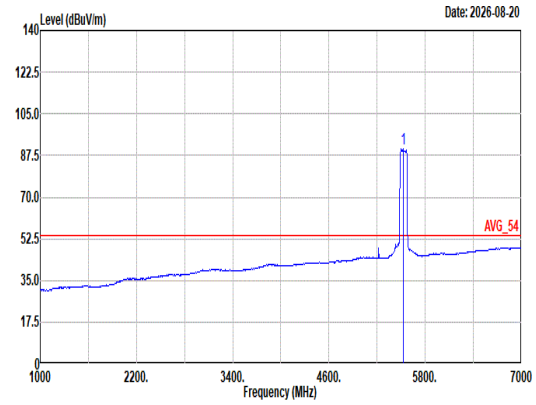 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 90.17 ------ ------ 81.51 32.98 11.91 36.23 0.00 129 311 Average

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	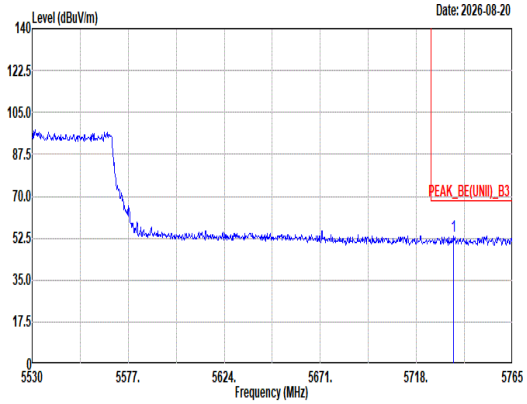 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5736.10 53.21 68.20 -14.99 43.88 33.47 12.15 36.29 0.00 129 311 Peak	Blank

Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	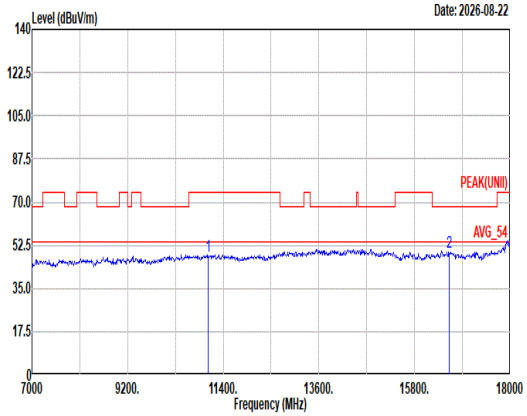 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.90 74.00 -26.10 57.58 38.78 16.58 65.89 0.85 -- -- Peak 2 16590.00 49.65 68.20 -18.55 57.36 38.14 20.40 66.99 0.74 -- -- Peak	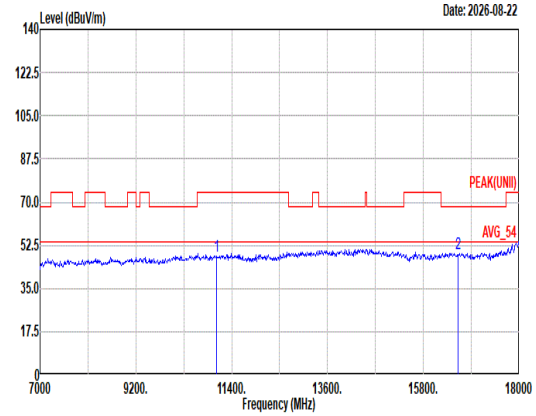 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.97 74.00 -26.03 57.65 38.78 16.58 65.89 0.85 -- -- Peak 2 16590.00 49.21 68.20 -18.99 56.92 38.14 20.40 66.99 0.74 -- -- Peak

Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full RU_5530MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	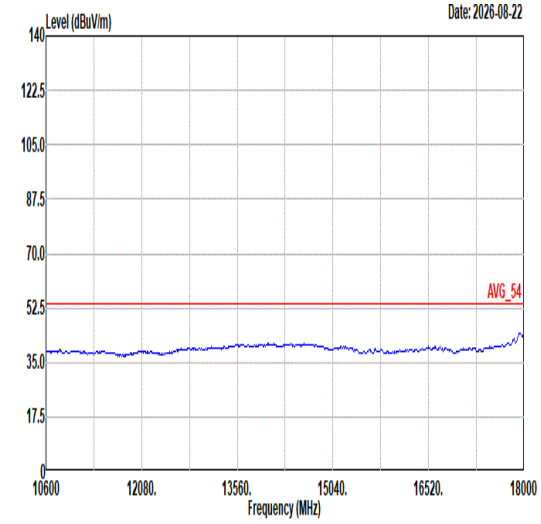 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	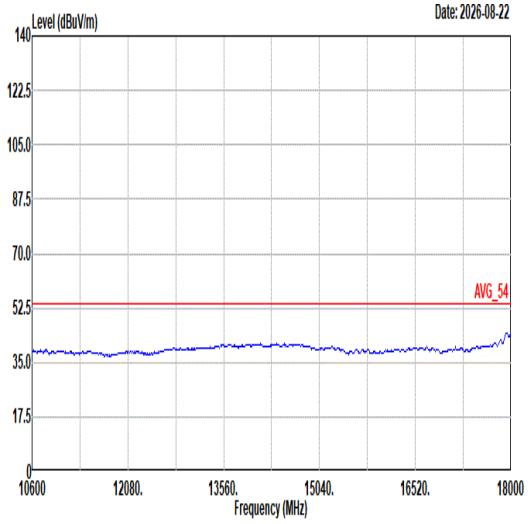 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	29	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	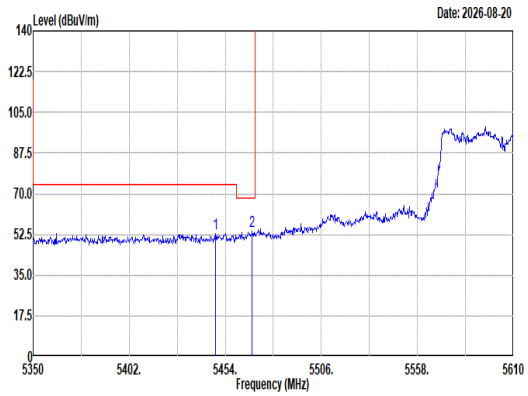 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5448.54 53.04 74.00 -20.96 44.59 32.80 11.87 36.22 0.00 100 325 Peak 2 5468.56 53.67 68.20 -14.53 45.14 32.87 11.89 36.23 0.00 100 325 Peak	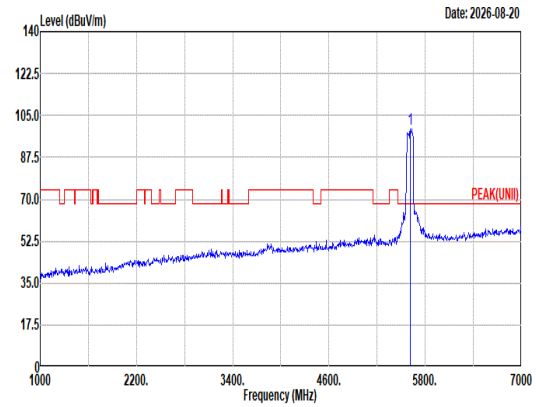 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5610.00 99.21 ------ ------ 90.39 33.03 12.05 36.26 0.00 100 325 Peak
Avg	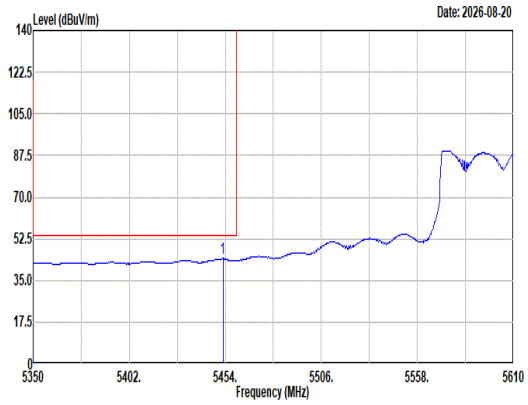 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5452.70 44.35 54.00 -9.65 35.89 32.81 11.87 36.22 0.00 100 325 Average	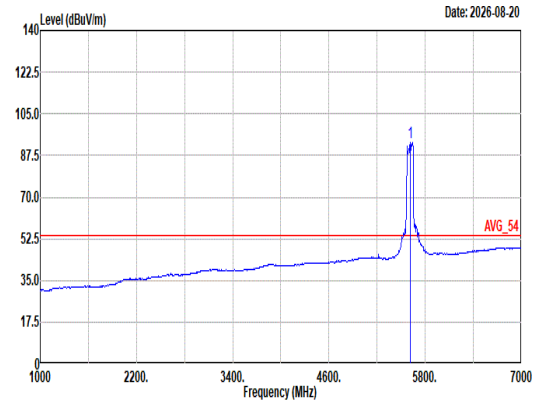 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5610.00 93.02 ------ ------ 84.15 33.08 12.06 36.27 0.00 100 325 Average

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	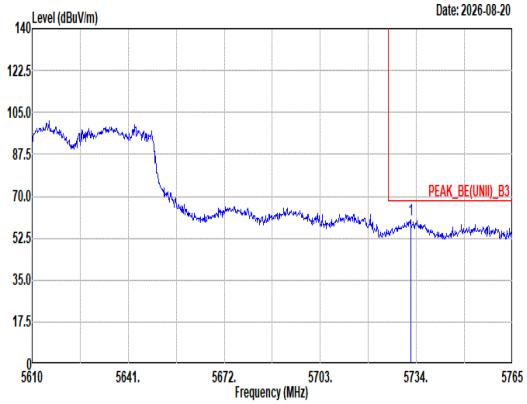 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5732.14 60.22 68.20 -7.98 50.90 33.46 12.15 36.29 0.00 100 325 Peak	Blank

Mode	29
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz
ANT	5+4

Pol.	Vertical	Fundamental
Peak	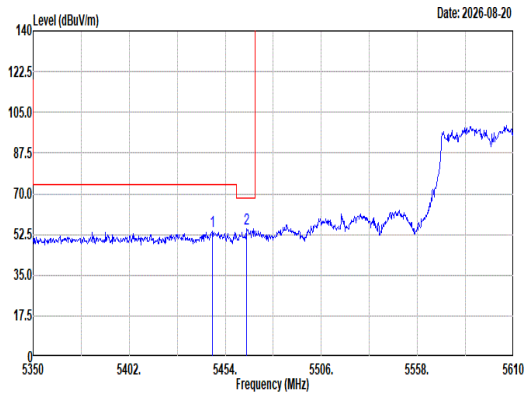 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5446.98 53.93 74.00 -20.07 45.49 32.79 11.87 36.22 0.00 100 132 Peak 2 5465.70 55.07 68.20 -13.13 46.55 32.86 11.89 36.23 0.00 100 132 Peak	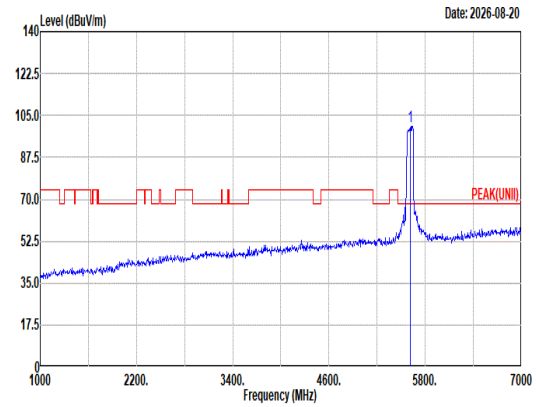 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5610.00 100.34 ------ ------ 91.47 33.08 12.06 36.27 0.00 100 132 Peak
Avg	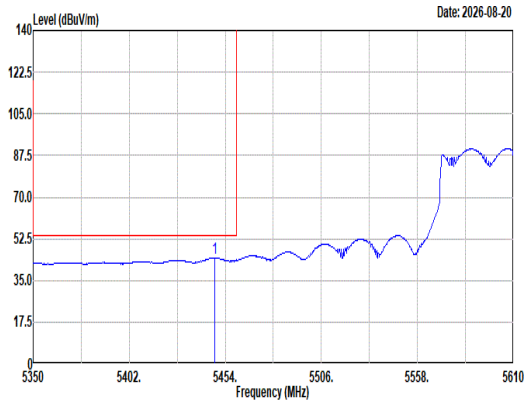 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5448.28 44.43 54.00 -9.57 35.98 32.80 11.87 36.22 0.00 100 132 Average	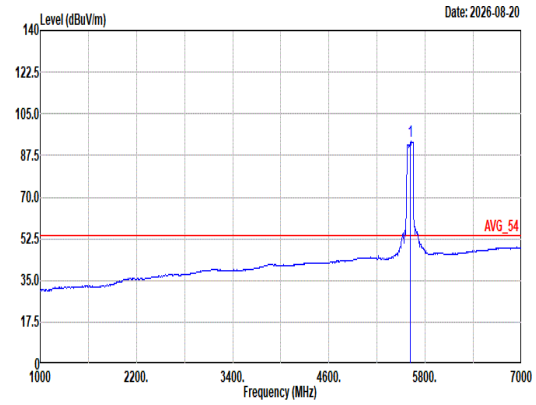 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5610.00 93.43 ------ ------ 84.65 33.00 12.04 36.26 0.00 100 132 Average

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	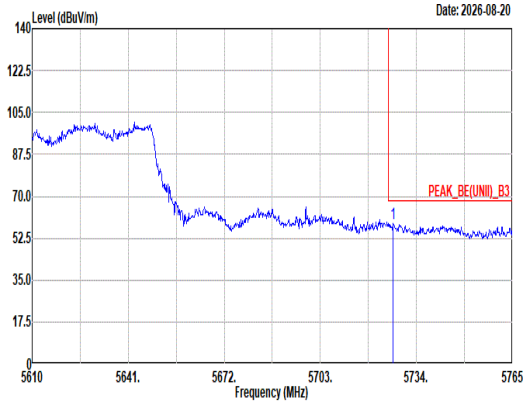 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.56 58.54 68.20 -9.66 49.24 33.45 12.14 36.29 0.00 100 132 Peak	Blank

Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	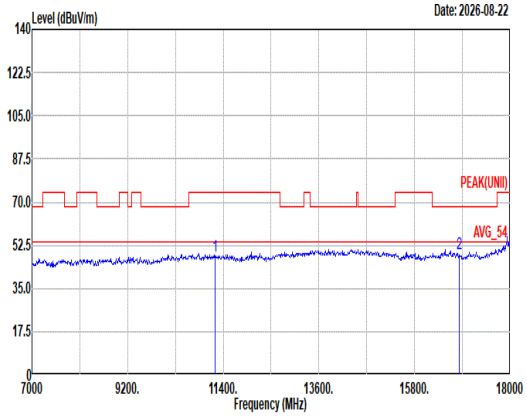 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 47.98 74.00 -26.02 57.49 38.90 16.71 65.94 0.82 -- -- Peak 2 16830.00 49.30 68.20 -18.90 56.40 38.22 20.54 66.62 0.76 -- -- Peak	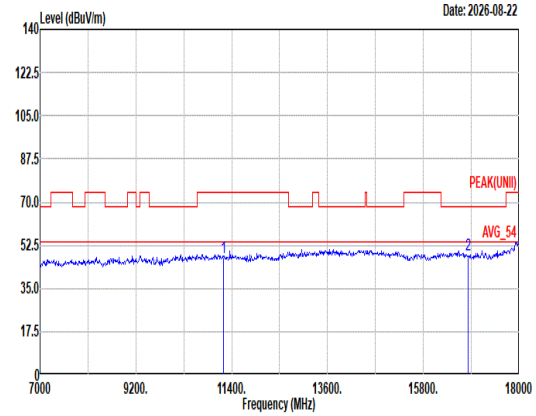 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 47.36 74.00 -26.64 56.87 38.90 16.71 65.94 0.82 -- -- Peak 2 16830.00 48.60 68.20 -19.60 55.70 38.22 20.54 66.62 0.76 -- -- Peak

Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full RU_5610MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	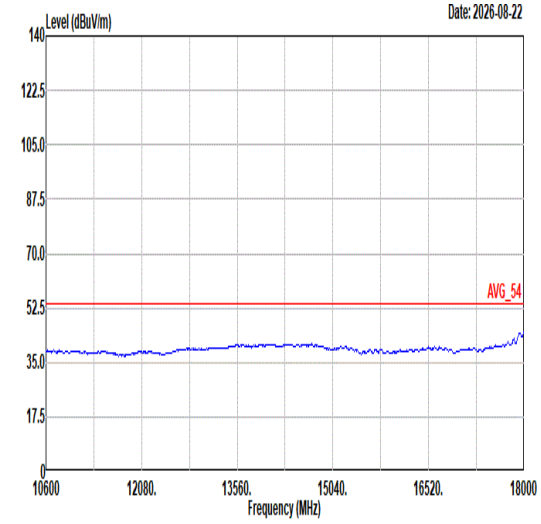 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	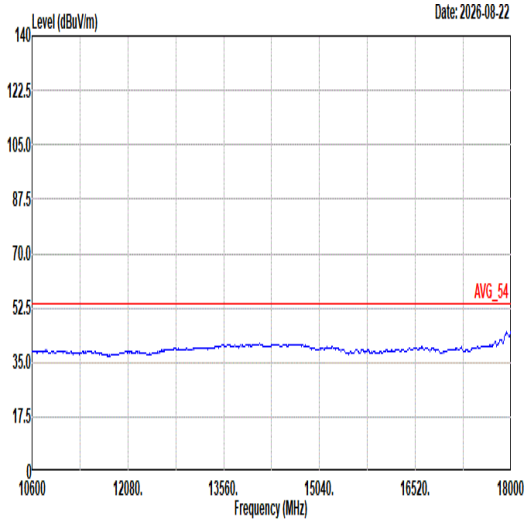 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	30	
	Band Edge - L	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	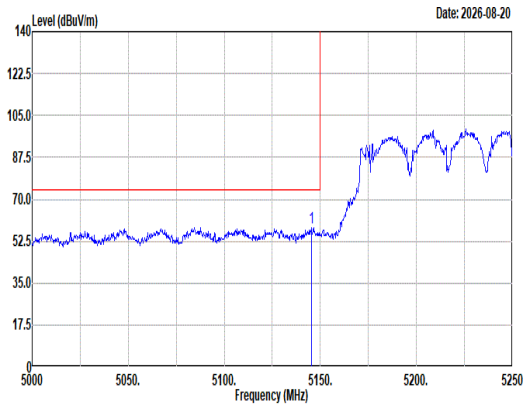 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5145.25 58.34 74.00 -15.66 49.93 33.09 11.51 36.19 0.00 200 309 Peak	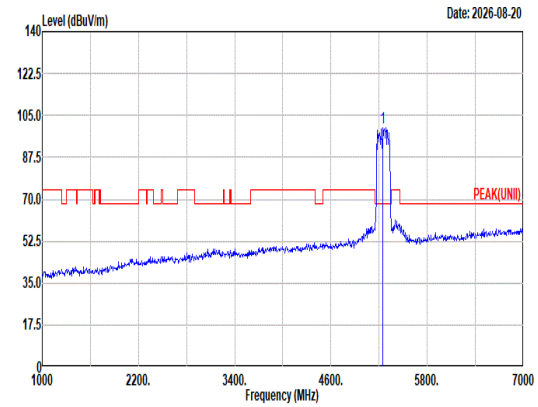 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5250.00 99.91 ------ ------ 91.52 32.93 11.66 36.20 0.00 200 309 Peak
Avg	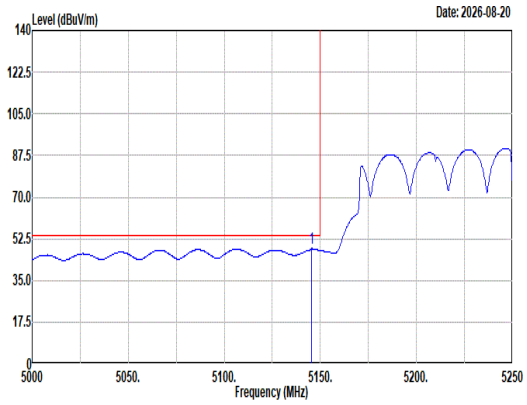 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5145.50 48.36 54.00 -5.64 39.95 33.09 11.51 36.19 0.00 200 309 Average	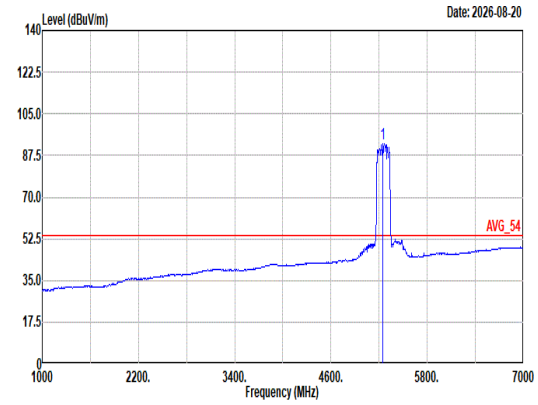 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5250.00 92.27 ------ ------ 83.87 32.97 11.63 36.20 0.00 200 309 Average

Mode	30	
	Band Edge - R	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	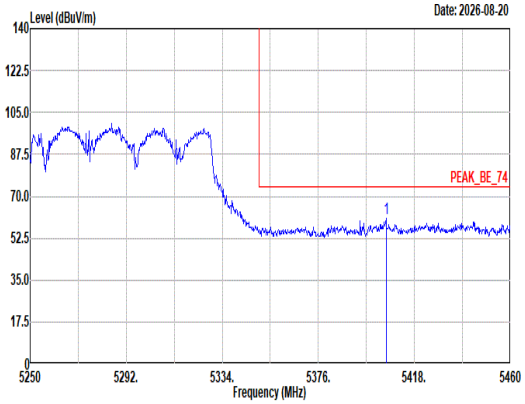 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5405.61 60.52 74.00 -13.48 52.20 32.71 11.83 36.22 0.00 200 309 Peak	Blank
Avg	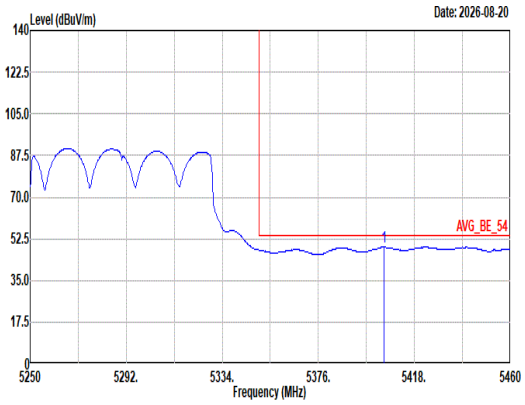 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5404.77 48.97 54.00 -5.03 40.66 32.71 11.82 36.22 0.00 200 309 Average	Blank

Mode	30	
	Band Edge - L	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	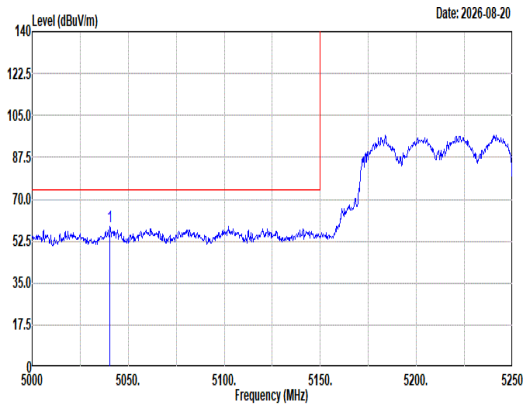 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5040.50 58.42 74.00 -15.58 50.13 33.02 11.44 36.17 0.00 100 307 Peak	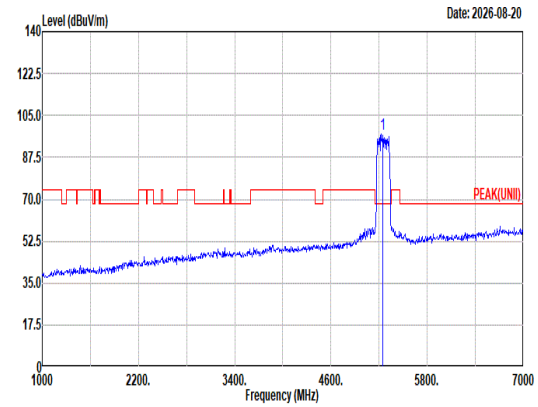 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 97.12 ------ ------ 88.75 33.00 11.57 36.20 0.00 100 307 Peak
Avg	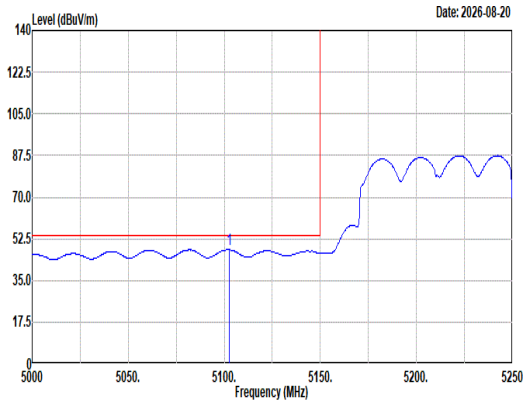 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5102.50 47.91 54.00 -6.09 39.60 33.01 11.48 36.18 0.00 100 307 Average	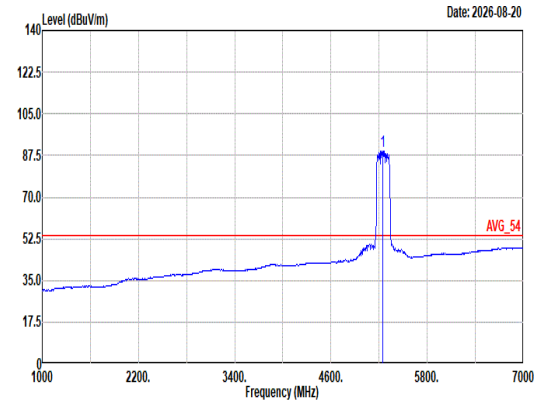 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 89.34 ------ ------ 80.97 33.00 11.57 36.20 0.00 100 307 Average

Mode	30	
	Band Edge - R	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	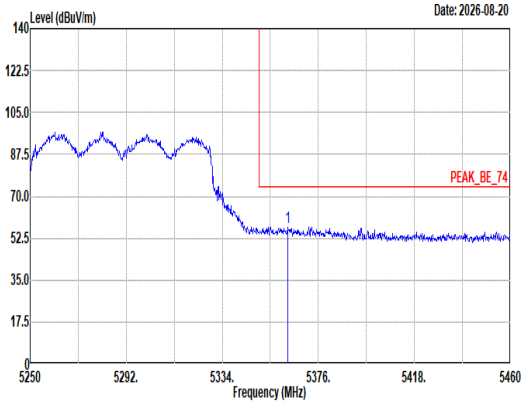 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.56 57.07 74.00 -16.93 48.66 32.85 11.77 36.21 0.00 100 307 Peak	Blank
Avg	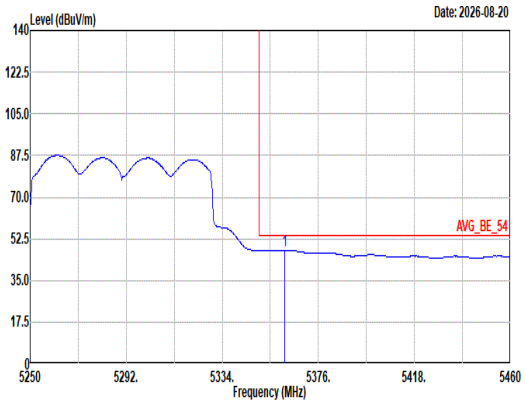 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5361.30 47.62 54.00 -6.38 39.21 32.85 11.77 36.21 0.00 100 307 Average	Blank

Mode	30	
	Harmonic	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	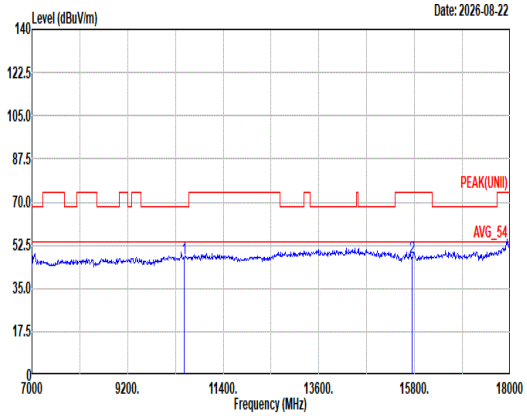 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10500.00 46.89 68.20 -21.31 57.91 38.60 16.19 66.76 0.95 -- -- Peak 2 15750.00 47.64 74.00 -26.36 55.80 37.88 19.89 66.60 0.67 -- -- Peak	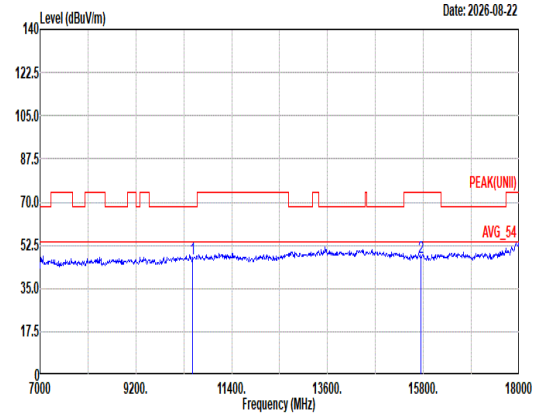 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10500.00 47.23 68.20 -20.97 58.25 38.60 16.19 66.76 0.95 -- -- Peak 2 15750.00 47.46 74.00 -26.54 55.62 37.88 19.89 66.60 0.67 -- -- Peak

Mode	30	
	Harmonic	
	U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full RU_5250MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	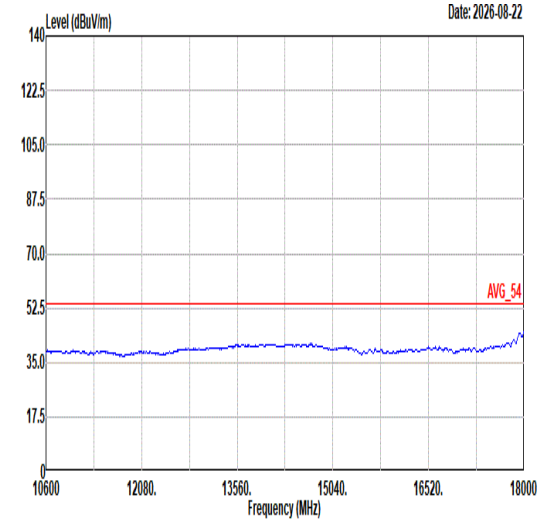 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	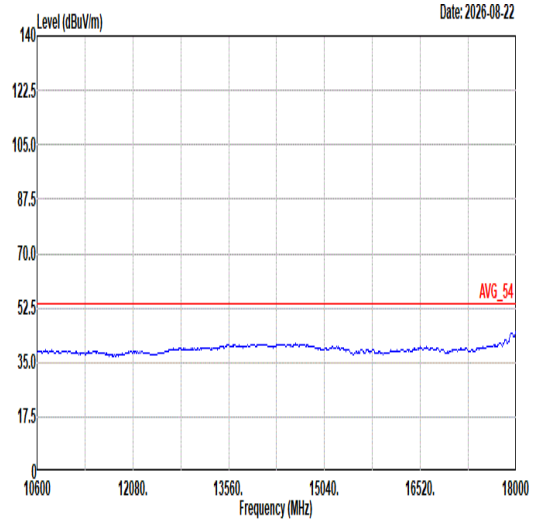 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	31	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	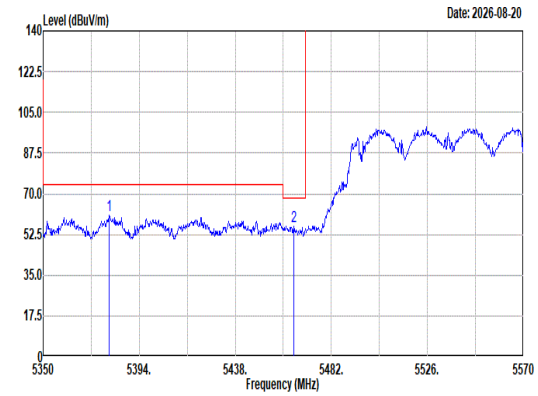 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5380.36 60.59 74.00 -13.41 52.24 32.78 11.79 36.22 0.00 277 309 Peak 2 5464.84 55.97 68.20 -12.23 47.46 32.86 11.88 36.23 0.00 277 309 Peak	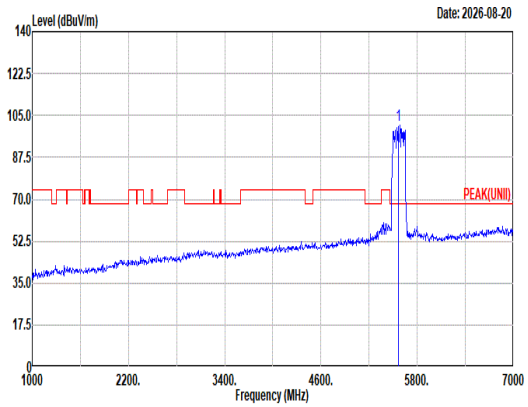 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5570.00 100.84 ------ ------ 92.22 32.87 12.00 36.25 0.00 277 309 Peak
Avg	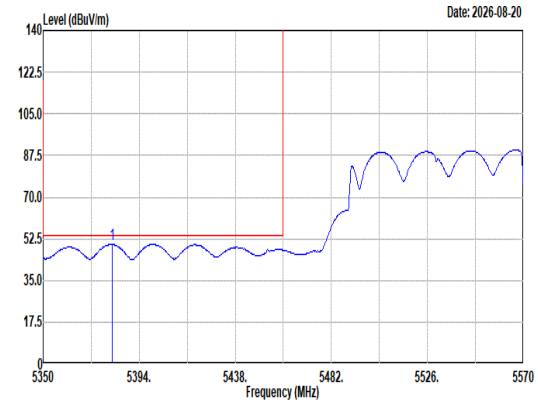 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5381.68 50.12 54.00 -3.88 41.78 32.77 11.79 36.22 0.00 277 309 Average	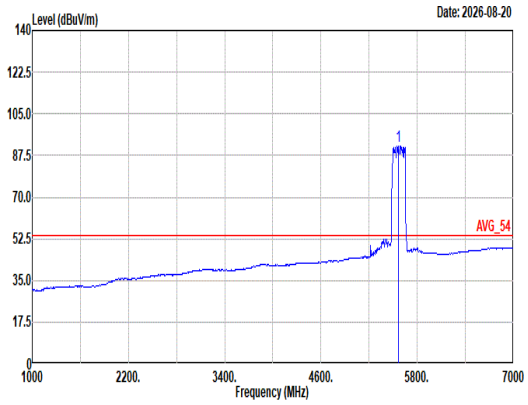 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5570.00 91.63 ------ ------ 83.06 32.83 11.99 36.25 0.00 277 309 Average

Mode	31	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	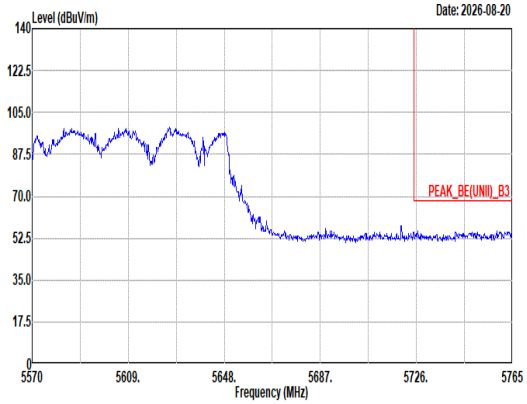 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5765.00 56.12 68.20 -12.08 46.65 33.59 12.18 36.30 0.00 277 309 Peak	Blank

Mode	31
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz
ANT	5+4

Pol.	Vertical	Fundamental
Peak	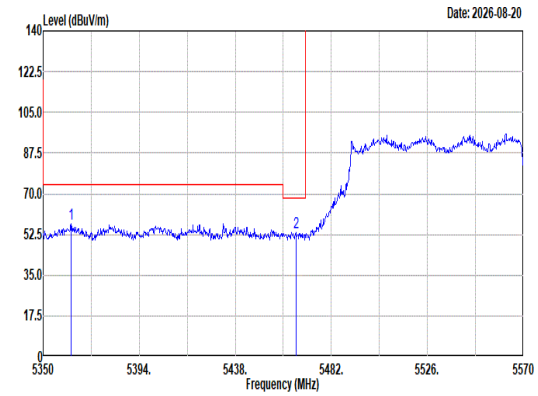 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.76 57.30 74.00 -16.70 48.89 32.85 11.77 36.21 0.00 100 142 Peak 2 5465.72 53.48 68.20 -14.72 44.96 32.86 11.89 36.23 0.00 100 142 Peak	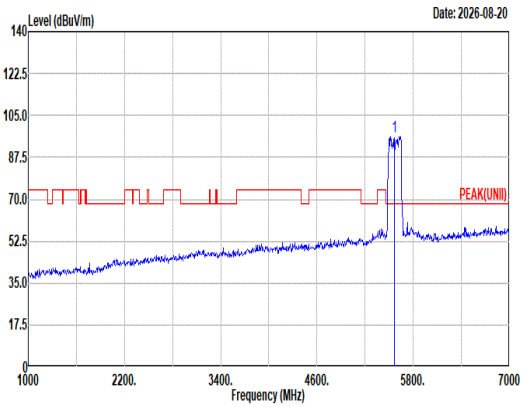 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 96.35 ------ ------ 87.57 33.00 12.04 36.26 0.00 100 142 Peak
Avg	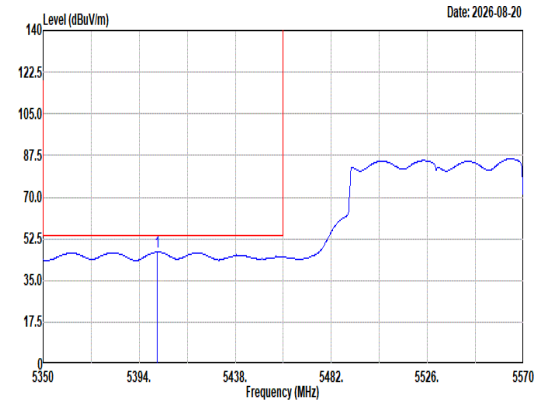 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5402.36 46.97 54.00 -7.03 38.67 32.70 11.82 36.22 0.00 100 142 Average	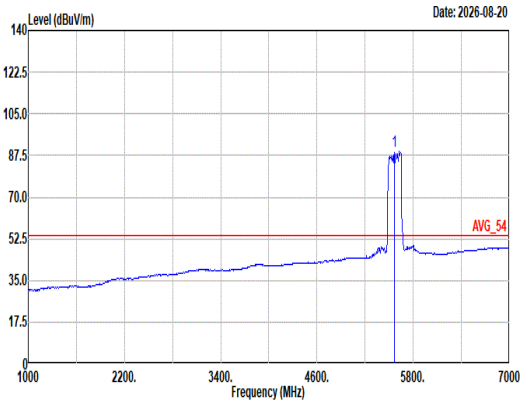 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 89.07 ------ ------ 80.29 33.00 12.04 36.26 0.00 100 142 Average

Mode	31	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	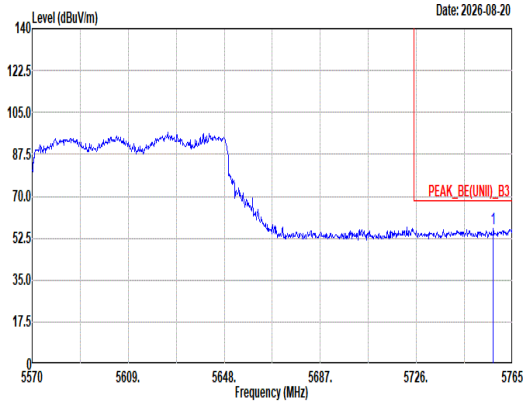 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5757.20 56.32 68.20 -11.88 46.91 33.54 12.17 36.30 0.00 100 142 Peak	Blank

Mode	31	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	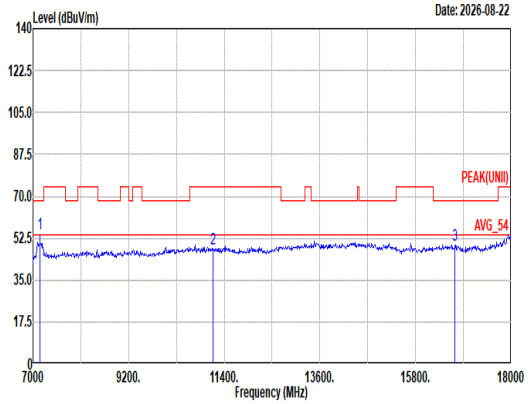 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7165.00 54.16 68.20 -14.04 68.75 36.66 13.46 65.70 0.99 100 347 Peak 2 11140.00 47.97 74.00 -26.03 57.63 38.77 16.64 65.91 0.84 -- -- Peak 3 16710.00 49.80 68.20 -18.40 57.39 38.00 20.47 66.81 0.75 -- -- Peak	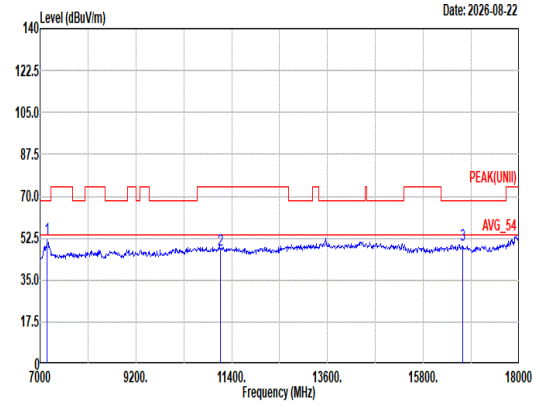 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7165.00 52.19 68.20 -16.01 66.78 36.66 13.46 65.70 0.99 300 343 Peak 2 11140.00 47.64 74.00 -26.36 57.30 38.77 16.64 65.91 0.84 -- -- Peak 3 16710.00 49.60 68.20 -18.60 57.19 38.00 20.47 66.81 0.75 -- -- Peak

Mode	31	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full RU_5570MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	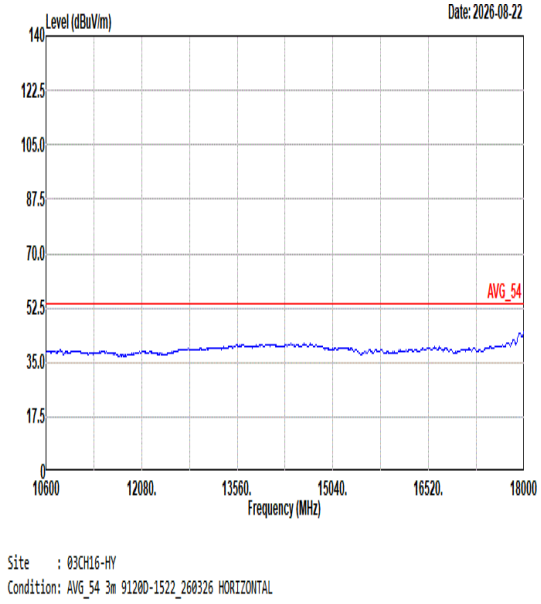	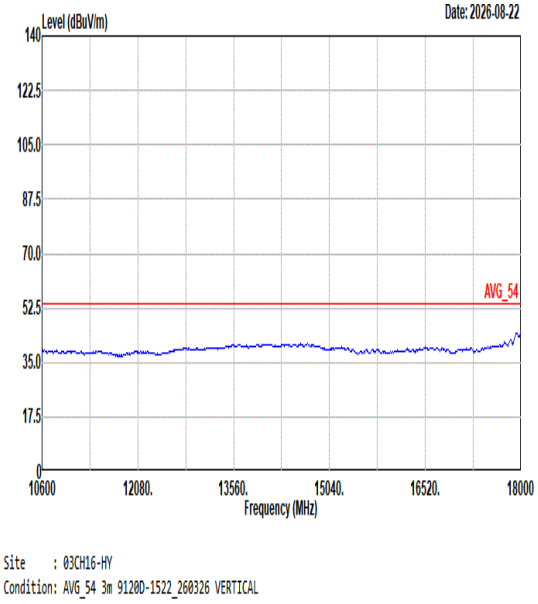

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	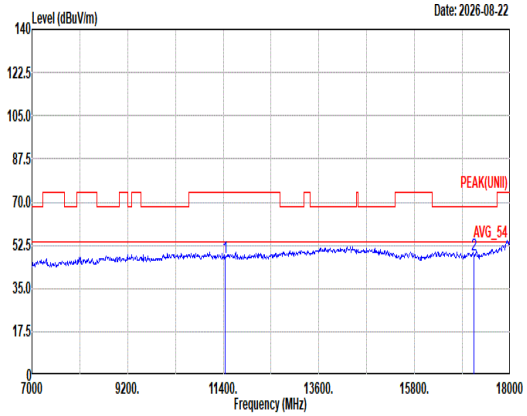 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 47.78 74.00 -26.22 57.12 39.02 16.87 66.01 0.78 -- -- Peak 2 17160.00 48.45 68.20 -19.75 54.78 38.28 20.77 66.17 0.79 -- -- Peak	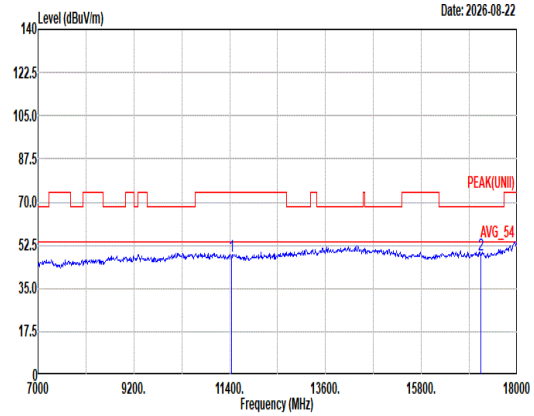 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 47.92 74.00 -26.08 57.26 39.02 16.87 66.01 0.78 -- -- Peak 2 17160.00 48.43 68.20 -19.77 54.78 38.26 20.77 66.17 0.79 -- -- Peak

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11a_CH144_5720MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	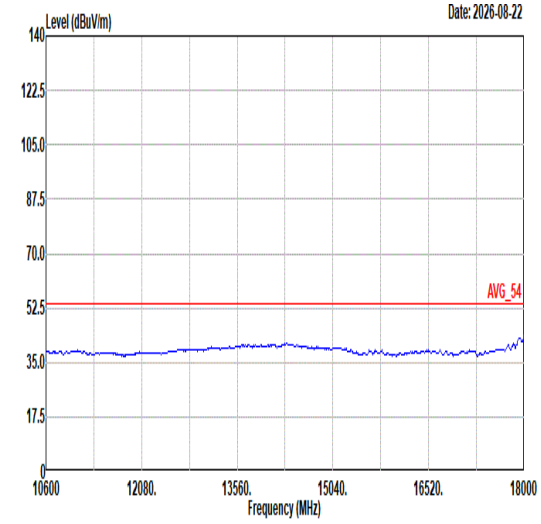 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	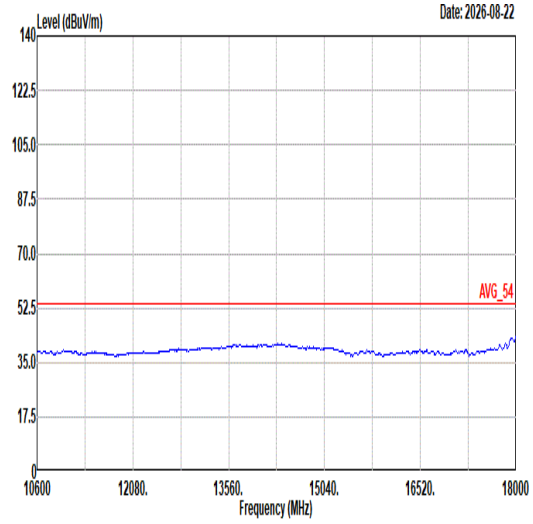 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT20_CH144_Full RU_5720MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	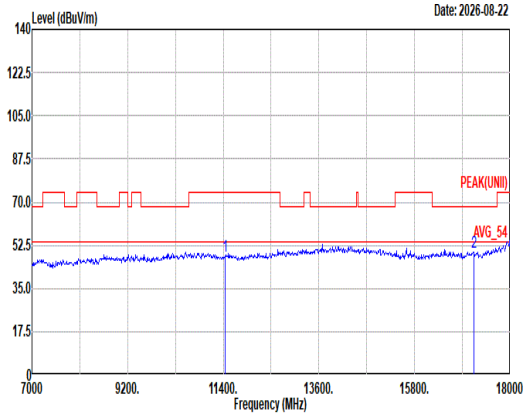 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL 1 11440.00 47.92 74.00 -26.08 57.26 39.02 16.87 66.01 0.78 -- -- Peak 2 17160.00 49.45 68.20 -18.75 55.78 38.28 20.77 66.17 0.79 -- -- Peak	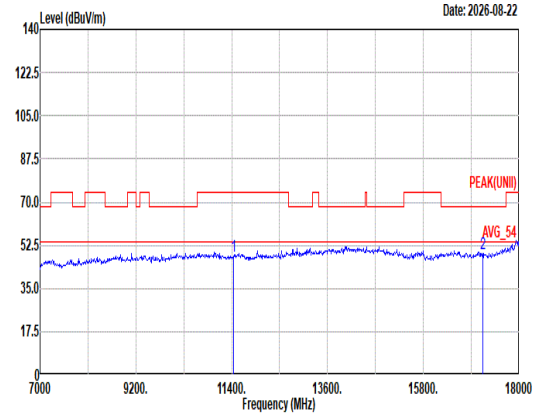 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL 1 11440.00 47.86 74.00 -26.14 57.21 39.01 16.87 66.01 0.78 -- -- Peak 2 17160.00 49.05 68.20 -19.15 55.40 38.26 20.77 66.17 0.79 -- -- Peak

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT20_CH144_Full RU_5720MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	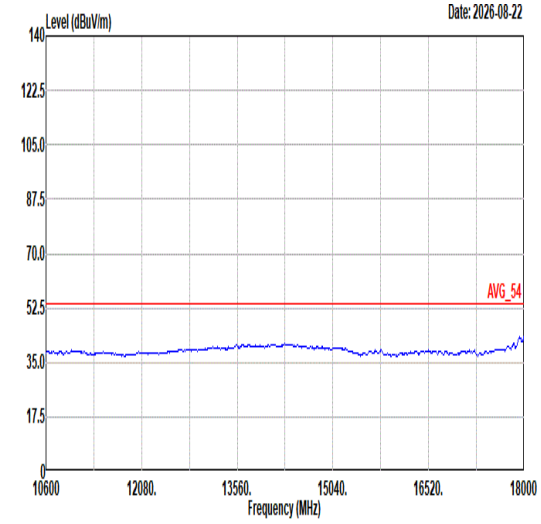 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	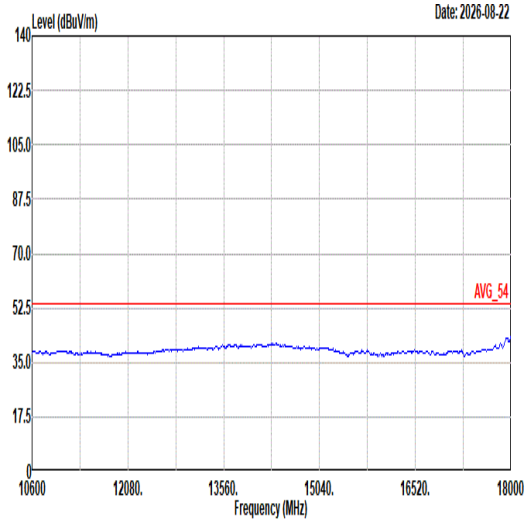 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT40_CH142_Full RU_5710MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	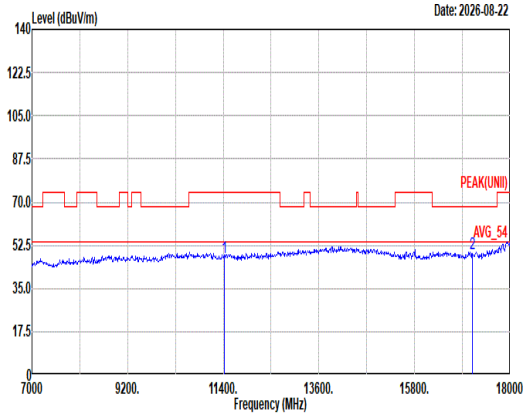 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 47.43 74.00 -26.57 56.74 39.06 16.86 66.01 0.78 -- -- Peak 2 17130.00 48.91 68.20 -19.29 55.42 38.16 20.75 66.21 0.79 -- -- Peak	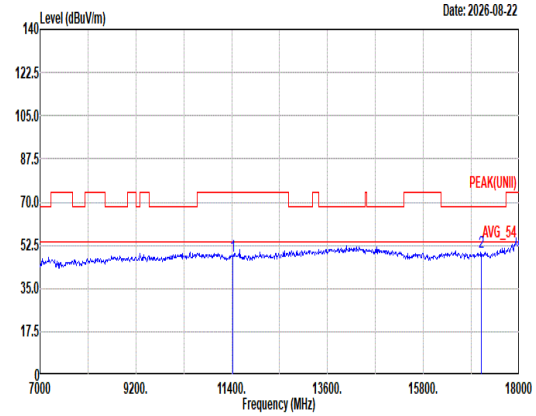 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 47.94 74.00 -26.06 57.25 39.06 16.86 66.01 0.78 -- -- Peak 2 17130.00 49.47 68.20 -18.73 55.98 38.16 20.75 66.21 0.79 -- -- Peak

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT40_CH142_Full RU_5710MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	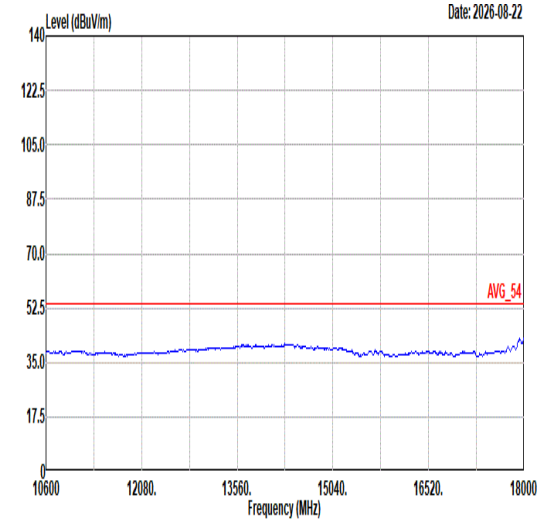 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	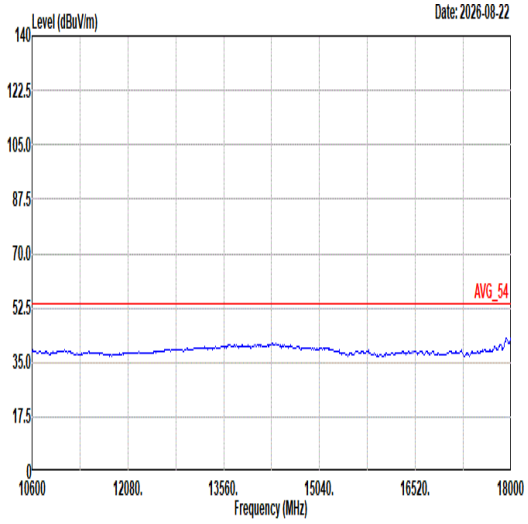 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT80_CH138_Full RU_5690MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
Peak Avg	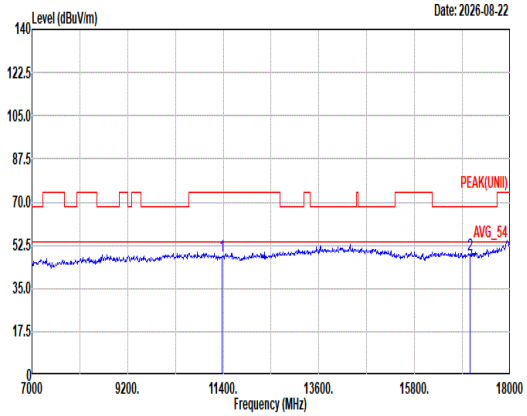 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.91 74.00 -26.09 57.18 39.10 16.83 65.99 0.79 -- -- Peak 2 17070.00 48.58 68.20 -19.62 55.23 38.17 20.69 66.29 0.78 -- -- Peak	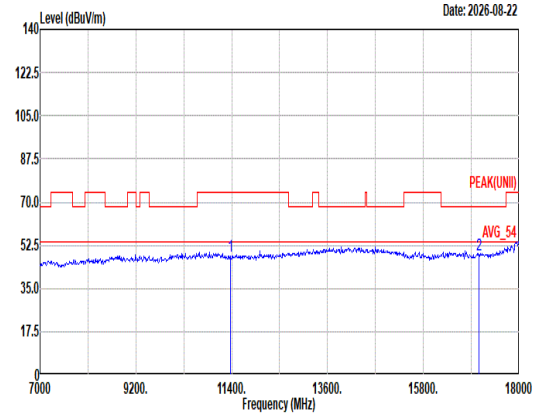 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.81 74.00 -26.19 57.09 39.10 16.82 65.99 0.79 -- -- Peak 2 17070.00 48.60 68.20 -19.60 55.24 38.16 20.70 66.28 0.78 -- -- Peak

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.85_802.11be EHT80_CH138_Full RU_5690MHz	
ANT	5+4	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	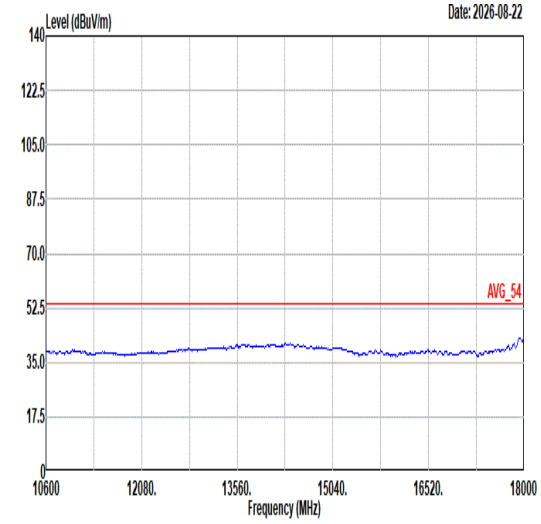 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL	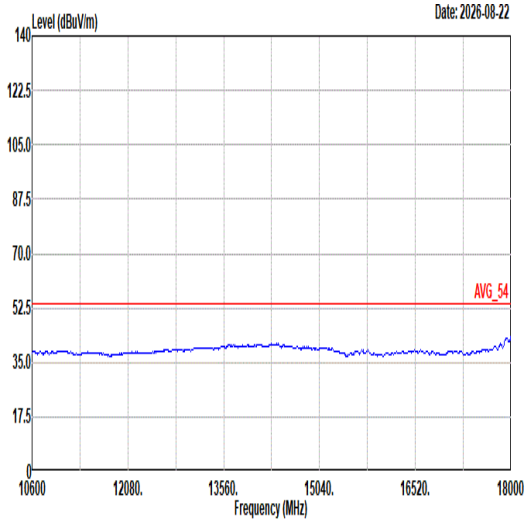 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL

Mode	45	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU26/0_5180MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	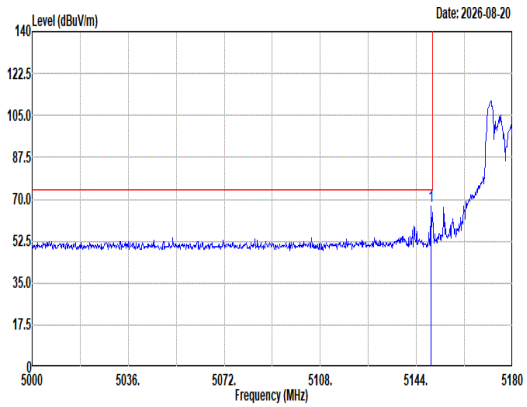 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.58 66.88 74.00 -7.12 58.46 33.10 11.51 36.19 0.00 100 308 Peak	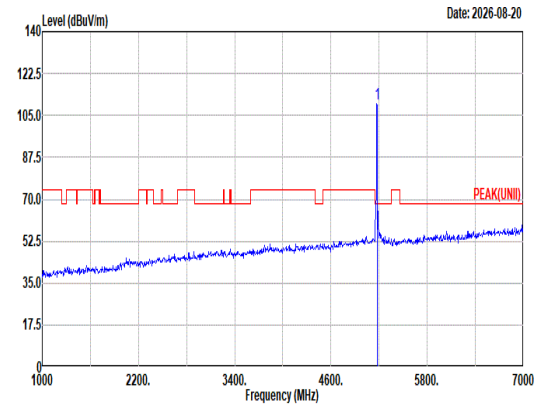 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.86 ------ ------ 101.47 33.06 11.52 36.19 0.00 100 308 Peak
Avg	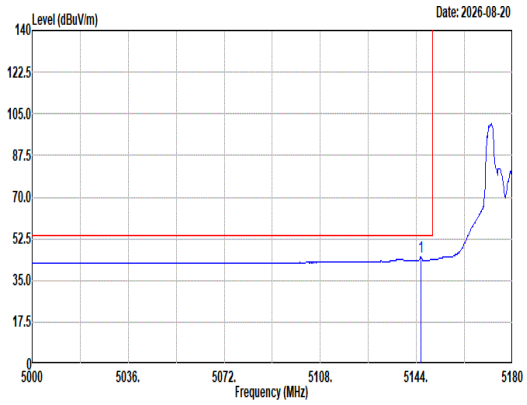 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 44.69 54.00 -9.31 36.28 33.09 11.51 36.19 0.00 100 308 Average	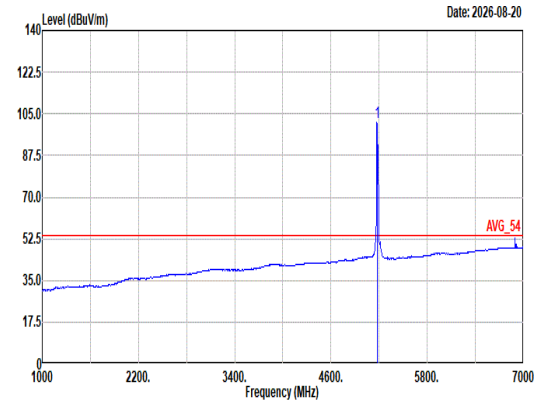 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 101.28 ------ ------ 92.89 33.06 11.52 36.19 0.00 100 308 Average

Mode	45	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU26/0_5180MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	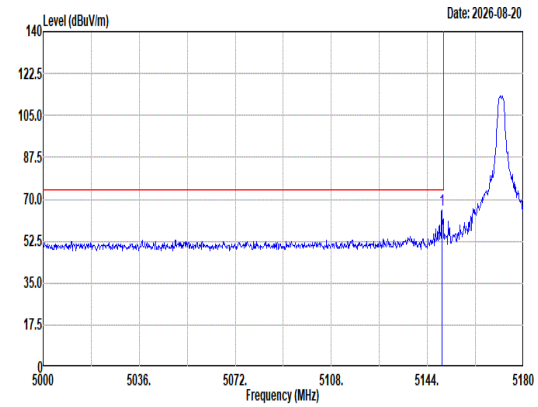 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.40 65.66 74.00 -8.34 57.24 33.10 11.51 36.19 0.00 100 236 Peak	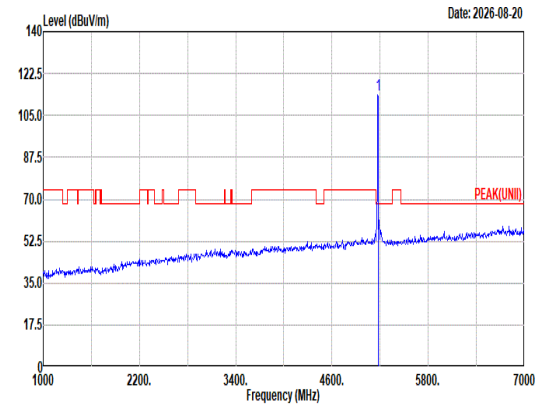 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 113.59 ------ ------ 105.20 33.06 11.52 36.19 0.00 100 236 Peak
Avg	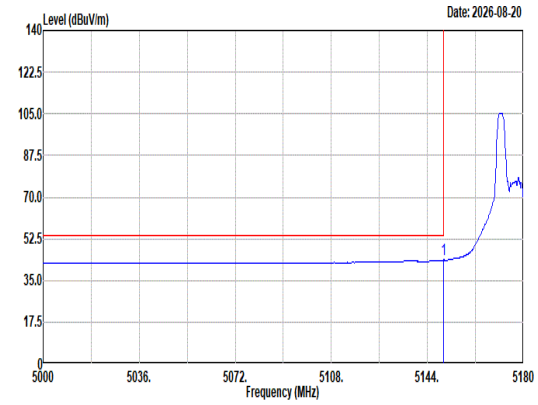 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 43.62 54.00 -10.38 35.20 33.10 11.51 36.19 0.00 100 236 Average	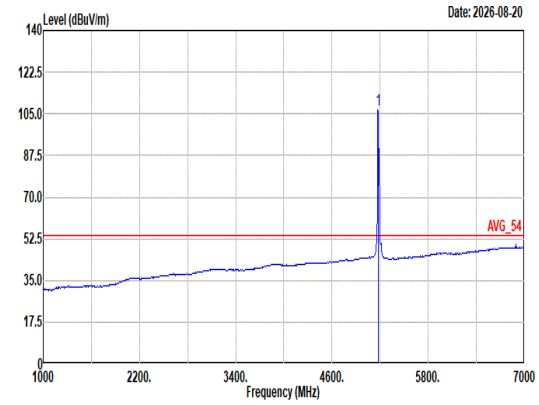 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.95 ------ ------ 98.56 33.06 11.52 36.19 0.00 100 236 Average

Mode	46	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU52/37_5180MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	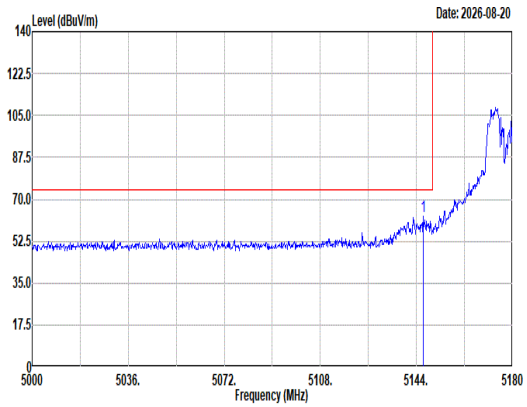 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.70 62.91 74.00 -11.09 54.50 33.09 11.51 36.19 0.00 100 313 Peak	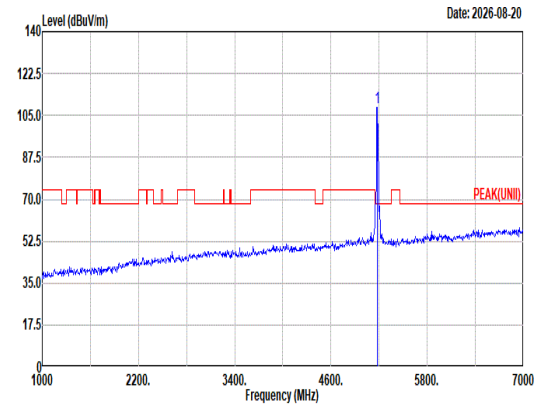 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 108.48 ------ ------ 100.09 33.05 11.53 36.19 0.00 100 313 Peak
Avg	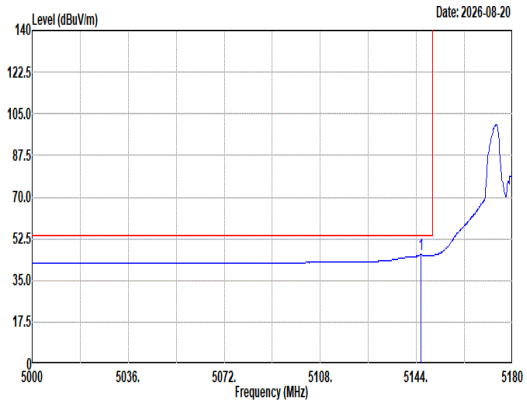 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 46.01 54.00 -7.99 37.60 33.09 11.51 36.19 0.00 100 313 Average	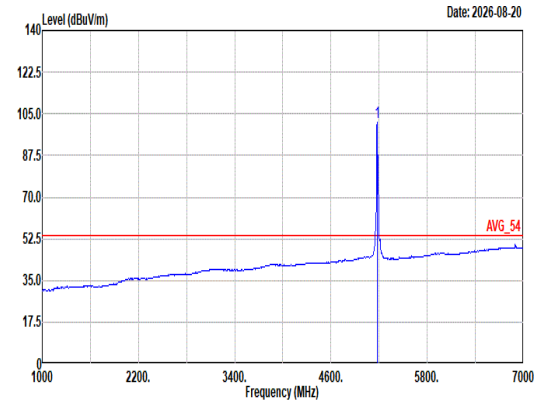 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 101.52 ------ ------ 93.13 33.05 11.53 36.19 0.00 100 313 Average

Mode	46	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU52/37_5180MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	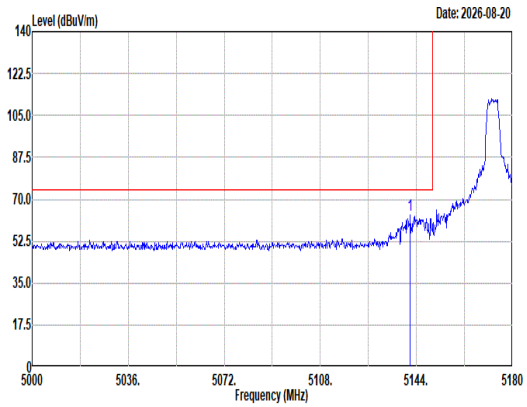 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.66 63.47 74.00 -10.53 55.08 33.08 11.50 36.19 0.00 103 308 Peak	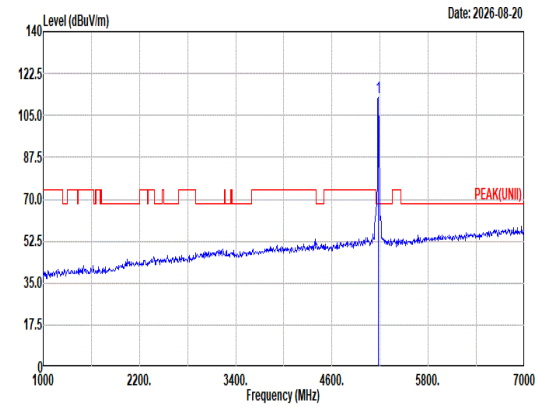 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 112.78 ------ ------ 104.39 33.05 11.53 36.19 0.00 103 308 Peak
Avg	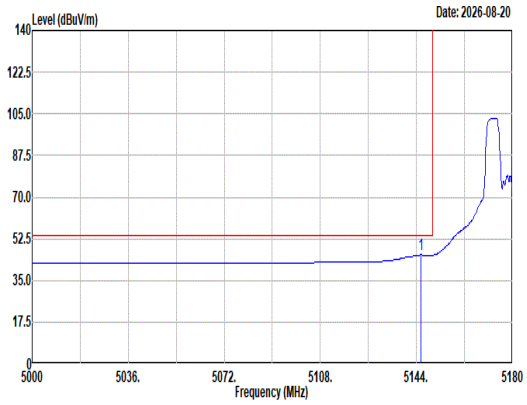 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 45.99 54.00 -8.01 37.58 33.09 11.51 36.19 0.00 103 308 Average	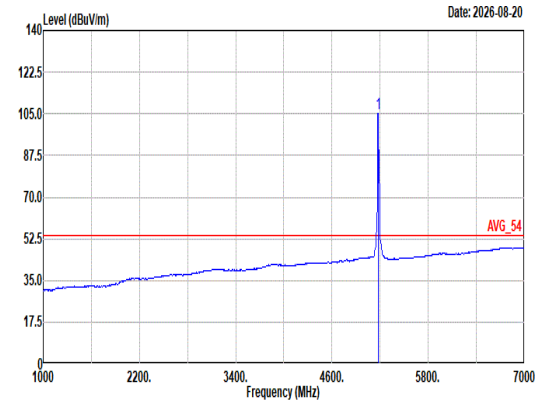 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 105.14 ------ ------ 96.75 33.05 11.53 36.19 0.00 103 308 Average

Mode	47	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU106/53_5180MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	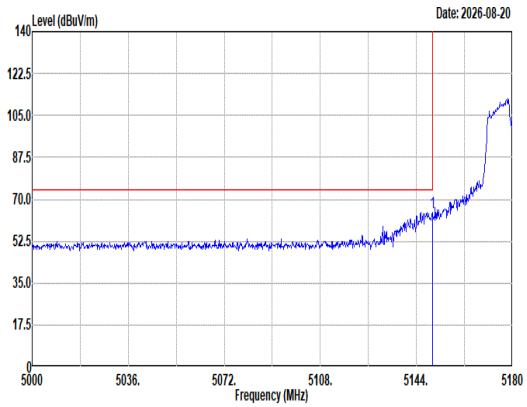 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 64.60 74.00 -9.40 56.18 33.10 11.51 36.19 0.00 100 304 Peak	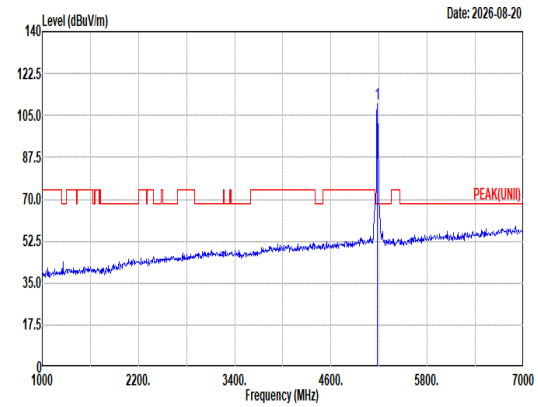 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 110.00 ------ ------ 101.61 33.05 11.53 36.19 0.00 100 304 Peak
Avg	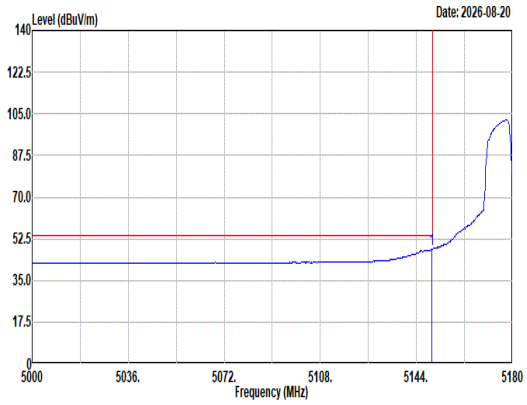 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 48.15 54.00 -5.85 39.73 33.10 11.51 36.19 0.00 100 304 Average	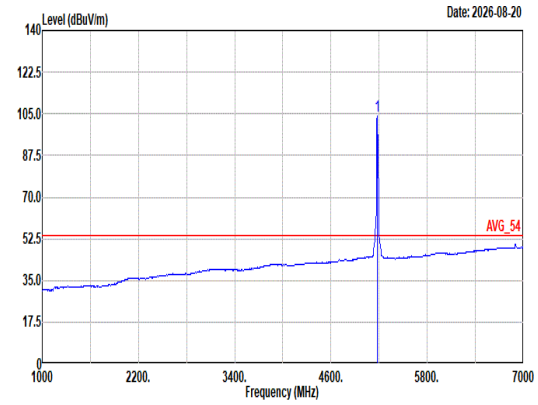 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 104.21 ------ ------ 95.82 33.05 11.53 36.19 0.00 100 304 Average

Mode	47	
	Band Edge	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_RU106/53_5180MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	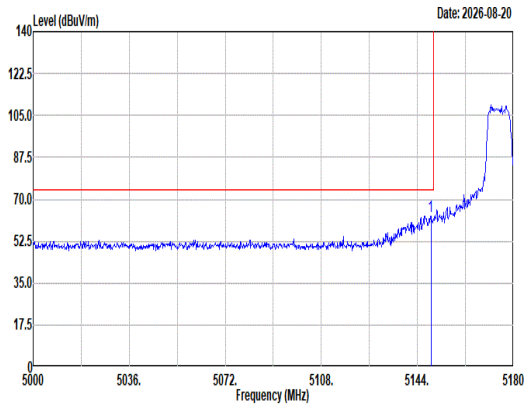 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.04 63.04 74.00 -10.96 54.62 33.10 11.51 36.19 0.00 113 308 Peak	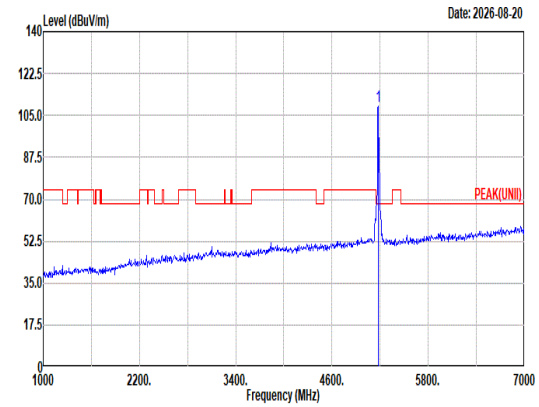 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 108.90 ------ ------ 100.51 33.05 11.53 36.19 0.00 113 308 Peak
Avg	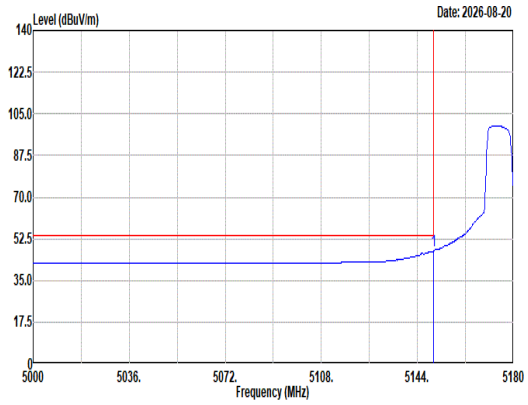 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 47.35 54.00 -6.65 38.93 33.10 11.51 36.19 0.00 113 308 Average	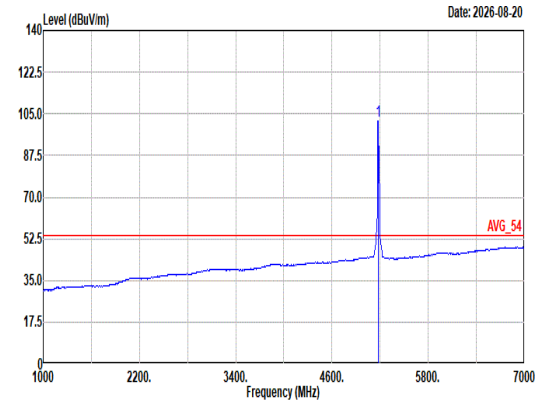 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 102.06 ------ ------ 93.67 33.05 11.53 36.19 0.00 113 308 Average

Mode	48	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU26/8_5320MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	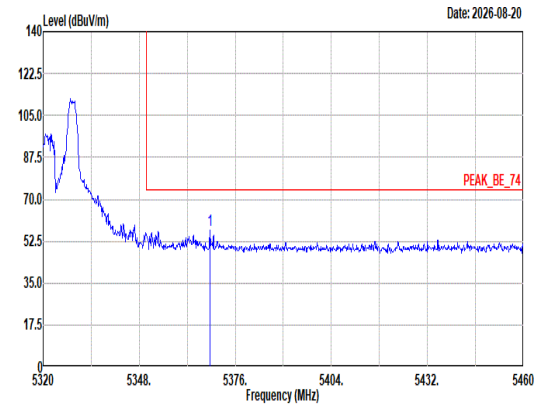 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5368.72 57.18 74.00 -16.82 48.78 32.83 11.78 36.21 0.00 300 349 Peak	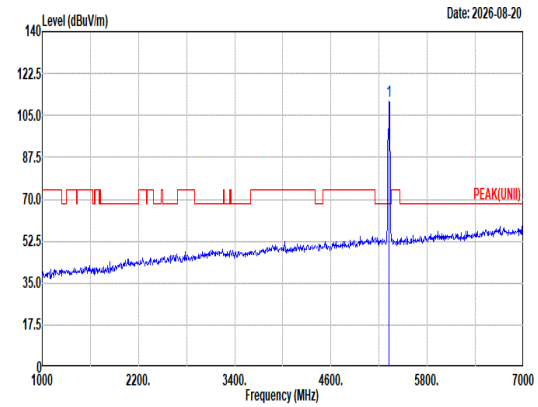 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 110.74 ------ ------ 102.33 32.90 11.72 36.21 0.00 300 349 Peak
Avg	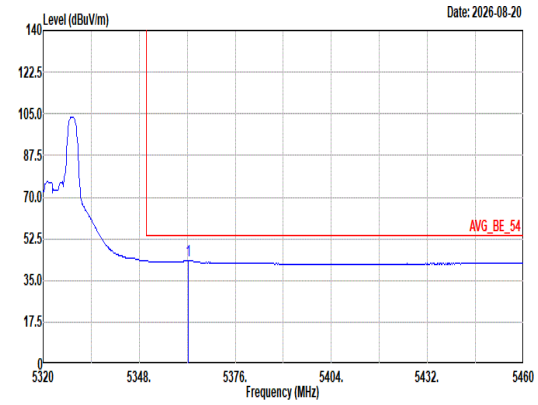 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.28 43.29 54.00 -10.71 34.88 32.85 11.77 36.21 0.00 300 349 Average	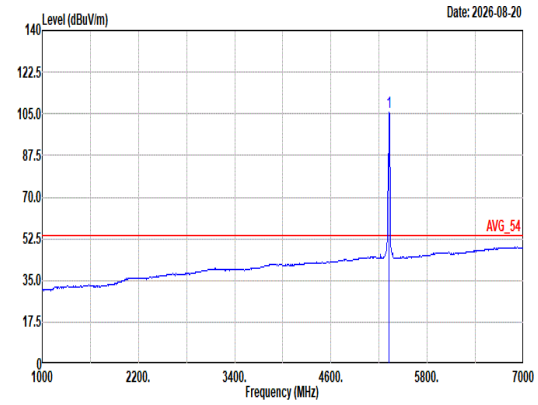 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 105.61 ------ ------ 97.20 32.90 11.72 36.21 0.00 300 349 Average

Mode	48	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU26/8_5320MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	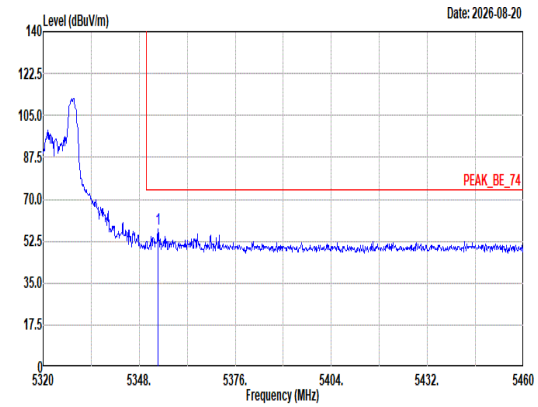 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5353.46 57.64 74.00 -16.36 49.21 32.89 11.75 36.21 0.00 100 221 Peak	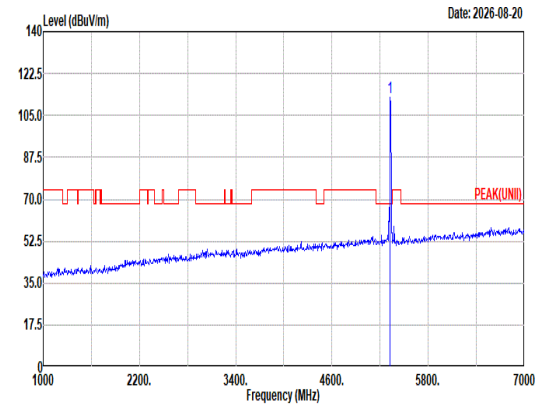 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5320.00 112.47 ------ ------ 104.06 32.90 11.72 36.21 0.00 100 221 Peak
Avg	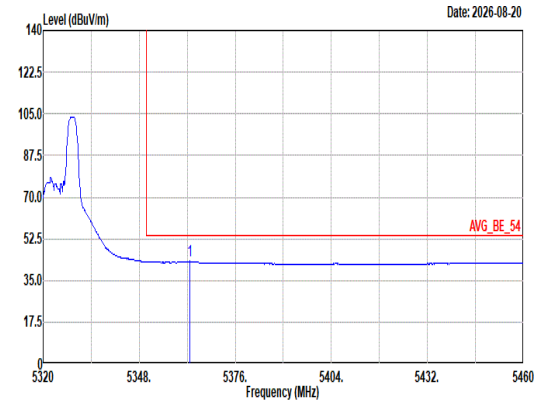 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5362.70 43.07 54.00 -10.93 34.66 32.85 11.77 36.21 0.00 100 221 Average	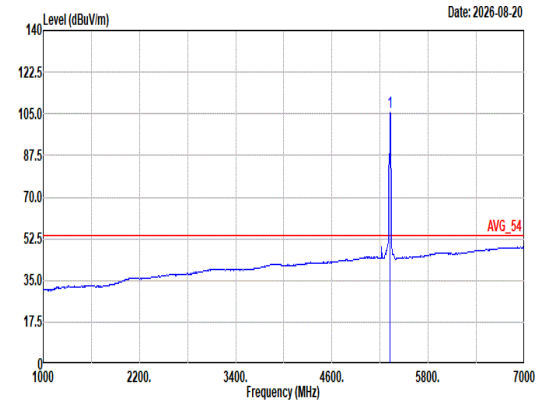 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5320.00 105.48 ------ ------ 97.07 32.90 11.72 36.21 0.00 100 221 Average

Mode	49	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU52/40_5320MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	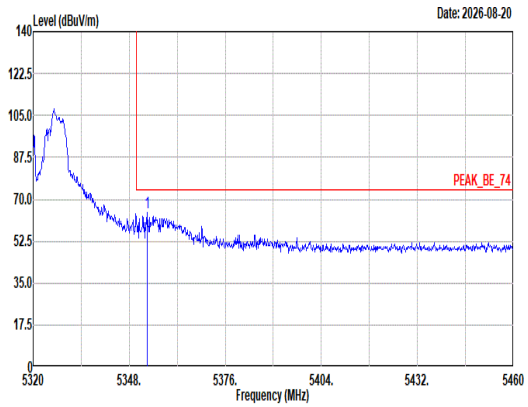 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.32 64.21 74.00 -9.79 55.78 32.89 11.75 36.21 0.00 300 337 Peak	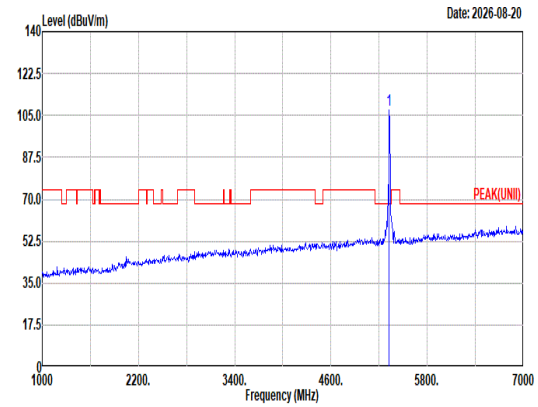 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 107.15 ------ ------ 98.74 32.90 11.72 36.21 0.00 300 337 Peak
Avg	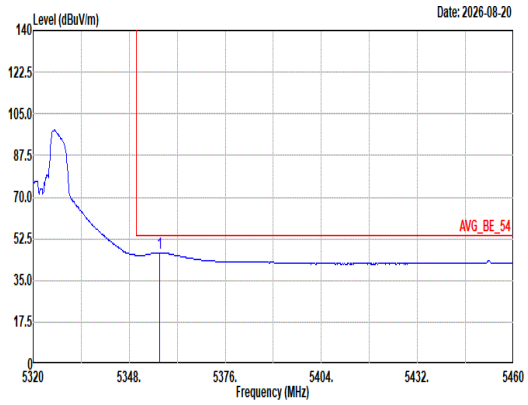 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.96 46.71 54.00 -7.29 38.29 32.87 11.76 36.21 0.00 300 337 Average	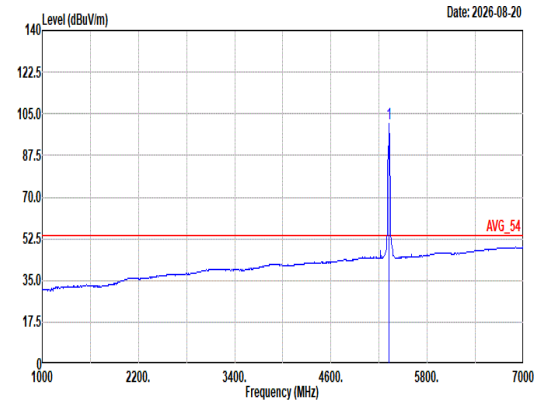 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 100.79 ------ ------ 92.38 32.90 11.72 36.21 0.00 300 337 Average

Mode	49	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU52/40_5320MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	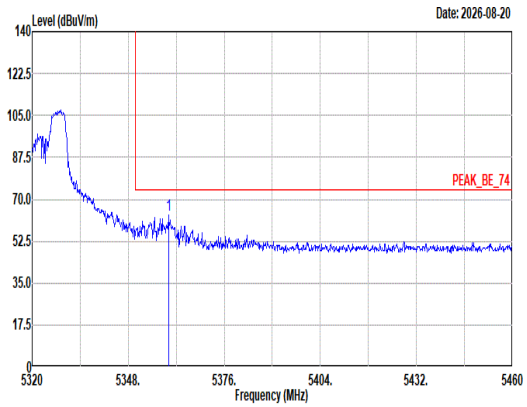 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5359.76 63.53 74.00 -10.47 55.12 32.86 11.76 36.21 0.00 106 189 Peak	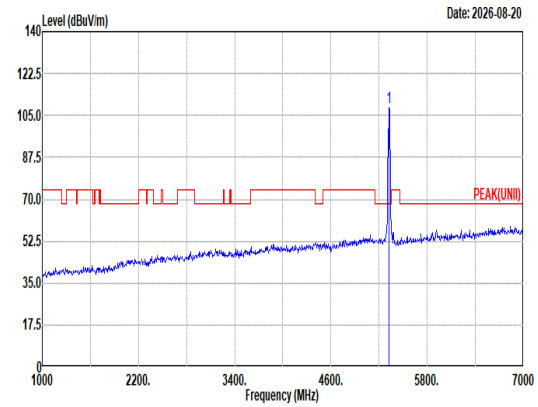 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5320.00 108.09 ------ ------ 99.68 32.90 11.72 36.21 0.00 106 189 Peak
Avg	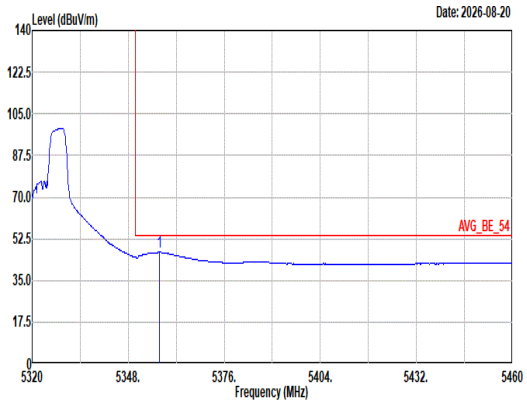 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5357.10 46.88 54.00 -7.12 38.46 32.87 11.76 36.21 0.00 106 189 Average	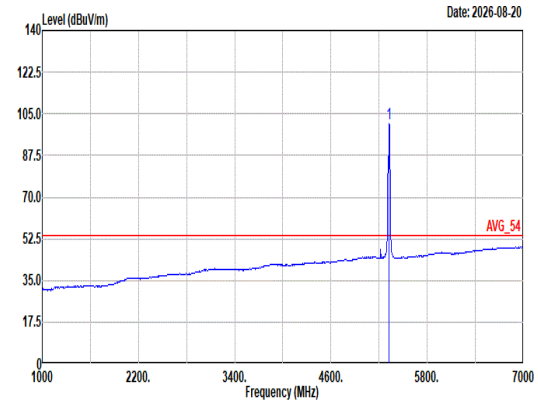 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5320.00 100.80 ------ ------ 92.39 32.90 11.72 36.21 0.00 106 189 Average

Mode	50	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU106/54_5320MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	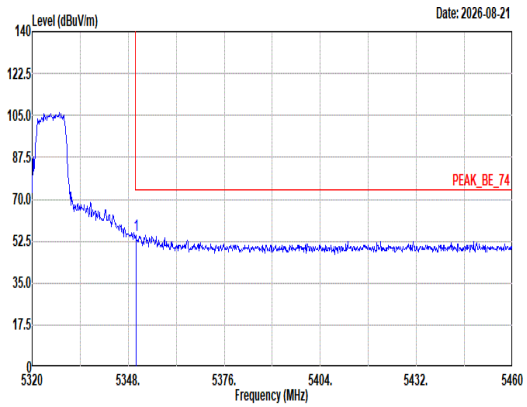 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 55.20 74.00 -18.80 46.76 32.90 11.75 36.21 0.00 300 352 Peak	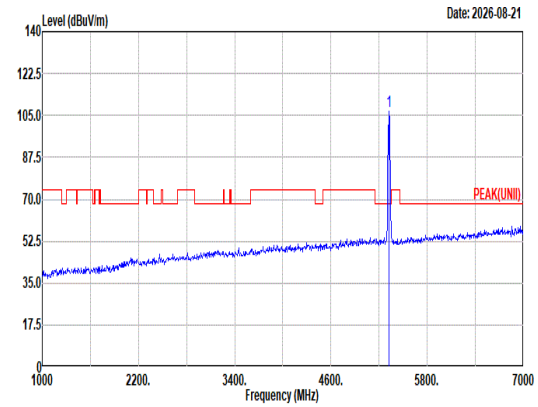 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 106.48 ------ ------ 98.07 32.90 11.72 36.21 0.00 300 352 Peak
Avg	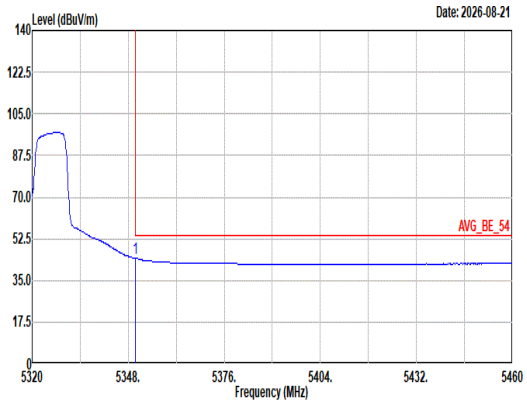 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 44.25 54.00 -9.75 35.81 32.90 11.75 36.21 0.00 300 352 Average	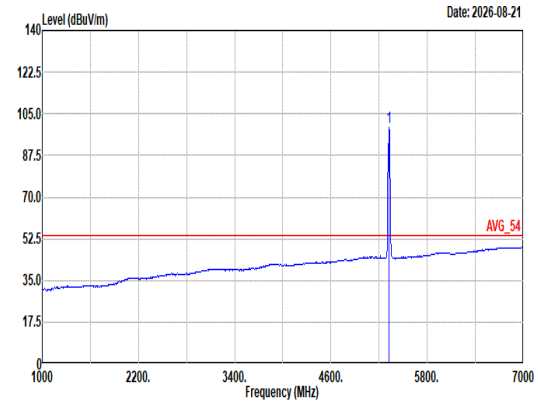 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 99.21 ------ ------ 90.80 32.90 11.72 36.21 0.00 300 352 Average

Mode	50	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_RU106/54_5320MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	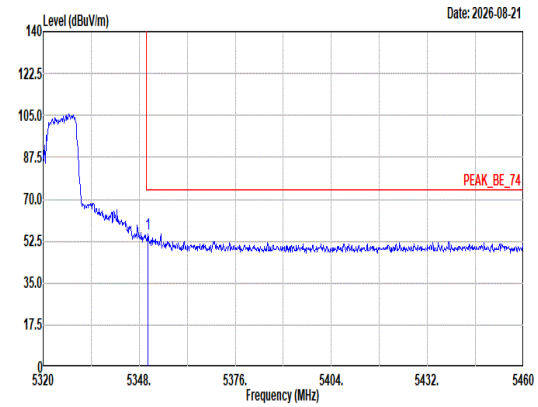 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 55.37 74.00 -18.63 46.93 32.90 11.75 36.21 0.00 100 221 Peak	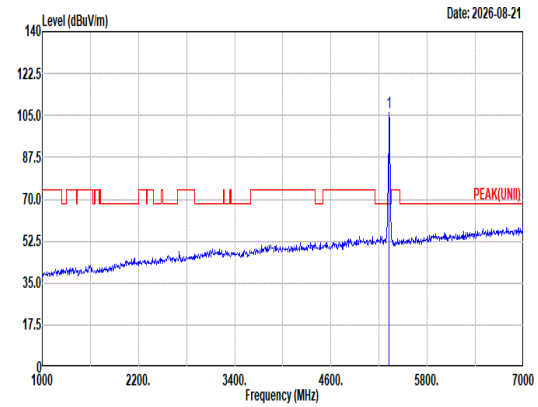 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 106.23 ------ ------ 97.82 32.90 11.72 36.21 0.00 100 221 Peak
Avg	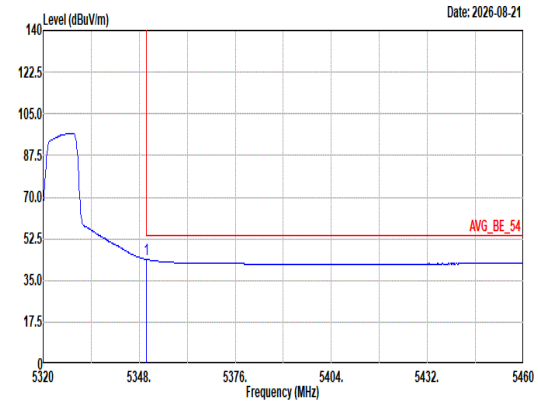 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 43.90 54.00 -10.10 35.46 32.90 11.75 36.21 0.00 100 221 Average	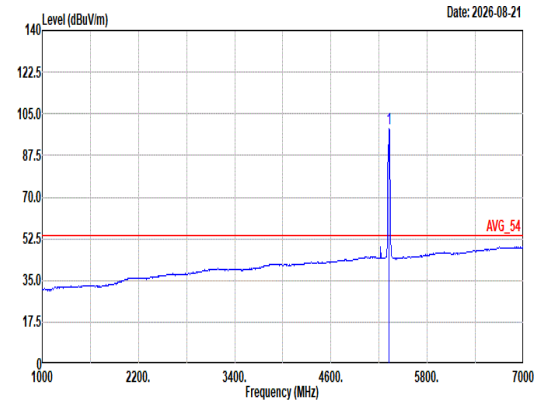 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 98.71 ------ ------ 90.30 32.90 11.72 36.21 0.00 100 221 Average

Mode	51
	Band Edge
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU26/0_5500MHz
ANT	5+4

Pol.	Horizontal	Fundamental
Peak	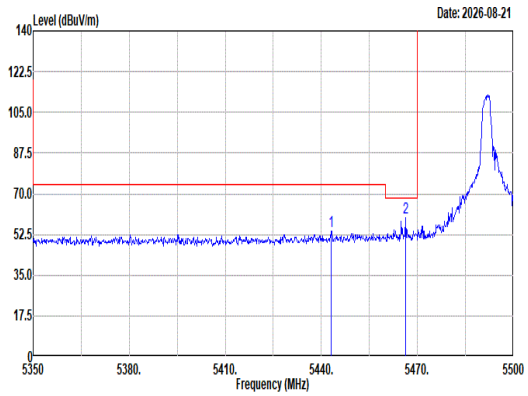 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5443.15 53.94 74.00 -20.06 45.51 32.79 11.86 36.22 0.00 253 326 Peak 2 5466.40 59.70 68.20 -8.50 51.17 32.87 11.89 36.23 0.00 253 326 Peak	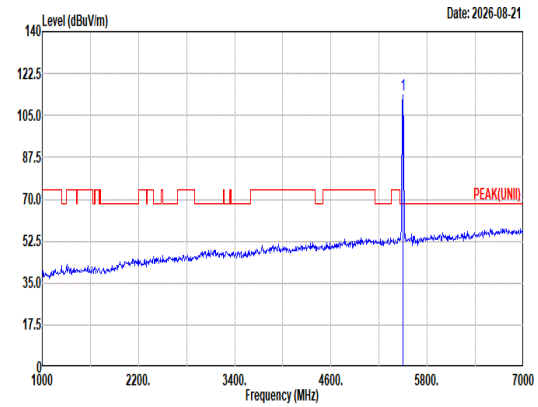 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5500.00 113.61 ------ ------ 104.95 32.98 11.91 36.23 0.00 253 326 Peak
Avg	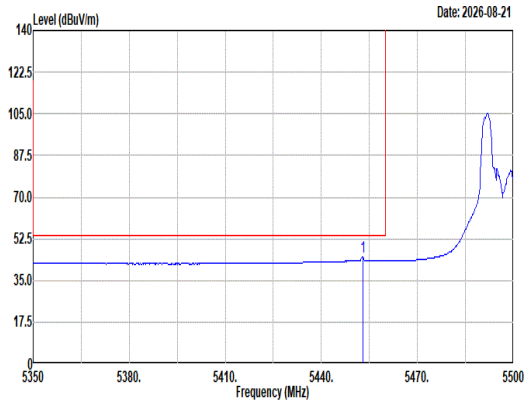 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5452.90 44.80 54.00 -9.20 36.34 32.81 11.87 36.22 0.00 253 326 Average	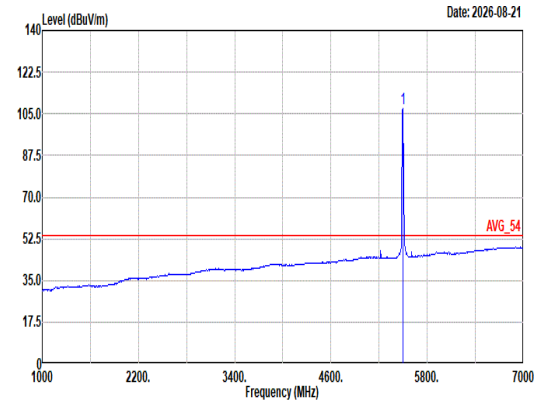 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5500.00 107.47 ------ ------ 98.81 32.98 11.91 36.23 0.00 253 326 Average

Mode	51	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU26/0_5500MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	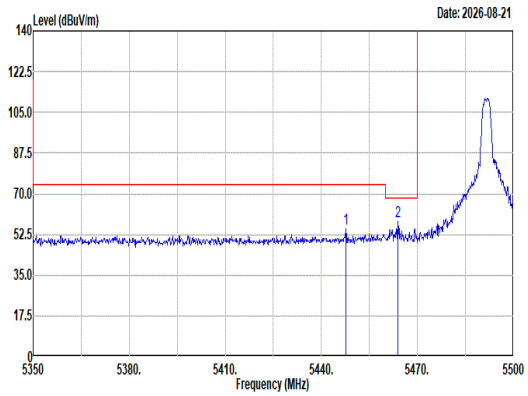 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5447.65 54.74 74.00 -19.26 46.29 32.80 11.87 36.22 0.00 100 311 Peak 2 5464.00 57.85 68.20 -10.35 49.34 32.86 11.88 36.23 0.00 100 311 Peak	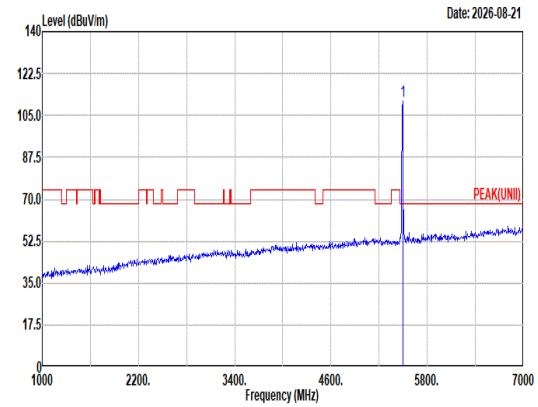 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.07 ------ ------ 102.41 32.98 11.91 36.23 0.00 100 311 Peak
Avg	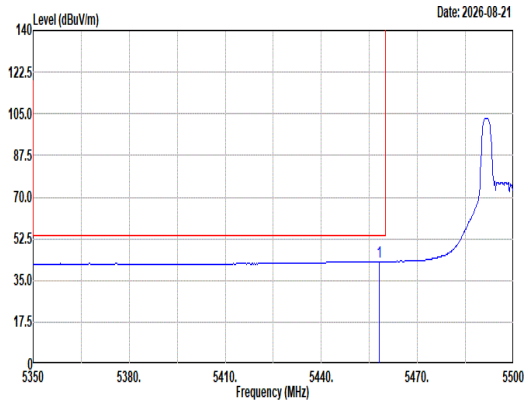 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.15 43.04 54.00 -10.96 34.55 32.83 11.88 36.22 0.00 100 311 Average	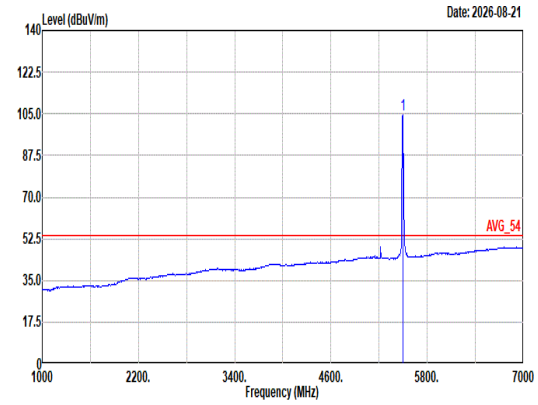 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.81 ------ ------ 96.15 32.98 11.91 36.23 0.00 100 311 Average

Mode	52	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU52/37_5500MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	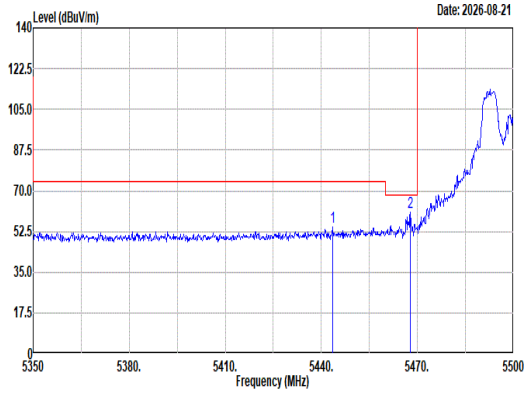 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.45 54.18 74.00 -19.82 45.75 32.79 11.86 36.22 0.00 258 327 Peak 2 5467.75 60.91 68.20 -7.29 52.38 32.87 11.89 36.23 0.00 258 327 Peak	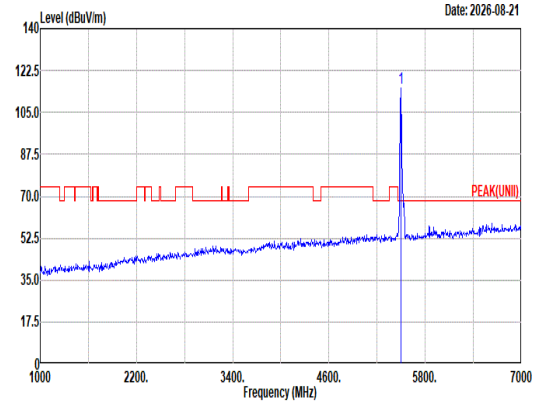 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 115.37 ------ ------ 106.71 32.98 11.91 36.23 0.00 258 327 Peak
Avg	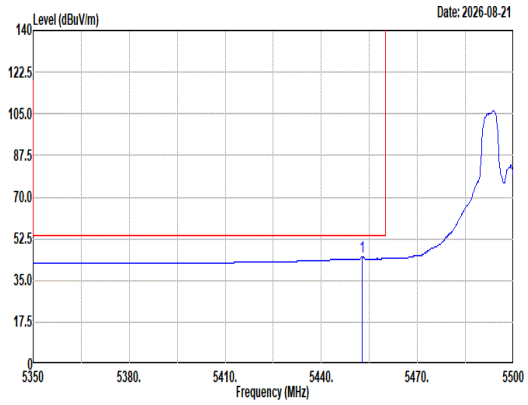 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.75 45.12 54.00 -8.88 36.66 32.81 11.87 36.22 0.00 258 327 Average	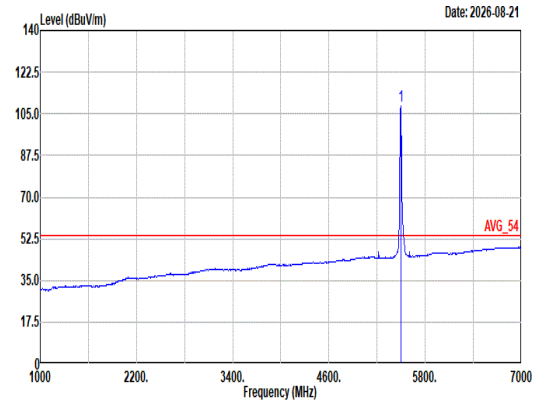 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 108.22 ------ ------ 99.56 32.98 11.91 36.23 0.00 258 327 Average

Mode	52	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU52/37_5500MHz	
ANT	5+4	
Pol.	Vertical	Fundamental
Peak	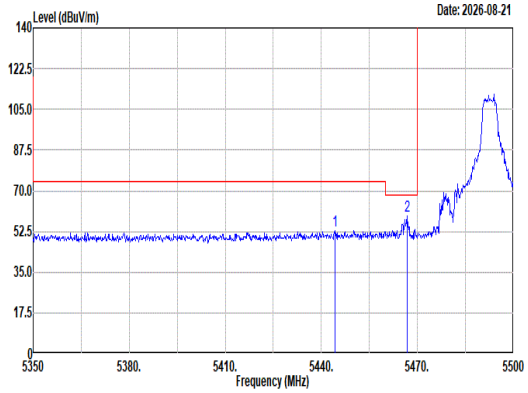 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5444.35 52.82 74.00 -21.18 44.39 32.79 11.86 36.22 0.00 100 167 Peak 2 5466.70 59.29 68.20 -8.91 50.76 32.87 11.89 36.23 0.00 100 167 Peak	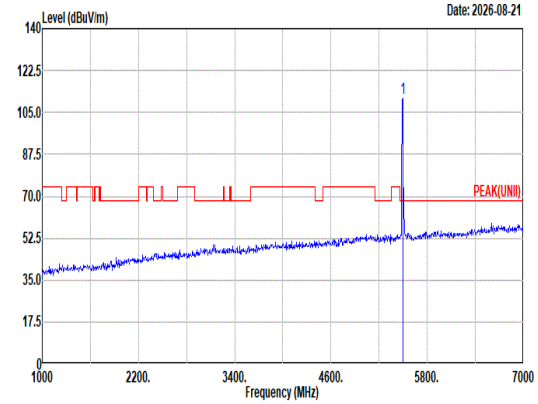 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 110.84 ------ ------ 102.18 32.98 11.91 36.23 0.00 100 167 Peak
Avg	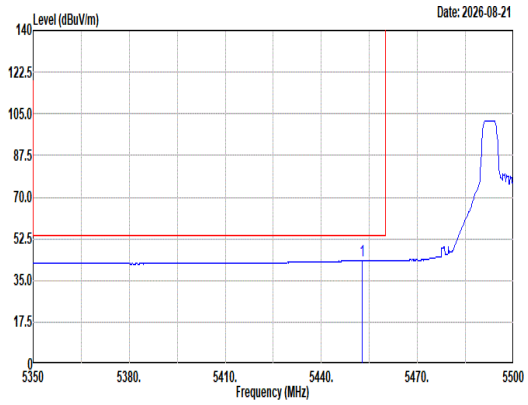 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.75 43.37 54.00 -10.63 34.91 32.81 11.87 36.22 0.00 100 167 Average	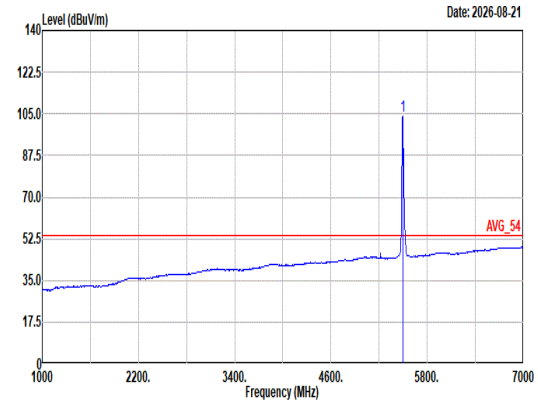 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.09 ------ ------ 95.43 32.98 11.91 36.23 0.00 100 167 Average

Mode	53	
	Band Edge	
	U-NII-2C_5.25-5.35_802.11be EHT20_CH100_RU106/53_5500MHz	
ANT	5+4	
Pol.	Horizontal	Fundamental
Peak	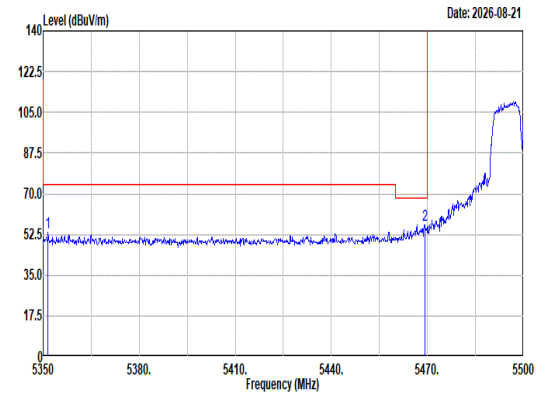 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5351.50 53.53 74.00 -20.47 45.10 32.89 11.75 36.21 0.00 299 332 Peak 2 5469.25 56.69 68.20 -11.51 48.15 32.88 11.89 36.23 0.00 299 332 Peak	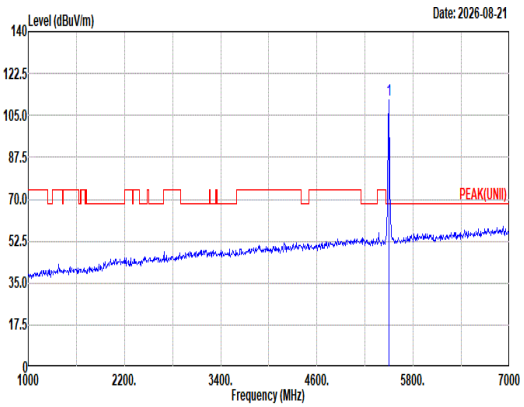 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5500.00 111.34 ------ ------ 102.65 33.00 11.92 36.23 0.00 299 332 Peak
Avg	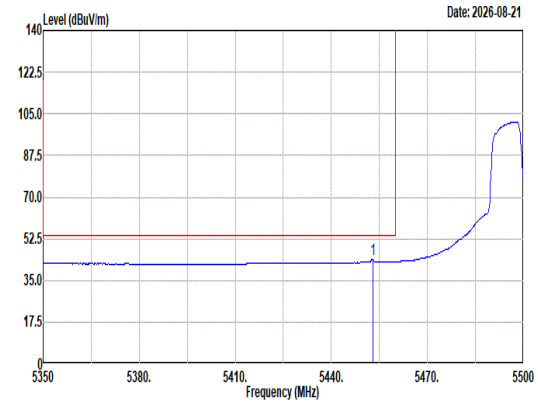 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5452.90 43.96 54.00 -10.04 35.50 32.81 11.87 36.22 0.00 299 332 Average	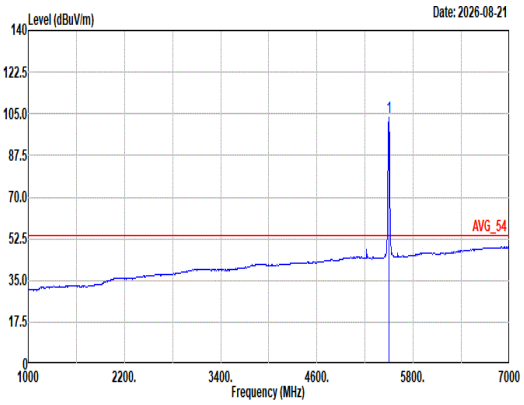 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5500.00 103.54 ------ ------ 94.85 33.00 11.92 36.23 0.00 299 332 Average