

51_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch512

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_600-7200_260530 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 42.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.99, 4.89, 5.04) @ 1850.2 MHz; Calibrated: 2025/9/25
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2026/1/15
- Phantom: SAM_Right; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.85 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.376 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.04 W/kg

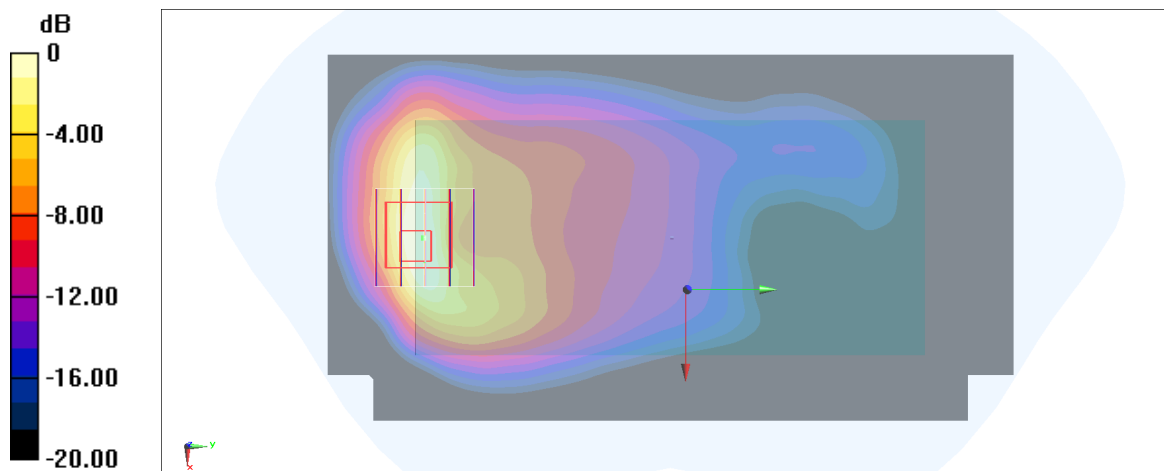

0 dB = 1.04 W/kg = 0.17 dBW/kg

52_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9538

Communication System: UID 10011 - CAC, UMTS-FDD ; Frequency: 1907.6 MHz

Medium: HSL_600-7200_260602 Medium parameters used : $f = 1907.6$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 40.433$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1907.6 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.75 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.19 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.496 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.56 W/kg

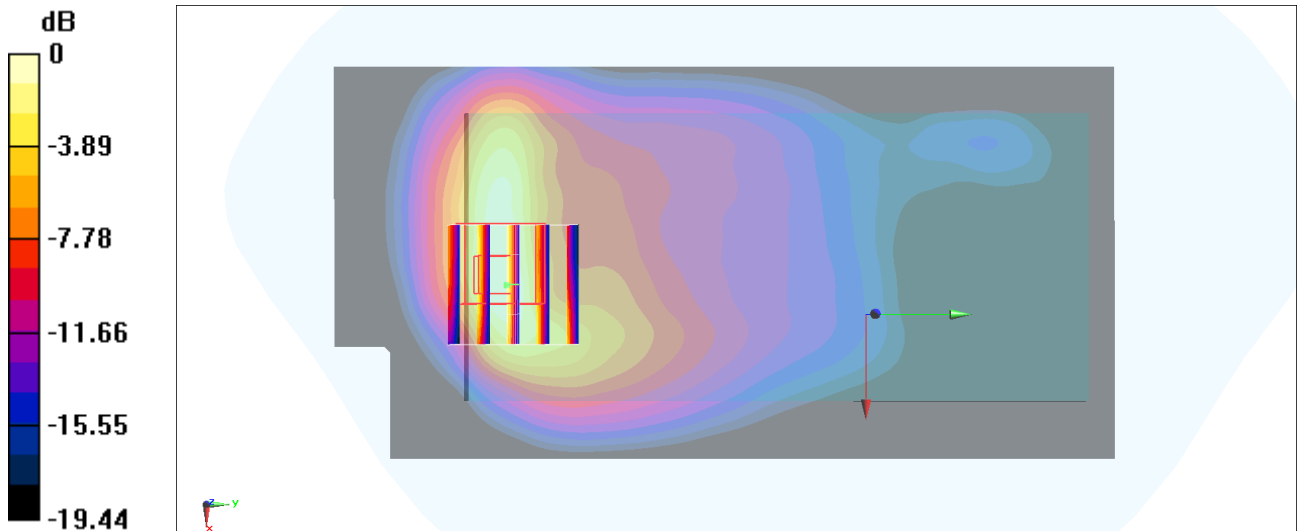

0 dB = 1.56 W/kg = 1.93 dBW/kg

53_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513

Communication System: UID 10011 - CAC, UMTS-FDD ; Frequency: 1752.6 MHz

Medium: HSL_600-7200_260602 Medium parameters used : $f = 1752.6$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.747$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1752.6 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.63 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.493 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 1.41 W/kg

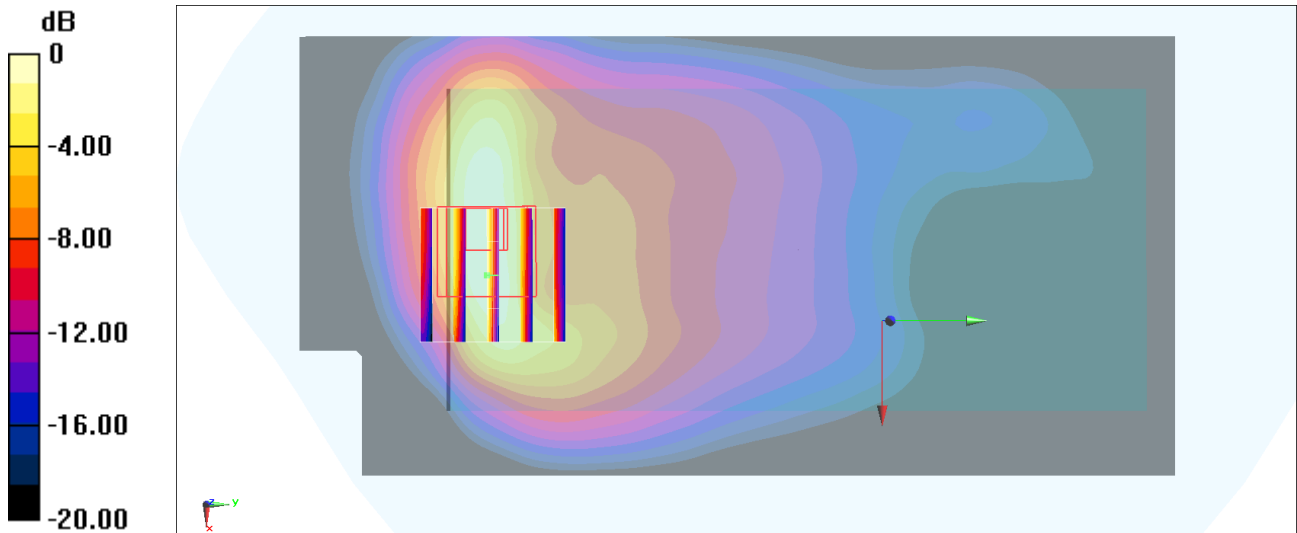

0 dB = 1.47 W/kg = 1.67 dBW/kg

54_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4233

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 846.6 MHz

Medium: HSL_600-7200_260531 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 44.379$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 846.6 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 43.47 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.512 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 1.53 W/kg

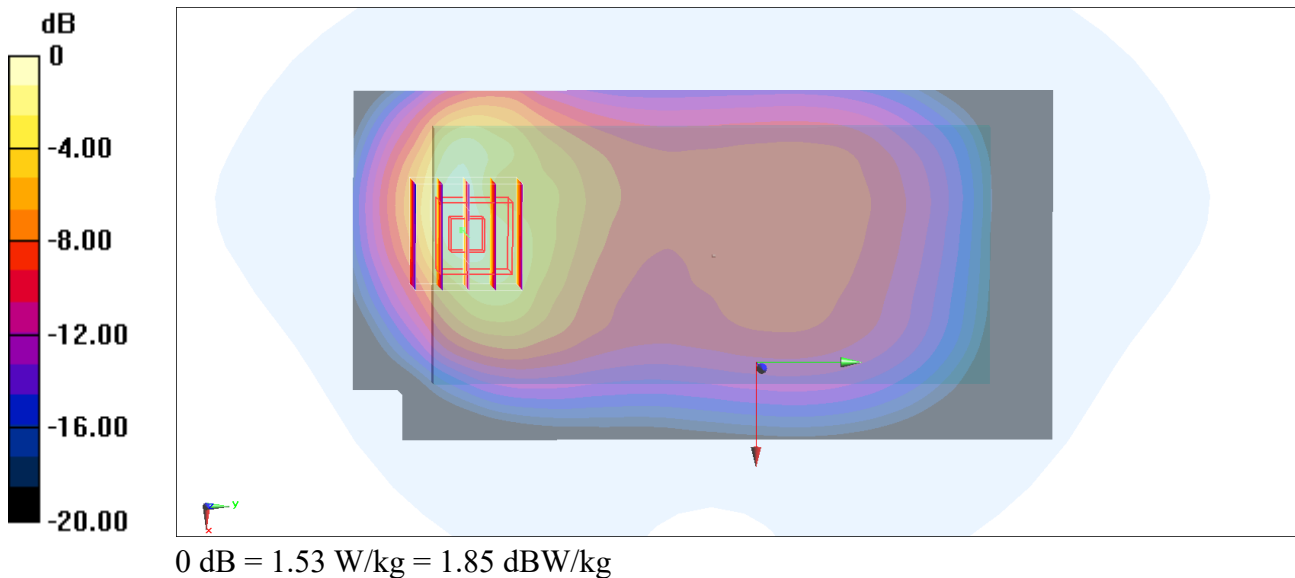

55_LTE Band 7_20M_QPSK_1_49_Back_5mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600~7200_20260601 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 42.227$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.54, 6.8, 6.94) @ 2560 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.57 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.409 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 1.52 W/kg

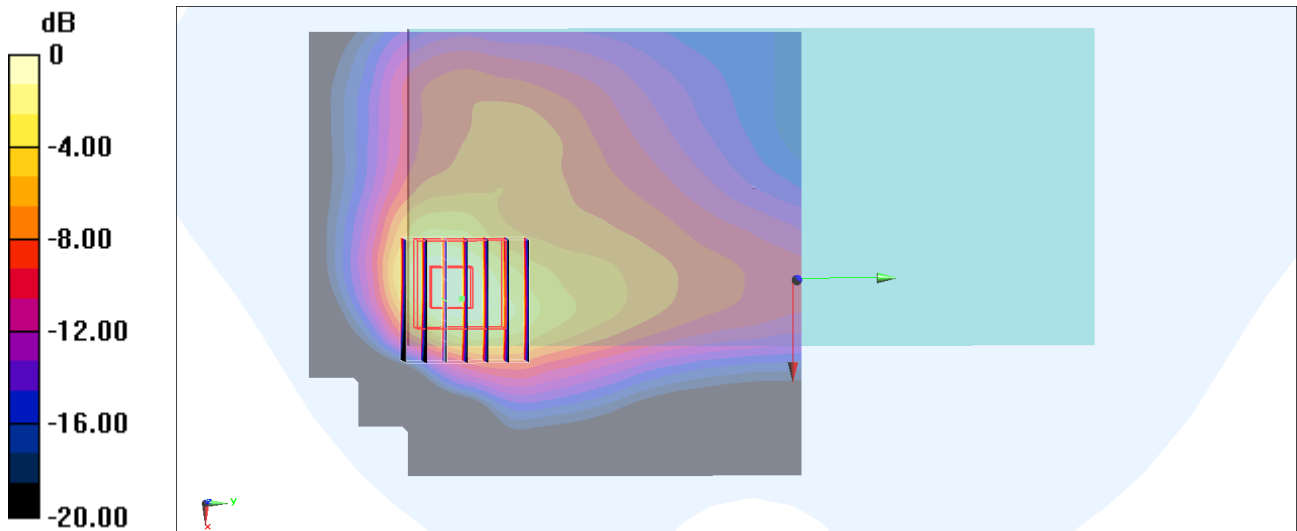

0 dB = 1.52 W/kg = 1.82 dBW/kg

56_LTE Band 12_10M_QPSK_1_25_Back_5mm_Ch23095

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 707.5 MHz

Medium: HSL_600~7200_20260604 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 45.013$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97) @ 707.5 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.966 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.30 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.348 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.997 W/kg

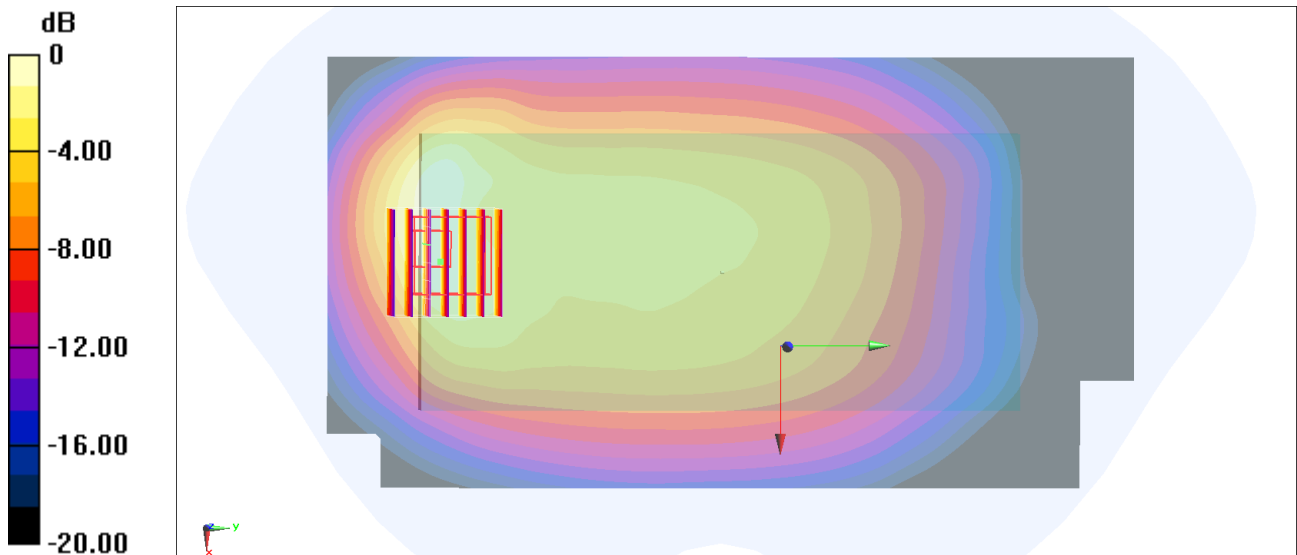

0 dB = 0.966 W/kg = -0.15 dBW/kg

57_LTE Band 13_10M_QPSK_1_25_Back_5mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD ; Frequency: 782 MHz

Medium: HSL_600-7200_260531 Medium parameters used : $f = 782$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 44.414$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 782 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.62 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.486 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.40 W/kg

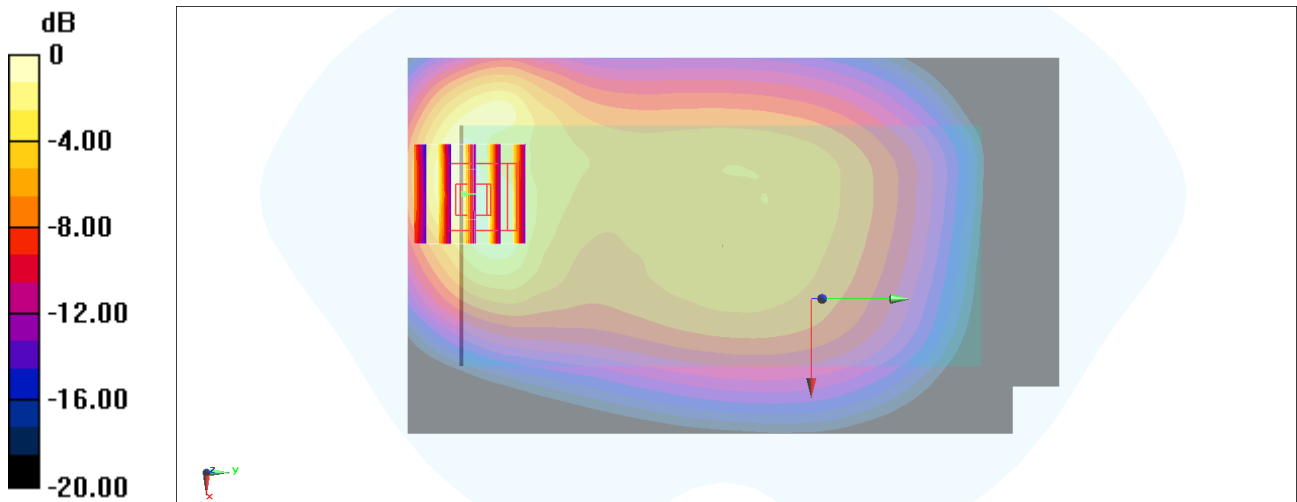

0 dB = 1.31 W/kg = 1.17 dBW/kg

58_LTE Band 2_20M_QPSK_1_49_Back_5mm_CH18900

Communication System: UID 0, LTE ; Frequency: 1880 MHz; Duty Cycle:1:1

Medium: HSL_600-7200_260608 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.88, 4.92, 4.75) @ 1880 MHz; Calibrated: 2025/8/19
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn661; Calibrated: 2026/5/13
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.79 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.460 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 1.20 W/kg

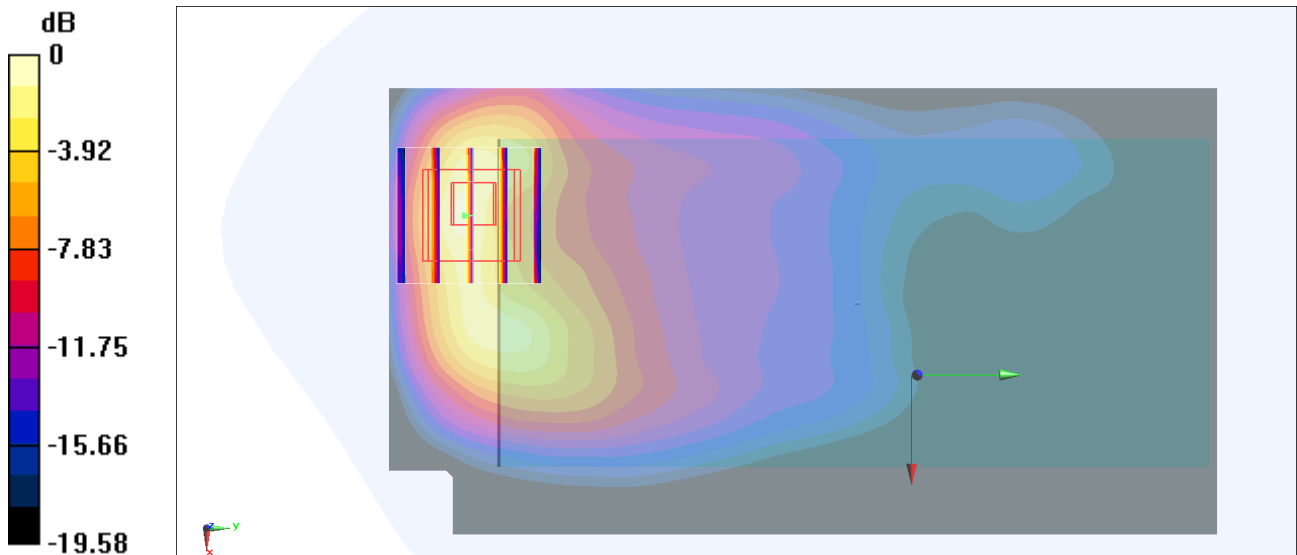

0 dB = 1.20 W/kg = 0.79 dBW/kg

59_LTE Band 26_15M_QPSK_1_37_Back_5mm_Ch26865

Communication System: UID 10181 - CAF, LTE-FDD ; Frequency: 831.5 MHz

Medium: HSL_600-7200_260603 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.279$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 831.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.88 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.464 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 1.34 W/kg

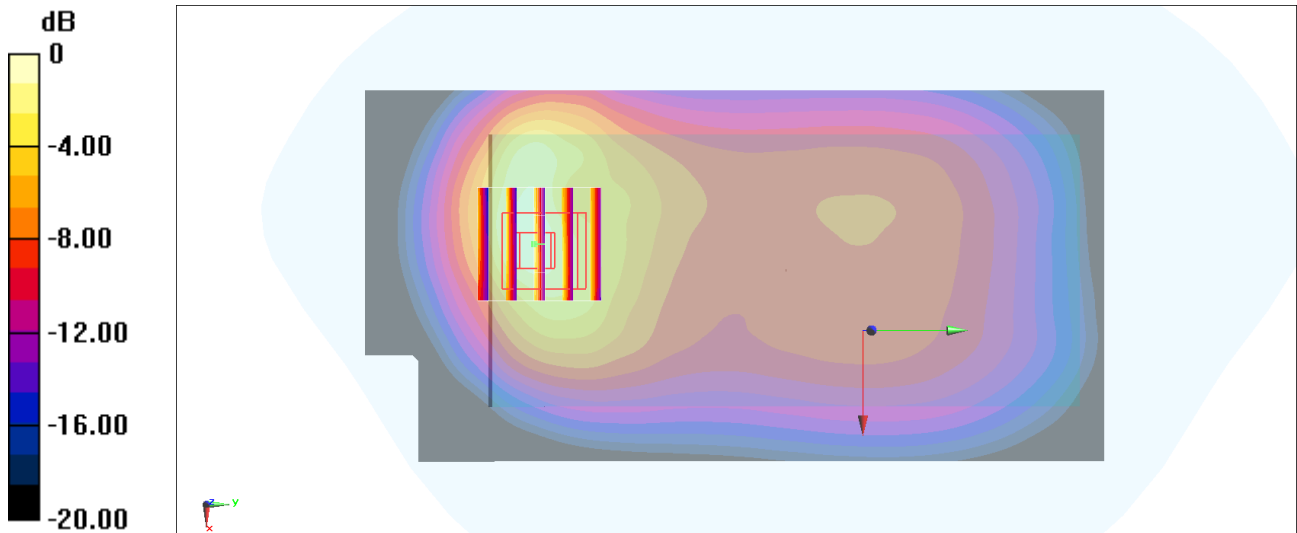

0 dB = 1.44 W/kg = 1.58 dBW/kg

60_LTE Band 66_20M_QPSK_1_49_Back_5mm_Ch132322

Communication System: UID 10169 - CAF, LTE-FDD ; Frequency: 1745 MHz

Medium: HSL_600-7200_260602 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 40.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.135 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.507 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.35 W/kg

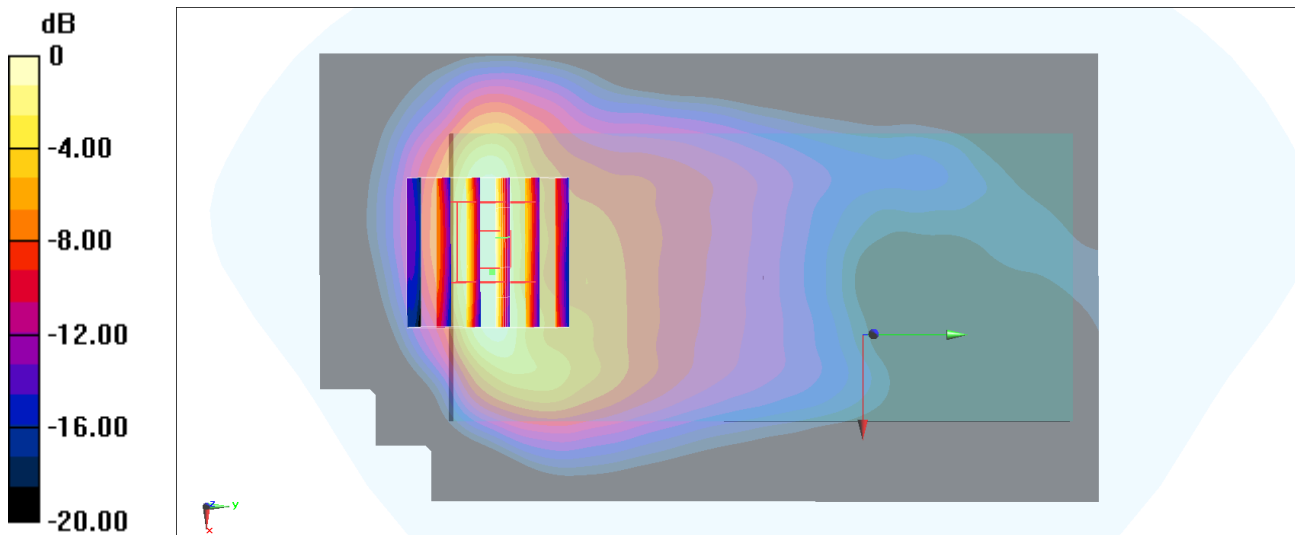

0 dB = 1.44 W/kg = 1.58 dBW/kg

61_LTE Band 38_20M_QPSK_1_49_Back_5mm_Ch38000

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2595 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2595 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.775 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.333 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 1.29 W/kg

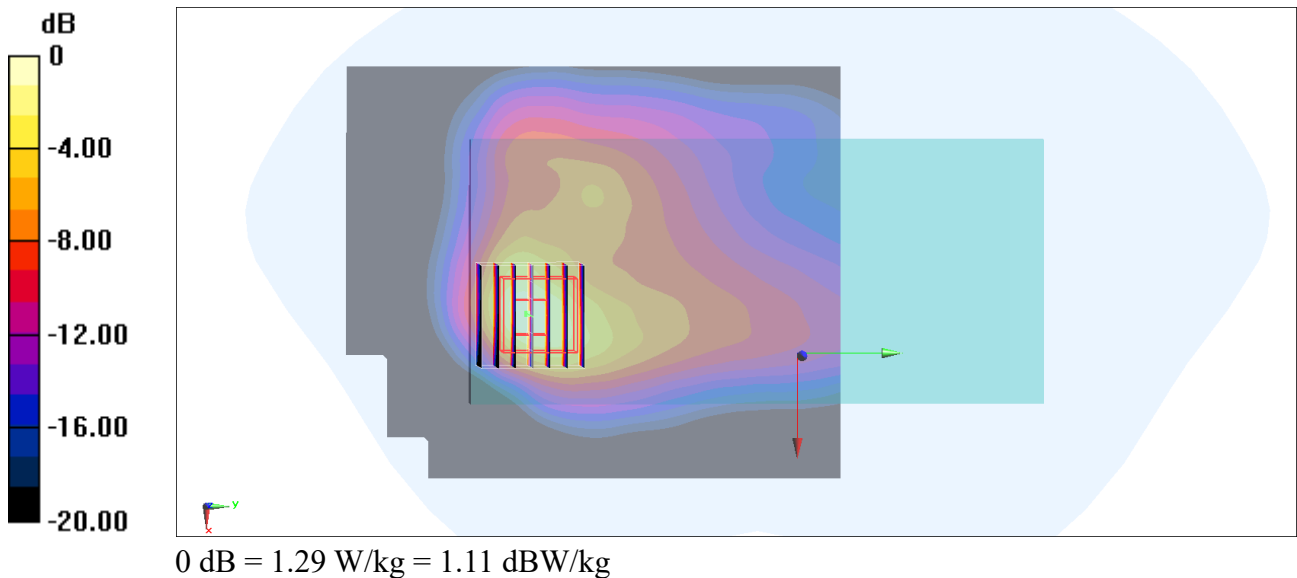

62_LTE Band 41_20M_QPSK_1_49_Back_5mm_Ch40620

Communication System: UID 10172 - CAH, LTE-TDD ; Frequency: 2593 MHz

Medium: HSL_600-7200_260529 Medium parameters used : $f = 2593$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 41.345$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2593 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.987 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.417 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.247 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 0.972 W/kg

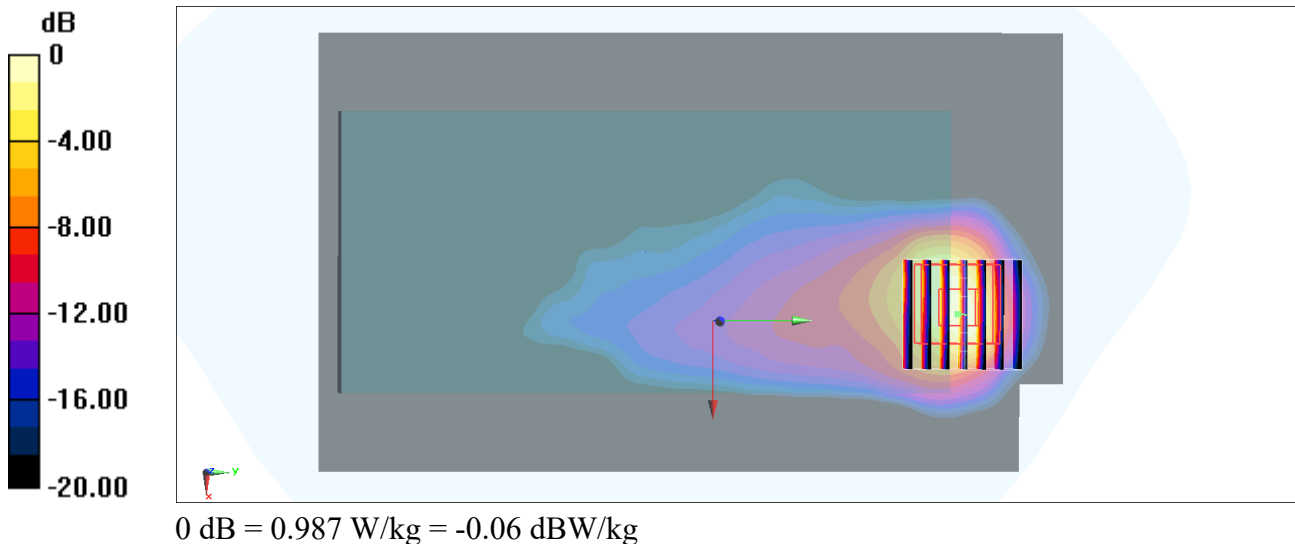

63_LTE Band 42_20M_QPSK_1_49_Back_5mm_Ch42590

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3500 MHz

Medium: HSL_600-7200_260601 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.821$ S/m; $\epsilon_r = 39.755$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3500 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 21.43 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.181 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 1.13 W/kg

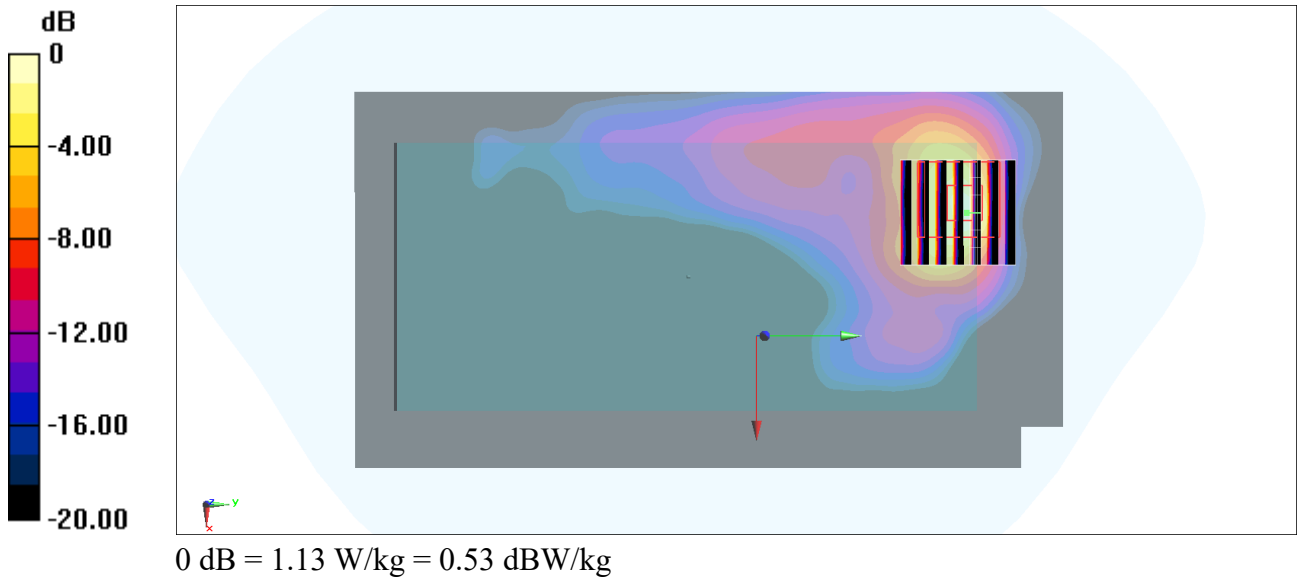

64_FR1 n2_40M_QPSK_108_54_Back_5mm_Ch376000

Communication System: UID 10942 - AAC, 5G NR; Frequency: 1880 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 42.016$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91) @ 1880 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 33.48 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.498 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 1.71 W/kg

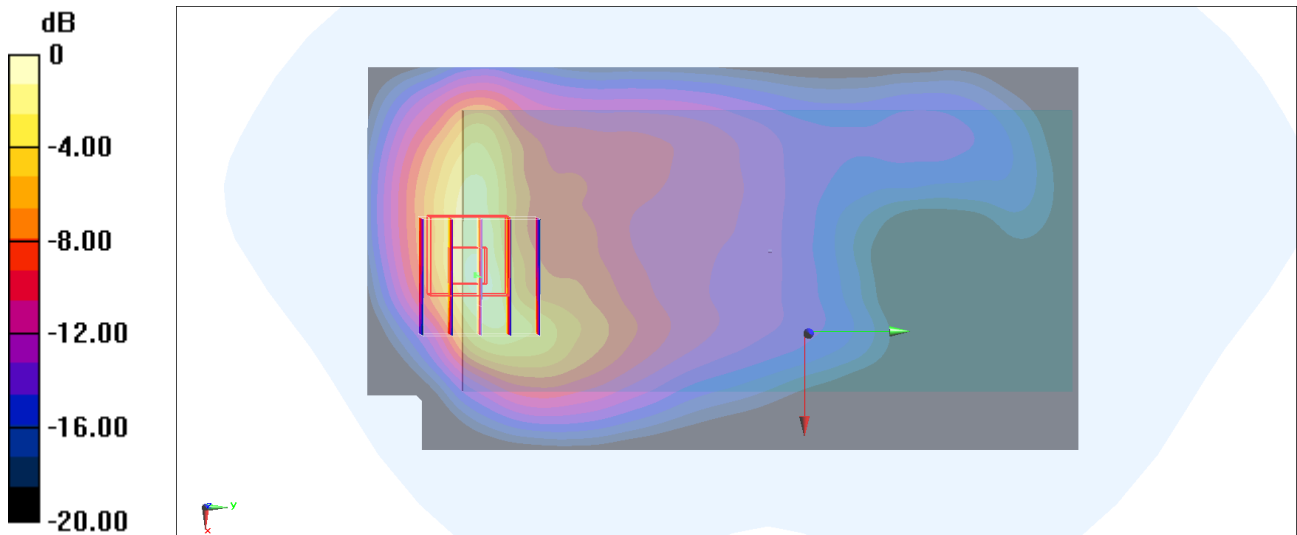

0 dB = 1.71 W/kg = 2.33 dBW/kg

65_FR1 n7_50M_QPSK_135_68_Back_5mm_Ch507000

Communication System: UID 10935 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600-7200_260529 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 41.115$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.61 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.448 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 1.69 W/kg

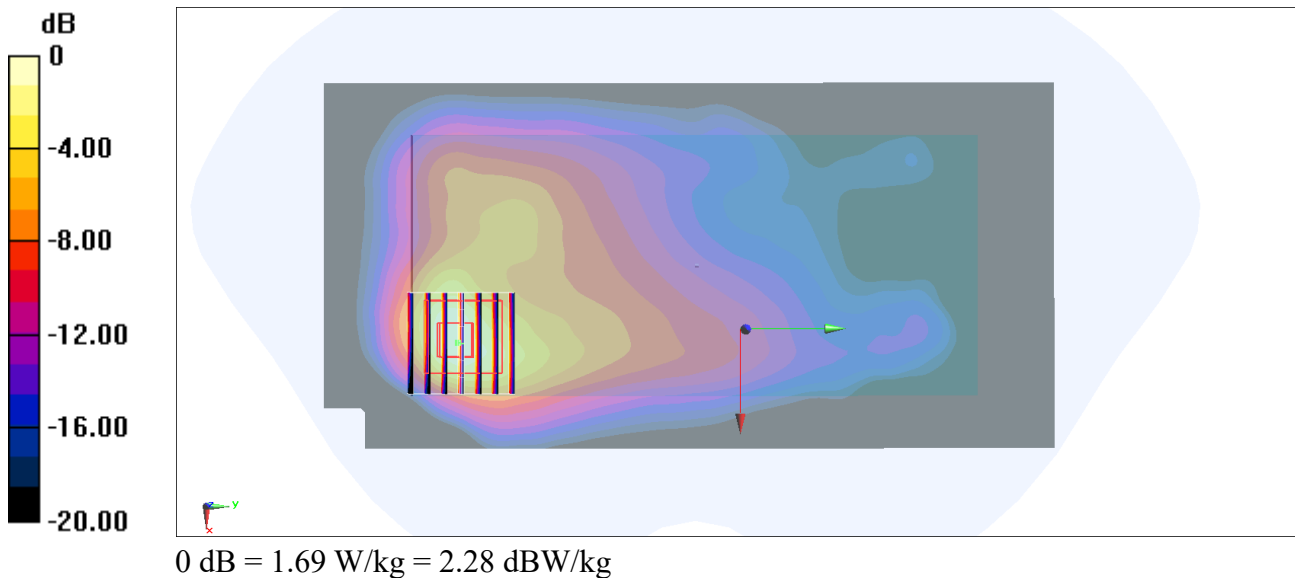

66_FR1 n26_20M_QPSK_50_28_Back_5mm_Ch166300

Communication System: UID 10939 - AAC, 5G NR; Frequency: 831.5 MHz

Medium: HSL_600-7200_260604 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 44.55$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75) @ 831.5 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.62 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.430 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 1.20 W/kg

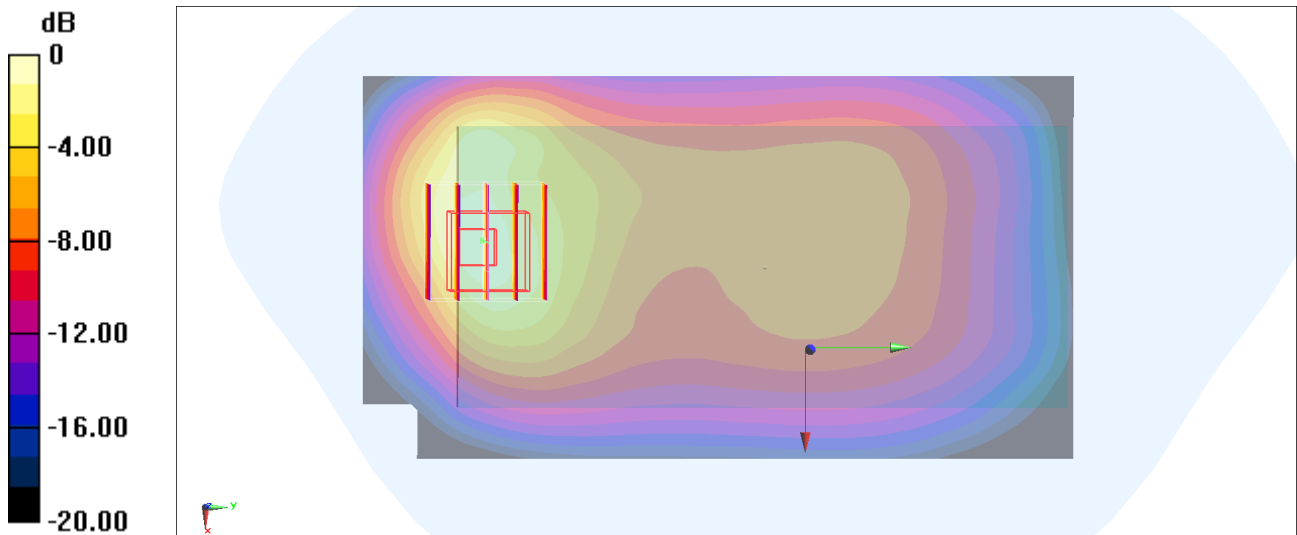

0 dB = 1.20 W/kg = 0.79 dBW/kg

67_FR1 n66_40M_QPSK_1_1_Back_5mm_Ch349000;PA

Communication System: UID 10934 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600-7200_260530 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 42.778$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.723 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.562 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 1.56 W/kg

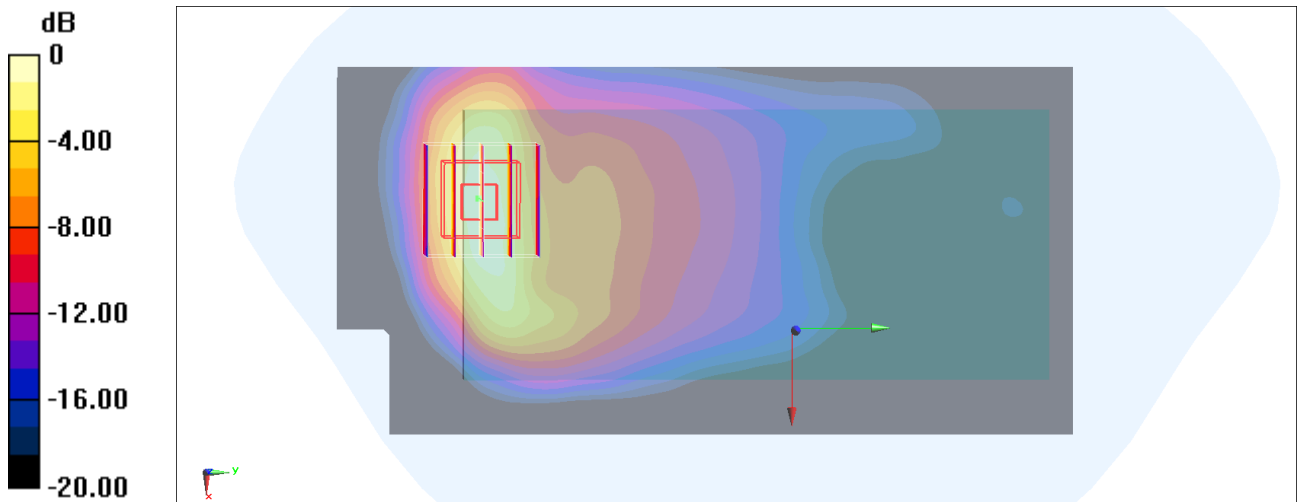

0 dB = 1.56 W/kg = 1.93 dBW/kg

68_FR1 n41_100M_QPSK_1_1_Back_5mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260529 Medium parameters used : $f = 2592.99$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.971$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2592.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.074 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.276 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.990 W/kg

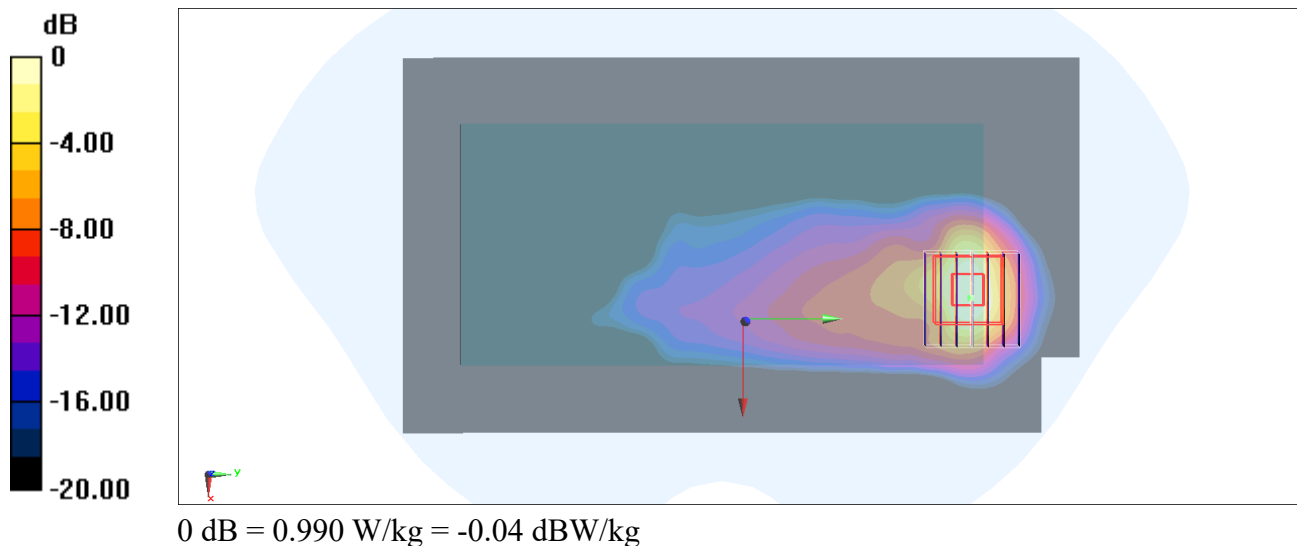

69_FR1 n77_100M_QPSK_1_1_Back_5mm_Ch656000

Communication System: UID 10866 - AAF, 5G NR; Frequency: 3840 MHz

Medium: HSL_600-7200_260601 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.047$ S/m; $\epsilon_r = 37.26$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.38, 6.57, 6.54) @ 3840 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 21.89 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.212 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 1.23 W/kg

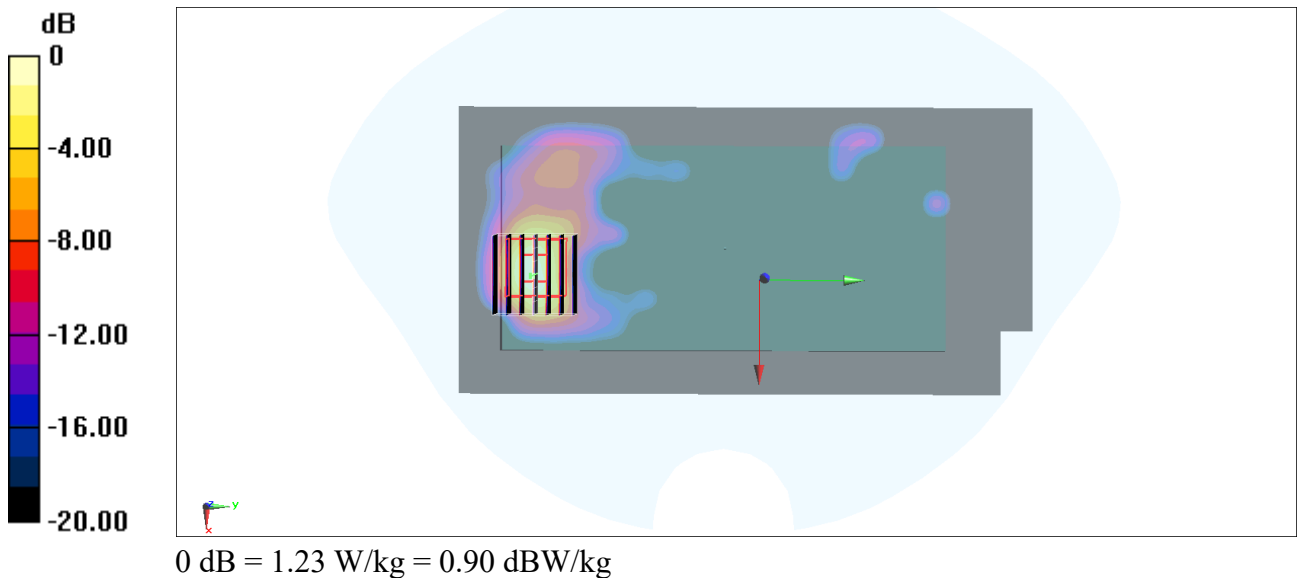

70_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz

Medium: HSL_600-7200_260611 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 39.939$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.55, 6.81, 6.95) @ 2437 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.43 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.297 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.389 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 1.42 W/kg

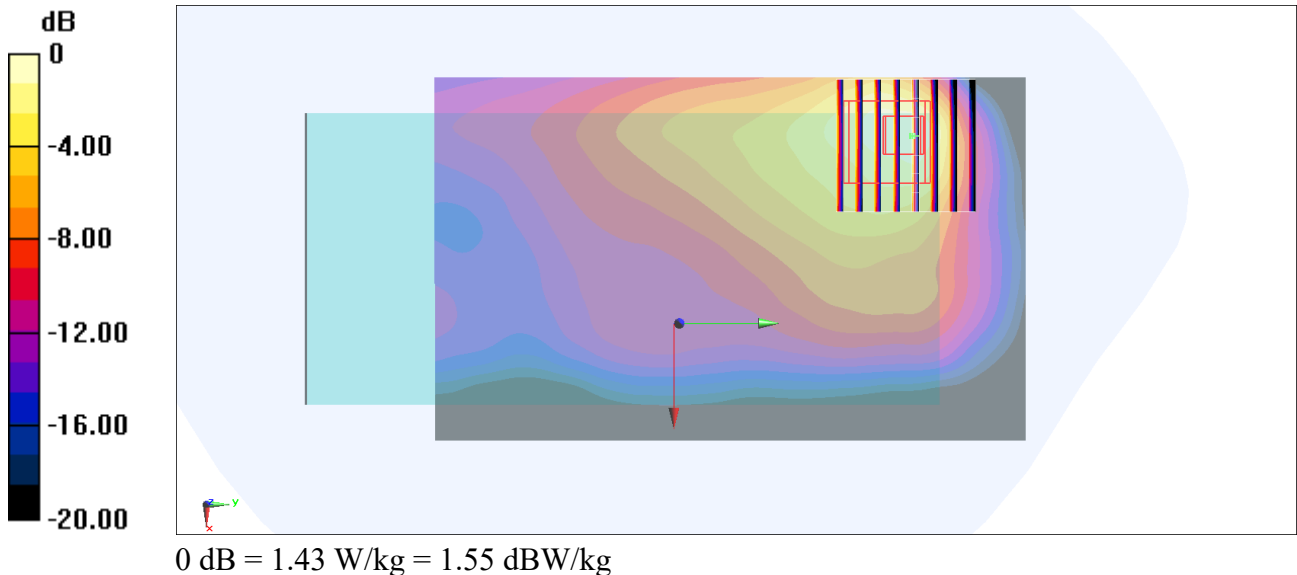

71_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch58

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5290 MHz

Medium: HSL_600-7200_260612 Medium parameters used : $f = 5290$ MHz; $\sigma = 4.648$ S/m; $\epsilon_r = 34.811$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5290 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.50 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.216 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 1.99 W/kg

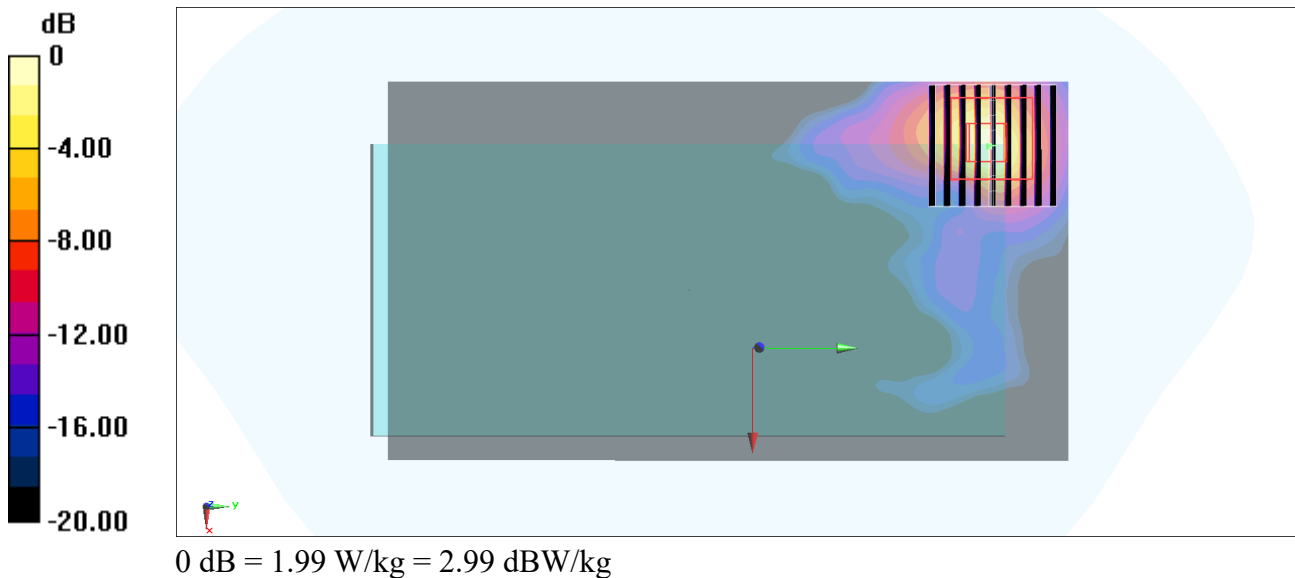

72_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch138

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi Frequency: 5690 MHz

Medium: HSL_600-7200_260612 Medium parameters used : $f = 5690$ MHz; $\sigma = 5.076$ S/m; $\epsilon_r = 34.132$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.51, 4.68, 4.78) @ 5690 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.03 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.777 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.272 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 2.10 W/kg

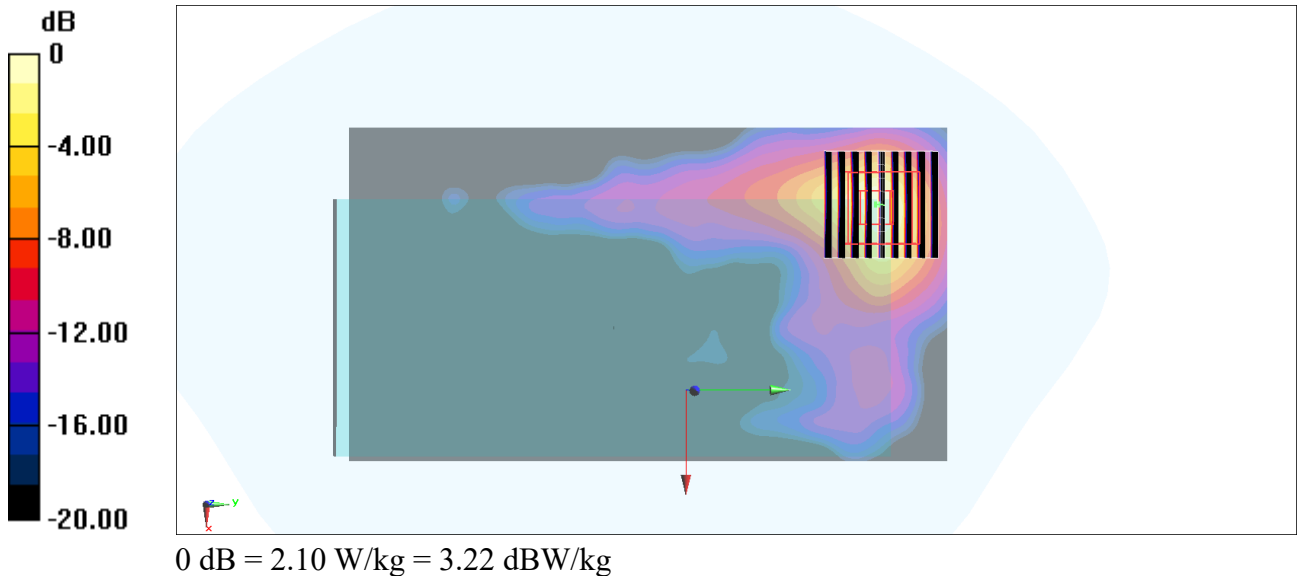

73_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: UID 10544 - AAD, IEEE 802.11ac WiFi ; Frequency: 5775 MHz

Medium: HSL_600-7200_260612 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.206$ S/m; $\epsilon_r = 33.944$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5775 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Configuration/Ch/Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.10 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7700 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.23 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.248 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 2.17 W/kg

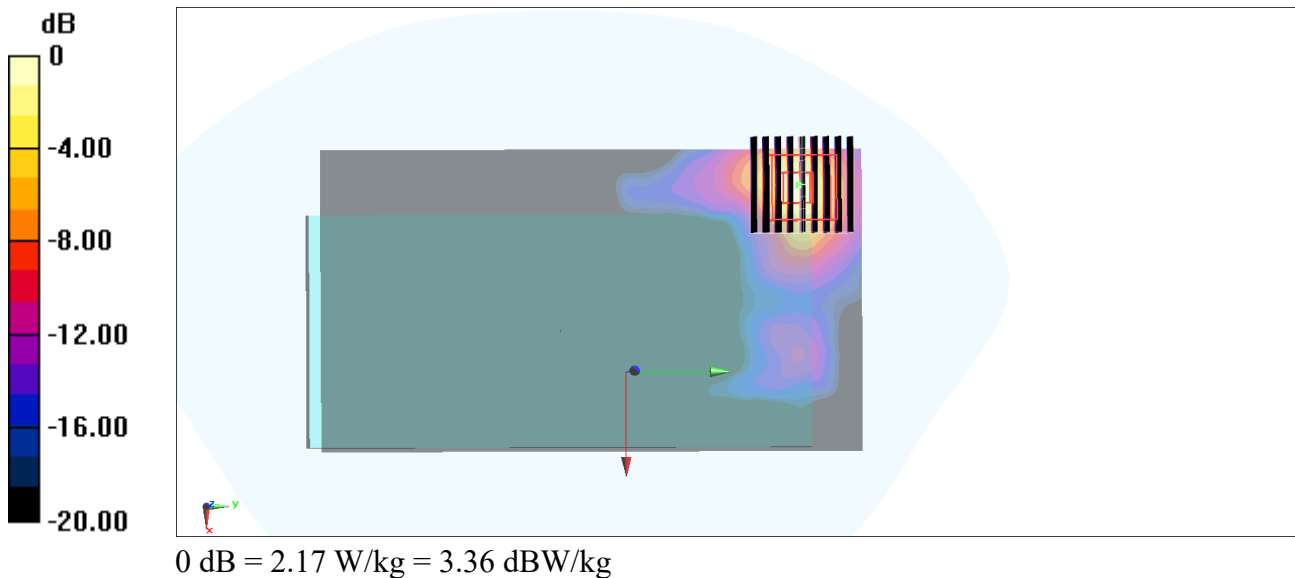

74_Bluetooth_1Mbps_Back_5mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth ; Frequency: 2402 MHz

Medium: HSL_600-7200_260616 Medium parameters used : $f = 2402$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 40.883$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97) @ 2402 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.190 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.818 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.055 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.169 W/kg

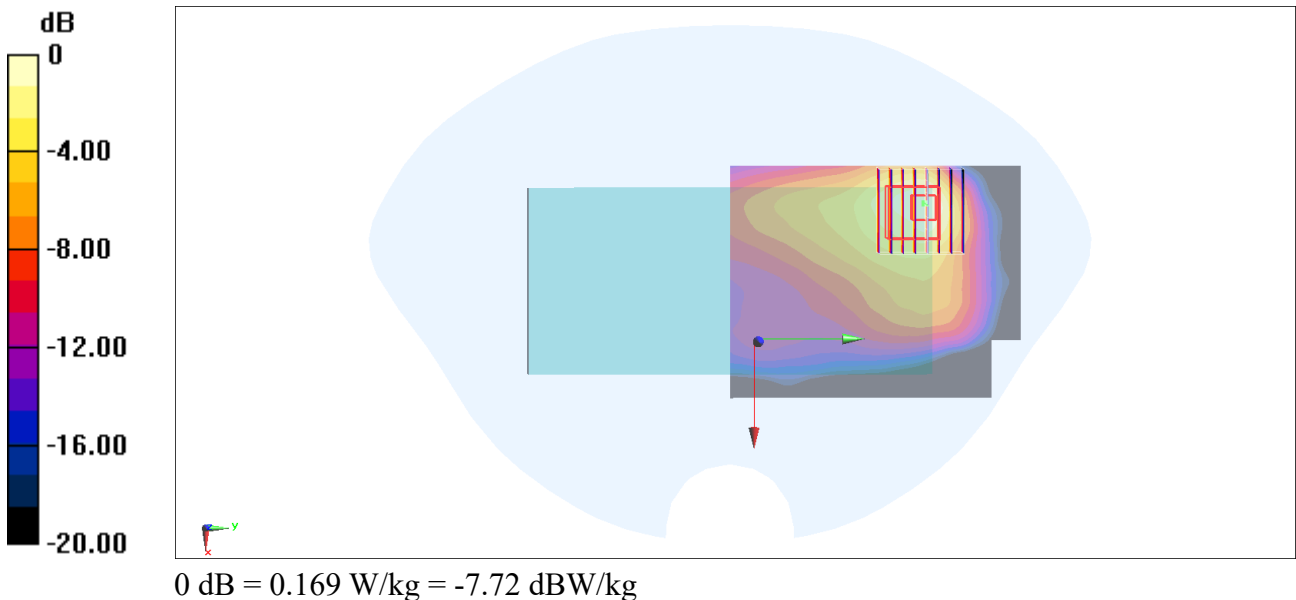

75_GSM850_GPRS 4 Tx slots_Back_0mm_Ch189

Communication System: UID 10028 - DAC, GPRS-FDD; Frequency: 836.4 MHz

Medium: HSL_600-7200_260604 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.626$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 836.4 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 5.06 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.31 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 10.0 W/kg

SAR(1 g) = 3.15 W/kg; SAR(10 g) = 1.51 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 7.43 W/kg

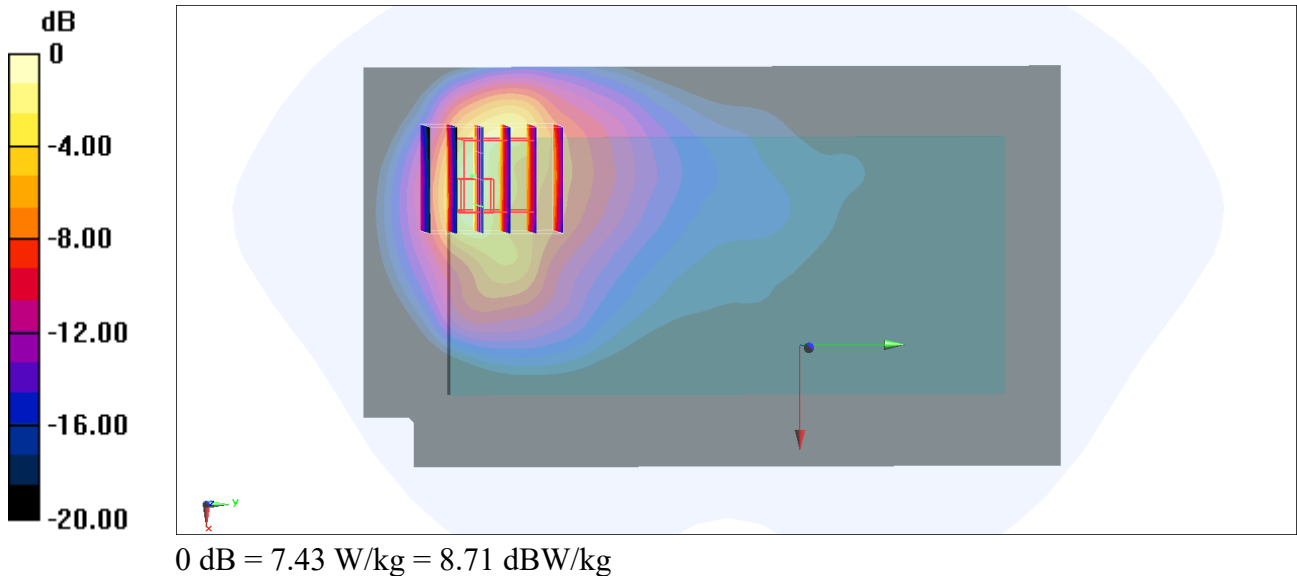

76_GSM1900_GPRS 4 Tx slots_Bottom Edge_0mm_Ch661

Communication System: UID 10028 - DAC, GPRS-FDD; Frequency: 1880 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.751$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1880 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 7.27 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 78.30 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 9.98 W/kg

SAR(1 g) = 4.61 W/kg; SAR(10 g) = 1.92 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 7.62 W/kg

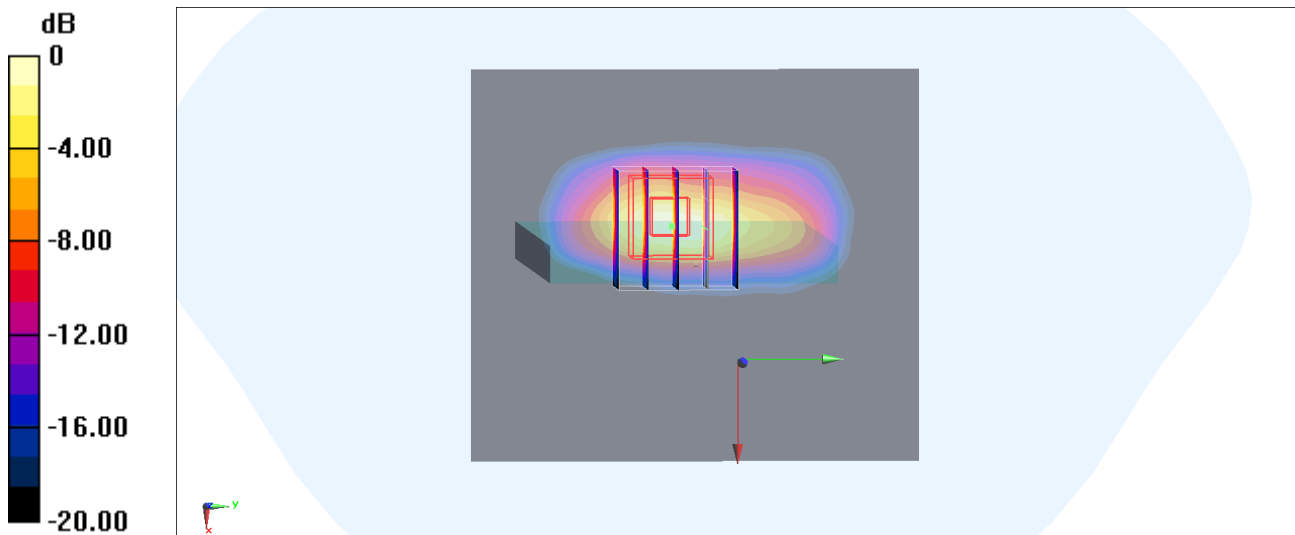

0 dB = 7.62 W/kg = 8.82 dBW/kg

77_WCDMA II_RMC 12.2Kbps_Bottom Edge_0mm_Ch9262

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1852.4 MHz

Medium: HSL_600-7200_260605 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 40.77$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1852.4 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.24 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.27 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 10.1 W/kg

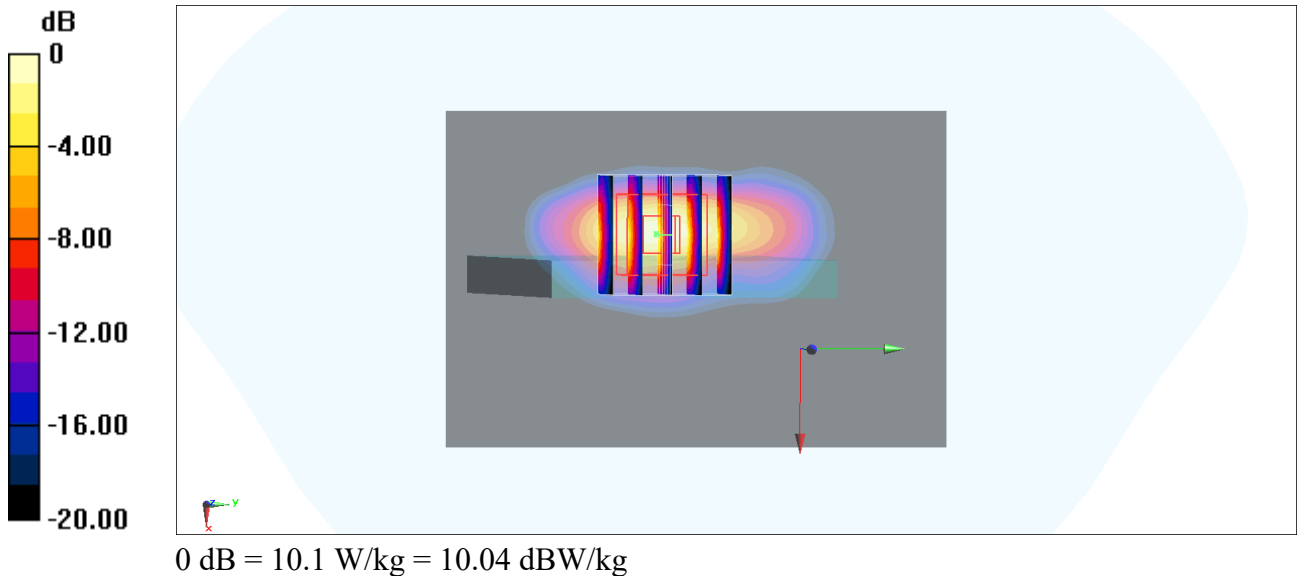

78_WCDMA IV_RMC 12.2Kbps_Bottom Edge_0mm_Ch1513

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 1752.6 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 42.26$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19) @ 1752.6 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 7.89 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 88.09 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 4.8 W/kg; SAR(10 g) = 2.02 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 9.22 W/kg

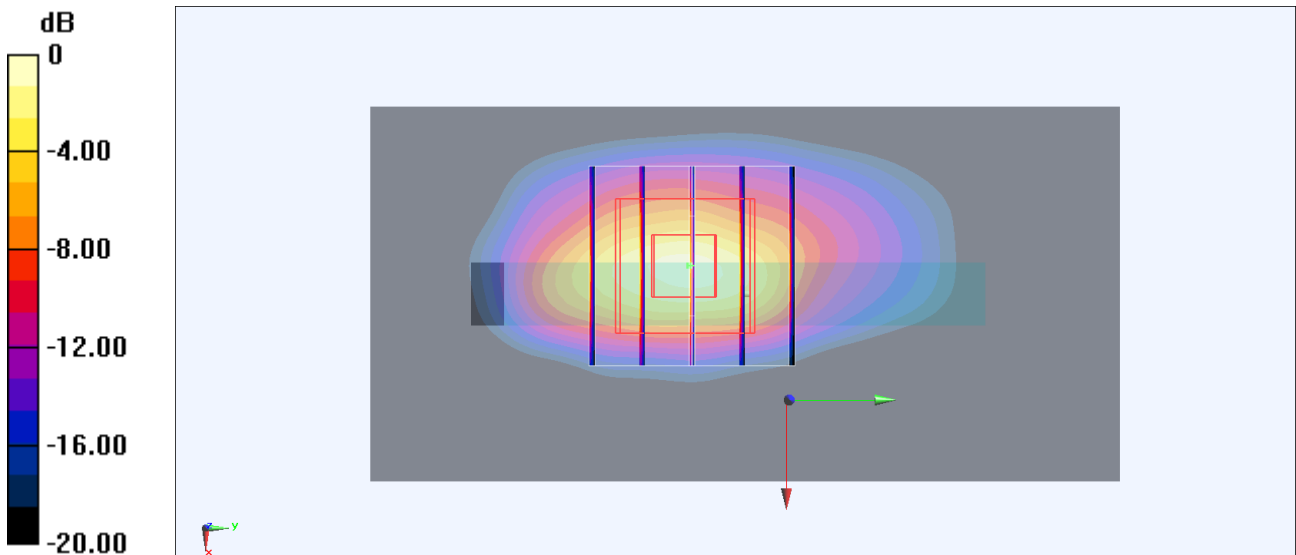

0 dB = 9.22 W/kg = 9.65 dBW/kg

79_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4182

Communication System: UID 10011 - CAC, UMTS-FDD; Frequency: 836.4 MHz

Medium: HSL_600-7200_260604 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 44.532$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75) @ 836.4 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.60 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 71.53 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 6.29 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.15 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 33.4%

Maximum value of SAR (measured) = 4.28 W/kg

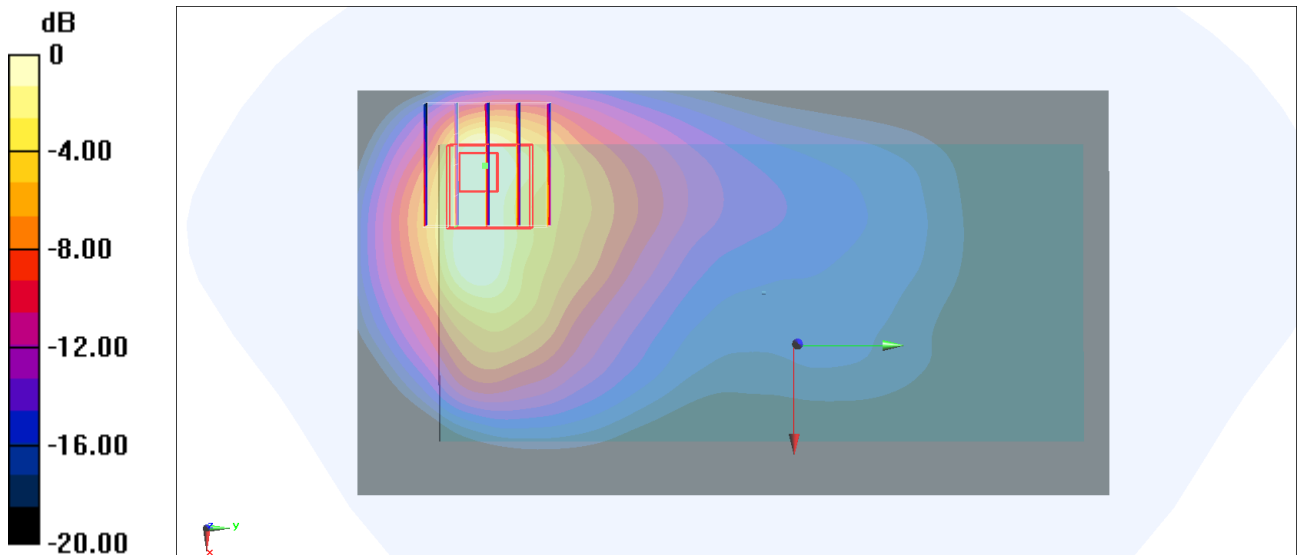

0 dB = 4.28 W/kg = 6.31 dBW/kg

80_LTE Band 7_20M_QPSK_1_49_Bottom Edge_0mm_Ch21350

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 2560 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 39.686$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2560 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.55 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 6.34 W/kg; SAR(10 g) = 2.36 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 35.5%

Maximum value of SAR (measured) = 12.0 W/kg

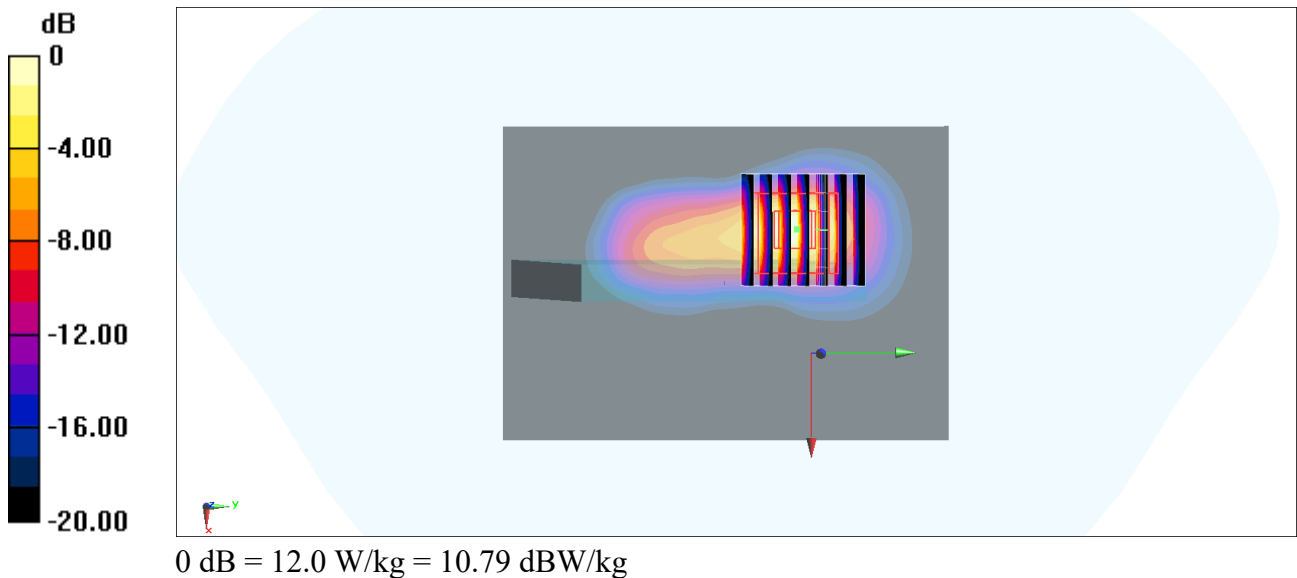

81_LTE Band 13_10M_QPSK_1_25_Bottom Edge_0mm_Ch23230

Communication System: UID 10175 - CAH, LTE-FDD; Frequency: 782 MHz

Medium: HSL_600-7200_260604 Medium parameters used: $f = 782$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.23, 9.5, 9.45) @ 782 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 7.18 W/kg

Configuration/Ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.57 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 3.97 W/kg; SAR(10 g) = 1.58 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 10.6 W/kg

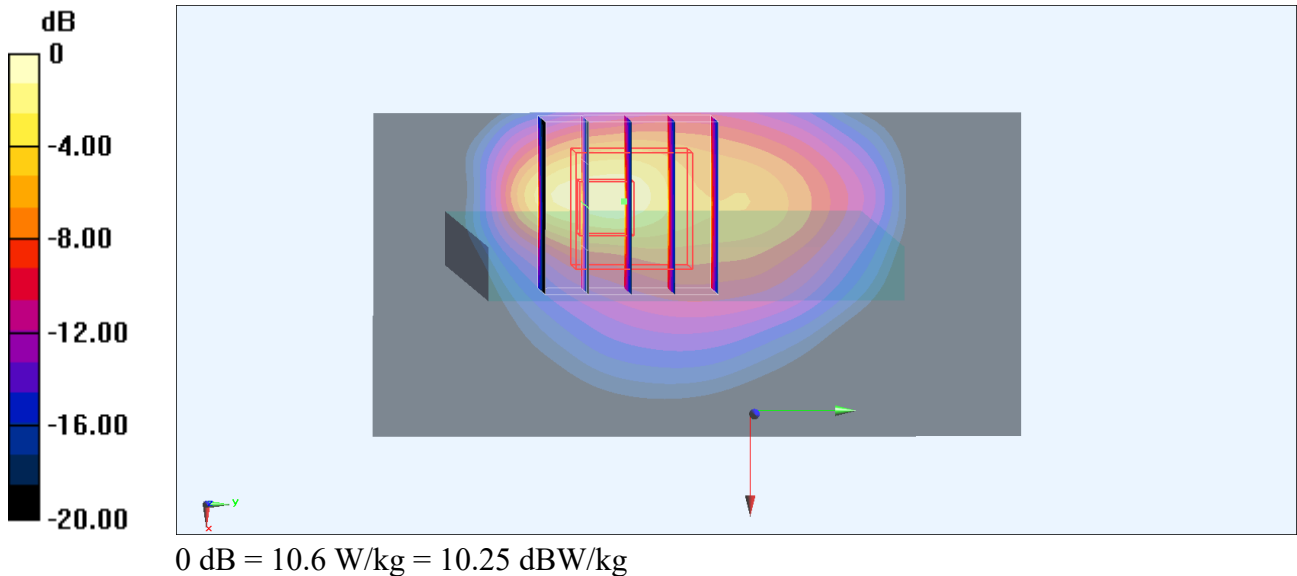

82_LTE Band 25_20M_QPSK_1_49_Bottom Edge_0mm_Ch26140

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1860 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 40.781$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1860 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 7.51 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.65 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 4.87 W/kg; SAR(10 g) = 2.04 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.2%

Maximum value of SAR (measured) = 9.34 W/kg

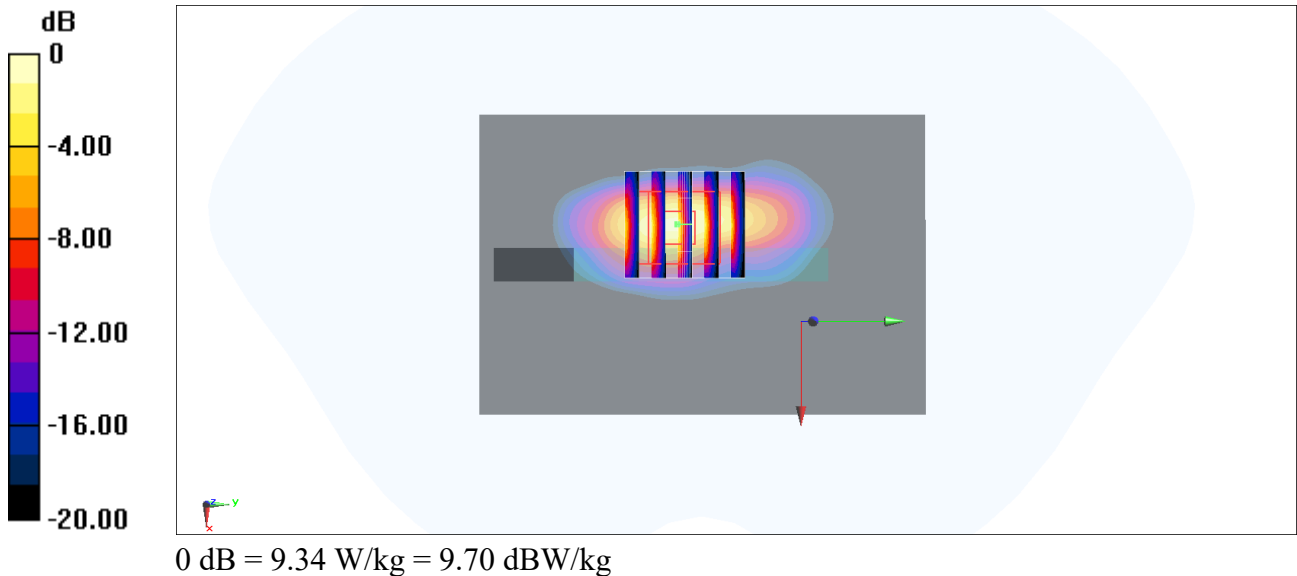

83_LTE Band 66_20M_QPSK_1_49_Bottom Edge_0mm_Ch132572

Communication System: UID 10169 - CAF, LTE-FDD; Frequency: 1770 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.873$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1770 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 10.8 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.12 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 6.01 W/kg; SAR(10 g) = 2.46 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 10.3 W/kg

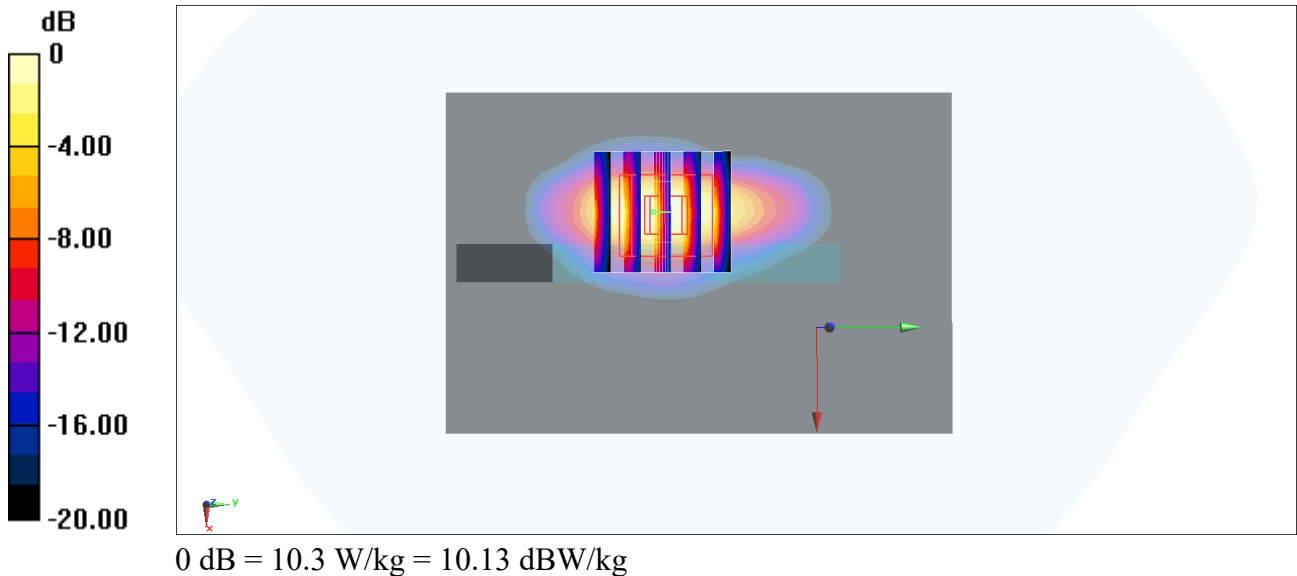

84_LTE Band 38_20M_QPSK_1_49_Back_0mm_Ch38000

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2595 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.617$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2595 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 9.75 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 75.61 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 13.3 W/kg

SAR(1 g) = 4.94 W/kg; SAR(10 g) = 1.97 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 37.6%

Maximum value of SAR (measured) = 10.0 W/kg

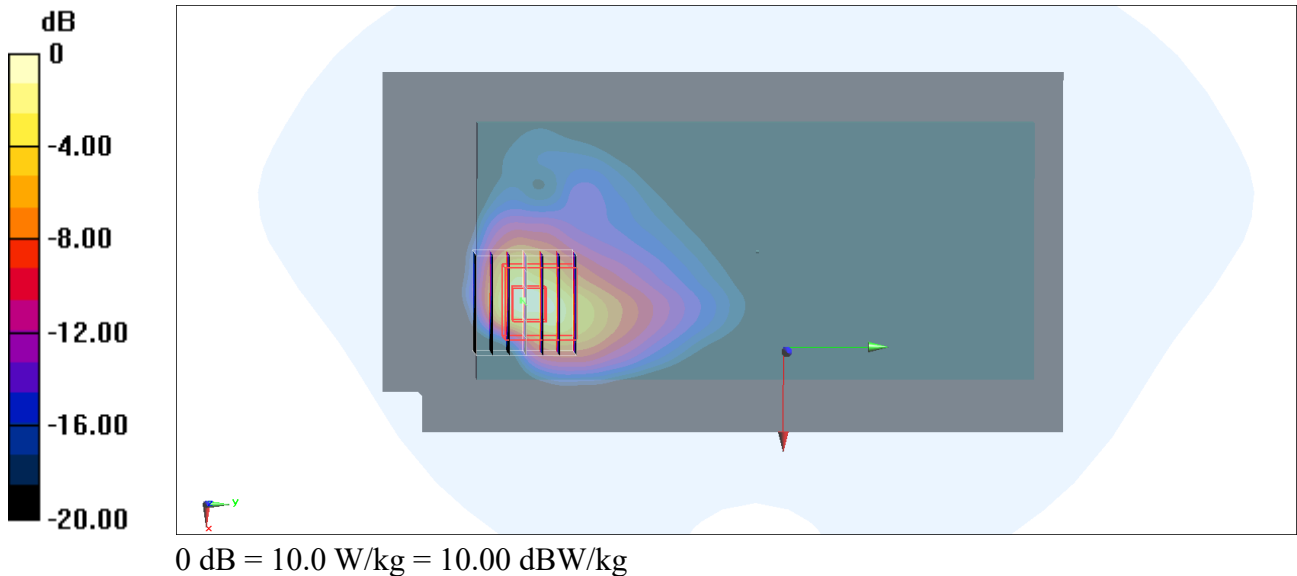

85_LTE Band 41_20M_QPSK_1_49_Back_0mm_Ch39750

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2506 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 40.898$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27) @ 2506 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.9 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.19 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 5.12 W/kg; SAR(10 g) = 2.01 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 31.1%

Maximum value of SAR (measured) = 10.4 W/kg

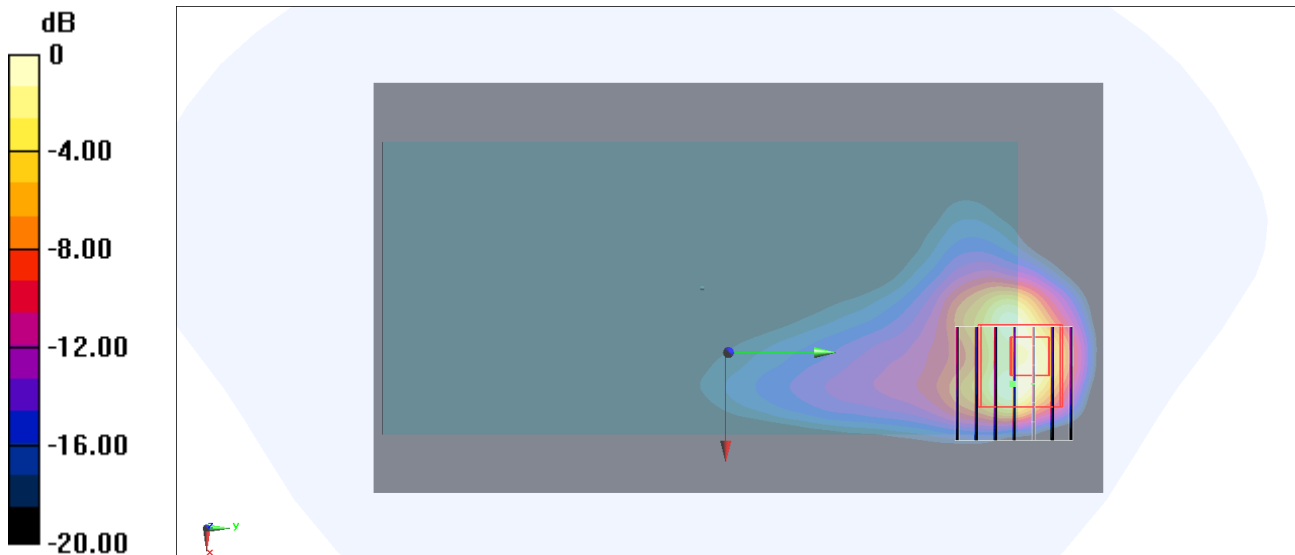

0 dB = 10.4 W/kg = 10.17 dBW/kg

86_LTE Band 42_20M_QPSK_1_49_Top Edge_0mm_Ch42990

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 3540 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.813$ S/m; $\epsilon_r = 37.936$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.42, 6.61, 6.58) @ 3540 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.1 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 11.49 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 6.15 W/kg; SAR(10 g) = 1.78 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 14.4 W/kg

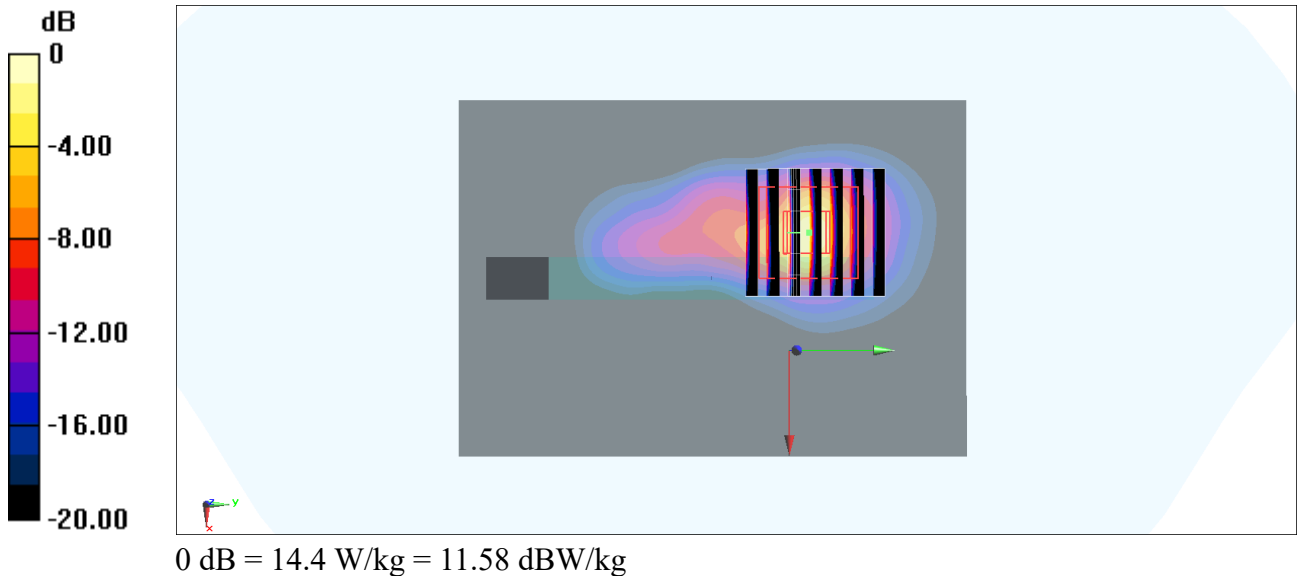

87_FR1 n2_40M_QPSK_108_54_Bottom Edge_0mm_Ch376000

Communication System: UID 10942 - AAC, 5G NR ; Frequency: 1880 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.751$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.43, 7.65, 7.62) @ 1880 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 8.14 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.33 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 5.68 W/kg; SAR(10 g) = 2.35 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 11.0 W/kg

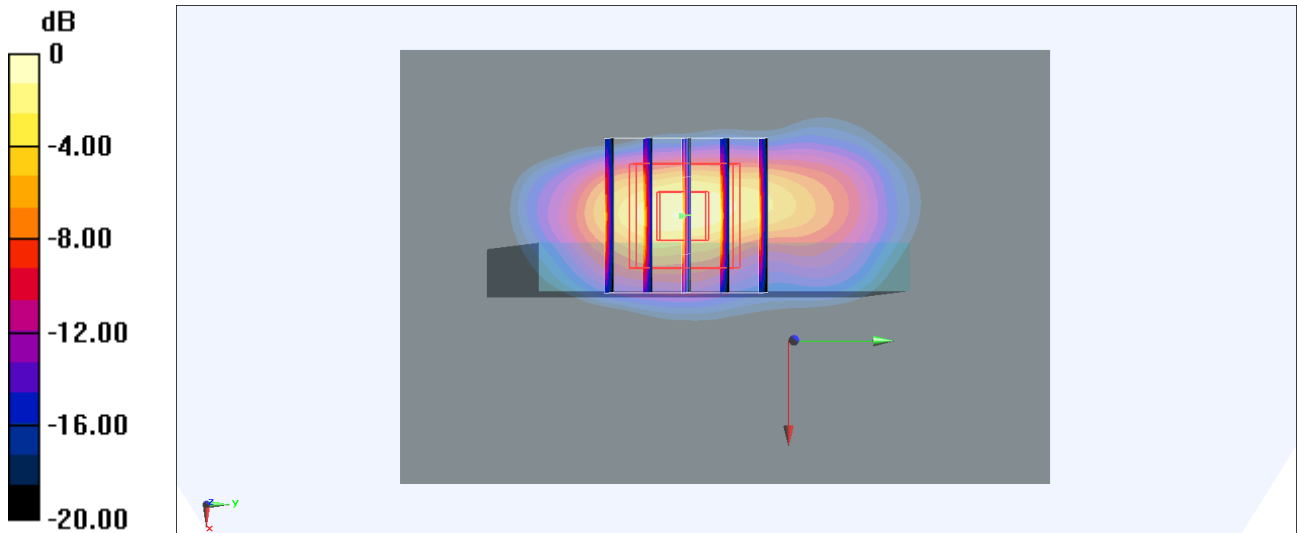

0 dB = 11.0 W/kg = 10.41 dBW/kg

88_FR1 n7_50M_QPSK_135_68_Back_0mm_Ch507000

Communication System: UID 10943 - AAD, 5G NR; Frequency: 2535 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 39.758$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2535 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 11.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.833 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 5.79 W/kg; SAR(10 g) = 2.33 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.2%

Maximum value of SAR (measured) = 11.0 W/kg

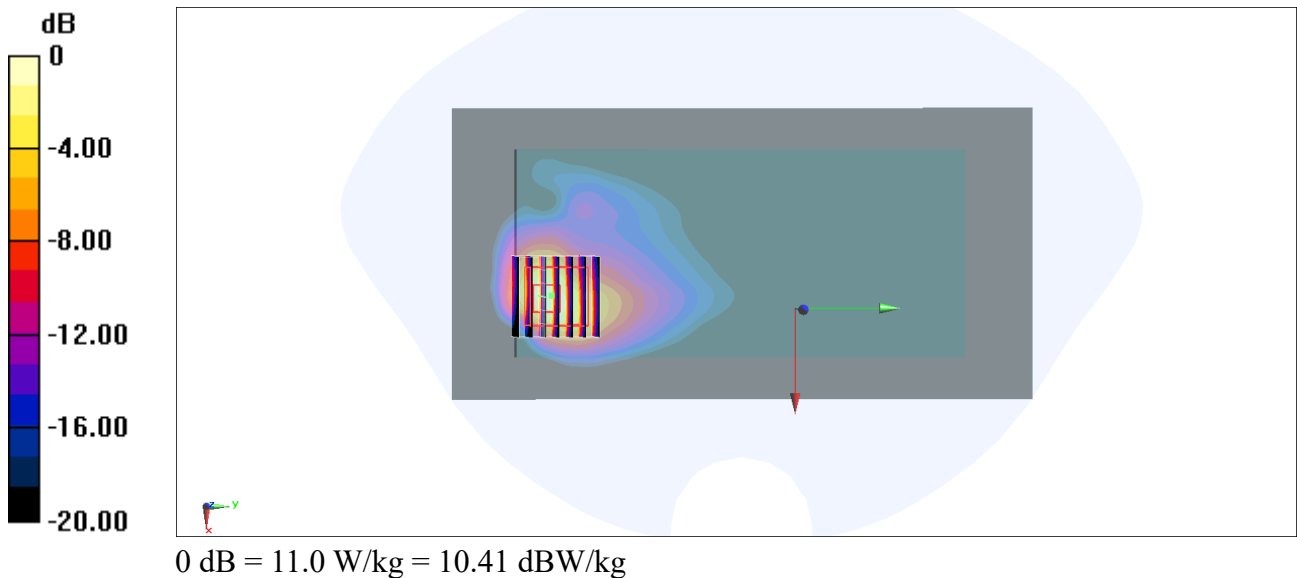

89_FR1 n26_20M_QPSK_50_28_Back_0mm_Ch166300

Communication System: UID 10939 - AAC, 5G NR ; Frequency: 831.5 MHz

Medium: HSL_600-7200_260604 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.621$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(9.13, 9.4, 9.35) @ 831.5 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.450 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 1.20 W/kg

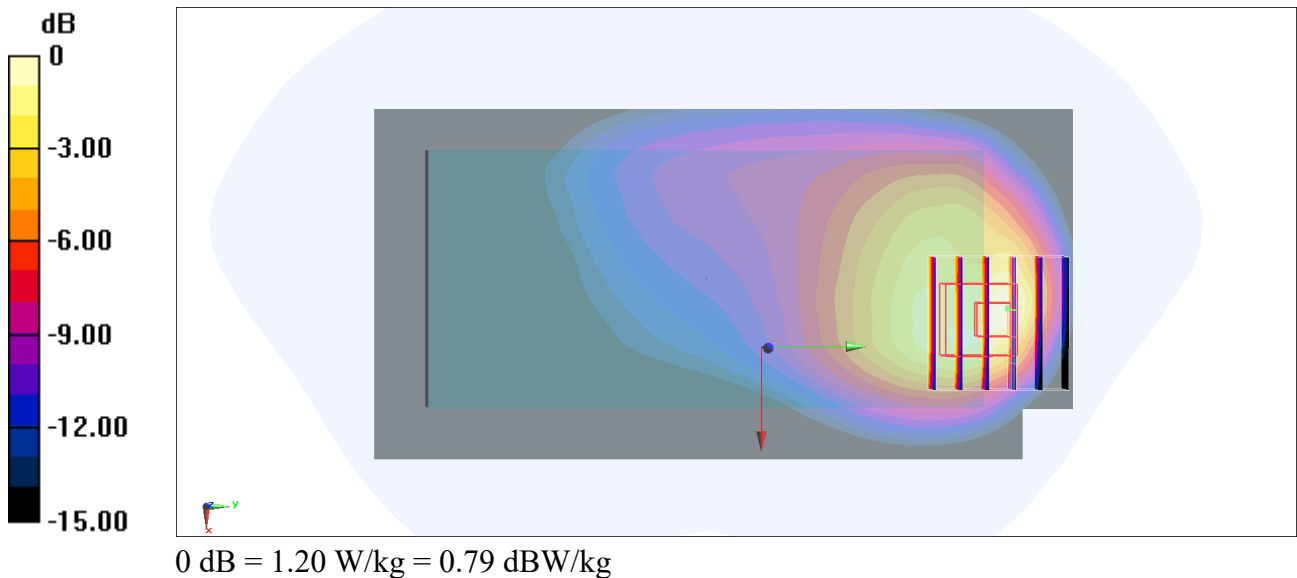

90_FR1 n66_40M_QPSK_108_54_Bottom Edge_0mm_Ch349000

Communication System: UID 10942 - AAC, 5G NR; Frequency: 1745 MHz

Medium: HSL_600-7200_260605 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.953$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.66, 7.89, 7.85) @ 1745 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 9.74 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.82 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.56 W/kg; SAR(10 g) = 2.38 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 10.4 W/kg

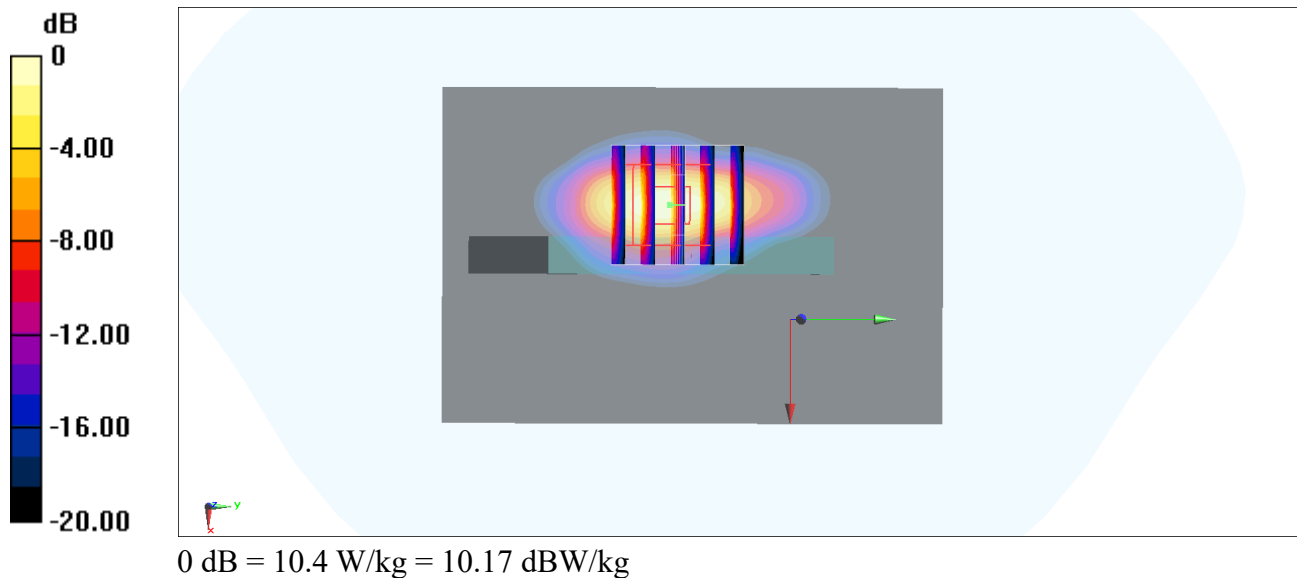

91_FR1 n41_100M_QPSK_1_1_Back_0mm_Ch518598

Communication System: UID 10866 - AAF, 5G NR ; Frequency: 2592.99 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 39.619$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(7.02, 7.23, 7.2) @ 2592.99 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.78 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 6.79 W/kg

SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.52 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 5.41 W/kg

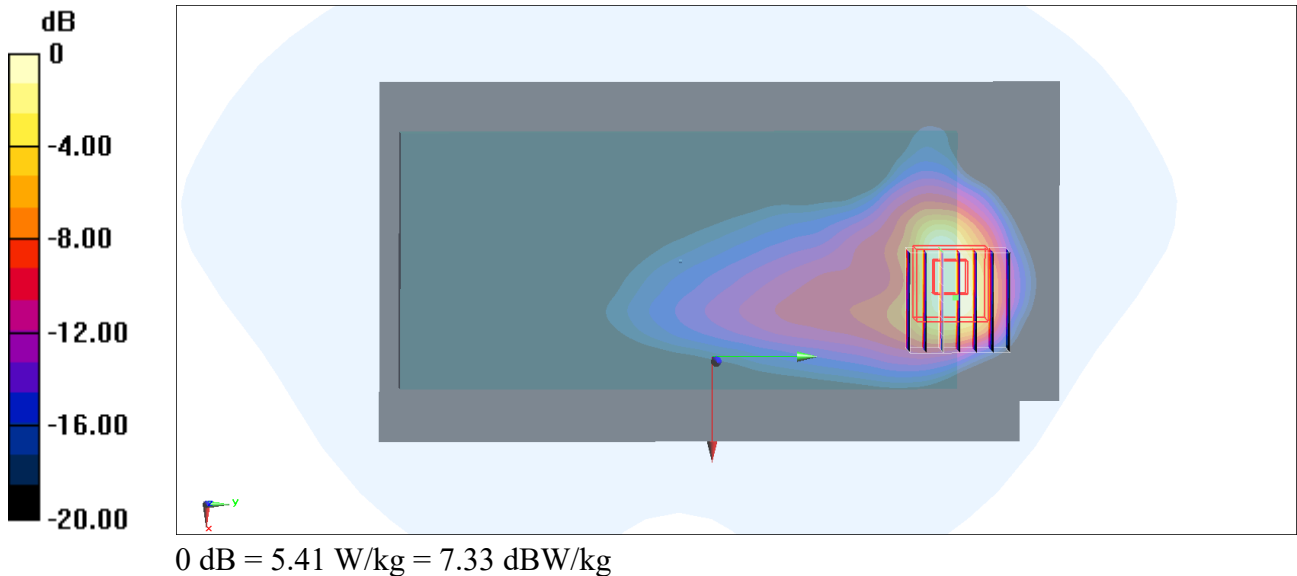

92_FR1 n77_100M_QPSK_135_69_Top Edge_0mm_Ch656000

Communication System: UID 10917 - AAD, 5G NR; Frequency: 3840 MHz

Medium: HSL_600-7200_260606 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.1$ S/m; $\epsilon_r = 37.455$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7970; ConvF(6.38, 6.57, 6.54) @ 3840 MHz; Calibrated: 2026/1/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2025/11/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 13.3 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 71.92 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 5.79 W/kg; SAR(10 g) = 1.6 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.9%

Maximum value of SAR (measured) = 14.1 W/kg

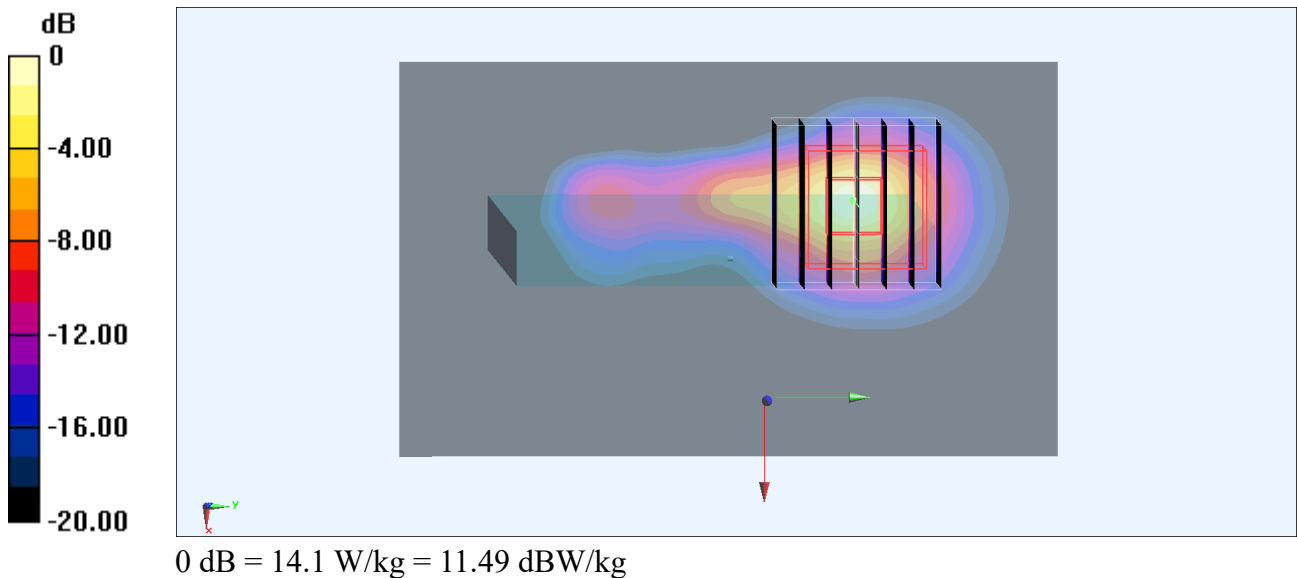

93_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch36

Communication System: UID 10417 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5180 MHz

Medium: HSL_600-7200_260612 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 35.034$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5180 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 10.4 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 3.49 W/kg; SAR(10 g) = 0.882 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 9.40 W/kg

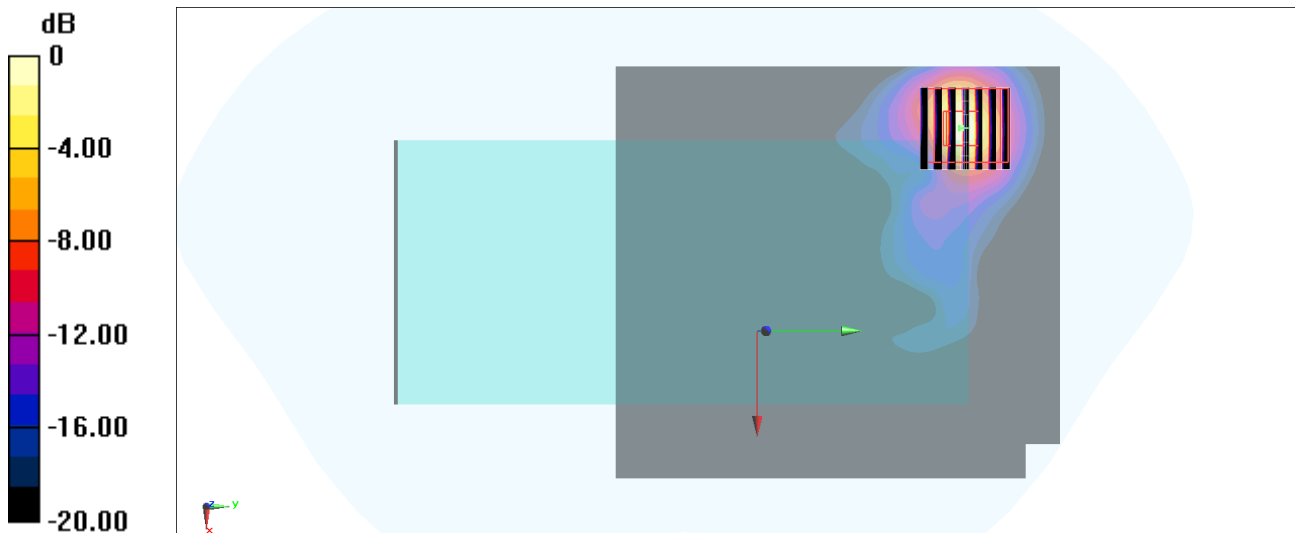

0 dB = 9.40 W/kg = 9.73 dBW/kg

94_WLAN5GHz_802.11a 6Mbps_Top Edge_0mm_Ch52

Communication System: UID 10417 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260 MHz

Medium: HSL_600-7200_260612 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.595$ S/m; $\epsilon_r = 34.915$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5260 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 11.0 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.31 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 3.97 W/kg; SAR(10 g) = 0.805 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 13.3 W/kg

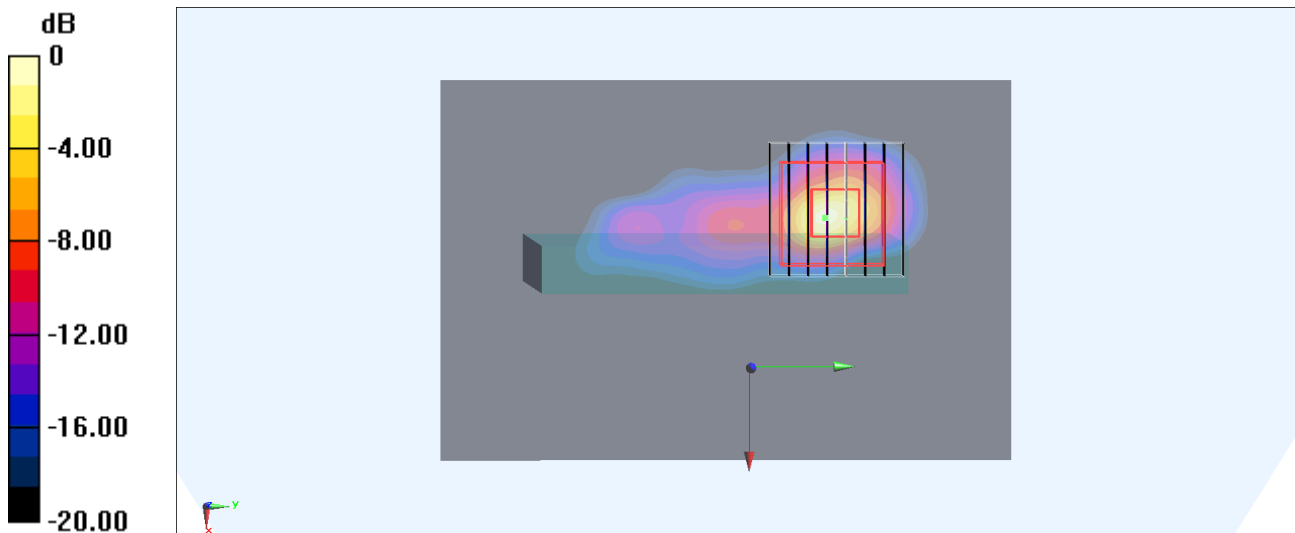

0 dB = 13.3 W/kg = 11.24 dBW/kg

95_WLAN5GHz_802.11a 6Mbps_Top Edge_0mm_Ch100

Communication System: UID 10417 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5500 MHz

Medium: HSL_600-7200_260612 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.858$ S/m; $\epsilon_r = 34.41$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.51, 4.68, 4.78) @ 5500 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 14.6 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.548 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 54.6 W/kg

SAR(1 g) = 7.1 W/kg; SAR(10 g) = 1.56 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 23.5 W/kg

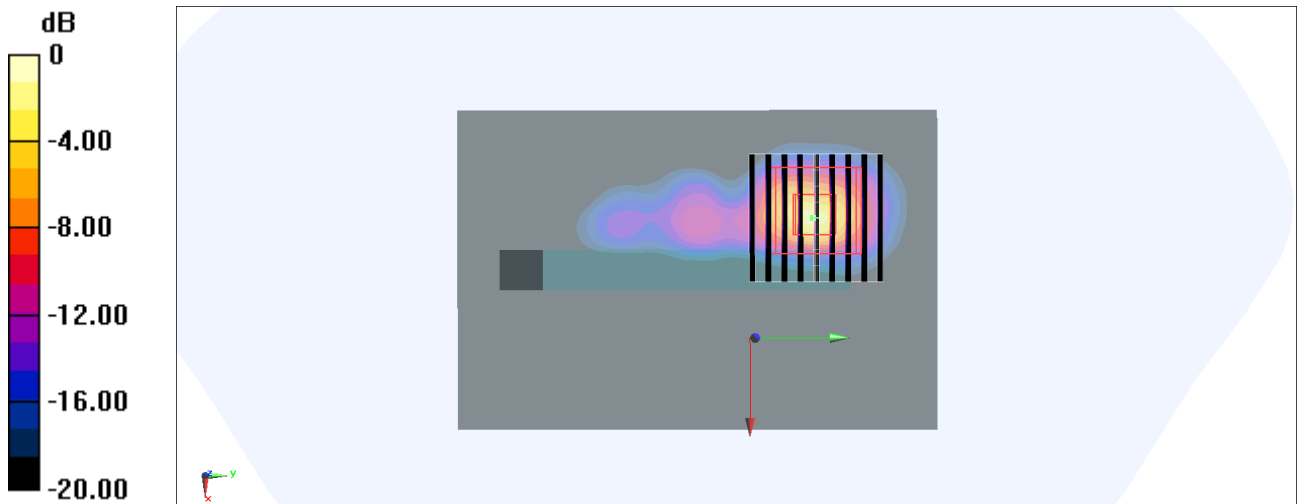

0 dB = 23.5 W/kg = 13.71 dBW/kg

96_WLAN5GHz_802.11a 6Mbps_Top Edge_0mm_Ch149

Communication System: UID 10417 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5745 MHz; Duty Cycle:1:1

Medium: HSL_600-7200_260612 Medium parameters used : $f = 5745$ MHz; $\sigma = 5.155$ S/m; $\epsilon_r = 33.929$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.42, 4.59, 4.69) @ 5745 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1647; Calibrated: 2025/10/20
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.62 W/kg

Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.983 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 85.6 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 2.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 35.2 W/kg

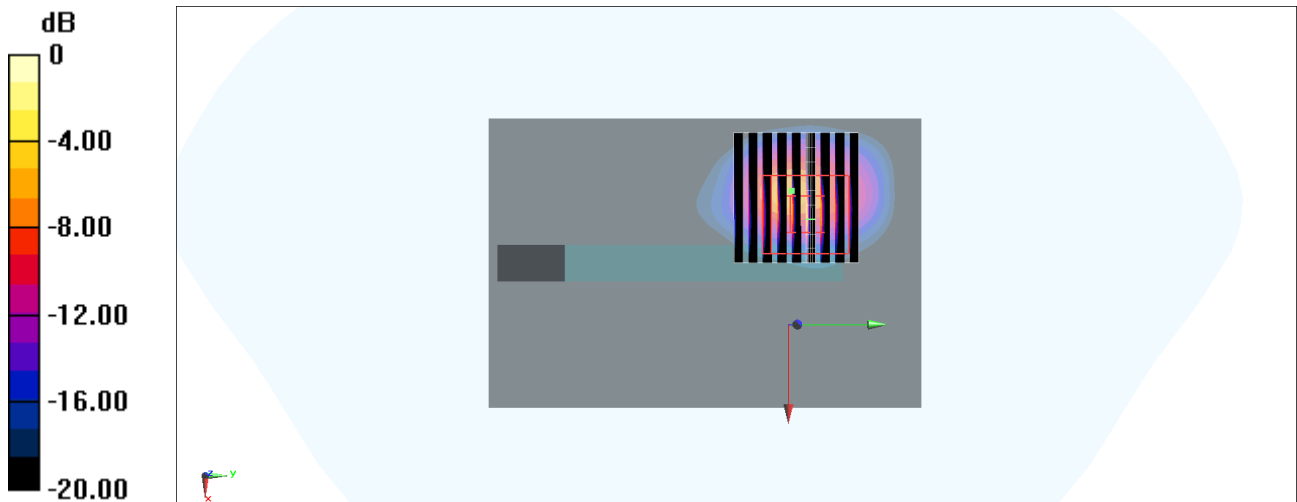

0 dB = 35.2 W/kg = 15.47 dBW/kg

97_NFC_ASK_Back_0mm_13.56MHz

Communication System: RFID; Frequency: 13.56 MHz; Duty Cycle:1:1

Medium: HSL_13_260617 Medium parameters used: $f = 14 \text{ MHz}$; $\sigma = 0.748 \text{ S/m}$; $\epsilon_r = 53.592$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4°C ; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51) @ 13.56 MHz; Calibrated: 2025/10/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP-1029
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.196 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.57 V/m ; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.051 W/kg ; SAR(10 g) = 0.014 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 39.5%

Maximum value of SAR (measured) = 0.111 W/kg

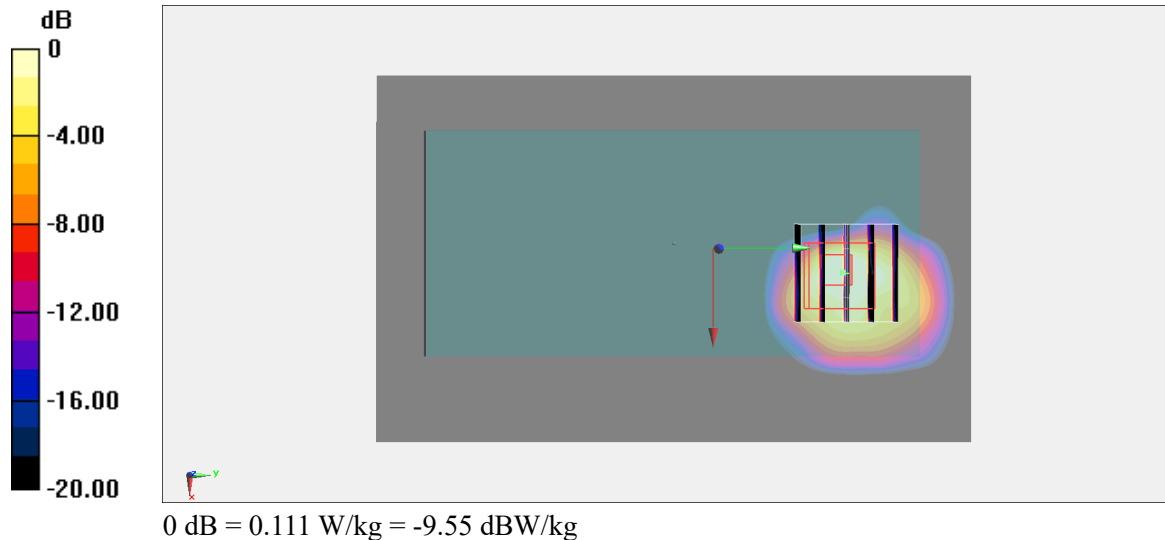

#319_LTE Band 41_20M_QPSK_1_49_Back_0mm_Ch39750

Communication System: UID 10435 - AAG, LTE-TDD; Frequency: 2506 MHz; Duty Cycle:1:1

Medium: HSL_600-7200_260623 Medium parameters used : $f = 2506$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 42.433$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7902; ConvF(7.01, 6.7, 6.65) @ 2506 MHz; Calibrated: 2025/12/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Volume Scan (29x53x7): Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 71.53 V/m; Power Drift = -0.11

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 5.12 W/kg; SAR(10 g) = 2.01 W/kg (SAR corrected for target medium)

Total Absorbed Power = 0.0492 W

Maximum value of SAR (measured) = 8.71 W/kg

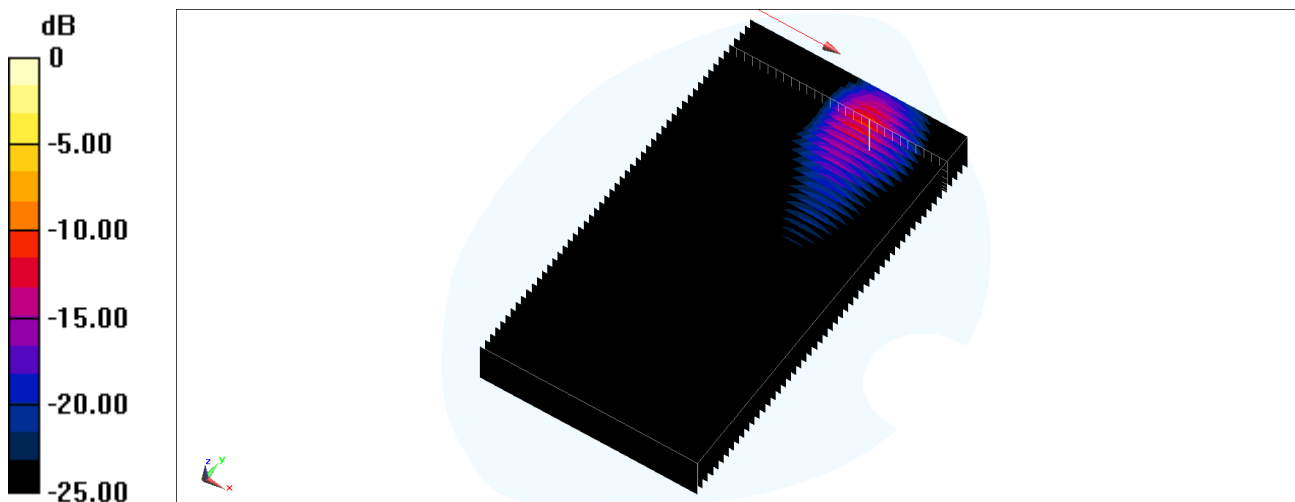

#911_FR1 n7_50M_QPSK_135_68_Back_0mm_Ch507000

Communication System: UID 10943 - AAD, 5G NR; Frequency: 2535 MHz; Duty Cycle:1:1

Medium: HSL_600-7200_260623 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7902; ConvF(7.01, 6.7, 6.65) @ 2535 MHz; Calibrated: 2025/12/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Volume Scan (29x53x7): Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 79.03 V/m; Power Drift = 0.13

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 5.79 W/kg; SAR(10 g) = 2.33 W/kg (SAR corrected for target medium)

Total Absorbed Power = 0.0610 W

Maximum value of SAR (measured) = 11.3 W/kg

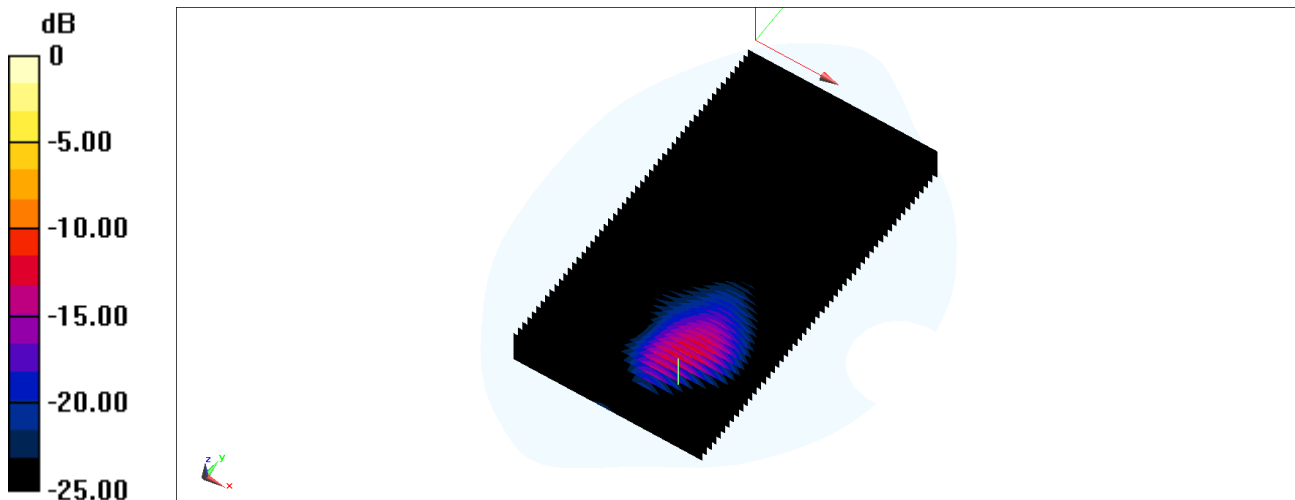

#912_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch36

Communication System: UID 10317 - AAE, IEEE 802.11a WiFi 5 GHz; Frequency: 5180 MHz; Duty Cycle:1:1

Medium: HSL_600-7200_260623 Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.471 \text{ S/m}$; $\epsilon_r = 38.14$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5180 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Volume Scan (29x53x7): Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$


Reference Value = 7.816 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 2.91 W/kg ; SAR(10 g) = 0.743 W/kg (SAR corrected for target medium)

Total Absorbed Power = 0.0124 W

Maximum value of SAR (measured) = 9.41 W/kg

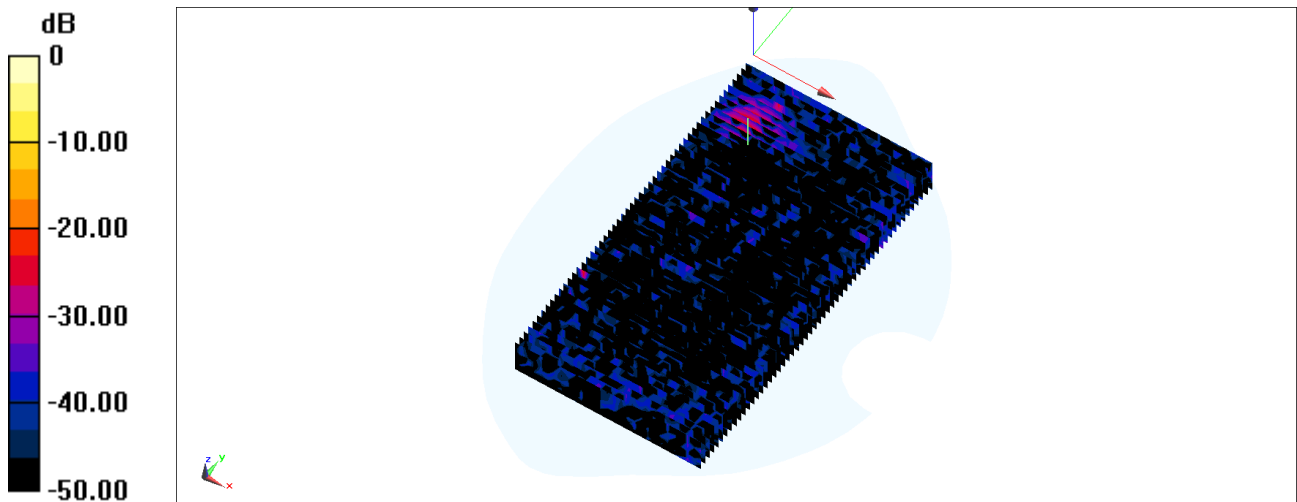

0 dB = 9.41 W/kg = 9.74 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/6/23

#319_LTE Band 41_20M_QPSK_1_49_Back_0mm_Ch39750_Volume

Communication System: UID 10435 - AAG, LTE-TDD ; Frequency: 2506 MHz

Medium: HSL_600-7200_260623 Medium parameters used : $f = 2506$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 42.433$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN7902; ConvF(7.01, 6.7, 6.65) @ 2506 MHz; Calibrated: 2025/12/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4)

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/6/23

#912_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch36_Volume

Communication System: UID 10317 - AAE, IEEE 802.11a WiFi 5 GHz ; Frequency: 5180 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.471$ S/m; $\epsilon_r = 38.14$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN7793; ConvF(4.94, 5.14, 5.24) @ 5180 MHz; Calibrated: 2026/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4)

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/6/23

#911_FR1 n7_50M_QPSK_135_68_Back_0mm_Ch507000_Volume

Communication System: UID 10943 - AAD, 5G NR ; Frequency: 2535 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 42.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: EX3DV4 - SN7902; ConvF(7.01, 6.7, 6.65) @ 2535 MHz; Calibrated: 2025/12/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1697; Calibrated: 2025/11/19
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4)

Multi Band Result:**SAR(1 g) = 7.21 W/kg; SAR(10 g) = 2.96 W/kg** (SAR corrected for target medium)

Maximum value of SAR (interpolated) = 19.8 W/kg

