




FCC RADIO TEST REPORT

FCC ID : IHDT56AY3
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2629-2, XT2629-3
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza,
Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza,
Chicago IL 60654 USA
Standard : FCC Part 15 Subpart C §15.225

The product was received on May 28, 2026 and testing was performed from Jun. 02, 2026 to Jun. 18, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	7
2. Test Configuration of Equipment Under Test.....	8
2.1 Descriptions of Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Table for Supporting Units	9
2.4 EUT Operation Test Setup	10
3. Test Results	11
3.1 AC Power Line Conducted Emissions Measurement	11
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	13
3.3 Frequency Stability Measurement	14
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	15
3.5 Radiated Emissions Measurement.....	17
3.6 Antenna Requirements.....	20
4. List of Measuring Equipment	21
5. Measurement Uncertainty.....	22
Appendix A. Test Results of Conducted Emission Test	
Appendix B. Test Results of Near Field Test Items	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
Appendix C. Test Results of Radiated Test Items	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	



History of this test report

Report No.	Version	Description	Issue Date
FR651501-01D	01	Initial issue of report	Jul. 02, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	-
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Pass Reporting only	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	-
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Freda Wu



1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GNSS.
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GNSS: PIFA Antenna NFC: Loop Antenna FM: External Earphone Antenna

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
IMEI	Performed Test Item
359628650002293 359628650002301	RF Near Field
359628650002319 359628650002327	Conducted Emission
359628650002293 359628650002301	Radiated Spurious Emission

Specification of Accessory				
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CL)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
AC Adapter 2(CL)	Brand Name	Motorola(Chenyang)	Model Name	MC-339L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 3(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336N
AC Adapter 3(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337N
AC Adapter 3(CL)	Brand Name	Motorola(Chenyang)	Model Name	MC-339N
AC Adapter 3(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332N
AC Adapter 3(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331N
Battery 1	Brand Name	Motorola (NVT)	Model Name	SF70
Battery 2	Brand Name	Motorola (CosMX)	Model Name	SF70
USB Cable 1	Brand Name	Motorola (yihuaxing)	Model Name	T365-020-01 T365-020-02
USB Cable 2	Brand Name	Motorola (hexin)	Model Name	HX-TL-08 HX-TL-07
USB Cable 3	Brand Name	Motorola (juwei)	Model Name	JWUB1705-T03H JWUB1856-T03H

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz


The NFC test is performed with app “NXP Tools” installed in the mobile phone. It can enable continuous transmission with type A/B/F/V tag respectively.

The EUT pre-scanned in reader mode with NFC tag (four NFC type A, B, F, V) and without reading tag. Based on the highest field strength of fundamental and spurious emissions, the worst case type (type F) was recorded in this report.

The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and three receiving antenna orientations (parallel, perpendicular, and ground-parallel) for Loop Antenna, and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Test Cases	
AC Conducted Emission	Mode 1: GSM850 Idle + NFC TX + Earphone + USB cable(Charging from Adapter) + Battery 1
Remark: For Radiated Test Cases, the tests were performed with Adapter, Earphone and USB Cable.	

2.2 Connection Diagram of Test System

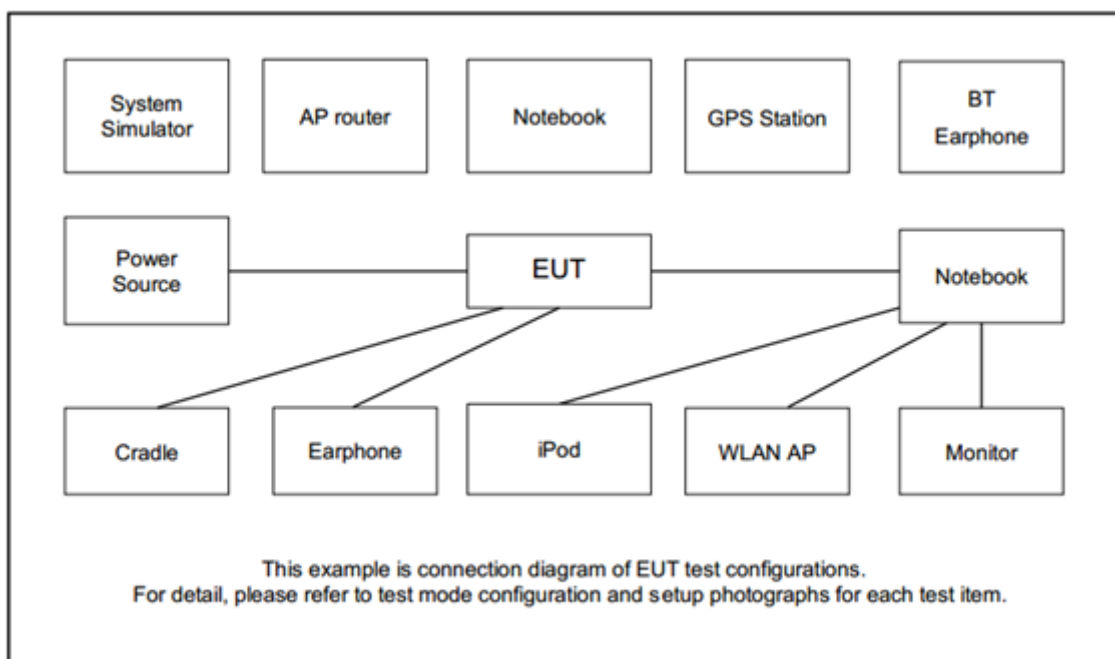

2.3 Table for Supporting Units

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	NFC Card A	N/A	N/A	N/A	NFCA-5	N/A
2.	NFC Card B	N/A	N/A	N/A	NFCB-42	N/A
3.	NFC Card V	N/A	N/A	N/A	NFCV-10	N/A
4.	NFC Card F	N/A	N/A	N/A	NFCF-16	N/A
5.	iPod Earphone	Apple	A1285	DoC UnShielded, 1.2m	N/A	N/A
6.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
7.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
8.	NOTE BOOK	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
9.	Earphone + Mic	Samsung	Ecouteur	N/A	nonshielded 1.8m	N/A
10.	NFC Card	NFC Card F	NFCF-14	N/A	N/A	N/A



2.4 EUT Operation Test Setup

The NFC application is installed on the EUT. The NFC function is enabled, and the utility "NXP Tools" is launched. The ancillary equipment (NFC card) is placed at the proper sensing position to trigger the EUT to continuously transmit the NFC signal at 13.56 MHz (Power Level: Default).

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

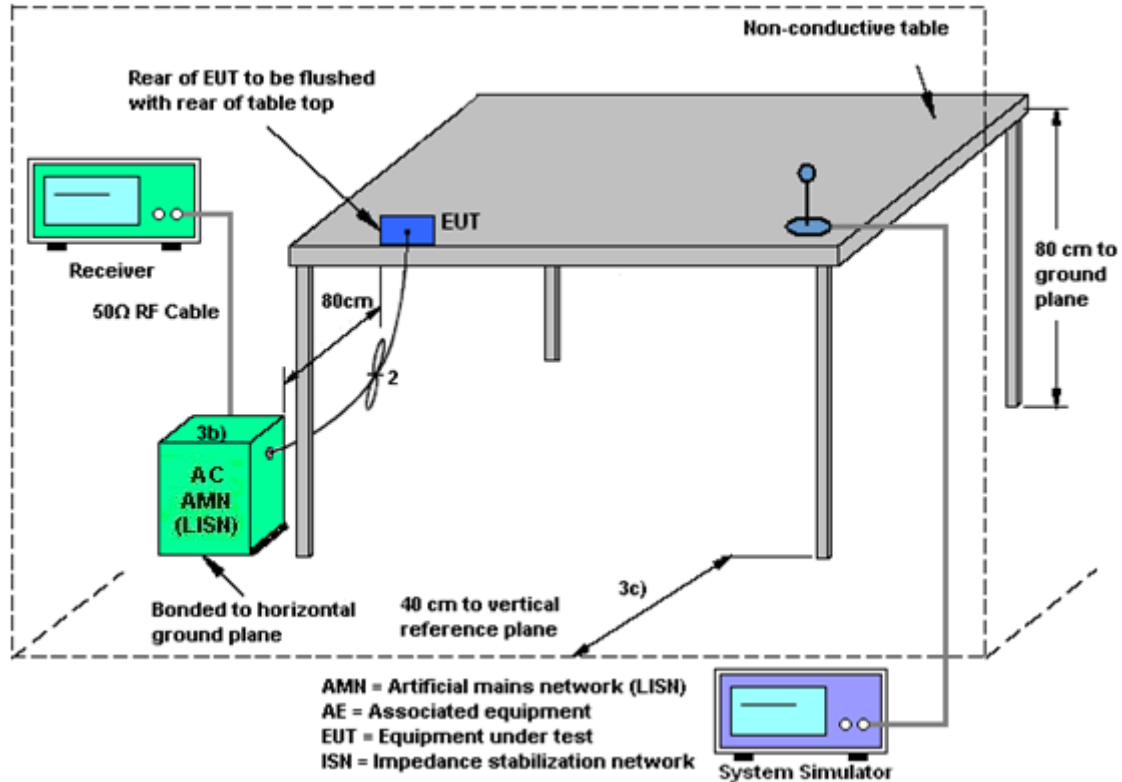

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

Note:

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

(2) with dummy load

Remark: Only the fundamental NFC signal needs to be retested per C63.4.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20 dB and 99% emission bandwidth in the specific band 13.553~13.567 MHz.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max Hold Mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20 dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

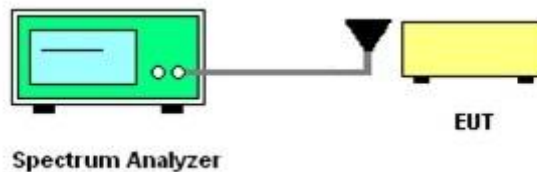

3.2.5 Test Result of Near Field Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed by using a new battery.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT has transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

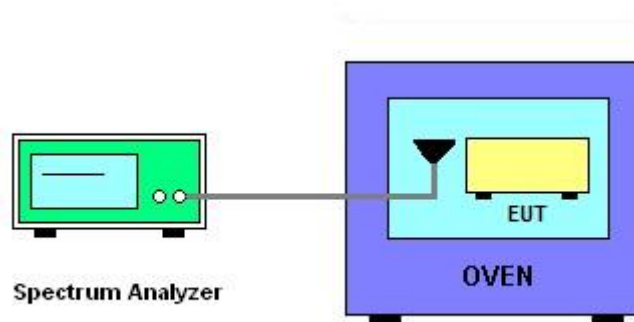

3.3.5 Test Result of Near Field Test Items

Please refer to Appendix B.

3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

Remark:

1. The field strength test result is in 3m test distance, follow test rules the test data use distance extrapolation factor and reported in this report at 30m test result.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna is fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9 kHz.

Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).

3.4.4 Test Setup

For radiated test below 30MHz

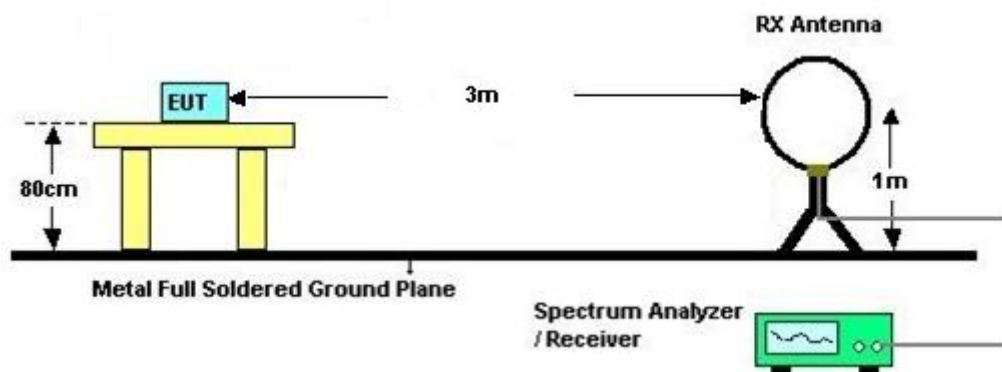

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower is scanned (from 1 M to 4 M) and then the turntable is rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30 MHz, loop antenna has to be used for measurement and the recorded data shall be QP measured by receiver.
8. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.

3.5.5 Test Setup

For radiated test below 30MHz

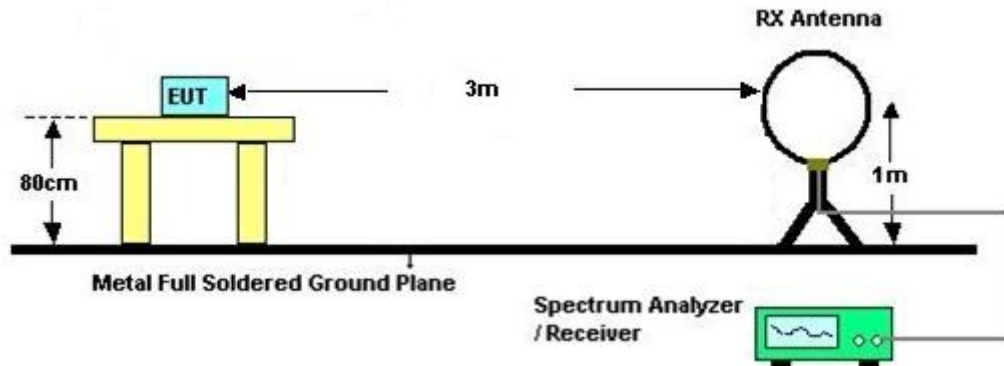

For radiated test above 30MHz

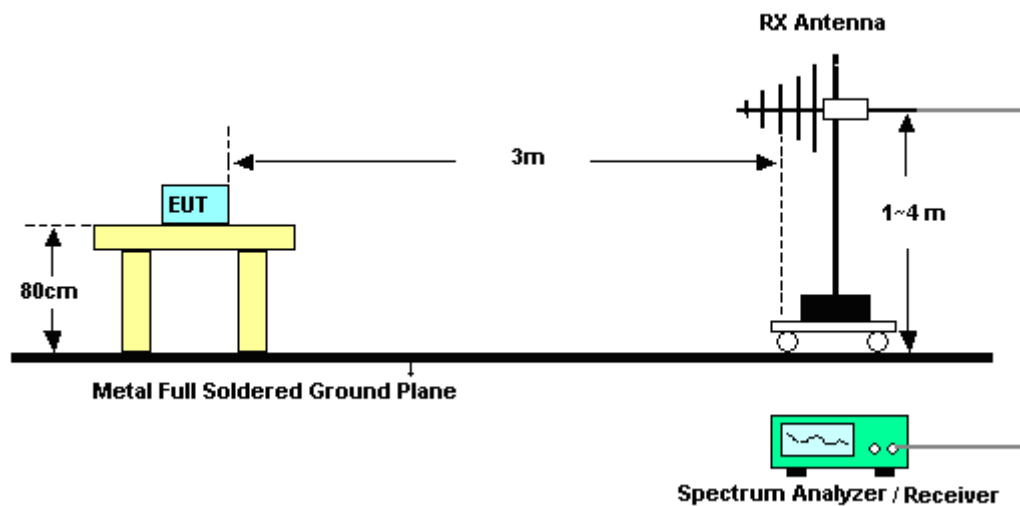

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Remark:

1. There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. After pre-scan three receiving antenna orientations parallel (horizontal), perpendicular(vertical), and ground-parallel for Loop Antenna, the worst case is receiving antenna parallel.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 30, 2025	Jun. 11.2026	Sep. 29, 2026	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 17, 2026	Jun. 11.2026	Apr. 16, 2027	Conducted (TH05-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-241	92003713	-30°C ~95°C	Feb 23, 2026	Jun. 11.2026	Feb 22, 2027	Conducted (TH05-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 04, 2026	Jun. 11.2026	Mar. 03, 2027	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 02 2026~ Jun. 09, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 02 2026~ Jun. 09, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2025	Jun. 02 2026~ Jun. 09, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 02, 2026	Jun. 02 2026~ Jun. 09, 2026	Mar. 01, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Apr. 09, 2026	Jun. 02 2026~ Jun. 09, 2026	Apr. 08, 2027	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Apr. 10, 2026	Jun. 02 2026~ Jun. 09, 2026	Apr. 10, 2027	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Jun. 02 2026~ Jun. 09, 2026	Oct. 20, 2026	Conduction (CO07-HY)
Bilog Antenna with 6dB pad	TESEQ & VGT	CBL 6111D & VFA_Z-04002-N-06	66925 & 24006	30MHz~1GHz	Apr. 12, 2026	Jun. 03, 2026~ Jun. 18, 2026	Apr. 11, 2027	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Jun. 03, 2026~ Jun. 18, 2026	Dec. 10, 2026	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 06, 2025	Jun. 03, 2026~ Jun. 18, 2026	Dec. 05, 2026	Radiation (03CH11-HY)
Signal Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	May 28, 2026	Jun. 03, 2026~ Jun. 18, 2026	May 27, 2027	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 22, 2025	Jun. 03, 2026~ Jun. 18, 2026	Jul. 21, 2026	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 03, 2026~ Jun. 18, 2026	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 03, 2026~ Jun. 18, 2026	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 03, 2026~ Jun. 18, 2026	N/A	Radiation (03CH11-HY)
Software	Audix	E3	RK-002391	N/A	N/A	Jun. 03, 2026~ Jun. 18, 2026	N/A	Radiation (03CH11-HY)
USB Data Logger	TECPEL	TR-32	HE17XM6804	N/A	Dec. 15, 2025	Jun. 03, 2026~ Jun. 18, 2026	Dec. 14, 2026	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 26, 2025	Jun. 03, 2026~ Jun. 18, 2026	Aug. 25, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 04, 2026	Jun. 03, 2026~ Jun. 18, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 04, 2026	Jun. 03, 2026~ Jun. 18, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 04, 2026	Jun. 03, 2026~ Jun. 18, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	9K~30M	Mar. 04, 2026	Jun. 03, 2026~ Jun. 18, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	Mar. 04, 2026	Jun. 03, 2026~ Jun. 18, 2026	Mar. 03, 2027	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 09, 2025	Jun. 03, 2026~ Jun. 18, 2026	Sep. 08, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000C 7/40SS	SN2	20MHz High Pass Filter	Sep. 09, 2025	Jun. 03, 2026~ Jun. 18, 2026	Sep. 08, 2026	Radiation (03CH11-HY)

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.40 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.50 dB
---	---------




Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Louis Chung	Temperature :	22.5 ~ 26.7°C
		Relative Humidity :	40.2 ~ 51.2%

EUT Information

Report NO : 651501-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

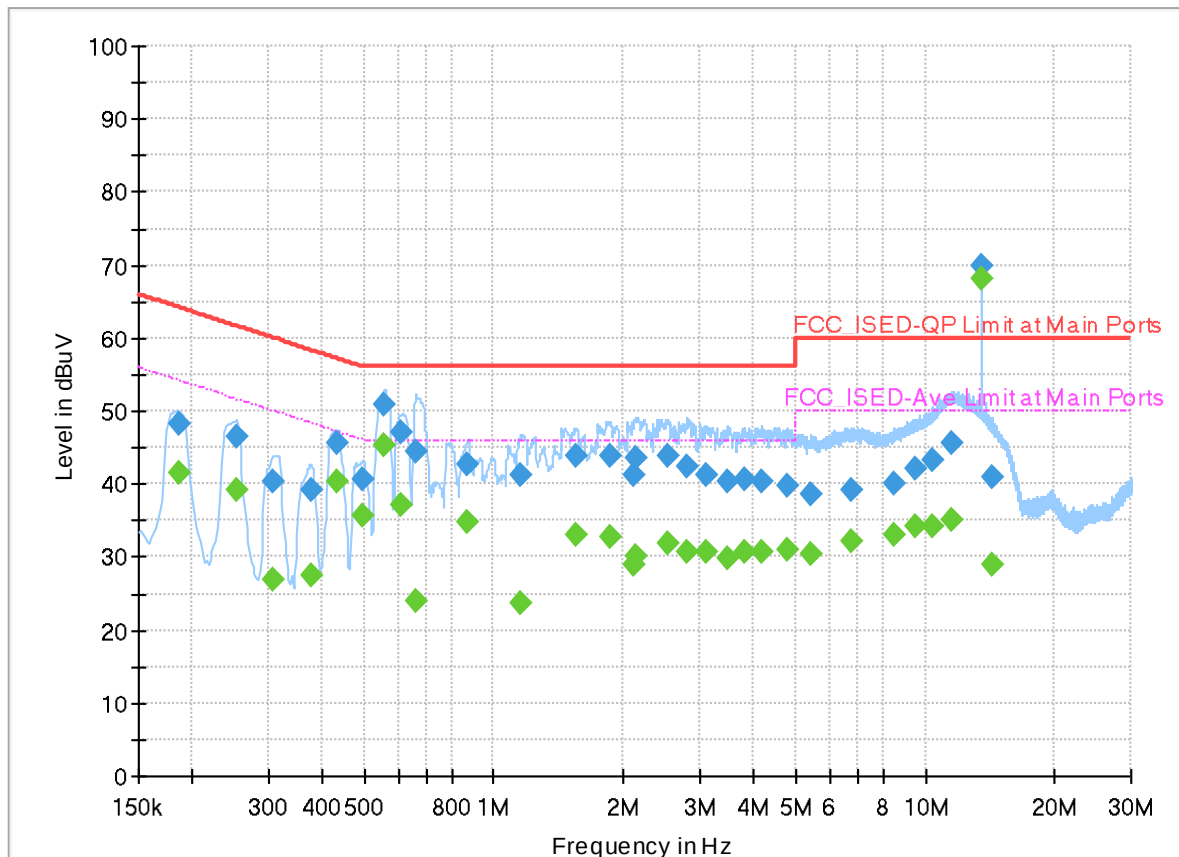

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186990	---	41.46	54.17	12.71	L1	ON	20.0
0.186990	48.14	---	64.17	16.03	L1	ON	20.0
0.252465	---	39.06	51.68	12.62	L1	ON	20.0
0.252465	46.57	---	61.68	15.11	L1	ON	20.0
0.307500	---	27.03	50.04	23.01	L1	ON	20.0
0.307500	40.28	---	60.04	19.76	L1	ON	20.0
0.376260	---	27.61	48.36	20.75	L1	ON	20.0
0.376260	39.18	---	58.36	19.18	L1	ON	20.0
0.433590	---	40.22	47.18	6.96	L1	ON	20.0
0.433590	45.61	---	57.18	11.57	L1	ON	20.0
0.498075	---	35.56	46.03	10.47	L1	ON	20.0
0.498075	40.70	---	56.03	15.33	L1	ON	20.0
0.558105	---	45.29	46.00	0.71	L1	ON	20.0
0.558105	50.88	---	56.00	5.12	L1	ON	20.0
0.612555	---	37.15	46.00	8.85	L1	ON	20.0
0.612555	47.19	---	56.00	8.81	L1	ON	20.0
0.663000	---	23.93	46.00	22.07	L1	ON	20.0
0.663000	44.41	---	56.00	11.59	L1	ON	20.0
0.869280	---	34.91	46.00	11.09	L1	ON	20.0

0.869280	42.77	---	56.00	13.23	L1	ON	20.0
1.153185	---	23.59	46.00	22.41	L1	ON	20.0
1.153185	41.28	---	56.00	14.72	L1	ON	20.0
1.544865	---	33.07	46.00	12.93	L1	ON	20.1
1.544865	43.72	---	56.00	12.28	L1	ON	20.1
1.857930	---	32.64	46.00	13.36	L1	ON	20.1
1.857930	43.74	---	56.00	12.26	L1	ON	20.1
2.117040	---	28.98	46.00	17.02	L1	ON	20.1
2.117040	41.37	---	56.00	14.63	L1	ON	20.1
2.143860	---	30.25	46.00	15.75	L1	ON	20.1
2.143860	43.47	---	56.00	12.53	L1	ON	20.1
2.528475	---	32.01	46.00	13.99	L1	ON	20.1
2.528475	43.86	---	56.00	12.14	L1	ON	20.1
2.818500	---	30.73	46.00	15.27	L1	ON	20.1
2.818500	42.27	---	56.00	13.73	L1	ON	20.1
3.124815	---	30.77	46.00	15.23	L1	ON	20.1
3.124815	41.26	---	56.00	14.74	L1	ON	20.1
3.482520	---	29.88	46.00	16.12	L1	ON	20.1
3.482520	40.37	---	56.00	15.63	L1	ON	20.1
3.815250	---	30.76	46.00	15.24	L1	ON	20.1
3.815250	40.77	---	56.00	15.23	L1	ON	20.1
4.166250	---	30.67	46.00	15.33	L1	ON	20.2
4.166250	40.21	---	56.00	15.79	L1	ON	20.2
4.770375	---	31.08	46.00	14.92	L1	ON	20.2
4.770375	39.73	---	56.00	16.27	L1	ON	20.2
5.441775	---	30.33	50.00	19.67	L1	ON	20.2
5.441775	38.64	---	60.00	21.36	L1	ON	20.2
6.729000	---	32.15	50.00	17.85	L1	ON	20.3
6.729000	39.32	---	60.00	20.68	L1	ON	20.3
8.517120	---	33.17	50.00	16.83	L1	ON	20.4
8.517120	40.07	---	60.00	19.93	L1	ON	20.4
9.438000	---	34.25	50.00	15.75	L1	ON	20.4
9.438000	42.08	---	60.00	17.92	L1	ON	20.4
10.358250	---	34.31	50.00	15.69	L1	ON	20.4
10.358250	43.13	---	60.00	16.87	L1	ON	20.4
11.538825	---	35.21	50.00	14.79	L1	ON	20.5
11.538825	45.61	---	60.00	14.39	L1	ON	20.5
13.559955	---	68.01	50.00	-18.01	L1	ON	20.6
13.559955	69.83	---	60.00	-9.83	L1	ON	20.6
14.249580	---	28.81	50.00	21.19	L1	ON	20.6
14.249580	40.80	---	60.00	19.20	L1	ON	20.6

EUT Information

Report NO : 651501-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

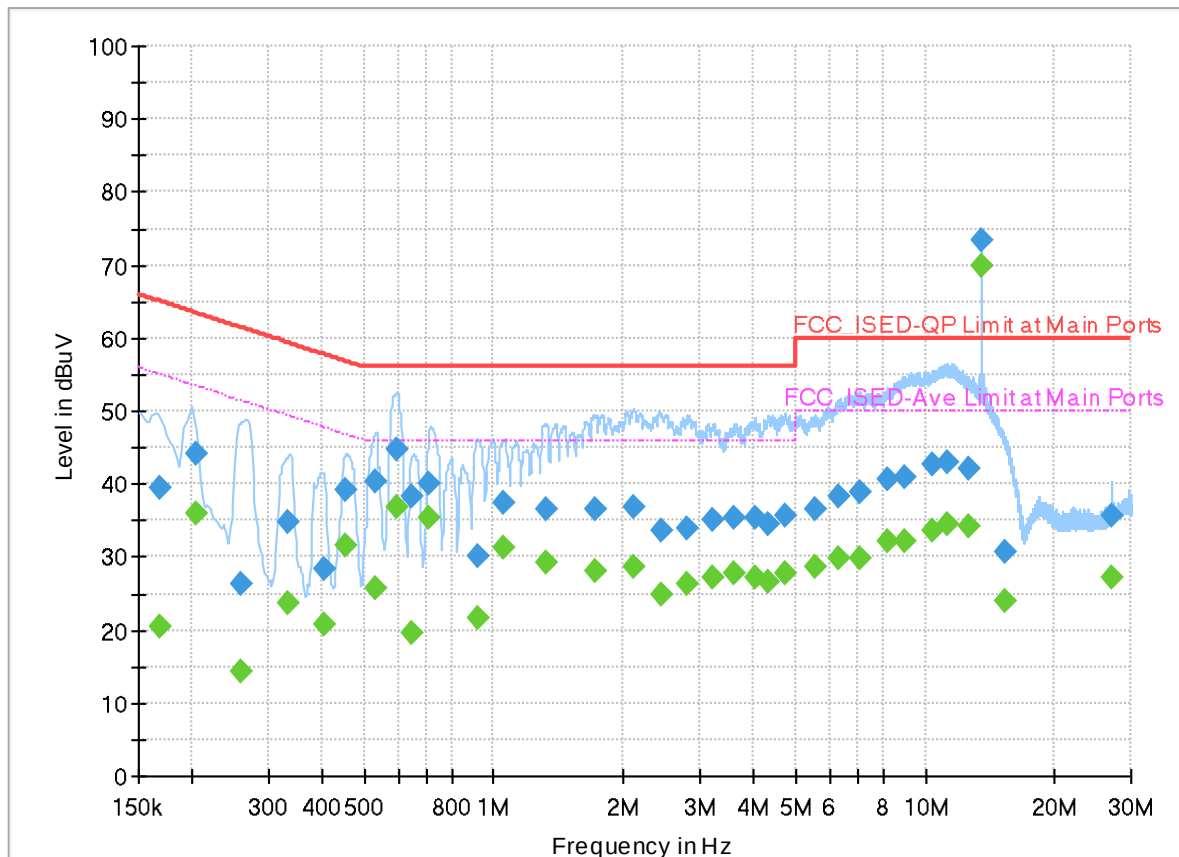

Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.167280	---	20.38	55.09	34.71	N	ON	20.0
0.167280	39.53	---	65.09	25.56	N	ON	20.0
0.204000	---	35.97	53.45	17.48	N	ON	20.0
0.204000	44.28	---	63.45	19.17	N	ON	20.0
0.260250	---	14.46	51.42	36.96	N	ON	20.0
0.260250	26.46	---	61.42	34.96	N	ON	20.0
0.332250	---	23.79	49.40	25.61	N	ON	20.0
0.332250	34.78	---	59.40	24.62	N	ON	20.0
0.402000	---	20.65	47.81	27.16	N	ON	20.0
0.402000	28.31	---	57.81	29.50	N	ON	20.0
0.451275	---	31.66	46.85	15.19	N	ON	20.0
0.451275	39.22	---	56.85	17.63	N	ON	20.0
0.533805	---	25.64	46.00	20.36	N	ON	20.0
0.533805	40.43	---	56.00	15.57	N	ON	20.0
0.596400	---	36.80	46.00	9.20	N	ON	20.0
0.596400	44.70	---	56.00	11.30	N	ON	20.0
0.646080	---	19.69	46.00	26.31	N	ON	20.0
0.646080	38.26	---	56.00	17.74	N	ON	20.0
0.708000	---	35.24	46.00	10.76	N	ON	20.0

0.708000	39.99	---	56.00	16.01	N	ON	20.0
0.915000	---	21.66	46.00	24.34	N	ON	20.0
0.915000	30.13	---	56.00	25.87	N	ON	20.0
1.056750	---	31.20	46.00	14.80	N	ON	20.1
1.056750	37.36	---	56.00	18.64	N	ON	20.1
1.325580	---	29.14	46.00	16.86	N	ON	20.1
1.325580	36.46	---	56.00	19.54	N	ON	20.1
1.714785	---	28.08	46.00	17.92	N	ON	20.1
1.714785	36.51	---	56.00	19.49	N	ON	20.1
2.107500	---	28.59	46.00	17.41	N	ON	20.1
2.107500	36.87	---	56.00	19.13	N	ON	20.1
2.440275	---	24.86	46.00	21.14	N	ON	20.1
2.440275	33.73	---	56.00	22.27	N	ON	20.1
2.809500	---	26.25	46.00	19.75	N	ON	20.1
2.809500	33.91	---	56.00	22.09	N	ON	20.1
3.209235	---	27.15	46.00	18.85	N	ON	20.1
3.209235	35.09	---	56.00	20.91	N	ON	20.1
3.622245	---	27.67	46.00	18.33	N	ON	20.1
3.622245	35.46	---	56.00	20.54	N	ON	20.1
4.026750	---	27.26	46.00	18.74	N	ON	20.2
4.026750	35.43	---	56.00	20.57	N	ON	20.2
4.323885	---	26.65	46.00	19.35	N	ON	20.2
4.323885	34.40	---	56.00	21.60	N	ON	20.2
4.746750	---	27.86	46.00	18.14	N	ON	20.2
4.746750	35.61	---	56.00	20.39	N	ON	20.2
5.544735	---	28.66	50.00	21.34	N	ON	20.2
5.544735	36.64	---	60.00	23.36	N	ON	20.2
6.315675	---	29.82	50.00	20.18	N	ON	20.3
6.315675	38.32	---	60.00	21.68	N	ON	20.3
7.022445	---	29.88	50.00	20.12	N	ON	20.3
7.022445	38.81	---	60.00	21.19	N	ON	20.3
8.148750	---	32.27	50.00	17.73	N	ON	20.3
8.148750	40.55	---	60.00	19.45	N	ON	20.3
8.927655	---	32.17	50.00	17.83	N	ON	20.4
8.927655	40.96	---	60.00	19.04	N	ON	20.4
10.353345	---	33.64	50.00	16.36	N	ON	20.4
10.353345	42.68	---	60.00	17.32	N	ON	20.4
11.267925	---	34.47	50.00	15.53	N	ON	20.5
11.267925	43.13	---	60.00	16.87	N	ON	20.5
12.581295	---	34.12	50.00	15.88	N	ON	20.6
12.581295	42.22	---	60.00	17.78	N	ON	20.6
13.559865	---	69.85	50.00	-19.85	N	ON	20.6
13.559865	73.43	---	60.00	-13.43	N	ON	20.6
15.397800	---	24.05	50.00	25.95	N	ON	20.7
15.397800	30.72	---	60.00	29.28	N	ON	20.7
27.120210	---	27.20	50.00	22.80	N	ON	21.1
27.120210	35.77	---	60.00	24.23	N	ON	21.1

EUT Information

Report NO : 642314
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

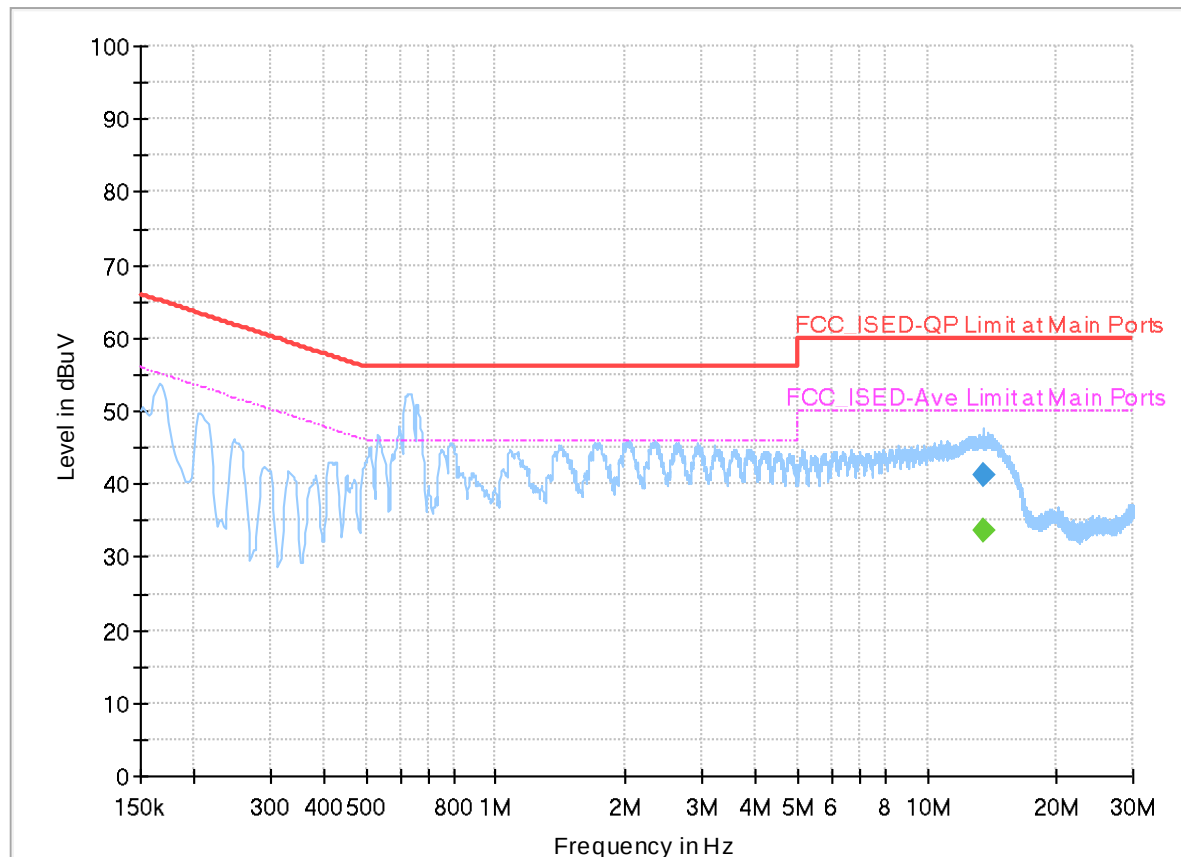


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.559955	---	33.71	50.00	16.29	L1	ON	20.6
13.559955	41.09	---	60.00	18.91	L1	ON	20.6

EUT Information

Report NO : 642314
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

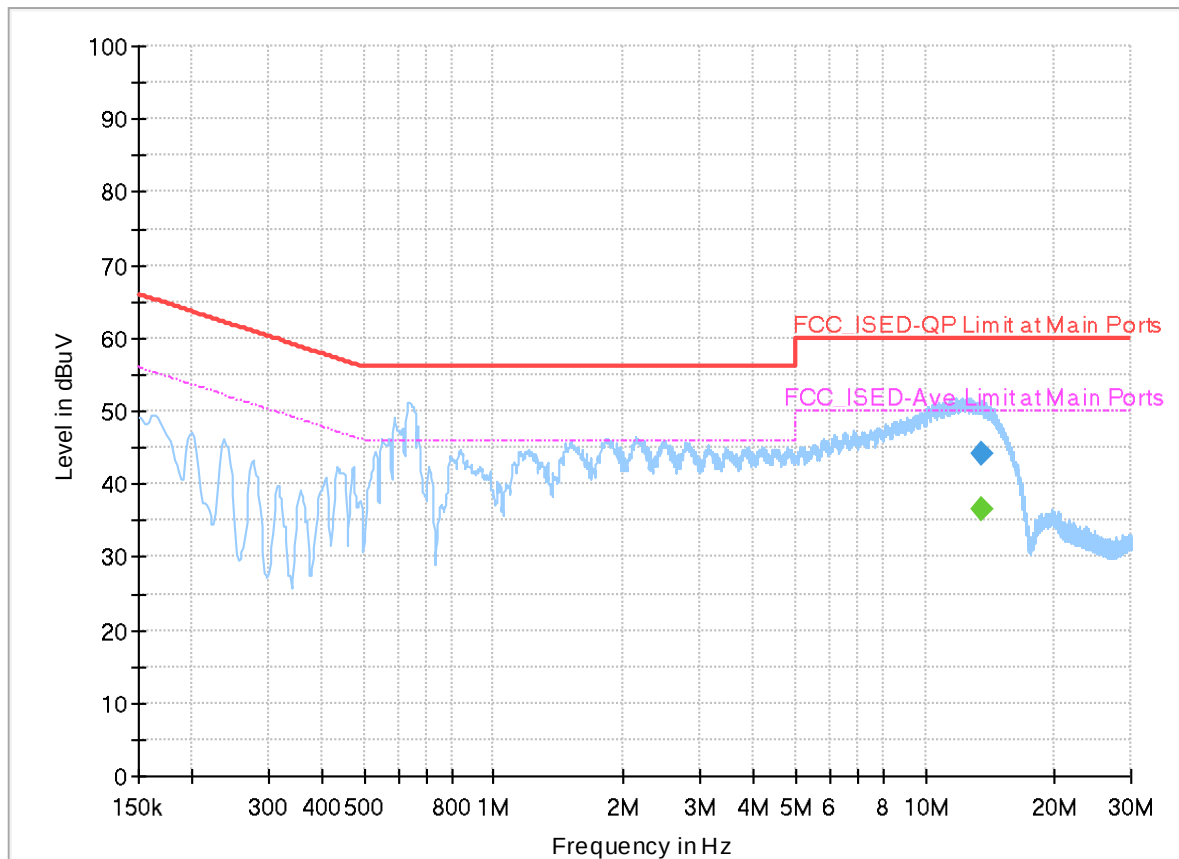



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.558740	---	36.54	50.00	13.46	N	ON	20.6
13.558740	44.29	---	60.00	15.71	N	ON	20.6



Appendix B. Test Results of Near Field Test Items

B1. Test Result of 20dB Spectrum Bandwidth

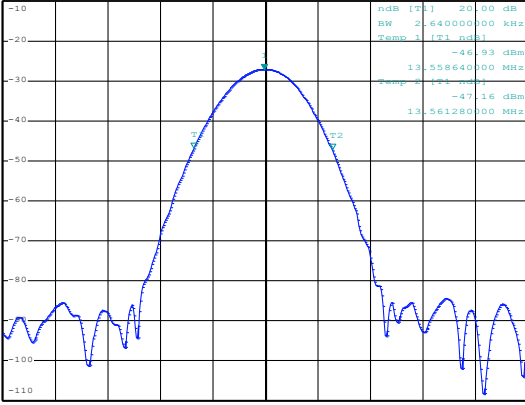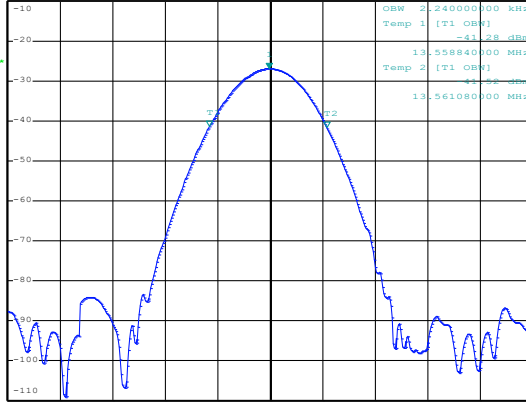Test mode		NFC Tx		Test Frequency (MHz)	13.56
					
20dB Bandwidth (kHz)		2.64		99% OccupiedBW(kHz)	2.24
Frequency range (MHz)		$f_L > 13.553$		13.55864	Test Result
		$f_H < 13.567$		13.56128	Complies

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.