

#01 GSM850_Right Cheek _Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.535 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.51 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

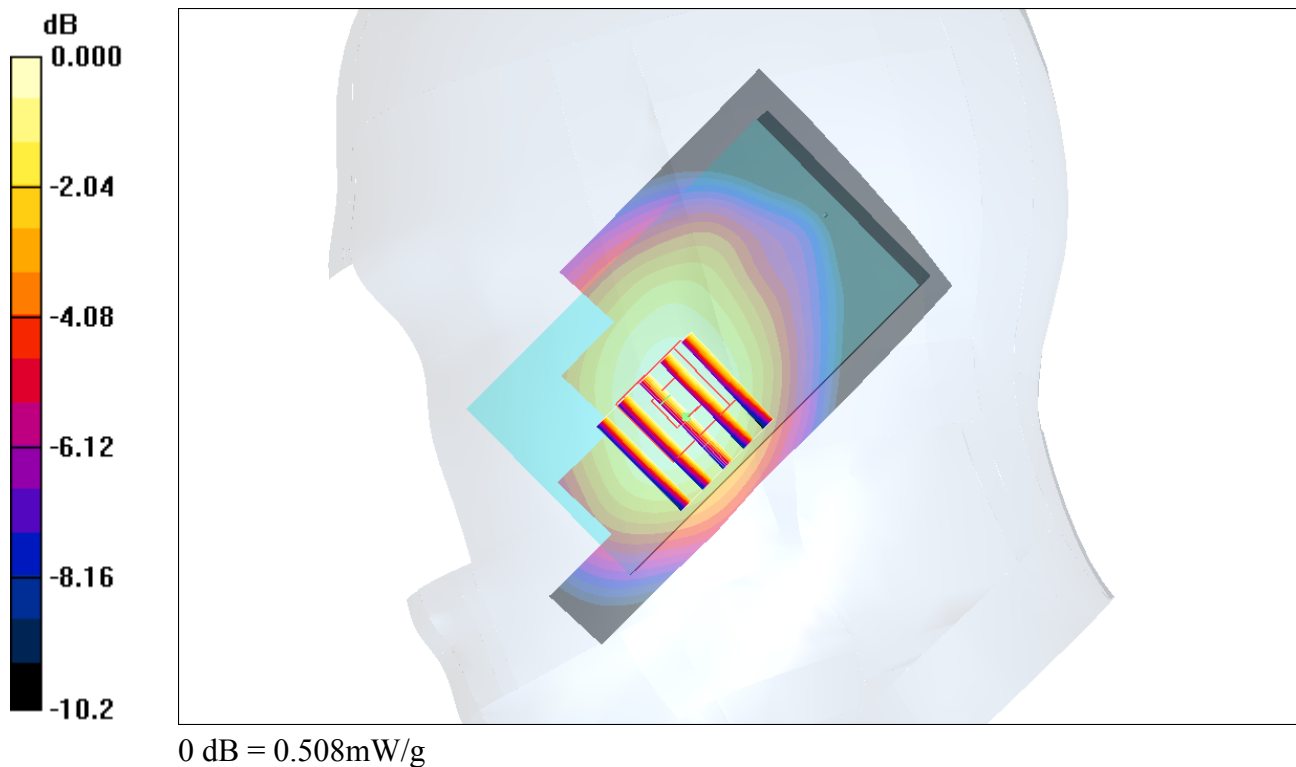

#02 GSM850_Right Tilted _Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.350 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.353 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

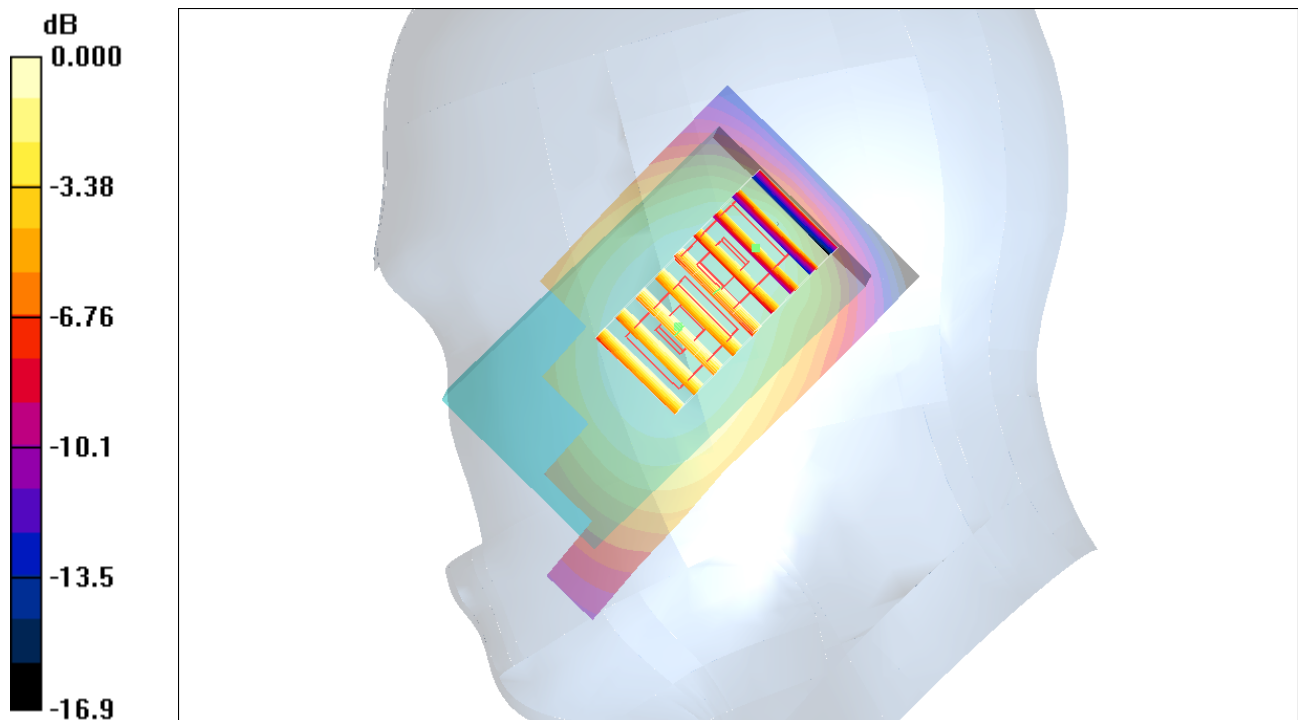

0 dB = 0.293mW/g

#03 GSM850_Left Cheek_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.563 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.535 mW/g

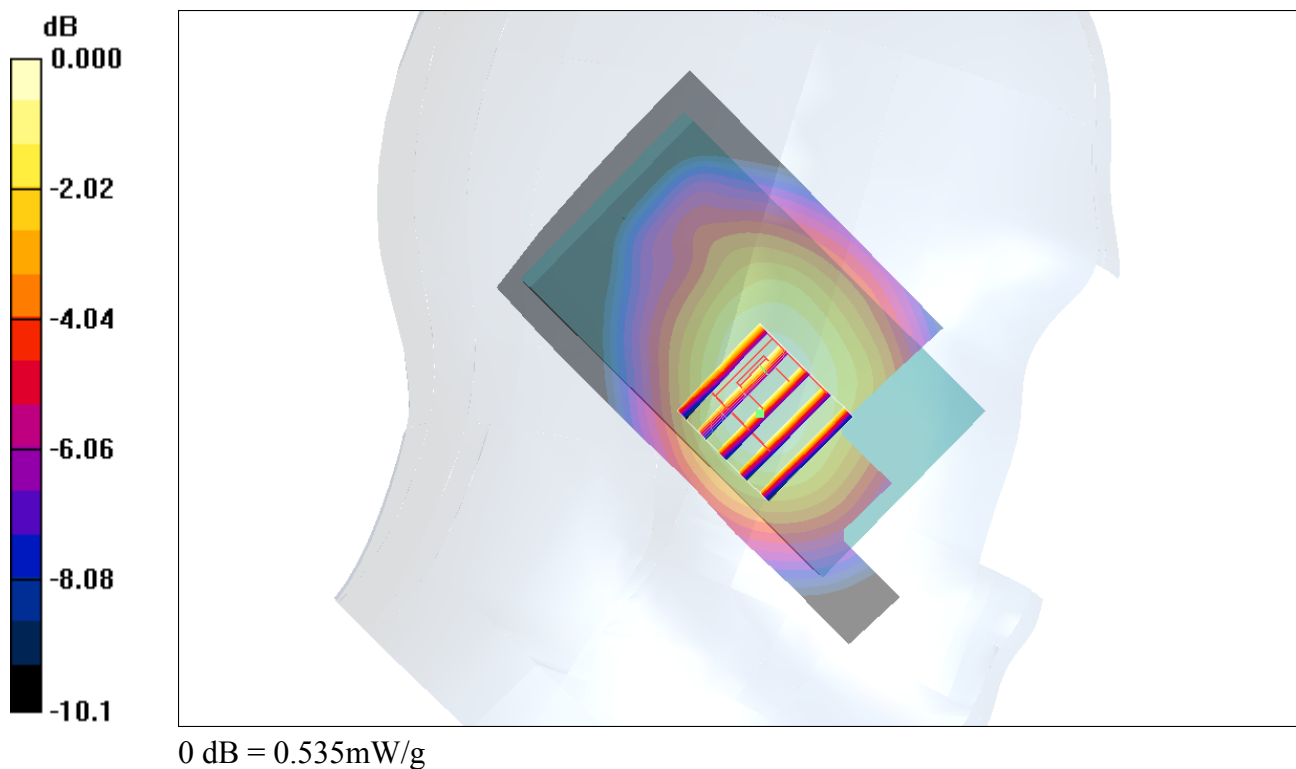

#03 GSM850_Left Cheek_Ch189_2D**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.563 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.535 mW/g

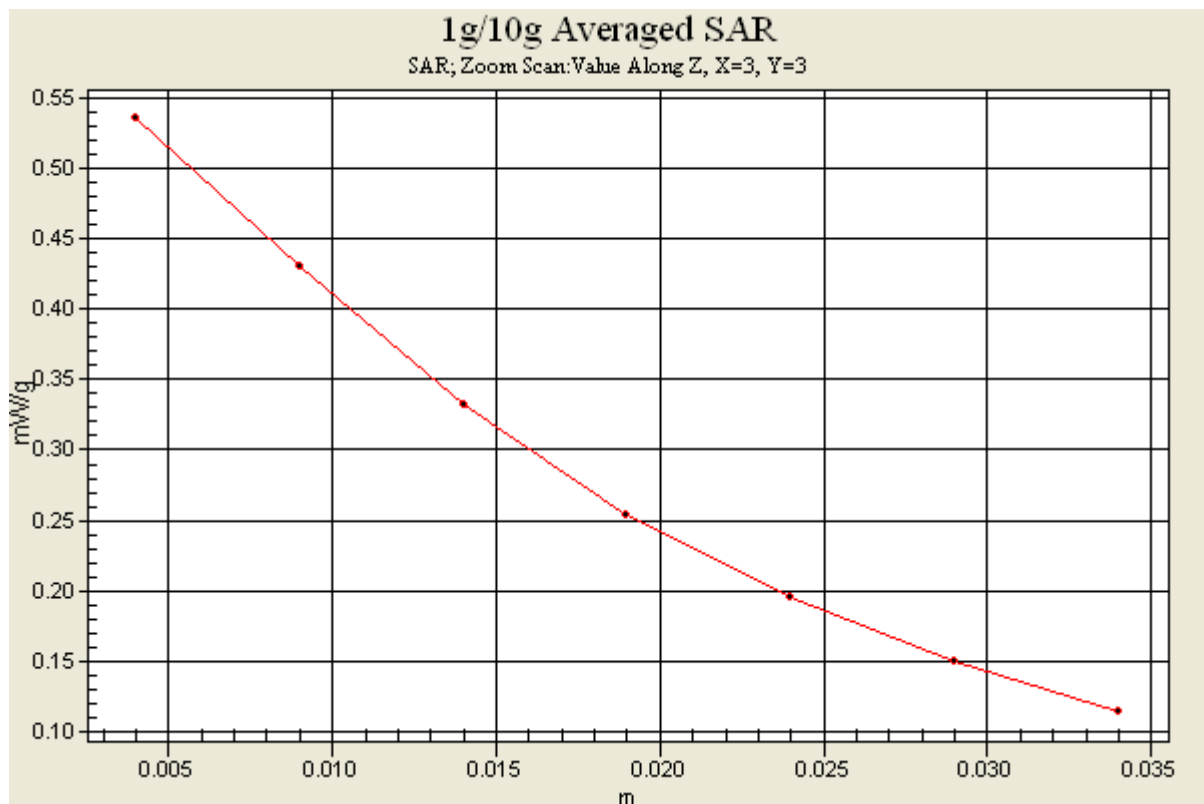

#04 GSM850_Left Tilted_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.392 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.321 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

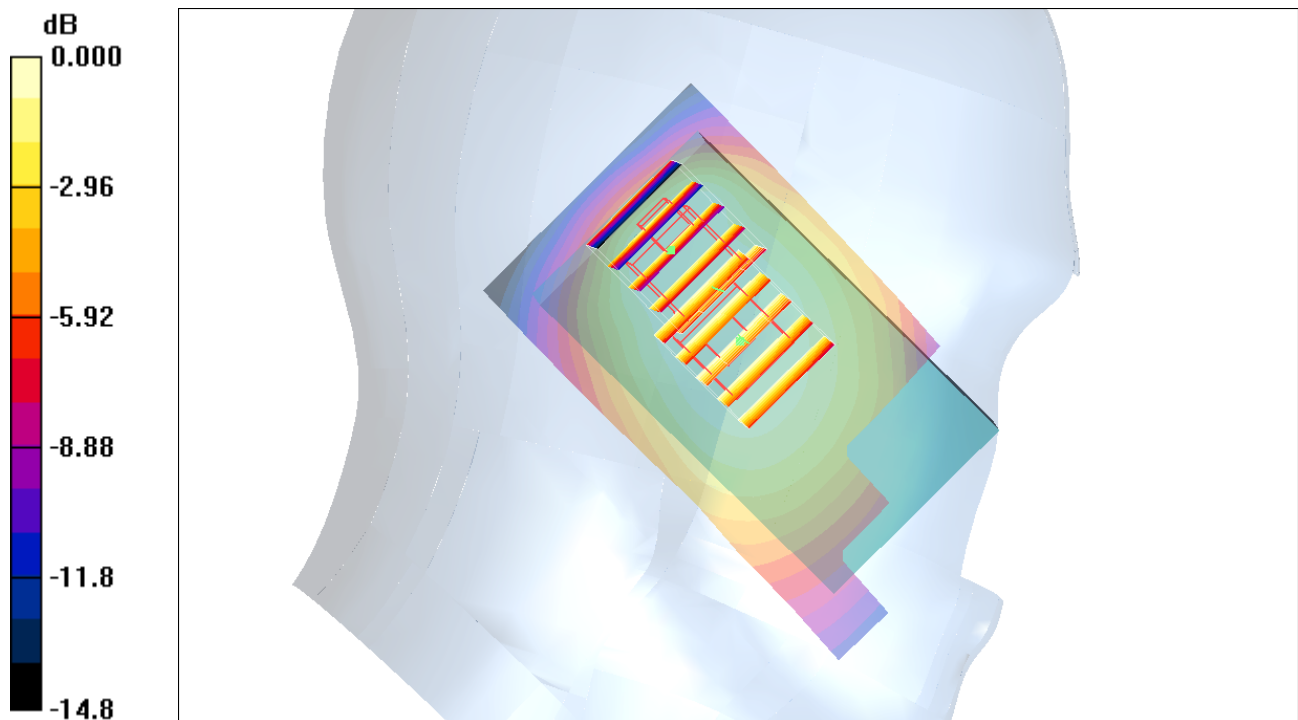

0 dB = 0.293mW/g

#05 GSM1900_Right Cheek _Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_110628 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.747 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.15 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.732 mW/g

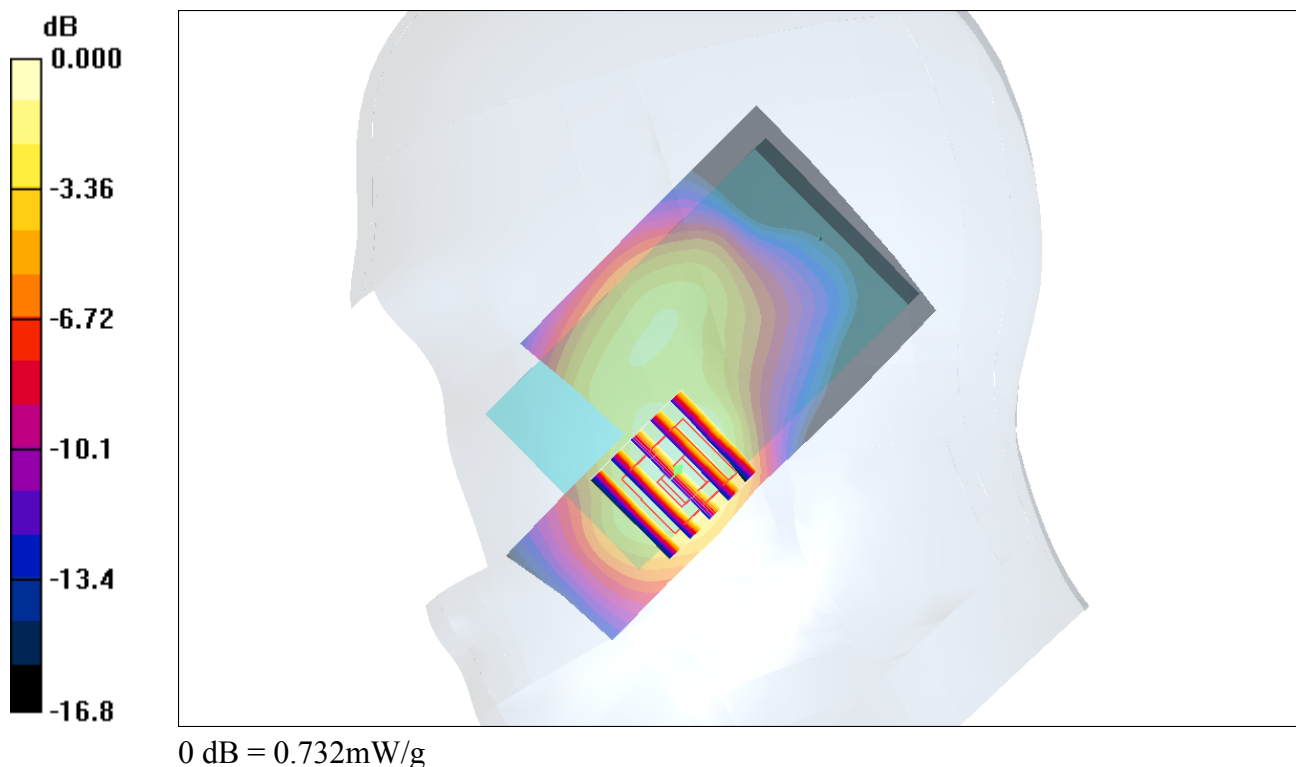

#05 GSM1900_Right Cheek_Ch512_2D**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_110628 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.747 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.15 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.732 mW/g

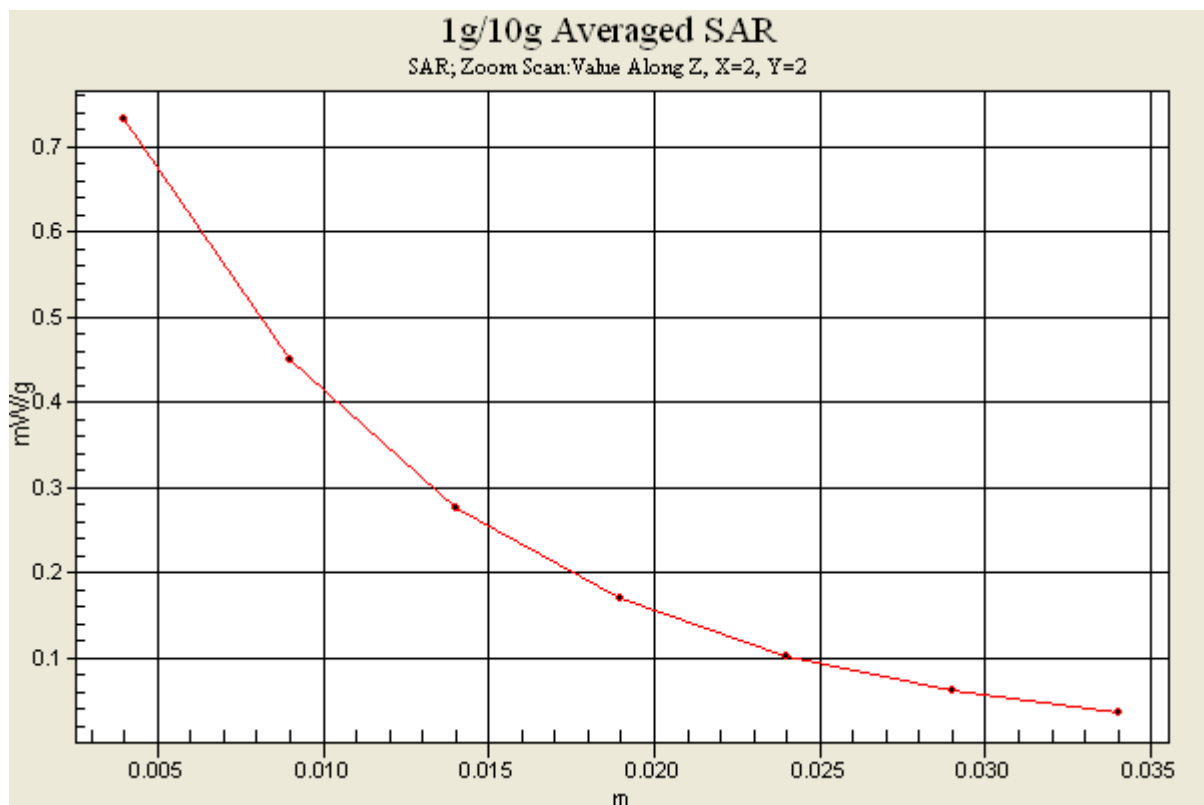

#06 GSM1900_Right Tilted _Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_110628 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r =$

38.4; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Right; Type: SAM; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.406 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.311 mW/g

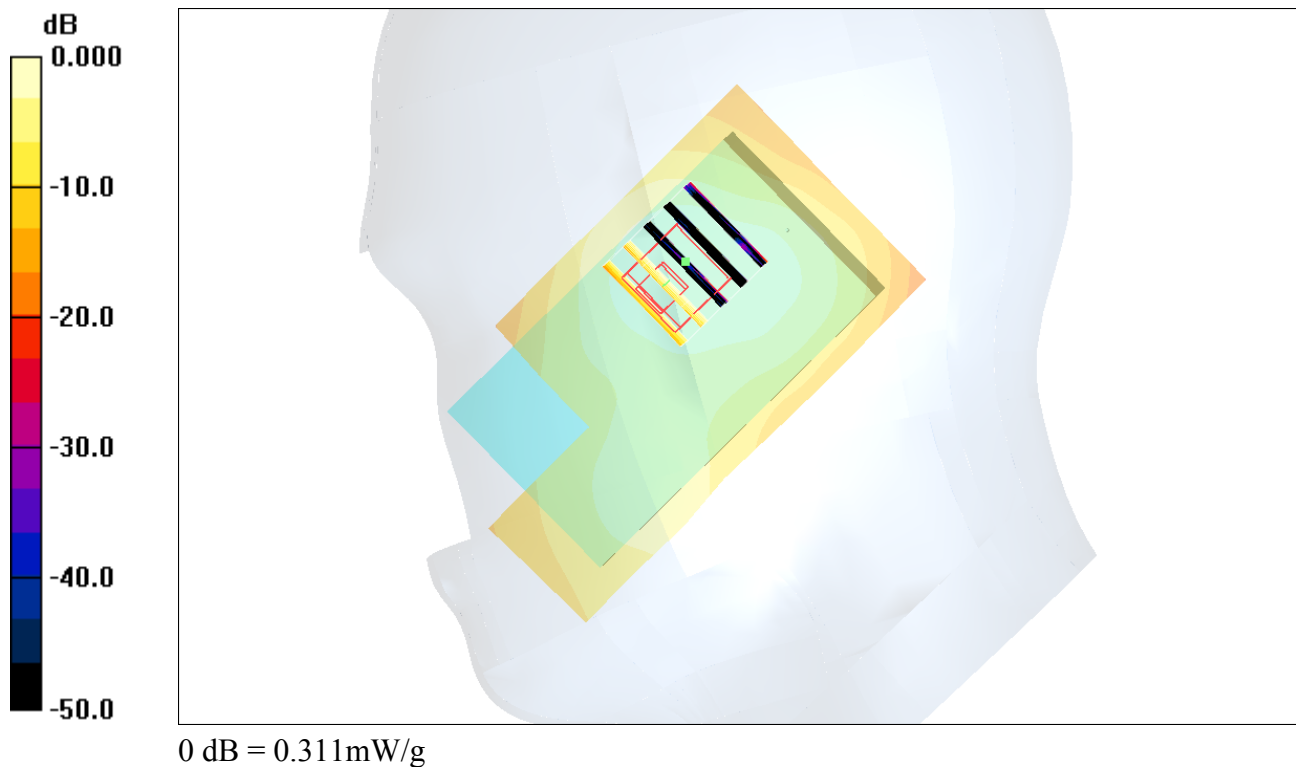

#07 GSM1900_Left Cheek_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_110628 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.620 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.24 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.560 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.600 mW/g

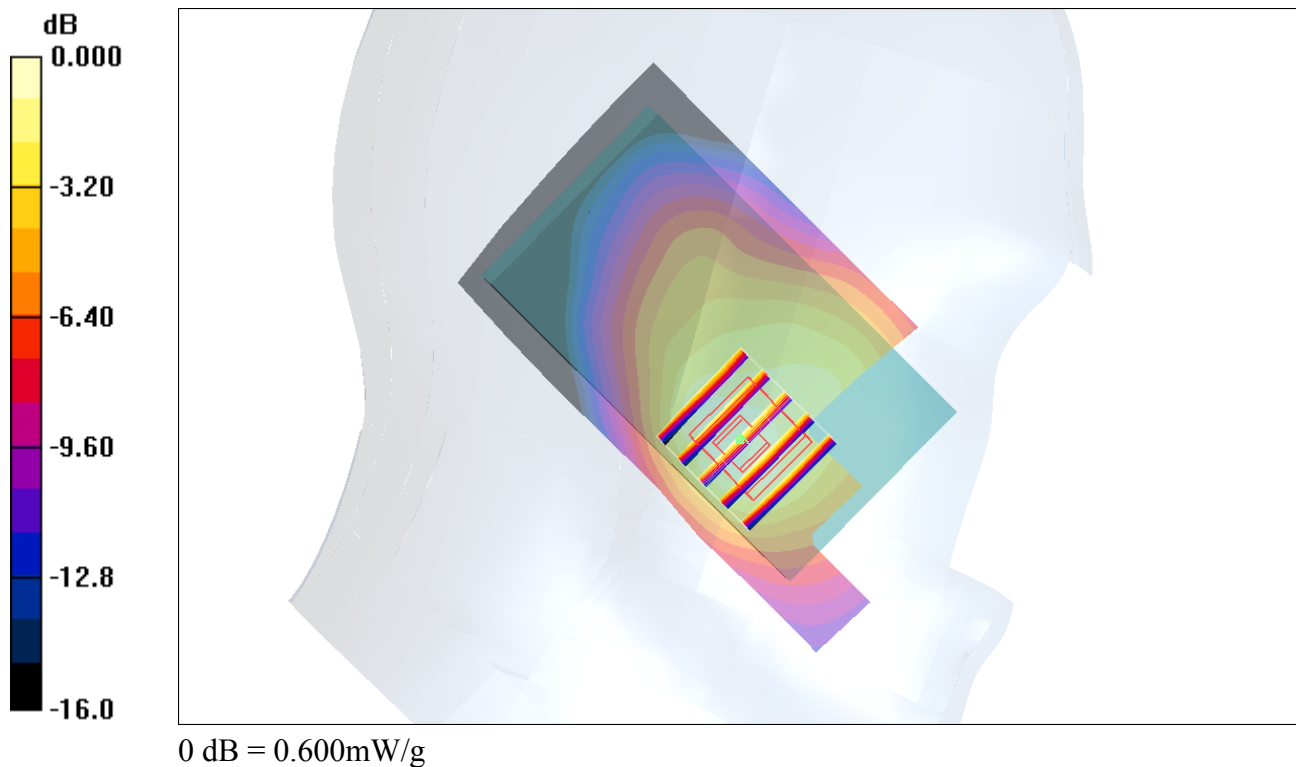

#08 GSM1900_Left Tilted _Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_110628 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.280 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.98 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 0.265 mW/g

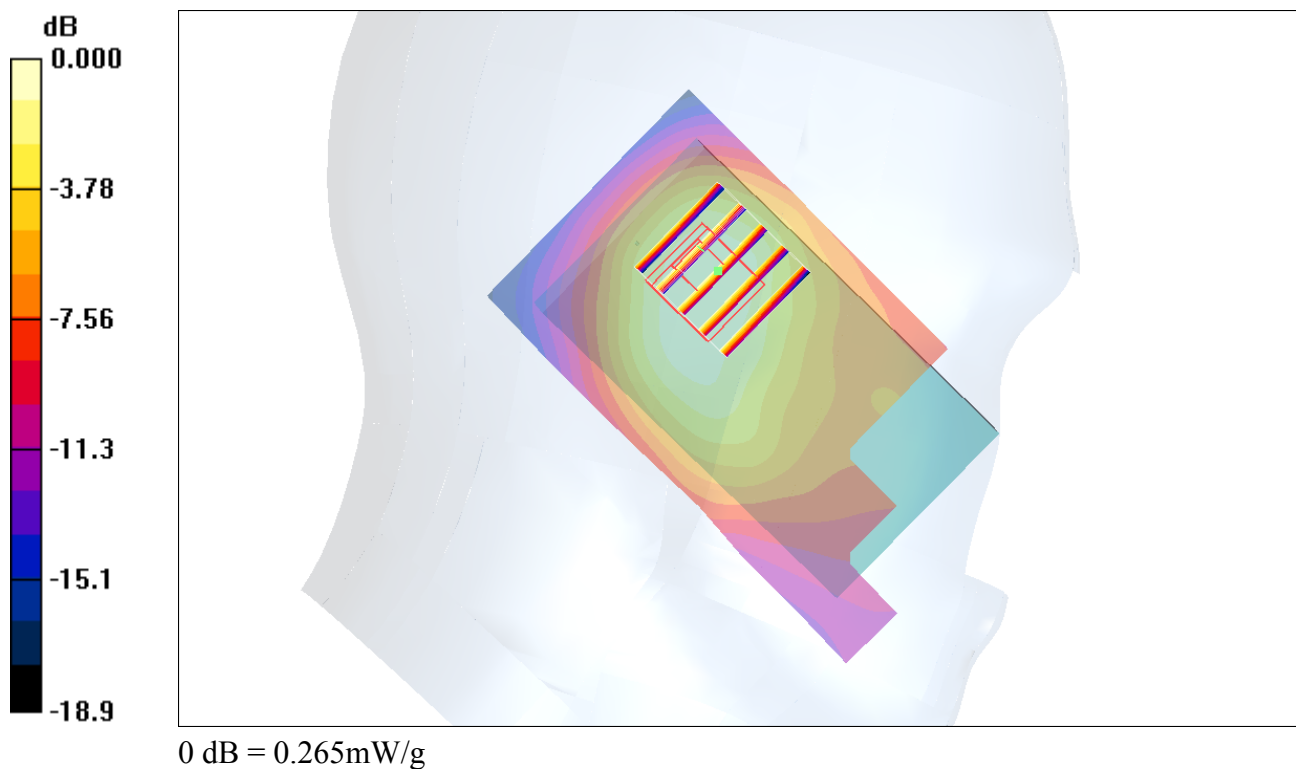

#15 WCDMA V_RMC12.2K_Right Cheek_Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r =$ 41.7; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2011/4/28

- Phantom: SAM_Left; Type: SAM; Serial: TP-1150

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.427 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.44 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.400 mW/g

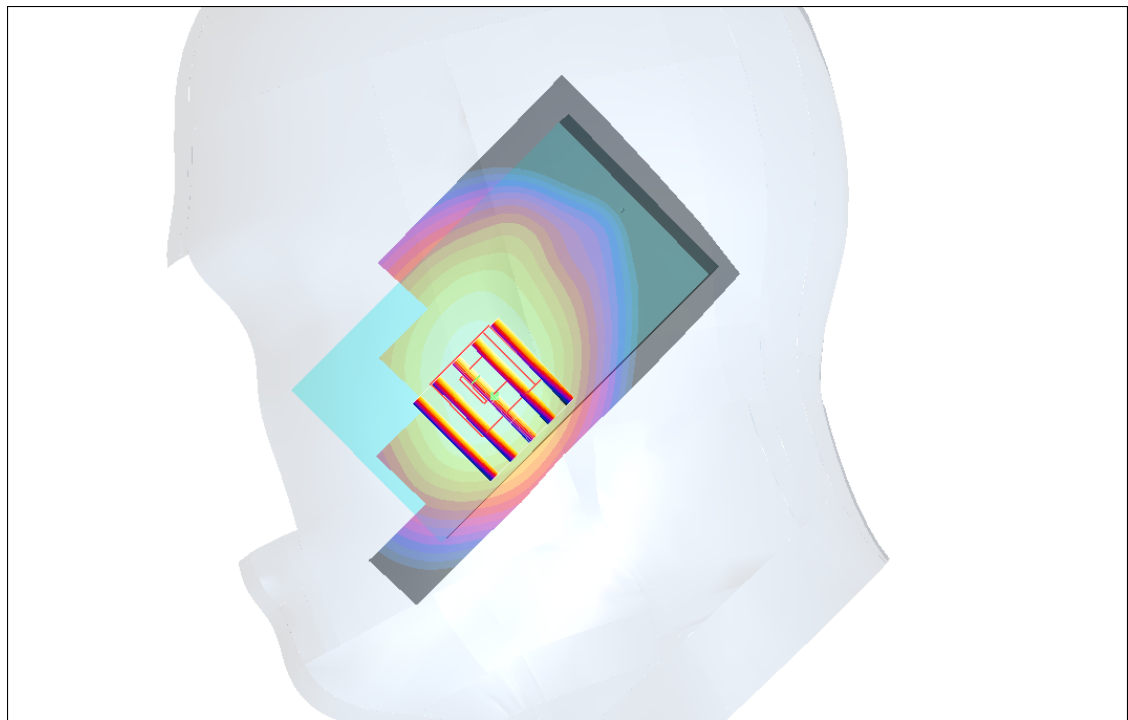

0 dB = 0.400mW/g

#16 WCDMA V_RMC12.2K_Right Tilted_Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.269 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.268 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

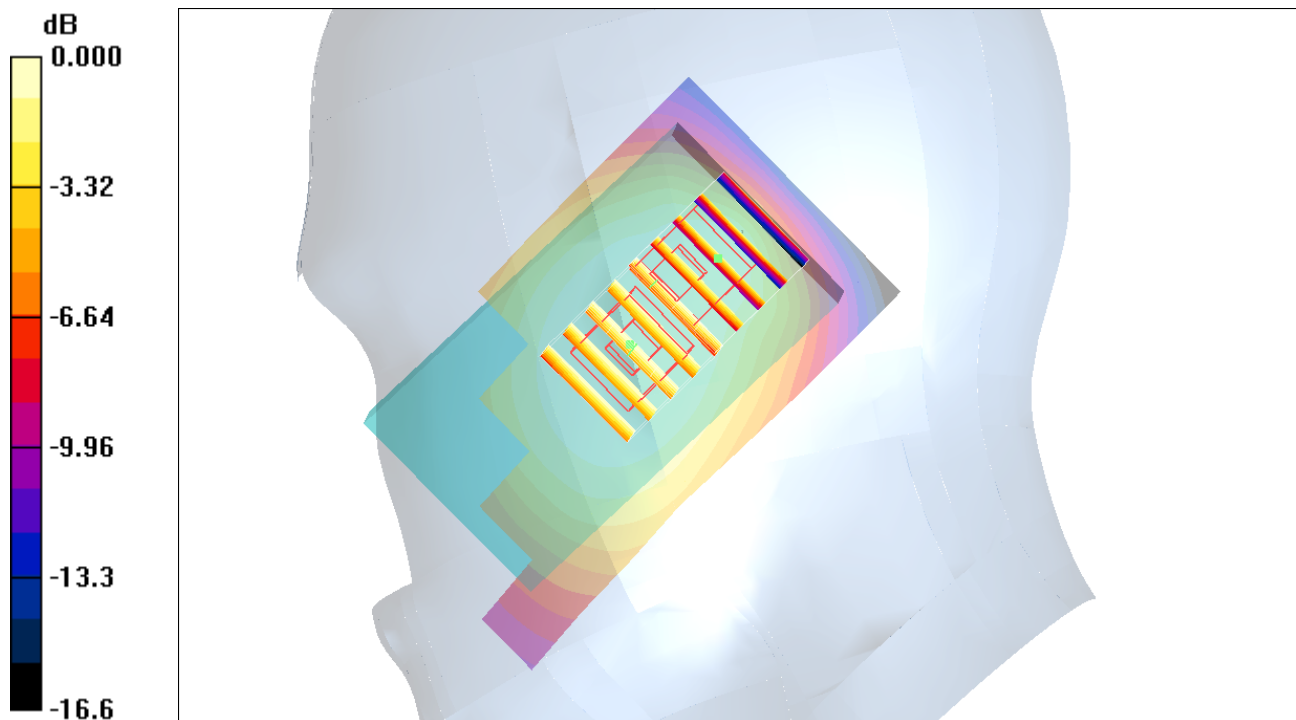

0 dB = 0.222mW/g

#17 WCDMA V_RMC12.2K_Left Cheek_Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.443 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.428 mW/g

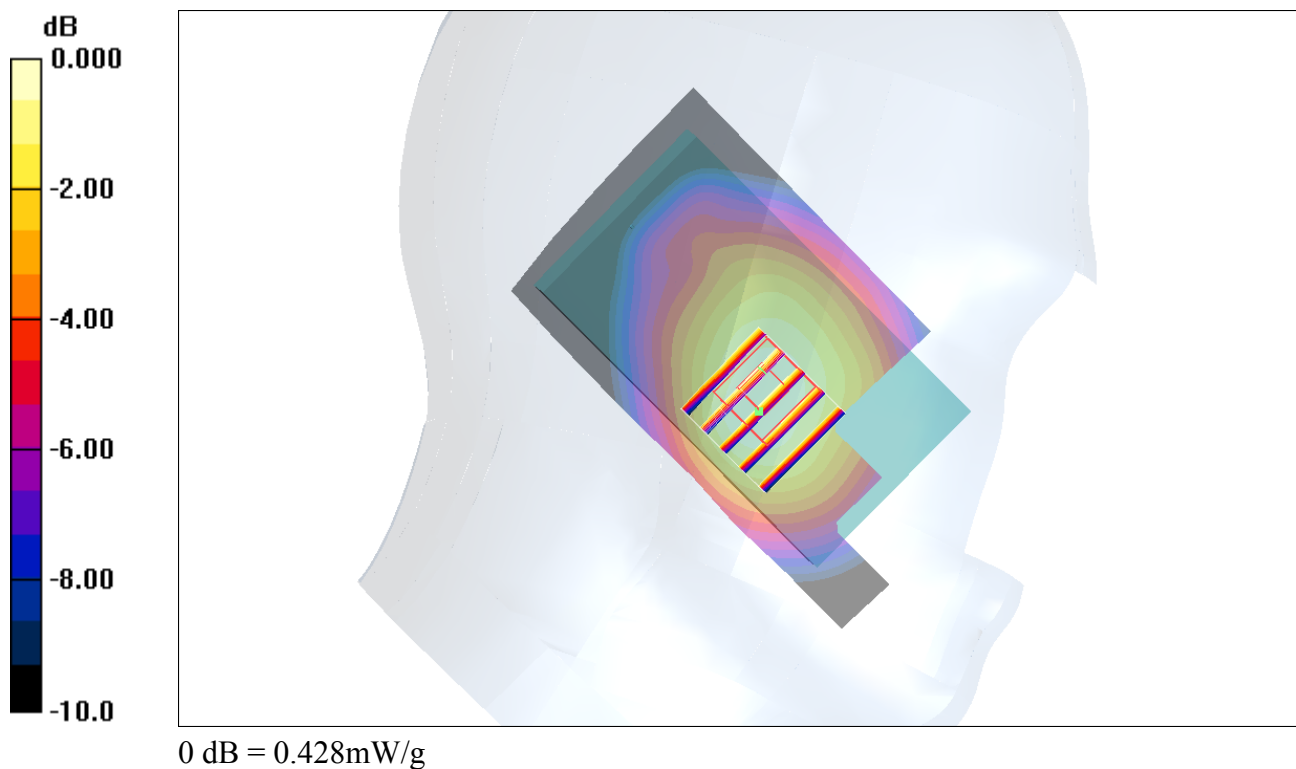

#17 WCDMA V_RMC12.2K_Left Cheek_Ch4182_2D**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.443 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.428 mW/g

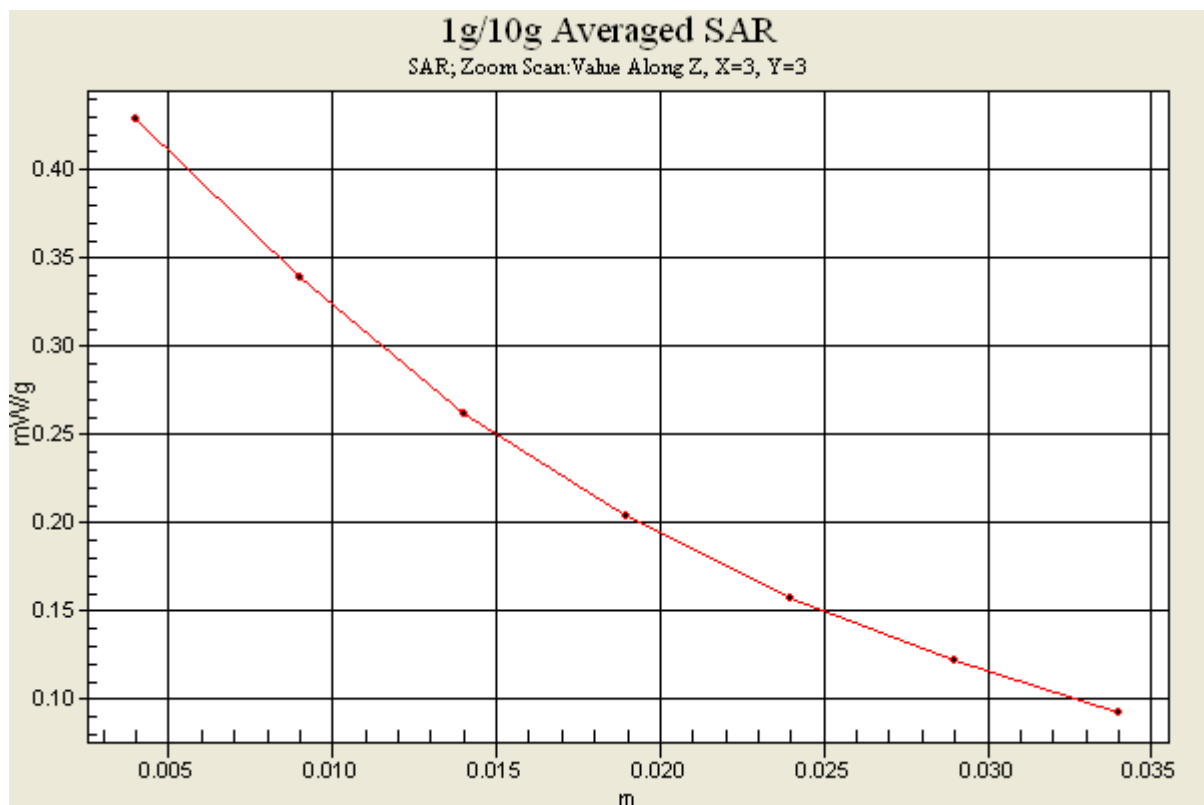

#18 WCDMA V_RMC12.2K_Left Tilted_Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.71, 6.71, 6.71); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.293 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.240 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

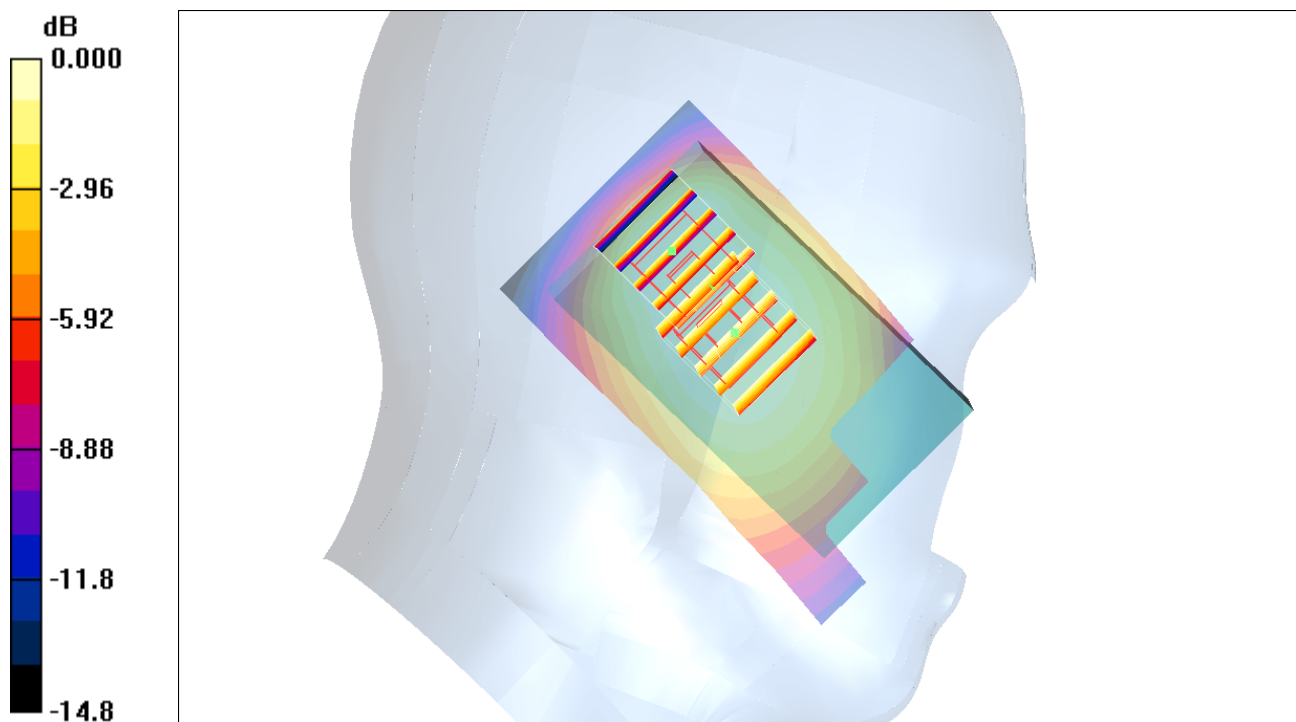

0 dB = 0.219mW/g

#09 WCDMA II_RMC12.2K_Right Cheek _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.26 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.31 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.599 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

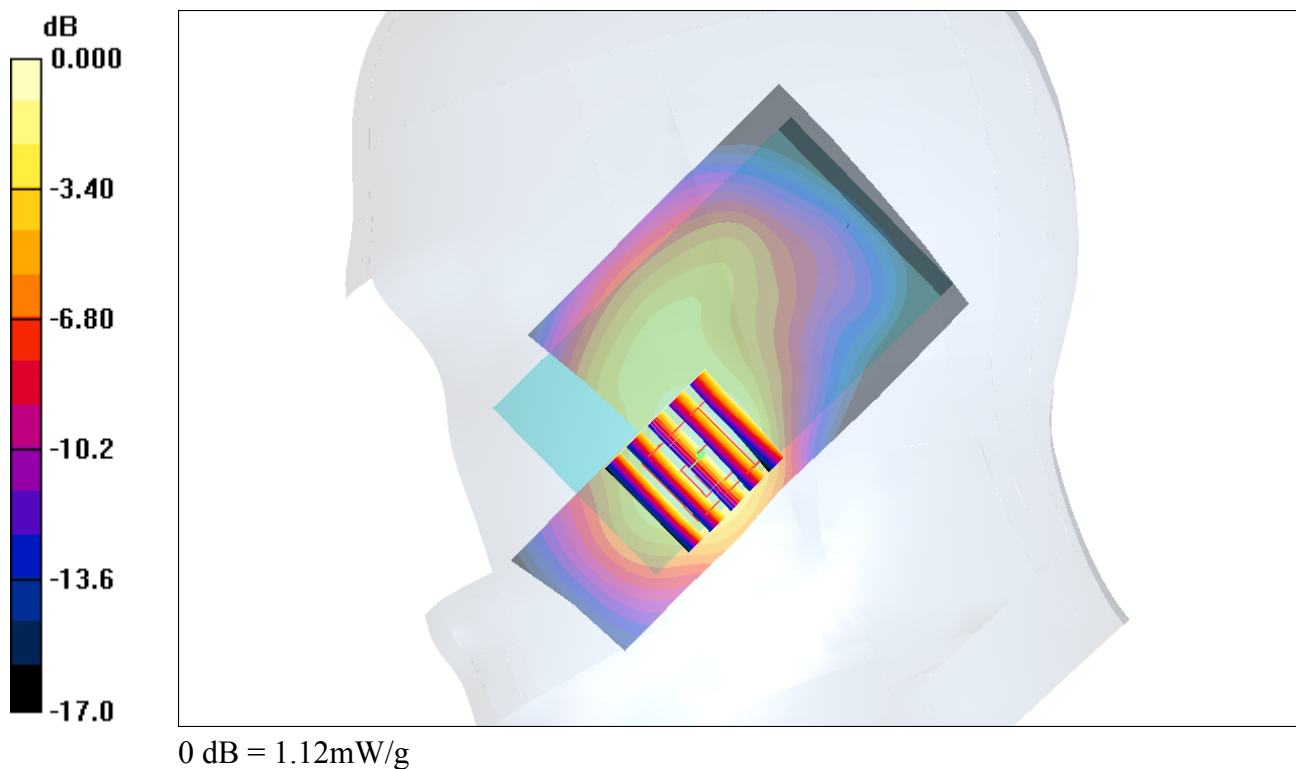


#10 WCDMA II_RMC12.2K_Right Tilted _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.8°C ; Liquid Temperature : 21.4°C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

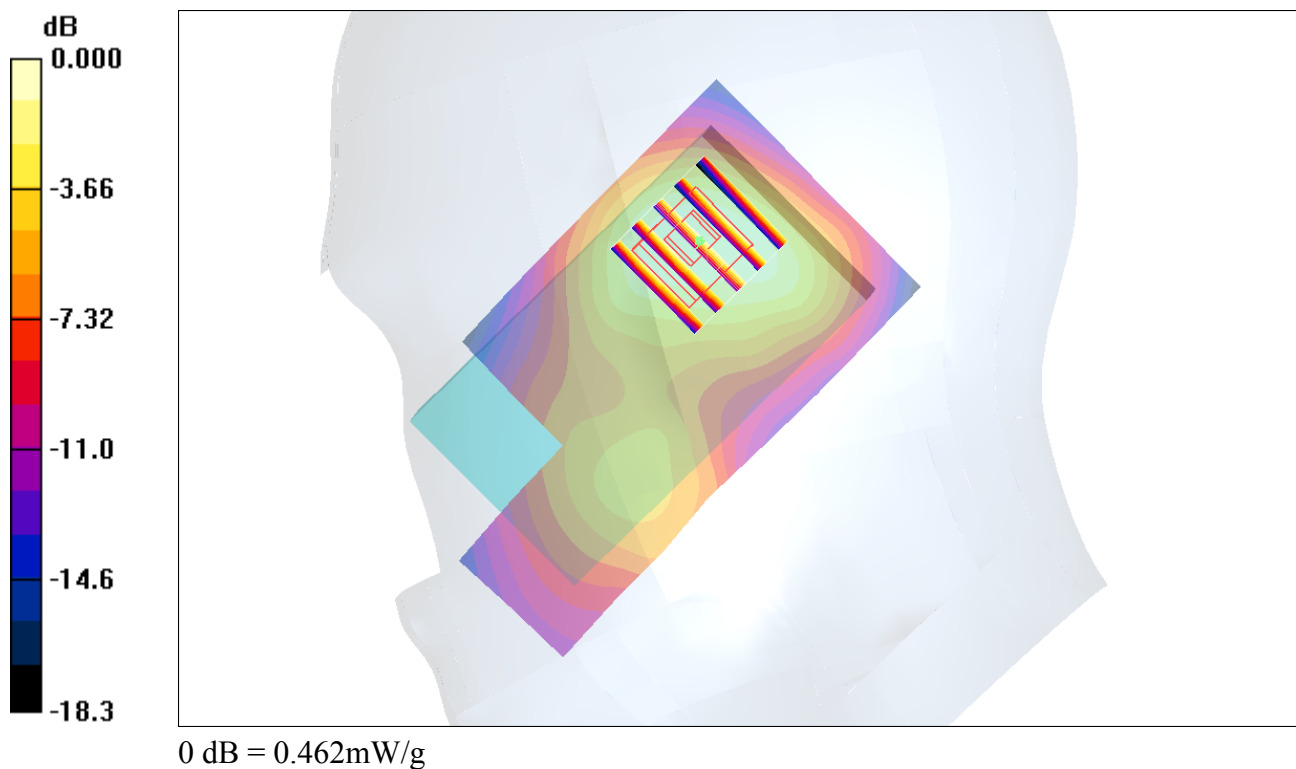Ch9400/Area Scan (41x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.523 mW/g **Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.8 V/m ; Power Drift = 0.013 dB Peak SAR (extrapolated) = 0.685 W/kg **SAR(1 g) = 0.433 mW/g ; SAR(10 g) = 0.264 mW/g** Maximum value of SAR (measured) = 0.462 mW/g 

#11 WCDMA II_RMC12.2K_Left Cheek _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.809 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.24 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.724 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.790 mW/g

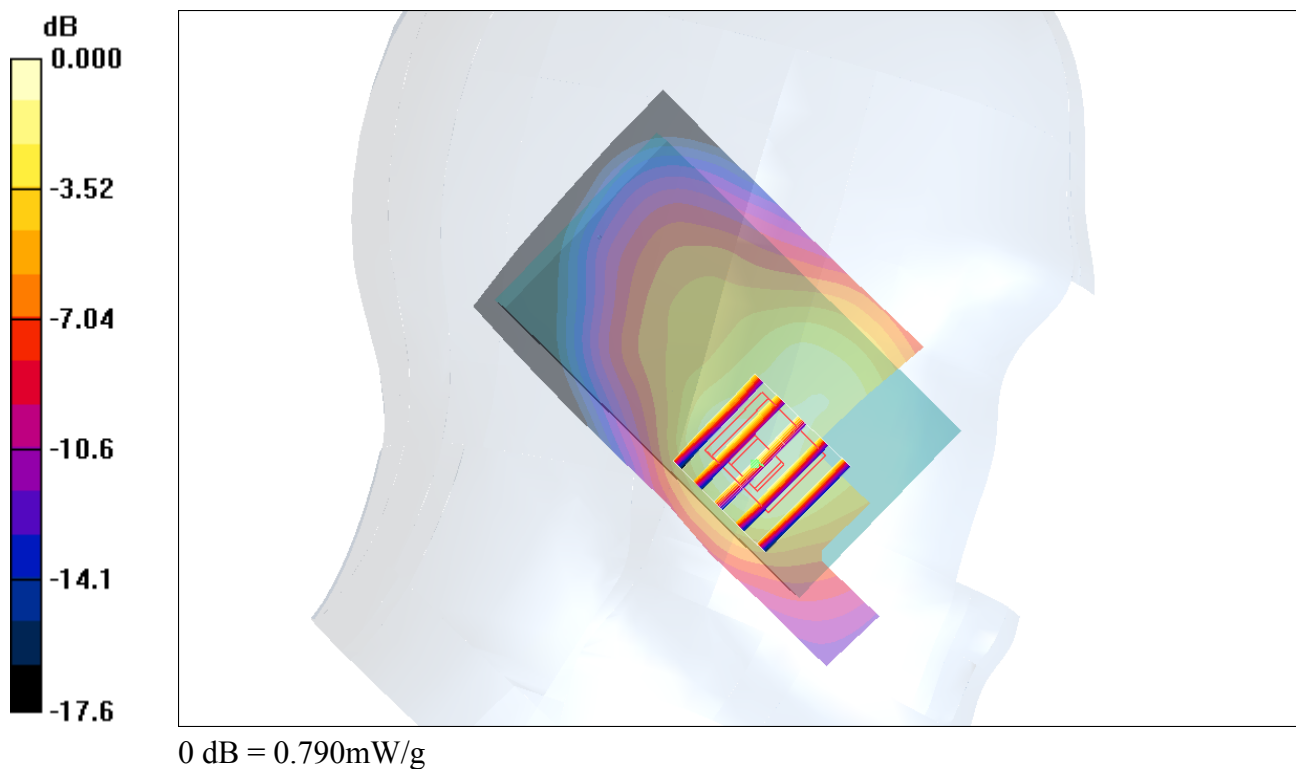

#12 WCDMA II_RMC12.2K_Left Tilted _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.357 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

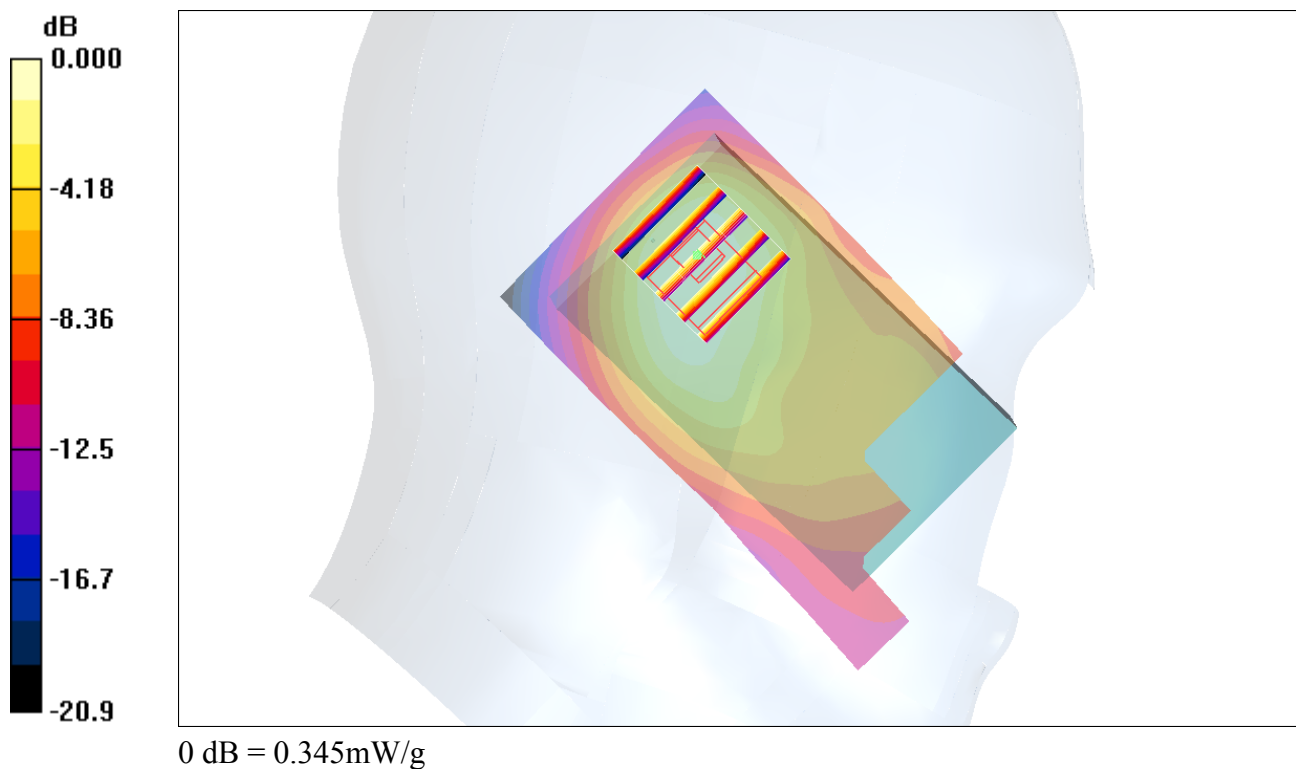

#13 WCDMA II_RMC12.2K_Right Cheek _Ch9262**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.30 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.88 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.640 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

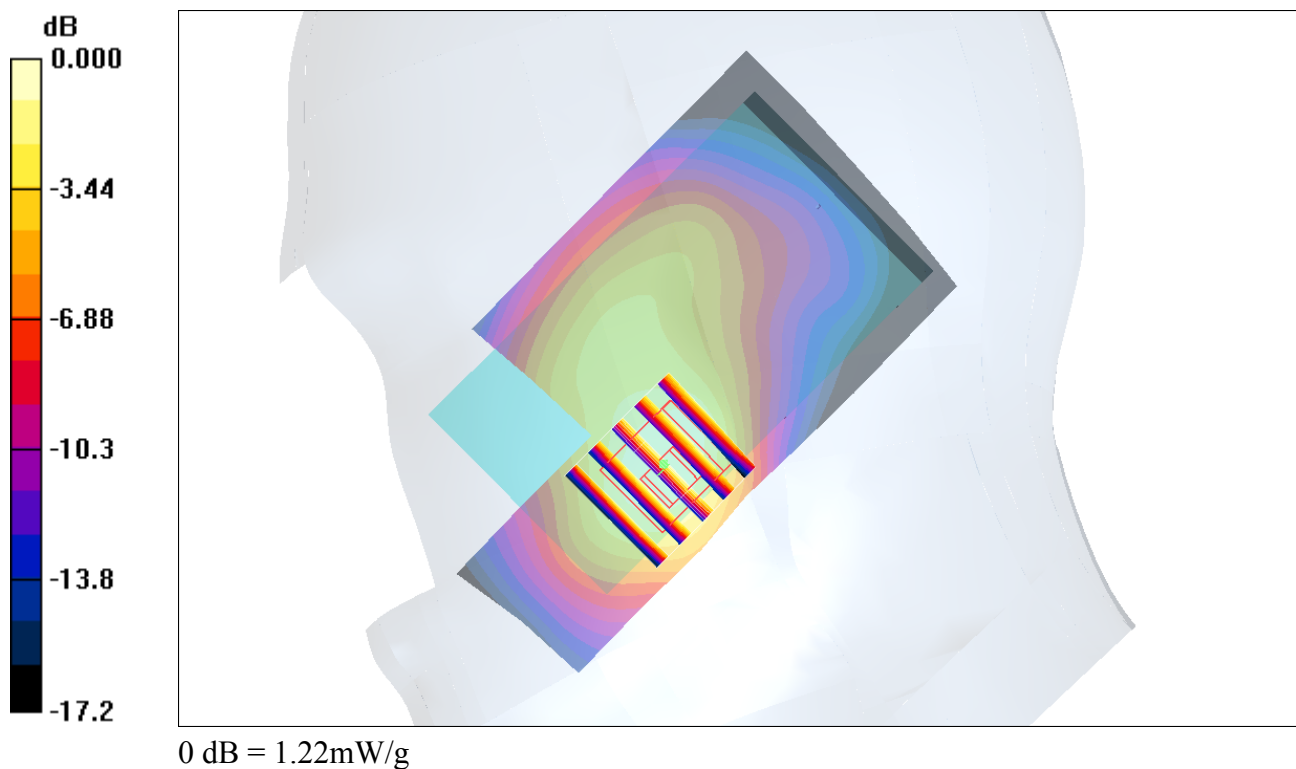


#14 WCDMA II_RMC12.2K_Right Cheek _Ch9538**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.8°C ; Liquid Temperature : 21.4°C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

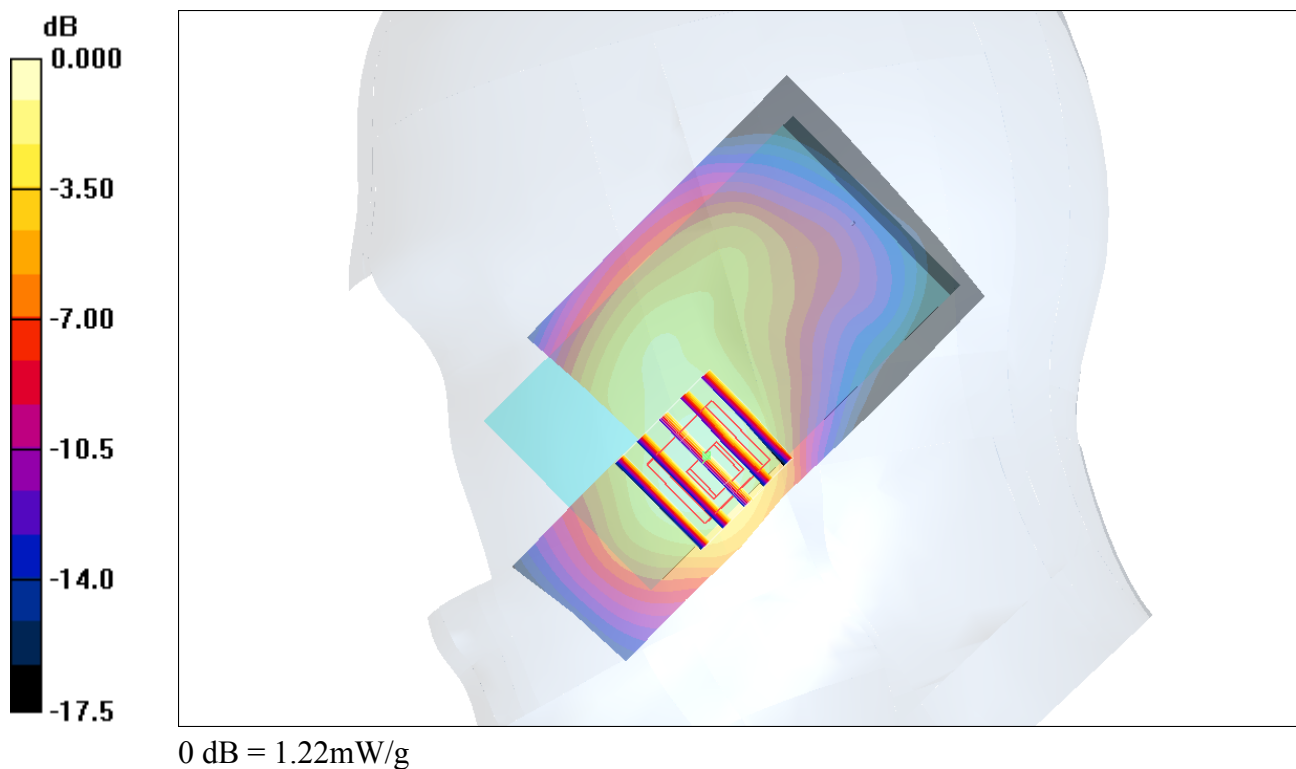Ch9538/Area Scan (41x71x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 1.34 mW/g **Ch9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.40 V/m ; Power Drift = -0.059 dB Peak SAR (extrapolated) = 1.98 W/kg **SAR(1 g) = 1.15 mW/g ; SAR(10 g) = 0.659 mW/g** Maximum value of SAR (measured) = 1.22 mW/g 

#14 WCDMA II_RMC12.2K_Right Cheek_Ch9538_2D**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_110628 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.39, 7.39, 7.39); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.34 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.40 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.659 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

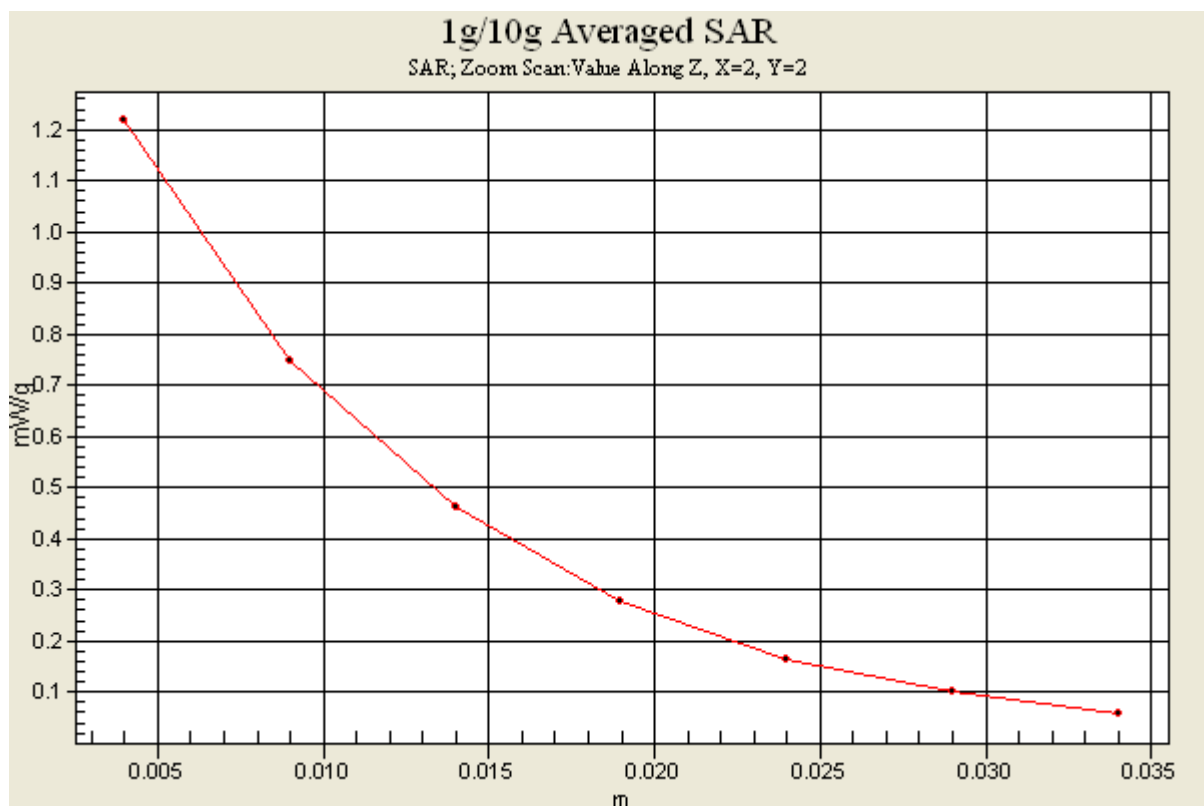

#19 GSM850_GPRS 10_Front Face_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.645 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 0.652 mW/g

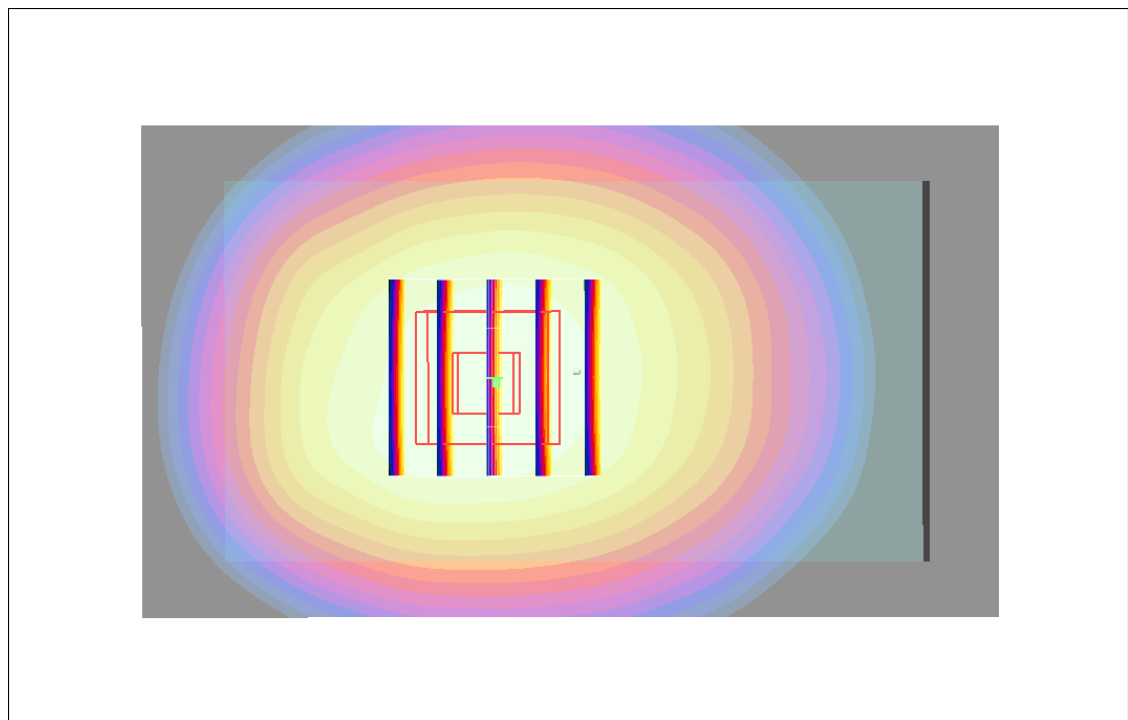

0 dB = 0.652mW/g

#20 GSM850_GPRS 10_Rear Face_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.811 mW/g

Maximum value of SAR (measured) = 1.19 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.660 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

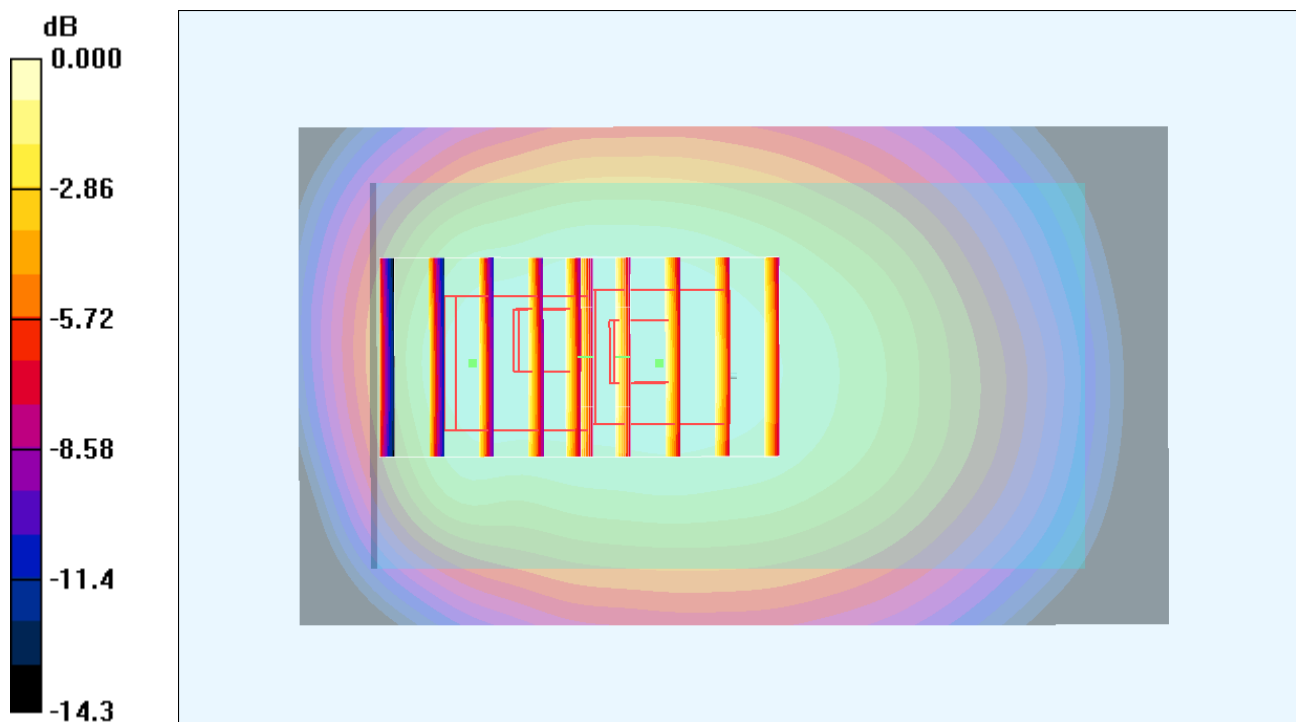

0 dB = 1.12mW/g

#20 GSM850_GPRS 10_Rear Face_1cm_Ch189_2D

DUT: 142113-03

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.811 mW/g

Maximum value of SAR (measured) = 1.19 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.7 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.977 mW/g; SAR(10 g) = 0.660 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

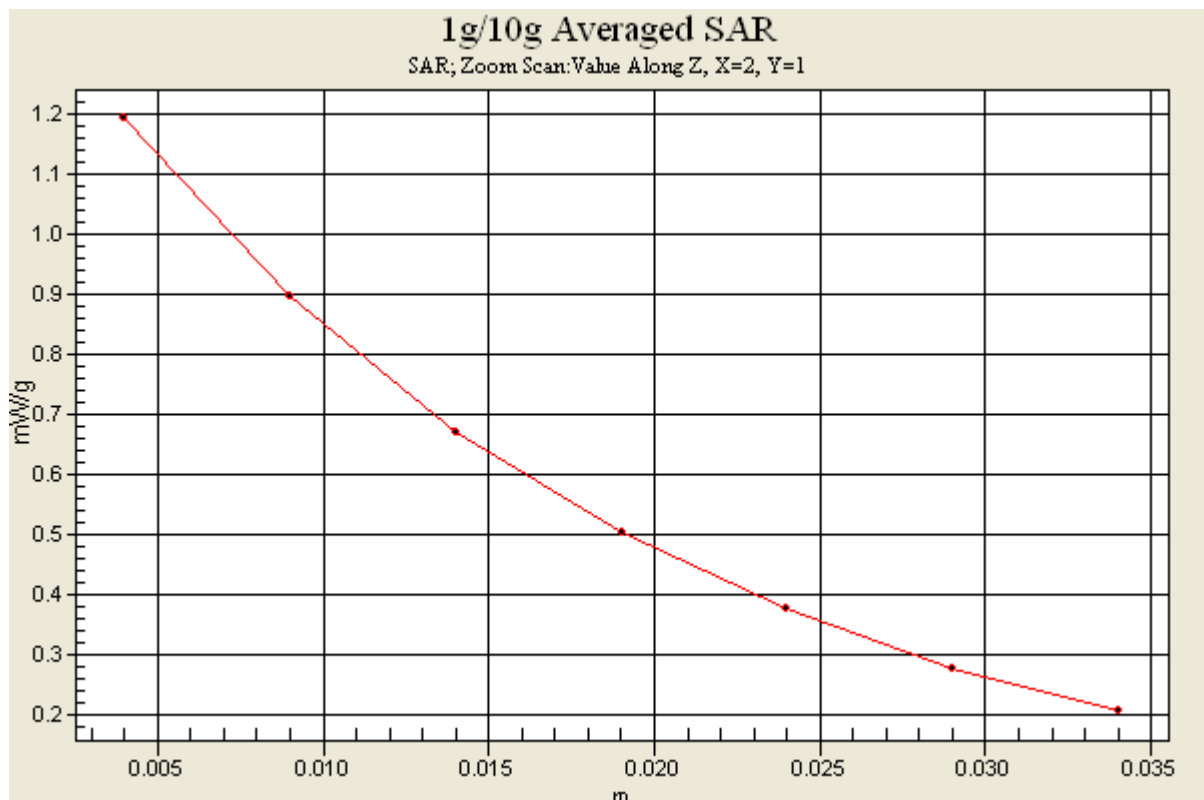

#21 GSM850_GPRS 10_Top Side_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.031 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.60 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.044 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.031 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.60 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

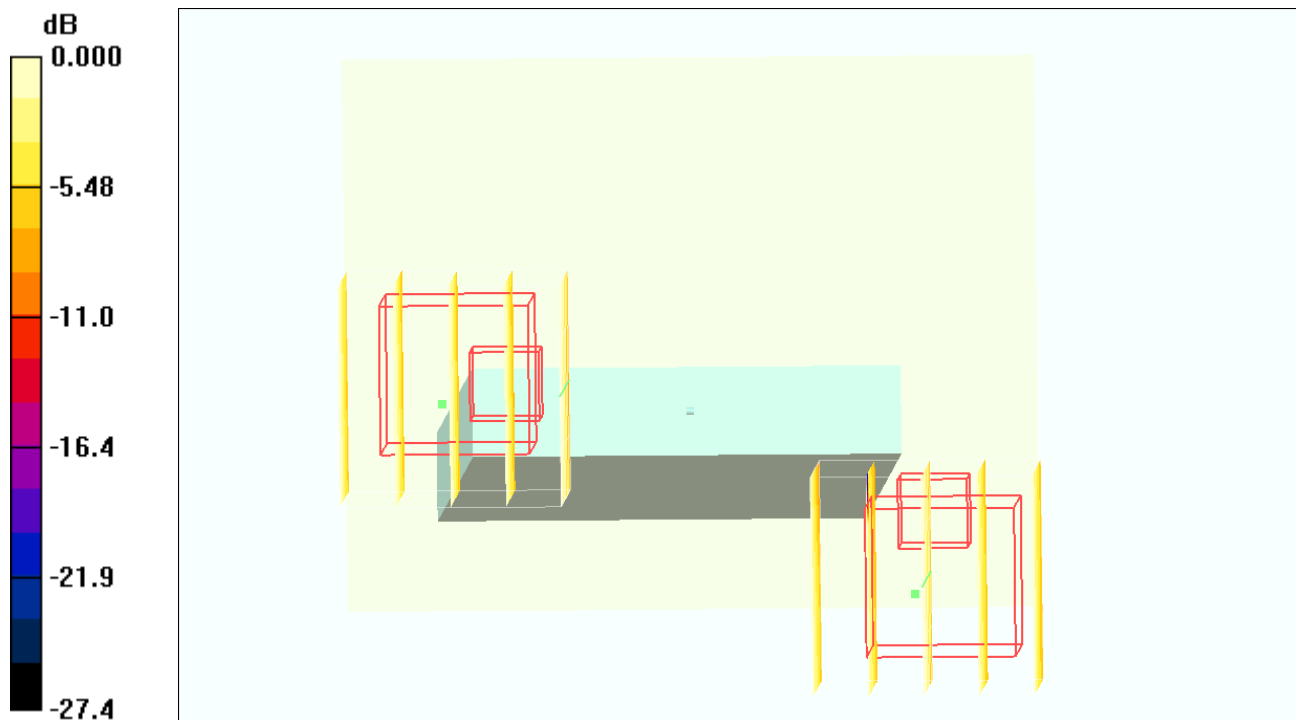

0 dB = 0.025mW/g

#22 GSM850_GPRS 10_Down Side_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.101 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.56 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

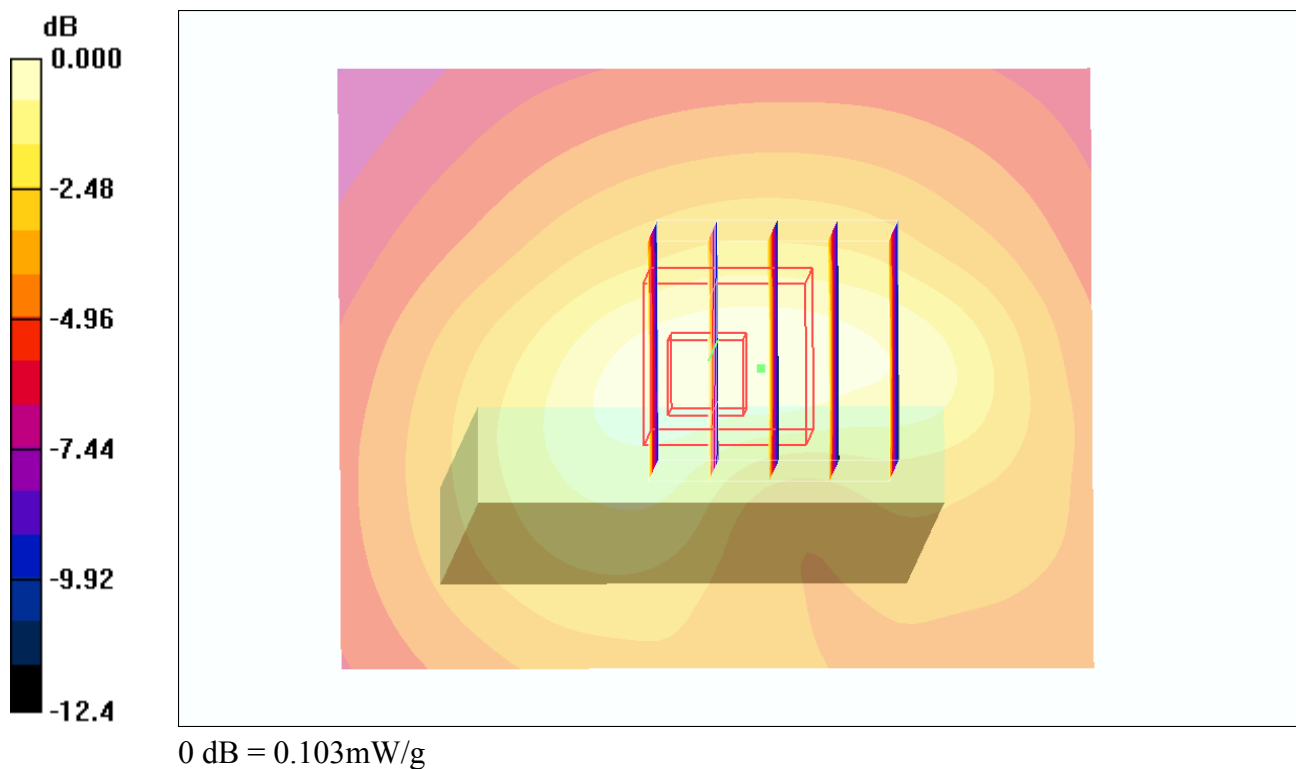

#23 GSM850_GPRS 10_Left Side_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.525 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.0 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.542 mW/g

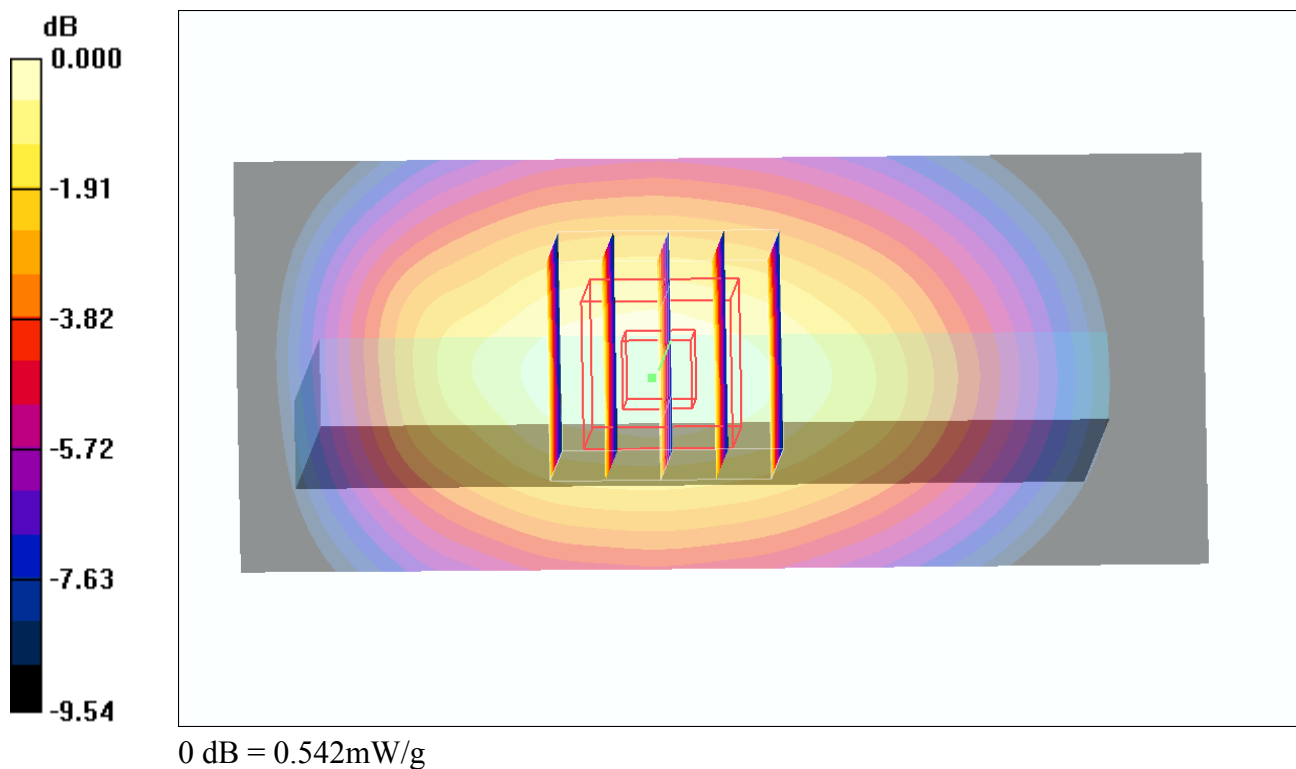

#24 GSM850_GPRS 10_Right Side_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110629 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.65, 8.65, 8.65); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.486 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.490 mW/g

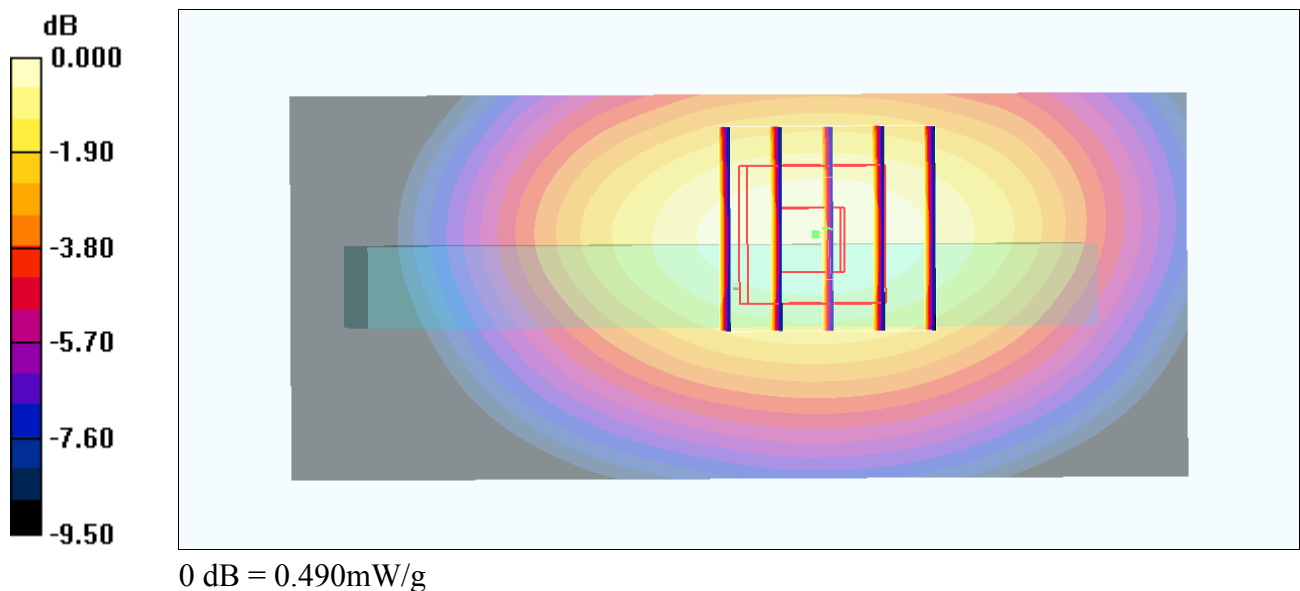

#26 GSM850_GPRS 10_Rear Face_1cm_Ch128**DUT: 142113-03**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch128/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.03 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.4 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.600 mW/g

Maximum value of SAR (measured) = 0.989 mW/g

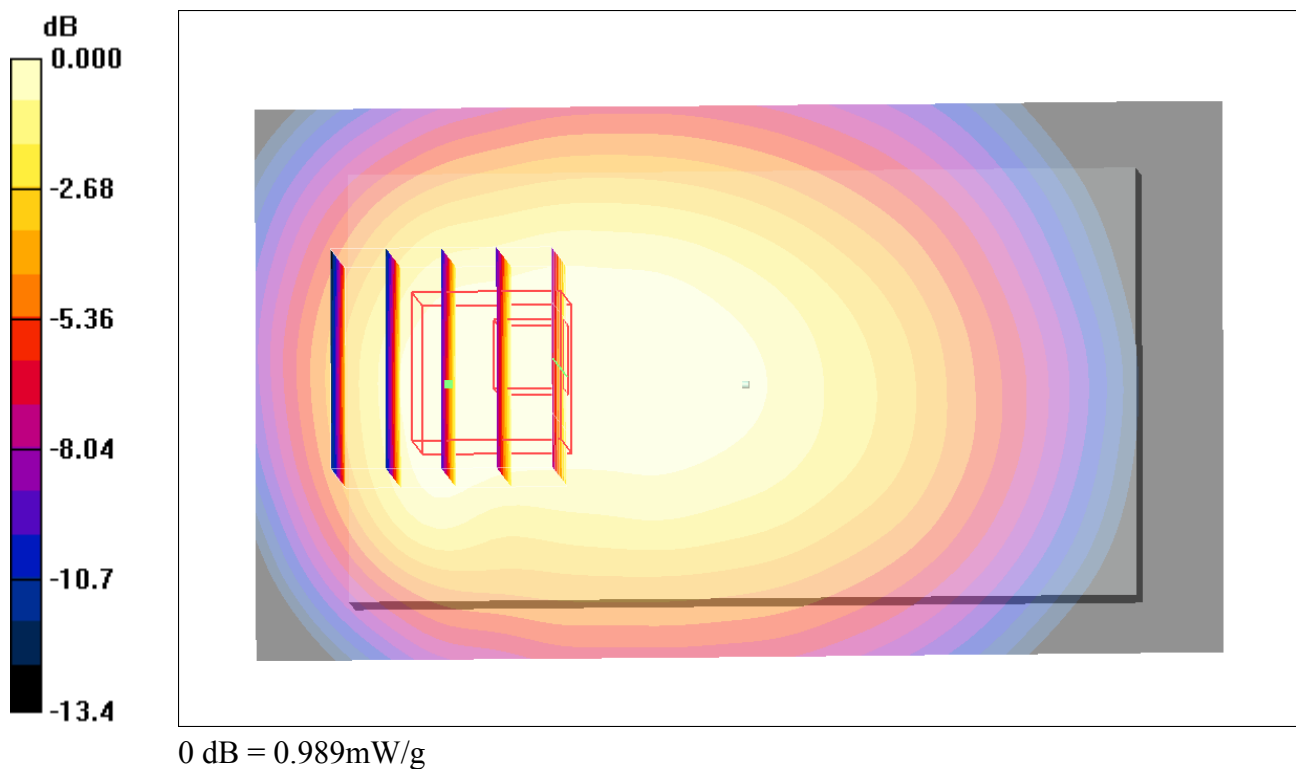

#27 GSM850_GPRS 10_Rear Face_1cm_Ch251**DUT: 142113-03**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.885 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.7 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 0.870 mW/g

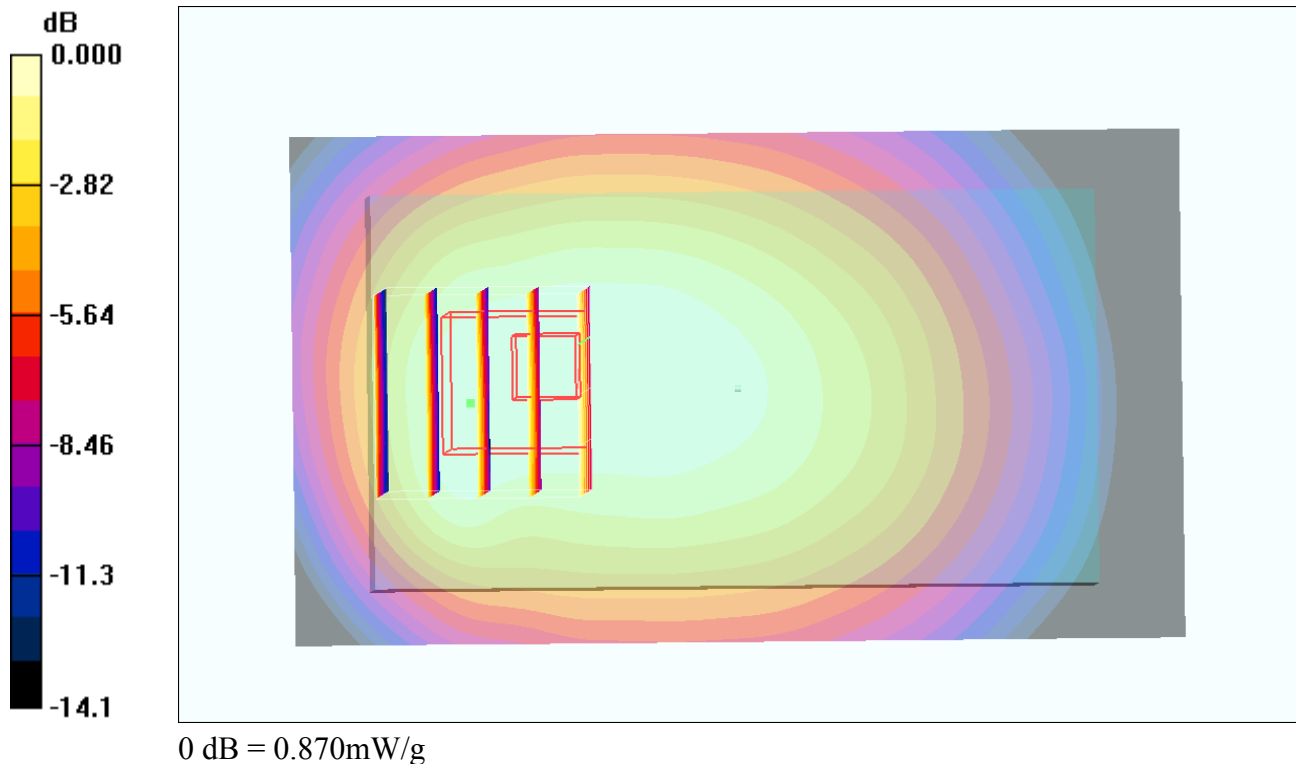

#19 GSM850_GPRS 10_Front Face_1cm_Ch189**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.645 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 0.652 mW/g

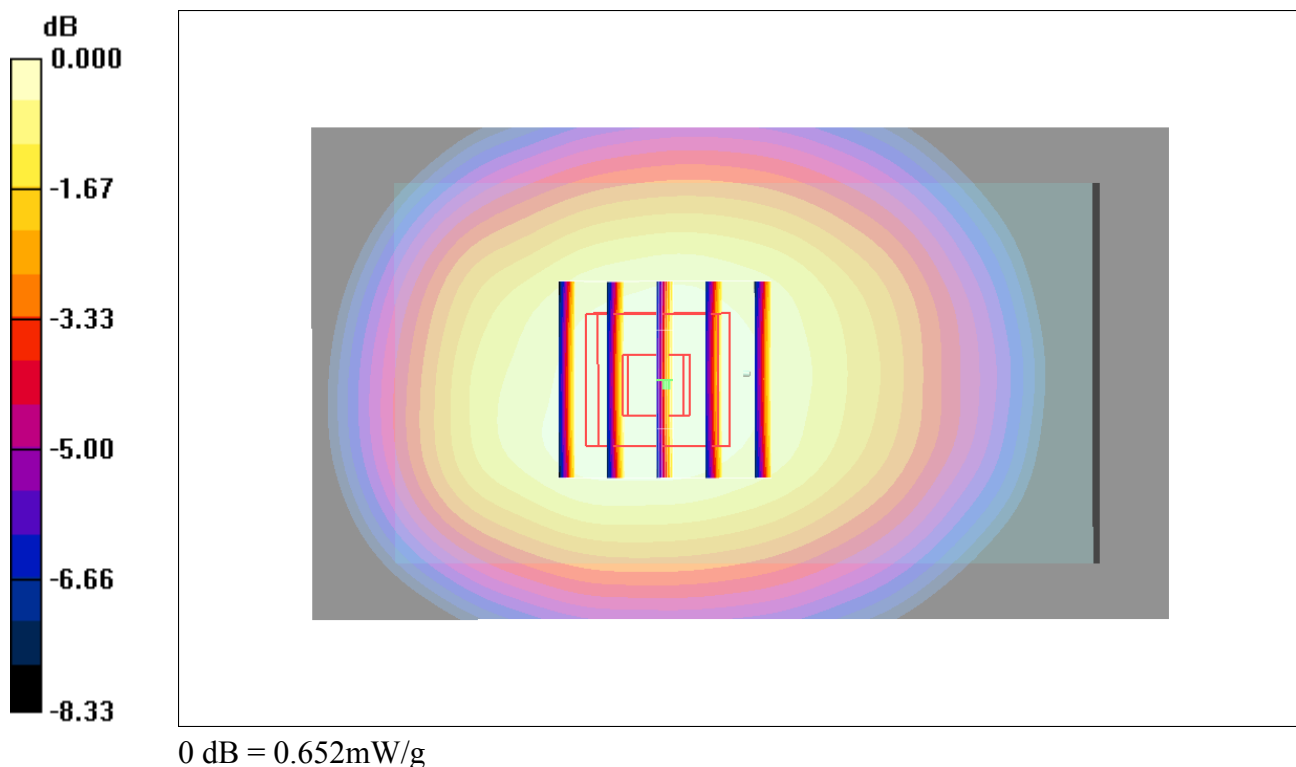

#25 GSM850_GPRS 10_Rear Face_1cm_Ch189_Earphone**DUT: 142113-03**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(8.84, 8.84, 8.84); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch189/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.02 mW/g



Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 0.887 mW/g

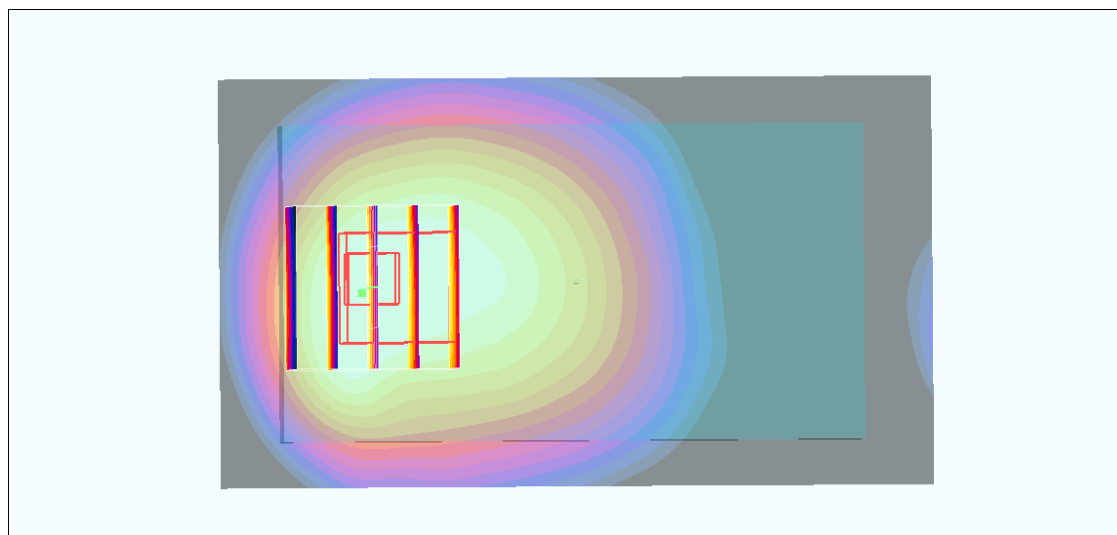

0 dB = 0.887mW/g

#35 GSM850_GPRS 10_Rear Face_1cm_Ch128_Earphone**DUT: 142113-03**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(8.84, 8.84, 8.84); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch128/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.10 mW/g



Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.917 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 0.980 mW/g

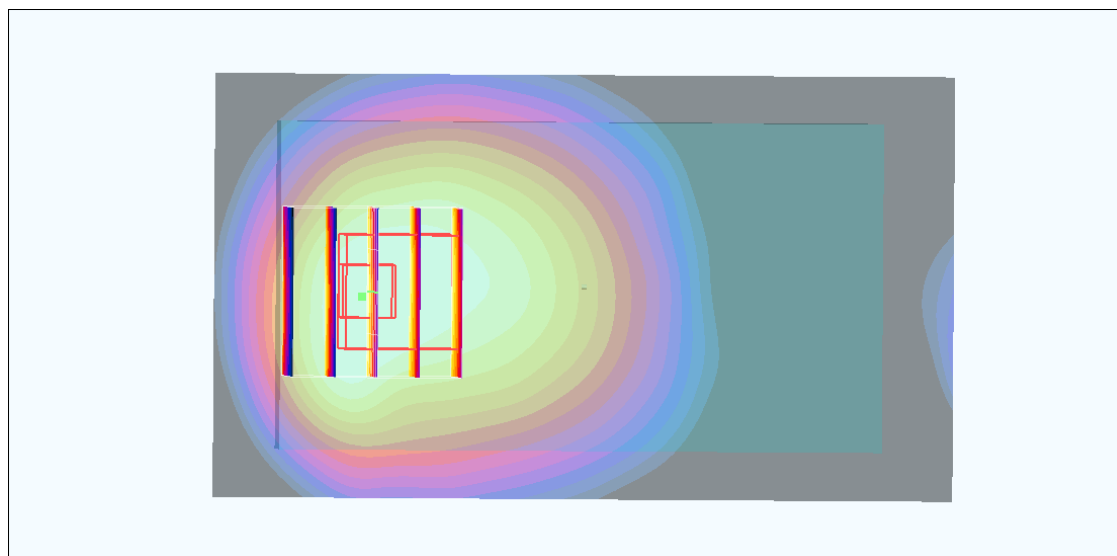

0 dB = 0.980mW/g

#36 GSM850_GPRS 10_Rear Face_1cm_Ch251_Earphone**DUT: 142113-03**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_110628 Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3731; ConvF(8.84, 8.84, 8.84); Calibrated: 2010/9/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.790 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 0.711 mW/g

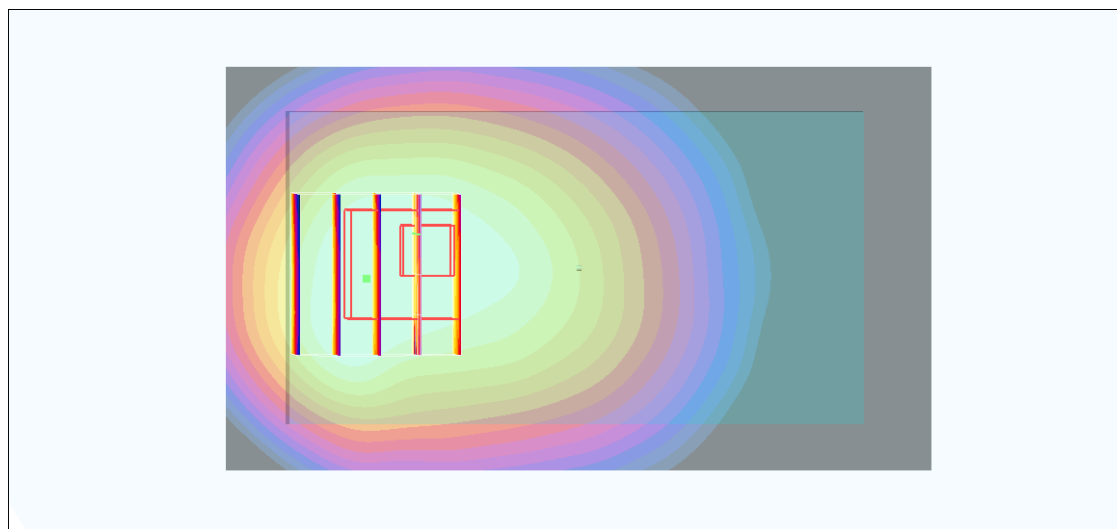

0 dB = 0.711mW/g

#28 GSM1900_GPRS 8_Front Face_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.583 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.609 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.344 mW/g

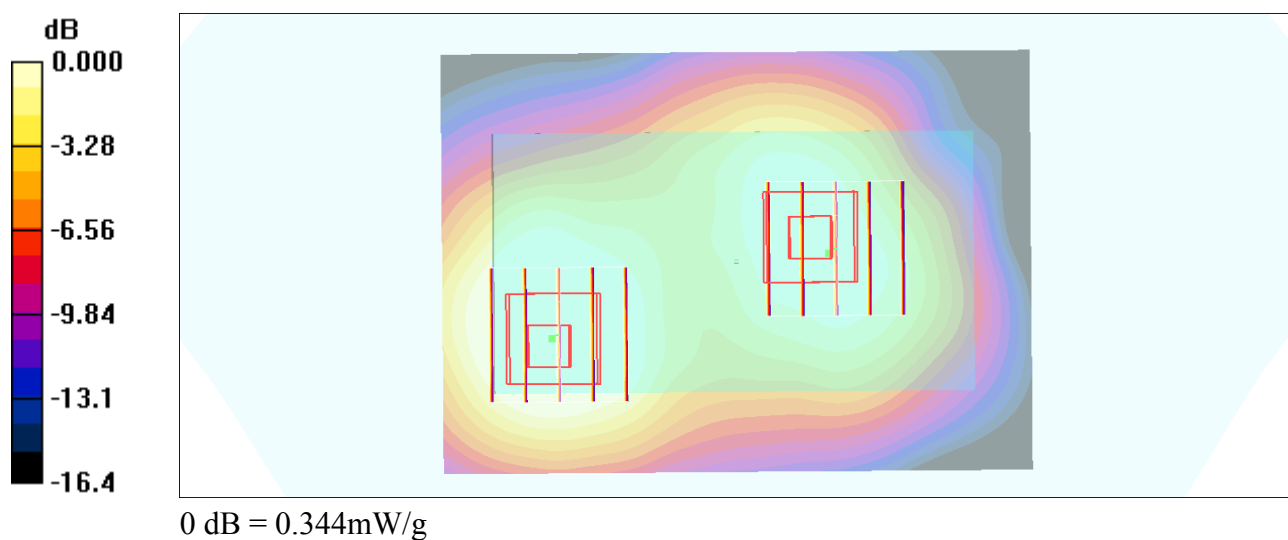

#28 GSM1900_GPRS 8_Front Face_1cm_Ch512_2D**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.583 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.609 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.344 mW/g

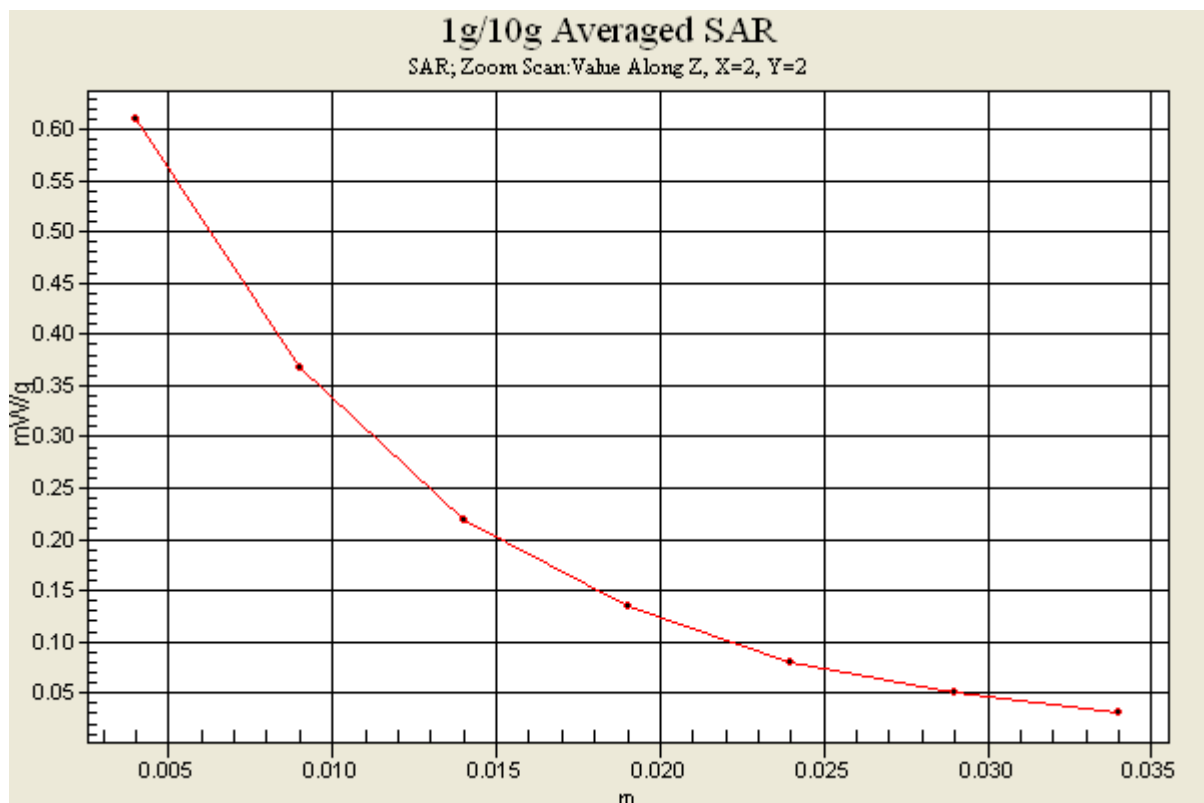

#29 GSM1900_GPRS 8_Rear Face_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.616 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

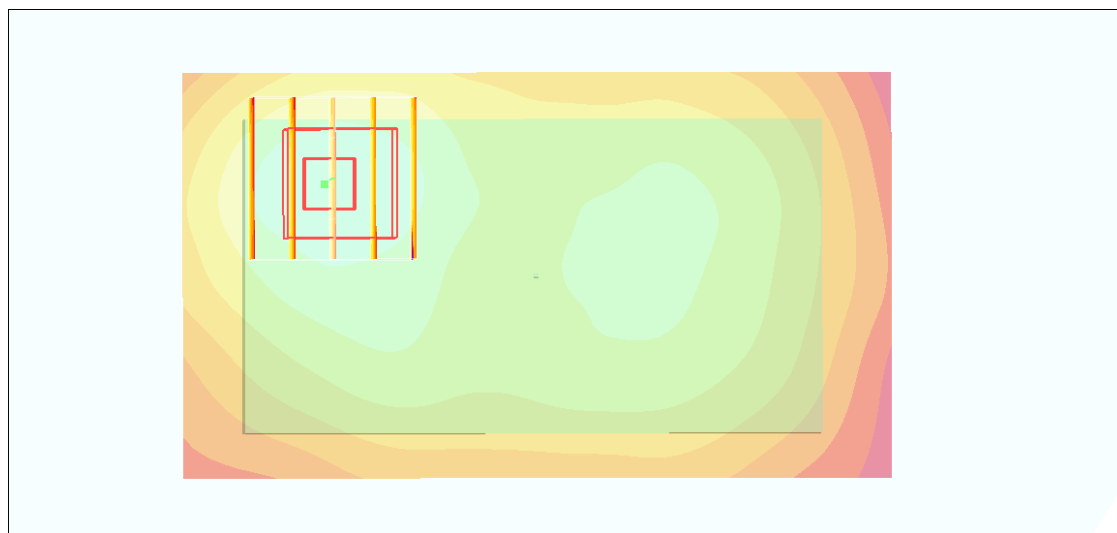

0 dB = 0.584mW/g

#30 GSM1900_GPRS 8_Top Side_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.042 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.17 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.057 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

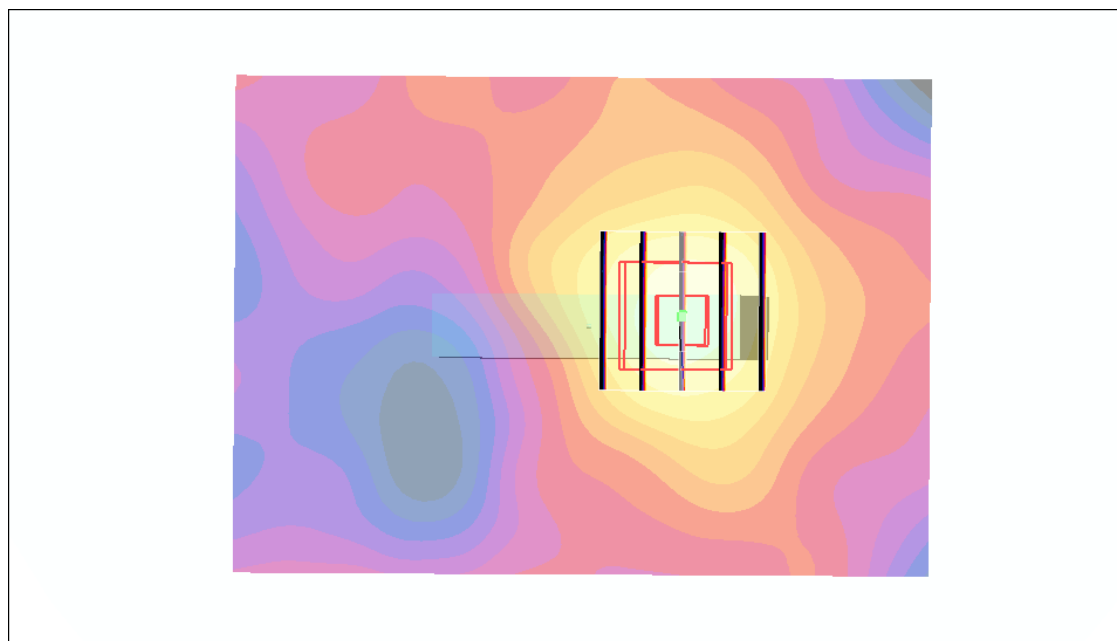

0 dB = 0.042mW/g

#31 GSM1900_GPRS 8_Down Side_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.331 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.333 mW/g

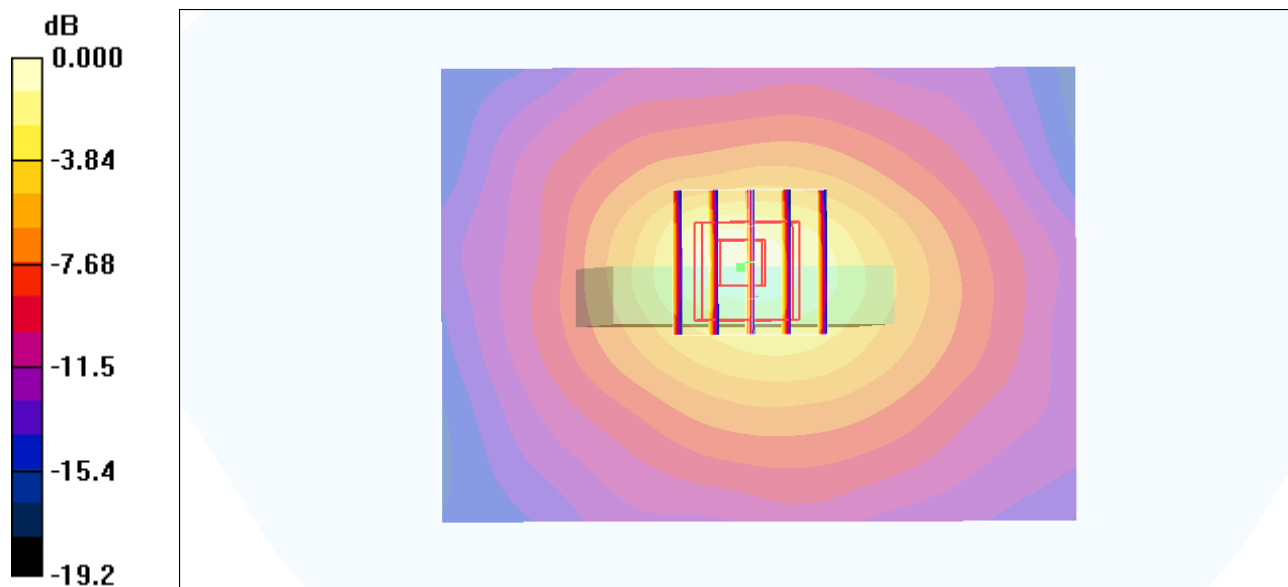

0 dB = 0.333mW/g

#32 GSM1900_GPRS 8_Left Side_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.189 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

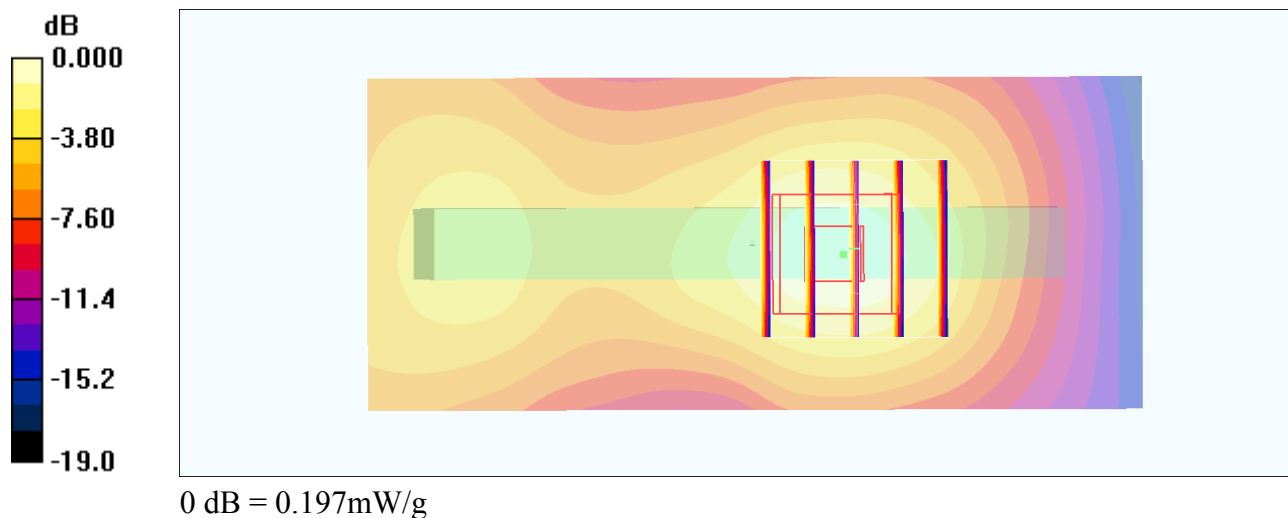

#33 GSM1900_GPRS 8_Right Side_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.272 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.28 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.268 mW/g

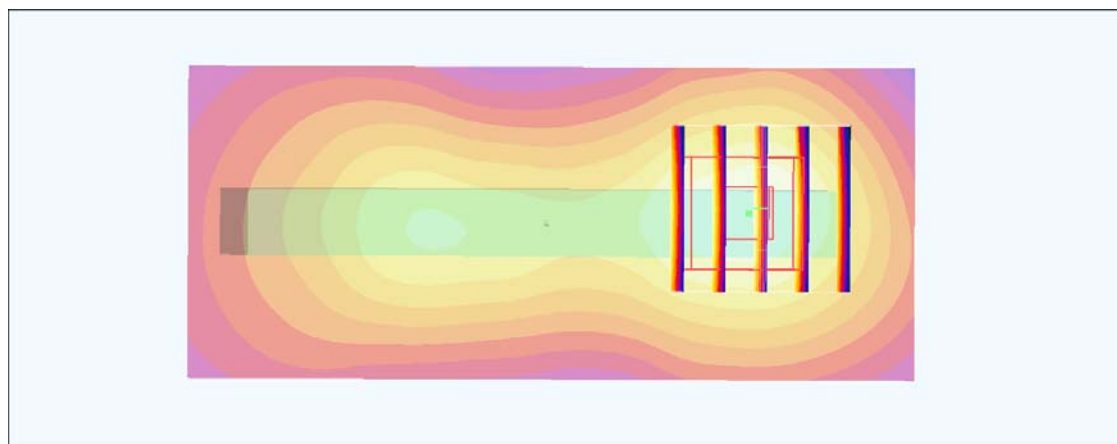

0 dB = 0.268mW/g

#29 GSM1900_GPRS 8_Rear Face_1cm_Ch512**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.616 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.584 mW/g

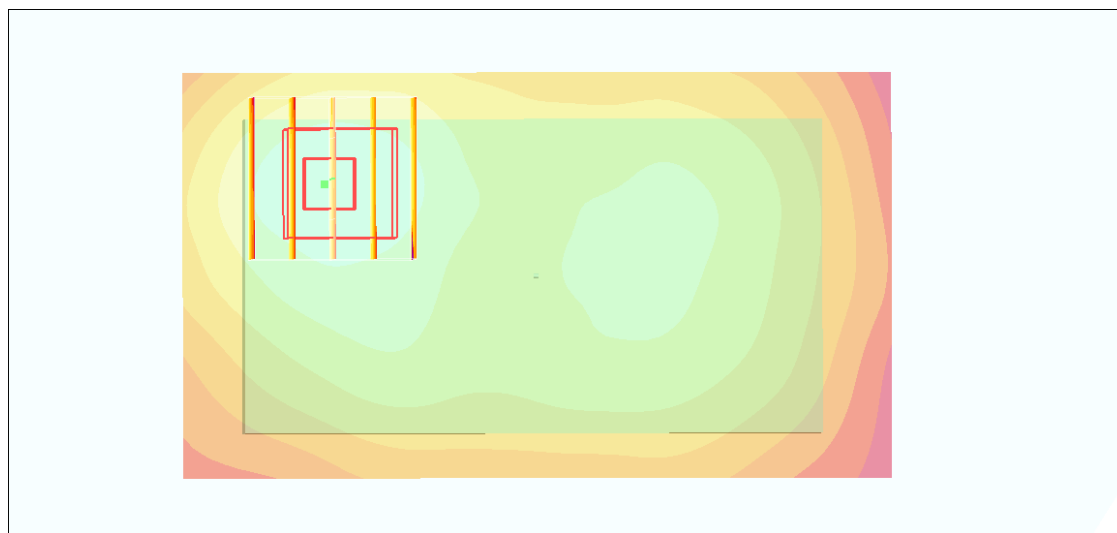

0 dB = 0.584mW/g

#34 GSM1900_GPRS 8_Front Face_1cm_Ch512_Earphone**DUT: 142113-03**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110629 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.26, 7.26, 7.26); Calibrated: 2010/11/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch512/Area Scan (51x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.479 mW/g

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.486 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.373 mW/g

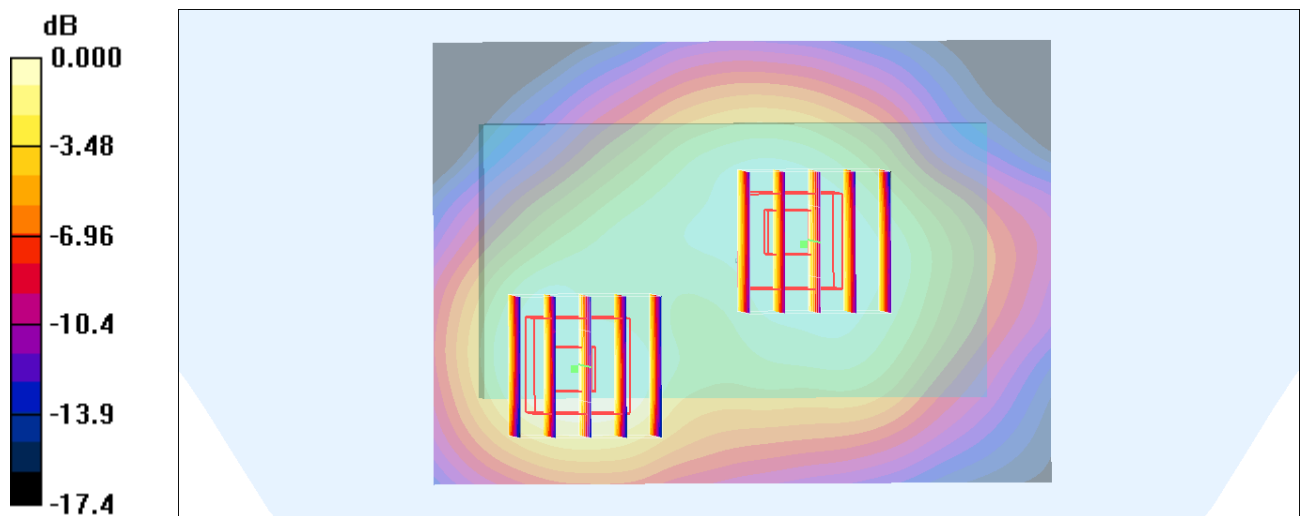

0 dB = 0.373mW/g

#48 WCDMA II_RMC12.2K_Front Face _1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.533 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

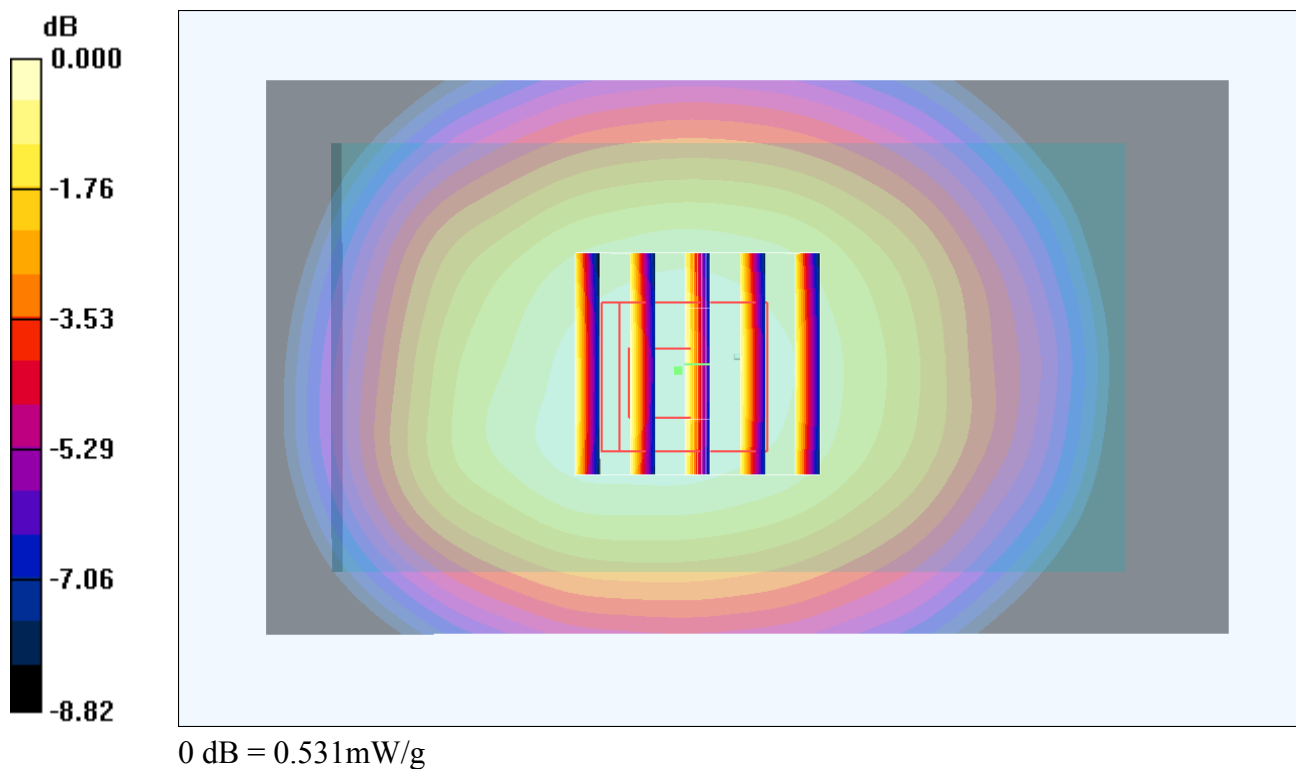

#49 WCDMA II_RMC12.2K_Rear Face _1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.926 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.633 mW/g

Maximum value of SAR (measured) = 0.933 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

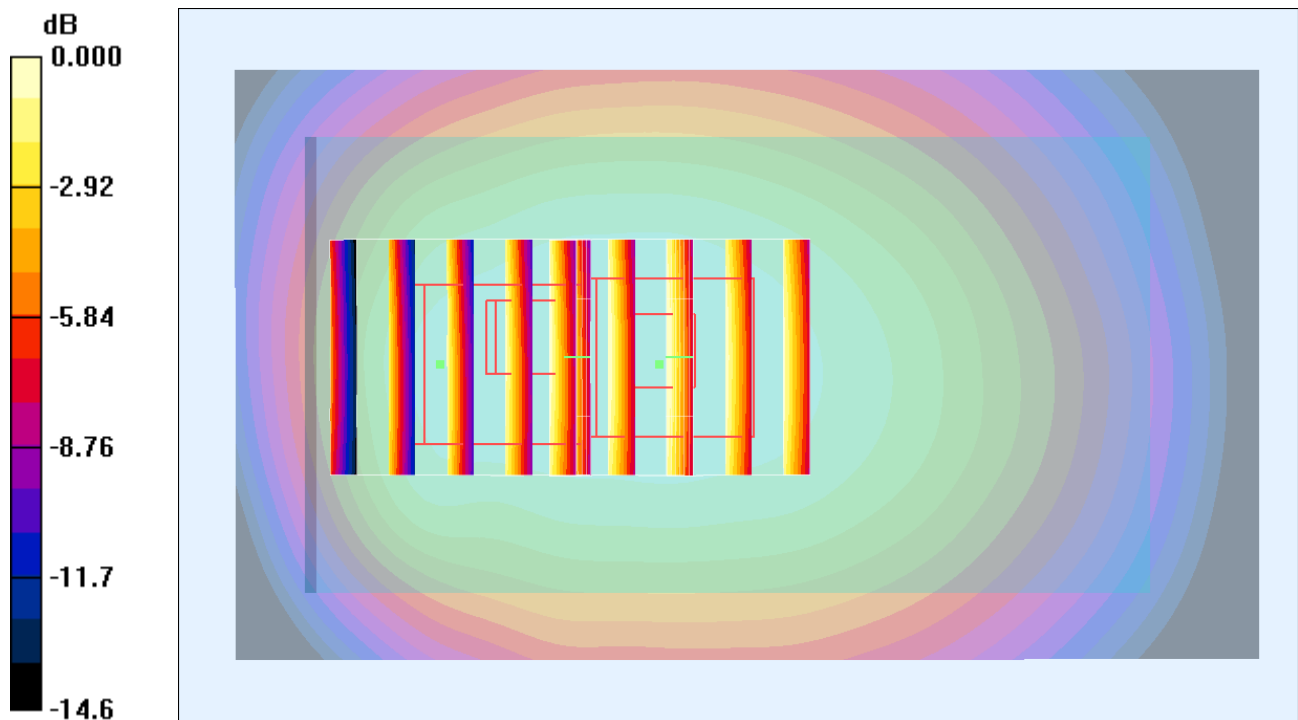

0 dB = 0.874mW/g

#49 WCDMA II_RMC12.2K_Rear Face_1cm_Ch4182_2D**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.926 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.633 mW/g

Maximum value of SAR (measured) = 0.933 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

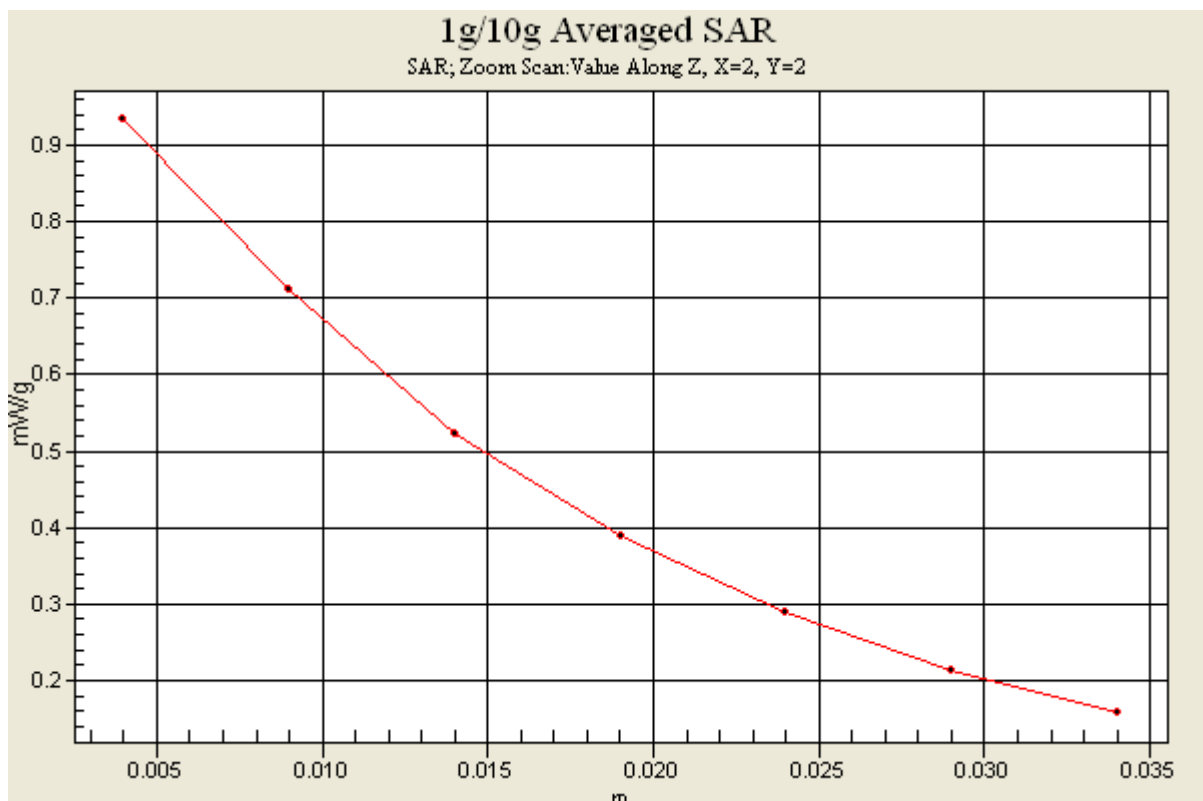

#50 WCDMA II_RMC12.2K_Top Side _1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm.

Maximum value of SAR (interpolated) = 0.023 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.18 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.036 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.024 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.18 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.035 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

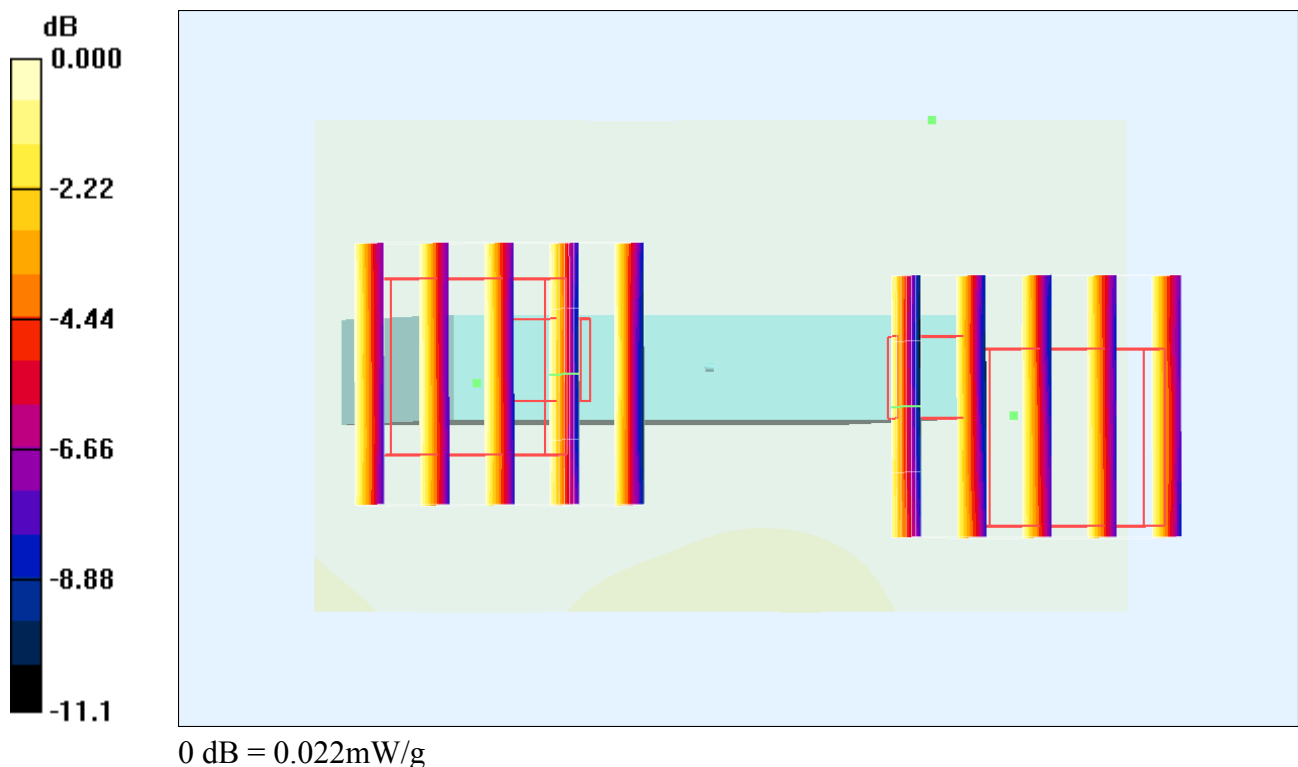

#51 WCDMA II_RMC12.2K_Down Side_1cm_Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.078 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.06 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

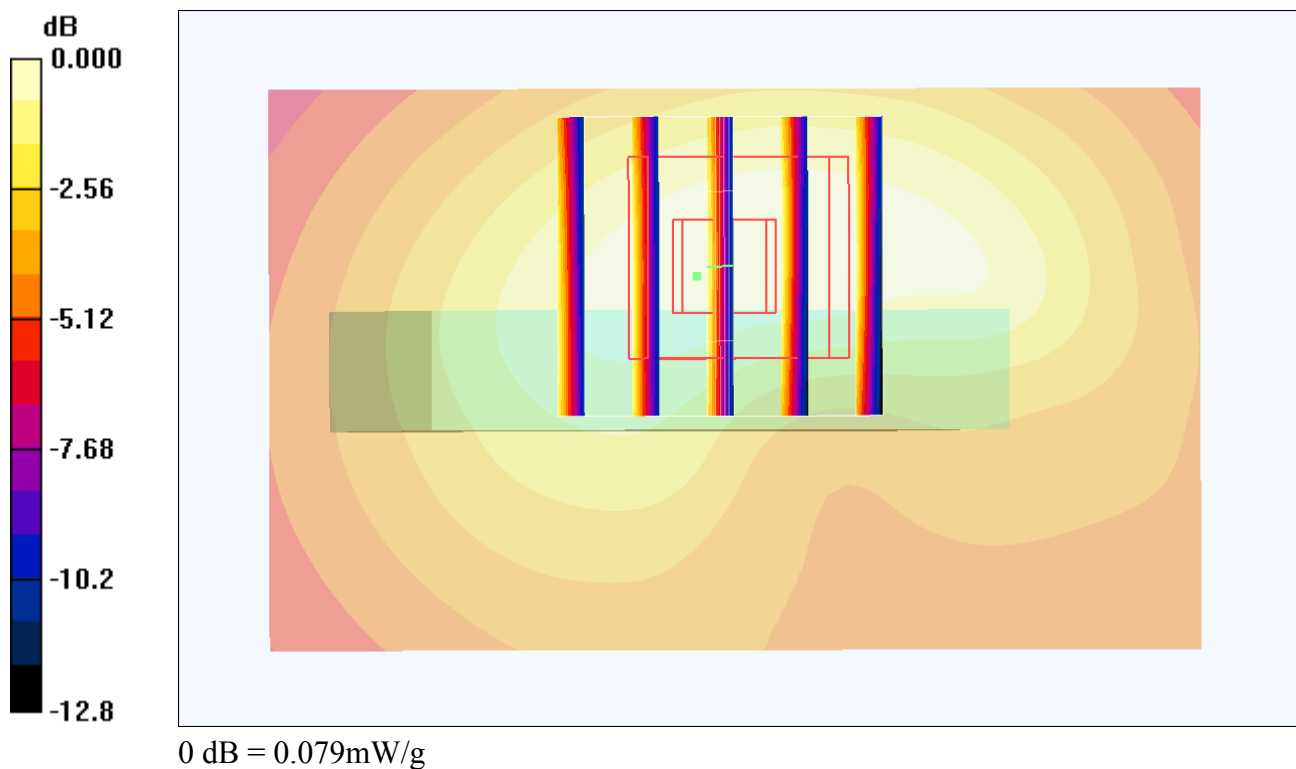

#52 WCDMA II_RMC12.2K_Left Side_1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.517 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.537 mW/g

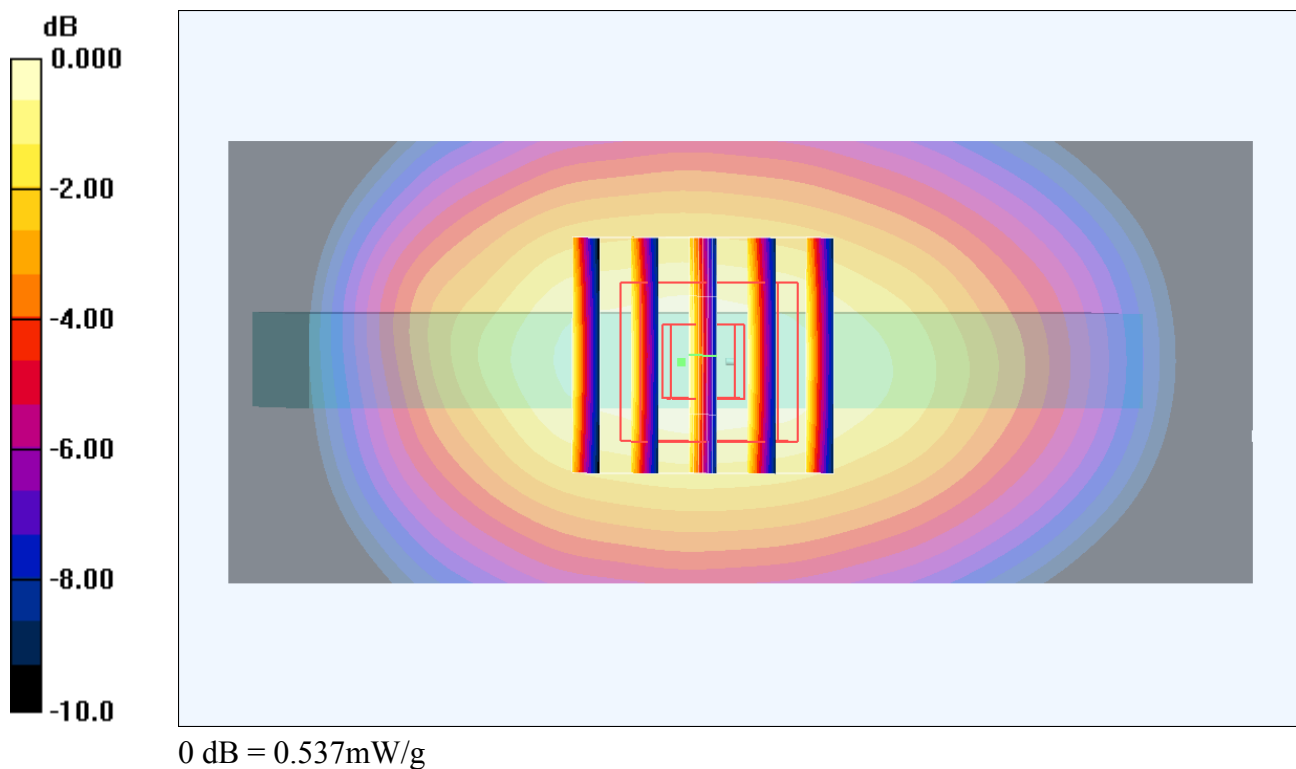

#53 WCDMA II_RMC12.2K_Right Side_1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.381 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

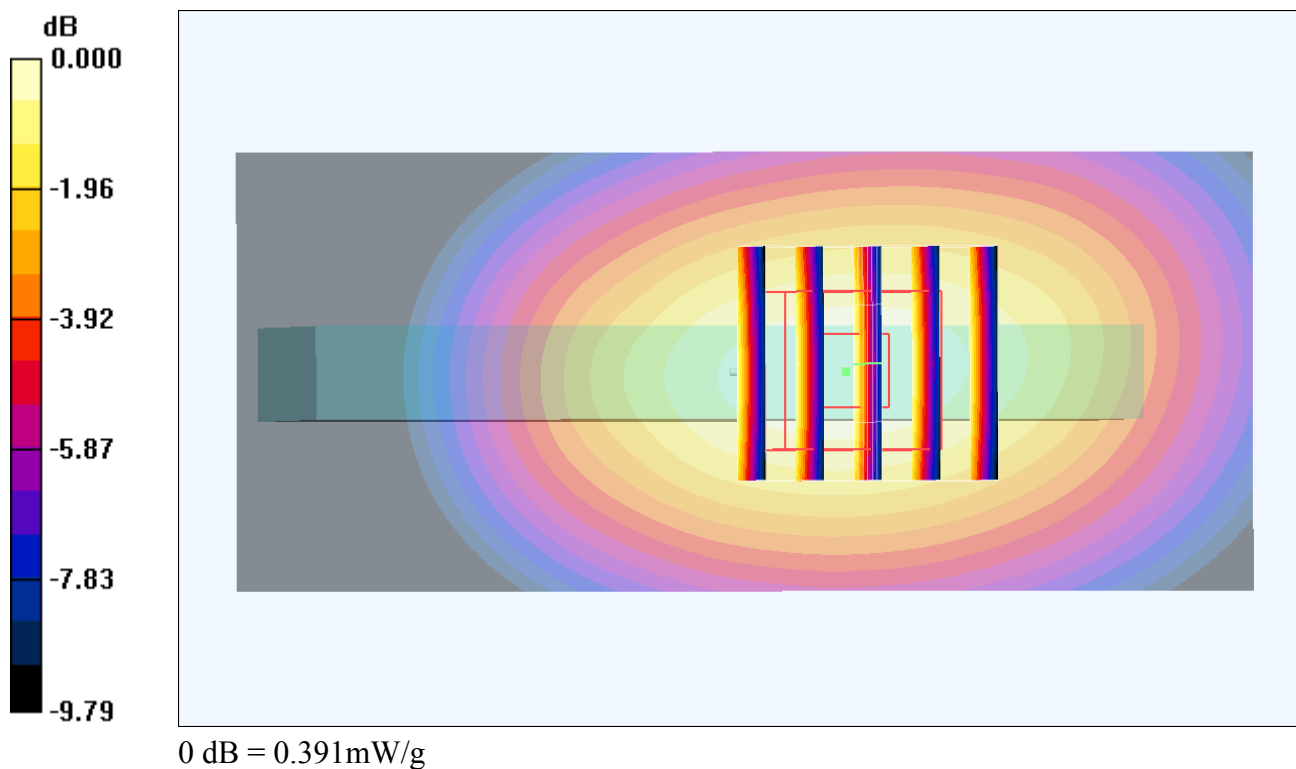

#55 WCDMA II_RMC12.2K_Rear Face_1cm _Ch4132**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.987$ mho/m; $\epsilon_r = 56.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.334 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.483 mW/g

Maximum value of SAR (measured) = 0.762 mW/g

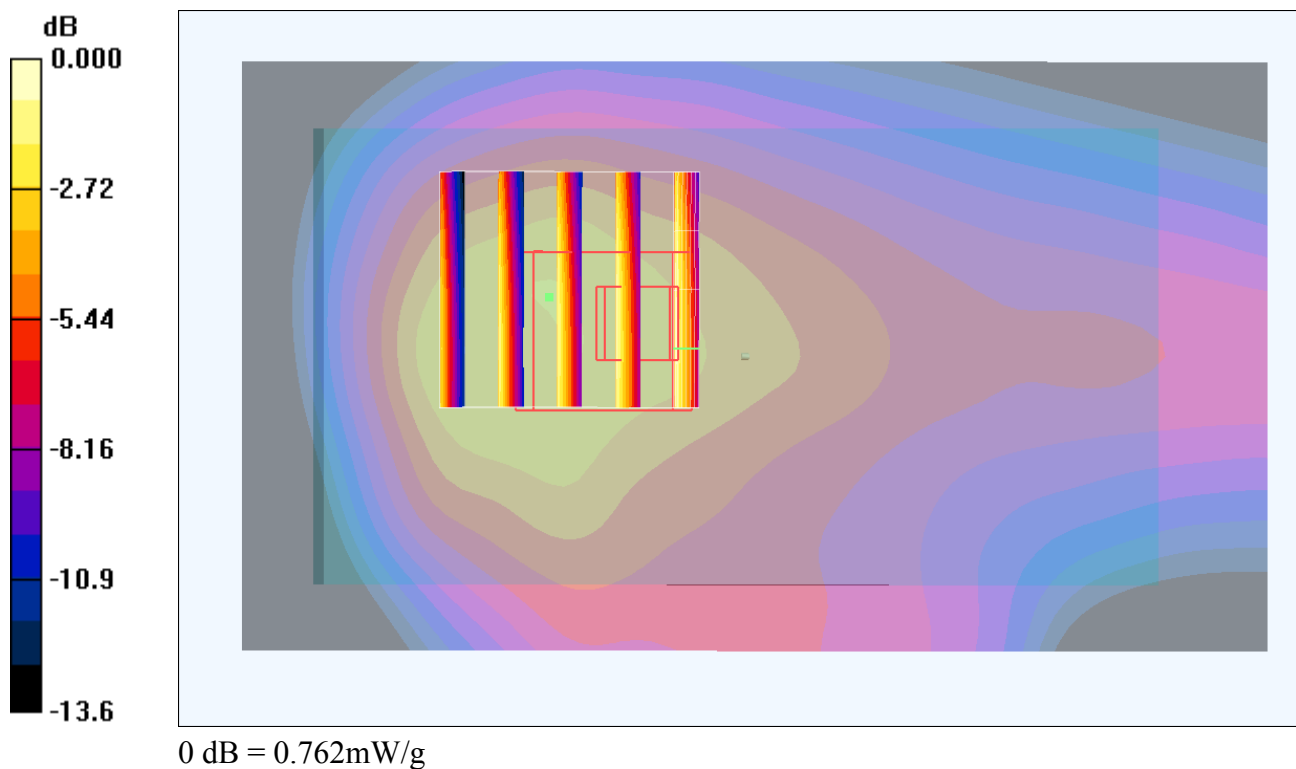

#56 WCDMA II_RMC12.2K_Rear Face_1cm _Ch4233**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 847$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4233/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.784 mW/g


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.5 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.535 mW/g

Maximum value of SAR (measured) = 0.789 mW/g

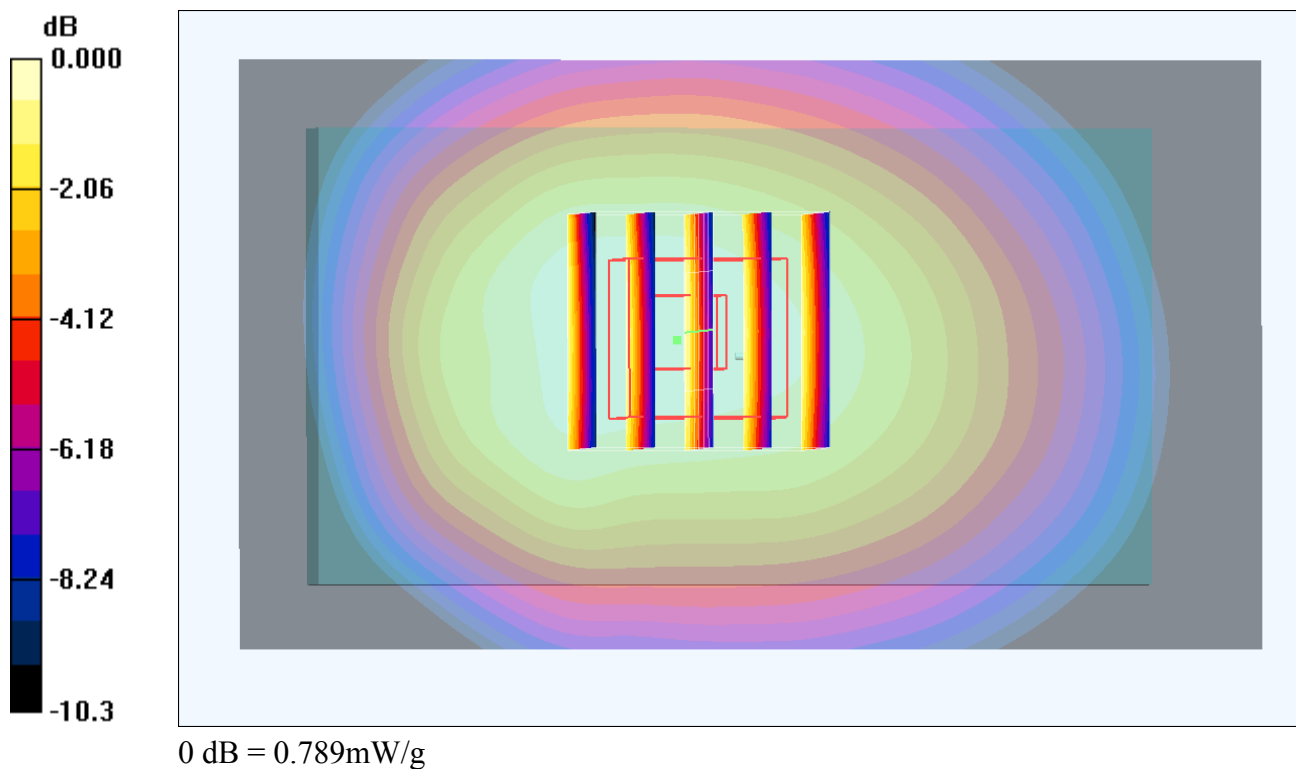

#48 WCDMA II_RMC12.2K_Front Face _1cm _Ch4182**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.533 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

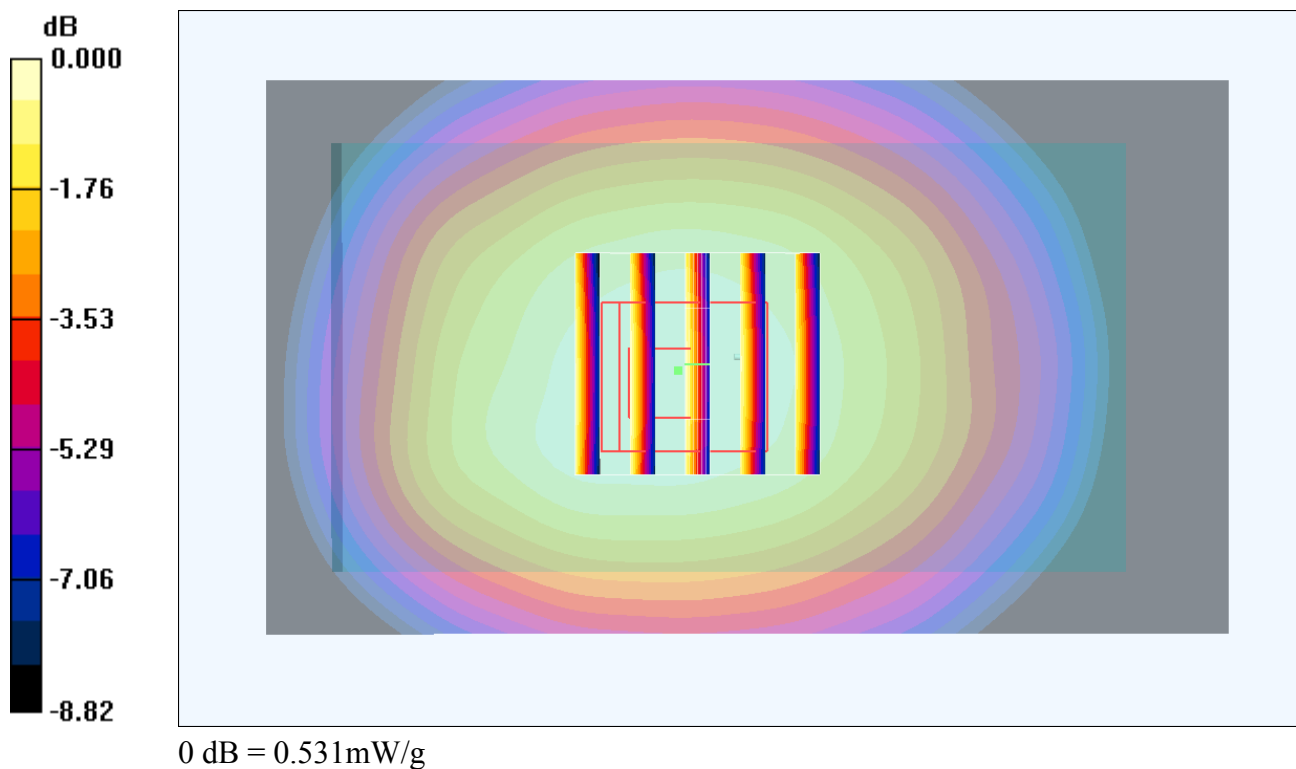

#54 WCDMA II_RMC12.2K_Rear Face_1cm_Ch4182_Earphone**DUT: 142113-03**

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_110630 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 56.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.35, 6.35, 6.35); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.434 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.272 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

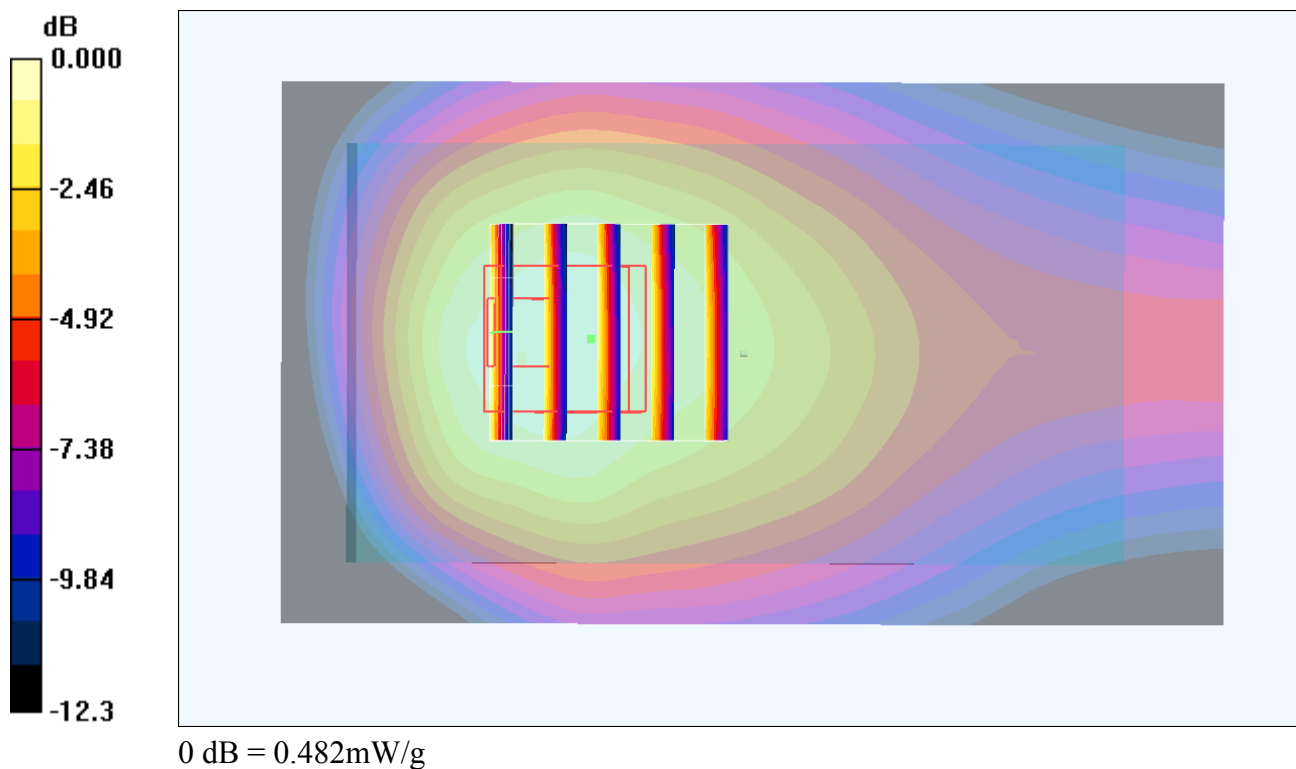

#37 WCDMA II_RMC12.2K_Front Face_1cm _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.848 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.747 mW/g

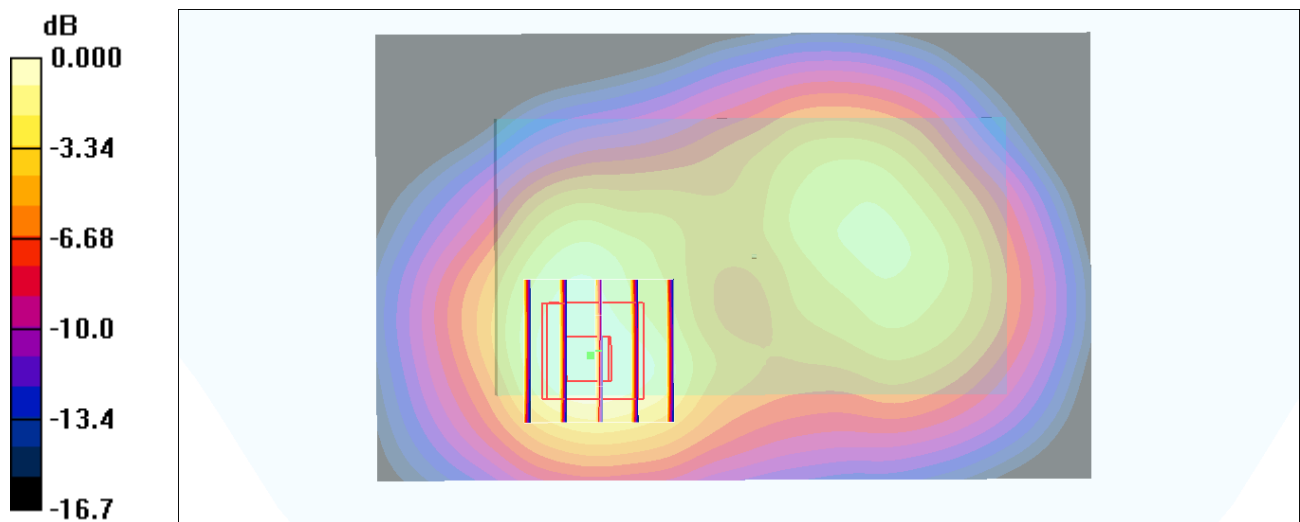

0 dB = 0.747mW/g

#38 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.956 mW/g



Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.474 mW/g

Maximum value of SAR (measured) = 0.946 mW/g

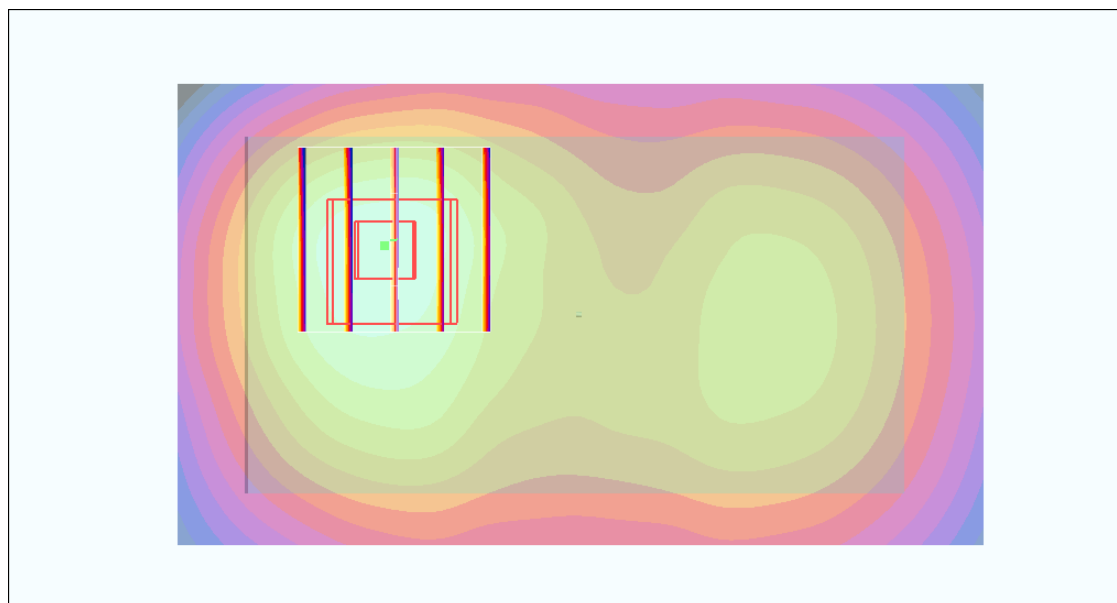

0 dB = 0.946mW/g

#39 WCDMA II_RMC12.2K_Top Side_1cm _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.110 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.48 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.109 mW/g

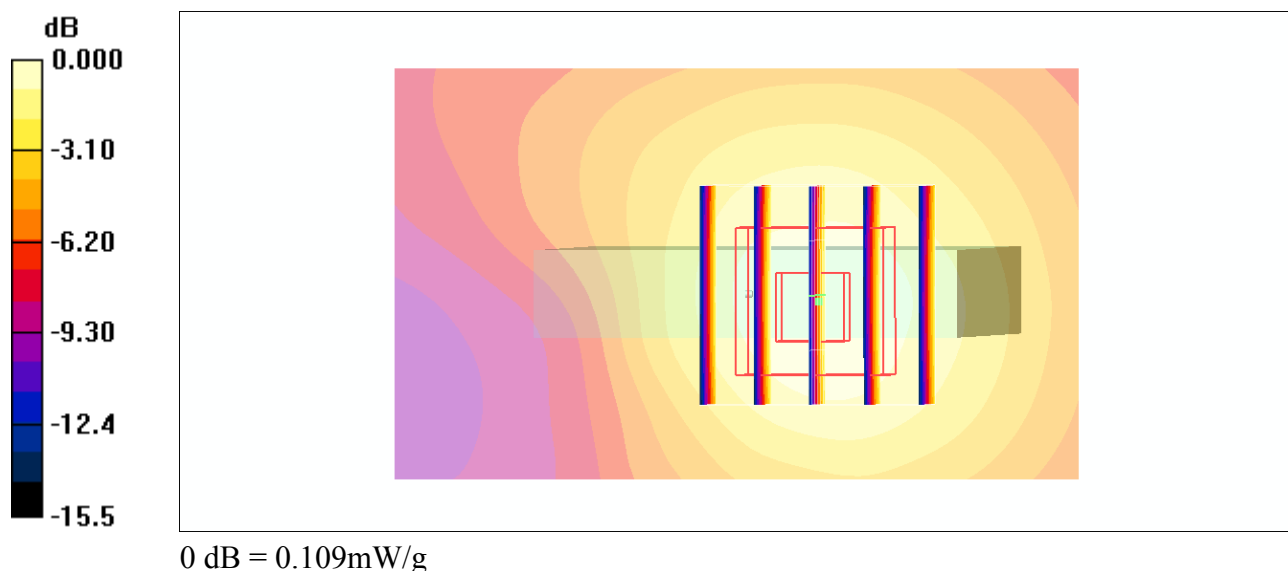

#40 WCDMA II_RMC12.2K_Down Side_1cm _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (31x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.557 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.955 W/kg

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.592 mW/g

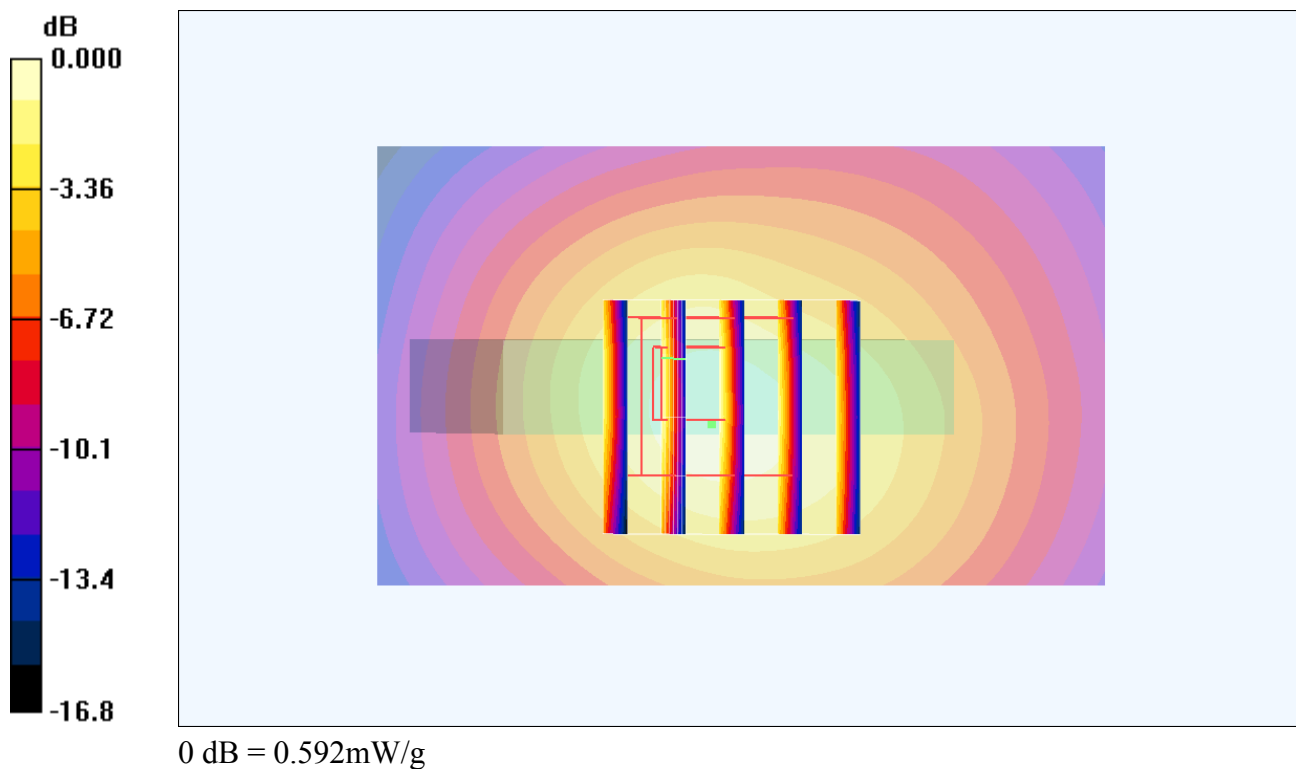

#41 WCDMA II_RMC12.2K_Left Side_1cm _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.241 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.242 mW/g

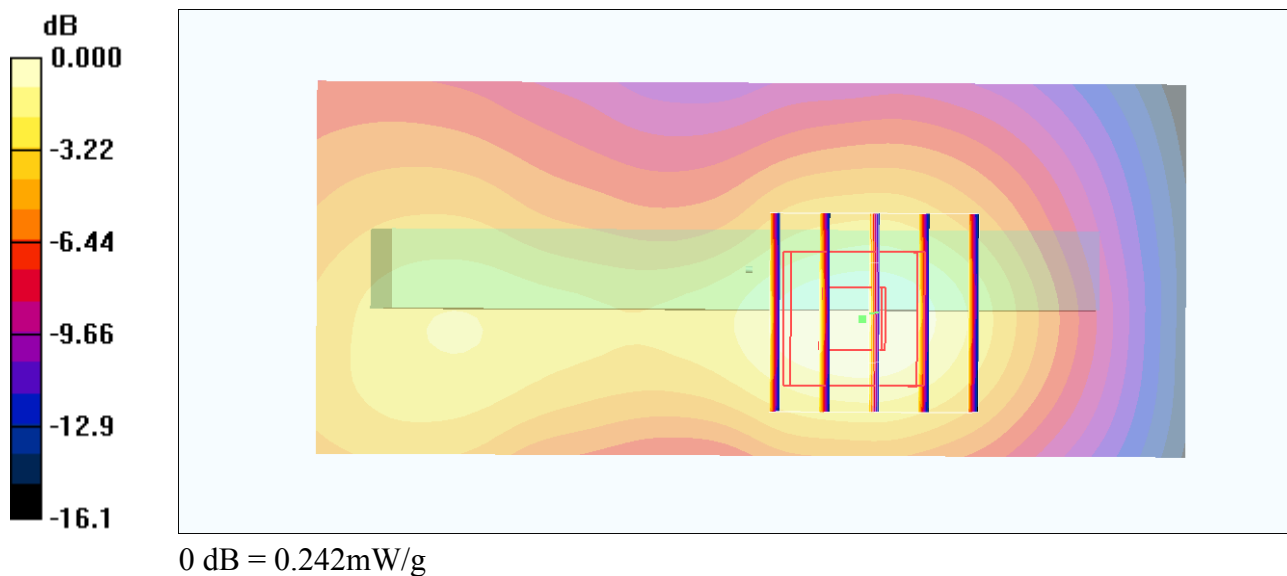

#42 WCDMA II_RMC12.2K_Right Side_1cm_Ch9400**DUT: 142113-03**

Communication-System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (31x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.305 mW/g

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.307 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

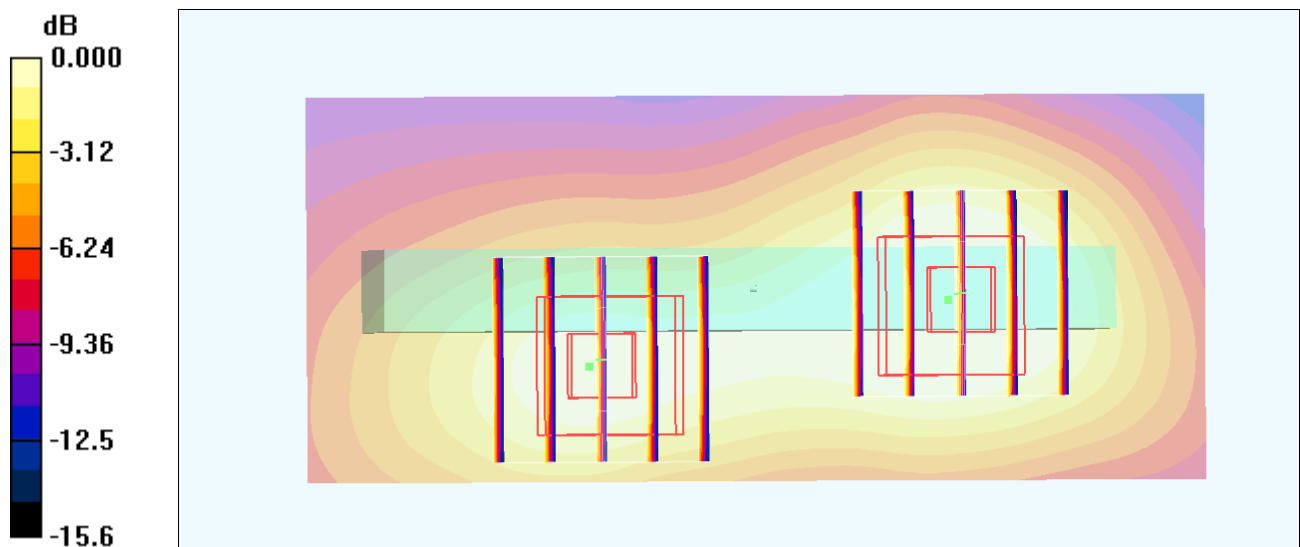

0 dB = 0.200mW/g

#44 WCDMA II_RMC12.2K_Rear Face_1cm _Ch9262**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.43 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.626 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

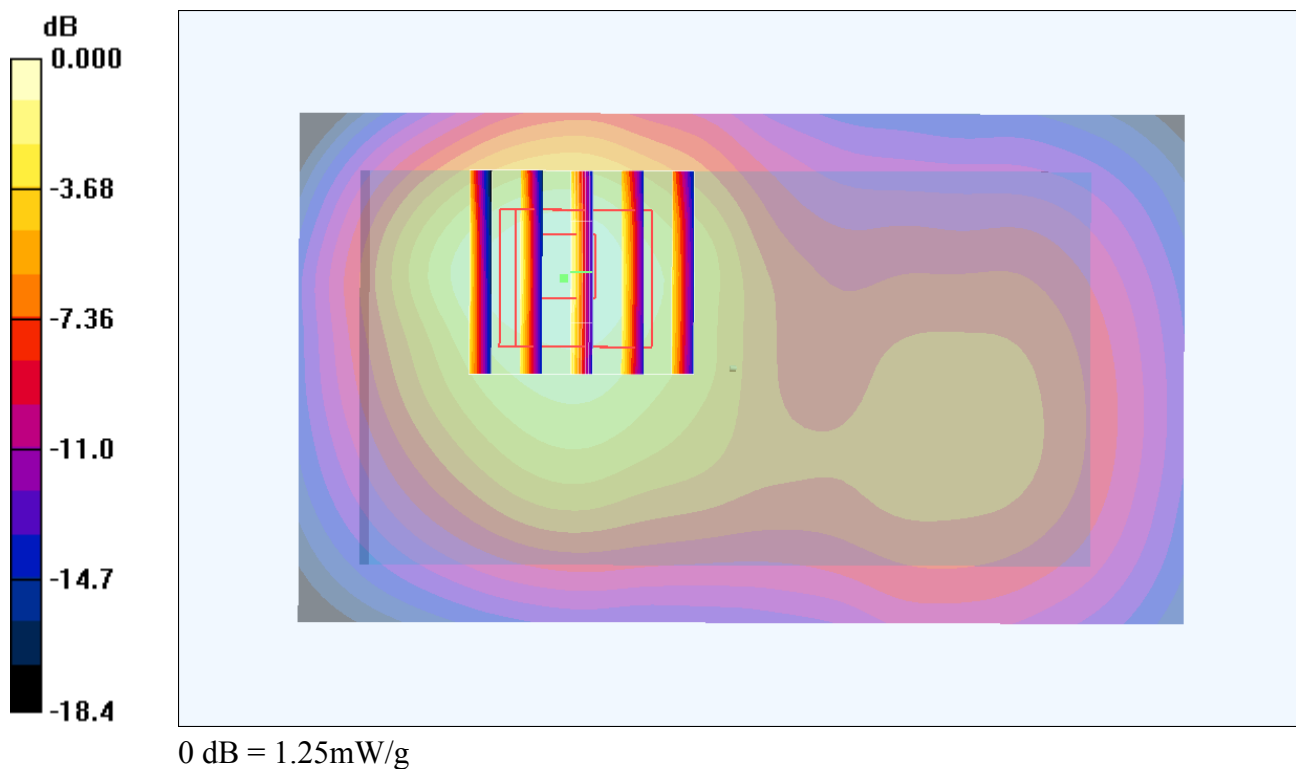

#44 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9262_2D**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.43 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.626 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

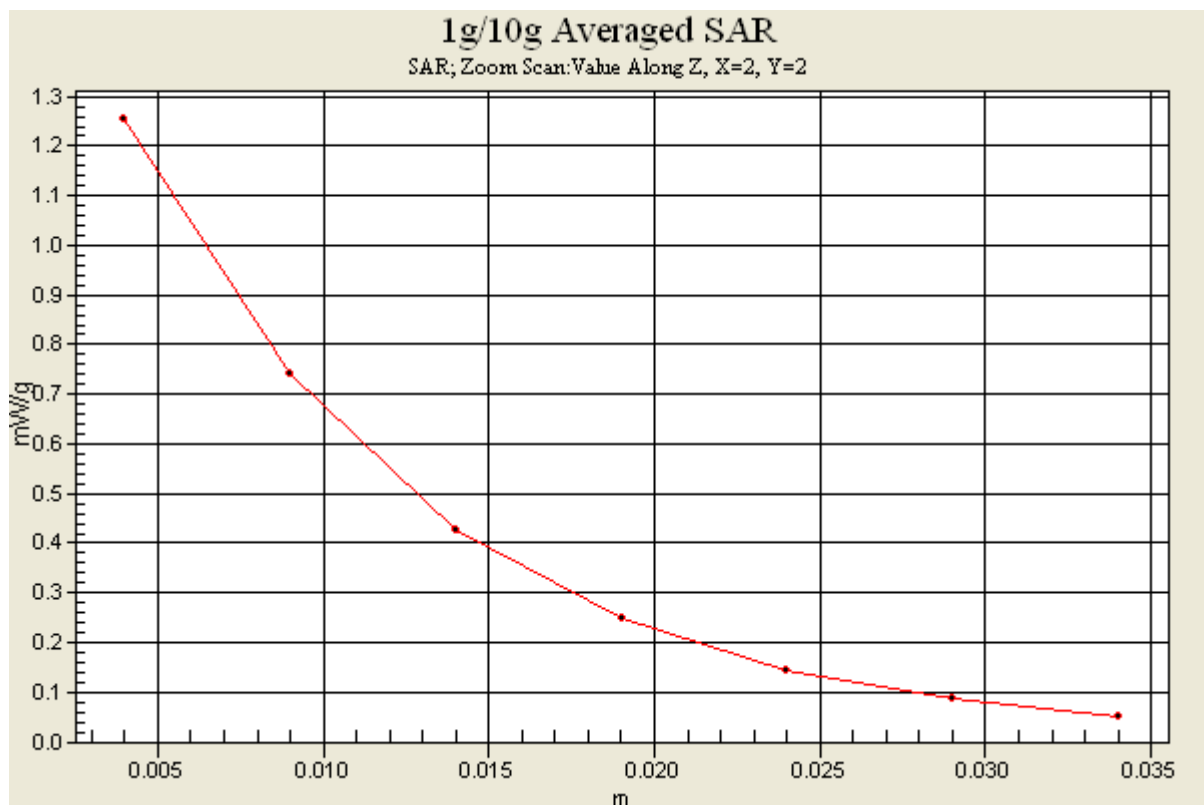

#45 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9538**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.41 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

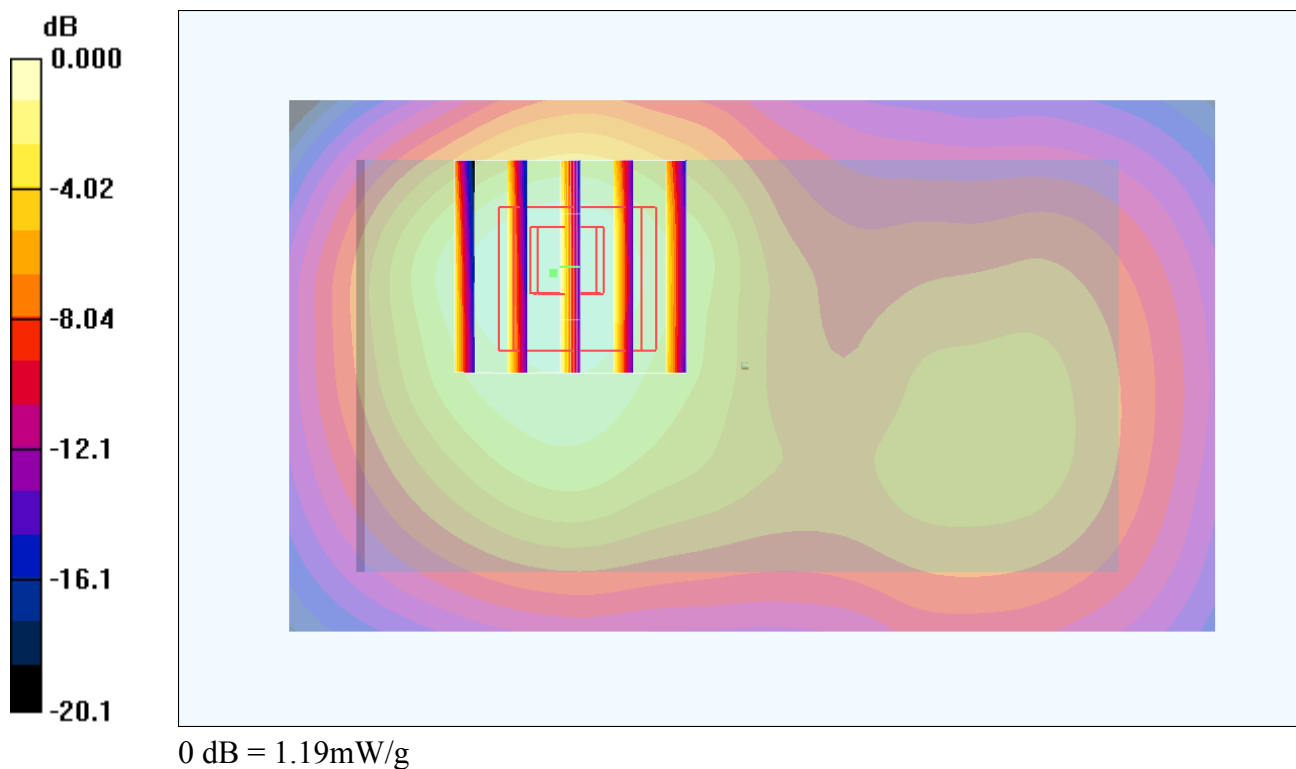

#37 WCDMA II_RMC12.2K_Front Face_1cm _Ch9400**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.848 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.747 mW/g

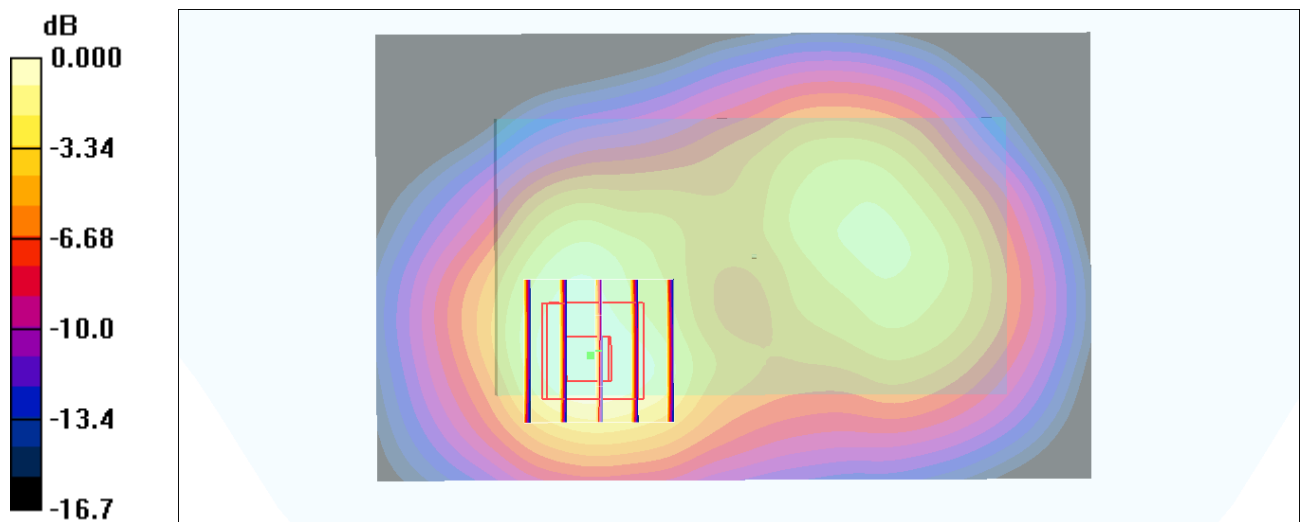

0 dB = 0.747mW/g

#43 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9400_Earphone**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.14 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 0.934 mW/g

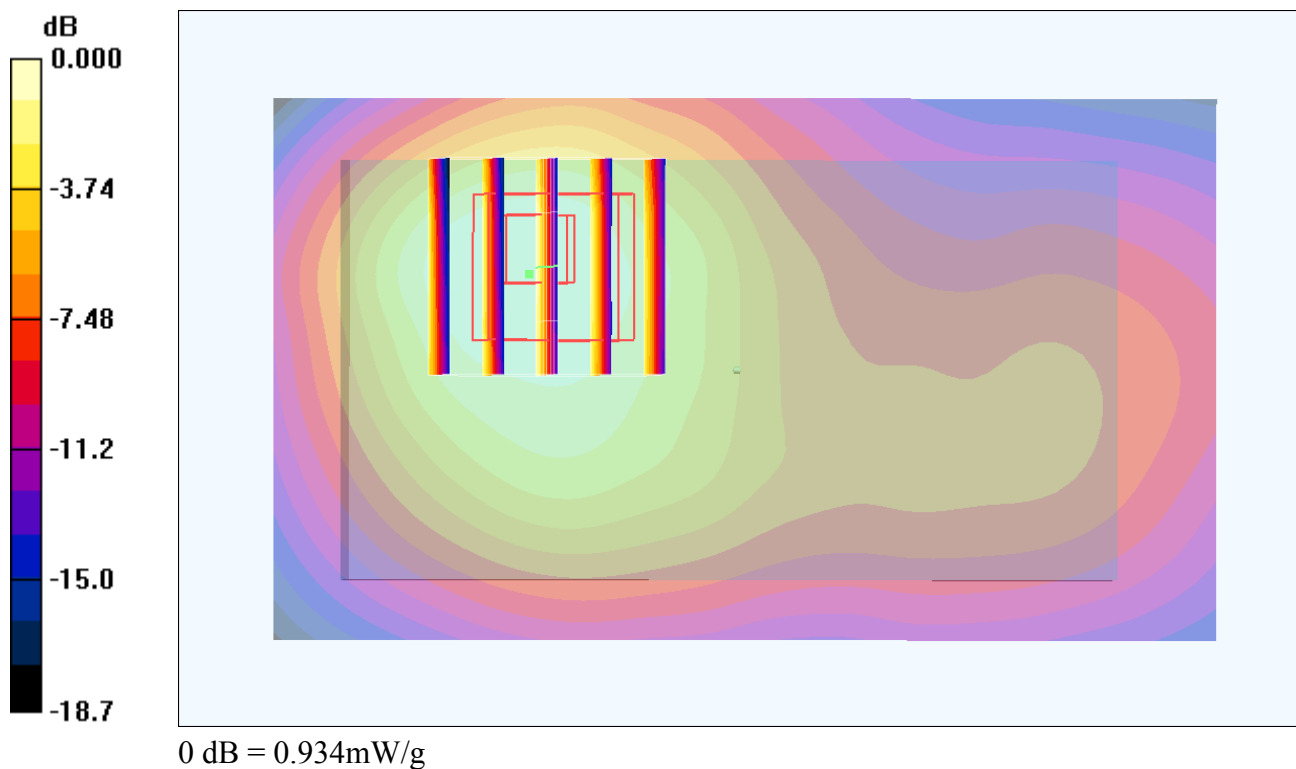

#46 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9262_Earphone**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

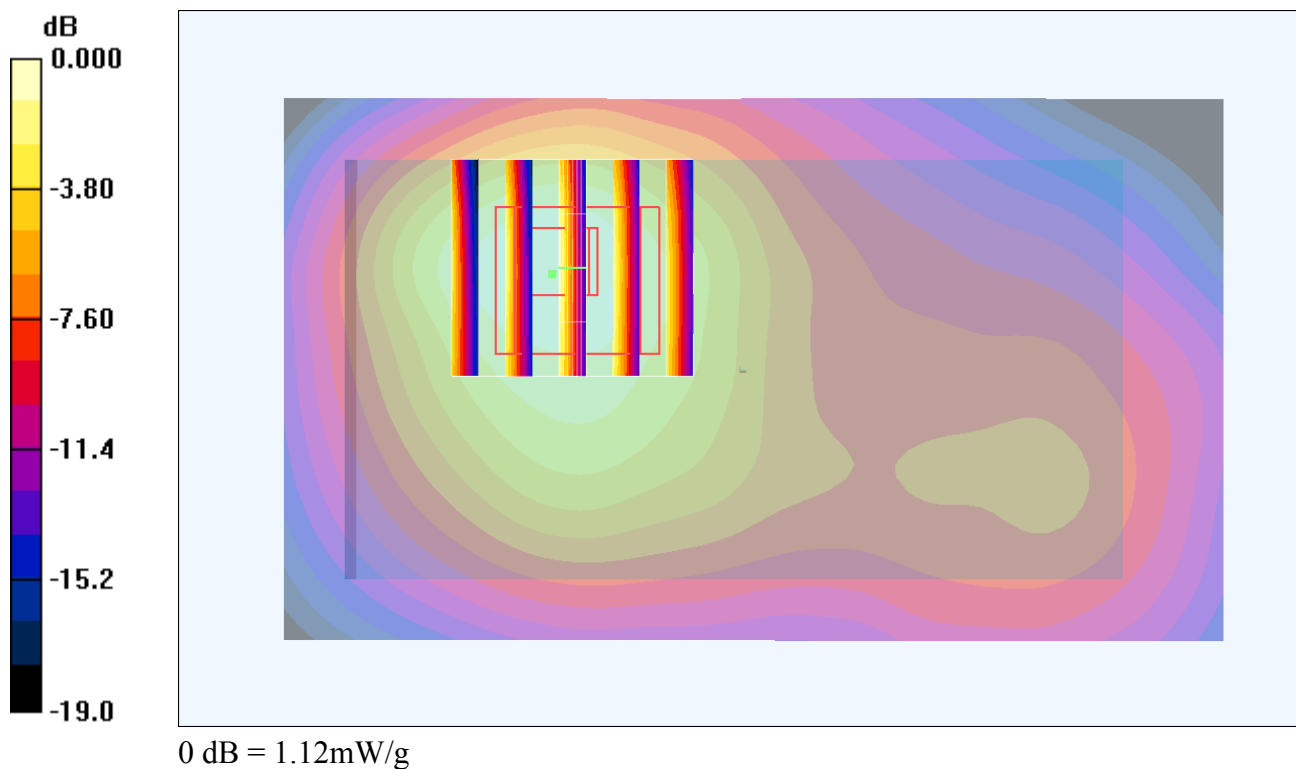

#47 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9538_Earphone**DUT: 142113-03**

Communication System: WCDMA Band 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110630 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.48, 4.48, 4.48); Calibrated: 2011/5/20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2011/4/28
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (41x71x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.967 mW/g

