


# FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 4597  
FCC ID : IHDT56QG2  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## **Table of Contents**

|                                                                               |          |
|-------------------------------------------------------------------------------|----------|
| <b>1. Administration Data .....</b>                                           | <b>3</b> |
| <b>2. Equipment Under Test (EUT) .....</b>                                    | <b>3</b> |
| 2.1 General Information .....                                                 | 3        |
| <b>3. Specific Absorption Rate (SAR) .....</b>                                | <b>4</b> |
| 3.1 Introduction .....                                                        | 4        |
| 3.2 SAR Definition .....                                                      | 4        |
| <b>4. System Description and Setup .....</b>                                  | <b>5</b> |
| <b>5. Transmitter power reduction conditions and modes .....</b>              | <b>6</b> |
| <b>6. Test Setup Information, SAR Measurement Results, and Analysis .....</b> | <b>6</b> |
| <b>7. Uncertainty Assessment .....</b>                                        | <b>7</b> |
| <b>8. References .....</b>                                                    | <b>9</b> |
| <b>Appendix A. Plots of SAR Measurement</b>                                   |          |

## **Revision History**

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE   |
|--------------|---------|-------------------------|---------------|
| FA542019-01B | Rev. 01 | Initial issue of report | May. 18, 2014 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |

## 1. Administration Data

| Testing Laboratory |                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                       |
| Test Site Location | No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |

| Applicant    |                                                                            |
|--------------|----------------------------------------------------------------------------|
| Company Name | Motorola Mobility, LLC                                                     |
| Address      | 222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States |

| Manufacturer |                                                                            |
|--------------|----------------------------------------------------------------------------|
| Company Name | Motorola Mobility, LLC                                                     |
| Address      | 222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States |

## 2. Equipment Under Test (EUT)

### 2.1 General Information

| Product Feature & Specification                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name                                                                                                                                                                                                                                                              | Mobile Cellular Phone                                                                                                                                                                                                                                                                                                                                 |
| Brand Name                                                                                                                                                                                                                                                                  | Motorola                                                                                                                                                                                                                                                                                                                                              |
| Model Name                                                                                                                                                                                                                                                                  | 4597                                                                                                                                                                                                                                                                                                                                                  |
| FCC ID                                                                                                                                                                                                                                                                      | IHDT56QG2                                                                                                                                                                                                                                                                                                                                             |
| IMEI Code                                                                                                                                                                                                                                                                   | 355491060004373                                                                                                                                                                                                                                                                                                                                       |
| Wireless Technology and Frequency Range                                                                                                                                                                                                                                     | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>LTE Band 4: 1710.7 MHz ~ 1754.3 MHz<br>LTE Band 7: 2502.5 MHz ~ 2567.5 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| Mode                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>• GSM/GPRS/EGPRS</li> <li>• RMC/AMR 12.2Kbps</li> <li>• HSDPA</li> <li>• HSUPA</li> <li>• DC-HSDPA</li> <li>• LTE: QPSK, 16QAM</li> <li>• 802.11b/g/n HT20/</li> <li>• Bluetooth v3.0 with EDR , Bluetooth v4.0 with LE</li> <li>• NFC:ASK</li> </ul>                                                          |
| GSM / (E)GPRS Transfer mode                                                                                                                                                                                                                                                 | Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.                                                                                                                                                                                    |
| EUT Stage                                                                                                                                                                                                                                                                   | Identical Prototype                                                                                                                                                                                                                                                                                                                                   |
| <b>Remark:</b><br>1. While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the WCDMA B4 / B2 and LTE B7 transmitter. More detailed information which can be referred to “operational description”. |                                                                                                                                                                                                                                                                                                                                                       |

### **3. Specific Absorption Rate (SAR)**

#### **3.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### **3.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

#### 4. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**

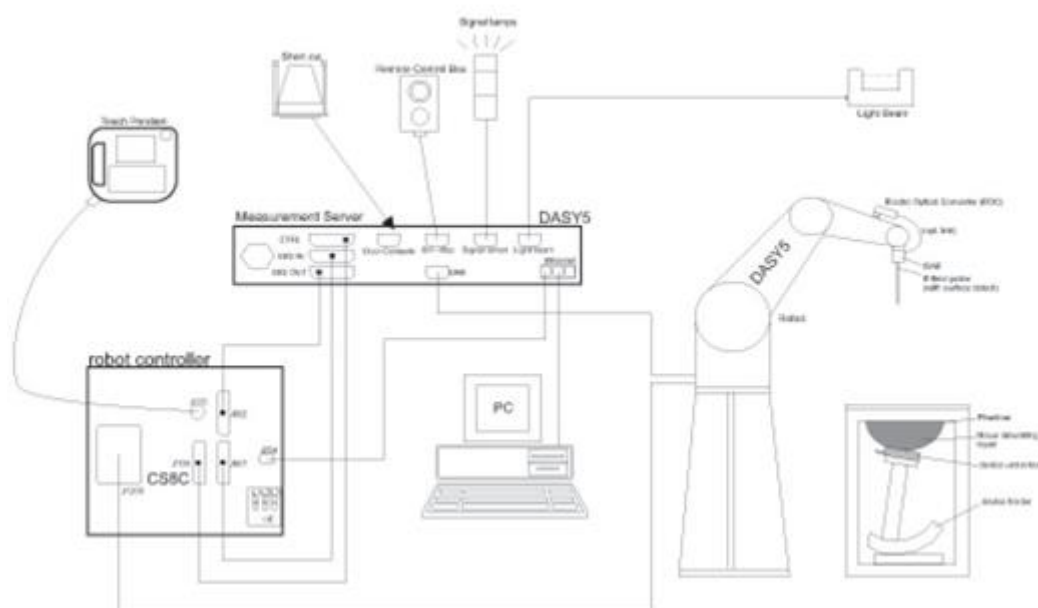

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## **5. Transmitter power reduction conditions and modes**

The phone utilizes reduced limits for the maximum transmit power for its transmitters when operation under the following noted conditions to ensure SAR exposure compliance is maintained. Tables of the reduced limits used for testing are given below. A complete description of this functionality is provided in the Operational Description. The implementation to trigger the reduction in power requires the device to be radiating, which prevents conducted power measurements of this functionality without modification to the unit

While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the WCDMA B4 / B2 and LTE B7 transmitter. More detailed information which can be referred to "operational description".

| Mode(s) of Operation               | WCDMA B4        | WCDMA B2        | LTE Band 7      |
|------------------------------------|-----------------|-----------------|-----------------|
| Frequency Range (MHz)              | 1712.4 ~ 1752.6 | 1852.4 ~ 1907.6 | 2502.5 ~ 2567.5 |
| Maximum Output Power (dBm)         | 24.00           | 24.00           | 24.00           |
| Reduced Maximum Output Power (dBm) | 20.50           | 20.00           | 19.00           |

## **6. Test Setup Information, SAR Measurement Results, and Analysis**

The following SAR test data is being provided to demonstrate the device's effective utilization of power reduction conditions specified in Operational Description. The values in the table(s) are provided solely for purposes of confirming compliant power reduction operation and do not represent maximum SAR values of the product. For maximum reported SAR compliance values, refer to the Exhibit 11 SAR test report, report no: FA542019-01A.

The test conditions that produced the highest SAR values for each combination of EUT mode and exposure condition are indicated as bold numbers in the following tables. Plots of these tests are included in Appendix A of this report.

### **<WCDMA B4 during a mobile hotspot session>**

| Configuration                        | Channel | f<br>(MHz) | 1 g SAR value<br>without Power Reduction |                              |                              | 1 g SAR value<br>with Power Reduction |                              |                              | Reduction<br>Level<br>(dB) |
|--------------------------------------|---------|------------|------------------------------------------|------------------------------|------------------------------|---------------------------------------|------------------------------|------------------------------|----------------------------|
|                                      |         |            | Maximum<br>Power<br>Limit<br>(dB)        | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) | Maximum<br>Power<br>Limit<br>(dB)     | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) |                            |
| Front of Phone 10<br>mm from Phantom | 1413    | 1732.6     | 24.00                                    | 1.270                        | 1.709                        | 20.50                                 | 0.835                        | 0.835                        | 3.11                       |

### **<WCDMA B2 during a mobile hotspot session>**

| Configuration                        | Channel | f<br>(MHz) | 1 g SAR value<br>without Power Reduction |                              |                              | 1 g SAR value<br>with Power Reduction |                              |                              | Reduction<br>Level<br>(dB) |
|--------------------------------------|---------|------------|------------------------------------------|------------------------------|------------------------------|---------------------------------------|------------------------------|------------------------------|----------------------------|
|                                      |         |            | Maximum<br>Power<br>Limit<br>(dB)        | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) | Maximum<br>Power<br>Limit<br>(dB)     | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) |                            |
| Front of Phone 10<br>mm from Phantom | 9262    | 1852.4     | 24.00                                    | 1.280                        | 1.735                        | 20.00                                 | 0.760                        | 0.760                        | 3.58                       |

### **<LTE Band 7 during a mobile hotspot session>**

| Configuration                              | Channel | f<br>(MHz) | 1 g SAR value<br>without Power Reduction |                              |                              | 1 g SAR value<br>with Power Reduction |                              |                              | Reduction<br>Level<br>(dB) |
|--------------------------------------------|---------|------------|------------------------------------------|------------------------------|------------------------------|---------------------------------------|------------------------------|------------------------------|----------------------------|
|                                            |         |            | Maximum<br>Power<br>Limit<br>(dB)        | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) | Maximum<br>Power<br>Limit<br>(dB)     | Measured<br>1g SAR<br>(W/kg) | Reported<br>1g SAR<br>(W/kg) |                            |
| Bottom side of Phone<br>10 mm from Phantom | 21100   | 2535       | 24.00                                    | 1.640                        | 2.274                        | 19.00                                 | 0.748                        | 0.748                        | 4.83                       |

## 7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

| Uncertainty Distributions          | Normal      | Rectangular  | Triangular   | U-Shape      |
|------------------------------------|-------------|--------------|--------------|--------------|
| Multi-plying Factor <sup>(a)</sup> | $1/k^{(b)}$ | $1/\sqrt{3}$ | $1/\sqrt{6}$ | $1/\sqrt{2}$ |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 7.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor    | Ci (1g) | Ci (10g) | Standard Uncertainty (1g) | Standard Uncertainty (10g) |
|--------------------------------------|------------------------|--------------------------|------------|---------|----------|---------------------------|----------------------------|
| <b>Measurement System</b>            |                        |                          |            |         |          |                           |                            |
| Probe Calibration                    | 6.0                    | Normal                   | 1          | 1       | 1        | ± 6.0 %                   | ± 6.0 %                    |
| Axial Isotropy                       | 4.7                    | Rectangular              | $\sqrt{3}$ | 0.7     | 0.7      | ± 1.9 %                   | ± 1.9 %                    |
| Hemispherical Isotropy               | 9.6                    | Rectangular              | $\sqrt{3}$ | 0.7     | 0.7      | ± 3.9 %                   | ± 3.9 %                    |
| Boundary Effects                     | 1.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 0.6 %                   | ± 0.6 %                    |
| Linearity                            | 4.7                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 2.7 %                   | ± 2.7 %                    |
| System Detection Limits              | 1.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 0.6 %                   | ± 0.6 %                    |
| Readout Electronics                  | 0.3                    | Normal                   | 1          | 1       | 1        | ± 0.3 %                   | ± 0.3 %                    |
| Response Time                        | 0.8                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 0.5 %                   | ± 0.5 %                    |
| Integration Time                     | 2.6                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 1.5 %                   | ± 1.5 %                    |
| RF Ambient Noise                     | 3.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| RF Ambient Reflections               | 3.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| Probe Positioner                     | 0.4                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 0.2 %                   | ± 0.2 %                    |
| Probe Positioning                    | 2.9                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 1.7 %                   | ± 1.7 %                    |
| Max. SAR Eval.                       | 1.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 0.6 %                   | ± 0.6 %                    |
| <b>Test Sample Related</b>           |                        |                          |            |         |          |                           |                            |
| Device Positioning                   | 2.9                    | Normal                   | 1          | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| Device Holder                        | 3.6                    | Normal                   | 1          | 1       | 1        | ± 3.6 %                   | ± 3.6 %                    |
| Power Drift                          | 5.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 2.9 %                   | ± 2.9 %                    |
| <b>Phantom and Setup</b>             |                        |                          |            |         |          |                           |                            |
| Phantom Uncertainty                  | 4.0                    | Rectangular              | $\sqrt{3}$ | 1       | 1        | ± 2.3 %                   | ± 2.3 %                    |
| Liquid Conductivity (Target)         | 5.0                    | Rectangular              | $\sqrt{3}$ | 0.64    | 0.43     | ± 1.8 %                   | ± 1.2 %                    |
| Liquid Conductivity (Meas.)          | 2.5                    | Normal                   | 1          | 0.64    | 0.43     | ± 1.6 %                   | ± 1.1 %                    |
| Liquid Permittivity (Target)         | 5.0                    | Rectangular              | $\sqrt{3}$ | 0.6     | 0.49     | ± 1.7 %                   | ± 1.4 %                    |
| Liquid Permittivity (Meas.)          | 2.5                    | Normal                   | 1          | 0.6     | 0.49     | ± 1.5 %                   | ± 1.2 %                    |
| <b>Combined Standard Uncertainty</b> |                        |                          |            |         |          | ± 11.0 %                  | ± 10.8 %                   |
| <b>Coverage Factor for 95 %</b>      |                        |                          |            |         |          | K=2                       |                            |
| <b>Expanded Uncertainty</b>          |                        |                          |            |         |          | ± 22.0 %                  | ± 21.5 %                   |

**Table 7.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

## **8. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [6] FCC KDB 648474 D03 v01r02, "Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers" May 2013.
- [7] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [8] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [9] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [10] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [11] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.



---

## **Appendix A.     Plots of SAR Measurement**

The plots are shown as follows.

**WCDMA IV\_RMC 12.2Kbps\_Front\_10mm\_Ch1413**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750\_150508 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.453$  mho/m;  $\epsilon_r = 53.221$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(8.34, 8.34, 8.34); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch1413/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.17 mW/g


**Configuration/Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.014 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.418 mW/g

**SAR(1 g) = 0.835 mW/g; SAR(10 g) = 0.444 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

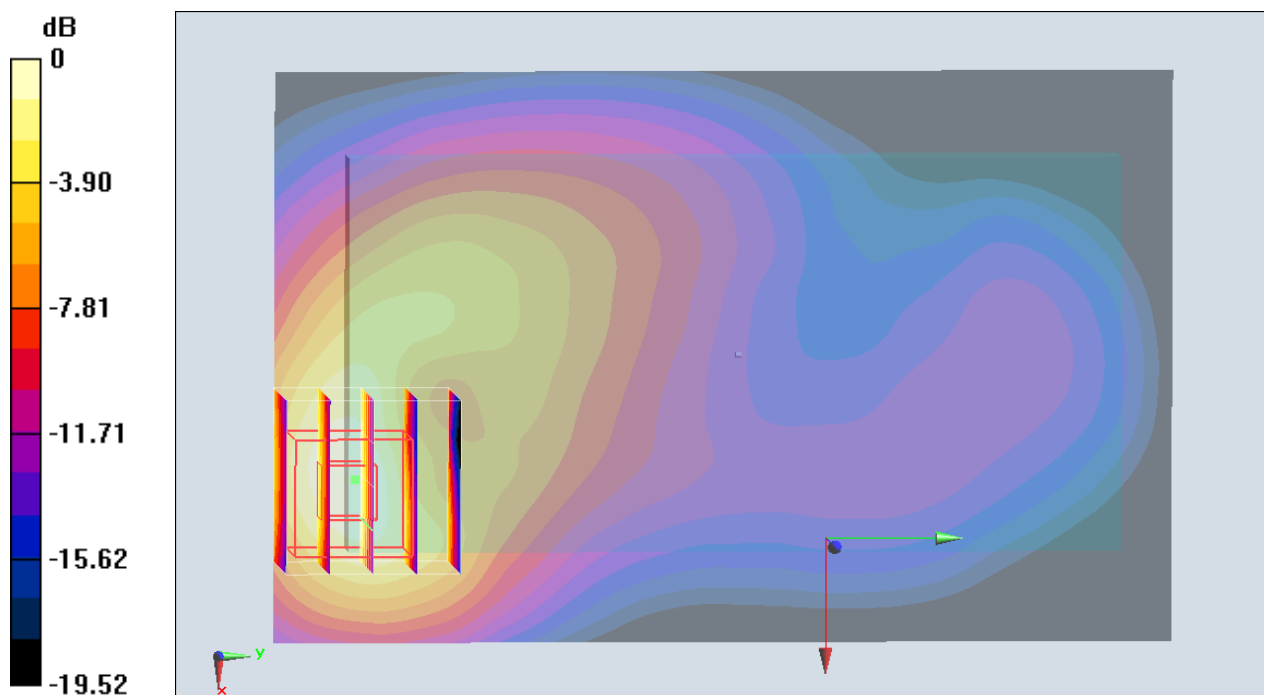

0 dB = 1.16 mW/g = 1.29 dB mW/g

**WCDMA IV\_RMC 12.2Kbps\_Front\_10mm\_Ch1413**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_1750\_150504 Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.438$  mho/m;  $\epsilon_r = 52.975$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3578; ConvF(7.65, 7.65, 7.65); Calibrated: 2015/3/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch1413/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.76 mW/g


**Configuration/Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.873 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.130 mW/g

**SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.692 mW/g**

Maximum value of SAR (measured) = 1.82 mW/g

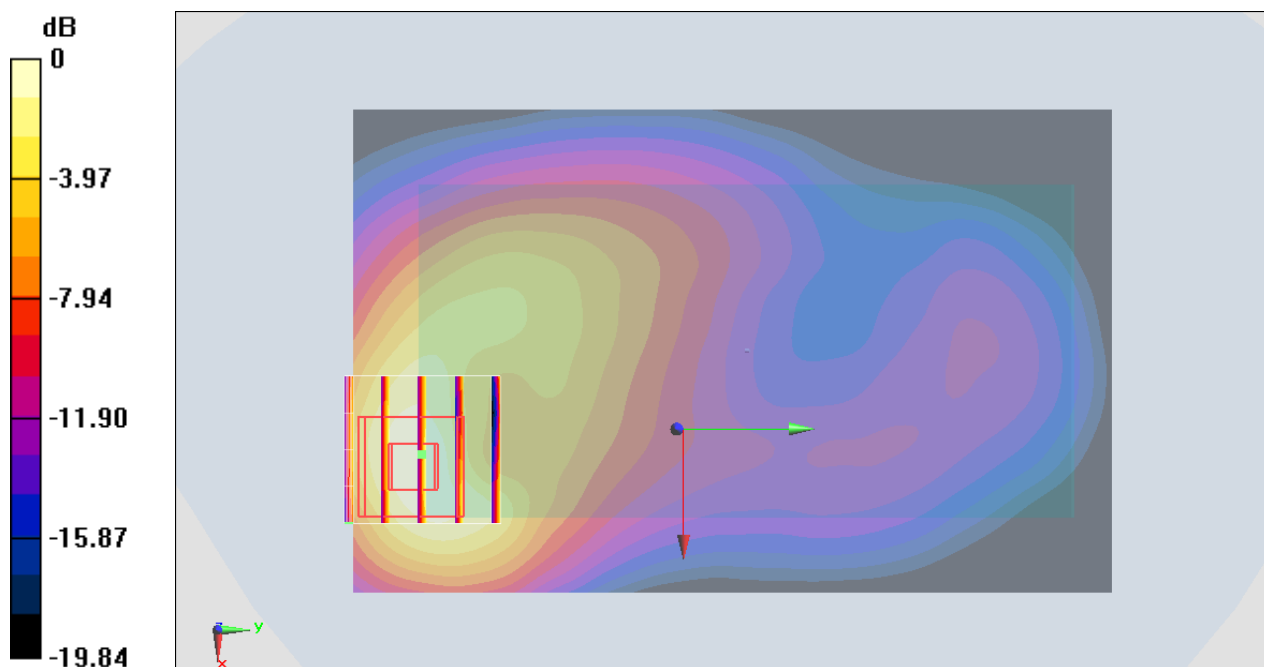

0 dB = 1.82 mW/g = 5.20 dB mW/g

**WCDMA II\_RMC 12.2Kbps\_Front\_10mm\_Ch9262**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150509 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.507$  mho/m;  $\epsilon_r = 54.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(7.89, 7.89, 7.89); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch9262/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.11 mW/g


**Configuration/Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.264 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.292 mW/g

**SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.405 mW/g**

Maximum value of SAR (measured) = 1.05 mW/g

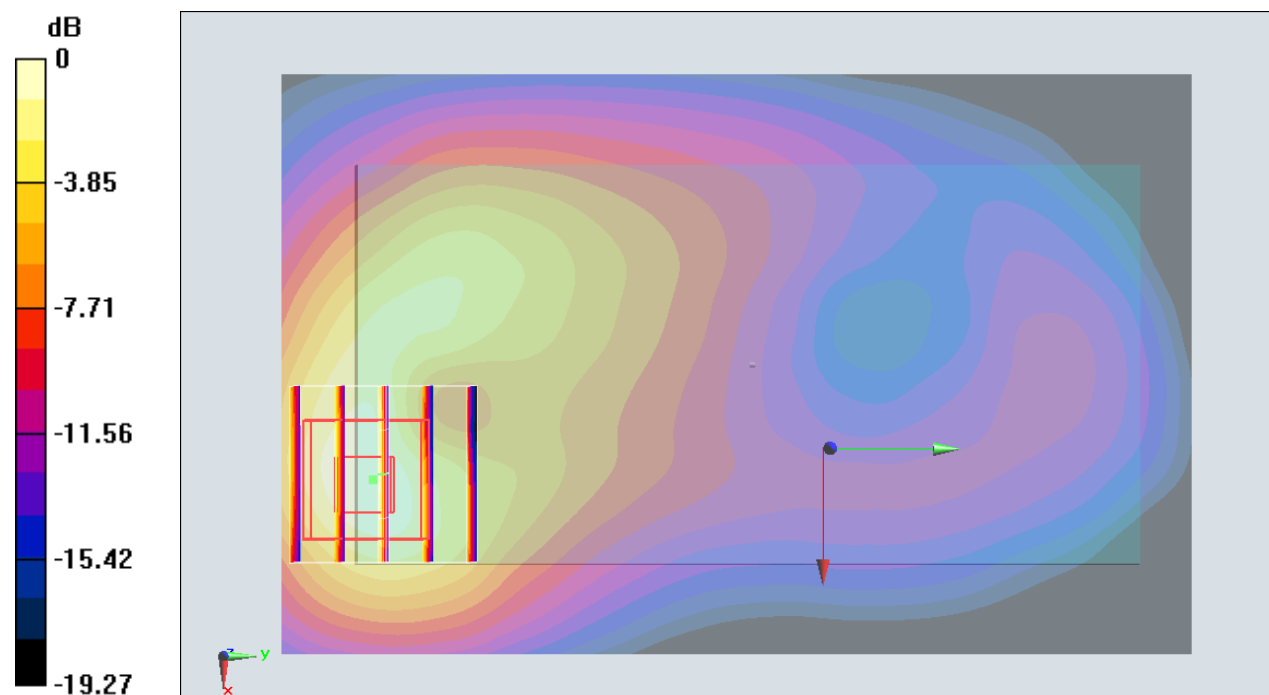

0 dB = 1.05 mW/g = 0.42 dB mW/g

**WCDMA II\_RMC 12.2Kbps\_Front\_10mm\_Ch9262**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL1900\_150504 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.489$  mho/m;  $\epsilon_r = 55.312$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3578; ConvF(7.28, 7.28, 7.28); Calibrated: 2015/3/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch9262/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.99 mW/g


**Configuration/Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.813 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.199 mW/g

**SAR(1 g) = 1.28 mW/g; SAR(10 g) = 0.697 mW/g**

Maximum value of SAR (measured) = 1.77 mW/g

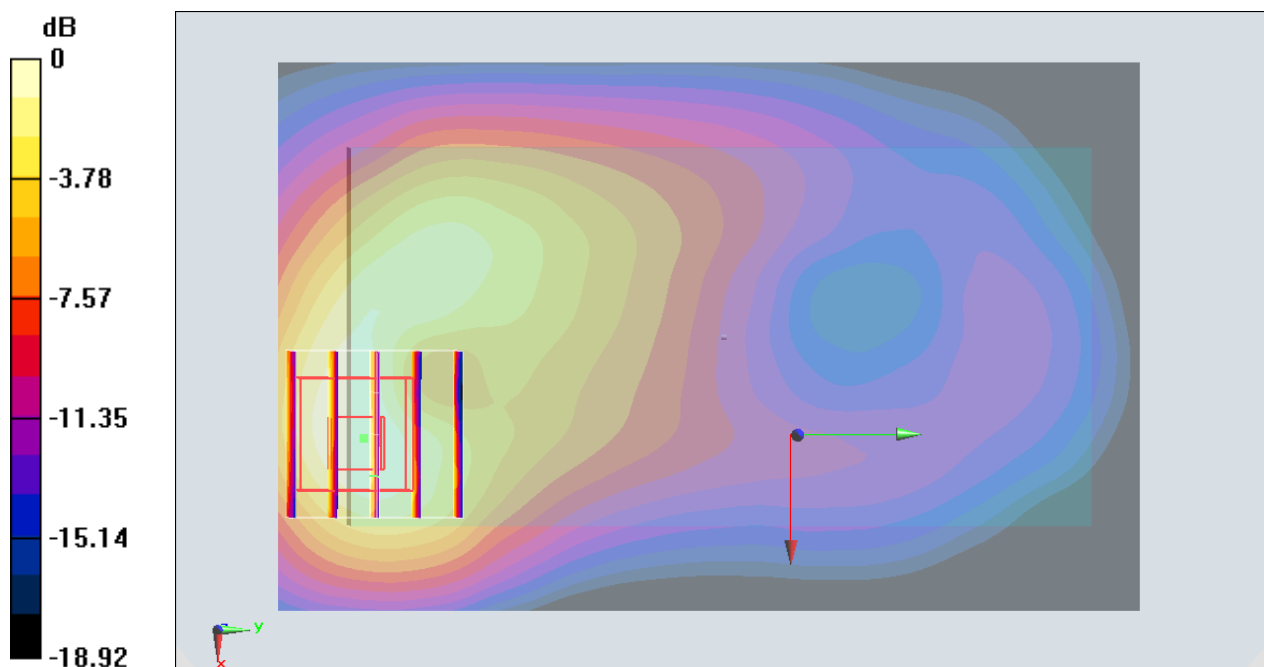

**LTE Band 7\_20M\_QPSK\_1RB\_0offset\_Bottom Side\_10mm\_Ch21100**

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_150507 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.159$  mho/m;  $\epsilon_r = 53.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3955; ConvF(7.09, 7.09, 7.09); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: SAM\_Right; Type: QD000P40CC; Serial: TP:1383
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch21100/Area Scan (41x81x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 1.19 mW/g


**Configuration/Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.803 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.487 mW/g

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.370 mW/g**

Maximum value of SAR (measured) = 1.20 mW/g

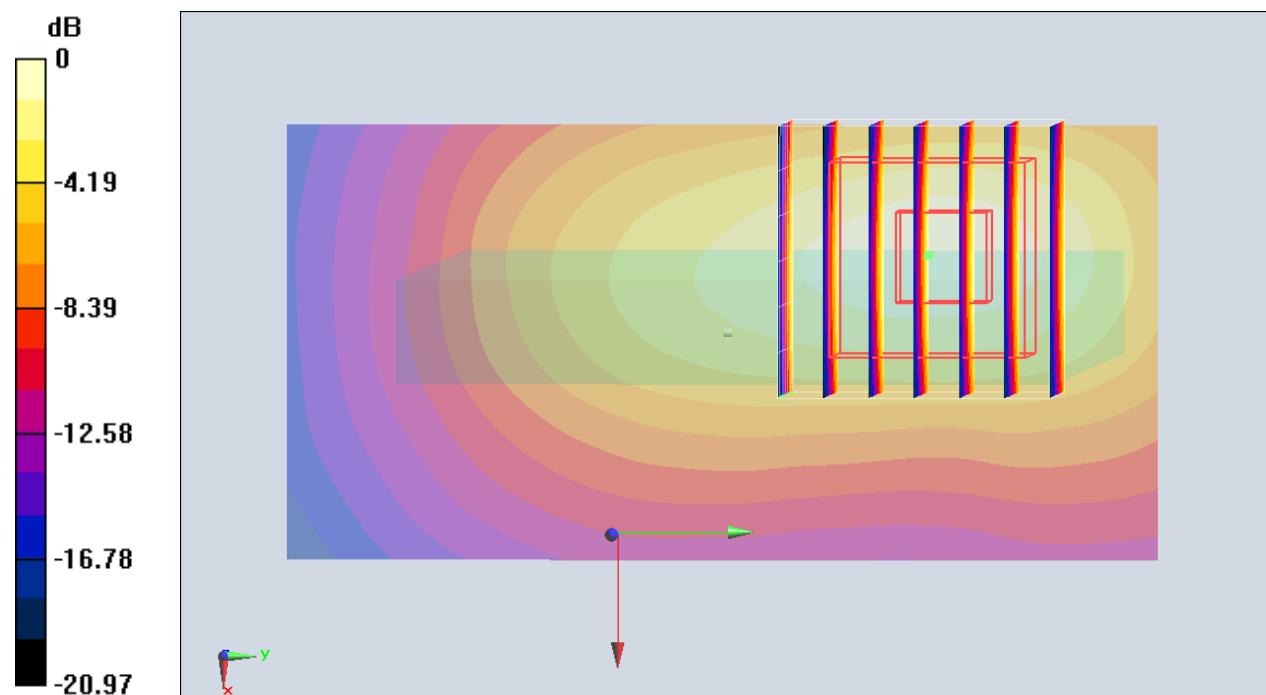

0 dB = 1.20 mW/g = 1.58 dB mW/g

**LTE Band 7\_20M\_QPSK\_1RB\_0offset\_Bottom Side\_10mm\_Ch21100**

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: MSL\_2600\_150503 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.083$  mho/m;  $\epsilon_r = 54.223$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3578; ConvF(6.69, 6.69, 6.69); Calibrated: 2015/3/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 2014/9/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

**Configuration/Ch21100/Area Scan (51x101x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 2.72 mW/g

**Configuration/Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.767 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.286 mW/g

**SAR(1 g) = 1.64 mW/g; SAR(10 g) = 0.801 mW/g**

Maximum value of SAR (measured) = 2.63 mW/g

