Number of TX :	2	**Ant. :**	2
Test Mode :	802.11n HT20	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	11	**Test Engineer :**	Luffy Lin

WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

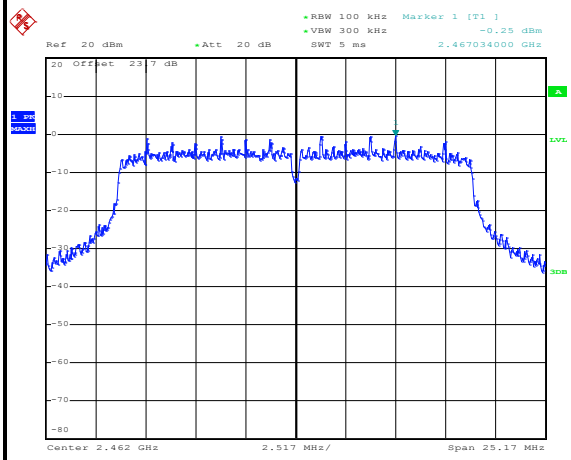

Date: 21.APR.2016 11:16:15

High Channel Plot

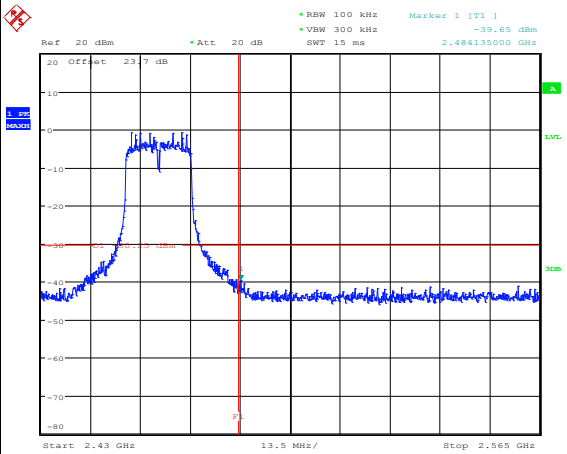

Date: 23.APR.2016 15:22:41

Spurious Emission 30MHz~3GHz

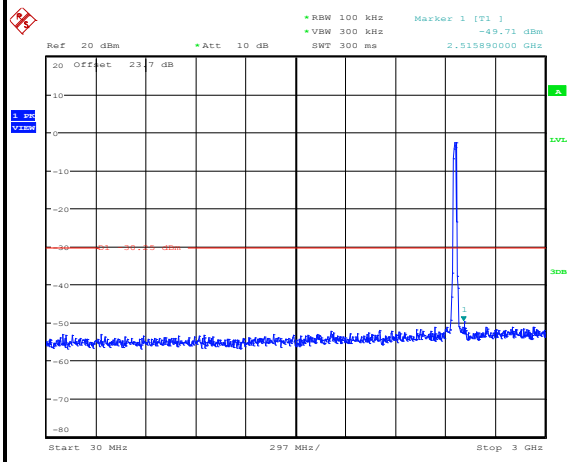

Date: 23.APR.2016 15:23:01

Spurious Emission 2GHz~25GHz

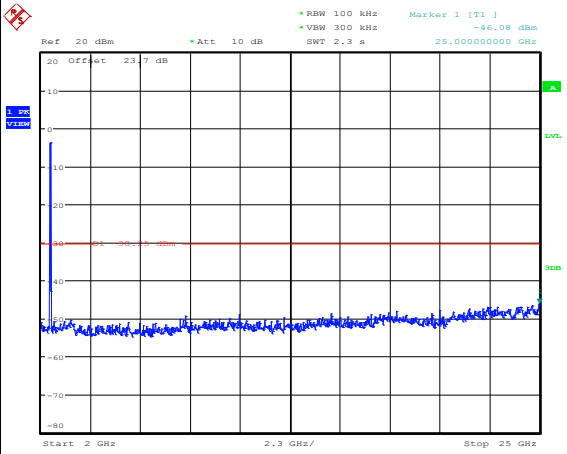

Date: 23.APR.2016 15:23:09

Number of TX :	2	**Ant. :**	2
Test Mode :	802.11ac VHT20	**Temperature :**	21~25℃
Test Band :	2.4GHz Low	**Relative Humidity :**	51~54%
Test Channel :	01	**Test Engineer :**	Luffy Lin

WLAN 802.11ac VHT20 Channel 01

100kHz PSD reference Level

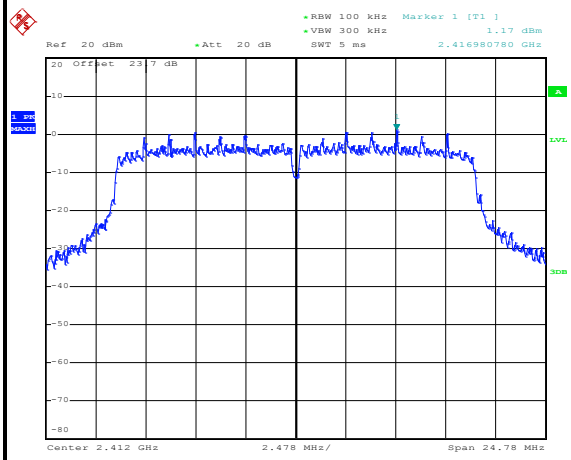

Date: 21.APR.2016 11:55:20

Low Channel Plot

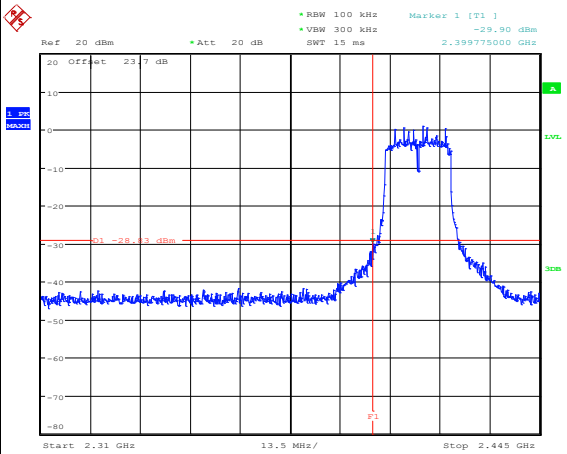

Date: 23.APR.2016 16:22:03

Spurious Emission 30MHz~3GHz

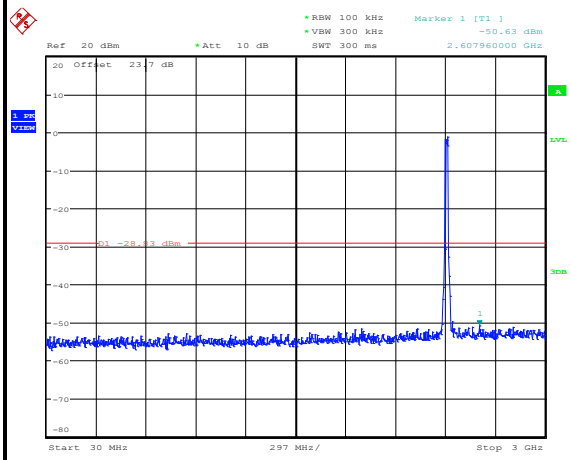

Date: 23.APR.2016 16:22:16

Spurious Emission 2GHz~25GHz

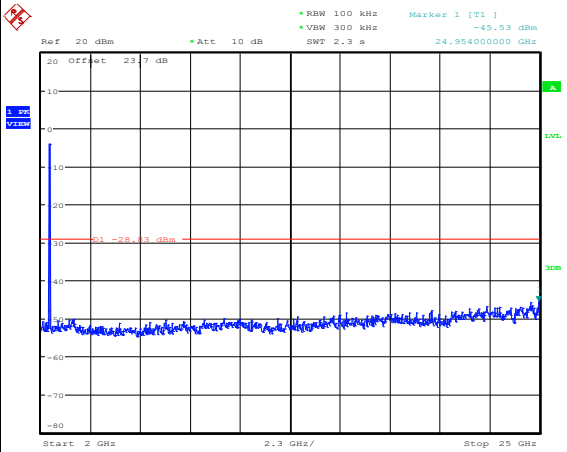

Date: 23.APR.2016 16:22:24

Number of TX :	2	**Ant. :**	2
Test Mode :	802.11ac VHT20	**Temperature :**	21~25℃
Test Band :	2.4GHz Mid	**Relative Humidity :**	51~54%
Test Channel :	06	**Test Engineer :**	Luffy Lin

WLAN 802.11ac VHT20 Channel 06

100kHz PSD reference Level

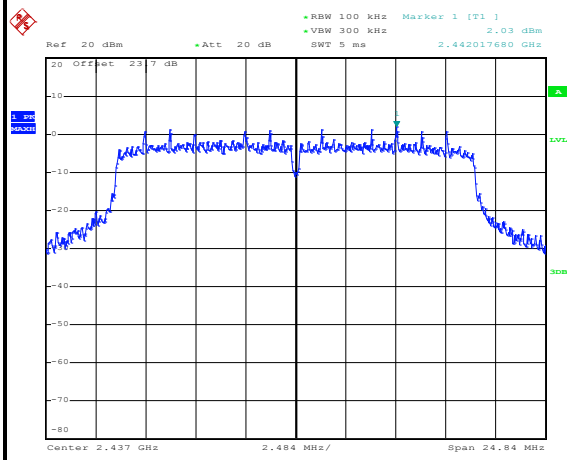

Date: 21.APR.2016 11:58:20

Spurious Emission 30MHz~3GHz

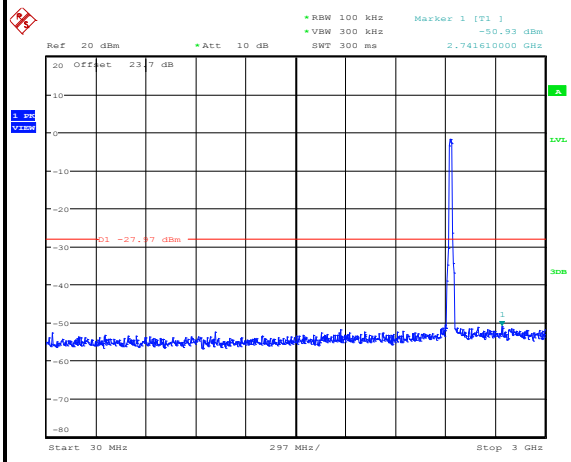

Date: 23.APR.2016 16:34:43

Spurious Emission 2GHz~25GHz

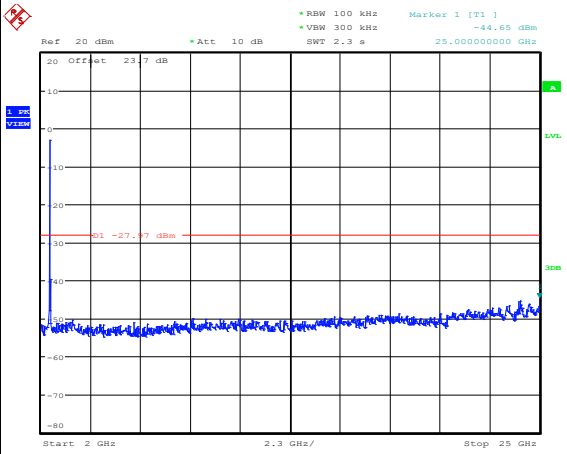

Date: 23.APR.2016 16:34:51

Number of TX :	2	**Ant. :**	2
Test Mode :	802.11ac VHT20	**Temperature :**	21~25℃
Test Band :	2.4GHz High	**Relative Humidity :**	51~54%
Test Channel :	11	**Test Engineer :**	Luffy Lin

WLAN 802.11ac VHT20 Channel 11

100kHz PSD reference Level

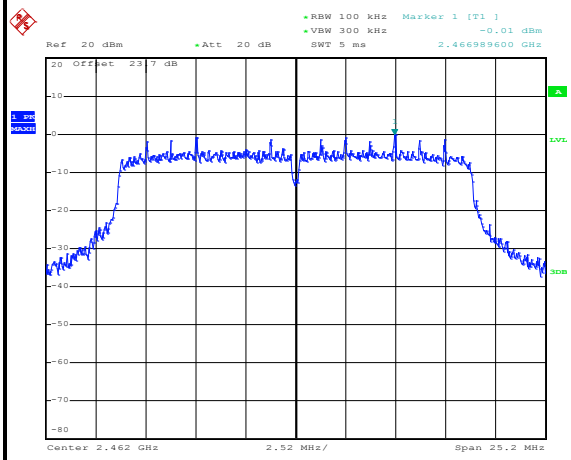

Date: 21.APR.2016 12:01:41

High Channel Plot

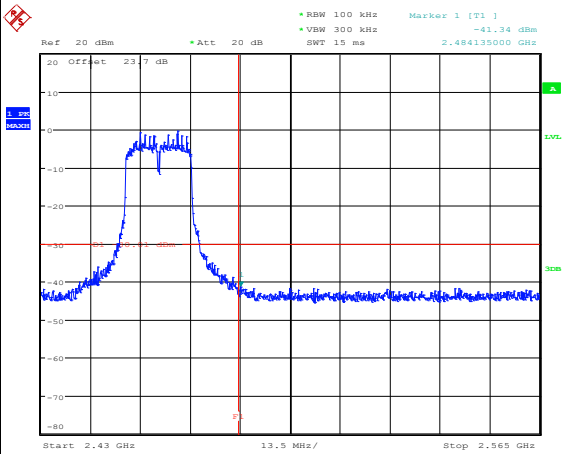

Date: 23.APR.2016 16:49:12

Spurious Emission 30MHz~3GHz

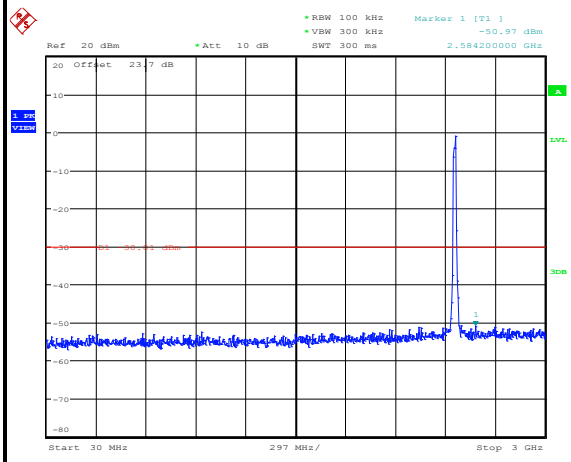

Date: 23.APR.2016 16:49:26

Spurious Emission 2GHz~25GHz

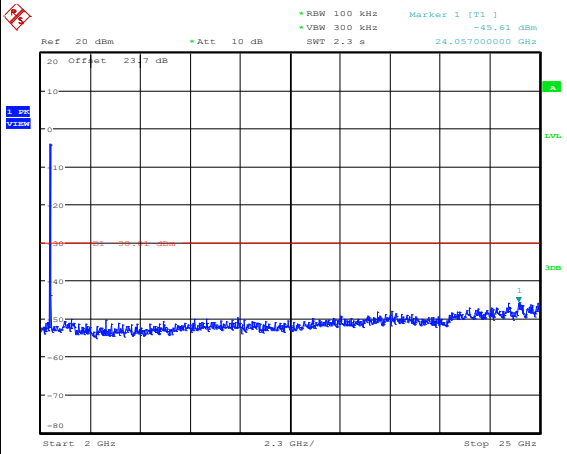

Date: 23.APR.2016 16:49:34

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedure

1. The testing follows ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated emissions below 30MHz

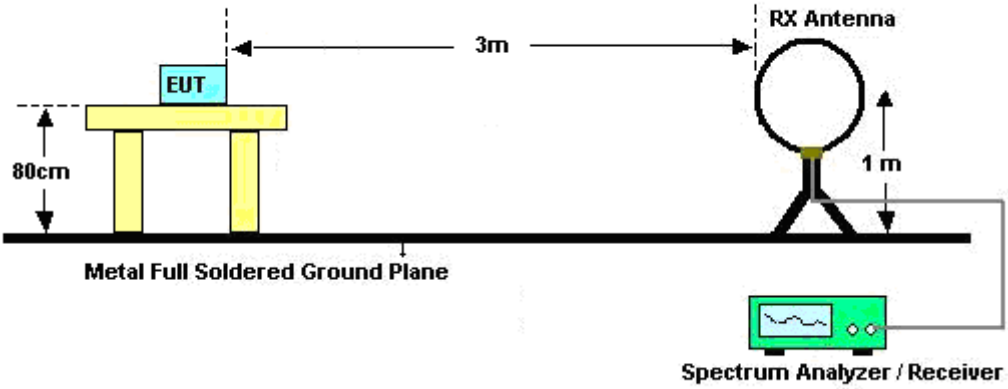

For radiated emissions from 30MHz to 1GHz

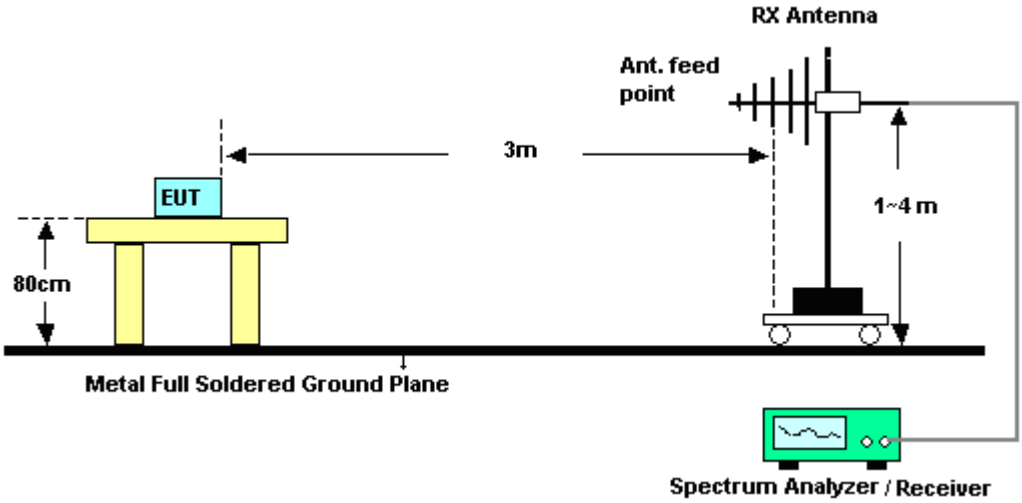

For radiated emissions above 1GHz

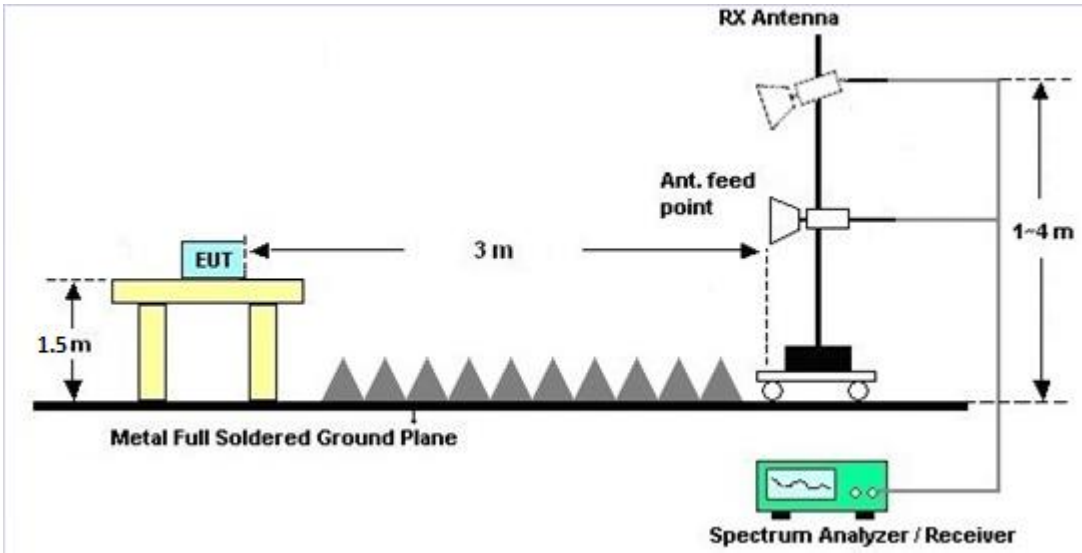

3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

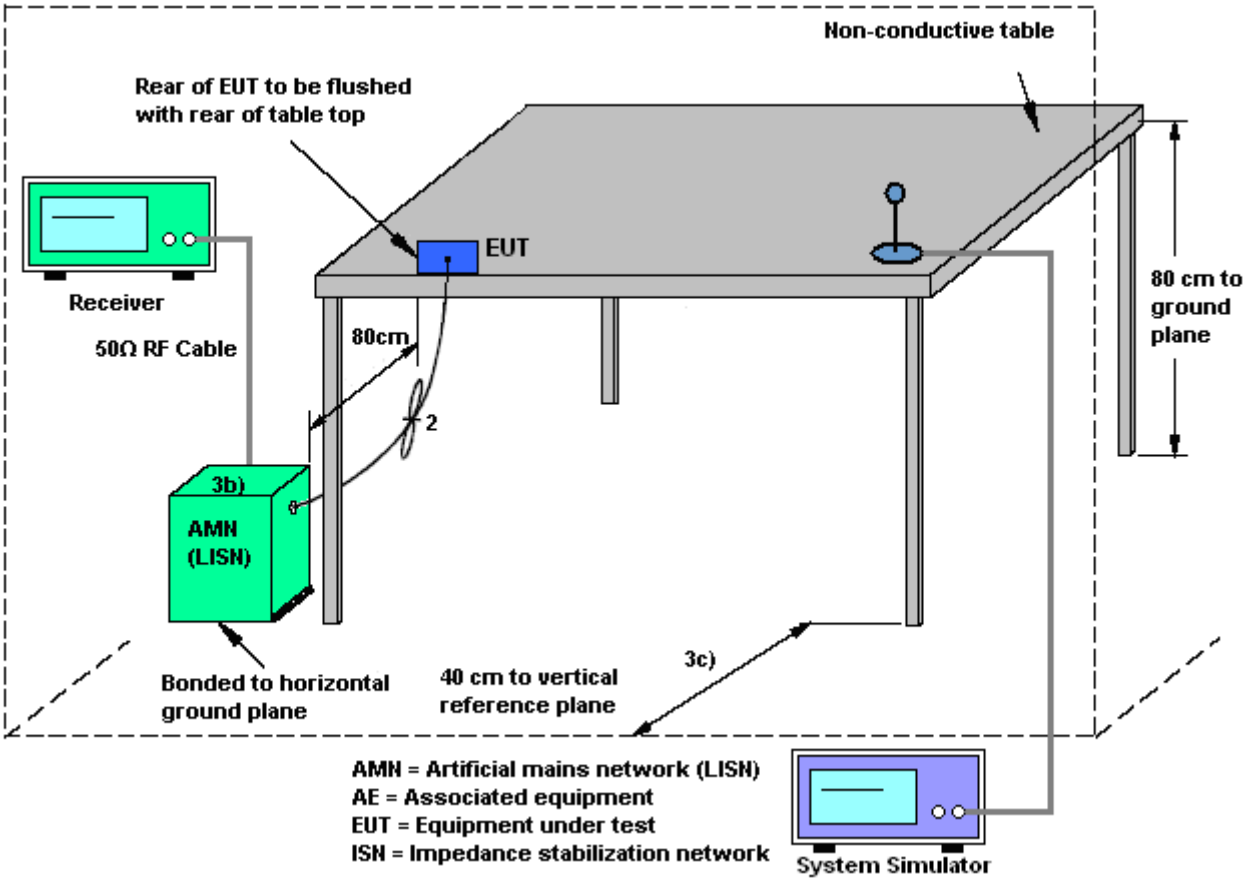

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	**Temperature :**	21~22℃
Test Engineer :	Derreck Chen	**Relative Humidity :**	47~48%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Function Type :	GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + Adapter + MP3		

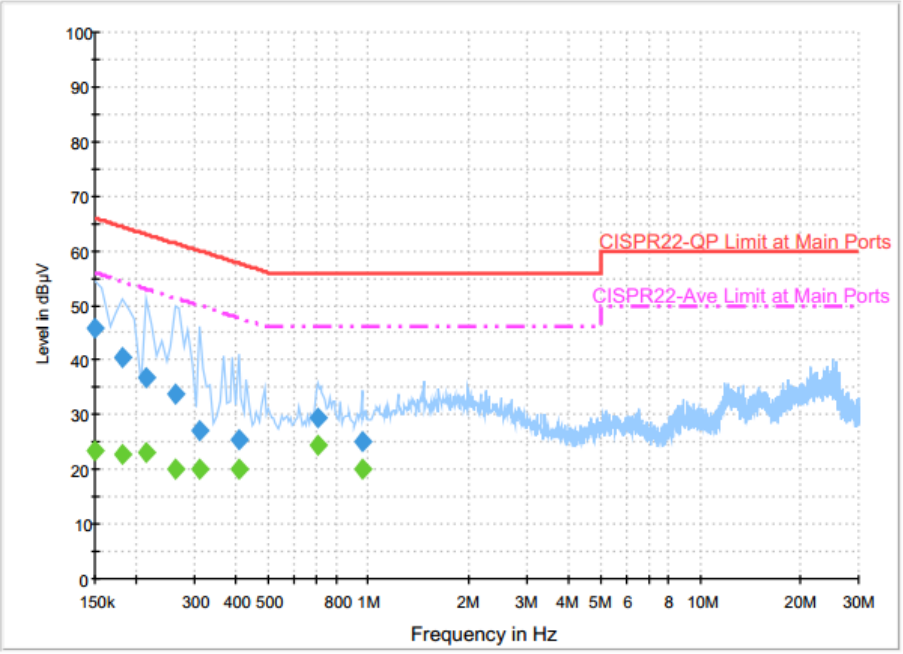

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	45.9	Off	L1	19.6	20.1	66.0
0.182000	40.3	Off	L1	19.6	24.1	64.4
0.214000	36.8	Off	L1	19.6	26.2	63.0
0.262000	33.9	Off	L1	19.6	27.5	61.4
0.310000	27.1	Off	L1	19.6	32.9	60.0
0.406000	25.4	Off	L1	19.6	32.3	57.7
0.702000	29.5	Off	L1	19.6	26.5	56.0
0.958000	25.2	Off	L1	19.6	30.8	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	23.3	Off	L1	19.6	32.7	56.0
0.182000	22.7	Off	L1	19.6	31.7	54.4
0.214000	23.0	Off	L1	19.6	30.0	53.0
0.262000	20.1	Off	L1	19.6	31.3	51.4
0.310000	19.9	Off	L1	19.6	30.1	50.0
0.406000	20.2	Off	L1	19.6	27.5	47.7
0.702000	24.3	Off	L1	19.6	21.7	46.0
0.958000	19.9	Off	L1	19.6	26.1	46.0

Test Mode :	Mode 1	**Temperature :**	21~22℃
Test Engineer :	Derreck Chen	**Relative Humidity :**	47~48%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Function Type :	GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + Adapter + MP3		

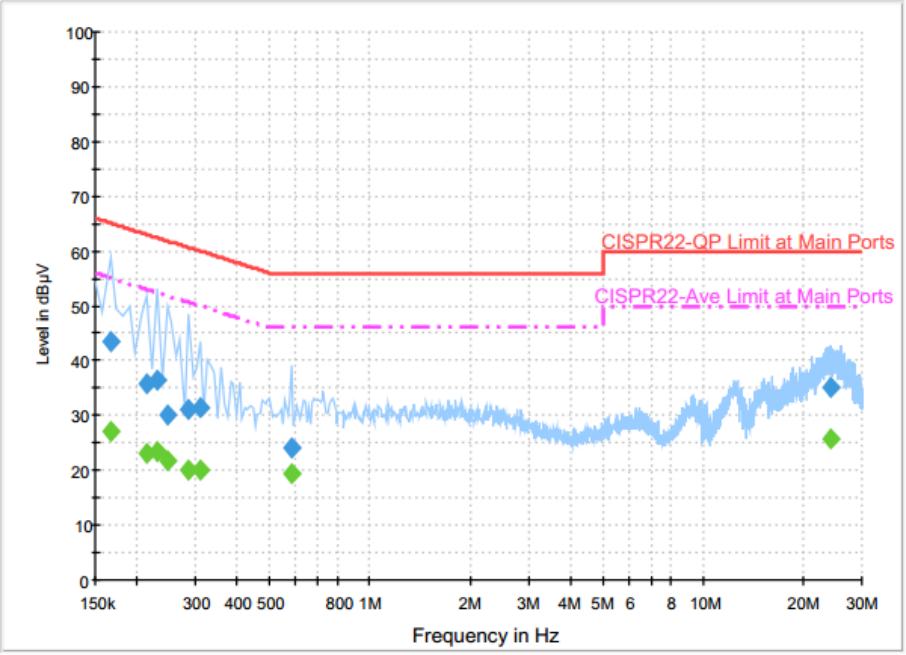

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	43.6	Off	N	19.6	21.6	65.2
0.214000	36.0	Off	N	19.6	27.0	63.0
0.230000	36.6	Off	N	19.6	25.8	62.4
0.246000	30.2	Off	N	19.6	31.7	61.9
0.286000	31.0	Off	N	19.6	29.6	60.6
0.310000	31.3	Off	N	19.6	28.7	60.0
0.582000	24.0	Off	N	19.6	32.0	56.0
24.286000	35.0	Off	N	20.0	25.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	26.9	Off	N	19.6	28.3	55.2
0.214000	23.1	Off	N	19.6	29.9	53.0
0.230000	23.5	Off	N	19.6	28.9	52.4
0.246000	21.7	Off	N	19.6	30.2	51.9
0.286000	20.1	Off	N	19.6	30.5	50.6
0.310000	19.9	Off	N	19.6	30.1	50.0
0.582000	19.5	Off	N	19.6	26.5	46.0
24.286000	25.7	Off	N	20.0	24.3	50.0

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(N_{ANT}/N_{SS}=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	-3.70	-1.50	-1.50	0.48	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 12, 2015	Apr. 01, 2016 ~ Apr. 25, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 12, 2015	Apr. 01, 2016 ~ Apr. 25, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSQ	200578/026	9kHz-40GHz	May 19, 2015	Apr. 01, 2016 ~ Apr. 25, 2016	May 18, 2016	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 06, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Apr. 06, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Apr. 06, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Sep. 01, 2016	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Nov. 19, 2016	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Nov. 16, 2016	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 08, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Oct. 07, 2016	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 19, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Nov. 18, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1902247	1GHz~18GHz	Jul. 01, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Jun. 30, 2016	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Sep. 23, 2016	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Apr. 14, 2016 ~ Apr. 21, 2016	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Apr. 14, 2016 ~ Apr. 21, 2016	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Nov. 01, 2016	Radiation (03CH11-HY)
Preamplifier	MITEQ	JS44-18004000-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Apr. 14, 2016 ~ Apr. 21, 2016	Jun. 01, 2016	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.26

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90

Appendix A. Conducted Test Results

Report Number : FR631828C

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2016/04/01~2016/04/25	Relative Humidity:	51~54	%

Report Number : FR631828C

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	14.00	14.10	8.08	8.08	0.50	Pass
11b	1Mbps	1	6	2437	14.00	14.55	8.08	8.08	0.50	Pass
11b	1Mbps	1	11	2462	14.15	14.60	8.08	8.08	0.50	Pass
11g	6Mbps	1	1	2412	17.25	17.20	15.78	15.72	0.50	Pass
11g	6Mbps	1	6	2437	17.30	17.35	15.62	16.00	0.50	Pass
11g	6Mbps	1	11	2462	17.35	17.25	16.04	16.24	0.50	Pass
HT20	MCS0	1	1	2412	18.35	18.25	16.80	16.80	0.50	Pass
HT20	MCS0	1	6	2437	18.30	18.35	16.32	16.80	0.50	Pass
HT20	MCS0	1	11	2462	18.25	18.20	16.92	16.78	0.50	Pass
VHT20	MCS0	1	1	2412	18.15	18.25	16.82	16.80	0.50	Pass
VHT20	MCS0	1	6	2437	18.30	18.35	16.96	16.56	0.50	Pass
VHT20	MCS0	1	11	2462	18.25	18.20	17.16	16.90	0.50	Pass
11b	1Mbps	2	1	2412	14.05	14.10	8.04	8.04	0.50	Pass
11b	1Mbps	2	6	2437	14.00	14.55	8.08	8.12	0.50	Pass
11b	1Mbps	2	11	2462	14.35	14.65	8.56	8.08	0.50	Pass
11g	6Mbps	2	1	2412	17.20	17.15	16.28	15.76	0.50	Pass
11g	6Mbps	2	6	2437	17.25	17.35	15.70	16.00	0.50	Pass
11g	6Mbps	2	11	2462	17.30	17.30	16.30	15.68	0.50	Pass
HT20	MCS0	2	1	2412	18.20	18.20	16.80	16.76	0.50	Pass
HT20	MCS0	2	6	2437	18.30	18.35	16.32	16.90	0.50	Pass
HT20	MCS0	2	11	2462	18.30	18.30	17.16	16.78	0.50	Pass
VHT20	MCS0	2	1	2412	18.25	18.20	16.80	16.52	0.50	Pass
VHT20	MCS0	2	6	2437	18.25	18.40	16.56	16.56	0.50	Pass
VHT20	MCS0	2	11	2462	18.25	18.25	17.16	16.80	0.50	Pass

Report Number : FR631828C

TEST RESULTS DATA
Peak Output Power

2.4GHz Band											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)	
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2
11b	1Mbps	1	1	2412	19.59	16.66		-3.70	-1.50	15.89	15.16
11b	1Mbps	1	6	2437	20.67	16.97		-3.70	-1.50	16.97	15.47
11b	1Mbps	1	11	2462	21.09	17.00		-3.70	-1.50	17.39	15.50
11g	6Mbps	1	1	2412	22.00	18.66		-3.70	-1.50	18.30	17.16
11g	6Mbps	1	6	2437	22.37	18.47		-3.70	-1.50	18.67	16.97
11g	6Mbps	1	11	2462	21.95	17.75		-3.70	-1.50	18.25	16.25
HT20	MCS0	1	1	2412	21.96	18.78		-3.70	-1.50	18.26	17.28
HT20	MCS0	1	6	2437	22.33	18.67		-3.70	-1.50	18.63	17.17
HT20	MCS0	1	11	2462	21.75	17.75		-3.70	-1.50	18.05	16.25
VHT20	MCS0	1	1	2412	21.97	18.76		-3.70	-1.50	18.27	17.26
VHT20	MCS0	1	6	2437	22.12	18.86		-3.70	-1.50	18.42	17.36
VHT20	MCS0	1	11	2462	21.41	17.23		-3.70	-1.50	17.71	15.73
11b	1Mbps	2	1	2412	18.97	15.76	20.67	-1.50		19.17	
11b	1Mbps	2	6	2437	20.03	16.25	21.55	-1.50		20.05	
11b	1Mbps	2	11	2462	20.42	16.29	21.84	-1.50		20.34	
11g	6Mbps	2	1	2412	21.24	17.72	22.84	-1.50		21.34	
11g	6Mbps	2	6	2437	21.57	17.74	23.07	-1.50		21.57	
11g	6Mbps	2	11	2462	21.02	17.05	22.48	-1.50		20.98	
HT20	MCS0	2	1	2412	21.48	17.83	23.04	-1.50		21.54	
HT20	MCS0	2	6	2437	21.56	17.96	23.13	-1.50		21.63	
HT20	MCS0	2	11	2462	21.04	16.76	22.42	-1.50		20.92	
VHT20	MCS0	2	1	2412	21.45	17.83	23.02	-1.50		21.52	
VHT20	MCS0	2	6	2437	21.55	17.83	23.09	-1.50		21.59	
VHT20	MCS0	2	11	2462	20.60	16.52	22.03	-1.50		20.53	

Note: Measured power (dBm) has offset with cable loss.

Report Number : FR631828C

TEST RESULTS DATA
Average Output Power

2.4GHz Band																			
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	0.04	0.04	17.30	14.35		30.00	30.00	-3.70	-1.50	13.60	12.85	36.00	36.00	Pass
11b	1Mbps	1	6	2437	0.04	0.04	18.48	14.88		30.00	30.00	-3.70	-1.50	14.78	13.38	36.00	36.00	Pass
11b	1Mbps	1	11	2462	0.04	0.04	18.91	14.96		30.00	30.00	-3.70	-1.50	15.21	13.46	36.00	36.00	Pass
11g	6Mbps	1	1	2412	0.25	0.25	16.54	13.41		30.00	30.00	-3.70	-1.50	12.84	11.91	36.00	36.00	Pass
11g	6Mbps	1	6	2437	0.25	0.25	17.30	13.73		30.00	30.00	-3.70	-1.50	13.60	12.23	36.00	36.00	Pass
11g	6Mbps	1	11	2462	0.25	0.25	16.18	12.47		30.00	30.00	-3.70	-1.50	12.48	10.97	36.00	36.00	Pass
HT20	MCS0	1	1	2412	0.22	0.22	16.35	13.19		30.00	30.00	-3.70	-1.50	12.65	11.69	36.00	36.00	Pass
HT20	MCS0	1	6	2437	0.22	0.22	16.81	13.58		30.00	30.00	-3.70	-1.50	13.11	12.08	36.00	36.00	Pass
HT20	MCS0	1	11	2462	0.22	0.22	15.51	11.82		30.00	30.00	-3.70	-1.50	11.81	10.32	36.00	36.00	Pass
VHT20	MCS0	1	1	2412	0.26	0.26	16.44	13.17		30.00	30.00	-3.70	-1.50	12.74	11.67	36.00	36.00	Pass
VHT20	MCS0	1	6	2437	0.26	0.26	16.75	13.59		30.00	30.00	-3.70	-1.50	13.05	12.09	36.00	36.00	Pass
VHT20	MCS0	1	11	2462	0.26	0.26	14.97	11.28		30.00	30.00	-3.70	-1.50	11.27	9.78	36.00	36.00	Pass
11b	1Mbps	2	1	2412	0.04	0.04	16.75	13.48	18.43	30.00		-1.50		16.93		36.00		Pass
11b	1Mbps	2	6	2437	0.04	0.04	17.89	14.11	19.41	30.00		-1.50		17.91		36.00		Pass
11b	1Mbps	2	11	2462	0.04	0.04	18.39	14.24	19.80	30.00		-1.50		18.30		36.00		Pass
11g	6Mbps	2	1	2412	0.25	0.25	15.90	12.34	17.48	30.00		-1.50		15.98		36.00		Pass
11g	6Mbps	2	6	2437	0.25	0.25	16.66	12.89	18.18	30.00		-1.50		16.68		36.00		Pass
11g	6Mbps	2	11	2462	0.25	0.25	15.36	11.72	16.92	30.00		-1.50		15.42		36.00		Pass
HT20	MCS0	2	1	2412	0.26	0.31	15.79	12.22	17.37	30.00		-1.50		15.87		36.00		Pass
HT20	MCS0	2	6	2437	0.26	0.31	16.05	12.90	17.77	30.00		-1.50		16.27		36.00		Pass
HT20	MCS0	2	11	2462	0.26	0.31	14.75	11.22	16.35	30.00		-1.50		14.85		36.00		Pass
VHT20	MCS0	2	1	2412	0.26	0.26	15.82	12.28	17.41	30.00		-1.50		15.91		36.00		Pass
VHT20	MCS0	2	6	2437	0.26	0.26	16.05	12.90	17.77	30.00		-1.50		16.27		36.00		Pass
VHT20	MCS0	2	11	2462	0.26	0.26	14.28	10.74	15.87	30.00		-1.50		14.37		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

Report Number : FR631828C

TEST RESULTS DATA
Average Power Spectral Density

2.4GHz Band													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average PSD (dBm/3kHz)			DG (dBi)		Average PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-10.16	-13.76	-	-3.70	-1.50	8.00	8.00	Pass
11b	1Mbps	1	6	2437	-9.07	-10.40		-3.70	-1.50	8.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.23	-10.76		-3.70	-1.50	8.00	8.00	Pass
11g	6Mbps	1	1	2412	-15.73	-19.10		-3.70	-1.50	8.00	8.00	Pass
11g	6Mbps	1	6	2437	-15.09	-18.54		-3.70	-1.50	8.00	8.00	Pass
11g	6Mbps	1	11	2462	-15.99	-20.11		-3.70	-1.50	8.00	8.00	Pass
HT20	MCS0	1	1	2412	-16.37	-19.74		-3.70	-1.50	8.00	8.00	Pass
HT20	MCS0	1	6	2437	-15.72	-19.40		-3.70	-1.50	8.00	8.00	Pass
HT20	MCS0	1	11	2462	-17.43	-20.75		-3.70	-1.50	8.00	8.00	Pass
VHT20	MCS0	1	1	2412	-16.70	-19.92		-3.70	-1.50	8.00	8.00	Pass
VHT20	MCS0	1	6	2437	-15.90	-19.26		-3.70	-1.50	8.00	8.00	Pass
VHT20	MCS0	1	11	2462	-18.11	-21.82		-3.70	-1.50	8.00	8.00	Pass
11b	1Mbps	2	1	2412	-11.18	-14.59	-8.17	0.48		8.00		Pass
11b	1Mbps	2	6	2437	-8.20	-9.21	-5.19	0.48		8.00		Pass
11b	1Mbps	2	11	2462	-5.06	-11.22	-2.05	0.48		8.00		Pass
11g	6Mbps	2	1	2412	-16.71	-20.03	-13.70	0.48		8.00		Pass
11g	6Mbps	2	6	2437	-16.19	-19.22	-13.18	0.48		8.00		Pass
11g	6Mbps	2	11	2462	-17.27	-20.13	-14.26	0.48		8.00		Pass
HT20	MCS0	2	1	2412	-17.27	-20.58	-14.26	0.48		8.00		Pass
HT20	MCS0	2	6	2437	-16.68	-19.96	-13.67	0.48		8.00		Pass
HT20	MCS0	2	11	2462	-18.39	-21.87	-15.38	0.48		8.00		Pass
VHT20	MCS0	2	1	2412	-17.50	-20.54	-14.49	0.48		8.00		Pass
VHT20	MCS0	2	6	2437	-16.64	-20.05	-13.63	0.48		8.00		Pass
VHT20	MCS0	2	11	2462	-18.76	-22.38	-15.75	0.48		8.00		Pass

Measured power density (dBm) has offset with cable loss.

Appendix B. Radiated Spurious Emission

Test Engineer :	J.C. Liang and Bill Chang and Ken Wu	Temperature :	19~21°C
		Relative Humidity :	50~55%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2385.33	53.73	-20.27	74	54.05	26.96	6.71	33.99	298	137	P	H
		2385.42	45.76	-8.24	54	46.08	26.96	6.71	33.99	298	137	A	H
	*	2412	106.61	-	-	106.82	27.06	6.71	33.98	298	137	P	H
	*	2412	104	-	-	104.21	27.06	6.71	33.98	298	137	A	H
													H
													H
		2387.04	57.69	-16.31	74	57.96	27.01	6.71	33.99	345	99	P	V
		2385.51	50.72	-3.28	54	50.99	27.01	6.71	33.99	345	99	A	V
	*	2412	110.22	-	-	110.43	27.06	6.71	33.98	345	99	P	V
	*	2412	107.33	-	-	107.54	27.06	6.71	33.98	345	99	A	V
													V
													V
802.11b CH 06 2437MHz		2352.39	51	-23	74	51.43	26.91	6.65	33.99	367	136	P	H
		2390	40.34	-13.66	54	40.6	27.01	6.71	33.98	367	136	A	H
	*	2437	105.53	-	-	105.6	27.16	6.74	33.97	367	136	P	H
	*	2437	102.97	-	-	103.04	27.16	6.74	33.97	367	136	A	H
		2493.12	51.63	-22.37	74	51.5	27.3	6.77	33.94	367	136	P	H
		2483.6	40.84	-13.16	54	40.77	27.25	6.77	33.95	367	136	A	H
		2318.55	51.9	-22.1	74	52.5	26.82	6.58	34	111	88	P	V
		2390	41.41	-12.59	54	41.67	27.01	6.71	33.98	111	88	A	V
	*	2437	110.06	-	-	110.13	27.16	6.74	33.97	111	88	P	V
	*	2437	107.74	-	-	107.81	27.16	6.74	33.97	111	88	A	V
		2485	52.13	-21.87	74	52.06	27.25	6.77	33.95	111	88	P	V
		2484.96	41.61	-12.39	54	41.54	27.25	6.77	33.95	111	88	A	V

802.11b CH 11 2462MHz	*	2462	107.27	-	-	107.26	27.2	6.77	33.96	296	50	P	H
	*	2462	104.83	-	-	104.82	27.2	6.77	33.96	296	50	A	H
		2486.16	56.39	-17.61	74	56.32	27.25	6.77	33.95	296	50	P	H
		2488.16	50.04	-3.96	54	49.92	27.3	6.77	33.95	296	50	A	H
													H
													H
	*	2462	109.89	-	-	109.88	27.2	6.77	33.96	151	87	P	V
	*	2462	106.81	-	-	106.8	27.2	6.77	33.96	151	87	A	V
		2488.08	57.99	-16.01	74	57.87	27.3	6.77	33.95	151	87	P	V
		2487	53.75	-0.25	54	53.68	27.25	6.77	33.95	151	87	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	53.77	-20.23	74	77.14	31.12	10.58	65.07	212	122	P	H
		4824	52.79	-1.21	54	76.16	31.12	10.58	65.07	212	122	A	H
													H
													H
		4824	46.5	-27.5	74	69.87	31.12	10.58	65.07	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4874	47.58	-26.42	74	70.91	31.21	10.48	65.02	100	0	P	H
		7311	51.98	-22.02	74	68.68	36.08	12.28	65.06	203	166	P	H
		7311	48.49	-5.51	54	65.19	36.08	12.28	65.06	203	166	A	H
													H
		4874	47.88	-26.12	74	71.21	31.21	10.48	65.02	100	0	P	V
		7311	47.35	-26.65	74	64.05	36.08	12.28	65.06	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4924	48.26	-25.74	74	71.55	31.29	10.39	64.97	100	0	P	H
		7386	47.29	-26.71	74	63.61	36.27	12.49	65.08	100	0	P	H
													H
													H
		4924	46.37	-27.63	74	69.66	31.29	10.39	64.97	100	0	P	V
		7386	45.15	-28.85	74	61.47	36.27	12.49	65.08	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2390	59.45	-14.55	74	59.71	27.01	6.71	33.98	279	66	P	H
		2390	50.85	-3.15	54	51.11	27.01	6.71	33.98	279	66	A	H
	*	2412	107.57	-	-	107.78	27.06	6.71	33.98	279	66	P	H
	*	2412	99.53	-	-	99.74	27.06	6.71	33.98	279	66	A	H
													H
													H
		2389.92	62.18	-11.82	74	62.44	27.01	6.71	33.98	134	91	P	V
		2390	53.35	-0.65	54	53.61	27.01	6.71	33.98	134	91	A	V
	*	2412	108.3	-	-	108.51	27.06	6.71	33.98	134	91	P	V
	*	2412	100.7	-	-	100.91	27.06	6.71	33.98	134	91	A	V
													V
													V
802.11g CH 06 2437MHz		2389.47	51.47	-22.53	74	51.74	27.01	6.71	33.99	273	129	P	H
		2389.02	42.13	-11.87	54	42.4	27.01	6.71	33.99	273	129	A	H
	*	2437	109.26	-	-	109.33	27.16	6.74	33.97	273	129	P	H
	*	2437	101.29	-	-	101.36	27.16	6.74	33.97	273	129	A	H
		2484	52.05	-21.95	74	51.98	27.25	6.77	33.95	273	129	P	H
		2484.8	42.38	-11.62	54	42.31	27.25	6.77	33.95	273	129	A	H
		2389.2	53.07	-20.93	74	53.34	27.01	6.71	33.99	104	110	P	V
		2389.02	43.54	-10.46	54	43.81	27.01	6.71	33.99	104	110	A	V
	*	2437	111.39	-	-	111.46	27.16	6.74	33.97	104	110	P	V
	*	2437	103.46	-	-	103.53	27.16	6.74	33.97	104	110	A	V
		2485.24	52.36	-21.64	74	52.29	27.25	6.77	33.95	104	110	P	V
		2485.16	43.22	-10.78	54	43.15	27.25	6.77	33.95	104	110	A	V

802.11g CH 11 2462MHz	*	2462	104.63	-	-	104.62	27.2	6.77	33.96	100	115	P	H
	*	2462	97.33	-	-	97.32	27.2	6.77	33.96	100	115	A	H
		2484.12	60.96	-13.04	74	60.89	27.25	6.77	33.95	100	115	P	H
		2483.56	51.16	-2.84	54	51.09	27.25	6.77	33.95	100	115	A	H
													H
													H
	*	2462	107.76	-	-	107.75	27.2	6.77	33.96	155	115	P	V
	*	2462	100.11	-	-	100.1	27.2	6.77	33.96	155	115	A	V
		2483.52	63.29	-10.71	74	63.22	27.25	6.77	33.95	155	115	P	V
		2483.6	53.3	-0.7	54	53.23	27.25	6.77	33.95	155	115	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	47.21	-26.79	74	70.58	31.12	10.58	65.07	100	0	P	H
													H
													H
													H
		4824	43.12	-30.88	74	66.49	31.12	10.58	65.07	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	47.7	-26.3	74	71.03	31.21	10.48	65.02	100	0	P	H
		7311	47.25	-26.75	74	63.95	36.08	12.28	65.06	100	0	P	H
													H
													H
		4874	48.43	-25.57	74	71.76	31.21	10.48	65.02	100	0	P	V
		7311	41.4	-32.6	74	58.1	36.08	12.28	65.06	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	43.26	-30.74	74	66.55	31.29	10.39	64.97	100	0	P	H
		7386	41.78	-32.22	74	58.1	36.27	12.49	65.08	100	0	P	H
													H
													H
		4924	41.91	-32.09	74	65.2	31.29	10.39	64.97	100	0	P	V
		7386	40.65	-33.35	74	56.97	36.27	12.49	65.08	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.92	60.49	-13.51	74	60.75	27.01	6.71	33.98	265	128	P	H
		2390	50.1	-3.9	54	50.36	27.01	6.71	33.98	265	128	A	H
	*	2412	106.79	-	-	107	27.06	6.71	33.98	265	128	P	H
	*	2412	98.95	-	-	99.16	27.06	6.71	33.98	265	128	A	H
													H
													H
		2389.83	62.99	-11.01	74	63.25	27.01	6.71	33.98	349	98	P	V
		2390	53.66	-0.34	54	53.92	27.01	6.71	33.98	349	98	A	V
	*	2412	109.11	-	-	109.32	27.06	6.71	33.98	349	98	P	V
	*	2412	101.4	-	-	101.61	27.06	6.71	33.98	349	98	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2358.87	52.15	-21.85	74	52.58	26.91	6.65	33.99	293	125	P	H
		2388.75	41.8	-12.2	54	42.07	27.01	6.71	33.99	293	125	A	H
	*	2437	107.84	-	-	107.91	27.16	6.74	33.97	293	125	P	H
	*	2437	100.2	-	-	100.27	27.16	6.74	33.97	293	125	A	H
		2484.52	52.41	-21.59	74	52.34	27.25	6.77	33.95	293	125	P	H
		2483.72	42.32	-11.68	54	42.25	27.25	6.77	33.95	293	125	A	H
		2389.11	52.18	-21.82	74	52.45	27.01	6.71	33.99	309	122	P	V
		2389.11	42.9	-11.1	54	43.17	27.01	6.71	33.99	309	122	A	V
	*	2437	111.67	-	-	111.74	27.16	6.74	33.97	309	122	P	V
	*	2437	103.8	-	-	103.87	27.16	6.74	33.97	309	122	A	V
		2488.72	52.07	-21.93	74	51.95	27.3	6.77	33.95	309	122	P	V
		2485.12	43.31	-10.69	54	43.24	27.25	6.77	33.95	309	122	A	V

802.11n HT20 CH 11 2462MHz	*	2462	106.26	-	-	106.25	27.2	6.77	33.96	239	76	P	H
	*	2462	98.54	-	-	98.53	27.2	6.77	33.96	239	76	A	H
		2484.04	63.1	-10.9	74	63.03	27.25	6.77	33.95	239	76	P	H
		2483.52	52.83	-1.17	54	52.76	27.25	6.77	33.95	239	76	A	H
													H
													H
	*	2463.794	107.78	-	-	107.77	27.2	6.77	33.96	234	127	P	V
	*	2463.376	100.1	-	-	100.09	27.2	6.77	33.96	234	127	A	V
		2483.96	59.67	-14.33	74	59.6	27.25	6.77	33.95	234	127	P	V
		2483.56	52.45	-1.55	54	52.38	27.25	6.77	33.95	234	127	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	47.5	-26.5	74	70.87	31.12	10.58	65.07	100	0	P	H
													H
													H
													H
		4824	46.43	-27.57	74	69.8	31.12	10.58	65.07	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	47.05	-26.95	74	70.38	31.21	10.48	65.02	100	0	P	H
		7311	49.39	-24.61	74	66.09	36.08	12.28	65.06	100	0	P	H
													H
													H
		4874	47.56	-26.44	74	70.89	31.21	10.48	65.02	100	0	P	V
		7311	42.66	-31.34	74	59.36	36.08	12.28	65.06	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4924	45.32	-28.68	74	68.61	31.29	10.39	64.97	100	0	P	H
		7386	42	-32	74	58.32	36.27	12.49	65.08	100	0	P	H
													H
													H
		4924	41.48	-32.52	74	64.77	31.29	10.39	64.97	100	0	P	V
		7386	40.04	-33.96	74	56.36	36.27	12.49	65.08	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 01 2412MHz		2389.92	60.34	-13.66	74	60.6	27.01	6.71	33.98	305	43	P	H
		2390	50.2	-3.8	54	50.46	27.01	6.71	33.98	305	43	A	H
	*	2412	106.79	-	-	107	27.06	6.71	33.98	305	43	P	H
	*	2412	99.18	-	-	99.39	27.06	6.71	33.98	305	43	A	H
													H
													H
		2389.47	62.31	-11.69	74	62.58	27.01	6.71	33.99	201	130	P	V
		2390	52.26	-1.74	54	52.52	27.01	6.71	33.98	201	130	A	V
	*	2411.606	109.57	-	-	109.78	27.06	6.71	33.98	201	130	P	V
	*	2410.688	101.47	-	-	101.68	27.06	6.71	33.98	201	130	A	V
													V
													V
802.11ac VHT20 CH 06 2437MHz		2388.93	52.06	-21.94	74	52.33	27.01	6.71	33.99	295	45	P	H
		2389.92	42.57	-11.43	54	42.83	27.01	6.71	33.98	295	45	A	H
	*	2437	109.44	-	-	109.51	27.16	6.74	33.97	295	45	P	H
	*	2437	102.36	-	-	102.43	27.16	6.74	33.97	295	45	A	H
		2488.84	51.96	-22.04	74	51.84	27.3	6.77	33.95	295	45	P	H
		2484.68	42.96	-11.04	54	42.89	27.25	6.77	33.95	295	45	A	H
		2387.31	53.81	-20.19	74	54.08	27.01	6.71	33.99	200	99	P	V
		2389.2	43.64	-10.36	54	43.91	27.01	6.71	33.99	200	99	A	V
	*	2437	111.03	-	-	111.1	27.16	6.74	33.97	200	99	P	V
	*	2437	103.07	-	-	103.14	27.16	6.74	33.97	200	99	A	V
		2485.04	52.89	-21.11	74	52.82	27.25	6.77	33.95	200	99	P	V
		2484.76	43.1	-10.9	54	43.03	27.25	6.77	33.95	200	99	A	V

	*	2462	105.69	-	-	105.68	27.2	6.77	33.96	324	37	P	H
	*	2462	97.97	-	-	97.96	27.2	6.77	33.96	324	37	A	H
		2484.04	63.16	-10.84	74	63.09	27.25	6.77	33.95	324	37	P	H
		2483.64	52.56	-1.44	54	52.49	27.25	6.77	33.95	324	37	A	H
802.11ac													H
VHT20													H
CH 11	*	2460.705	107.6	-	-	107.59	27.2	6.77	33.96	201	96	P	V
2462MHz	*	2460.705	99.77	-	-	99.76	27.2	6.77	33.96	201	96	A	V
		2484.04	63.39	-10.61	74	63.32	27.25	6.77	33.95	201	96	P	V
		2483.6	53.06	-0.94	54	52.99	27.25	6.77	33.95	201	96	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 01 2412MHz		4824	48.08	-25.92	74	71.45	31.12	10.58	65.07	100	0	P	H
													H
													H
													H
		4824	42.5	-31.5	74	65.87	31.12	10.58	65.07	100	0	P	V
													V
													V
													V
802.11ac VHT20 CH 06 2437MHz		4874	48.99	-25.01	74	72.32	31.21	10.48	65.02	100	0	P	H
		7311	48.71	-25.29	74	65.41	36.08	12.28	65.06	100	0	P	H
													H
													H
		4874	45.88	-28.12	74	69.21	31.21	10.48	65.02	100	0	P	V
		7311	43.11	-30.89	74	59.81	36.08	12.28	65.06	100	0	P	V
													V
													V
802.11ac VHT20 CH 11 2462MHz		4924	44.27	-29.73	74	67.56	31.29	10.39	64.97	100	0	P	H
		7386	39.65	-34.35	74	55.97	36.27	12.49	65.08	100	0	P	H
													H
													H
		4924	40.41	-33.59	74	63.7	31.29	10.39	64.97	100	0	P	V
		7386	39.84	-34.16	74	56.16	36.27	12.49	65.08	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		78.33	26.32	-13.68	40	43.48	13.46	1.17	31.79			P	H
		126.12	38.74	-4.76	43.5	51.16	17.88	1.48	31.78	105	284	P	H
		204.96	28.23	-15.27	43.5	42.18	16.09	1.74	31.78			P	H
		443.5	26.15	-19.85	46	31.13	23.18	3.68	31.84			P	H
		720	30.96	-15.04	46	32.35	27.09	3.54	32.02			P	H
		930	33.58	-12.42	46	30.86	30.05	3.86	31.19			P	H
													H
													H
													H
													H
													H
													H
		45.12	36.46	-3.54	40	50.27	17.07	0.93	31.81	179	125	P	V
		122.07	33.11	-10.39	43.5	45.65	17.76	1.48	31.78			P	V
		203.61	30.98	-12.52	43.5	44.95	16.07	1.74	31.78			P	V
		304.9	25.06	-20.94	46	34.76	19.83	2.23	31.76			P	V
		701.8	27.61	-18.39	46	29.37	26.74	3.54	32.04			P	V
		925.1	32.74	-13.26	46	30.2	29.91	3.86	31.23			P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **over limit** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang and Bill Chang and Ken Wu	**Temperature :**	19~21°C
		Relative Humidity :	50~55%

Note symbol

-L	**Low channel location**
-R	**High channel location**

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	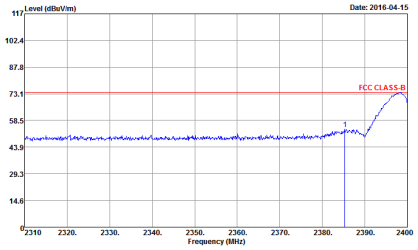 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 9	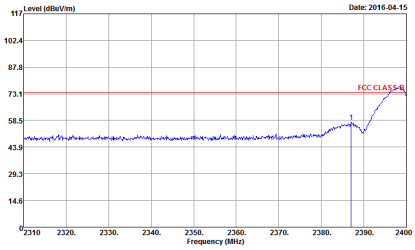 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 9
Avg.	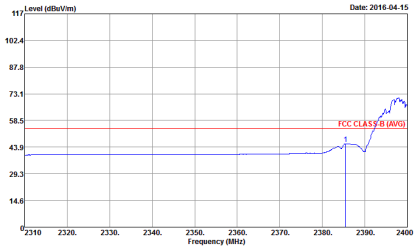 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 9	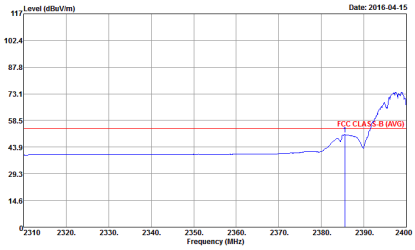 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 9

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1+2	Horizontal	Vertical
Peak	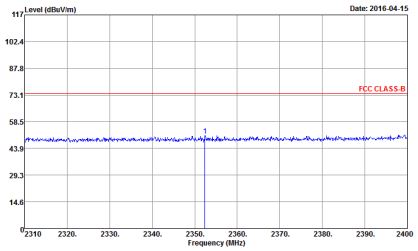 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10	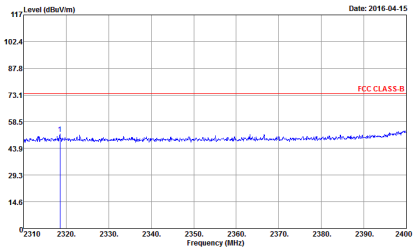 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10
Avg.	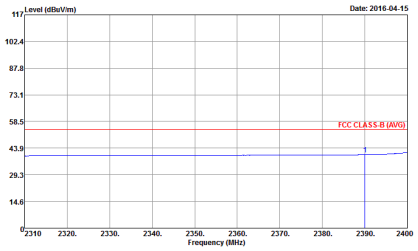 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10	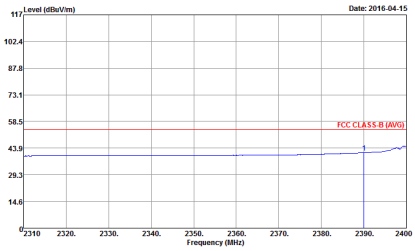 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1+2	Horizontal	Vertical
Peak	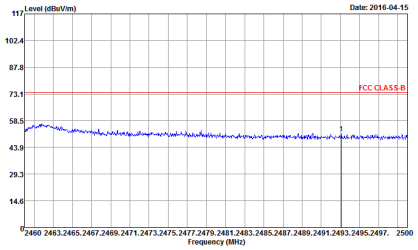 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10	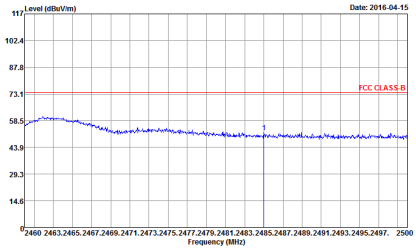 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10
Avg.	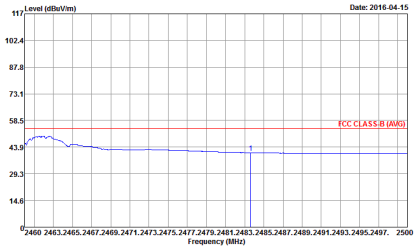 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10	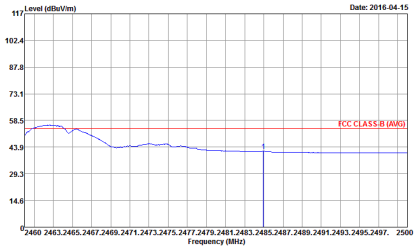 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 10

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	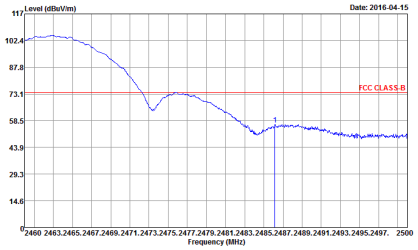 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 11 Power : 18	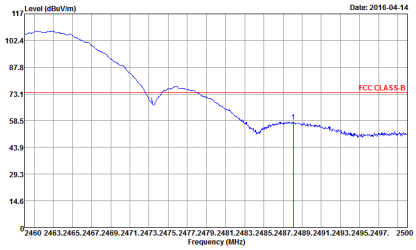 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 11 Power : 18
Avg.	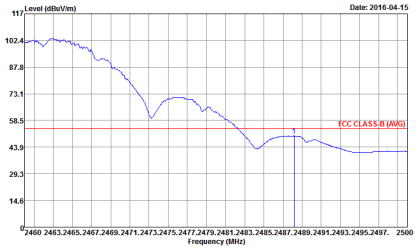 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 11 Power : 18	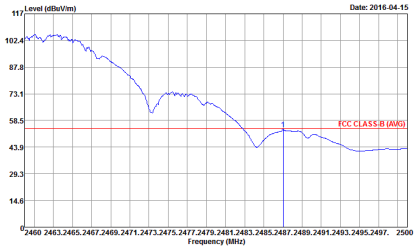 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 631828 Mode : 11 Power : 18

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	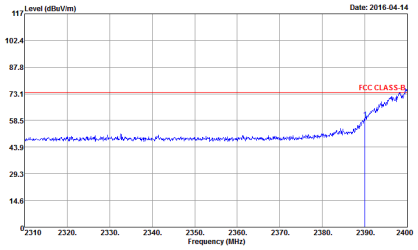 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 12 Power : 15	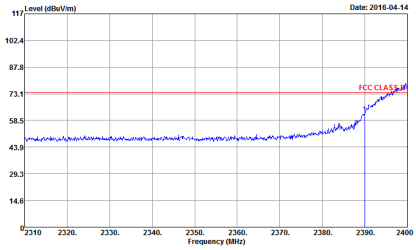 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 12 Power : 15
Avg.	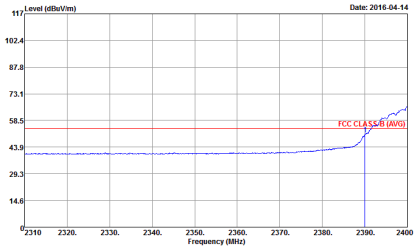 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 12 Power : 15	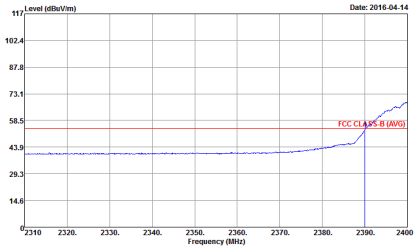 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 12 Power : 15

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1+2	Horizontal	Vertical
Peak	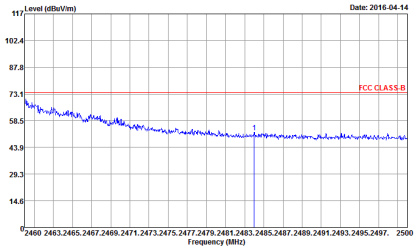 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13	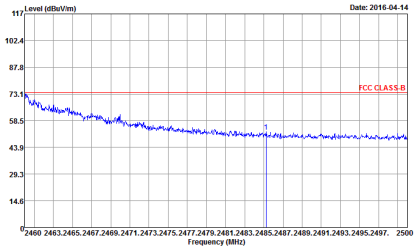 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13
Avg.	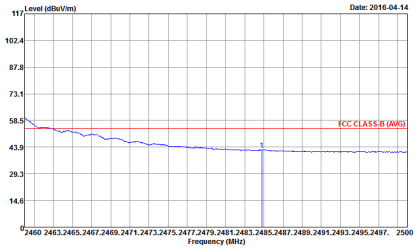 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13	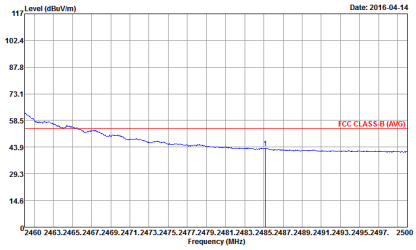 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 13

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	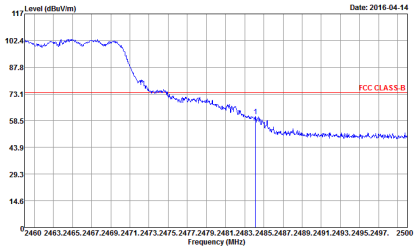 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 14 Power : 13.5	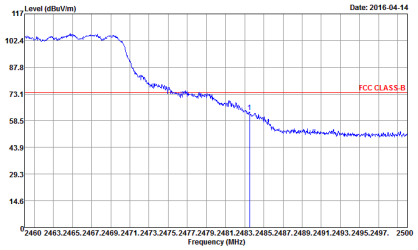 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 14 Power : 13.5
Avg.	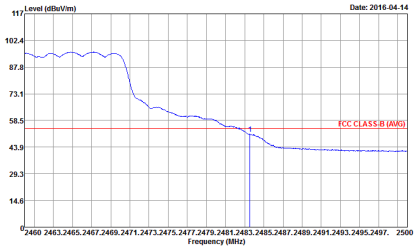 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 14 Power : 13.5	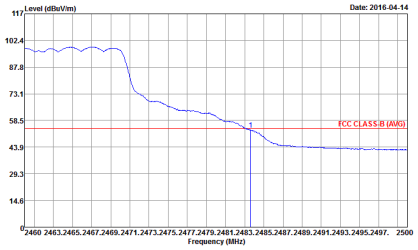 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 14 Power : 13.5

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	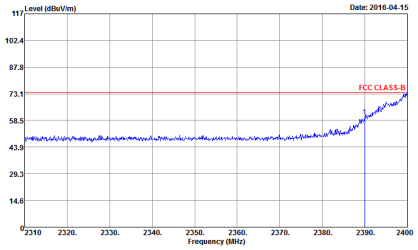 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 15 Power : 14.5	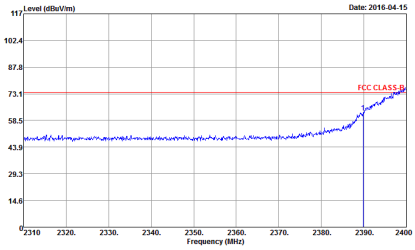 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 15 Power : 14.5
Avg.	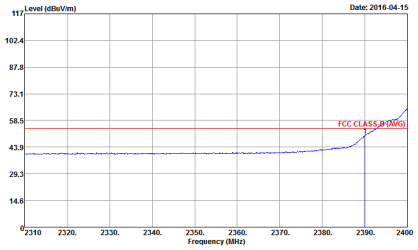 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 15 Power : 14.5	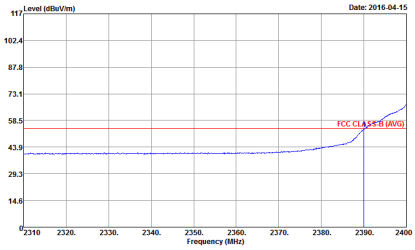 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 15 Power : 14.5

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1+2	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16	 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16
Avg.	 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16	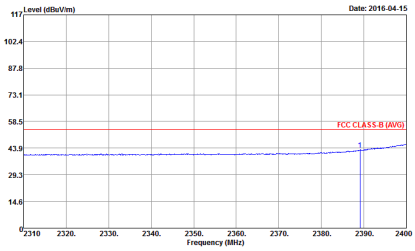 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1+2	Horizontal	Vertical
Peak	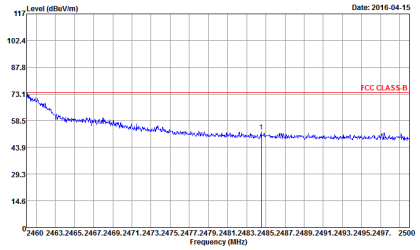 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16	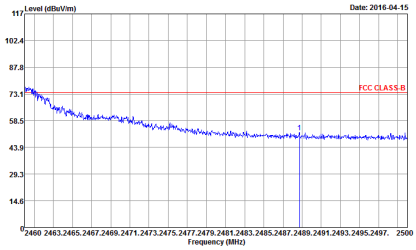 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16
Avg.	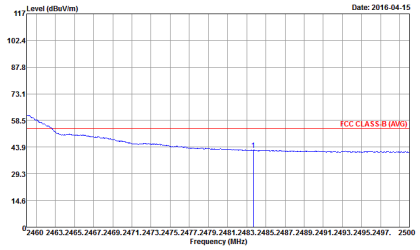 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16	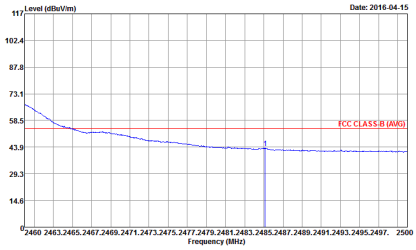 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 16

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	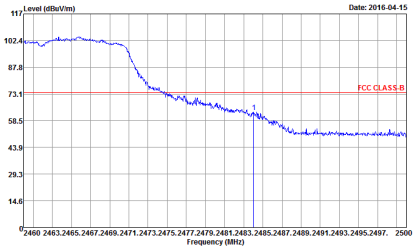 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 17 Setting : 13	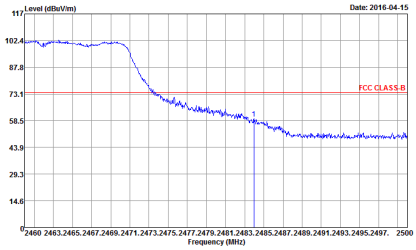 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 17 Setting : 13
Avg.	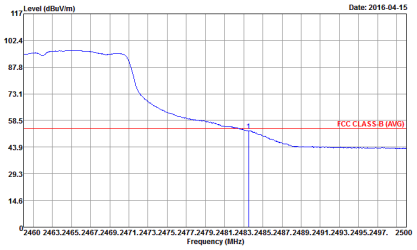 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 17 Setting : 13	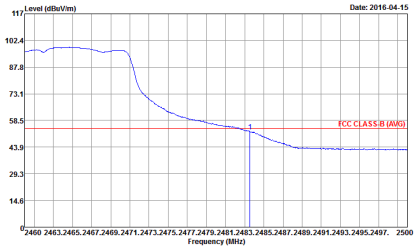 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 17 Setting : 13

2.4GHz 2400~2483.5MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	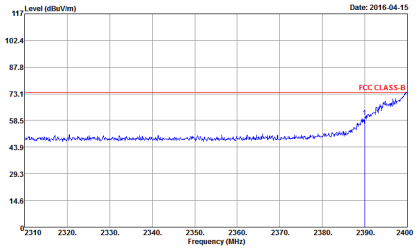 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 18 Setting : 14.5	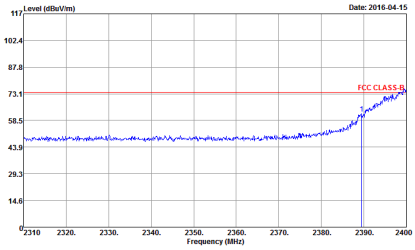 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 18 Setting : 14.5
Avg.	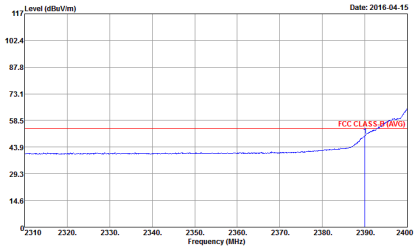 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 18 Setting : 14.5	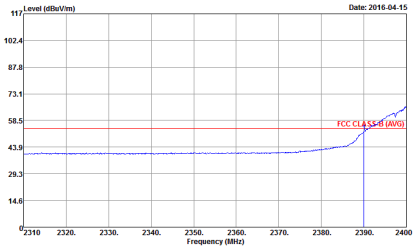 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 18 Setting : 14.5

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH06 2437MHz - L	
1+2	Horizontal	Vertical
Peak	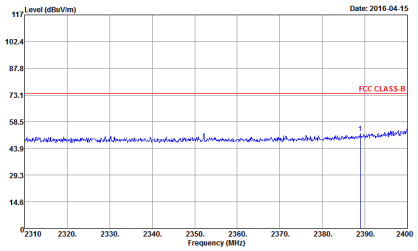 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19	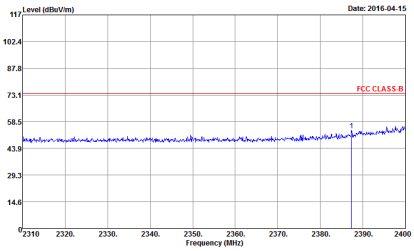 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19
Avg.	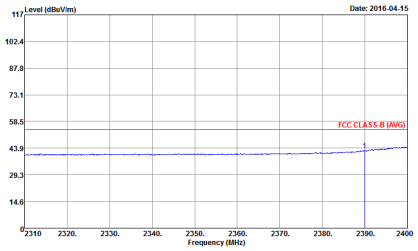 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19	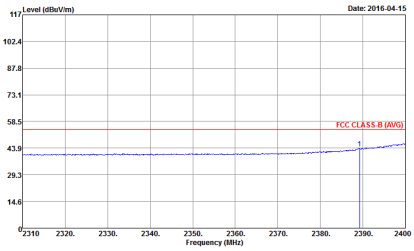 Site : 03CH11-HY Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH20 CH06 2437MHz - R	
1+2	Horizontal	Vertical
Peak	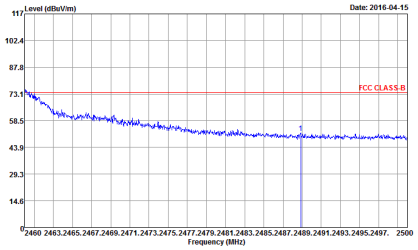 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19	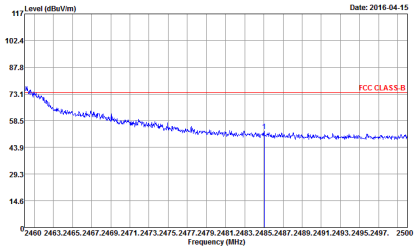 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19
Avg.	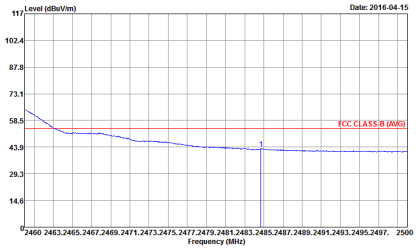 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19	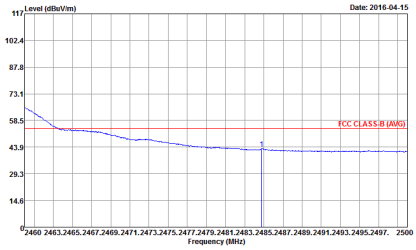 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 19

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ac VH20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	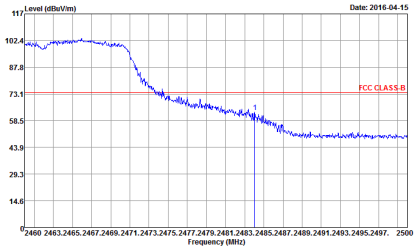 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 20 Setting : 13	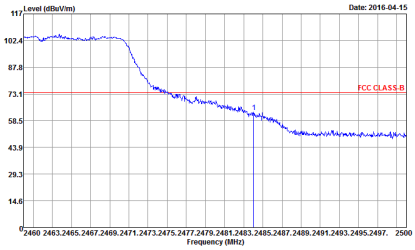 Site : 03CH11-HY Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 20 Setting : 13
Avg.	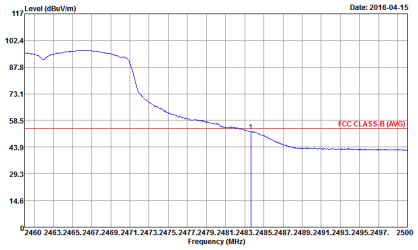 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 20 Setting : 13	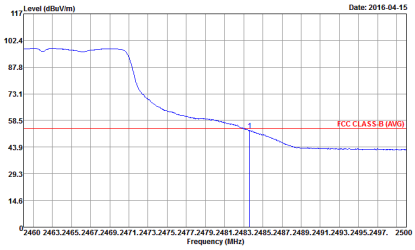 Site : 03CH11-HY Condition : FCC CLASS-B (AV6) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 631828 Mode : 20 Setting : 13

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	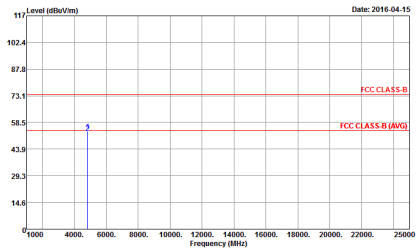 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 9	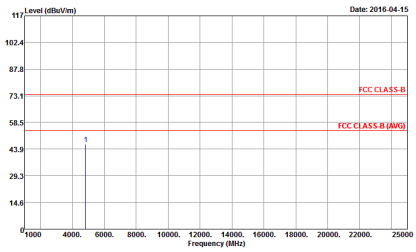 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 9

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	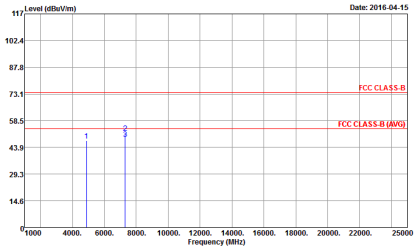 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 10	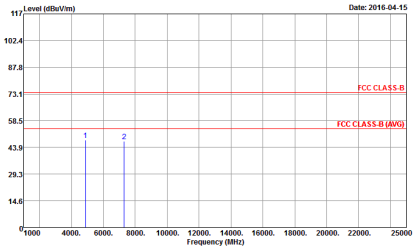 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 10

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	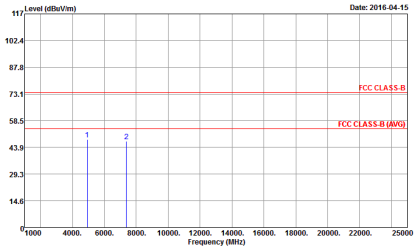 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 11	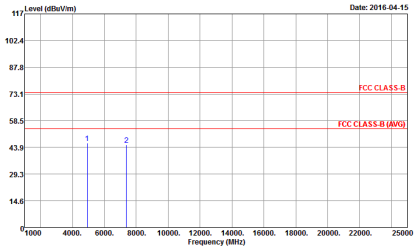 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 11

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	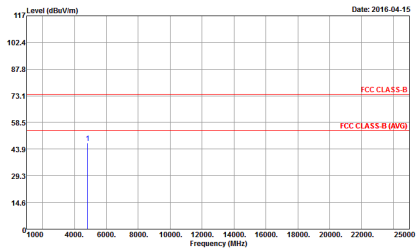	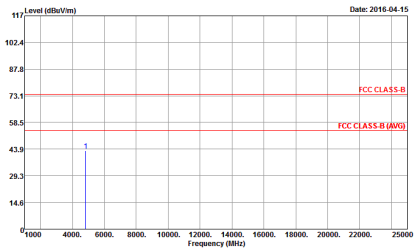

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	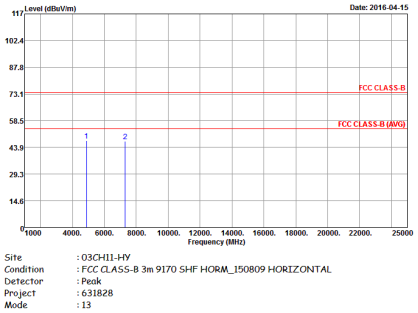 	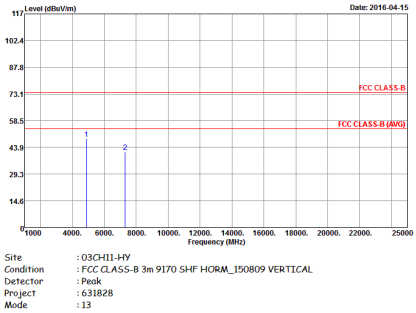

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	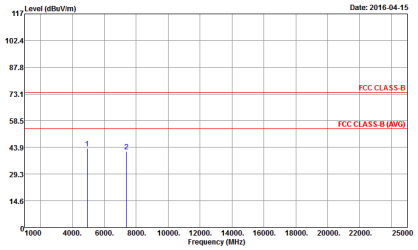 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 14	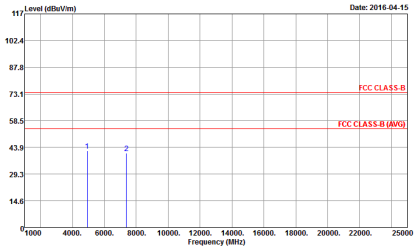 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 14

2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	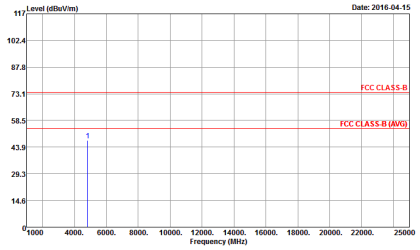 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 15	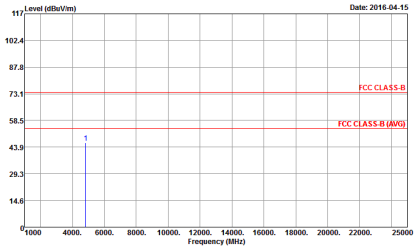 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 15

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	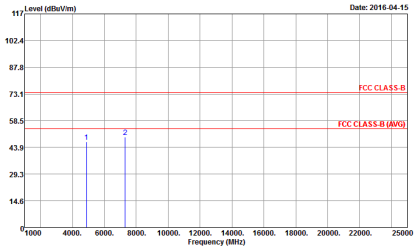 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 16	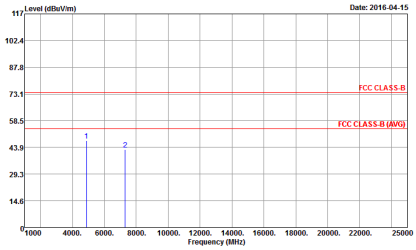 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 16

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	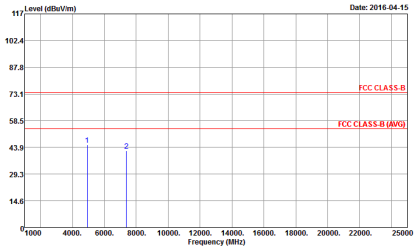 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 17	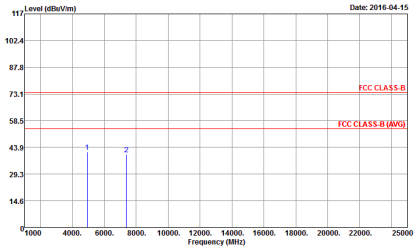 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 17

2.4GHz 2400~2483.5MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	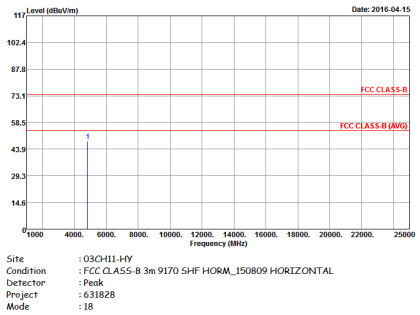	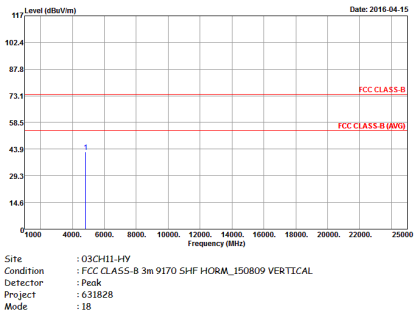

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	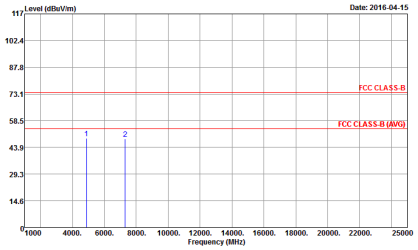 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 19	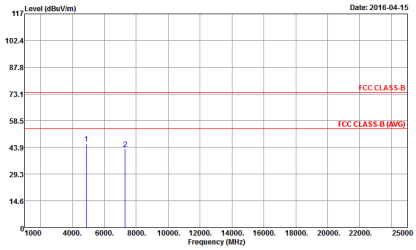 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 19

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	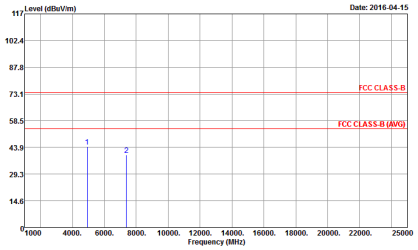 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 631828 Mode : 20	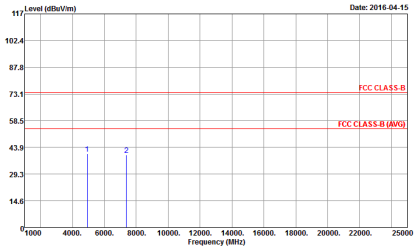 Site : 03CH11-HY Condition : FCC CLASS-B 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 631828 Mode : 20

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1+2	Horizontal	Vertical
QP / Peak	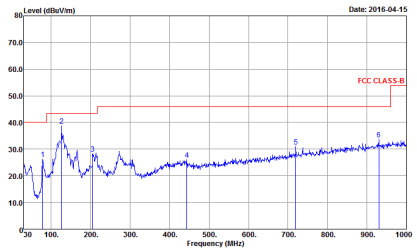 Site : 03CH11-HY Condition : FCC CLASS-B 3m BI-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 631828 Mode : 21	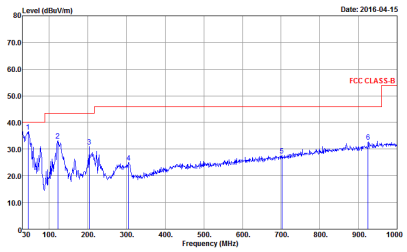 Site : 03CH11-HY Condition : FCC CLASS-B 3m BI-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 631828 Mode : 21

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	2.4GHz 802.11b for Ant 1	99.04	-	-	10Hz
1+2	2.4GHz 802.11b for Ant 2	99.05	-	-	10Hz
1+2	2.4GHz 802.11g for Ant 1	94.5	2060	0.49	1kHz
1+2	2.4GHz 802.11g for Ant 2	94.5	2060	0.49	1kHz
1+2	2.4GHz 802.11n HT20 for Ant 1	94.12	1920	0.52	1kHz
1+2	2.4GHz 802.11n HT20 for Ant 2	93.14	1900	0.53	1kHz
1+2	2.4GHz 802.11ac VHT20 for Ant 1	94.12	1920	0.52	1kHz
1+2	2.4GHz 802.11ac VHT20 for Ant 2	94.18	1940	0.52	1kHz

MIMO <Ant. 1+2(1)>

802.11b

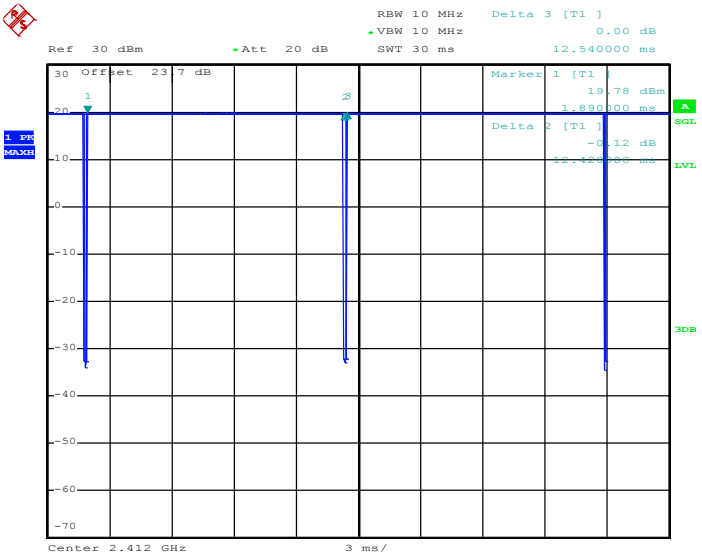

Date: 8.APR.2016 16:15:33

802.11g

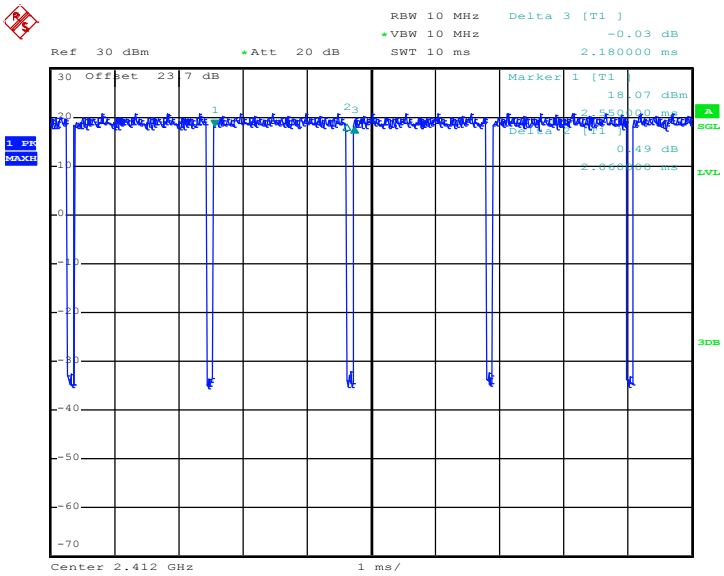

Date: 8.APR.2016 16:23:48

802.11n HT20

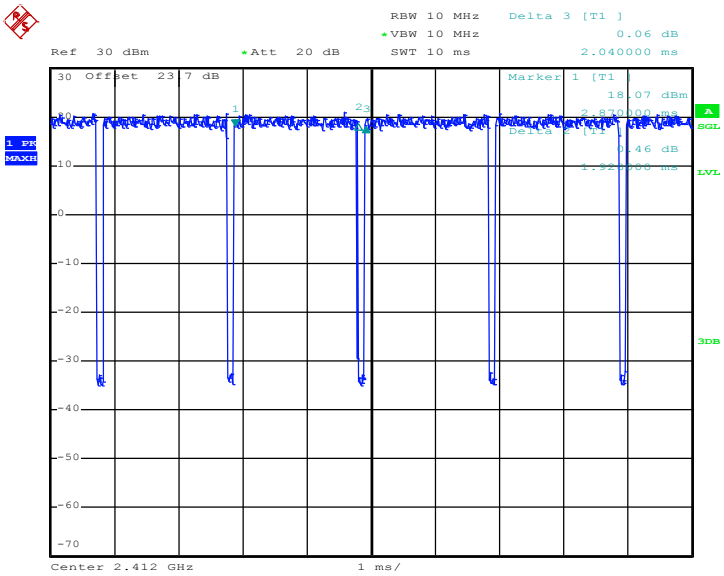

Date: 8.APR.2016 16:33:25

802.11ac VHT20

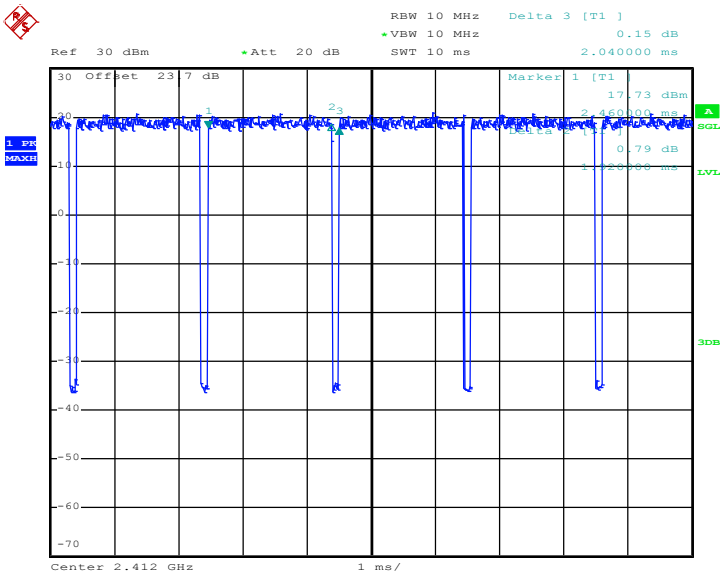

Date: 12.APR.2016 13:58:12

MIMO <Ant. 1+2(2)>

802.11b

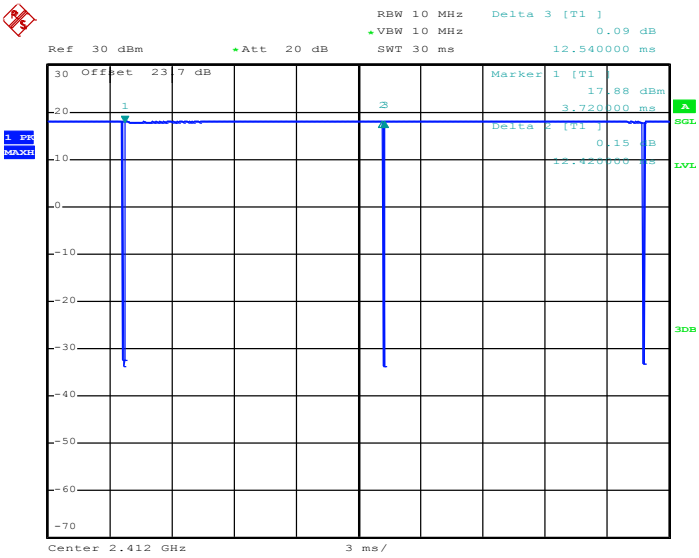

Date: 8.APR.2016 16:14:29

802.11g

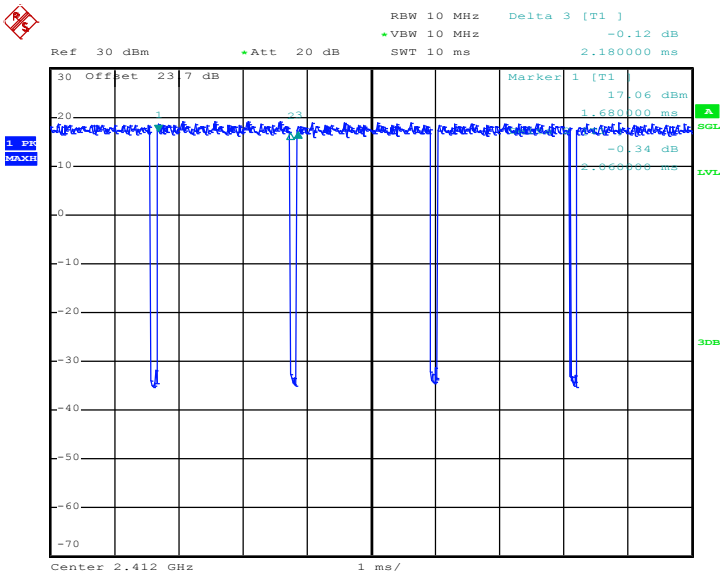

Date: 8.APR.2016 16:23:03

802.11n HT20

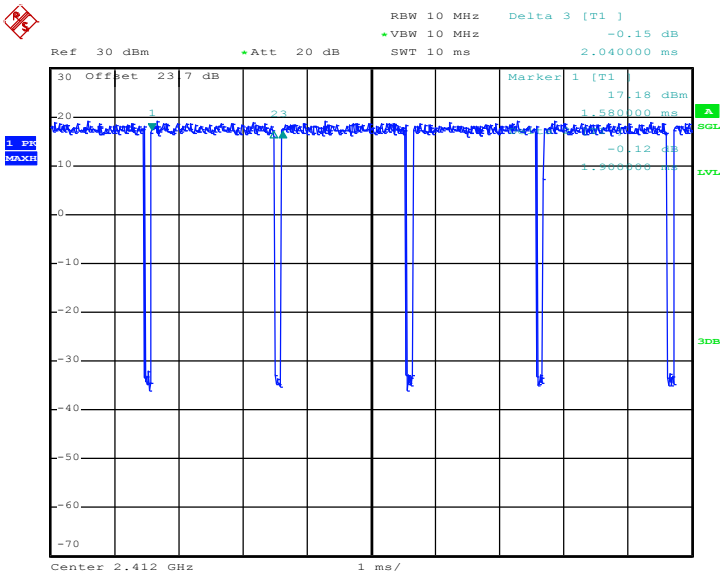

Date: 8.APR.2016 16:32:37

802.11ac VHT20

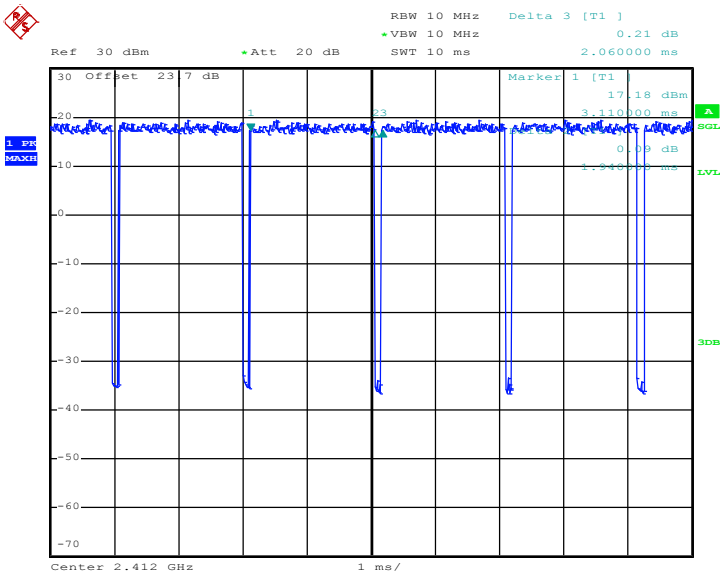

Date: 12.APR.2016 13:57:24