Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/25

System Check_Head_750MHz

DUT: D750V3-1078

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1
Medium: HSL_750_160525 Medium parameters used: f = 750 MHz; σ = 0.895 mho/m; ε_r = 41.6; ρ = 1000 kg/m^3
Ambient Temperature：23.2 ℃； Liquid Temperature：22.2 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(10.22, 10.22, 10.22); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.90 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.7 V/m; Power Drift = -0.072 dB
Peak SAR (extrapolated) = 2.84 W/kg
SAR(1 g) = 2.05 mW/g; SAR(10 g) = 1.4 mW/g
Maximum value of SAR (measured) = 2.51 mW/g

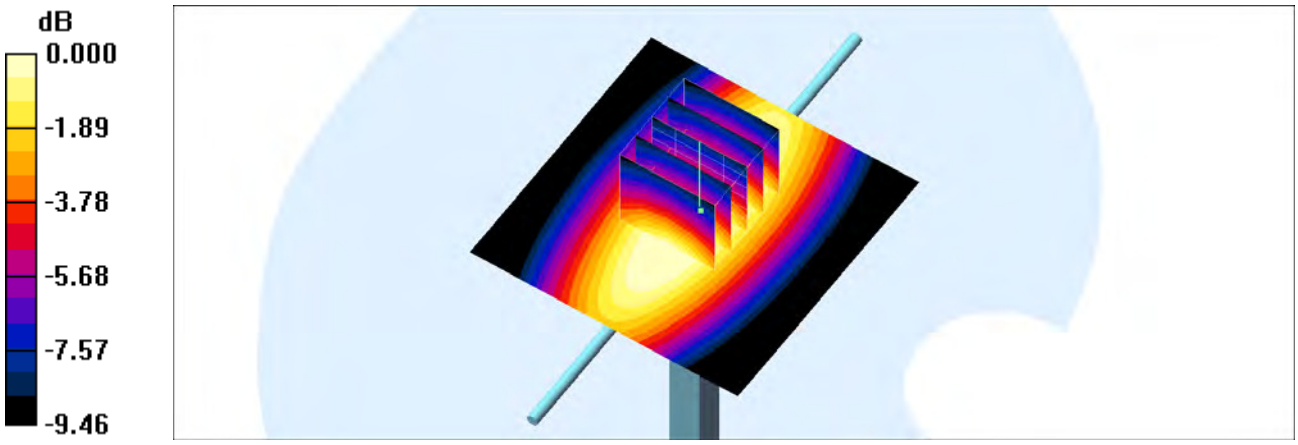

0 dB = 2.51mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/19

System Check_Body_750MHz

DUT: D750V3-1078

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1
Medium: MSL_750_160519 Medium parameters used: f = 750 MHz; σ = 0.963 mho/m; ε_r = 55.1; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.72 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 54.3 V/m; Power Drift = -0.022 dB
Peak SAR (extrapolated) = 3.13 W/kg
SAR(1 g) = 2.22 mW/g; SAR(10 g) = 1.51 mW/g
Maximum value of SAR (measured) = 2.74 mW/g

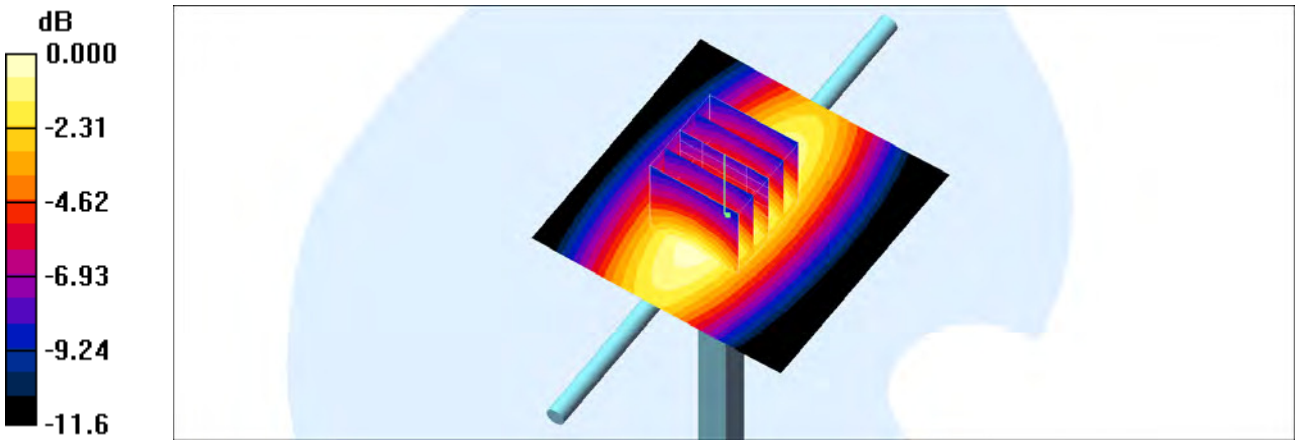

0 dB = 2.74mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/22

System Check_Body_750MHz

DUT: D750V3-1078

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1
Medium: MSL_750_160522 Medium parameters used: f = 750 MHz; σ = 0.962 mho/m; ε_r = 55; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.3 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(10.11, 10.11, 10.11); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.59 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 52.8 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 3.00 W/kg
SAR(1 g) = 2.11 mW/g; SAR(10 g) = 1.43 mW/g
Maximum value of SAR (measured) = 2.63 mW/g

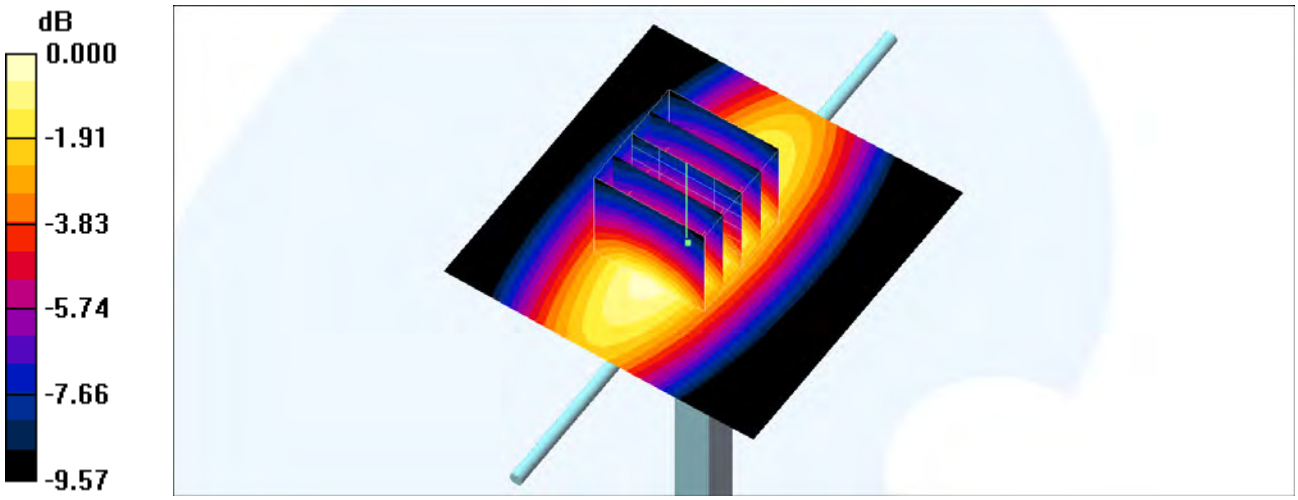

0 dB = 2.63mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/25

System Check_Head_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium: HSL_850_160525 Medium parameters used: f = 835 MHz; σ = 0.88 mho/m; ε_r = 42.9; ρ = 1000 kg/m^3
Ambient Temperature：23.1 ℃; Liquid Temperature：22.1 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 3.23 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 62.8 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.58 mW/g
Maximum value of SAR (measured) = 3.20 mW/g

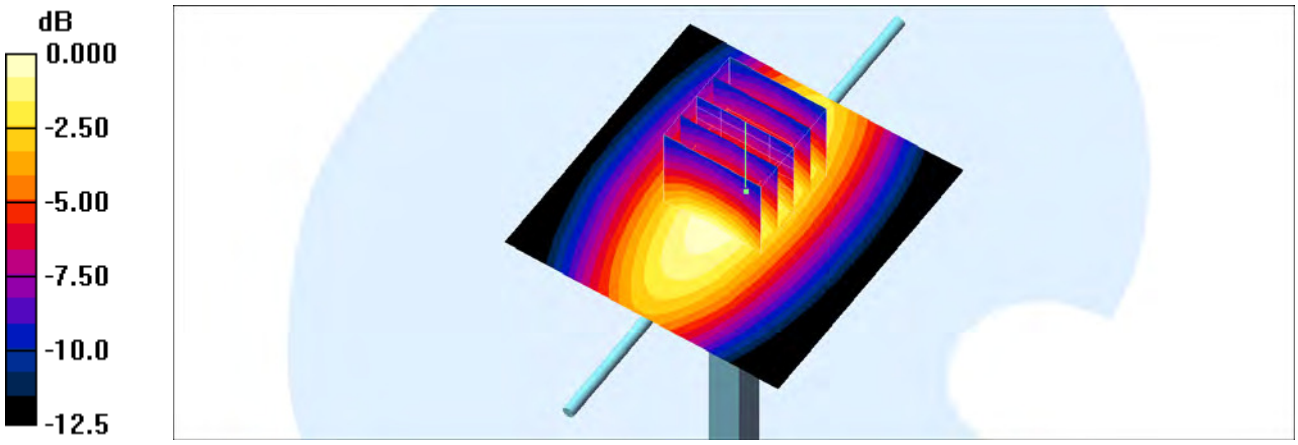

0 dB = 3.20mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/19

System Check_Body_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium: MSL_850_160519 Medium parameters used: f = 835 MHz; σ = 0.974 mho/m; ε_r = 57; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃； Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 3.55 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 62.7 V/m; Power Drift = 0.137 dB
Peak SAR (extrapolated) = 3.71 W/kg
SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.46 mW/g
Maximum value of SAR (measured) = 3.28 mW/g

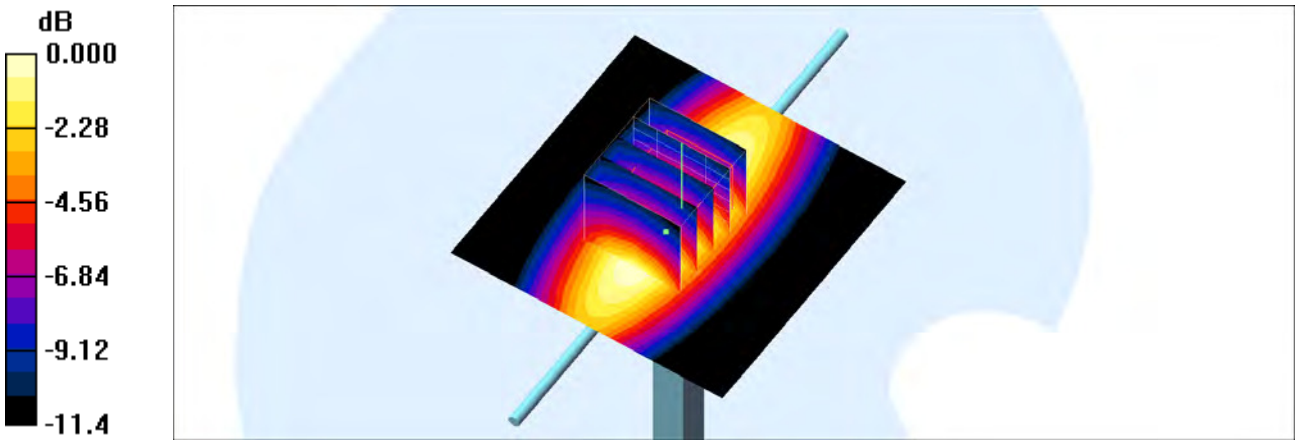

0 dB = 3.28mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/21

System Check_Body_835MHz

DUT: D835V2-499

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium: MSL_850_160521 Medium parameters used: f = 835 MHz; σ = 0.978 mho/m; ε_r = 56.7; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃； Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(10.05, 10.05, 10.05); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 3.21 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.2 V/m; Power Drift = -0.002 dB
Peak SAR (extrapolated) = 3.71 W/kg
SAR(1 g) = 2.55 mW/g; SAR(10 g) = 1.69 mW/g
Maximum value of SAR (measured) = 3.20 mW/g

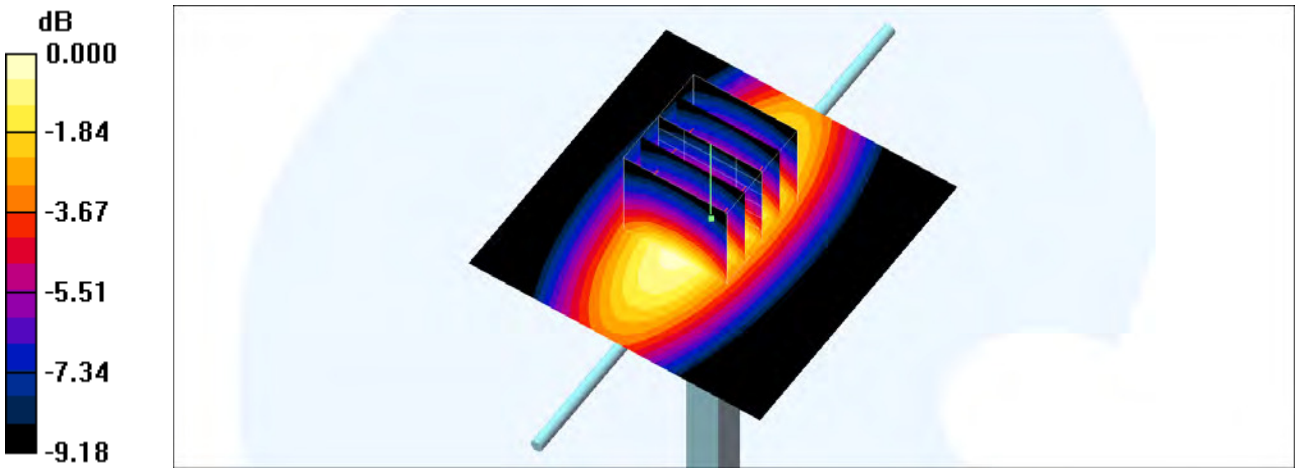

0 dB = 3.20mW/g

System Check_Head_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1
Medium: HSL_1750_160523 Medium parameters used: f = 1750 MHz; σ = 1.36 mho/m; ε_r = 40.4; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.3 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(8.6, 8.6, 8.6); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.3 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 96.7 V/m; Power Drift = -0.006 dB
Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 8.84 mW/g; SAR(10 g) = 4.63 mW/g
Maximum value of SAR (measured) = 12.5 mW/g

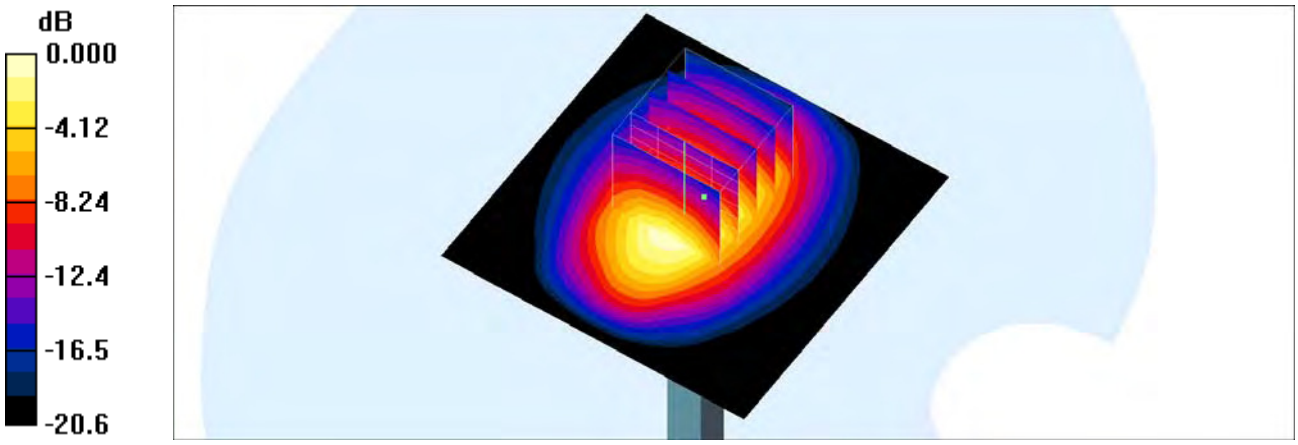

0 dB = 12.5mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/19

System Check_Body_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1
Medium: MSL_1750_160519 Medium parameters used: f = 1750 MHz; σ = 1.44 mho/m; ε_r = 52.8; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 15.0 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 99.7 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 16.7 W/kg
SAR(1 g) = 9.51 mW/g; SAR(10 g) = 5.01 mW/g
Maximum value of SAR (measured) = 14.2 mW/g

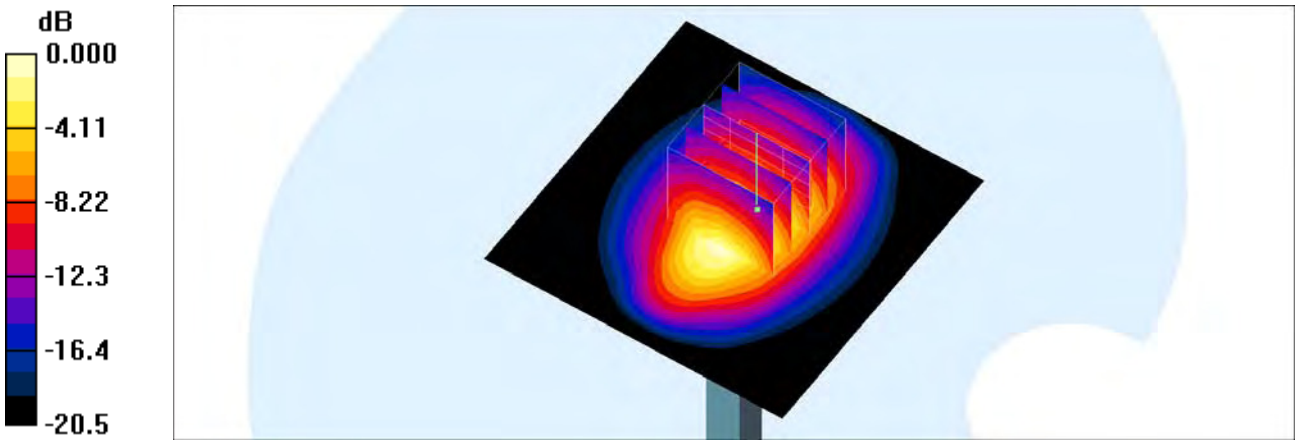

0 dB = 14.2mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/20

System Check_Body_1750MHz

DUT: D1750V2-1068

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1
Medium: MSL_1750_160520 Medium parameters used: f = 1750 MHz; σ = 1.43 mho/m; ε_r = 52.5; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(8.06, 8.06, 8.06); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 14.9 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 99.7 V/m; Power Drift = 0.109 dB
Peak SAR (extrapolated) = 16.6 W/kg
SAR(1 g) = 9.46 mW/g; SAR(10 g) = 4.98 mW/g
Maximum value of SAR (measured) = 14.1 mW/g

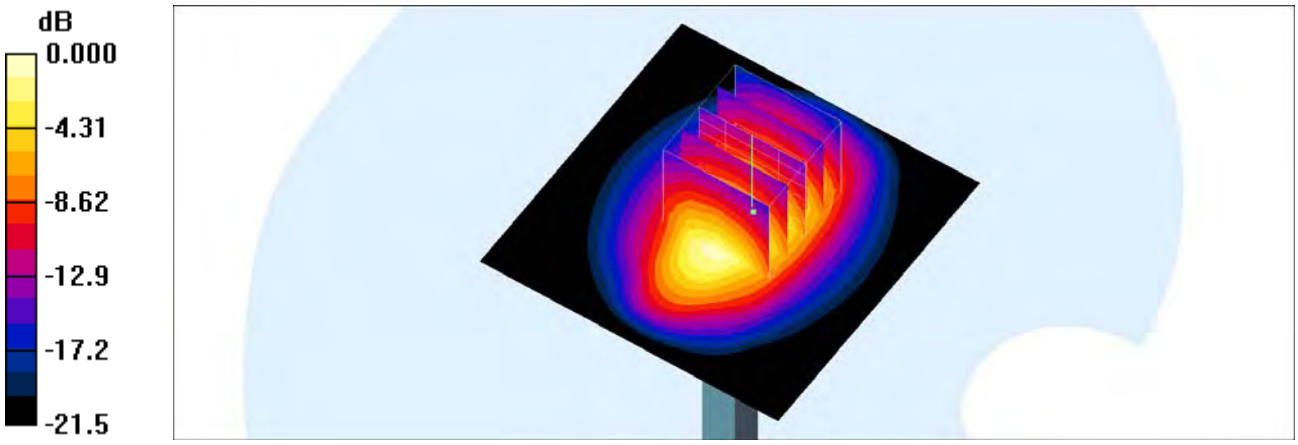

0 dB = 14.1mW/g

System Check_Head_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: HSL_1900_160524 Medium parameters used: f = 1900 MHz; σ = 1.46 mho/m; ε_r = 38.3; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.3 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(8.33, 8.33, 8.33); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 17.0 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 109.1 V/m; Power Drift = -0.001 dB
Peak SAR (extrapolated) = 19.9 W/kg
SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.37 mW/g
Maximum value of SAR (measured) = 16.3 mW/g

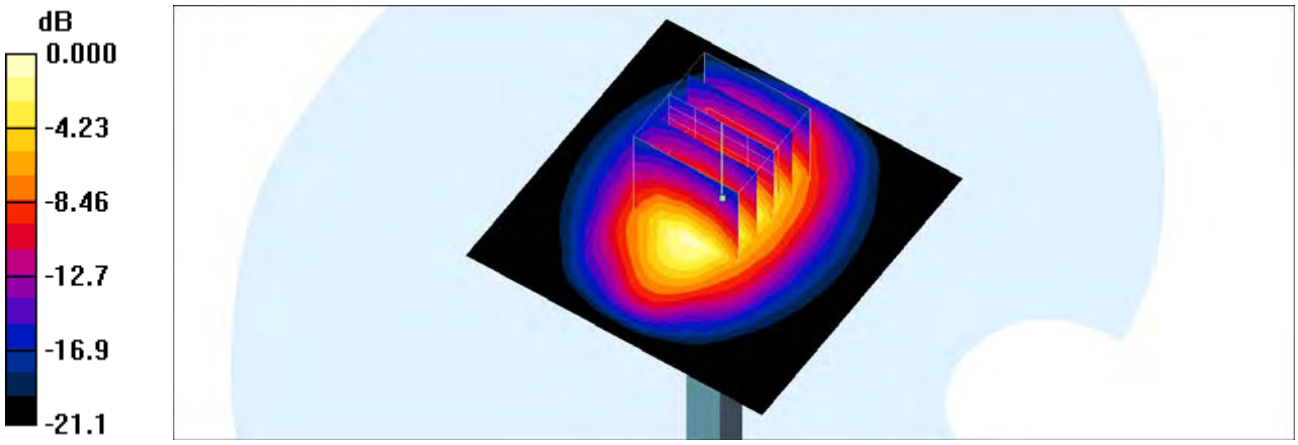

0 dB = 16.3mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/19

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: MSL_1900_160519 Medium parameters used: f = 1900 MHz; σ = 1.56 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 17.1 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 102.3 V/m; Power Drift = -0.019 dB
Peak SAR (extrapolated) = 19.2 W/kg
SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.71 mW/g
Maximum value of SAR (measured) = 16.0 mW/g

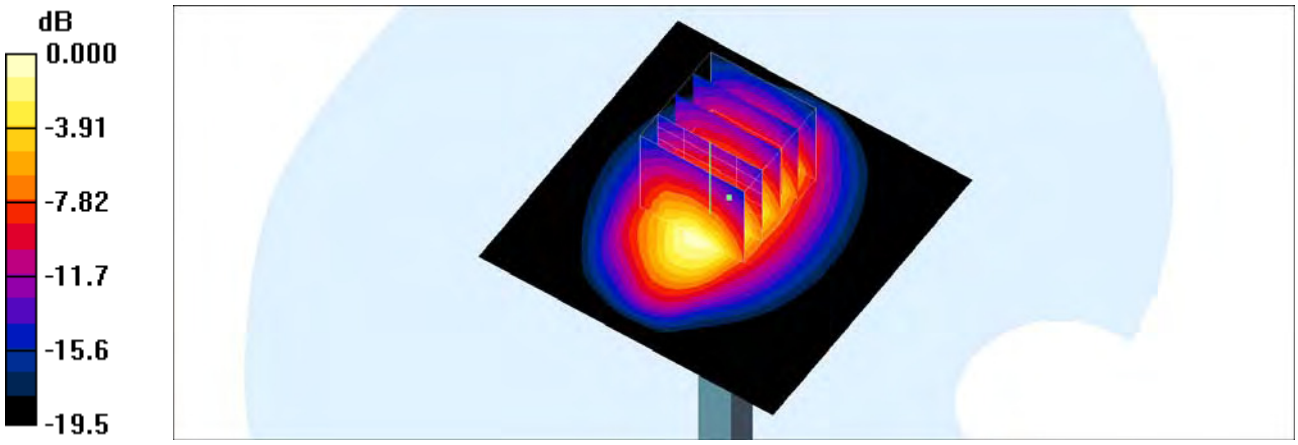

0 dB = 16.0mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/20

System Check_Body_1900MHz

DUT: D1900V2-5d041

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: MSL_1900_160520 Medium parameters used: f = 1900 MHz; σ = 1.58 mho/m; ε_r = 53.6; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.77, 7.77, 7.77); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 17.0 mW/g

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 101.5 V/m; Power Drift = 0.045 dB
Peak SAR (extrapolated) = 19.1 W/kg
SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.7 mW/g
Maximum value of SAR (measured) = 16.2 mW/g

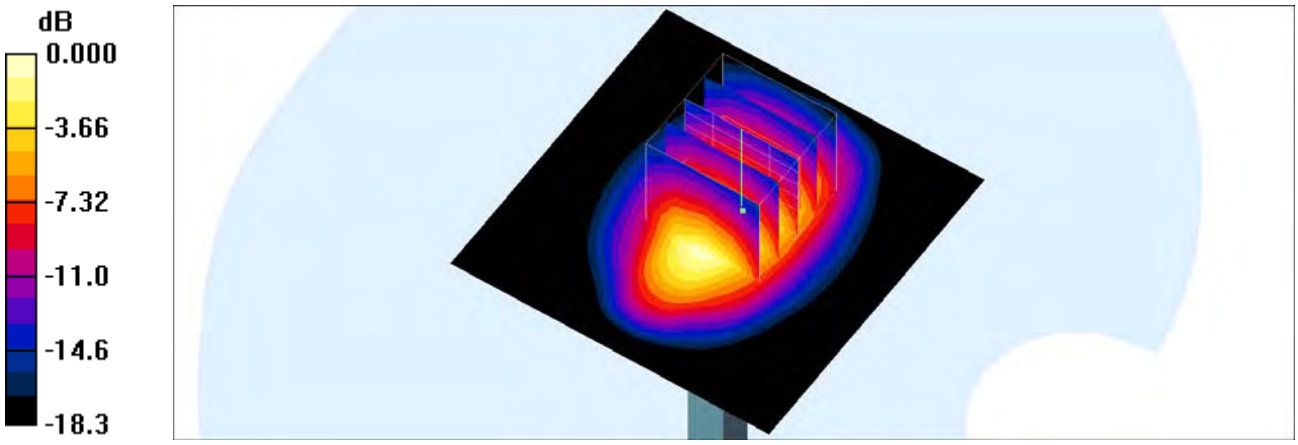

0 dB = 16.2mW/g

System Check_Head_2450MHz

DUT: D2450V2-736

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: HSL_2450_160517 Medium parameters used: f = 2450 MHz; σ = 1.74 mho/m; ε_r = 38; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.27, 7.27, 7.27); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 21.2 mW/g

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.1 V/m; Power Drift = -0.028 dB
Peak SAR (extrapolated) = 27.1 W/kg
SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.81 mW/g
Maximum value of SAR (measured) = 19.6 mW/g

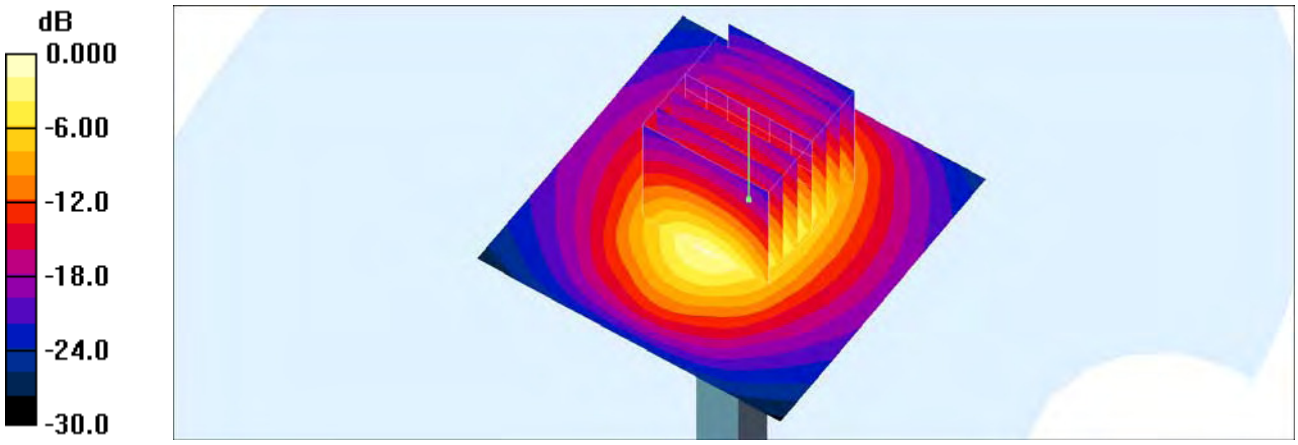

0 dB = 19.6mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/23

System Check_Body_2450MHz

DUT: D2450V2-736

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_160523 Medium parameters used: f = 2450 MHz; σ = 1.94 mho/m; ε_r = 53.4; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.3 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.43, 7.43, 7.43); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 18.0 mW/g

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.1 V/m; Power Drift = 0.054 dB
Peak SAR (extrapolated) = 23.7 W/kg
SAR(1 g) = 11.7 mW/g; SAR(10 g) = 5.49 mW/g
Maximum value of SAR (measured) = 17.8 mW/g

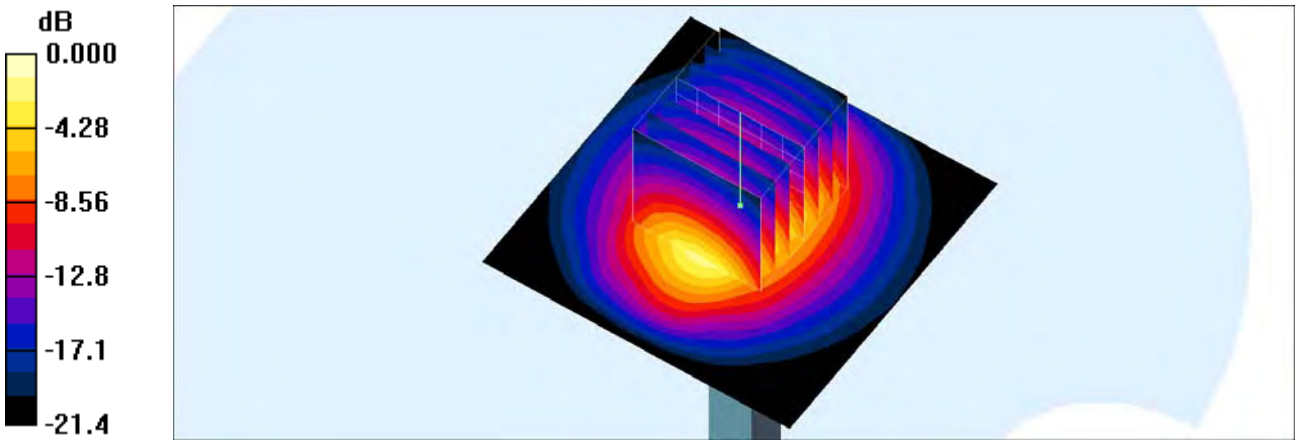

0 dB = 17.8mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/26

System Check_Body_2450MHz

DUT: D2450V2-736

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_160526 Medium parameters used: f = 2450 MHz; σ = 2 mho/m; ε_r = 54.3; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃; Liquid Temperature：22.4 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.43, 7.43, 7.43); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 18.5 mW/g

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.1 V/m; Power Drift = 0.011 dB
Peak SAR (extrapolated) = 24.4 W/kg
SAR(1 g) = 12.1 mW/g; SAR(10 g) = 5.67 mW/g
Maximum value of SAR (measured) = 18.3 mW/g

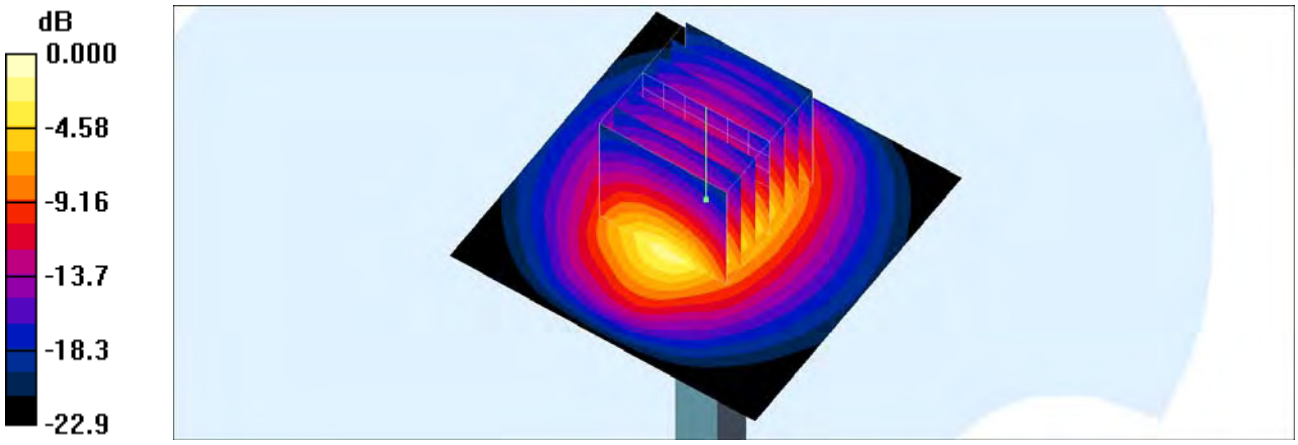

0 dB = 18.3mW/g

System Check_Head_2600MHz

DUT: D2600V2-1008

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: HSL_2600_160517 Medium parameters used: f = 2600 MHz; σ = 1.91 mho/m; ε_r = 37.5; ρ = 1000 kg/m^3
Ambient Temperature：23.5 ℃; Liquid Temperature：22.5 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.15, 7.15, 7.15); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 26.5 mW/g

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 113.1 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 31.0 W/kg
SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6 mW/g
Maximum value of SAR (measured) = 24.4 mW/g

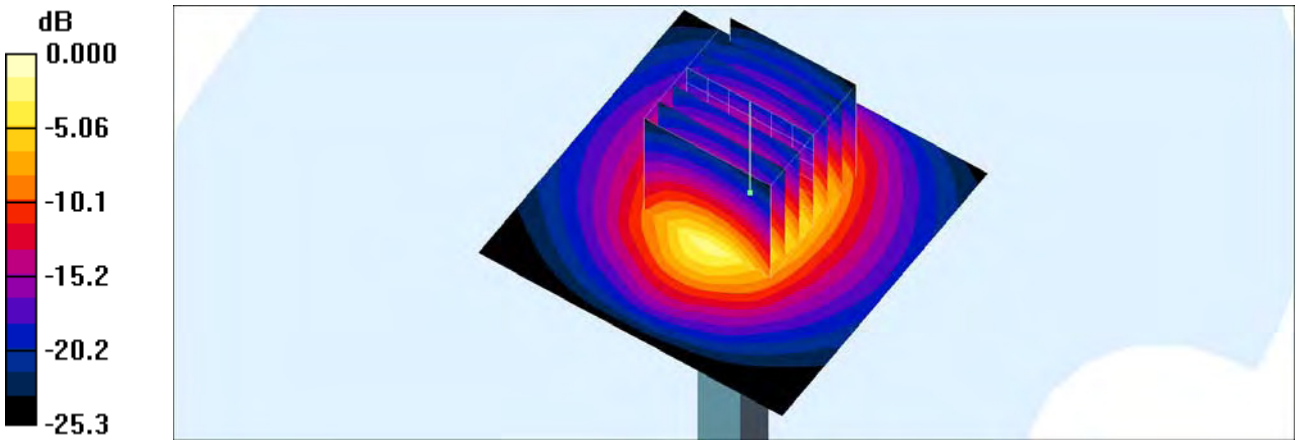

0 dB = 24.4mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2016/5/18

System Check_Body_2600MHz

DUT: D2600V2-1008

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: MSL_2600_160518 Medium parameters used: f = 2600 MHz; σ = 2.2 mho/m; ε_r = 52.5; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃; Liquid Temperature：22.3 ℃

DASY4 Configuration:
- Probe: EX3DV4 - SN7346; ConvF(7.29, 7.29, 7.29); Calibrated: 2015/9/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn916; Calibrated: 2015/12/16
- Phantom: SAM_Right; Type: SAM_Right; Serial: TP-1303
- ;Postprocessing SW: SEMCAD, V1.8 Build 159

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 26.9 mW/g

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.1 V/m; Power Drift = -0.035 dB
Peak SAR (extrapolated) = 31.6 W/kg
SAR(1 g) = 14.4 mW/g; SAR(10 g) = 6.29 mW/g
Maximum value of SAR (measured) = 24.7 mW/g

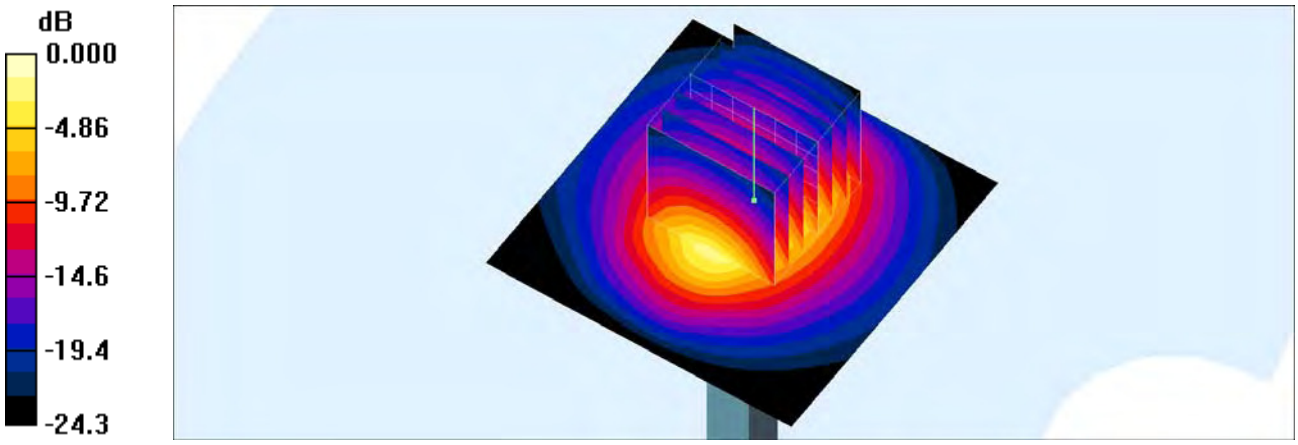

0 dB = 24.7mW/g