




WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

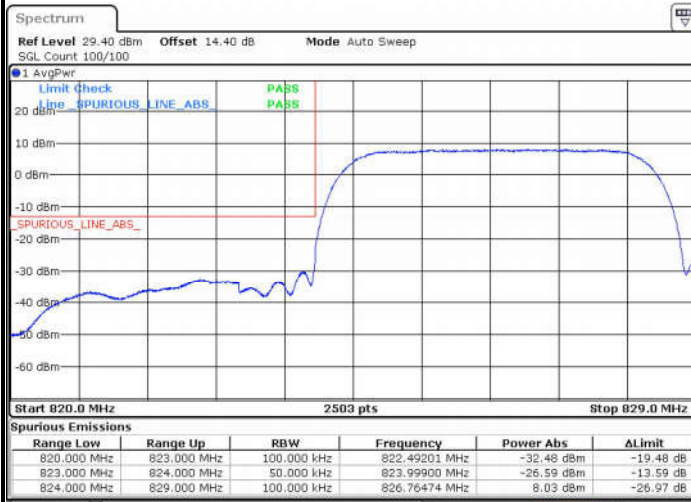


Highest Band Edge




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

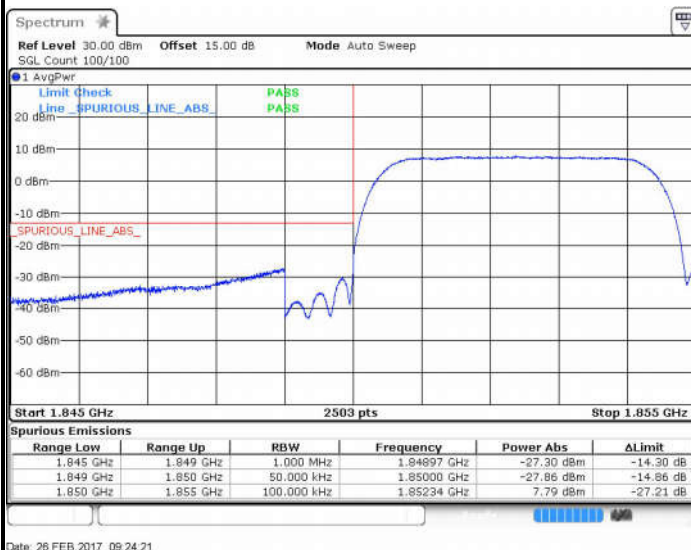


Highest Band Edge

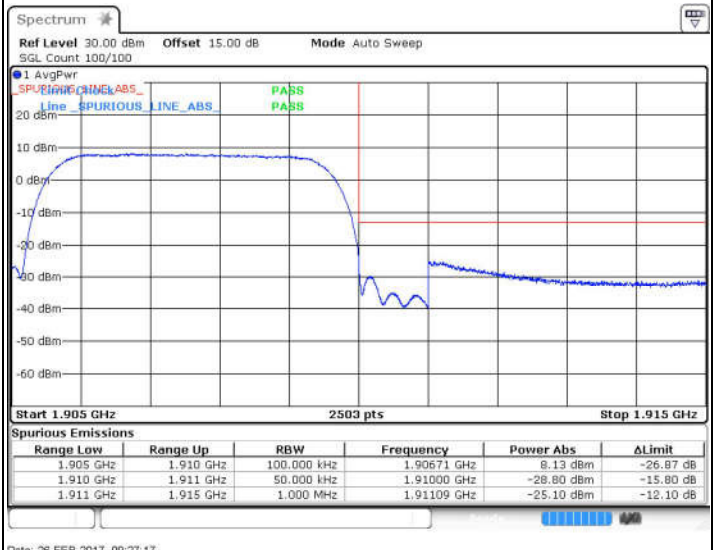



WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

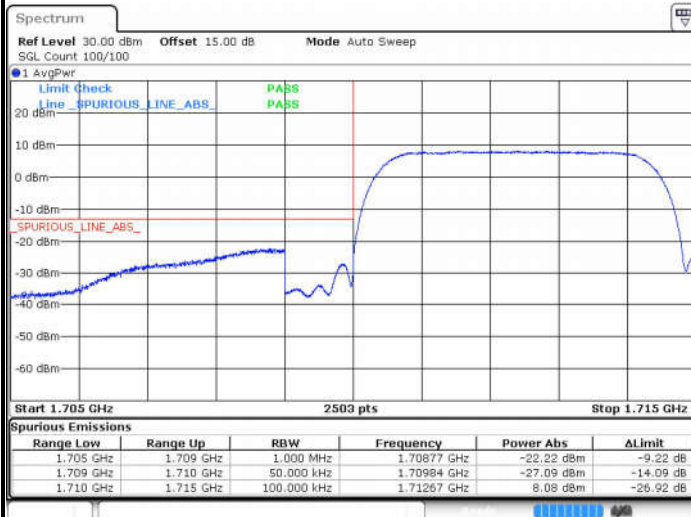


Highest Band Edge






CDMA BC0 (RC1 SO55)

Lowest Band Edge

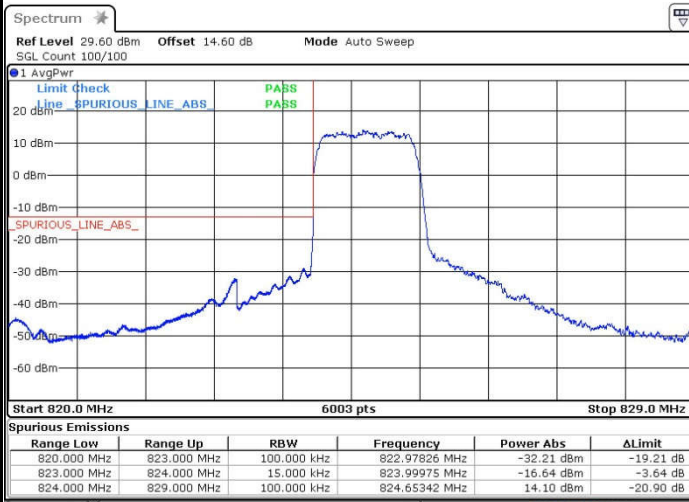


Highest Band Edge

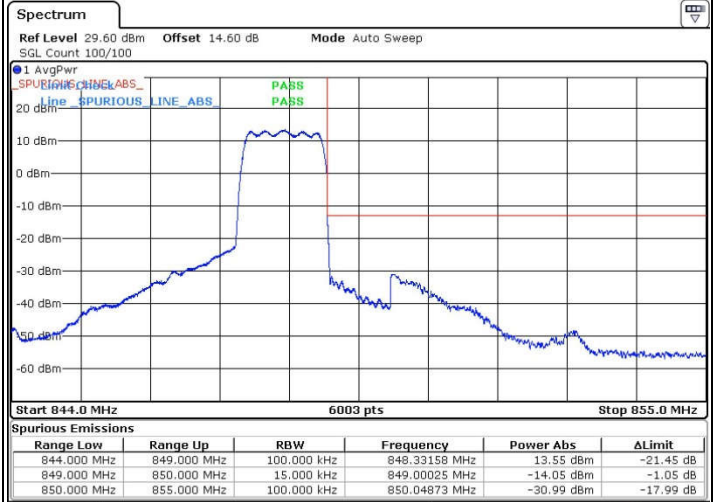


CDMA BC0 (RC3-SO32)

Lowest Band Edge

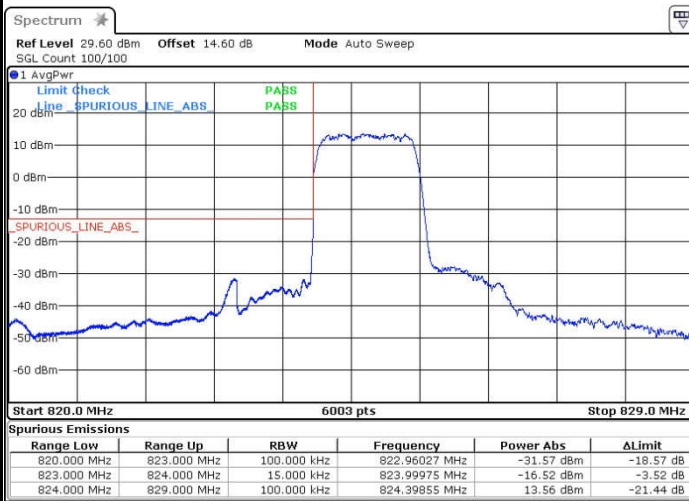


Highest Band Edge

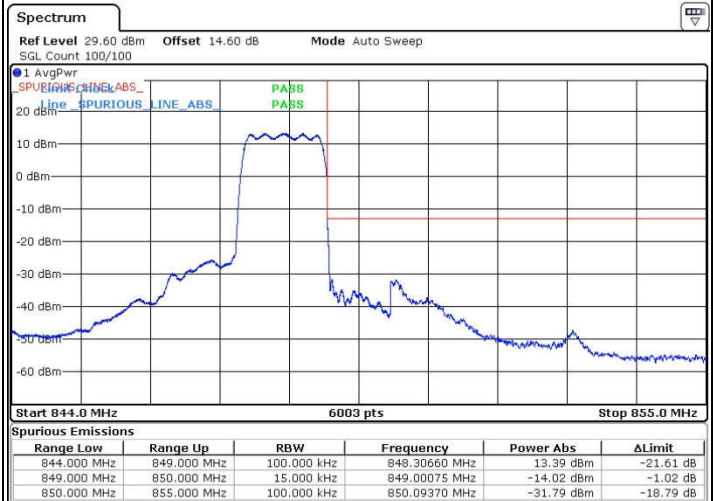



CDMA BC0 (RC3-SO55)

Lowest Band Edge

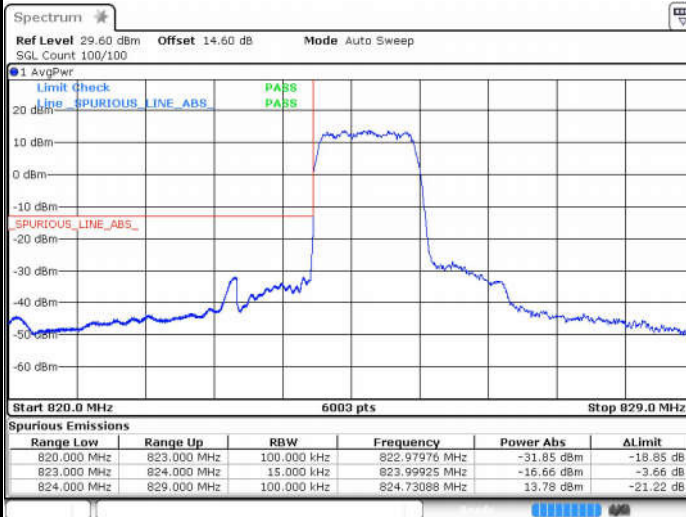


Highest Band Edge




CDMA BC1 (RC1-SO55)

Lowest Band Edge

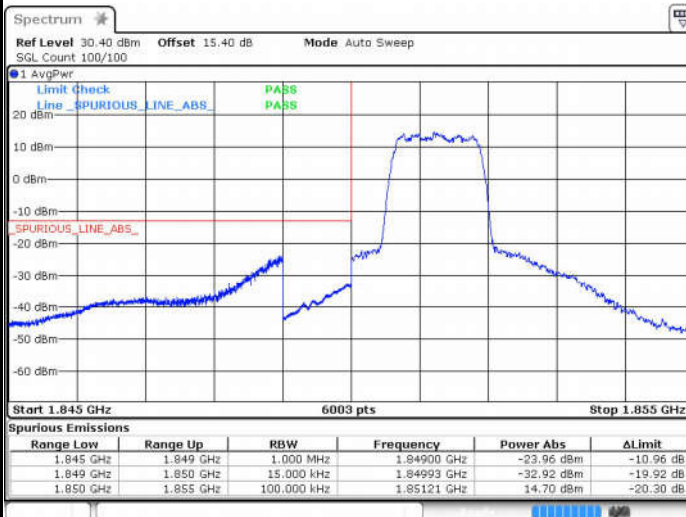


Highest Band Edge

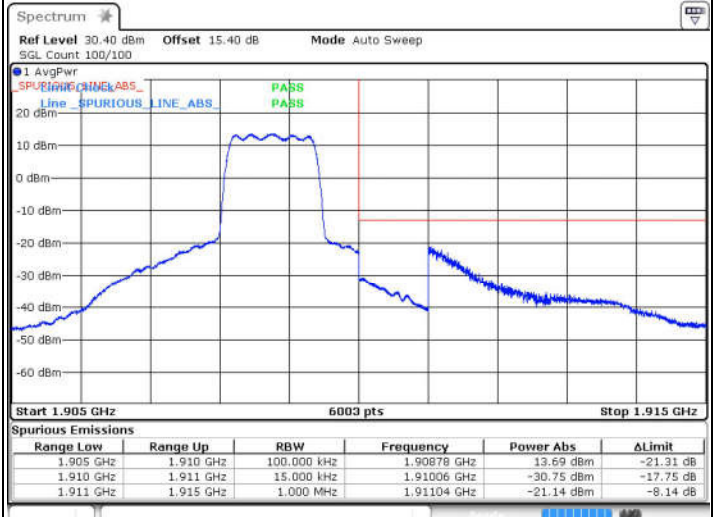




CDMA BC1 (RC3-SO32)

Lowest Band Edge

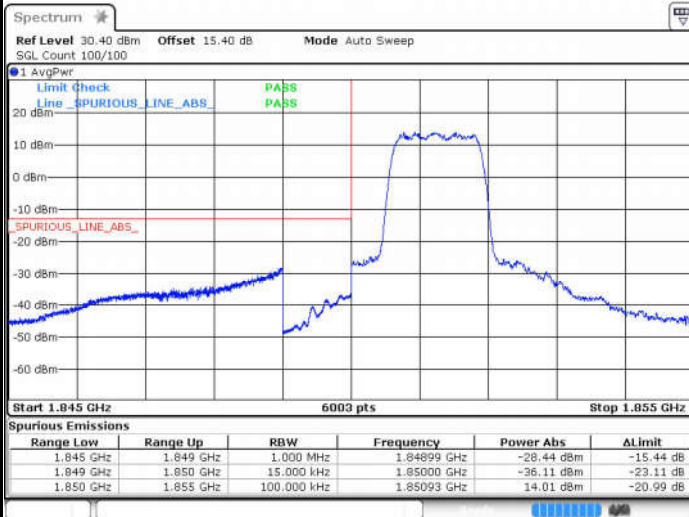


Highest Band Edge

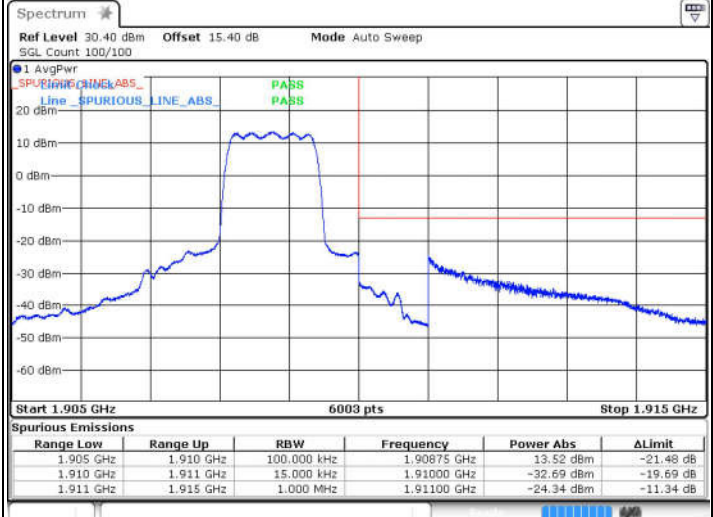


CDMA BC1 (RC3-SO55)

Lowest Band Edge

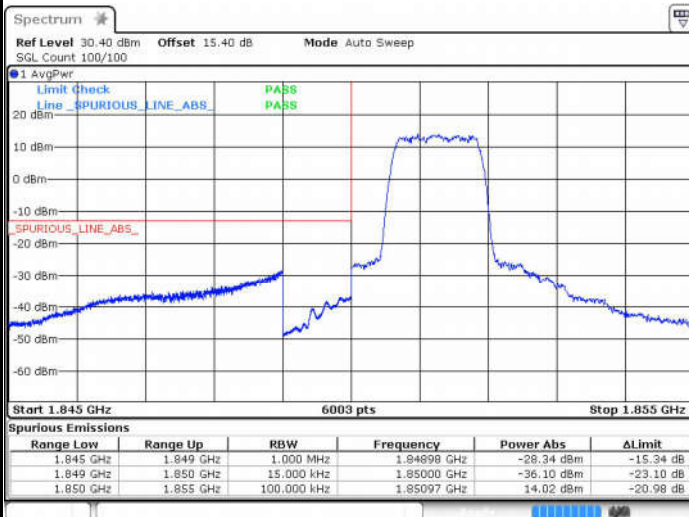


Highest Band Edge


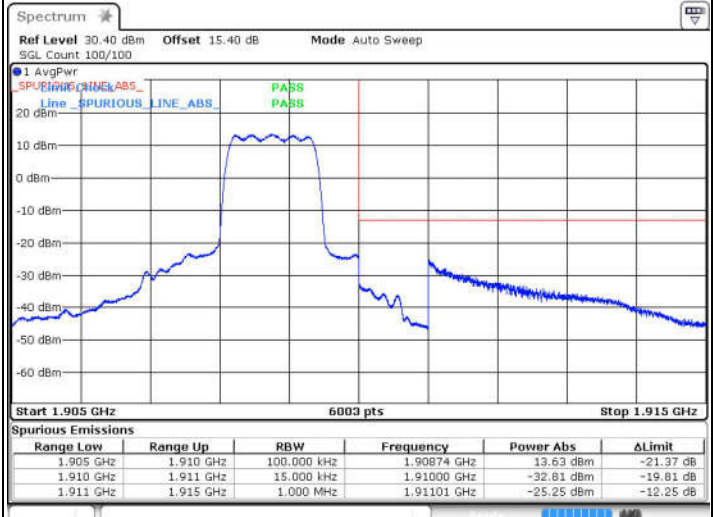




Conducted Spurious Emission


*Note: The fail points below 1MHz are signals from Spectrum Analyzer which can be ignored.

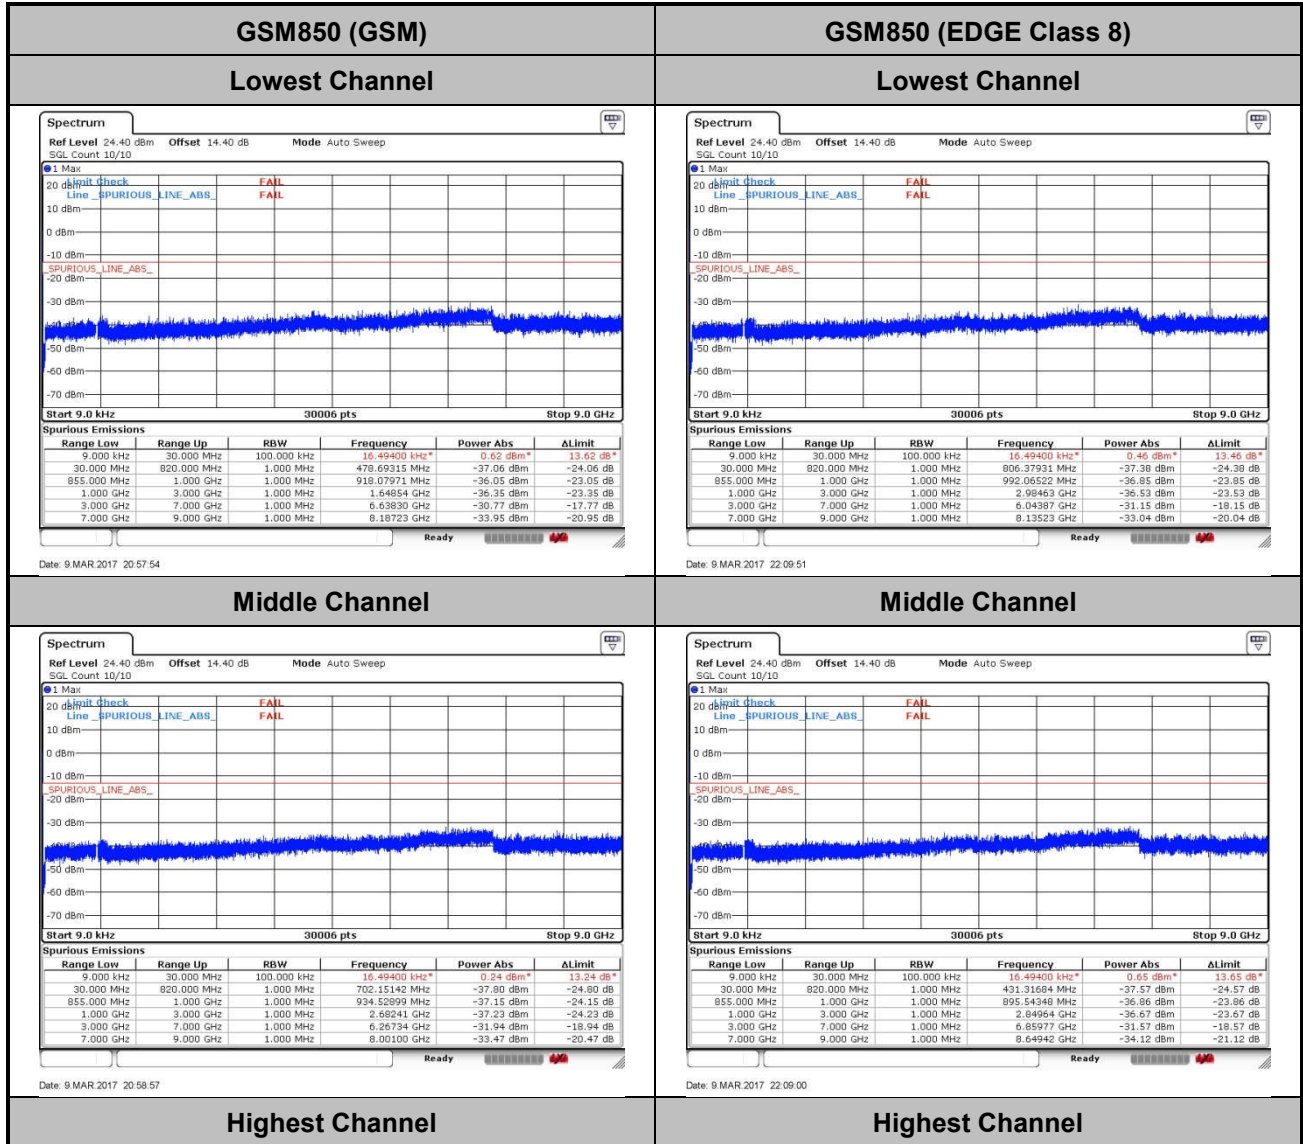

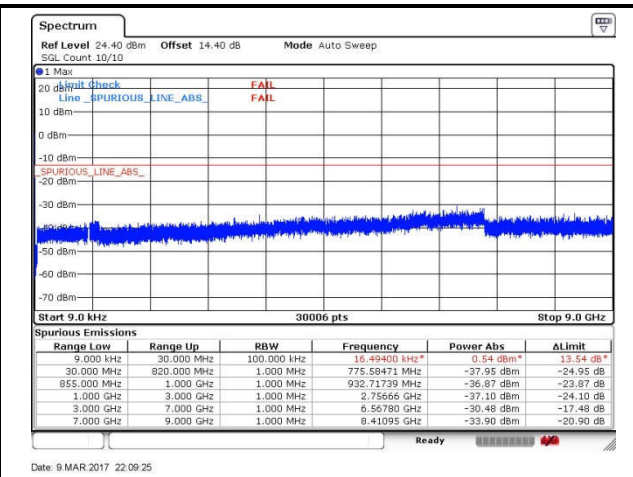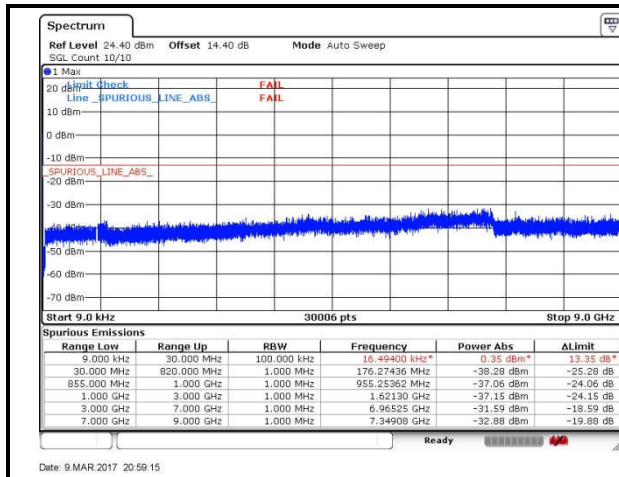


GSM1900 (GSM)

Lowest Channel


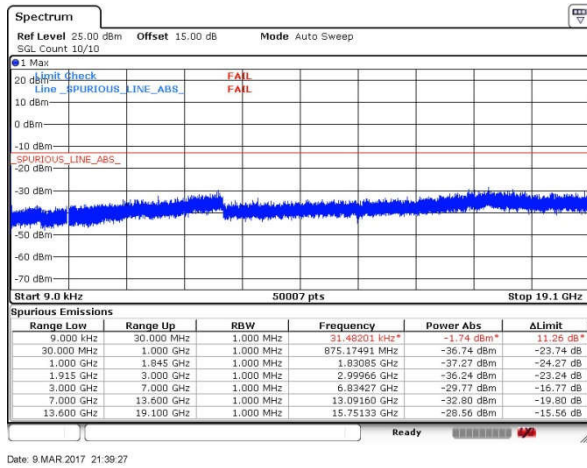


GSM1900 (EDGE Class 8)

Lowest Channel


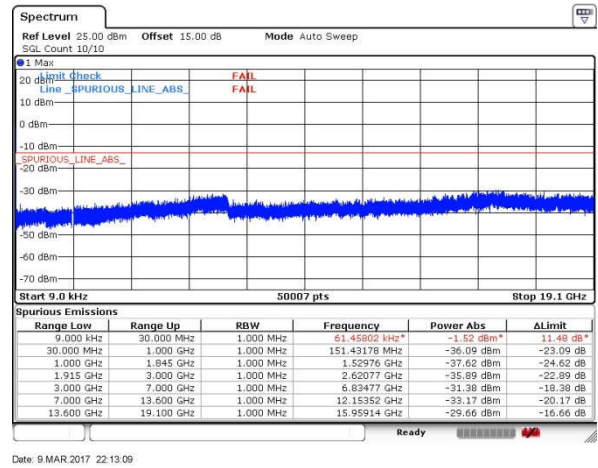


Middle Channel

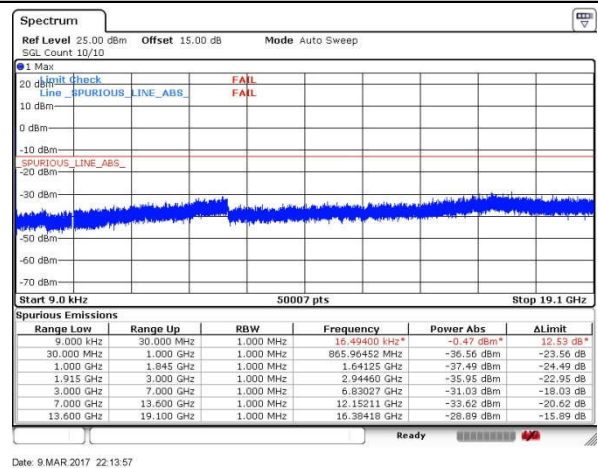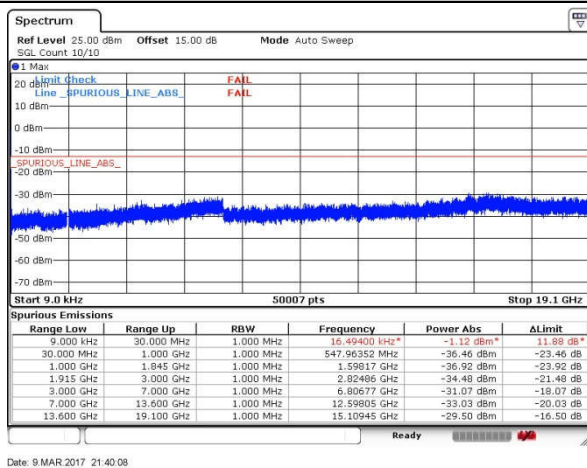

Highest Channel


Highest Channel

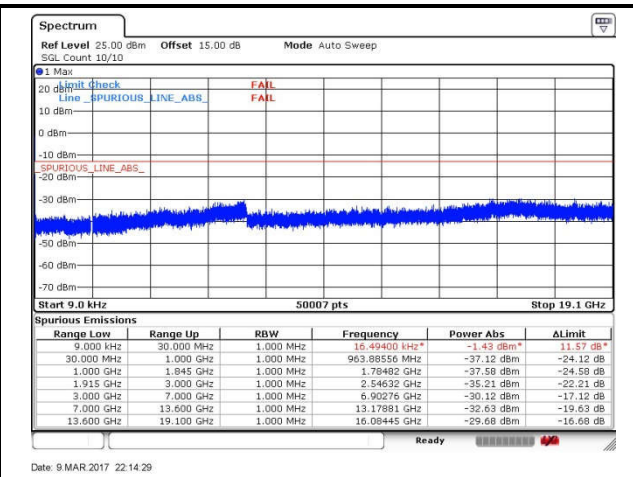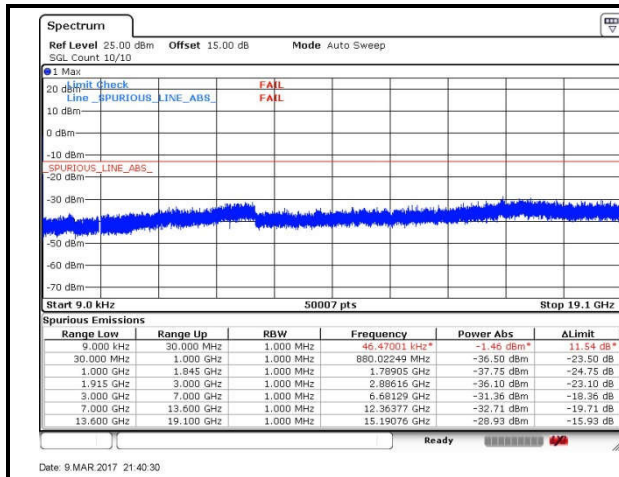



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

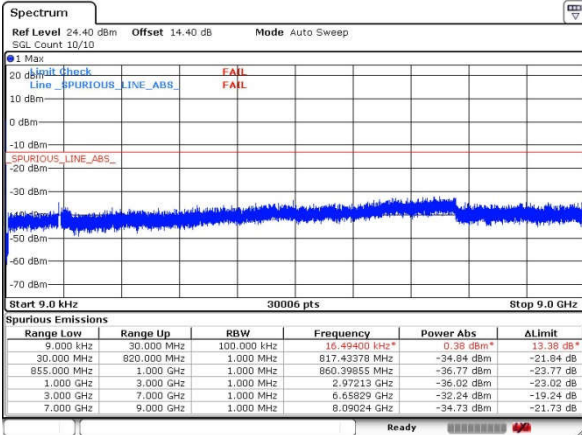

Date: 9 MAR 2017 21:25:59


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

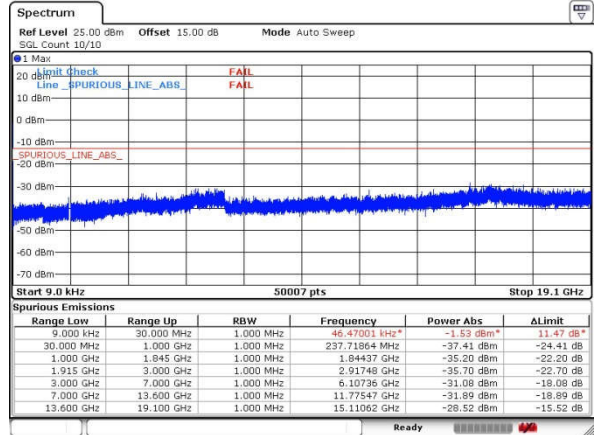


Date: 9 MAR 2017 21:30:39

Middle Channel

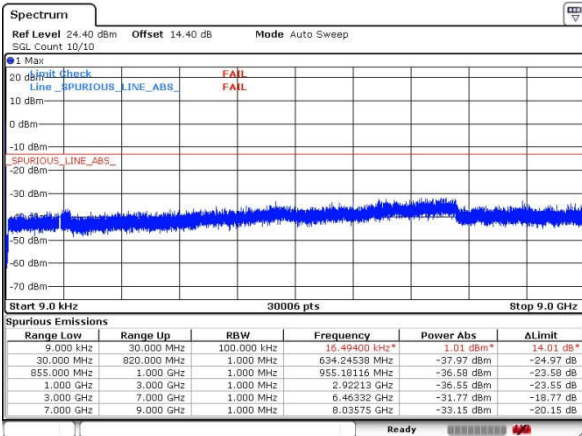


Date: 9 MAR 2017 21:26:56

Middle Channel

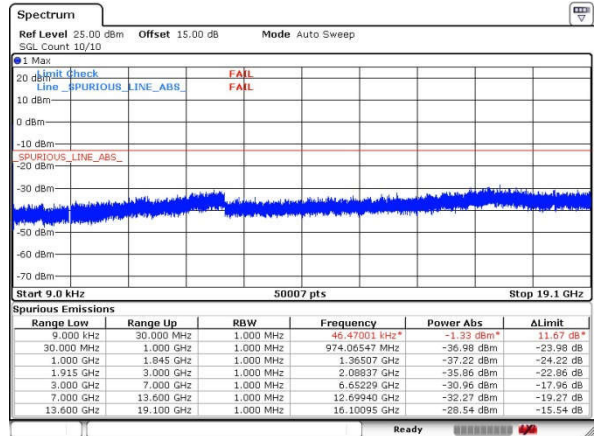


Date: 9 MAR 2017 21:31:50

Highest Channel

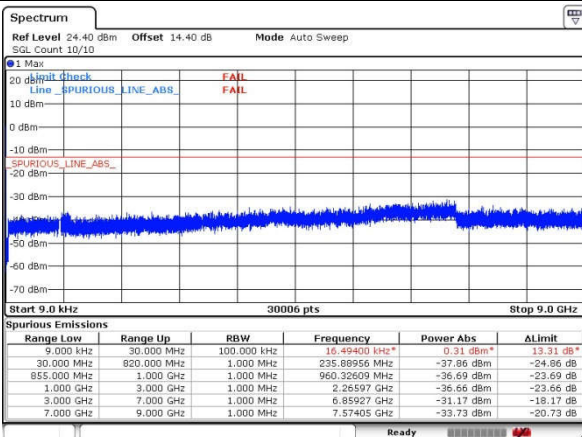

Date: 9 MAR 2017 21:27:18

Highest Channel

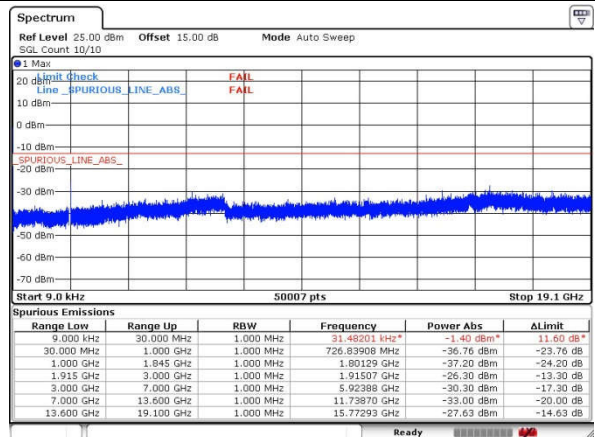


Date: 9 MAR 2017 21:32:35




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

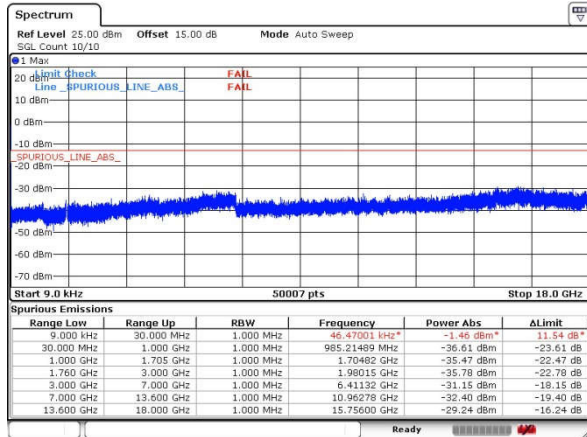


Date: 9 MAR 2017 21:34:39

Middle Channel

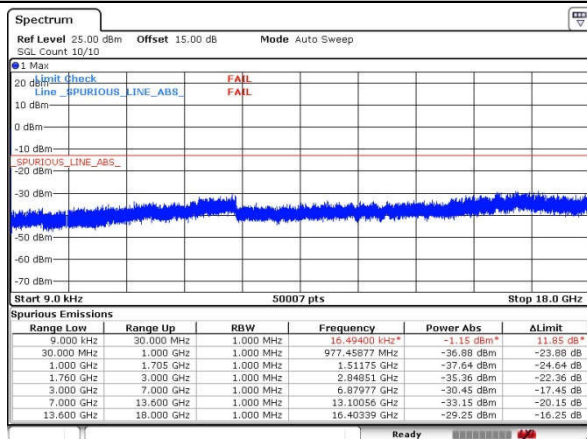

Date: 9 MAR 2017 21:35:48

Highest Channel

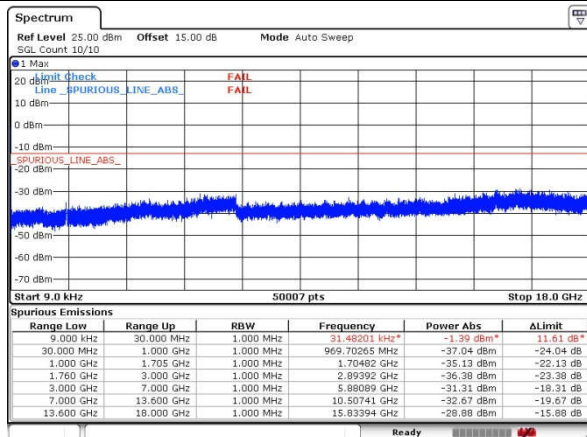


Date: 9 MAR 2017 22:27:12



CDMA BC0 (1xRTT)


Lowest Channel

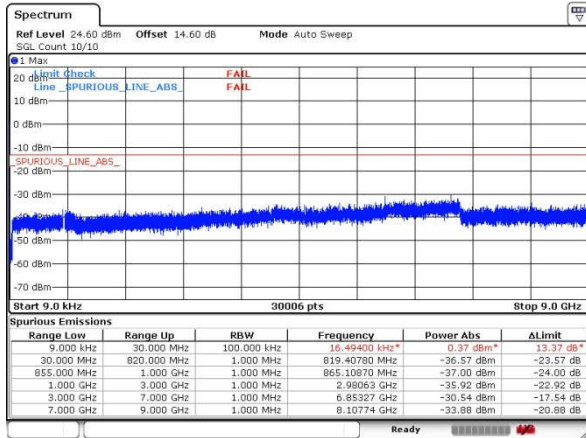

Date: 20 MAR 2017 15:17:23


CDMA BC1 (1xRTT)

Lowest Channel

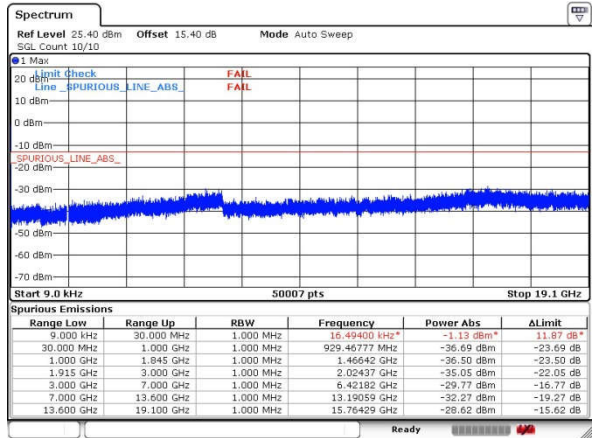


Date: 20 MAR 2017 15:36:29

Middle Channel

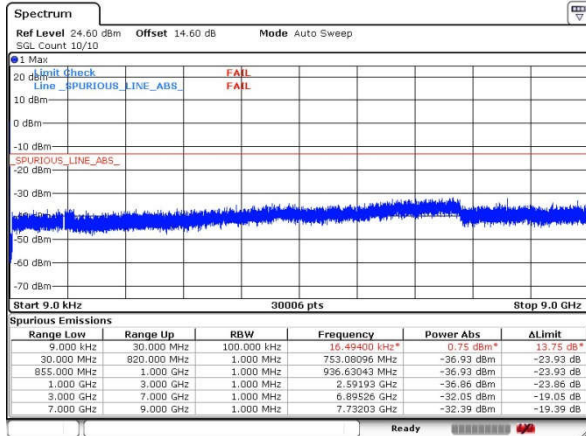


Date: 20 MAR 2017 15:16:35

Middle Channel

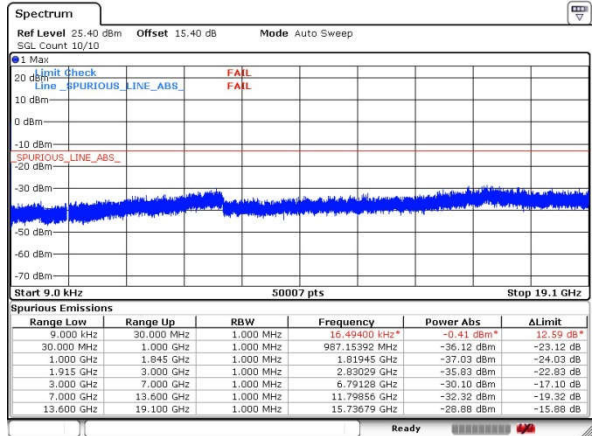


Date: 20 MAR 2017 15:36:57

Highest Channel

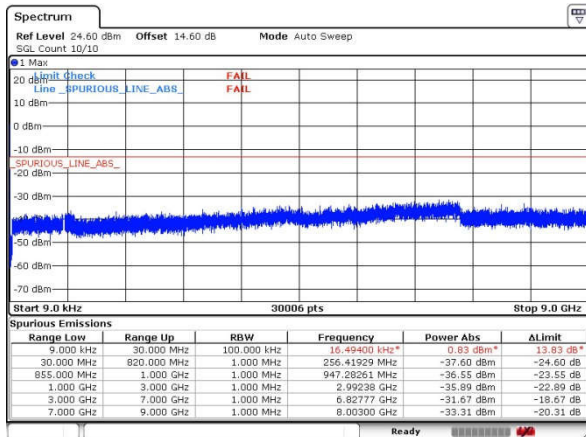

Date: 20 MAR 2017 15:17:47

Highest Channel

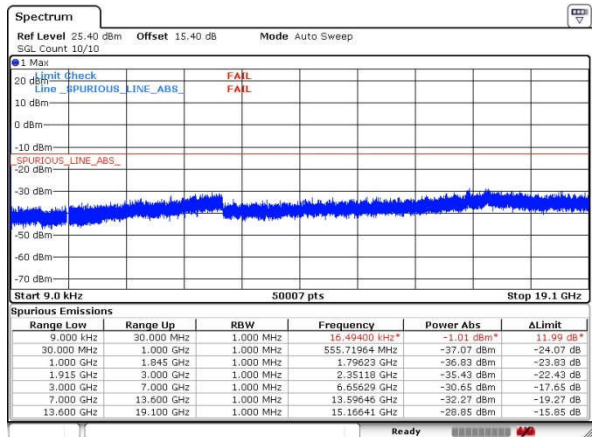

Date: 20 MAR 2017 15:37:27

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0036	0.0287	PASS
40	Normal Voltage	0.0024	0.0024	
30	Normal Voltage	0.0084	0.0359	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0048	0.0191	
0	Normal Voltage	0.0048	0.0263	
-10	Normal Voltage	0.0072	0.0347	
-20	Normal Voltage	0.0012	0.0395	
-30	Normal Voltage	0.0036	0.0323	
20	Maximum Voltage	0.0000	0.0347	
20	Normal Voltage	0.0096	0.0311	
20	Battery End Point	0.0072	0.0215	

Note: Normal Voltage = 3.82 V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.4 V



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0043	0.0181	PASS
40	Normal Voltage	0.0005	0.0191	
30	Normal Voltage	0.0191	0.0053	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0027	0.0165	
0	Normal Voltage	0.0016	0.0027	
-10	Normal Voltage	0.0154	0.0197	
-20	Normal Voltage	0.0000	0.0021	
-30	Normal Voltage	0.0149	0.0218	
20	Maximum Voltage	0.0138	0.0181	
20	Normal Voltage	0.0128	0.0122	
20	Battery End Point	0.0048	0.0186	

Note:

1. Normal Voltage = 3.82 V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage = 4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0191	
30	Normal Voltage	0.0179	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0060	
0	Normal Voltage	0.0239	
-10	Normal Voltage	0.0215	
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0155	
20	Maximum Voltage	0.0048	
20	Normal Voltage	0.0203	
20	Battery End Point	0.0143	

Note: Normal Voltage = 3.82 V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.4 V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0037	
30	Normal Voltage	0.0032	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0043	
-10	Normal Voltage	0.0021	
-20	Normal Voltage	0.0064	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0053	
20	Normal Voltage	0.0032	
20	Battery End Point	0.0016	

Note:

1. Normal Voltage = 3.82V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0121	PASS
40	Normal Voltage	0.0139	
30	Normal Voltage	0.0023	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0092	
0	Normal Voltage	0.0063	
-10	Normal Voltage	0.0029	
-20	Normal Voltage	0.0052	
-30	Normal Voltage	0.0017	
20	Maximum Voltage	0.0087	
20	Normal Voltage	0.0012	
20	Battery End Point	0.0081	

Note:

1. Normal Voltage = 3.82V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	CDMA BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0275	PASS
40	Normal Voltage	0.0108	
30	Normal Voltage	0.0287	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0239	
0	Normal Voltage	0.0359	
-10	Normal Voltage	0.0263	
-20	Normal Voltage	0.0227	
-30	Normal Voltage	0.0048	
20	Maximum Voltage	0.0084	
20	Normal Voltage	0.0215	
20	Battery End Point	0.0227	

Note: Normal Voltage = 3.82V. ; Battery End Point (BEP) = 3.65V. ; Maximum Voltage =4.4 V



Test Conditions	Middle Channel	CDMA BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0160	PASS
40	Normal Voltage	0.0016	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0037	
-10	Normal Voltage	0.0128	
-20	Normal Voltage	0.0032	
-30	Normal Voltage	0.0053	
20	Maximum Voltage	0.0144	
20	Normal Voltage	0.0043	
20	Battery End Point	0.0011	

Note:

1. Normal Voltage = 3.82V. ; Battery End Point (BEP) = 3.65V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-45.00	-13	-32.00	-51.67	-47.64	1.01	5.80	H
	2509.2	-62.87	-13	-49.87	-71.45	-66.44	1.18	6.90	H
	3345	-63.47	-13	-50.47	-72.91	-67.04	1.78	7.50	H
	1672	-52.73	-13	-39.73	-57.7	-55.37	1.01	5.80	V
	2509.2	-62.55	-13	-49.55	-71.69	-66.12	1.18	6.90	V
	3345	-66.57	-13	-53.57	-74.89	-70.14	1.78	7.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-65.40	-13	-52.40	-63.91	-68.04	1.01	5.80	H
	2510	-63.51	-13	-50.51	-72.09	-67.08	1.18	6.90	H
	3345	-66.73	-13	-53.73	-76.17	-70.30	1.78	7.50	H
	1672	-69.47	-13	-56.47	-68.59	-72.11	1.01	5.80	V
	2510	-63.08	-13	-50.08	-72.22	-66.65	1.18	6.90	V
	3345	-67.44	-13	-54.44	-75.76	-71.01	1.78	7.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-63.83	-13	-50.83	-72.22	-69.31	1.62	7.10	H
	5640	-62.67	-13	-49.67	-75.86	-71.21	1.86	10.40	H
	7521	-58.95	-13	-45.95	-77.26	-68.50	2.40	11.94	H
	3759	-64.29	-13	-51.29	-73.88	-69.77	1.62	7.10	V
	5640	-63.46	-13	-50.46	-75.54	-72.00	1.86	10.40	V
	7521	-60.99	-13	-47.99	-77.11	-70.54	2.40	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-66.38	-13	-53.38	-74.77	-71.86	1.62	7.10	H
	5640	-61.29	-13	-48.29	-74.48	-69.83	1.86	10.40	H
	7521	-58.03	-13	-45.03	-76.34	-67.58	2.40	11.94	H
	3759	-64.48	-13	-51.48	-74.07	-69.96	1.62	7.10	V
	5640	-63.85	-13	-50.85	-75.93	-72.39	1.86	10.40	V
	7521	-60.09	-13	-47.09	-76.21	-69.64	2.40	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V (RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-72.20	-13	-59.20	-70.71	-74.84	1.01	5.80	H
	2510	-61.80	-13	-48.80	-70.38	-65.37	1.18	6.90	H
	3345	-66.18	-13	-53.18	-75.62	-69.75	1.78	7.50	H
	1672	-71.59	-13	-58.59	-70.71	-74.23	1.01	5.80	V
	2510	-63.10	-13	-50.10	-72.24	-66.67	1.18	6.90	V
	3345	-66.77	-13	-53.77	-75.09	-70.34	1.78	7.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-64.63	-13	-51.63	-73.02	-70.11	1.62	7.10	H
	5640	-62.21	-13	-49.21	-75.40	-70.75	1.86	10.40	H
	7521	-57.11	-13	-44.11	-75.42	-66.66	2.40	11.94	H
	3759	-64.71	-13	-51.71	-74.3	-70.19	1.62	7.10	V
	5643	-60.26	-13	-47.26	-72.34	-68.80	1.86	10.40	V
	7521	-59.54	-13	-46.54	-75.66	-69.09	2.40	11.94	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465	-63.76	-13	-50.76	-70.55	-68.65	1.81	6.70	H
	5198	-59.71	-13	-46.71	-72.39	-66.61	2.23	9.13	H
	6930	-58.41	-13	-45.41	-73.59	-66.47	2.60	10.66	H
	3465	-65.86	-13	-52.86	-71.06	-70.75	1.81	6.70	V
	5199	-59.79	-13	-46.79	-73.34	-66.69	2.23	9.13	V
	6930	-58.88	-13	-45.88	-73.93	-66.94	2.6	10.66	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC0 (1xRTT)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-66.28	-13	-53.28	-64.91	-68.14	1.19	5.20	H
	2508	-61.41	-13	-48.41	-64.40	-63.63	1.53	5.90	H
	3345	-67.15	-13	-54.15	-71.10	-69.94	1.76	6.70	H
	1672	-65.06	-13	-52.06	-63.02	-66.92	1.19	5.20	V
	2508	-60.39	-13	-47.39	-62.37	-62.61	1.53	5.90	V
	3345	-66.80	-13	-53.80	-70.12	-69.59	1.76	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC1 (1xRTT)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3762	-69.56	-13	-56.56	-73.07	-74.55	1.88	6.87	H
	5640	-66.43	-13	-53.43	-74.62	-73.73	2.38	9.68	H
	7520	-63.46	-13	-50.46	-75.49	-72.53	2.74	11.81	H
	3762	-69.86	-13	-56.86	-73.65	-74.85	1.88	6.87	V
	5640	-64.73	-13	-51.73	-73.3	-72.03	2.38	9.68	V
	7520	-64.98	-13	-51.98	-75.69	-74.05	2.74	11.81	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.