



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 10714
FCC ID : IHDT56WC6
STANDARD : 47 CFR Part 2, 22(H), 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 19, 2017 and completely tested on Mar. 02, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

James Huang

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.

No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Specification of Accessory	6
1.6 Modification of EUT	6
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.8 Testing Location	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power and ERP/EIRP	15
3.5 Peak-to-Average Ratio	16
3.6 Occupied Bandwidth	17
3.7 Conducted Band Edge	18
3.8 Conducted Spurious Emission	20
3.9 Frequency Stability	21
4 RADIATED TEST ITEMS	22
4.1 Measuring Instruments	22
4.2 Test Setup	22
4.3 Test Result of Radiated Test	22
4.4 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 UNCERTAINTY OF EVALUATION	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG711913B	Rev. 01	Initial issue of report	Mar. 22, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)(Band 38)	EIRP < 2Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	N/A	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 26.83 dB at 7592.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10714
FCC ID	IHDT56WC6
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v 4.1 LE/ Bluetooth v 4.2 LE
IMEI Code	Conducted: 355641080038096/355641080038104 for LTE Band 5 355641080038138/355641080038146 for LTE Band 7/38 Radiation: 355641080036975/355641080036983 for LTE Band 5 355641080037270/355641080037288 for LTE Band 7/38
HW Version	WKGMA1A4-3
SW Version	woods- userdebug 7.0 NMA25.27 314 intcfg,test-keys
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Rx Frequency	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 5 : 23.44 dBm LTE Band 7 : 23.50 dBm LTE Band 38 : 23.06 dBm
Antenna Gain	LTE Band 5 : -0.40 dBi LTE Band 7 : -0.10 dBi LTE Band 38 : 0.00 dBi
Type of Modulation	QPSK / 16QAM / 64QAM(Downlink only)

1.5 Specification of Accessory

Specification of Accessory			
AC Adapter IN	Brand Name	Motorola (AcBel)	Model Name C-P45
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA	
AC Adapter US	Brand Name	Motorola (AcBel)	Model Name C-P56
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA	
AC Adapter EU	Brand Name	Motorola (AcBel)	Model Name C-P57
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA	
AC Adapter UK	Brand Name	Motorola (AcBel)	Model Name C-P58
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA	
AC Adapter AU	Brand Name	Motorola (AcBel)	Model Name C-P59
	Power Rating	I/P: 100-240 Vac, 130mA, O/P: 5 Vdc, 1000mA	
Battery 1	Brand Name	Motorola (ATL)	Model Name GK40
	Power Rating	3.8Vdc,2685/2800mAh (Min/Typ)	Type Li-ion
Battery 2	Brand Name	Motorola (Sunwoda)	Model Name GK40
	Power Rating	3.8Vdc,2685/2800mAh (Min/Typ)	Type Li-ion
Earphone	Brand Name	Motorola(hetong)	Model Name PY-13A1602-01KC39
	Signal Line Type	1.4 meter, non-shielded cable, without ferrite core	
USB Cable	Brand Name	Motorola (Sai Bao)	Model Name SYD-A015A
	Signal Line Type	1.0 meter, shielded cable, without ferrite core	

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.1211	1M10W7D	-	0.1002
3	825.5 ~ 847.5	2M72G7D	-	0.1186	2M73W7D	-	0.0979
5	826.5 ~ 846.5	4M53G7D	-	0.1208	4M50W7D	-	0.1019
10	829.0 ~ 844.0	9M05G7D	0.0030	0.1227	9M09W7D	-	0.1026
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M52G7D	-	0.2133	4M53W7D	-	0.1754
10	2505.0 ~ 2565.0	9M09G7D	0.0027	0.2188	9M03W7D	-	0.1770
15	2507.5 ~ 2562.5	13M5G7D	-	0.2153	13M5W7D	-	0.1786
20	2510.0 ~ 2560.0	18M5G7D	-	0.2148	18M4W7D	-	0.1778
LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M53G7D	-	0.1910	4M51W7D	-	0.1581
10	2575.0 ~ 2615.0	9M05G7D	0.0010	0.1977	9M07W7D	-	0.1596
15	2577.5 ~ 2612.5	13M5G7D	-	0.2023	13M5W7D	-	0.1603
20	2580.0 ~ 2610.0	18M4G7D	-	0.2018	18M3W7D	-	0.1626

1.8 Testing Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH02-KS	418269
		03CH03-KS	306251

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	5	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	38	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	5				✓	-	-	✓	✓	✓		✓	✓	✓	✓
	7	-	-				✓	✓	✓	✓		✓	✓	✓	✓
	38	-	-				✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	5	✓	✓	✓	✓	-	-	✓	✓			✓	✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
	38	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	5	✓	✓	✓	✓	-	-	✓	✓	✓		✓	✓		✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	38	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	38	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	5				✓	-	-	✓				✓		✓	
	7	-	-		✓			✓				✓		✓	
	38	-	-		✓			✓				✓		✓	
E.R.P./ E.I.R.P.	5	✓	✓	✓	✓	-	-	✓	✓	✓			✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	38	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	5	✓	✓	✓	✓	-	-	✓		✓				✓	
	7	-	-	✓	✓	✓	✓	✓		✓				✓	
	38	-	-	✓	✓	✓	✓	✓		✓				✓	
Note	- The mark "✓" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

LTE Band 5/38

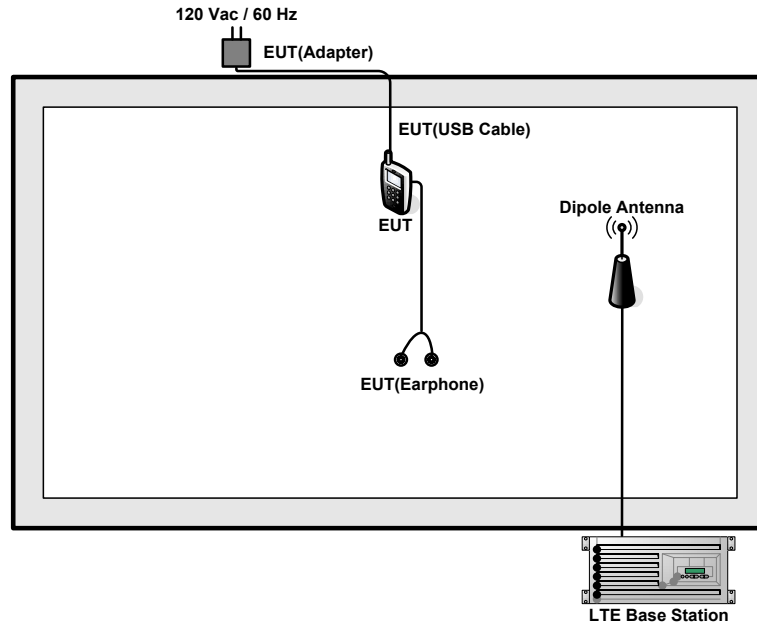

LTE Band 7

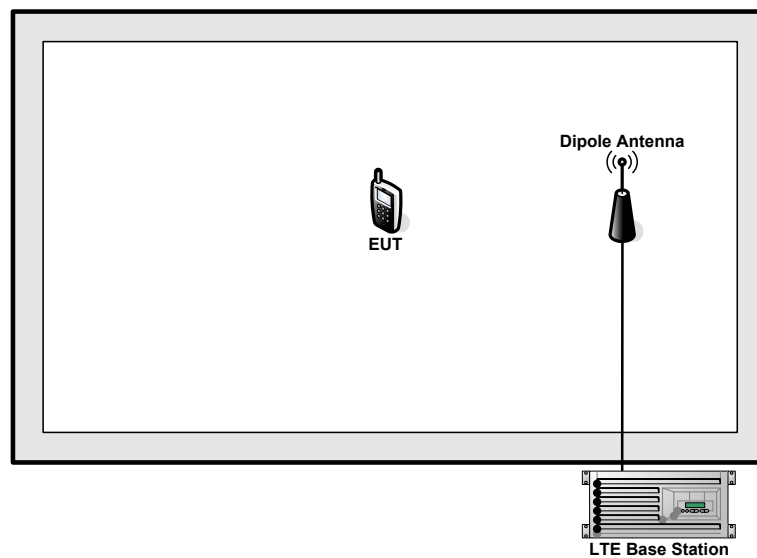

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 4.5 dB.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.5 \text{ (dB)}\end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

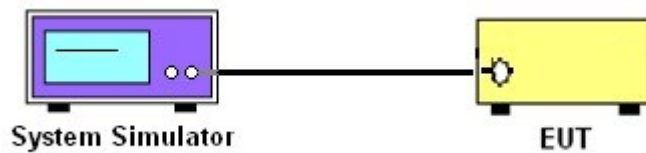

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

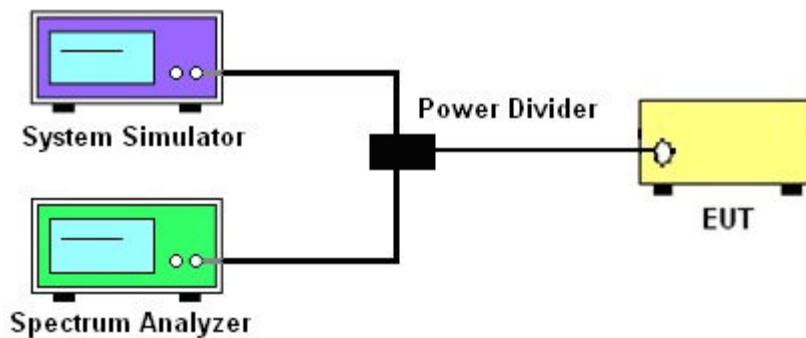

3.2.3 Frequency Stability

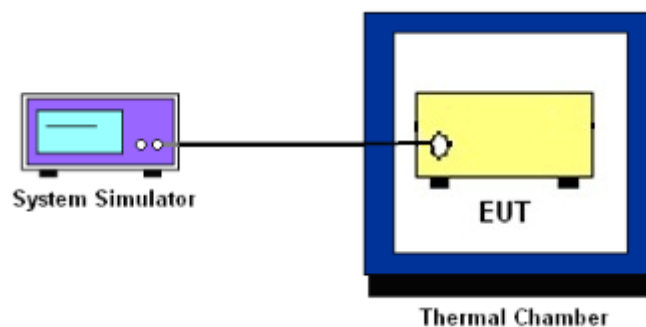

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 7 and Band 38.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For LTE Band 7, 38, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7,38:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For Band 7, 38
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

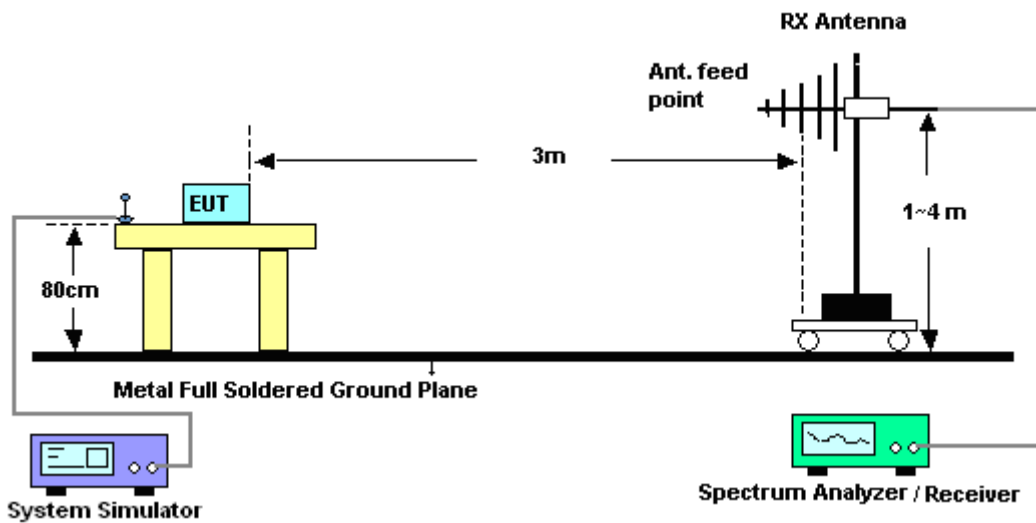

4.2.2 For radiated test above 1GHz

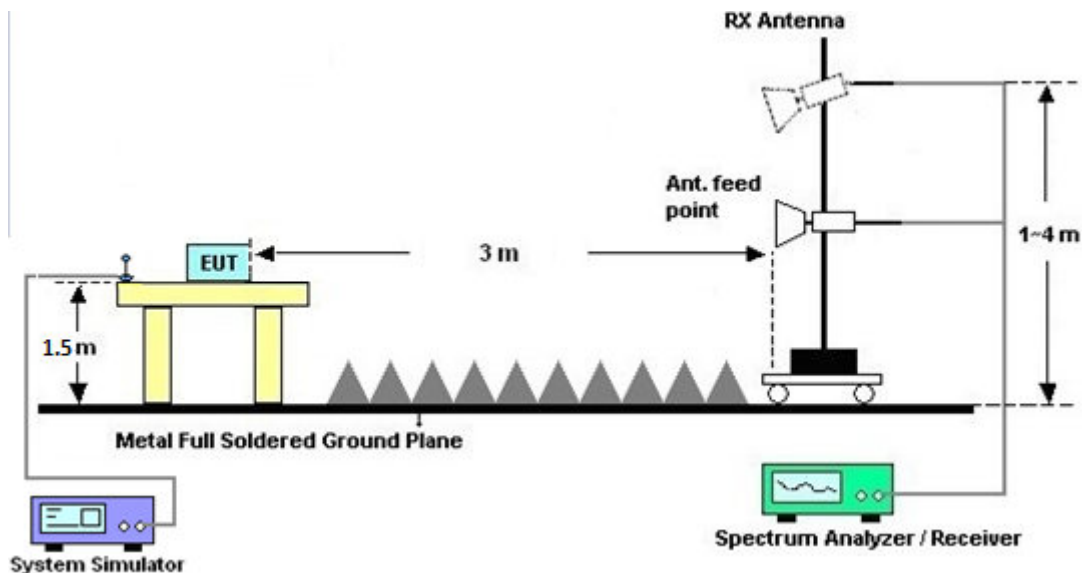

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 38

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For Band 7, 38:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
 $ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Feb. 14, 2017~ Mar. 02, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Feb. 14, 2017~ Mar. 02, 2017	Oct. 12, 2017	Conducted (TH01-KS)
System Simulator	R&S	CMU200	116456	2G/3G Full Band	Aug. 09, 2016	Feb. 14, 2017~ Mar. 02, 2017	Aug. 08, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Feb. 14, 2017~ Feb. 15, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 22, 2016	Feb. 14, 2017~ Feb. 15, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Feb. 14, 2017~ Feb. 15, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Feb. 14, 2017~ Feb. 15, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
High Gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	1943529	1GHz~18GHz	Jan. 19, 2017	Feb. 14, 2017~ Feb. 15, 2017	Jan. 18, 2018	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Feb. 14, 2017~ Feb. 15, 2017	Mar. 02, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Feb. 14, 2017~ Feb. 15, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1~26.5GHz Gain 30dB	Oct. 13, 2016	Feb. 14, 2017~ Feb. 15, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Feb. 14, 2017~ Feb. 15, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Feb. 14, 2017~ Feb. 15, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Feb. 14, 2017~ Feb. 15, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Feb. 14, 2017~ Feb. 15, 2017	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Feb. 14, 2017~ Feb. 15, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
High Gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	1943529	1GHz~18GHz	Jan. 19, 2017	Feb. 14, 2017~ Feb. 15, 2017	Jan. 18, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Feb. 14, 2017~ Feb. 15, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 14, 2017~ Feb. 15, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.7dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.3dB
--	-------

Uncertainty of Radiated Emission Measurement (25 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.3dB
--	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.44	23.25	23.42
10	1	25		23.27	23.3	23.38
10	1	49		23.27	23.29	23.4
10	25	0		22.49	22.35	22.46
10	25	12		22.32	22.31	22.44
10	25	25		22.31	22.30	22.41
10	50	0		22.47	22.30	22.26
10	1	0	16-QAM	22.48	22.50	22.58
10	1	25		22.54	22.53	22.66
10	1	49		22.53	22.54	22.63
10	25	0		22.29	22.31	22.43
10	25	12		22.31	22.32	22.45
10	25	25		22.33	22.35	22.45
10	50	0		21.30	21.32	21.44
5	1	0	QPSK	23.24	23.24	23.35
5	1	12		23.24	23.25	23.15
5	1	24		23.15	23.27	23.37
5	12	0		22.32	22.29	22.43
5	12	7		22.32	22.32	22.40
5	12	13		22.32	22.28	22.40
5	25	0		22.28	22.25	22.36
5	1	0	16-QAM	22.46	22.47	22.60
5	1	12		22.51	22.50	22.63
5	1	24		22.46	22.40	22.40
5	12	0		21.31	21.34	21.42
5	12	7		21.33	21.32	21.38
5	12	13		21.33	21.28	21.36
5	25	0		21.30	21.27	21.35



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.20	23.19	23.24
3	1	8		23.13	23.07	23.05
3	1	14		23.06	23.03	23.01
3	8	0		23.02	22.98	23.09
3	8	4		23.29	22.29	22.34
3	8	7		22.27	22.22	22.34
3	15	0		22.28	22.27	22.39
3	1	0	16-QAM	22.36	22.41	22.42
3	1	8		22.43	22.43	22.46
3	1	14		22.42	22.33	22.37
3	8	0		21.35	21.36	21.38
3	8	4		21.35	21.32	21.34
3	8	7		21.33	21.27	21.34
3	15	0		21.29	21.29	21.36
1.4	1	0	QPSK	23.21	23.23	23.27
1.4	1	3		23.30	23.27	23.36
1.4	1	5		23.18	23.14	23.27
1.4	3	0		23.31	23.31	23.38
1.4	3	1		23.27	23.25	23.33
1.4	3	3		23.27	23.22	23.32
1.4	6	0		22.28	22.28	22.37
1.4	1	0	16-QAM	22.42	22.50	22.43
1.4	1	3		22.52	22.52	22.56
1.4	1	5		22.43	22.44	22.44
1.4	3	0		22.29	22.32	22.31
1.4	3	1		22.25	22.27	22.27
1.4	3	3		22.24	22.22	22.27
1.4	6	0		21.34	21.35	21.38



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.35	23.28	23.42
20	1	49		23.22	23.09	23.41
20	1	99		23.12	23.18	23.39
20	50	0		22.33	22.24	22.51
20	50	24		22.29	22.13	22.50
20	50	50		22.25	22.15	22.49
20	100	0		22.29	22.18	22.48
20	1	0	16-QAM	22.48	22.34	22.60
20	1	49		22.39	22.26	22.59
20	1	99		22.36	22.47	22.58
20	50	0		21.27	21.10	21.41
20	50	24		21.22	21.05	21.42
20	50	50		21.18	21.14	21.43
20	100	0		21.20	21.11	21.39
15	1	0	QPSK	23.31	23.10	23.41
15	1	37		23.24	23.08	23.43
15	1	74		23.17	23.20	23.39
15	36	0		22.37	22.16	22.50
15	36	20		22.31	22.15	22.52
15	36	39		22.28	22.19	22.49
15	75	0		22.32	22.17	22.49
15	1	0	16-QAM	22.45	22.28	22.60
15	1	37		22.42	22.26	22.62
15	1	74		22.35	22.39	22.58
15	36	0		21.24	21.08	21.42
15	36	20		21.21	21.07	21.43
15	36	39		21.18	21.10	21.41
15	75	0		21.22	21.09	21.41



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.31	23.08	23.40
10	1	25		23.26	23.07	23.39
10	1	49		23.42	23.13	23.50
10	25	0		22.31	22.12	22.45
10	25	12		22.28	22.11	22.45
10	25	25		22.28	22.15	22.43
10	50	0		22.34	22.15	22.47
10	1	0	16-QAM	22.43	22.27	22.58
10	1	25		22.39	22.26	22.56
10	1	49		22.34	22.32	22.51
10	25	0		21.23	21.04	21.40
10	25	12		21.19	21.04	21.37
10	25	25		21.19	21.06	21.35
10	50	0		21.23	21.06	21.40
5	1	0	QPSK	23.29	23.06	23.37
5	1	12		23.29	23.39	23.36
5	1	24		23.20	23.19	23.25
5	12	0		22.16	22.10	22.08
5	12	7		22.39	22.08	22.40
5	12	13		22.32	22.10	22.42
5	25	0		22.32	22.08	22.39
5	1	0	16-QAM	22.43	22.23	22.54
5	1	12		22.41	22.23	22.52
5	1	24		22.36	22.26	22.47
5	12	0		21.25	21.05	21.36
5	12	7		21.23	21.02	21.33
5	12	13		21.23	21.02	21.33
5	25	0		21.21	21.01	21.33



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.05	22.77	22.80
20	1	49		22.85	22.55	22.68
20	1	99		22.73	21.96	22.69
20	50	0		22.04	21.99	21.75
20	50	24		21.85	21.58	21.73
20	50	50		21.81	21.59	21.68
20	100	0		21.86	21.61	21.71
20	1	0	16-QAM	22.11	21.83	21.72
20	1	49		21.90	21.60	21.76
20	1	99		21.80	21.72	21.87
20	50	0		20.99	20.74	20.73
20	50	24		20.91	20.65	20.80
20	50	50		20.86	20.67	20.81
20	100	0		20.92	20.68	20.77
15	1	0	QPSK	23.06	22.75	22.72
15	1	37		22.95	22.58	22.75
15	1	74		22.83	22.66	22.82
15	36	0		22.01	21.70	21.72
15	36	20		21.96	21.60	21.77
15	36	39		21.88	21.56	21.80
15	75	0		21.92	21.62	21.76
15	1	0	16-QAM	22.05	21.78	21.71
15	1	37		21.94	21.60	21.79
15	1	74		21.85	21.67	21.89
15	36	0		20.95	20.68	20.72
15	36	20		20.90	20.61	20.77
15	36	39		20.86	20.59	20.79
15	75	0		20.96	20.68	20.82



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.96	22.66	22.72
10	1	25		22.95	22.59	22.78
10	1	49		22.89	22.71	22.79
10	25	0		21.95	21.59	21.72
10	25	12		21.94	21.51	21.77
10	25	25		21.91	21.52	21.80
10	50	0		21.92	21.58	21.77
10	1	0	16-QAM	22.03	21.71	21.78
10	1	25		21.96	21.68	21.82
10	1	49		21.91	21.58	21.86
10	25	0		20.95	20.65	20.81
10	25	12		20.94	20.58	20.83
10	25	25		20.90	20.61	20.84
10	50	0		20.93	20.66	20.83
5	1	0	QPSK	22.67	22.57	22.77
5	1	12		22.78	22.59	22.81
5	1	24		22.68	22.56	22.59
5	12	0		21.96	21.67	21.89
5	12	7		21.98	21.53	21.81
5	12	13		21.96	21.54	21.82
5	25	0		21.95	21.53	21.79
5	1	0	16-QAM	21.98	21.61	21.80
5	1	12		21.99	21.58	21.89
5	1	24		21.87	21.52	21.92
5	12	0		20.93	20.59	20.85
5	12	7		20.90	20.54	20.82
5	12	13		20.92	20.56	20.85
5	25	0		20.95	20.58	20.85

ERP/EIRP

LTE Band 5 ($G_T - L_C = -0.40$ dBi) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	23.31	23.31	23.38	23.29	22.29	22.34	23.15	23.27	23.37
Conducted Power (Watts)	0.2143	0.2143	0.2178	0.2133	0.1694	0.1714	0.2065	0.2123	0.2173
ERP(dBm)	20.76	20.76	20.83	20.74	19.74	19.79	20.60	20.72	20.82
ERP(Watts)	0.1191	0.1191	0.1211	0.1186	0.0942	0.0953	0.1148	0.1180	0.1208

LTE Band 5 ($G_T - L_C = -0.40$ dBi) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	23.44	23.25	23.42
Conducted Power (Watts)	0.2208	0.2113	0.2198
ERP(dBm)	20.89	20.70	20.87
ERP(Watts)	0.1227	0.1175	0.1222

LTE Band 5 ($G_T - L_C = -0.40$ dBi) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	22.52	22.52	22.56	22.43	22.43	22.46	22.51	22.50	22.63
Conducted Power (Watts)	0.1786	0.1786	0.1803	0.1750	0.1750	0.1762	0.1782	0.1778	0.1832
ERP(dBm)	19.97	19.97	20.01	19.88	19.88	19.91	19.96	19.95	20.08
ERP(Watts)	0.0993	0.0993	0.1002	0.0973	0.0973	0.0979	0.0991	0.0989	0.1019

LTE Band 5 ($G_T - L_C = -0.40$ dBi) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	22.54	22.53	22.66
Conducted Power (Watts)	0.1795	0.1791	0.1845
ERP(dBm)	19.99	19.98	20.11
ERP(Watts)	0.0998	0.0995	0.1026



LTE Band 7 ($G_T - L_C = -0.10$ dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
(MHz)									
Conducted Power (dBm)	23.29	23.39	23.36	23.42	23.13	23.50	23.24	23.08	23.43
Conducted Power (Watts)	0.2133	0.2183	0.2168	0.2198	0.2056	0.2239	0.2109	0.2032	0.2203
EIRP(dBm)	23.19	23.29	23.26	23.32	23.03	23.40	23.14	22.98	23.33
EIRP(Watts)	0.2084	0.2133	0.2118	0.2148	0.2009	0.2188	0.2061	0.1986	0.2153

LTE Band 7 ($G_T - L_C = -0.10$ dB) QPSK			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency	2510	2535	2560
(MHz)			
Conducted Power (dBm)	23.35	23.28	23.42
Conducted Power (Watts)	0.2163	0.2128	0.2198
EIRP(dBm)	23.25	23.18	23.32
EIRP(Watts)	0.2113	0.2080	0.2148

LTE Band 7 ($G_T - L_C = -0.10$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
(MHz)									
Conducted Power (dBm)	22.43	22.23	22.54	22.43	22.27	22.58	22.42	22.26	22.62
Conducted Power (Watts)	0.1750	0.1671	0.1795	0.1750	0.1687	0.1811	0.1746	0.1683	0.1828
EIRP(dBm)	22.33	22.13	22.44	22.33	22.17	22.48	22.32	22.16	22.52
EIRP(Watts)	0.1710	0.1633	0.1754	0.1710	0.1648	0.1770	0.1706	0.1644	0.1786

LTE Band 7 ($G_T - L_C = -0.10$ dB) 16QAM			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency	2510	2535	2560
(MHz)			
Conducted Power (dBm)	22.48	22.34	22.60
Conducted Power (Watts)	0.1770	0.1714	0.1820
EIRP(dBm)	22.38	22.24	22.50
EIRP(Watts)	0.1730	0.1675	0.1778



LTE Band 38 ($G_T - L_C = 0.00$ dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	37775	38000	38225	37800	38000	38200	37825	38000	38175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
(MHz)									
Conducted Power (dBm)	22.78	22.59	22.81	22.96	22.66	22.72	23.06	22.75	22.72
Conducted Power (Watts)	0.1897	0.1816	0.1910	0.1977	0.1845	0.1871	0.2023	0.1884	0.1871
EIRP(dBm)	22.78	22.59	22.81	22.96	22.66	22.72	23.06	22.75	22.72
EIRP(Watts)	0.1897	0.1816	0.1910	0.1977	0.1845	0.1871	0.2023	0.1884	0.1871

LTE Band 38 ($G_T - L_C = 0.00$ dB) QPSK			
Bandwidth	20M		
Channel	37850	38000	38150
	(Low)	(Mid)	(High)
Frequency	2580	2595	2610
(MHz)			
Conducted Power (dBm)	23.05	22.77	22.80
Conducted Power (Watts)	0.2018	0.1892	0.1905
EIRP(dBm)	23.05	22.77	22.80
EIRP(Watts)	0.2018	0.1892	0.1905



LTE Band 38 ($G_T - L_C = 0.00$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	37775	38000	38225	37800	38000	38200	37825	38000	38175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
(MHz)									
Conducted Power (dBm)	21.99	21.58	21.89	22.03	21.71	21.78	22.05	21.78	21.71
Conducted Power (Watts)	0.1581	0.1439	0.1545	0.1596	0.1483	0.1507	0.1603	0.1507	0.1483
EIRP(dBm)	21.99	21.58	21.89	22.03	21.71	21.78	22.05	21.78	21.71
EIRP(Watts)	0.1581	0.1439	0.1545	0.1596	0.1483	0.1507	0.1603	0.1507	0.1483

LTE Band 38 ($G_T - L_C = 0.00$ dB) 16QAM			
Bandwidth	20M		
Channel	37850	38000	38150
	(Low)	(Mid)	(High)
Frequency	2580	2595	2610
(MHz)			
Conducted Power (dBm)	22.11	21.83	21.72
Conducted Power (Watts)	0.1626	0.1524	0.1486
EIRP(dBm)	22.11	21.83	21.72
EIRP(Watts)	0.1626	0.1524	0.1486

**Peak-to-Average Ratio**

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.81	5.68	5.62	6.03	PASS
Middle CH	4.87	5.74	6.03	6.00	
Highest CH	5.22	5.54	6.03	5.86	


Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.00	5.25	4.64	5.86	PASS
Middle CH	4.20	5.19	5.07	5.83	
Highest CH	4.49	5.28	5.33	5.94	

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.83	6.29	5.88	6.17	PASS
Middle CH	4.84	5.65	6.03	6.64	
Highest CH	4.90	5.57	5.54	6.32	




LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB

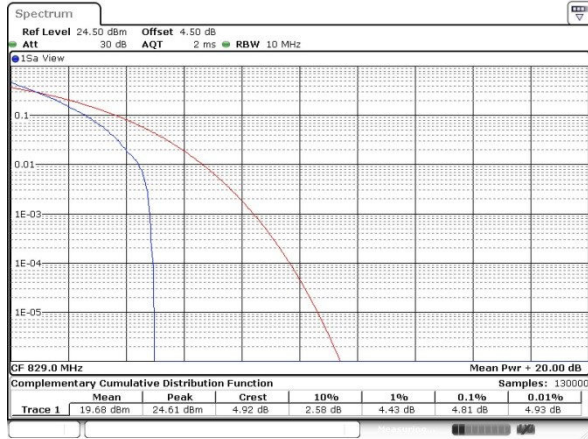


Date: 14 FEB 2017 20:41:37

Lowest Channel / Full RB

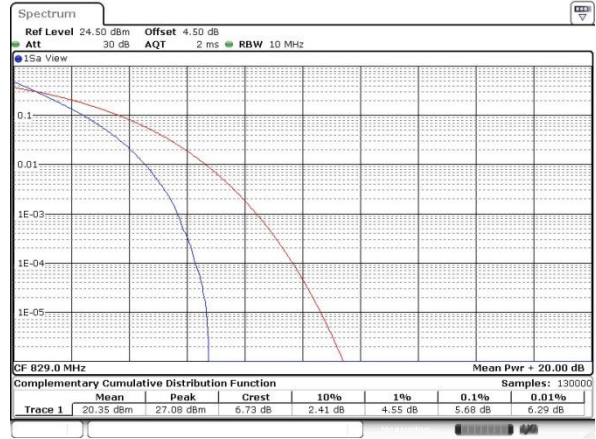


Date: 14 FEB 2017 20:42:10

Middle Channel / 1RB

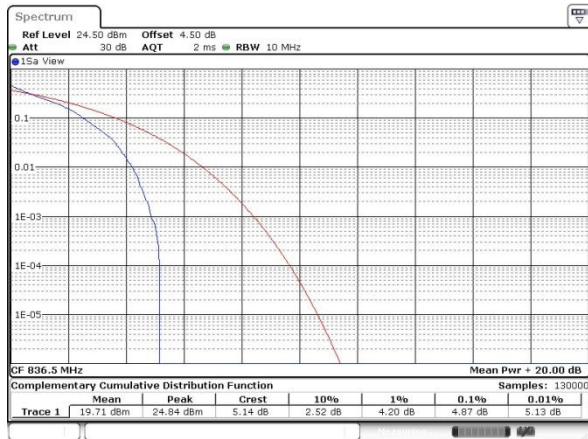


Date: 14 FEB 2017 20:42:39

Middle Channel / Full RB

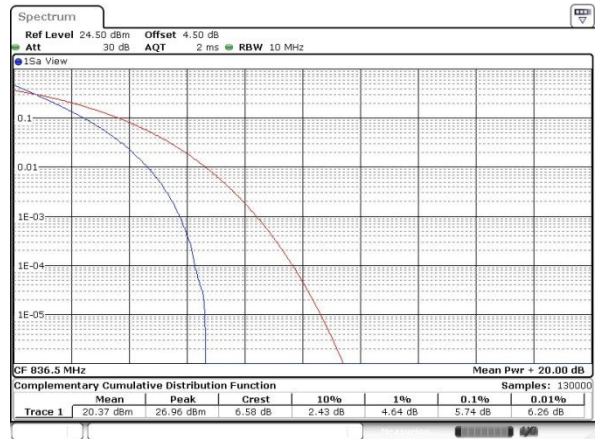


Date: 14 FEB 2017 20:42:25

Highest Channel / 1RB

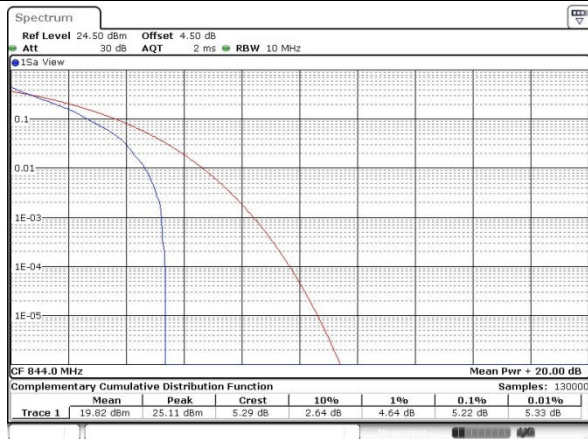

Date: 14 FEB 2017 20:42:54

Highest Channel / Full RB

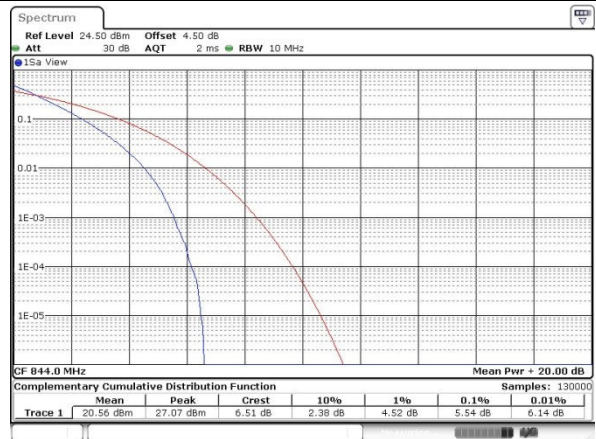


Date: 14 FEB 2017 20:43:08




LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

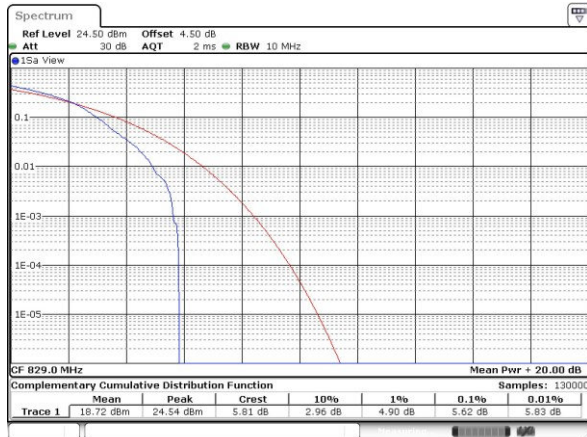


Lowest Channel / Full RB

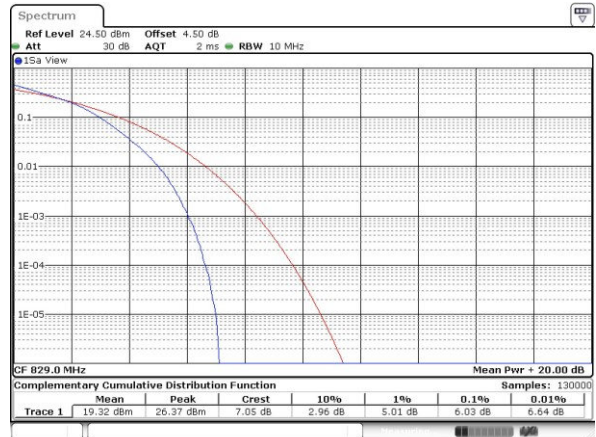


Middle Channel / 1RB




Middle Channel / Full RB

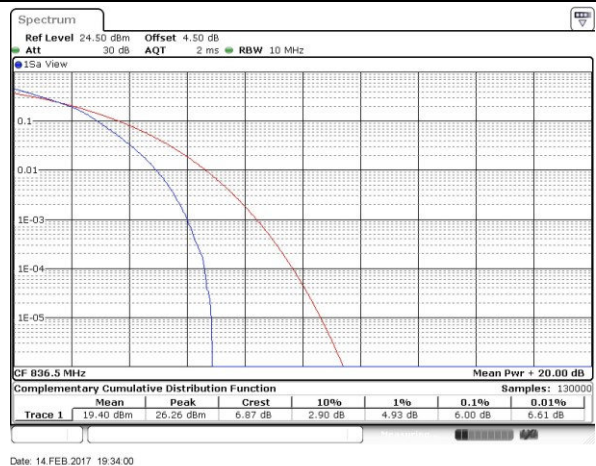


Highest Channel / 1RB

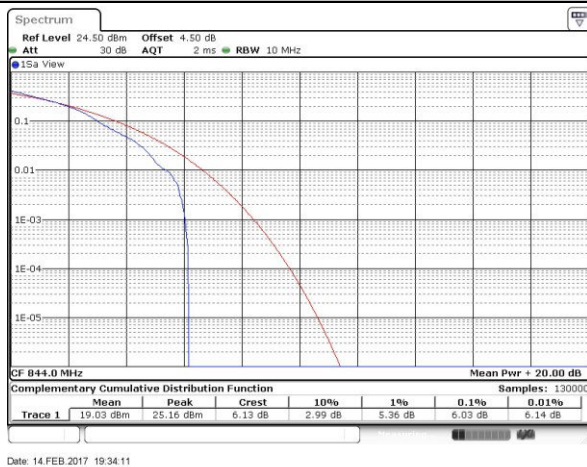


Highest Channel / Full RB

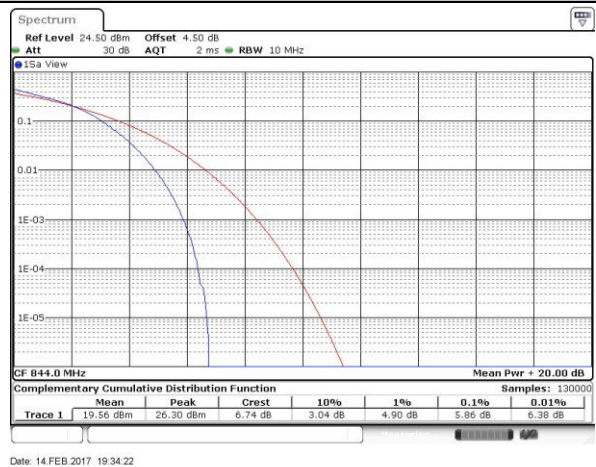


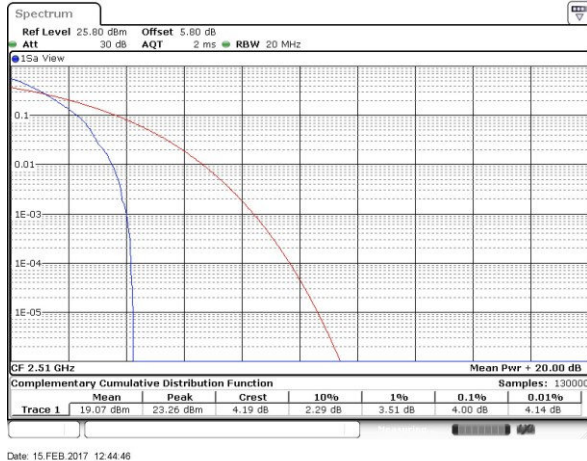LTE Band 7 / 20MHz / QPSK
Lowest Channel / 1RB


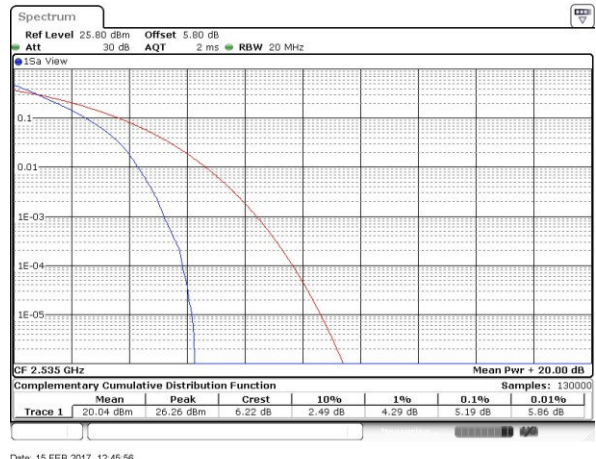
Date: 15 FEB 2017 12:44:46

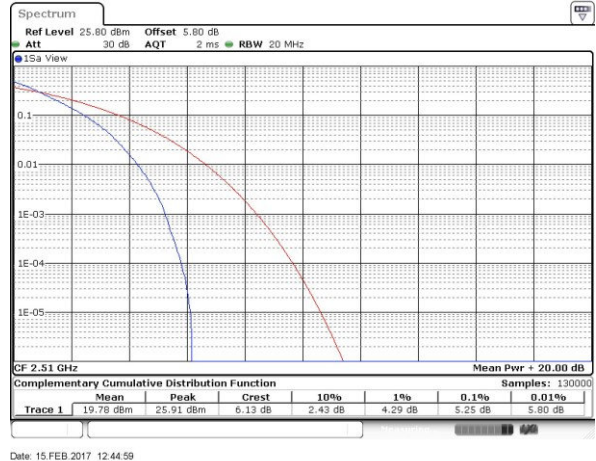Lowest Channel / Full RB


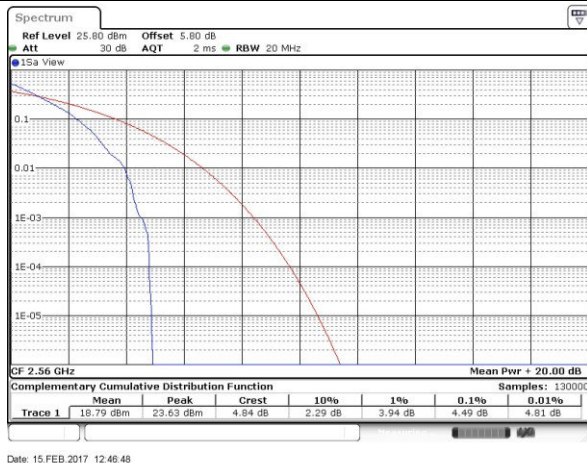
Date: 15 FEB 2017 12:44:59

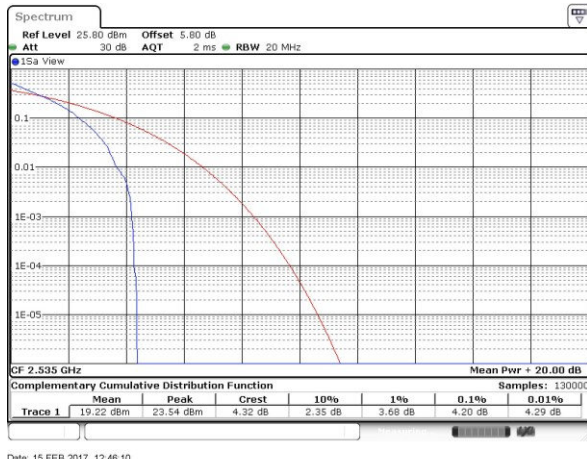Middle Channel / 1RB


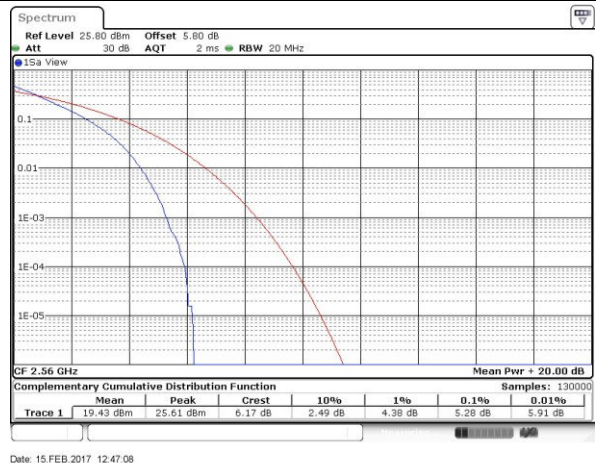
Date: 15 FEB 2017 12:46:10

Middle Channel / Full RB


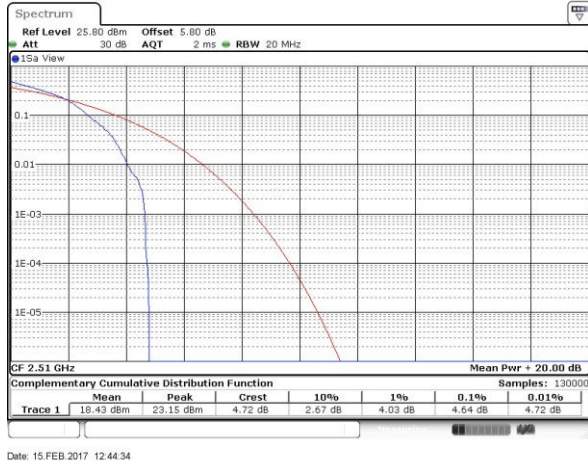
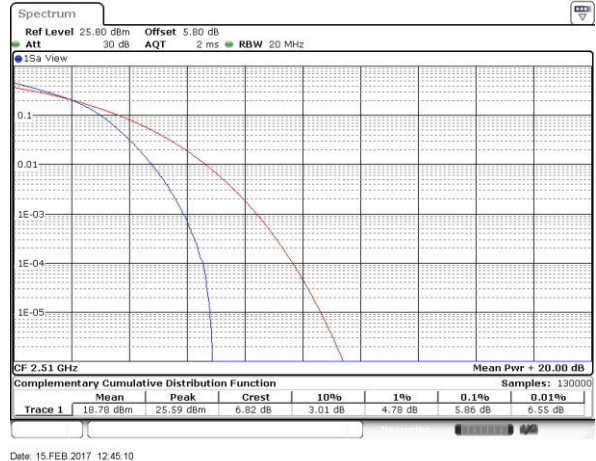
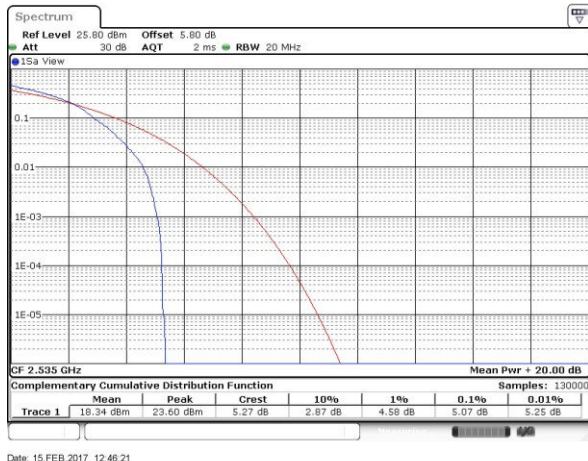
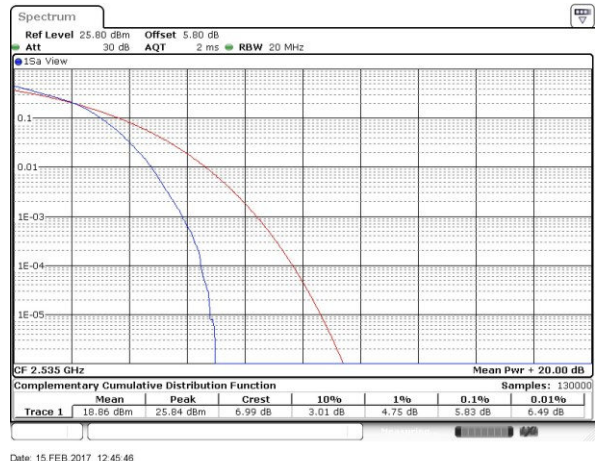
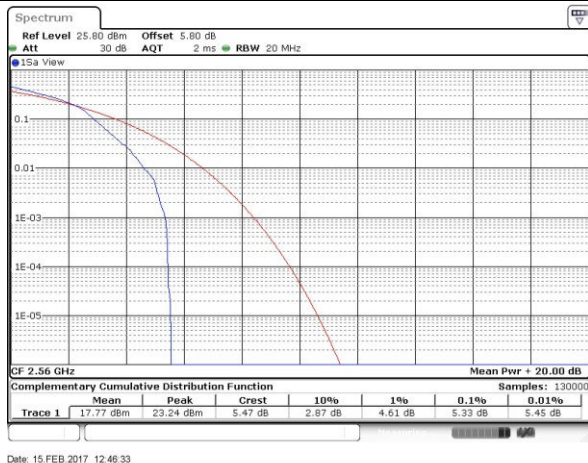
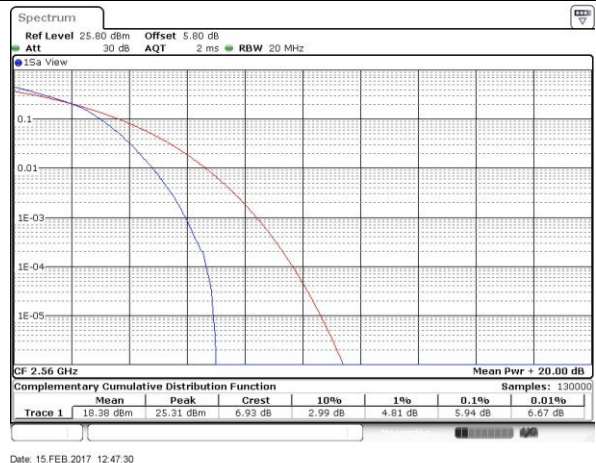
Date: 15 FEB 2017 12:45:56

Highest Channel / 1RB


Date: 15 FEB 2017 12:46:48

Highest Channel / Full RB


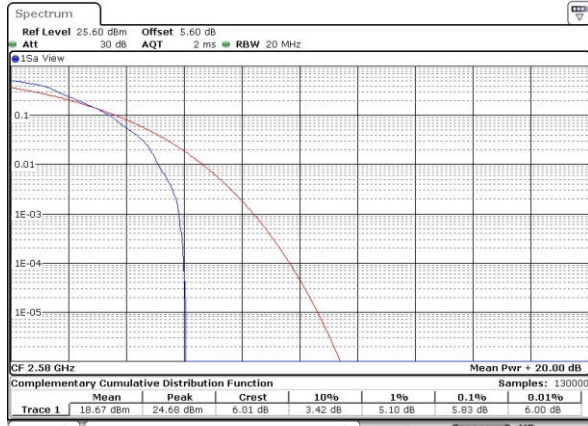
Date: 15 FEB 2017 12:47:08

LTE Band 7 / 20MHz / 16QAM
Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

Middle Channel / Full RB

Highest Channel / 1RB

Highest Channel / Full RB


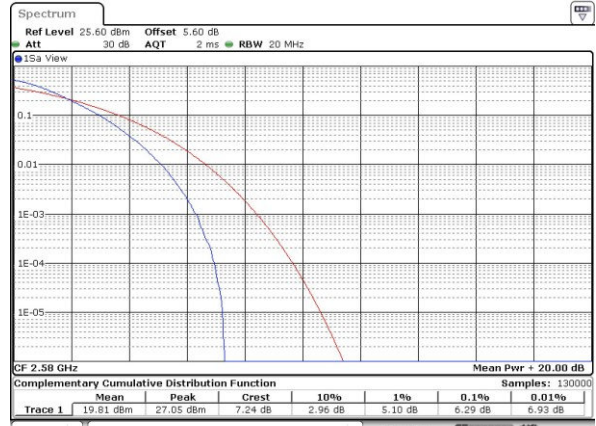


LTE Band 38 / 20MHz / QPSK


Lowest Channel / 1RB




Lowest Channel / Full RB



Middle Channel / 1RB

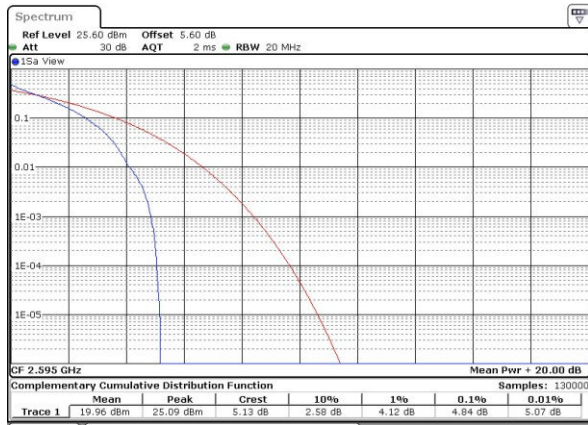


Middle Channel / Full RB

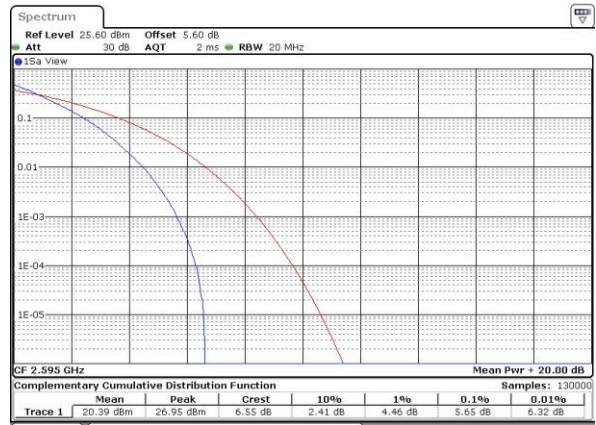

Highest Channel / 1RB




Highest Channel / Full RB

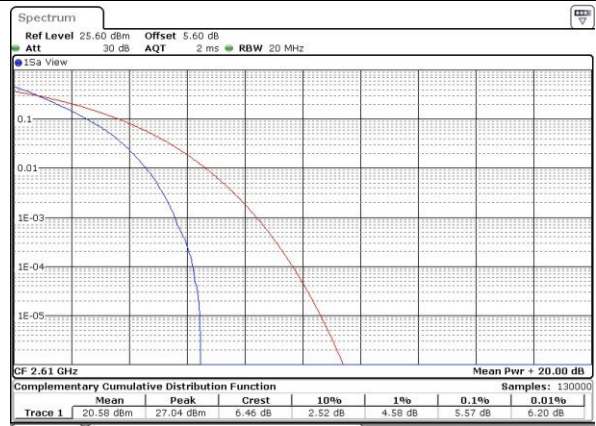




LTE Band 38 / 20MHz / 16QAM


Lowest Channel / 1RB

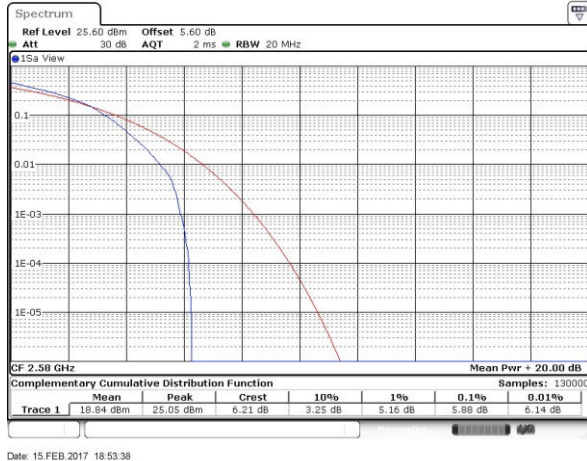


Lowest Channel / Full RB

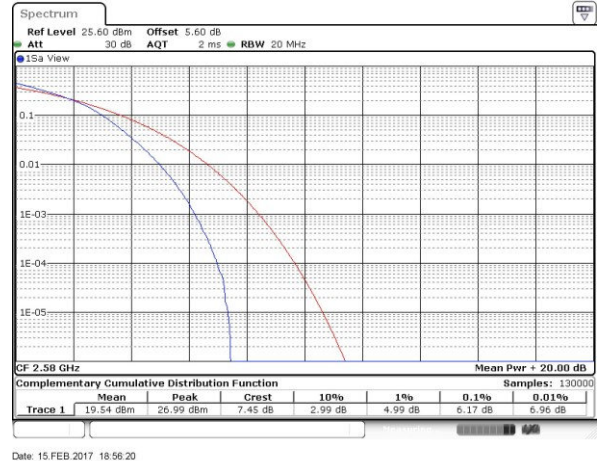


Middle Channel / 1RB

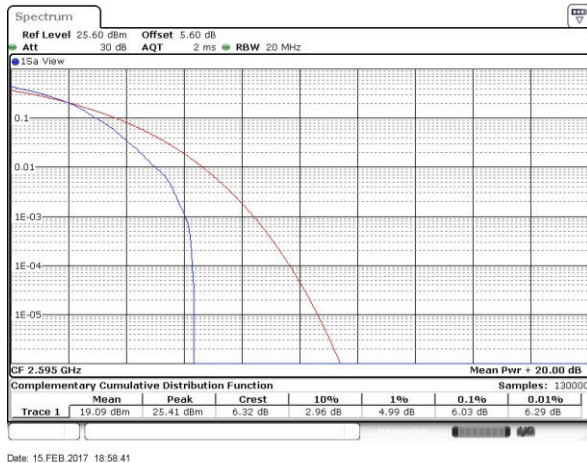


Middle Channel / Full RB

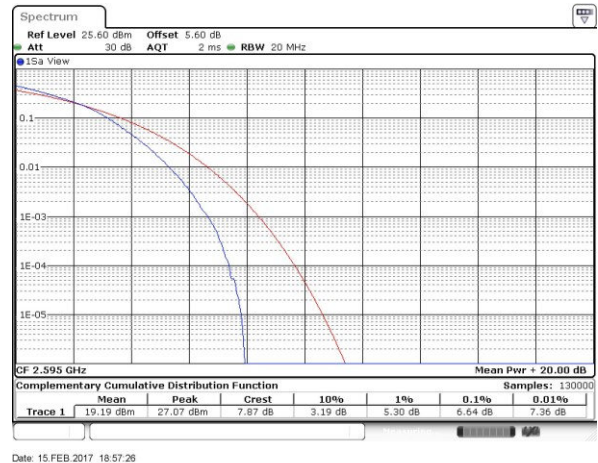

Highest Channel / 1RB

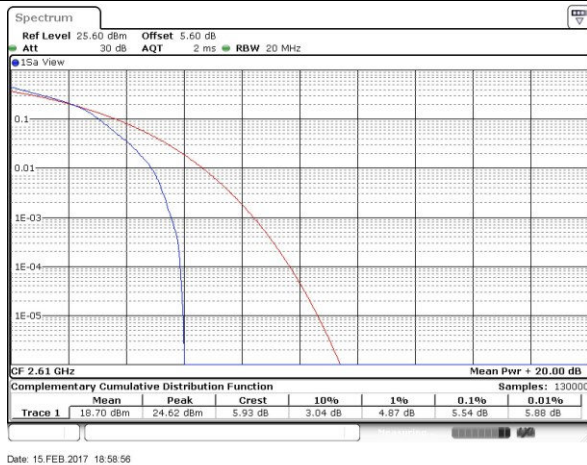

Highest Channel / Full RB

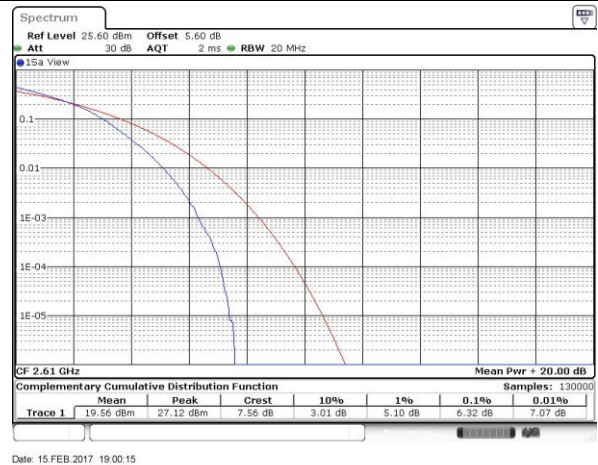

**26dB Bandwidth**

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.25	1.26	2.96	2.99	4.98	4.99	9.87	9.93	-	-	-	-
Middle CH	1.25	1.27	3.03	2.97	5.00	4.98	9.95	9.81	-	-	-	-
Highest CH	1.25	1.26	3.00	3.03	5.09	5.01	9.85	9.95	-	-	-	-


Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.95	5.06	9.81	9.89	14.42	14.48	20.22	20.14
Middle CH	-	-	-	-	4.96	4.98	9.63	9.75	14.63	14.30	20.10	20.10
Highest CH	-	-	-	-	4.92	4.91	9.67	9.87	14.39	14.27	20.18	20.14

Mode	LTE Band 38 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.89	4.92	9.75	9.85	14.42	14.51	20.14	20.18
Middle CH	-	-	-	-	4.88	5.00	9.63	9.65	14.21	14.15	20.18	20.14
Highest CH	-	-	-	-	4.90	4.95	9.79	9.75	14.21	14.30	20.26	20.54




LTE Band 5

Lowest Channel / 1.4MHz / QPSK

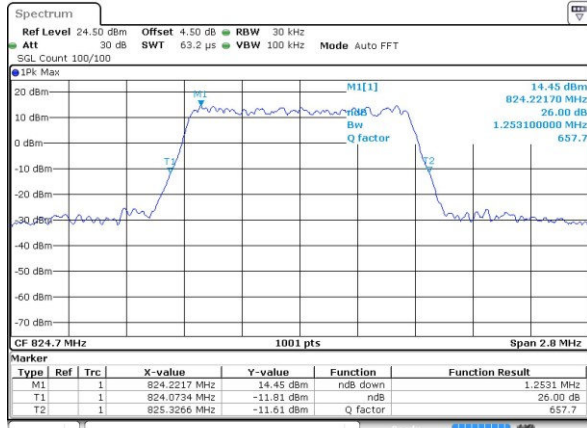


Date: 14 FEB 2017 18:08:15

Lowest Channel / 1.4MHz / 16QAM

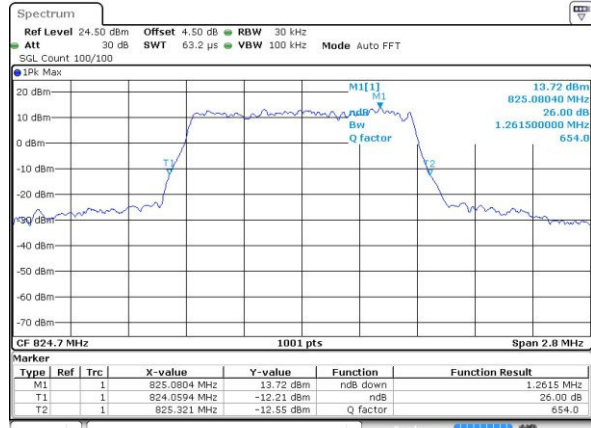


Date: 14 FEB 2017 18:08:04

Middle Channel / 1.4MHz / QPSK

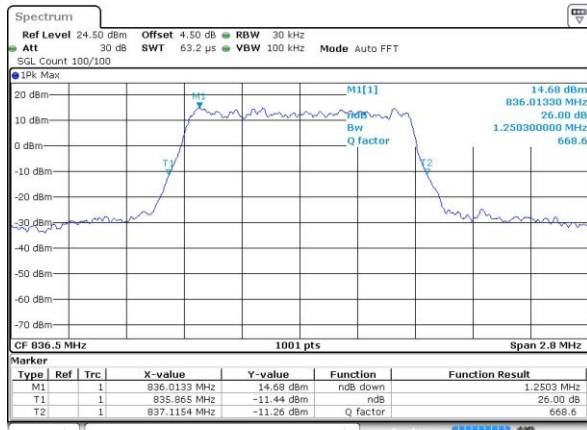


Date: 14 FEB 2017 18:17:15

Middle Channel / 1.4MHz / 16QAM

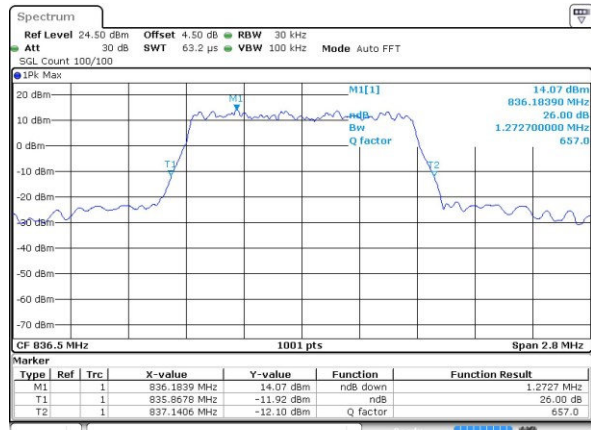


Date: 14 FEB 2017 18:17:27

Highest Channel / 1.4MHz / QPSK

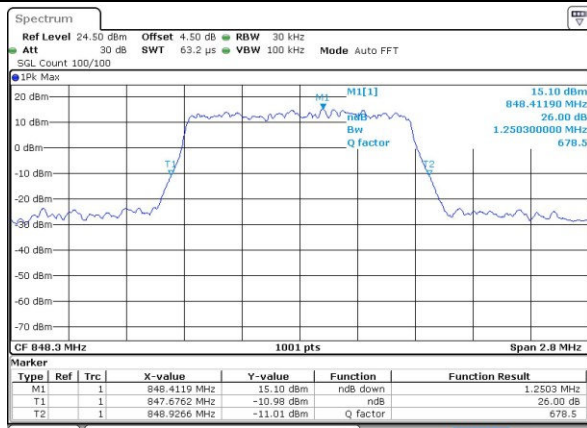

Date: 14 FEB 2017 18:19:52

Highest Channel / 1.4MHz / 16QAM

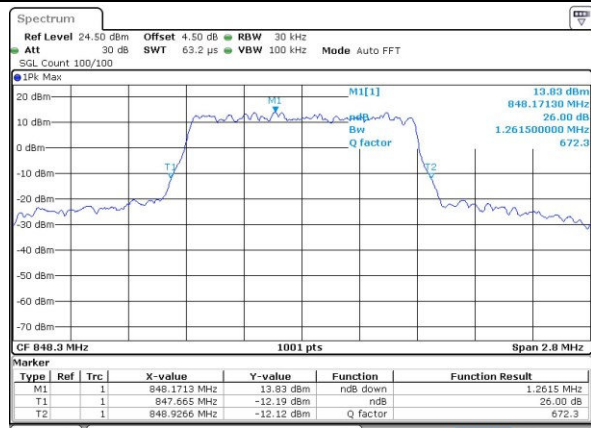


Date: 14 FEB 2017 18:20:03




LTE Band 5


Lowest Channel / 3MHz / QPSK

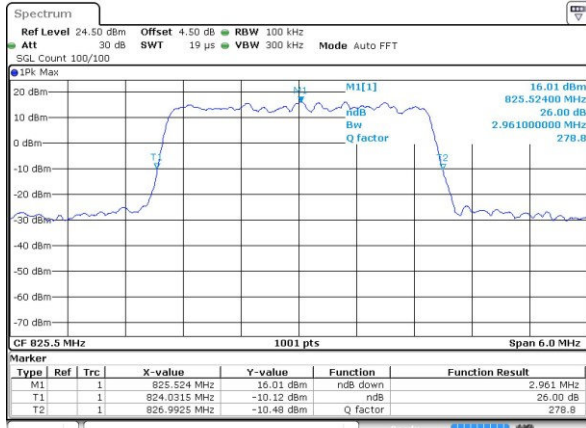


Lowest Channel / 3MHz / 16QAM

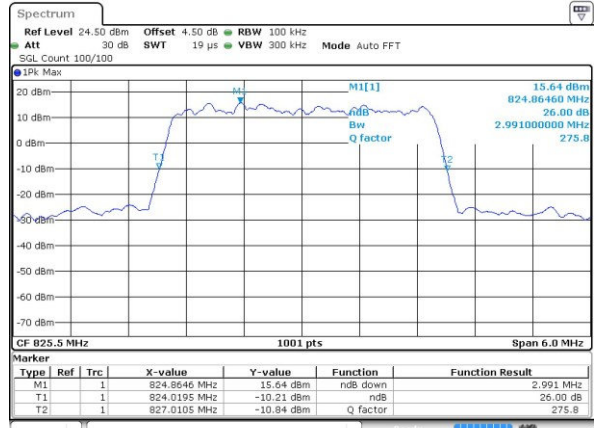


Middle Channel / 3MHz / QPSK

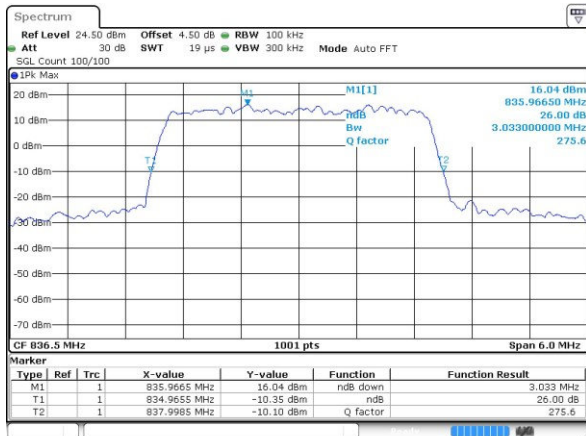


Middle Channel / 3MHz / 16QAM

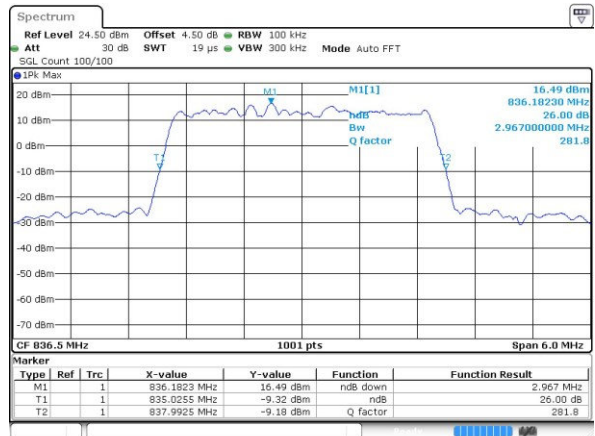

Highest Channel / 3MHz / QPSK

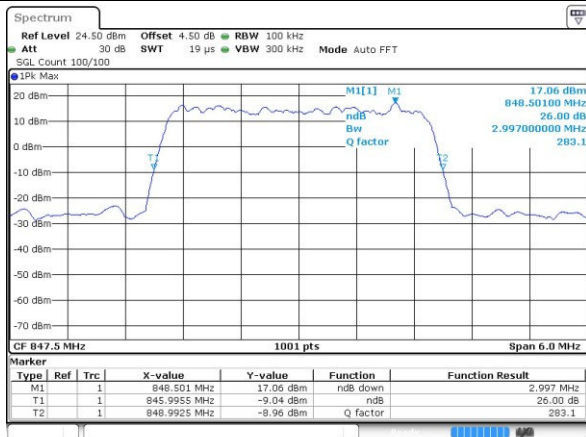


Highest Channel / 3MHz / 16QAM

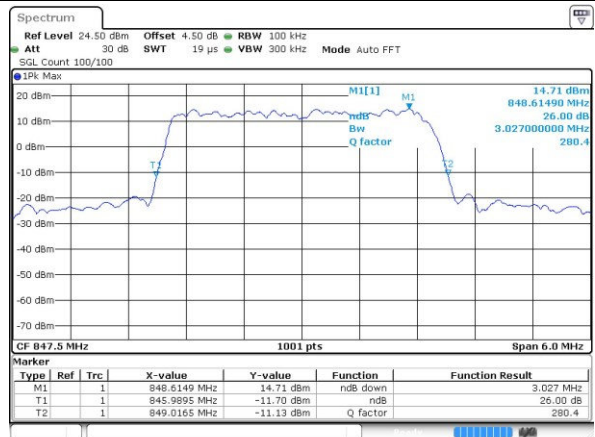




LTE Band 5

Lowest Channel / 5MHz / QPSK

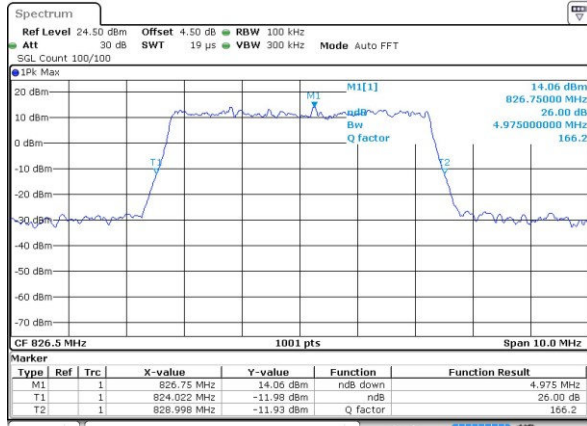


Date: 14 FEB 2017 18:50:04

Lowest Channel / 5MHz / 16QAM

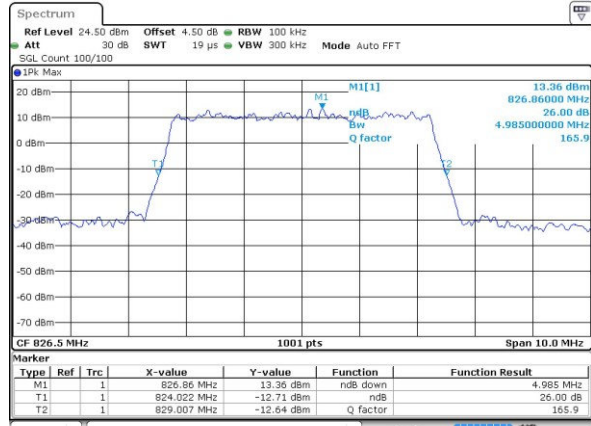


Date: 14 FEB 2017 18:50:15

Middle Channel / 5MHz / QPSK

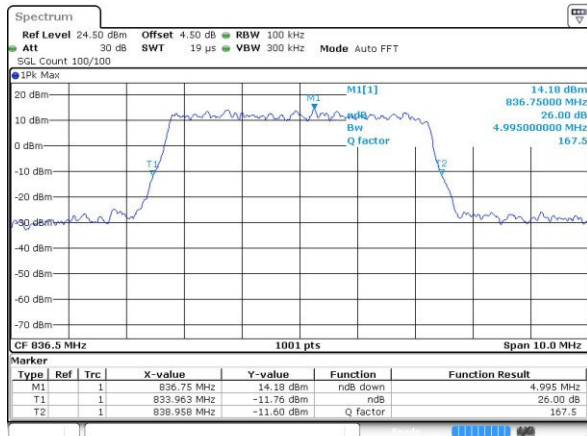


Date: 14 FEB 2017 18:59:15

Middle Channel / 5MHz / 16QAM

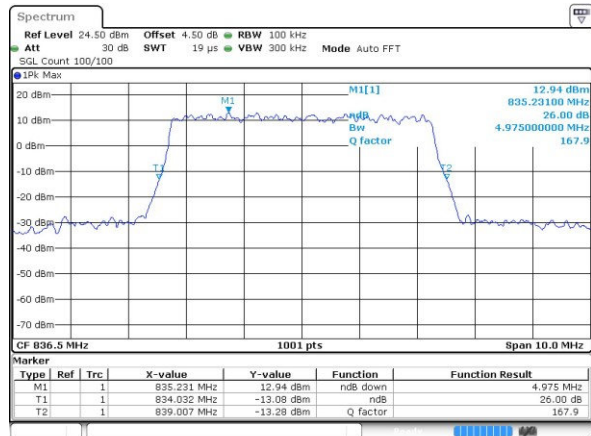


Date: 14 FEB 2017 18:59:26

Highest Channel / 5MHz / QPSK

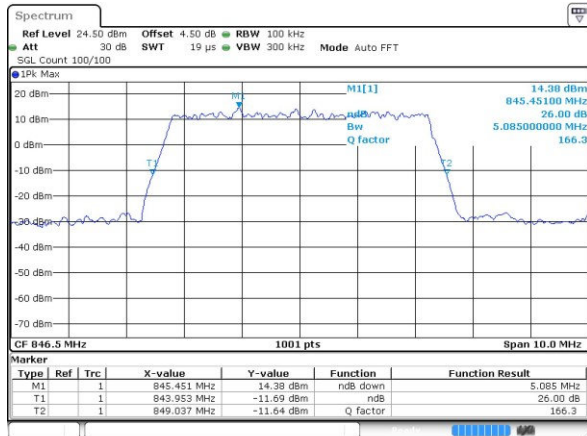

Date: 14 FEB 2017 19:01:51

Highest Channel / 5MHz / 16QAM

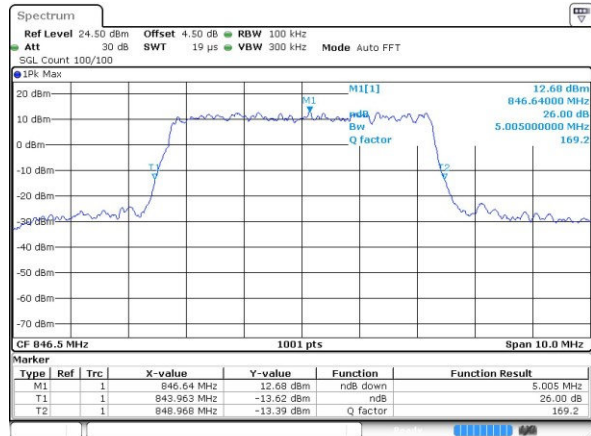


Date: 14 FEB 2017 19:02:03




LTE Band 5


Lowest Channel / 10MHz / QPSK

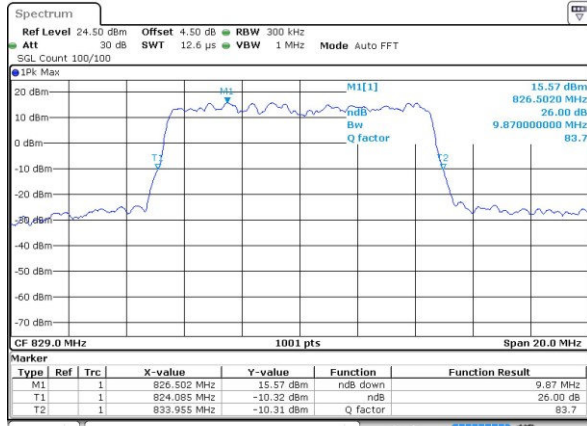


Lowest Channel / 10MHz / 16QAM

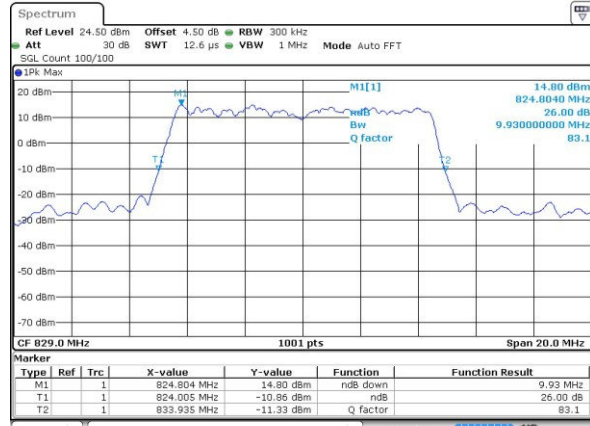


Middle Channel / 10MHz / QPSK

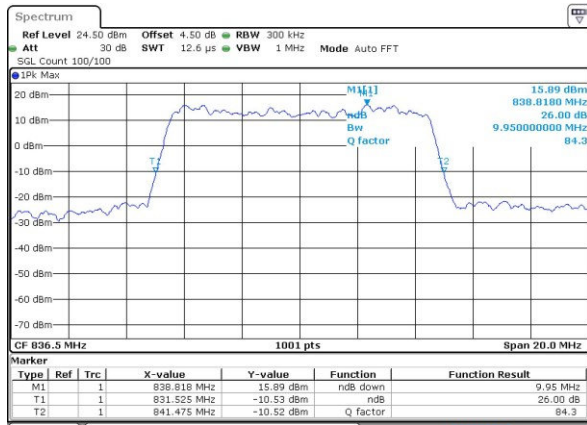

Middle Channel / 10MHz / 16QAM

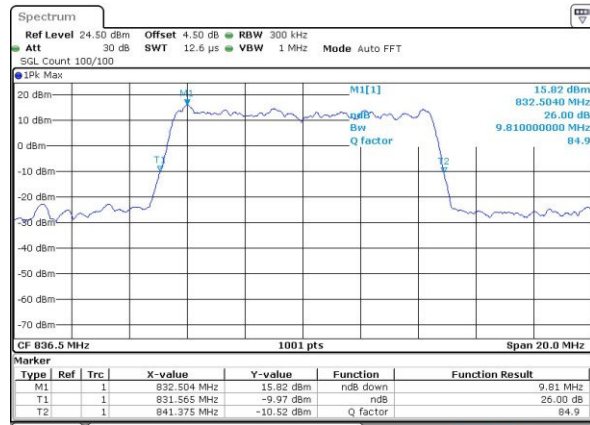

Highest Channel / 10MHz / QPSK

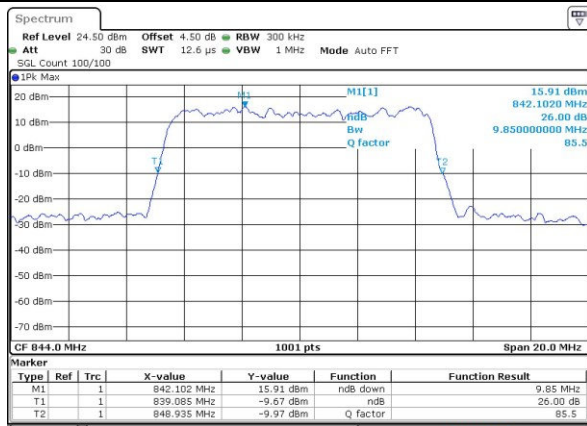

Highest Channel / 10MHz / 16QAM

