


# FCC Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : 10162  
FCC ID : IHDT56WE2  
STANDARD : FCC 47 CFR FCC Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Jan. 19, 2017 and testing was completed on Mar. 17, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager

SPORTON LAB.

Approved by: Jones Tsai / Manager



**Sporton International (KunShan) INC.**

**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



## TABLE OF CONTENTS

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                 | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                           | <b>4</b>  |
| <b>1. GENERAL DESCRIPTION .....</b>                           | <b>5</b>  |
| 1.1. Applicant.....                                           | 5         |
| 1.2. Manufacturer .....                                       | 5         |
| 1.3. Product Feature of Equipment Under Test .....            | 5         |
| 1.4. Product Specification of Equipment Under Test .....      | 6         |
| 1.5. Specification of Accessory .....                         | 7         |
| 1.6. Modification of EUT .....                                | 7         |
| 1.7. Test Location .....                                      | 8         |
| 1.8. Applicable Standards .....                               | 8         |
| <b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>    | <b>9</b>  |
| 2.1. Test Mode .....                                          | 9         |
| 2.2. Connection Diagram of Test System .....                  | 10        |
| 2.3. Support Unit used in test configuration and system ..... | 11        |
| 2.4. EUT Operation Test Setup .....                           | 11        |
| <b>3. TEST RESULT .....</b>                                   | <b>12</b> |
| 3.1. Test of AC Conducted Emission Measurement .....          | 12        |
| 3.2. Test of Radiated Emission Measurement .....              | 16        |
| <b>4. LIST OF MEASURING EQUIPMENT .....</b>                   | <b>20</b> |
| <b>5. UNCERTAINTY OF EVALUATION .....</b>                     | <b>21</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                          |           |



## REVISION HISTORY

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FC711809-01 | Rev. 01 | Initial issue of report | Mar. 30, 2017 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description           | Limit           | Result | Remark                                   |
|----------------|----------|-----------------------|-----------------|--------|------------------------------------------|
| 3.1            | 15.107   | AC Conducted Emission | < 15.107 limits | PASS   | Under limit<br>12.48 dB at<br>0.471 MHz  |
| 3.2            | 15.109   | Radiated Emission     | < 15.109 limits | PASS   | Under limit<br>11.21 dB at<br>84.540 MHz |



## 1. General Description

### 1.1. Applicant

**Motorola Mobility LLC**  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 1.2. Manufacturer

**Motorola Mobility LLC**  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

### 1.3. Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                                                                 |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Mobile Cellular Phone                                                                                                                                           |
| Brand Name                      | Motorola                                                                                                                                                        |
| Model Name                      | 10162                                                                                                                                                           |
| FCC ID                          | IHDT56WE2                                                                                                                                                       |
| EUT supports Radios application | GSM/GPRS/EDGE/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE/<br>WLAN 2.4GHz 802.11b/g/n HT20/<br>Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/<br>Bluetooth v4.1 LE/Bluetooth v4.2 LE |
| IMEI Code                       | Conduction: 355649080004299/355649080004307<br>Radiation: 355649080004216/355649080004224                                                                       |
| HW Version                      | WKHMA1B2-2                                                                                                                                                      |
| SW Version                      | NRD90M.03                                                                                                                                                       |
| EUT Stage                       | Identical Prototype                                                                                                                                             |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>LTE Band 5 : 824.7 MHz ~ 848.3 MHz<br>LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz                                                                                                                                                    |
| <b>Rx Frequency</b>                     | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz<br>LTE Band 5 : 869.7 MHz ~ 893.3 MHz<br>LTE Band 7: 2622.5 MHz ~ 2687.5 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>GPS : 1.57542 GHz<br>FM : 88 MHz ~ 108 MHz                                                                                                      |
| <b>Antenna Type</b>                     | WWAN: PIFA Antenna<br>WLAN: PIFA Antenna<br>Bluetooth: PIFA Antenna<br>GPS: PIFA Antenna<br>FM: External headset Antenna                                                                                                                                                                                                                                                                                                                                 |
| <b>Type of Modulation</b>               | GSM: GMSK<br>GPRS: GMSK<br>EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK<br>WCDMA : BPSK (Uplink)<br>HSDPA/DC-HSDPA : QPSK (Uplink)<br>HSUPA : QPSK (Uplink)<br>HSPA+ : 16QAM<br>DC-HSDPA : 64QAM<br>LTE: QPSK / 16QAM<br>802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>Bluetooth LE : GFSK<br>Bluetooth (1Mbps) : GFSK<br>Bluetooth (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth (3Mbps) : 8-DPSK<br>GPS : BPSK<br>FM : FM |

## 1.5. Specification of Accessory

| Specification of Accessory |                  |                                                     |                              |
|----------------------------|------------------|-----------------------------------------------------|------------------------------|
| AC Adapter(EU)             | Brand Name       | Motorola (AcBel)                                    | Model Name C-P36 SPN5944A    |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA        |                              |
| AC Adapter(US)             | Brand Name       | Motorola (AcBel)                                    | Model Name C-P35 SPN5945A    |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA        |                              |
| AC Adapter(UK)             | Brand Name       | Motorola (AcBel)                                    | Model Name C-P37 SPN5940A    |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA        |                              |
| AC Adapter(IN)             | Brand Name       | Motorola (AcBel)                                    | Model Name C-P49 SPN5946A    |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA        |                              |
| AC Adapter(AR)             | Brand Name       | Motorola (AcBel)                                    | Model Name C-P47 SPN5942A    |
|                            | Power Rating     | I/P: 100-240 Vac, 500mA, O/P: 5.2Vdc, 2000mA        |                              |
| Battery                    | Brand Name       | Motorola (Sunwoda)                                  | Model Name HC60              |
|                            | Power Rating     | 3.8Vdc,<br>3780/4000mAh<br>(Min/Typ)                | Type Li-ion                  |
| Earphone                   | Brand Name       | Motorola(HETONG)                                    | Model Name PY-13A1602-01KC39 |
|                            | Signal Line Type | 1.2 meter, non-shielded cable, without ferrite core |                              |
| USB Cable                  | Brand Name       | Motorola (Saibao)                                   | Model Name SYD-A017A         |
|                            | Signal Line Type | 1.0 meter, shielded cable, without ferrite core     |                              |

## 1.6. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7. Test Location

|                           |                                                                                                                        |           |                             |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------|
| <b>Test Site</b>          | Sporton International (KunShan) INC.                                                                                   |           |                             |
| <b>Test Site Location</b> | No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |           |                             |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                |           | <b>FCC Registration No.</b> |
|                           | CO01-KS                                                                                                                | 03CH02-KS | 418269                      |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. For FCC 15 Subpart B - Unintentional Radiators, device supporting USB interface or similar peripherals (defined as the Section 15.3 (r) Peripheral device) acting as a peripheral for personal computers shall be authorized as "The Class B personal computers and peripherals" per the Section 15.101 (a) Equipment authorization of unintentional radiators.
3. For other Unintentional Radiators features of this EUT, test reports are be issued separately.  
Per the Note of the Section 15.101, when device supports features (USB, FM Radio, digital devices...etc) more than one category of authorization, type of authorization shall be appropriately chosen for FCC 15B compliance rule, and the Section 15.101 (b), only those receivers that operate (tune) within the frequency range of 30-960 MHz, CB receivers and radar detectors are subject to the authorizations shown in paragraph (a) of the Section 15.101. However, receivers indicated as being subject to Declaration of Conformity that are contained within a transceiver, the transmitter portion of which is subject to certification, shall be authorized under the verification procedure.

## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

| Test Items            | Function Type                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission | Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |
| Radiated Emissions    | Mode 1: LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |

## 2.2. Connection Diagram of Test System

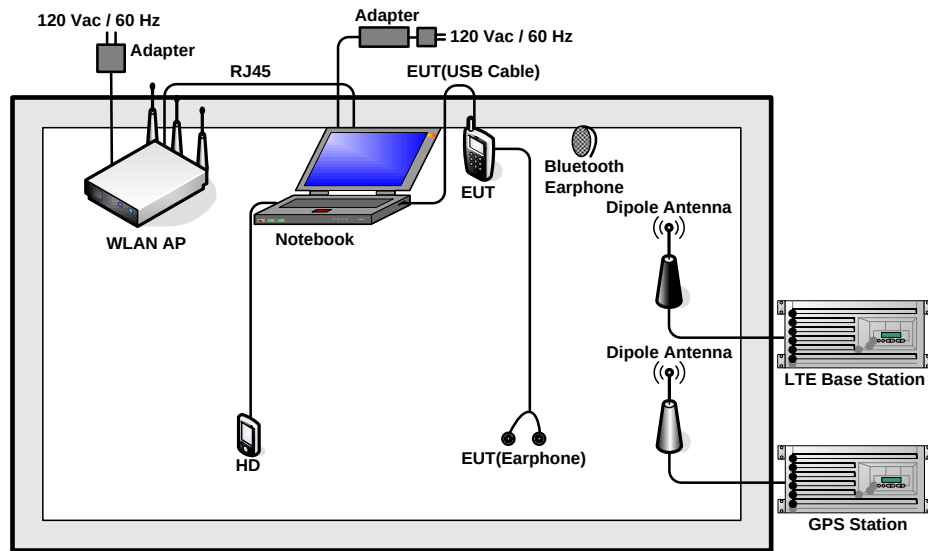

## 2.3. Support Unit used in test configuration and system

| Item | Equipment          | Trade Name | Model Name   | FCC ID      | Data Cable      | Power Cord                                                 |
|------|--------------------|------------|--------------|-------------|-----------------|------------------------------------------------------------|
| 1.   | LTE Base Station   | Anritsu    | MT8820C      | N/A         | N/A             | Unshielded, 1.8 m                                          |
| 2.   | GPS Station        | ADIVIC     | MP9000       | N/A         | N/A             | Unshielded, 1.8 m                                          |
| 3.   | WLAN AP            | TP-LINK    | TL-WDR5600   | N/A         | N/A             | Unshielded, 1.8 m                                          |
| 4.   | WLAN AP            | D-link     | DIR-855      | KA2DIR855A2 | N/A             | Unshielded, 1.8 m                                          |
| 5.   | Notebook           | Lenovo     | G480         | N/A         | N/A             | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 6.   | Notebook           | Dell       | Latitude3440 | N/A         | N/A             | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 7.   | Bluetooth Earphone | Lenovo     | LBH308       | N/A         | N/A             | N/A                                                        |
| 8.   | Bluetooth Earphone | Lenovo     | LBH301       | QTLBH-106   | N/A             | N/A                                                        |
| 9.   | Hard Disk          | Lenovo     | F310         | FCC DoC     | Shielded, 0.5 m | N/A                                                        |
| 10.  | SD Card            | SanDisk    | Uitra        | N/A         | N/A             | N/A                                                        |

## 2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission<br>(MHz) | Conducted limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

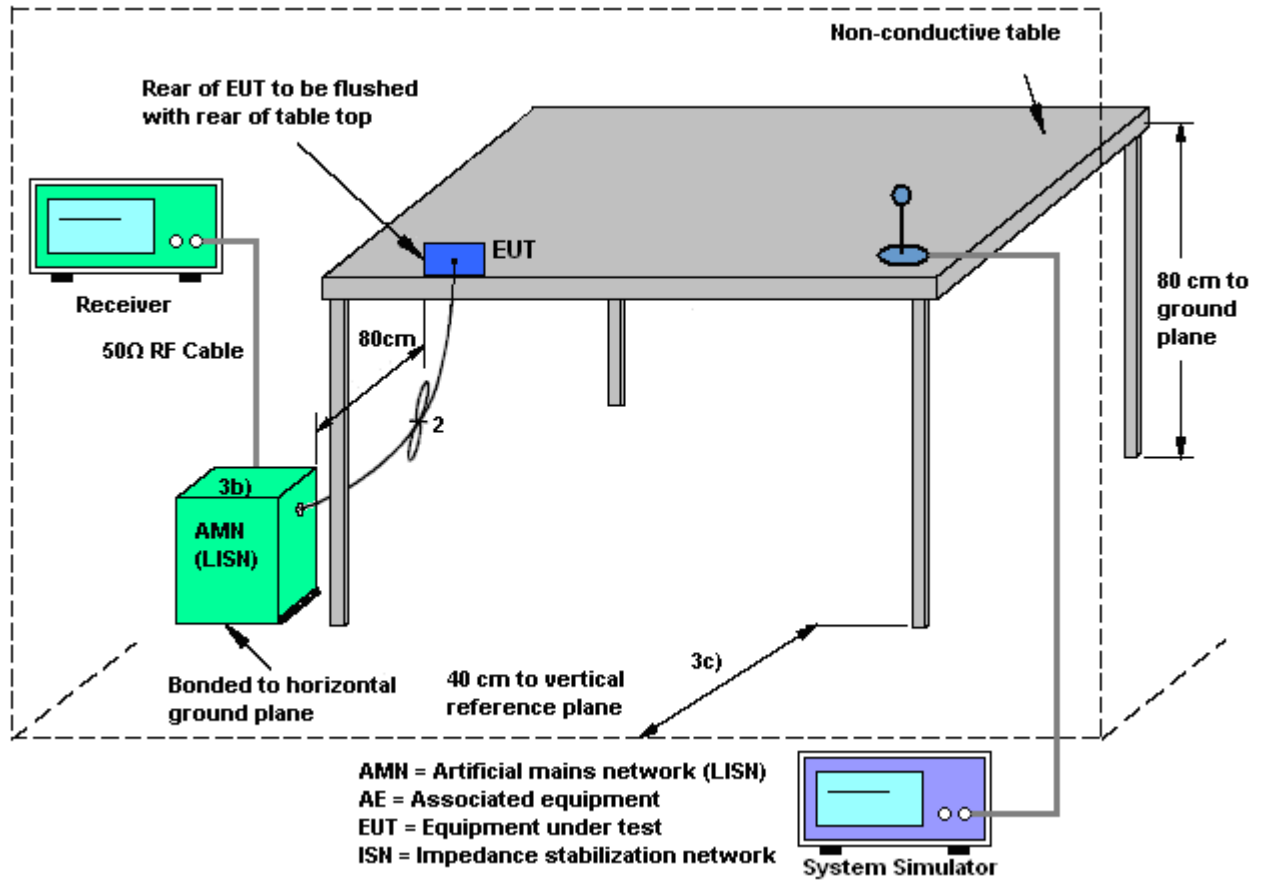



## 3.1.5 Test Result of AC Conducted Emission

|                 |                                                                                                                         |                     |        |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|---------------------|--------|
| Test Mode :     | Mode 1                                                                                                                  | Temperature :       | 20~22℃ |
| Test Engineer : | Peter Wei                                                                                                               | Relative Humidity : | 40~42% |
| Test Voltage :  | 120Vac / 60Hz                                                                                                           | Phase :             | Line   |
| Function Type : | LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |                     |        |

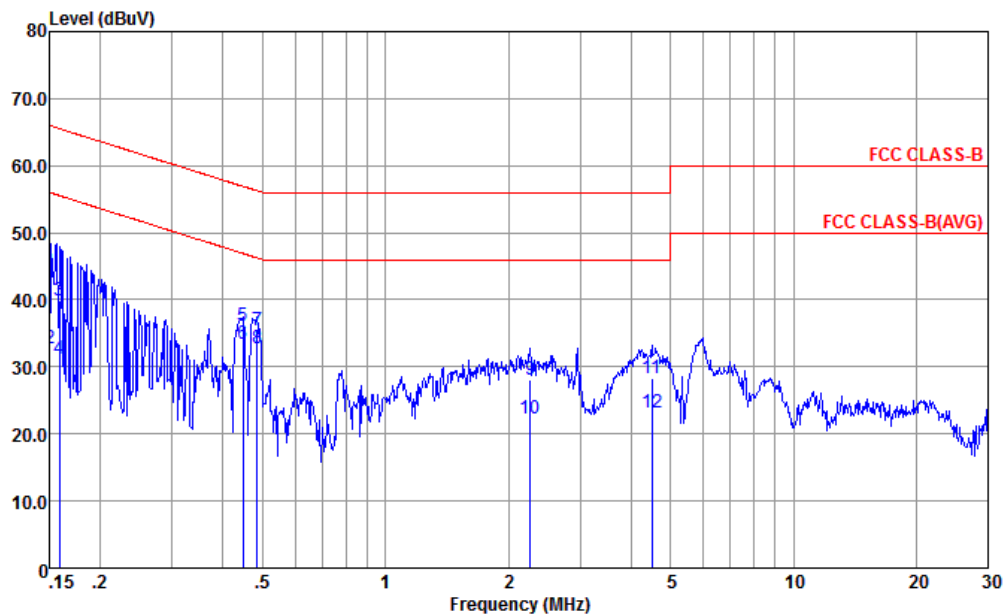


Site : CO01-KS  
Condition : FCC CLASS-B LISN-L-20151024 LINE  
Project : (FC) 711809-01  
mode : Mode 1  
IMEI : 355649080004299/355649080004307

|     | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|-------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.150 | 44.02 | -21.98     | 66.00      | 33.10      | 0.53        | 10.39      | QP      |
| 2   | 0.150 | 32.72 | -23.28     | 56.00      | 21.80      | 0.53        | 10.39      | Average |
| 3   | 0.159 | 39.85 | -25.67     | 65.52      | 29.00      | 0.47        | 10.38      | QP      |
| 4   | 0.159 | 31.25 | -24.27     | 55.52      | 20.40      | 0.47        | 10.38      | Average |
| 5   | 0.447 | 36.12 | -20.81     | 56.93      | 25.70      | 0.23        | 10.19      | QP      |
| 6 * | 0.447 | 33.52 | -13.41     | 46.93      | 23.10      | 0.23        | 10.19      | Average |
| 7   | 0.484 | 35.52 | -20.75     | 56.27      | 25.10      | 0.23        | 10.19      | QP      |
| 8   | 0.484 | 32.82 | -13.45     | 46.27      | 22.40      | 0.23        | 10.19      | Average |
| 9   | 2.261 | 28.18 | -27.82     | 56.00      | 17.80      | 0.18        | 10.20      | QP      |
| 10  | 2.261 | 22.18 | -23.82     | 46.00      | 11.80      | 0.18        | 10.20      | Average |
| 11  | 4.501 | 28.33 | -27.67     | 56.00      | 17.90      | 0.19        | 10.24      | QP      |
| 12  | 4.501 | 23.23 | -22.77     | 46.00      | 12.80      | 0.19        | 10.24      | Average |



|                        |                                                                                                                         |                            |         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                                                  | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Peter Wei                                                                                                               | <b>Relative Humidity :</b> | 40~42%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                                           | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |                            |         |

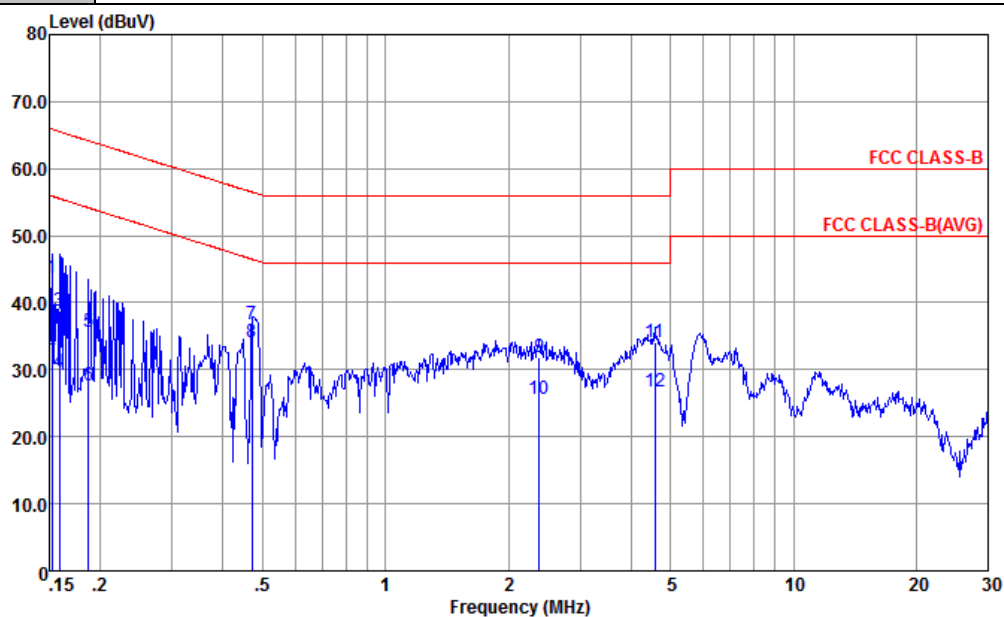

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL  
 Project : (FC) 711809-01  
 mode : Mode 1  
 IMEI : 355649080004299/355649080004307

|     | Freq  | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|-------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz   | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.152 | 43.69 | -22.18     | 65.87      | 33.00      | 0.30        | 10.39      | QP      |
| 2   | 0.152 | 32.99 | -22.88     | 55.87      | 22.30      | 0.30        | 10.39      | Average |
| 3   | 0.159 | 38.78 | -26.74     | 65.52      | 28.10      | 0.30        | 10.38      | QP      |
| 4   | 0.159 | 29.58 | -25.94     | 55.52      | 18.90      | 0.30        | 10.38      | Average |
| 5   | 0.187 | 35.65 | -28.50     | 64.15      | 24.99      | 0.31        | 10.35      | QP      |
| 6   | 0.187 | 27.55 | -26.60     | 54.15      | 16.89      | 0.31        | 10.35      | Average |
| 7   | 0.471 | 36.81 | -19.68     | 56.49      | 26.30      | 0.32        | 10.19      | QP      |
| 8 * | 0.471 | 34.01 | -12.48     | 46.49      | 23.50      | 0.32        | 10.19      | Average |
| 9   | 2.384 | 31.78 | -24.22     | 56.00      | 21.20      | 0.38        | 10.20      | QP      |
| 10  | 2.384 | 25.58 | -20.42     | 46.00      | 15.00      | 0.38        | 10.20      | Average |
| 11  | 4.574 | 34.00 | -22.00     | 56.00      | 23.40      | 0.36        | 10.24      | QP      |
| 12  | 4.574 | 26.70 | -19.30     | 46.00      | 16.10      | 0.36        | 10.24      | Average |

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

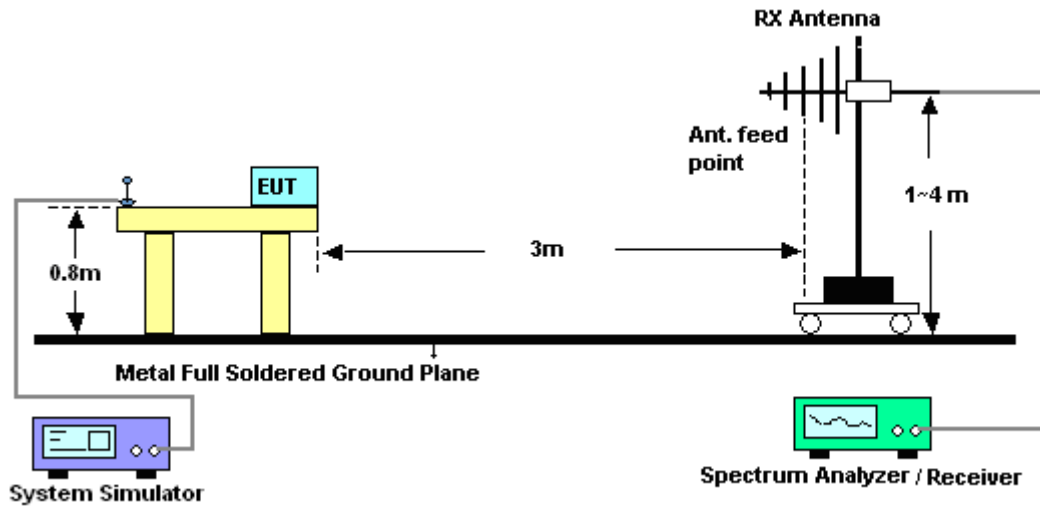


For radiated emissions above 1GHz

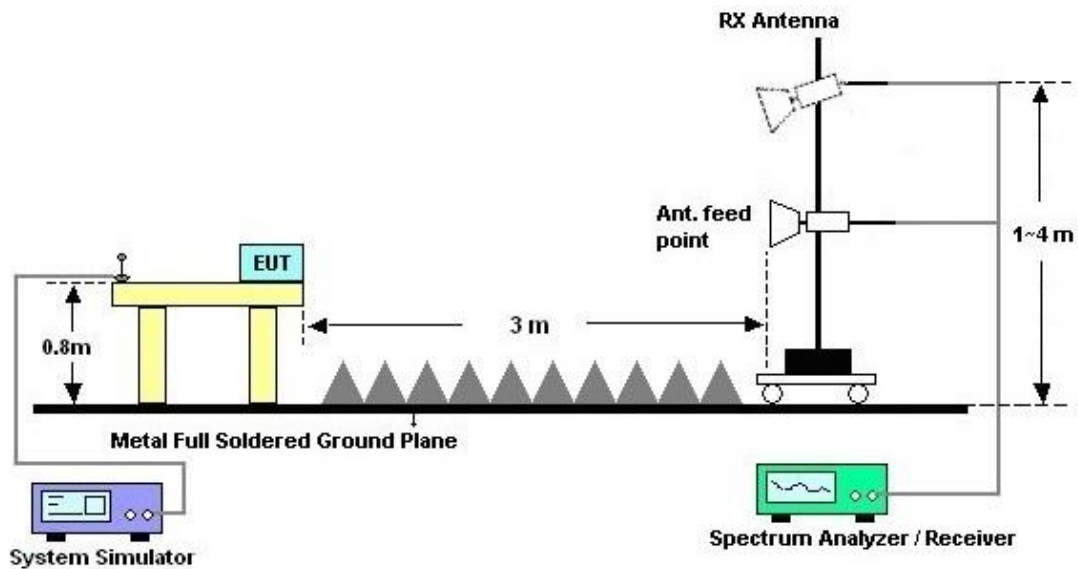



## 3.2.5. Test Result of Radiated Emission

|                 |                                                                                                                         |                     |            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Test Mode :     | Mode 1                                                                                                                  | Temperature :       | 21~22°C    |
| Test Engineer : | Jason Peng                                                                                                              | Relative Humidity : | 41~42%     |
| Test Distance : | 3m                                                                                                                      | Polarization :      | Horizontal |
| Function Type : | LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |                     |            |
| Remark :        | #6 is system simulator signal which can be ignored.                                                                     |                     |            |

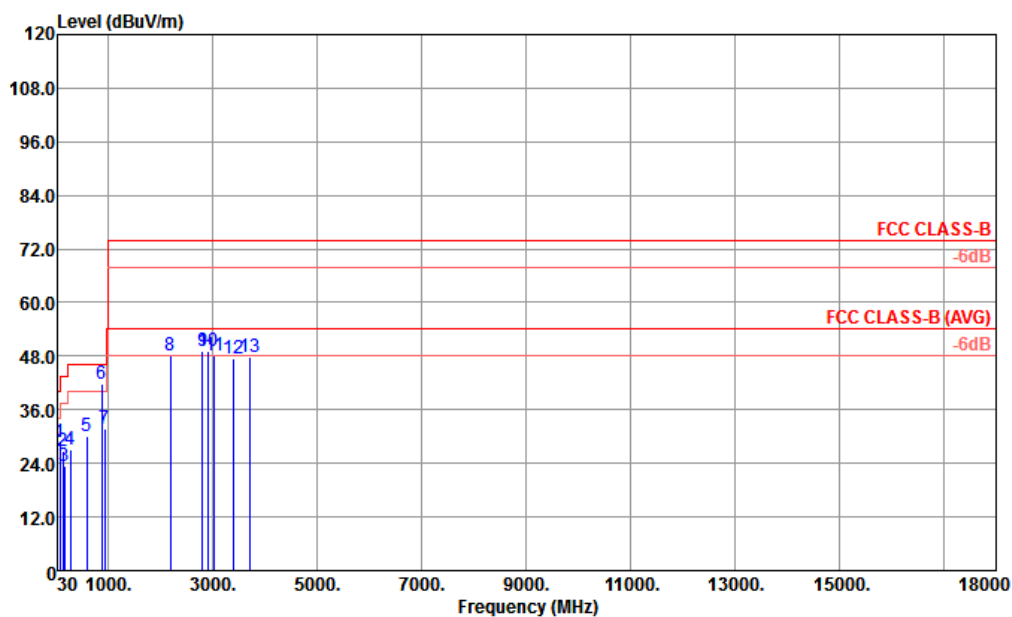


Site : 03CH02-KS  
Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL  
Project : (FC)711809-01  
Mode : 1  
IMEI : 355649080004216 355649080004224 #5

|    | Freq    | Level  | Over   | Limit | ReadAntenna | Cable  | Preamp | A/Pos  | T/Pos | Remark |
|----|---------|--------|--------|-------|-------------|--------|--------|--------|-------|--------|
|    | MHz     | dBuV/m | Limit  | Line  | Level       | Factor | Loss   | Factor | cm    | deg    |
| 1  | 84.54   | 28.79  | -11.21 | 40.00 | 44.39       | 15.87  | 0.21   | 31.68  | 100   | 0 Peak |
| 2  | 135.30  | 26.62  | -16.88 | 43.50 | 39.99       | 17.81  | 0.30   | 31.48  | ---   | ---    |
| 3  | 165.81  | 23.28  | -20.22 | 43.50 | 37.46       | 16.91  | 0.35   | 31.44  | ---   | ---    |
| 4  | 282.72  | 26.92  | -19.08 | 46.00 | 39.73       | 17.66  | 0.56   | 31.03  | ---   | ---    |
| 5  | 599.60  | 29.95  | -16.05 | 46.00 | 33.61       | 24.34  | 0.90   | 28.90  | ---   | ---    |
| 6  | 883.10  | 41.93  |        |       | 39.90       | 27.46  | 1.59   | 27.02  | ---   | ---    |
| 7  | 935.60  | 31.70  | -14.30 | 46.00 | 28.44       | 28.16  | 1.71   | 26.61  | ---   | ---    |
| 8  | 2198.00 | 48.09  | -25.91 | 74.00 | 45.46       | 31.14  | 5.80   | 34.31  | ---   | ---    |
| 9  | 2814.00 | 49.11  | -24.89 | 74.00 | 41.83       | 32.14  | 2.76   | 27.62  | ---   | ---    |
| 10 | 2918.00 | 49.19  | -24.81 | 74.00 | 42.13       | 32.39  | 2.95   | 28.28  | ---   | ---    |
| 11 | 3042.00 | 48.00  | -26.00 | 74.00 | 40.83       | 32.75  | 3.79   | 29.37  | ---   | ---    |
| 12 | 3390.00 | 47.31  | -26.69 | 74.00 | 38.66       | 33.66  | 5.93   | 30.94  | ---   | ---    |
| 13 | 3723.00 | 47.75  | -26.25 | 74.00 | 38.46       | 34.37  | 6.34   | 31.42  | ---   | ---    |



|                 |                                                                                                                         |                     |          |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Test Mode :     | Mode 1                                                                                                                  | Temperature :       | 21~22°C  |
| Test Engineer : | Jason Peng                                                                                                              | Relative Humidity : | 41~42%   |
| Test Distance : | 3m                                                                                                                      | Polarization :      | Vertical |
| Function Type : | LTE Band 5 Idle + Bluetooth Idle + WLAN Idle + Earphone + USB Cable(Data Link with Notebook) + Battery + GPS Rx + SIM 1 |                     |          |
| Remark :        | #7 is system simulator signal which can be ignored.                                                                     |                     |          |

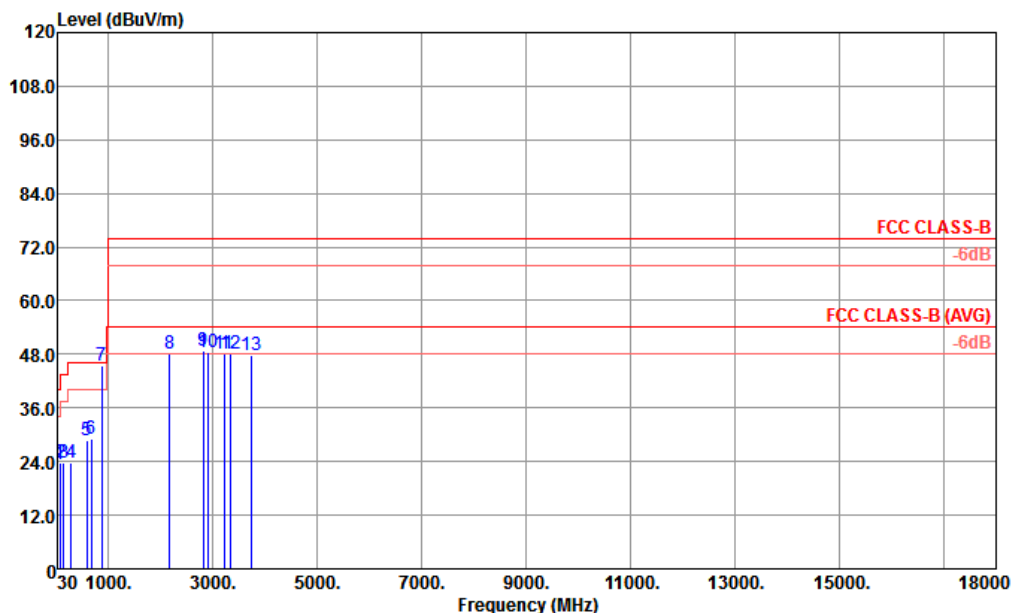

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL  
 Project : (FC)711809-01  
 Mode : 1  
 IMEI : 355649080004216 355649080004224 #5

|    | Freq    | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|---------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
|    | MHz     | dBuV/m | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB    | cm    | deg    |
| 1  | 84.54   | 23.49  | -16.51 | 40.00  | 39.09       | 15.87 | 0.21   | 31.68 | 100   | 0 Peak |
| 2  | 92.10   | 23.88  | -19.62 | 43.50  | 38.05       | 17.25 | 0.22   | 31.64 | ---   | ---    |
| 3  | 153.66  | 23.64  | -19.86 | 43.50  | 37.39       | 17.42 | 0.33   | 31.50 | ---   | ---    |
| 4  | 298.92  | 23.70  | -22.30 | 46.00  | 36.05       | 17.79 | 0.60   | 30.74 | ---   | ---    |
| 5  | 598.20  | 28.63  | -17.37 | 46.00  | 32.31       | 24.33 | 0.90   | 28.91 | ---   | ---    |
| 6  | 677.30  | 29.05  | -16.95 | 46.00  | 30.29       | 26.06 | 1.11   | 28.41 | ---   | ---    |
| 7  | 881.70  | 45.40  |        |        | 43.39       | 27.45 | 1.59   | 27.03 | ---   | ---    |
| 8  | 2180.00 | 48.10  | -25.90 | 74.00  | 45.73       | 31.08 | 5.65   | 34.36 | ---   | ---    |
| 9  | 2824.00 | 48.79  | -25.21 | 74.00  | 41.67       | 32.14 | 2.76   | 27.78 | ---   | ---    |
| 10 | 2902.00 | 48.38  | -25.62 | 74.00  | 41.36       | 32.35 | 2.95   | 28.28 | ---   | ---    |
| 11 | 3219.00 | 48.17  | -25.83 | 74.00  | 39.82       | 33.44 | 6.05   | 31.14 | ---   | ---    |
| 12 | 3333.00 | 48.28  | -25.72 | 74.00  | 39.69       | 33.58 | 5.97   | 30.96 | ---   | ---    |
| 13 | 3735.00 | 47.88  | -26.12 | 74.00  | 38.48       | 34.43 | 6.39   | 31.42 | ---   | ---    |



## 4. List of Measuring Equipment

| Instrument                           | Manufacturer | Model No. | Serial No.       | Characteristics            | Calibration Date | Test Date     | Due Date      | Remark                |
|--------------------------------------|--------------|-----------|------------------|----------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver                         | R&S          | ESCI7     | 100768           | 9kHz~7GHz                  | Apr. 29, 2016    | Mar. 17, 2017 | Apr. 28, 2017 | Conduction (CO01-KS)  |
| AC LISN                              | MessTec      | AN3016    | 060103           | 9kHz~30MHz                 | Oct. 13, 2016    | Mar. 17, 2017 | Oct. 12, 2017 | Conduction (CO01-KS)  |
| AC LISN<br>(for auxiliary equipment) | MessTec      | AN3016    | 060105           | 9kHz~30MHz                 | Oct. 13, 2016    | Mar. 17, 2017 | Oct. 12, 2017 | Conduction (CO01-KS)  |
| AC Power Source                      | Chroma       | 61602     | ABP0000008<br>11 | AC 0V~300V,<br>45Hz~1000Hz | Oct. 13, 2016    | Mar. 17, 2017 | Oct. 12, 2017 | Conduction (CO01-KS)  |
| EMI Test Receiver                    | R&S          | ESR7      | 101403           | 9kHz~7GHz;<br>Max 30dBm    | Aug. 09, 2016    | Mar. 10, 2017 | Aug. 08, 2017 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer                | Keysight     | N9010A    | MY55150208       | 10Hz~44GHz,<br>MAX 30dB    | Apr. 22, 2016    | Mar. 10, 2017 | Apr. 21, 2017 | Radiation (03CH02-KS) |
| Bilog Antenna                        | TeseQ        | CBL6112D  | 37879            | 30MHz~2GHz                 | Aug. 20, 2016    | Mar. 10, 2017 | Aug. 19, 2017 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna            | ETS-Lindgren | 3117      | 75957            | 1GHz~18GHz                 | Oct. 22, 2016    | Mar. 10, 2017 | Oct. 21, 2017 | Radiation (03CH02-KS) |
| Amplifier                            | com-power    | PA-103A   | 161069           | 1kHz~1000MHz<br>/ 32 dB    | Apr. 22, 2016    | Mar. 10, 2017 | Apr. 21, 2017 | Radiation (03CH02-KS) |
| Amplifier                            | Agilent      | 8449B     | 3008A02384       | 1-26.5GHz Gain<br>30dB     | Oct. 13, 2016    | Mar. 10, 2017 | Oct. 12, 2017 | Radiation (03CH02-KS) |
| AC Power Source                      | Chroma       | 61601     | 61601000247<br>3 | N/A                        | NCR              | Mar. 10, 2017 | NCR           | Radiation (03CH02-KS) |
| Turn Table                           | MF           | MF7802    | N/A              | 0~360 degree               | NCR              | Mar. 10, 2017 | NCR           | Radiation (03CH02-KS) |
| Antenna Mast                         | MF           | MF7802    | N/A              | 1 m~4 m                    | NCR              | Mar. 10, 2017 | NCR           | Radiation (03CH02-KS) |

NCR: No Calibration Required

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                          |       |
|--------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 2.3dB |
|--------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |       |
|--------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 5.2dB |
|--------------------------------------------------------------------------|-------|

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

|                                                                          |       |
|--------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 4.7dB |
|--------------------------------------------------------------------------|-------|