FCC RF Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	10745, 10746
FCC ID	:	IHDT56WH4
STANDARD	:	47 CFR Part 2, 22(H), 27(M)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Mar. 17, 2017 and completely tested on Apr. 27, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

James Huang

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.

No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China

TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 7
1.7 Re-use of Measured Data 8
1.8 Testing Location 9
1.9 Applicable Standards 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

2.1 Test Mode 10
2.2 Connection Diagram of Test System 12
2.3 Support Unit used in test configuration and system 12
2.4 Measurement Results Explanation Example 12
2.5 Frequency List of Low/Middle/High Channels 13

3 CONDUCTED TEST ITEMS 15

3.1 Measuring Instruments 15
3.2 Test Setup 15
3.3 Test Result of Conducted Test 15
3.4 Conducted Output Power and ERP/EIRP 16
3.5 Peak-to-Average Ratio 17
3.6 Occupied Bandwidth 18
3.7 Conducted Band Edge 19
3.8 Conducted Spurious Emission 21
3.9 Frequency Stability 22

4 RADIATED TEST ITEMS 23

4.1 Measuring Instruments 23
4.2 Test Setup 23
4.3 Test Result of Radiated Test 23
4.4 Radiated Spurious Emission 24

5 LIST OF MEASURING EQUIPMENT 25

6 UNCERTAINTY OF EVALUATION 26

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

APPENDIX D. REFERENCE REPORT

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG731705B	Rev. 01	Initial issue of report	May 31, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 26)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7) (Band 38) (Band 41)	EIRP < 2Watt	PASS	-
3.5	–	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 26)	< 43+10log10(P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38) (Band 41)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 26)	< 43+10log10(P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7) (Band 38)(Band 41)	< 55+10log$_{10}$(P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 26)	< 43+10log$_{10}$(P[Watts])	PASS	Under limit 31.39 dB at 10371.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7) (Band 38)(Band 41)	< 55+10log$_{10}$(P[Watts])		

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10745, 10746
FCC ID	IHDT56WH4
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+ (16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0 + EDR/ Bluetooth v4.0 LE/Bluetooth v4.1 LE
IMEI Code	Conducted: 355654080026813/355654080026821 Radiation: 355654080029738/355654080029742
HW Version	DVT2
SW Version	sanders_n-userdebug 7.1.1 NPS26.85 1826 intcfg.test-keys
EUT Stage	Identical Prototype

Remark: There are two types of EUT, sample 1 (model name: 10745) is dual SIM slot and sample 2 (model name: 10746) is single SIM slot. According to the difference, we choose sample 1 to perform full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 26 : 824.7MHz ~ 848.3 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2547.5 MHz ~ 2572.5 MHz
Rx Frequency	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 26 : 869.7MHz ~ 893.3MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2547.5 MHz ~ 2572.5 MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 7 : 23.75 dBm LTE Band 26 : 23.04 dBm LTE Band 38 : 23.19 dBm LTE Band 41 : 23.31 dBm
Antenna Gain	LTE Band 7 : -0.83 dBi LTE Band 26 : -4.15 dBi LTE Band 38 : -0.87 dBi LTE Band 41 : 0.38 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M50G7D	-	0.1941	4M49W7D	-	0.1641
10	2505.0 ~ 2565.0	9M07G7D	0.0032	0.1884	9M01W7D	-	0.1556
15	2507.5 ~ 2562.5	13M5G7D	-	0.1919	13M5W7D	-	0.1648
20	2510.0 ~ 2560.0	18M4G7D	-	0.1959	18M5W7D	-	0.1622
LTE Band 26		**QPSK**			**16QAM**		
BW (MHz)	**Frequency Range (MHz)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum ERP(W)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum ERP(W)**
1.4	824.7 ~ 848.3	1M10G7D	-	0.0470	1M10W7D	-	0.0381
3	825.5 ~ 847.5	2M73G7D	-	0.0468	2M72W7D	-	0.0397
5	826.5 ~ 846.5	4M51G7D	-	0.0472	4M49W7D	-	0.0386
10	829.0 ~ 844.0	8M97G7D	0.0117	0.0455	9M03W7D	-	0.0376
15	831.5 ~ 841.5	13M4G7D	-	0.0461	13M4W7D	-	0.0443
CH26765	821.5	13M4G7D	-	0.0522	13M5W7D	-	0.0406
LTE Band 38		**QPSK**			**16QAM**		
BW (MHz)	**Frequency Range (MHz)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum EIRP(W)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum EIRP(W)**
5	2572.5 ~ 2617.5	4M50G7D	-	0.1706	4M50W7D	-	0.1368
10	2575.0 ~ 2615.0	9M03G7D	0.0030	0.1679	9M03W7D	-	0.1346
15	2577.5 ~ 2612.5	13M4G7D	-	0.1702	13M5W7D	-	0.1368
20	2580.0 ~ 2610.0	18M5G7D	-	0.1694	18M5W7D	-	0.1355
LTE Band 41		**QPSK**			**16QAM**		
BW (MHz)	**Frequency Range (MHz)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum EIRP(W)**	**Emission Designator (99%OBW)**	**Frequency Tolerance (ppm)**	**Maximum EIRP(W)**
5	2547.5 ~ 2572.5	4M49G7D	-	0.2296	4M49W7D	-	0.1811
10	2550 ~ 2570	9M05G7D	0.0002	0.2296	8M99W7D	-	0.1816
15	2552.5 ~ 2567.5	13M5G7D	-	0.2328	13M4W7D	-	0.1837
20	2555 ~ 2565	18M5G7D	-	0.2339	18M5W7D	-	0.1849

1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10745, 10746, FCC ID: IHDT56WH4) is electrically identical to the reference device (Model: 10742, 10741, FCC ID: IHDT56WH2) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depopulation to enable support of different cellular bands, please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG731705-01B for the reference device Model: 10742, 10741, FCC ID: IHDT56WH2):

1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, Conducted Band-edge and Conducted spurious emission, the test result were consistent with FCC ID: IHDT56WH2. And re-test LTE Band 7 and added LTE Band 26/38/41 to full test.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.7.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE	IHDT56WH2	Part22H.24E.27L.27M.27H (FG731705-01B)	All sections applicable for LTE Band 5

1.8 Testing Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	**Sporton Site No.**		**FCC Registration No.**
	TH01-KS	03CH03-KS	306251

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 27(M)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	7	-	-				v	v	v	v		v	v	v	v
	26					v	-	v	v	v		v	v	v	v
	38	-	-				v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	7	-	-	v	v	v	v	v	v			v	v	v	v
	26	v	v	v	v	v	-	v	v			v	v	v	v
	38	-	-	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	7	-	-	v	v	v	v	v	v	v		v	v		v
	26	v	v	v	v	v	-	v	v	v		v	v		v
	38	-	-	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v		v	v		v

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	7	-	-	v	v	v	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v
Frequency Stability	7	-	-		v			v				v		v	
	26				v		-	v				v		v	
	38	-	-		v			v				v		v	
	41	-	-		v			v				v		v	
E.R.P./ E.I.R.P.	7	-	-	v	v	v	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v			v	v	v
	38	-	-	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	7	-	-	v	v	v	v	v		v				v	
	26	v	v	v	v	v	-	v		v				v	
	38	-	-	v	v	v	v	v		v				v	
	41	-	-	v	v	v	v	v		v				v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

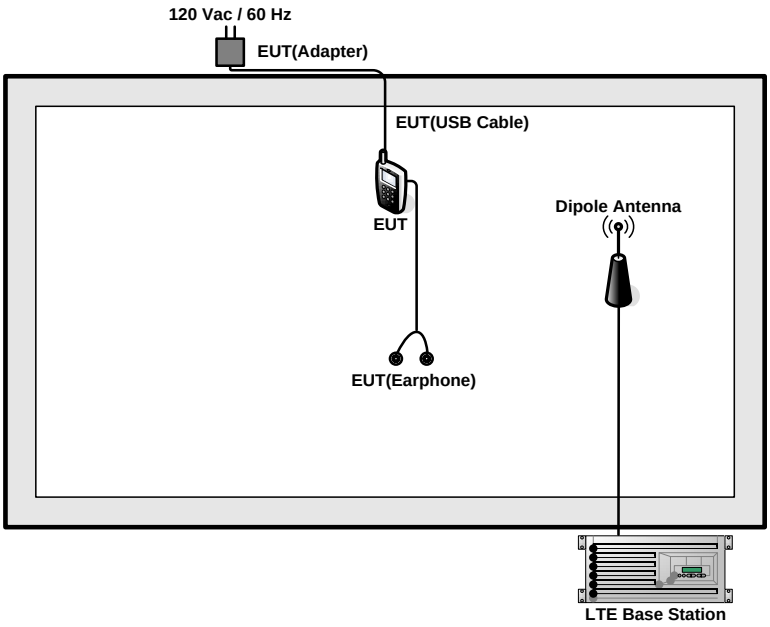

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.8 dB

Offset (dB) = RF cable loss (dB).

= 5.8 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40240	40290	40340
	Frequency	2555	2560	2565
15	Channel	40215	40290	40365
	Frequency	2552.5	2560	2567.5
10	Channel	40190	40290	40390
	Frequency	2550	2560	2570
5	Channel	40165	40290	40415
	Frequency	2547.5	2560	2572.5

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

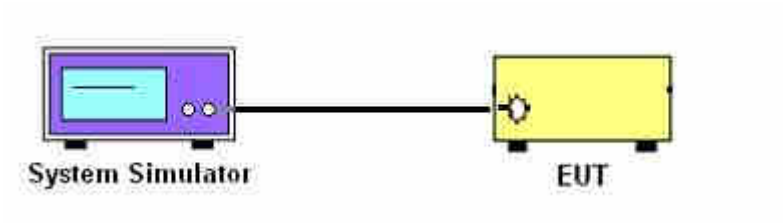

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

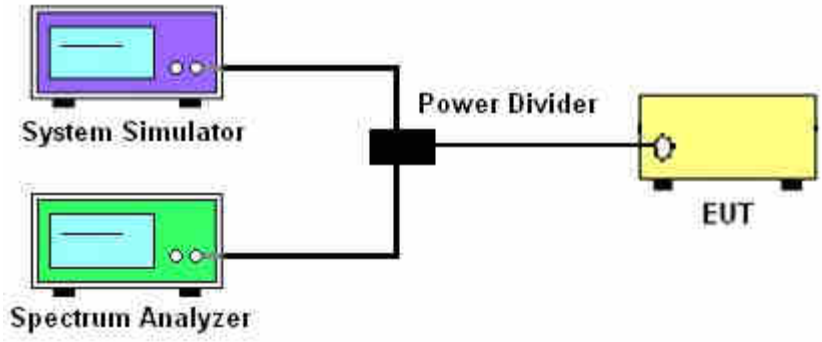

3.2.3 Frequency Stability

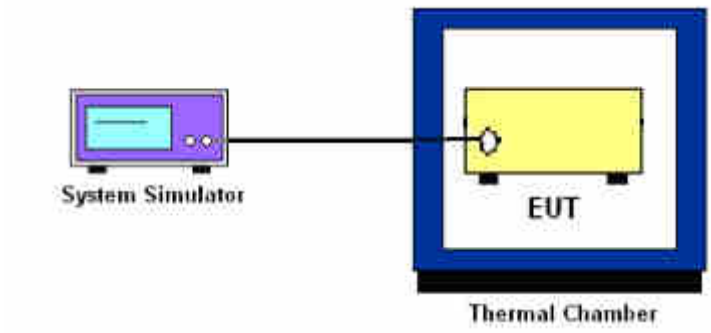

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 26.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 7 and Band 38 and Band 41.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.1 and 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 38/41. Duty factor =10 log (1/x), where x is the measured duty cycle.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

   Example:

   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

   = P(W)- [43 + 10log(P)] (dB)

   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.
10. For LTE Band 7, 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7,38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for LTE Band 38/41. Duty factor =10 log (1/x), where x is the measured duty cycle.
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
12. For Band 7, 38, 41
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [55+ 10log(P)] (dB)
    = [30+ 10log(P)] (dBm) - [55+ 10log(P)] (dB)
    = -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

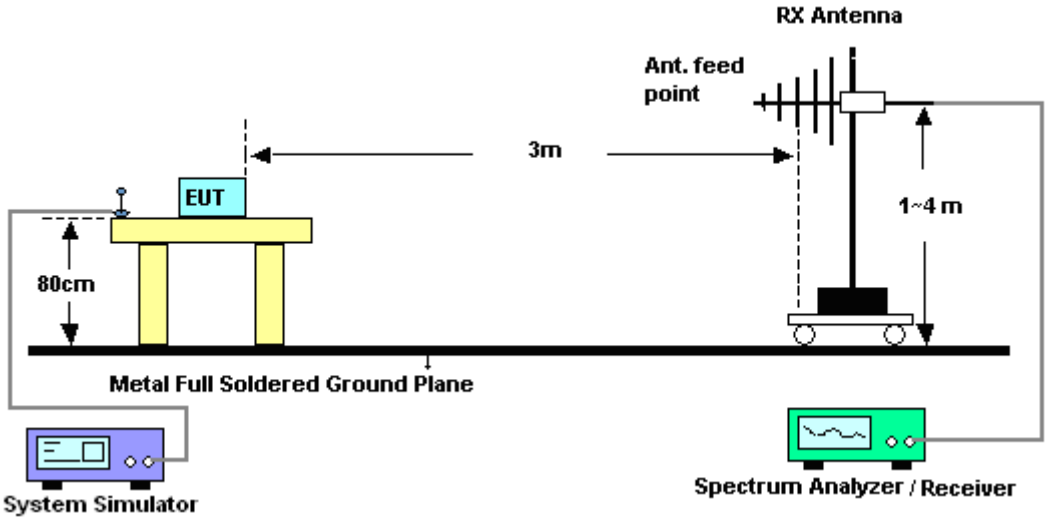

4.2.2 For radiated test above 1GHz

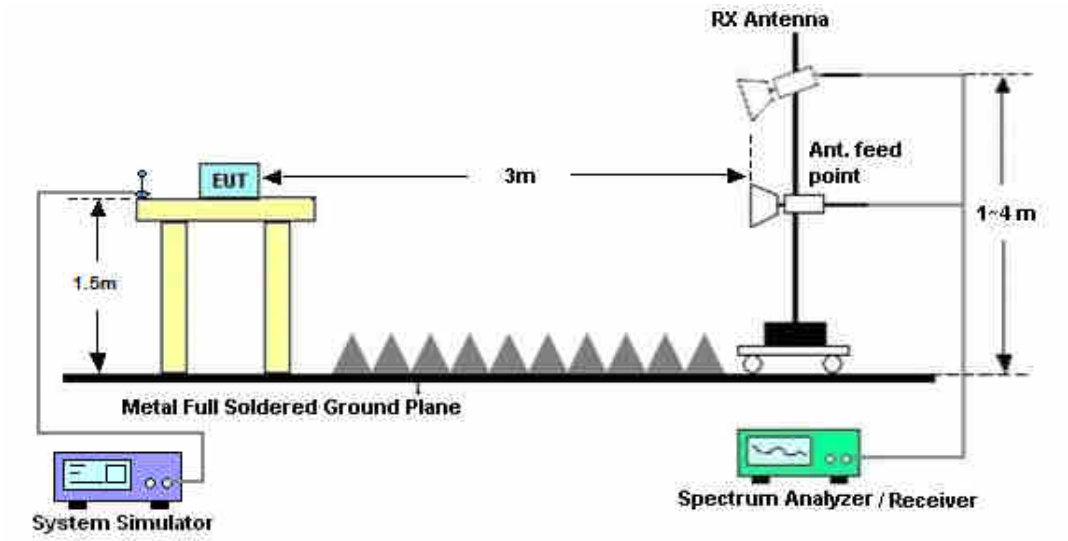

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7, 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
    The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
13. For Band 7, 38, 41:
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)
    EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
    ERP (dBm) = EIRP - 2.15

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Apr. 16, 2017~ Apr. 27, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Apr. 16, 2017~ Apr. 27, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Radio communication	Anritsu	MT8820C	6201300652	2G/3G/LTE Band	Aug. 08, 2016	Apr. 16, 2017~ Apr. 27, 2017	Aug. 07, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Apr. 18, 2017	Apr. 26, 2017~ Apr. 27, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Apr. 22, 2017	Apr. 26, 2017~ Apr. 27, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Apr. 26, 2017~ Apr. 27, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Apr. 26, 2017~ Apr. 27, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Apr. 26, 2017~ Apr. 27, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Apr. 26, 2017~ Apr. 27, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Oct. 13, 2016	Apr. 26, 2017~ Apr. 27, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 26, 2017~ Apr. 27, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 26, 2017~ Apr. 27, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 26, 2017~ Apr. 27, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.8dB**

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.3dB**

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.37	23.69	23.57
20	1	49		23.30	23.69	23.40
20	1	99		23.70	23.75	23.74
20	50	0		22.46	22.73	22.95
20	50	24		22.43	22.86	22.89
20	50	50		22.66	22.82	22.93
20	100	0		22.55	22.77	22.89
20	1	0	16-QAM	22.09	22.45	22.03
20	1	49		22.36	22.82	22.80
20	1	99		22.15	22.93	22.36
20	50	0		21.40	21.74	21.81
20	50	24		21.43	21.87	21.94
20	50	50		21.68	21.72	21.86
20	100	0		21.53	21.82	21.83
15	1	0	QPSK	22.78	23.57	23.18
15	1	37		23.03	23.66	23.30
15	1	74		23.27	23.66	23.47
15	36	0		22.44	23.04	22.84
15	36	20		22.38	22.92	22.88
15	36	39		22.57	23.12	22.91
15	75	0		22.49	22.80	22.89
15	1	0	16-QAM	22.26	22.92	22.90
15	1	37		22.41	22.90	22.75
15	1	74		22.53	22.91	23.00
15	36	0		21.38	21.77	21.91
15	36	20		21.34	21.82	21.96
15	36	39		21.55	21.86	21.86
15	75	0		21.52	22.17	22.07

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.92	23.29	23.35
10	1	25		23.03	23.58	23.34
10	1	49		22.66	23.11	23.15
10	25	0		22.37	22.77	22.80
10	25	12		22.52	22.88	22.87
10	25	25		22.39	22.83	22.88
10	50	0		22.33	22.77	22.92
10	1	0	16-QAM	22.28	22.68	22.74
10	1	25		22.28	22.70	22.52
10	1	49		22.28	22.61	22.75
10	25	0		21.31	21.82	22.02
10	25	12		21.58	22.37	22.12
10	25	25		21.55	21.91	22.01
10	50	0		21.34	21.77	21.92
5	1	0	QPSK	22.77	22.88	22.90
5	1	12		22.75	23.54	23.71
5	1	24		22.32	23.03	23.05
5	12	0		22.30	22.77	22.92
5	12	7		22.39	22.86	22.80
5	12	13		22.34	22.84	22.79
5	25	0		22.30	22.80	22.77
5	1	0	16-QAM	22.23	22.61	22.97
5	1	12		22.23	22.97	22.98
5	1	24		22.39	22.92	22.69
5	12	0		21.59	21.69	21.91
5	12	7		21.09	21.99	22.11
5	12	13		21.30	21.88	21.81
5	25	0		21.17	21.91	22.03

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.78	22.63	22.91
15	1	37		22.76	22.84	22.94
15	1	74		22.86	22.72	22.70
15	36	0		21.86	21.89	21.86
15	36	20		21.81	21.82	22.01
15	36	39		21.93	21.86	22.00
15	75	0		21.81	21.85	21.83
15	1	0	16-QAM	21.67	21.67	21.75
15	1	37		21.29	22.01	22.18
15	1	74		21.83	21.73	21.78
15	36	0		20.79	20.85	21.01
15	36	20		20.78	20.87	21.06
15	36	39		20.82	20.79	21.04
15	75	0		20.87	20.90	20.97
10	1	0	QPSK	22.64	22.78	22.82
10	1	25		22.61	22.67	22.67
10	1	49		22.85	22.88	22.63
10	25	0		21.94	21.94	22.00
10	25	12		21.84	21.87	21.93
10	25	25		21.87	21.86	22.02
10	50	0		21.93	21.88	21.98
10	1	0	16-QAM	22.11	21.58	21.83
10	1	25		22.05	21.75	21.84
10	1	49		21.67	21.81	21.82
10	25	0		20.97	20.97	20.86
10	25	12		20.98	21.01	20.99
10	25	25		20.91	20.88	21.07
10	50	0		21.00	20.99	20.98

LTE Band 26 Maximum Average Power [dBm]						
5	1	0	QPSK	22.75	22.74	22.87
5	1	12		22.82	22.99	23.04
5	1	24		22.63	22.74	22.53
5	12	0		21.86	21.83	22.04
5	12	7		21.88	21.86	21.96
5	12	13		21.83	21.86	22.00
5	25	0		21.89	21.88	21.98
5	1	0	16-QAM	21.64	21.57	21.66
5	1	12		21.89	22.01	22.17
5	1	24		21.57	21.69	21.55
5	12	0		20.71	20.79	20.80
5	12	7		20.66	20.82	20.80
5	12	13		20.67	20.81	20.85
5	25	0		21.06	20.94	20.84
3	1	0	QPSK	22.82	22.92	22.98
3	1	8		23.00	22.99	22.81
3	1	14		22.95	22.80	22.57
3	8	0		21.81	21.83	21.94
3	8	4		21.89	21.99	21.95
3	8	7		21.84	21.88	22.02
3	15	0		21.89	21.88	21.99
3	1	0	16-QAM	21.60	21.59	22.29
3	1	8		21.69	21.74	21.53
3	1	14		21.64	22.09	21.78
3	8	0		21.01	20.98	20.73
3	8	4		20.89	21.00	20.75
3	8	7		20.86	21.05	20.76
3	15	0		20.94	21.00	20.96

LTE Band 26 Maximum Average Power [dBm]						
1.4	1	0	QPSK	22.81	22.74	22.74
1.4	1	3		22.88	22.84	22.89
1.4	1	5		22.67	22.85	22.65
1.4	3	0		22.87	22.86	22.84
1.4	3	1		22.87	22.83	22.96
1.4	3	3		22.84	22.77	23.02
1.4	6	0		21.89	21.86	21.86
1.4	1	0	16-QAM	21.70	22.06	21.83
1.4	1	3		21.70	21.74	21.79
1.4	1	5		21.68	21.72	21.74
1.4	3	0		21.76	21.76	21.83
1.4	3	1		21.89	21.66	21.84
1.4	3	3		22.11	21.64	21.93
1.4	6	0		21.02	20.67	20.77

LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.16	22.86	22.89
20	1	49		23.15	22.85	22.85
20	1	99		22.97	22.77	22.73
20	50	0		22.28	22.10	21.97
20	50	24		22.24	22.03	21.93
20	50	50		22.21	22.02	21.92
20	100	0		22.21	22.05	21.93
20	1	0	16-QAM	22.10	21.69	21.50
20	1	49		22.19	21.76	21.52
20	1	99		22.00	21.38	21.48
20	50	0		21.14	20.96	20.76
20	50	24		21.12	21.01	21.02
20	50	50		21.07	20.78	21.01
20	100	0		21.08	20.95	20.91
15	1	0	QPSK	23.00	22.87	22.62
15	1	37		23.18	22.79	22.72
15	1	74		23.00	22.80	22.83
15	36	0		22.26	22.06	21.91
15	36	20		22.28	22.06	21.94
15	36	39		22.07	21.95	21.88
15	75	0		22.23	22.06	21.87
15	1	0	16-QAM	22.23	21.78	21.86
15	1	37		22.20	21.49	21.95
15	1	74		21.94	21.50	21.97
15	36	0		21.29	20.96	20.91
15	36	20		21.29	20.88	20.84
15	36	39		21.24	20.77	20.91
15	75	0		21.21	21.05	21.06

LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.12	22.86	22.69
10	1	25		22.99	22.94	22.58
10	1	49		23.07	22.95	22.77
10	25	0		22.21	21.95	21.83
10	25	12		22.26	21.99	21.94
10	25	25		22.24	21.94	21.90
10	50	0		22.28	22.01	21.86
10	1	0	16-QAM	22.16	21.57	21.42
10	1	25		21.81	21.54	21.54
10	1	49		21.66	21.44	21.36
10	25	0		21.19	20.94	21.13
10	25	12		21.24	20.87	21.15
10	25	25		21.12	20.81	21.09
10	50	0		21.27	21.00	20.94
5	1	0	QPSK	23.00	22.56	22.52
5	1	12		23.19	22.80	22.66
5	1	24		22.89	22.69	22.72
5	12	0		22.30	22.00	21.80
5	12	7		22.22	22.04	21.87
5	12	13		22.28	22.00	21.91
5	25	0		22.24	22.00	21.86
5	1	0	16-QAM	22.10	21.79	21.66
5	1	12		22.23	21.94	21.79
5	1	24		21.64	21.70	21.26
5	12	0		21.12	20.81	20.85
5	12	7		21.16	20.87	20.69
5	12	13		21.09	20.82	20.81
5	25	0		21.37	20.87	21.06

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.09	23.15	23.06
20	1	49		23.15	23.31	23.23
20	1	99		23.02	23.19	23.11
20	50	0		22.20	22.29	22.27
20	50	24		22.21	22.29	22.29
20	50	50		22.30	22.34	22.17
20	100	0		22.21	22.27	22.16
20	1	0	16-QAM	21.60	22.03	21.78
20	1	49		21.83	22.28	22.29
20	1	99		21.57	22.16	22.23
20	50	0		21.10	21.27	21.18
20	50	24		21.13	20.98	21.07
20	50	50		21.14	21.20	20.94
20	100	0		21.14	21.08	21.06
15	1	0	QPSK	23.11	23.08	23.12
15	1	37		23.12	23.29	23.23
15	1	74		23.28	23.14	23.21
15	36	0		22.18	22.17	22.25
15	36	20		22.07	22.20	22.18
15	36	39		22.24	22.17	22.13
15	75	0		22.20	22.22	22.18
15	1	0	16-QAM	21.95	21.78	22.13
15	1	37		22.21	21.74	22.15
15	1	74		21.74	21.64	22.26
15	36	0		21.12	21.12	20.95
15	36	20		21.10	21.00	21.11
15	36	39		21.13	21.13	21.08
15	75	0		21.20	21.34	21.03

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.96	23.13	23.10
10	1	25		22.98	23.15	23.23
10	1	49		23.07	23.08	23.06
10	25	0		22.16	22.26	22.13
10	25	12		22.09	22.27	22.17
10	25	25		22.14	22.34	22.18
10	50	0		22.17	22.36	22.14
10	1	0	16-QAM	21.90	22.04	21.64
10	1	25		21.68	22.21	21.70
10	1	49		22.01	22.21	22.18
10	25	0		20.96	21.42	20.96
10	25	12		21.31	21.50	20.95
10	25	25		21.09	21.34	20.98
10	50	0		21.09	21.26	21.04
5	1	0	QPSK	22.80	23.03	22.87
5	1	12		23.22	23.05	23.23
5	1	24		22.79	23.04	22.98
5	12	0		22.00	22.12	22.05
5	12	7		22.04	22.13	22.15
5	12	13		22.10	22.20	22.23
5	25	0		22.10	22.19	22.12
5	1	0	16-QAM	21.53	22.04	21.89
5	1	12		21.94	22.20	22.14
5	1	24		21.58	21.52	21.94
5	12	0		20.98	21.08	20.77
5	12	7		20.98	20.96	20.89
5	12	13		20.95	20.93	20.90
5	25	0		20.91	21.32	20.97

ERP/EIRP

LTE Band 7 (G_T - L_C = -0.83 dB) QPSK			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5
Conducted Power (dBm)	22.75	23.54	23.71
Conducted Power (Watts)	0.1884	0.2259	0.2350
EIRP(dBm)	21.92	22.71	22.88
EIRP(Watts)	0.1556	0.1866	0.1941

LTE Band 7 (G_T - L_C = -0.83 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
Conducted Power (dBm)	23.03	23.58	23.34	23.03	23.66	23.30	23.70	23.75	23.74
Conducted Power (Watts)	0.2009	0.2280	0.2158	0.2009	0.2323	0.2138	0.2344	0.2371	0.2366
EIRP(dBm)	22.20	22.75	22.51	22.20	22.83	22.47	22.87	22.92	22.91
EIRP(Watts)	0.1660	0.1884	0.1782	0.1660	0.1919	0.1766	0.1936	0.1959	0.1954

LTE Band 7 (G_T - L_C = -0.83 dB) 16QAM			
Bandwidth	5M		
Channel	20775	21100	21425
	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5
Conducted Power (dBm)	22.23	22.97	22.98
Conducted Power (Watts)	0.1671	0.1982	0.1986
EIRP(dBm)	21.40	22.14	22.15
EIRP(Watts)	0.1380	0.1637	0.1641

LTE Band 7 (G_T - L_C = -0.83 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20800	21100	21400	20825	21100	21375	20850	21100	21350
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2505	2535	2565	2507.5	2535	2562.5	2510	2535	2560
Conducted Power (dBm)	22.28	22.61	22.75	22.53	22.91	23.00	22.15	22.93	22.36
Conducted Power (Watts)	0.1690	0.1824	0.1884	0.1791	0.1954	0.1995	0.1641	0.1963	0.1722
EIRP(dBm)	21.45	21.78	21.92	21.70	22.08	22.17	21.32	22.10	21.53
EIRP(Watts)	0.1396	0.1507	0.1556	0.1479	0.1614	0.1648	0.1355	0.1622	0.1422

LTE Band 26 (G_T - L_C = -4.15 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	26797	26915	27033	26805	26915	27025	26815	26915	27015
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.84	22.77	23.02	23.00	22.99	22.81	22.82	22.99	23.04
Conducted Power (Watts)	0.1923	0.1892	0.2004	0.1995	0.1991	0.1910	0.1914	0.1991	0.2014
ERP(dBm)	16.54	16.47	16.72	16.70	16.69	16.51	16.52	16.69	16.74
ERP(Watts)	0.0451	0.0444	0.0470	0.0468	0.0467	0.0448	0.0449	0.0467	0.0472

LTE Band 26 (G_T - L_C = -4.15 dB) QPSK							
Bandwidth	10M			15M			15M
Channel	26840	26915	26990	26865	26915	26965	26765
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)
Frequency (MHz)	829	836.5	844	831.5	836.5	841.5	821.5
Conducted Power (dBm)	22.85	22.88	22.63	22.76	22.84	22.94	23.48
Conducted Power (Watts)	0.1928	0.1941	0.1832	0.1888	0.1923	0.1968	0.2228
ERP(dBm)	16.55	16.58	16.33	16.46	16.54	16.64	17.18
ERP(Watts)	0.0452	0.0455	0.0430	0.0443	0.0451	0.0461	0.0522

LTE Band 26 (G_T - L_C = -4.15 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	26797	26915	27033	26805	26915	27025	26815	26915	27015
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.11	21.64	21.93	21.60	21.59	22.29	21.89	22.01	22.17
Conducted Power (Watts)	0.1626	0.1459	0.1560	0.1445	0.1442	0.1694	0.1545	0.1589	0.1648
ERP(dBm)	15.81	15.34	15.63	15.30	15.29	15.99	15.59	15.71	15.87
ERP(Watts)	0.0381	0.0342	0.0366	0.0339	0.0338	0.0397	0.0362	0.0372	0.0386

LTE Band 26 (G_T - L_C = -4.15 dB) 16QAM							
Bandwidth	10M			15M			15M
Channel	26840	26915	26990	26865	26915	26965	26765
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)
Frequency (MHz)	829	836.5	844	831.5	836.5	841.5	821.5
Conducted Power (dBm)	22.05	21.75	21.84	21.29	22.01	22.18	22.39
Conducted Power (Watts)	0.1603	0.1496	0.1528	0.1346	0.1589	0.1652	0.1734
ERP(dBm)	15.75	15.45	15.54	16.46	15.71	15.88	16.09
ERP(Watts)	0.0376	0.0351	0.0358	0.0443	0.0372	0.0387	0.0406

LTE Band 38 (G_T - L_C = -0.87 dB) QPSK			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency (MHz)	2572.5	2595	2617.5
Conducted Power (dBm)	23.19	22.80	22.66
Conducted Power (Watts)	0.2084	0.1905	0.1845
EIRP(dBm)	22.32	21.93	21.79
EIRP(Watts)	0.1706	0.1560	0.1510

LTE Band 38 (G_T - L_C = -0.87 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
Conducted Power (dBm)	23.12	22.86	22.69	23.18	22.79	22.72	23.16	22.86	22.89
Conducted Power (Watts)	0.2051	0.1932	0.1858	0.2080	0.1901	0.1871	0.2070	0.1932	0.1945
EIRP(dBm)	22.25	21.99	21.82	22.31	21.92	21.85	22.29	21.99	22.02
EIRP(Watts)	0.1679	0.1581	0.1521	0.1702	0.1556	0.1531	0.1694	0.1581	0.1592

LTE Band 38 (G_T - L_C = -0.87 dB) 16QAM			
Bandwidth	5M		
Channel	37775	38000	38225
	(Low)	(Mid)	(High)
Frequency (MHz)	2572.5	2595	2617.5
Conducted Power (dBm)	22.23	21.94	21.79
Conducted Power (Watts)	0.1671	0.1563	0.1510
EIRP(dBm)	21.36	21.07	20.92
EIRP(Watts)	0.1368	0.1279	0.1236

LTE Band 38 (G_T - L_C = -0.87 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	37800	38000	38200	37825	38000	38175	37850	38000	38150
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	2575	2595	2615	2577.5	2595	2612.5	2580	2595	2610
Conducted Power (dBm)	22.16	21.57	21.42	22.23	21.78	21.86	22.19	21.76	21.52
Conducted Power (Watts)	0.1644	0.1435	0.1387	0.1671	0.1507	0.1535	0.1656	0.1500	0.1419
EIRP(dBm)	21.29	20.70	20.55	21.36	20.91	20.99	21.32	20.89	20.65
EIRP(Watts)	0.1346	0.1175	0.1135	0.1368	0.1233	0.1256	0.1355	0.1227	0.1161

LTE Band 41 (G_T - L_C = 0.38 dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	40165	40290	40415	40190	40290	40390	40215	40290	40365
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2547.5	2560	2572.5	2550	2560	2570	2552.5	2560	2567.5
Conducted Power (dBm)	23.22	23.05	23.23	22.98	23.15	23.23	23.12	23.29	23.23
Conducted Power (Watts)	0.2099	0.2018	0.2104	0.1986	0.2065	0.2104	0.2051	0.2133	0.2104
EIRP(dBm)	23.60	23.43	23.61	23.36	23.53	23.61	23.50	23.67	23.61
EIRP(Watts)	0.2291	0.2203	0.2296	0.2168	0.2254	0.2296	0.2239	0.2328	0.2296

LTE Band 41 (G_T - L_C = 0.38 dB) QPSK			
Bandwidth	20M		
Channel	40240	40290	40340
	(Low)	(Mid)	(High)
Frequency (MHz)	2555	2560	2565
Conducted Power (dBm)	23.15	23.31	23.23
Conducted Power (Watts)	0.2065	0.2143	0.2104
EIRP(dBm)	23.53	23.69	23.61
EIRP(Watts)	0.2254	0.2339	0.2296

LTE Band 41 (G_T - L_C = 0.38 dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	40165	40290	40415	40190	40290	40390	40215	40290	40365
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2547.5	2560	2572.5	2550	2560	2570	2552.5	2560	2567.5
Conducted Power (dBm)	21.94	22.20	22.14	22.01	22.21	22.18	21.74	21.64	22.26
Conducted Power (Watts)	0.1563	0.1660	0.1637	0.1589	0.1663	0.1652	0.1493	0.1459	0.1683
EIRP(dBm)	22.32	22.58	22.52	22.39	22.59	22.56	22.12	22.02	22.64
EIRP(Watts)	0.1706	0.1811	0.1786	0.1734	0.1816	0.1803	0.1629	0.1592	0.1837

LTE Band 41 (G_T - L_C = 0.38 dB) 16QAM			
Bandwidth	20M		
Channel	40240	40290	40340
	(Low)	(Mid)	(High)
Frequency (MHz)	2555	2560	2565
Conducted Power (dBm)	21.83	22.28	22.29
Conducted Power (Watts)	0.1524	0.1690	0.1694
EIRP(dBm)	22.21	22.66	22.67
EIRP(Watts)	0.1663	0.1845	0.1849

Peak-to-Average Ratio

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.07	4.64	3.97	5.65	PASS
Middle CH	3.13	4.49	3.86	5.48	
Highest CH	3.07	4.26	4.06	5.33	

Mode	LTE Band 26 / 15MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.45	4.43	4.2	5.42	PASS
Middle CH	3.28	4.49	4	5.48	
Highest CH	3.42	4.43	4.41	5.45	

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.67	5.07	5.65	6.09	PASS
Middle CH	4.81	5.04	5.68	6.17	
Highest CH	5.22	5.51	6.03	6.26	

Mode	LTE Band 41 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.38	6.14	5.71	6.14	PASS
Middle CH	5.74	5.54	6.09	6.17	
Highest CH	4.67	5.57	5.91	6.32	

LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB

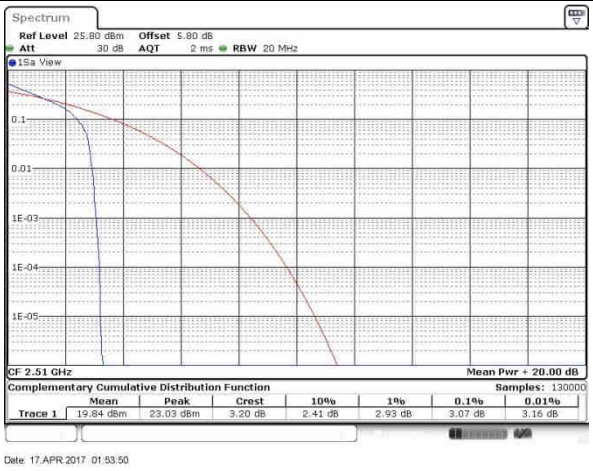

Lowest Channel / Full RB

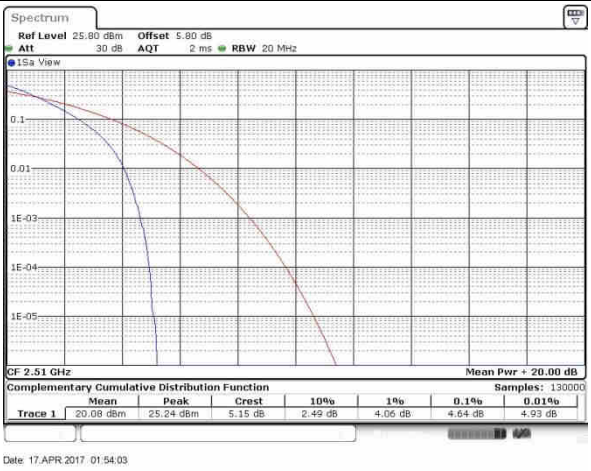

Middle Channel / 1RB

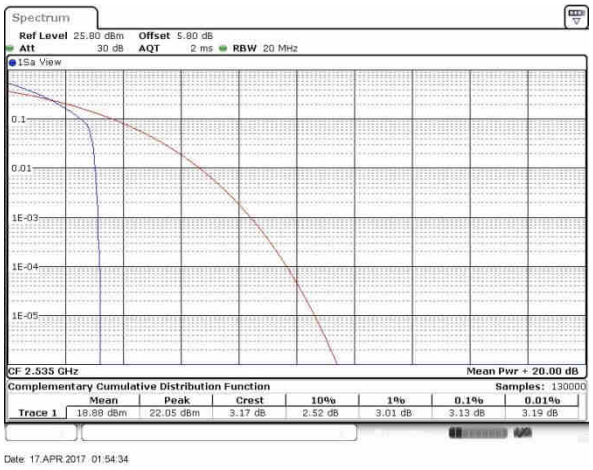

Middle Channel / Full RB

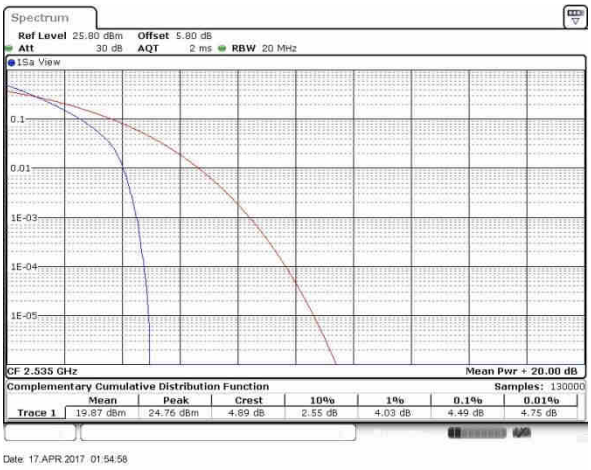

Highest Channel / 1RB

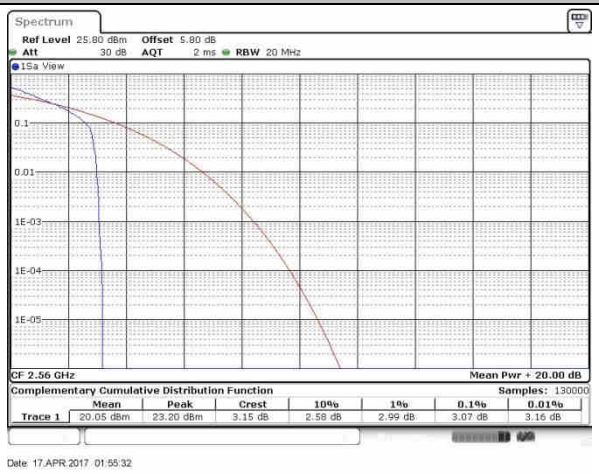

Highest Channel / Full RB

LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB

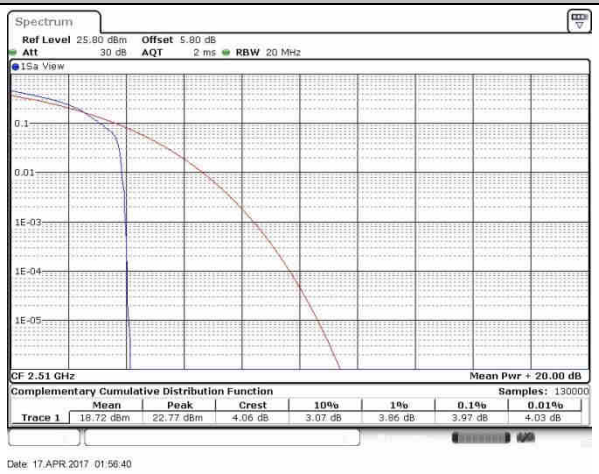

Lowest Channel / Full RB

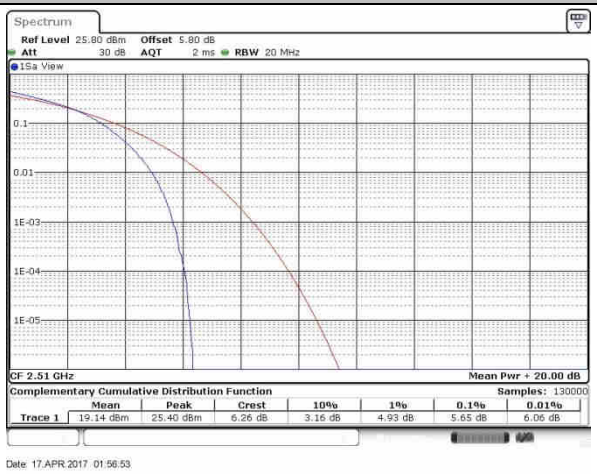

Middle Channel / 1RB

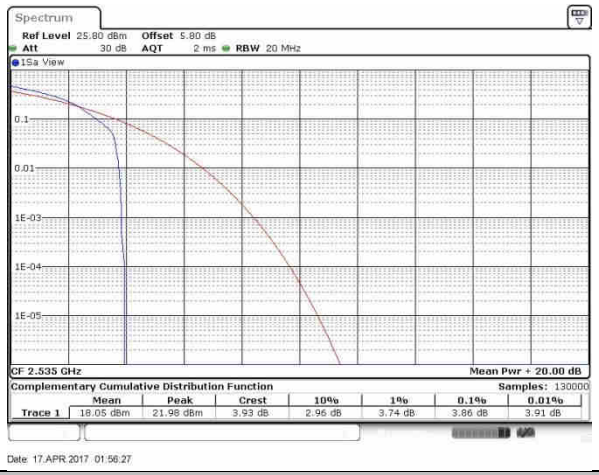

Middle Channel / Full RB

Highest Channel / 1RB

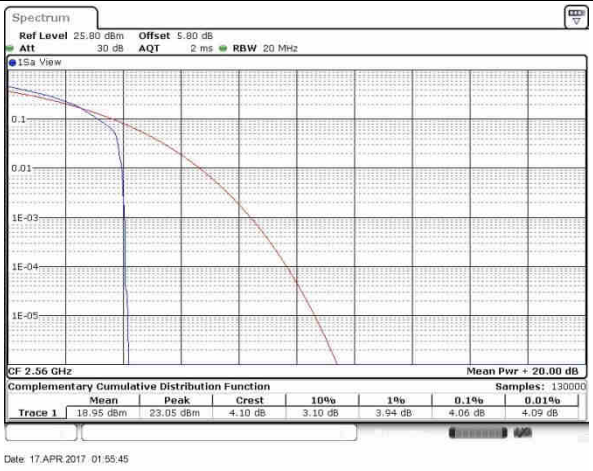

Highest Channel / Full RB

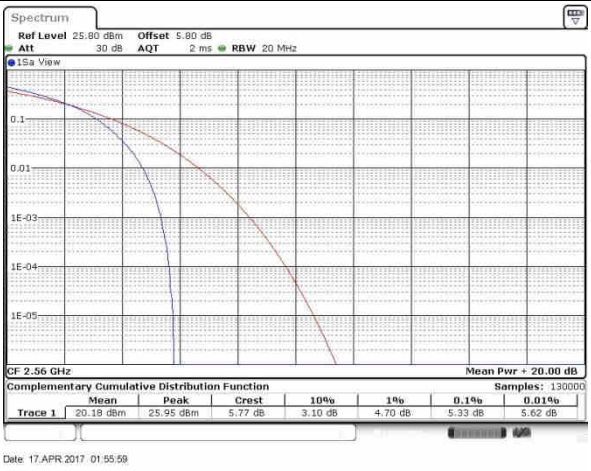

LTE Band 26 / 15MHz / QPSK

Lowest Channel / 1RB

Lowest Channel / Full RB

Middle Channel / 1RB

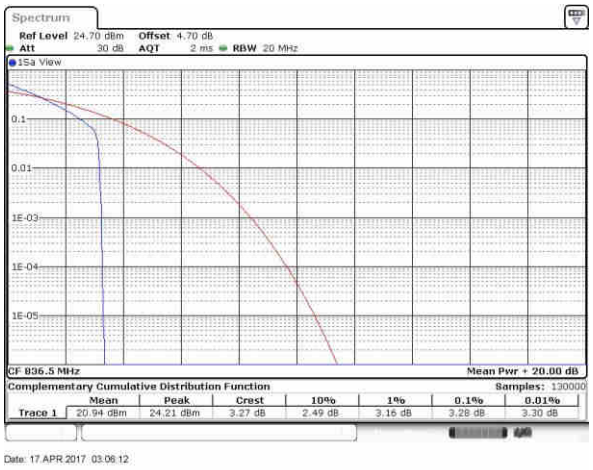

Middle Channel / Full RB

Highest Channel / 1RB

Highest Channel / Full RB

LTE Band 26 / 15MHz / 16QAM

Lowest Channel / 1RB

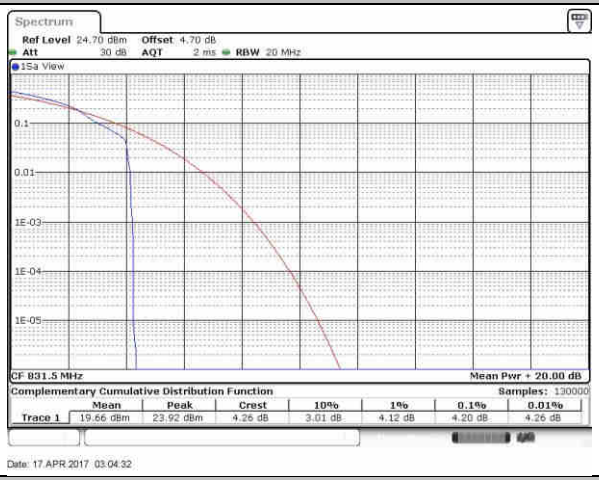

Lowest Channel / Full RB

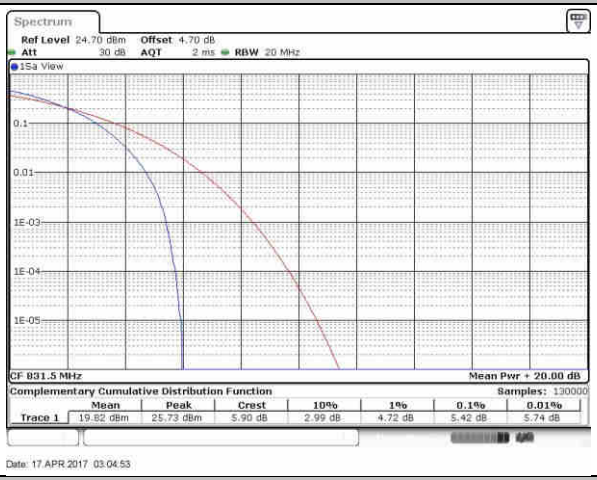

Middle Channel / 1RB

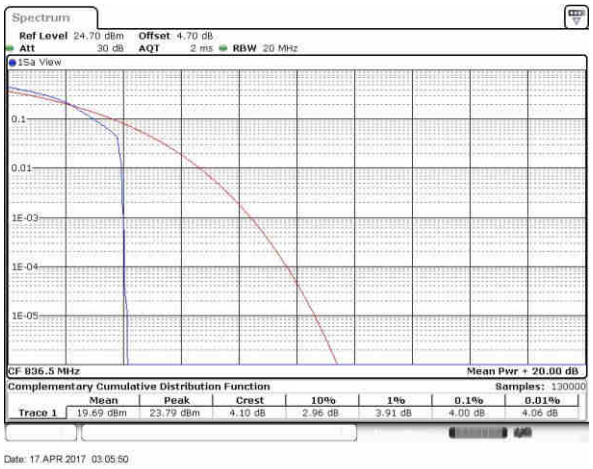

Middle Channel / Full RB

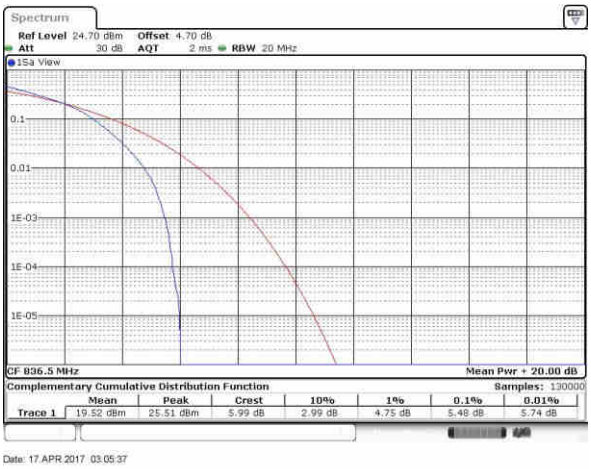

Highest Channel / 1RB

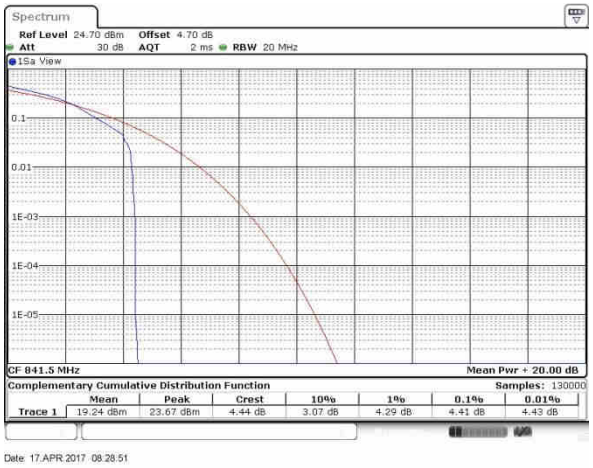

Highest Channel / Full RB

LTE Band 38 / 20MHz / QPSK

Lowest Channel / 1RB

Lowest Channel / Full RB

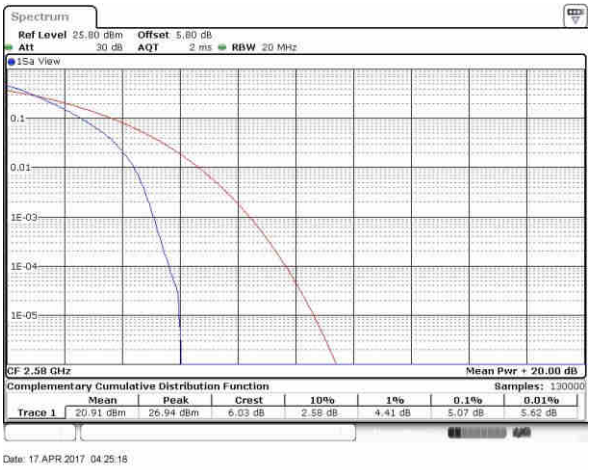

Middle Channel / 1RB

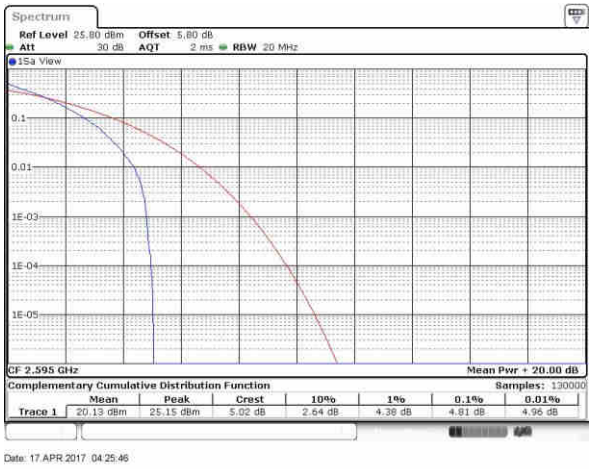

Middle Channel / Full RB

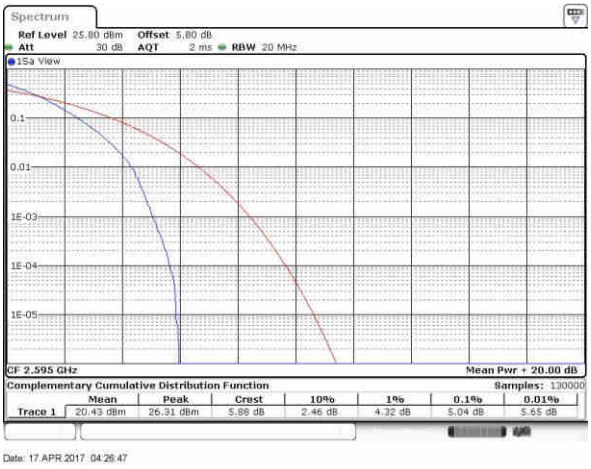

Highest Channel / 1RB

Highest Channel / Full RB

LTE Band 38 / 20MHz / 16QAM

Lowest Channel / 1RB

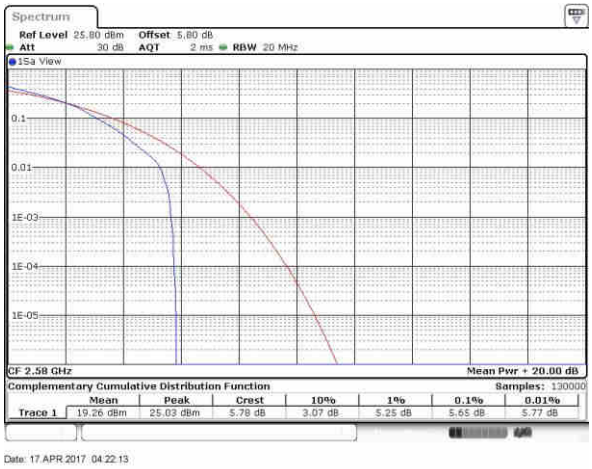

Lowest Channel / Full RB

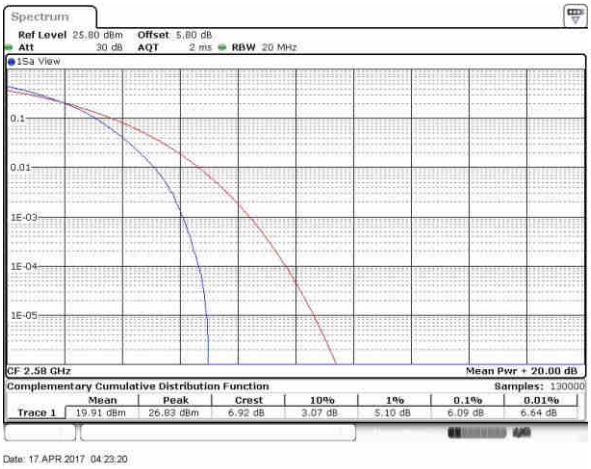

Middle Channel / 1RB

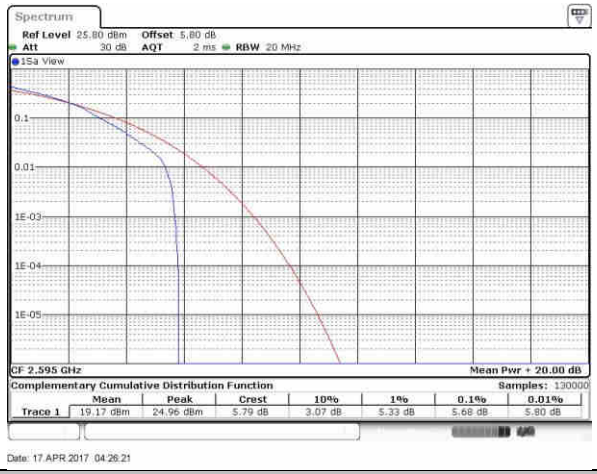

Middle Channel / Full RB

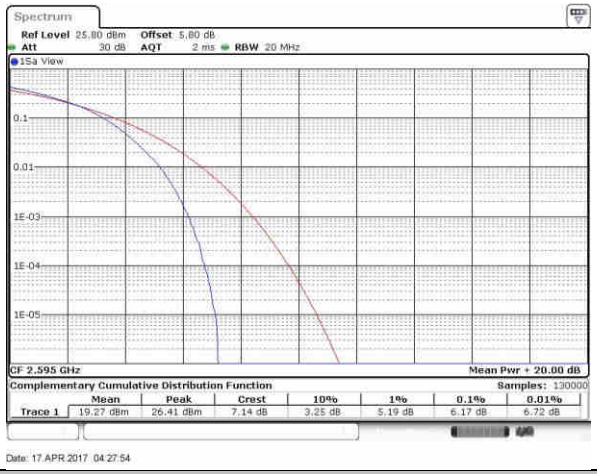

Highest Channel / 1RB

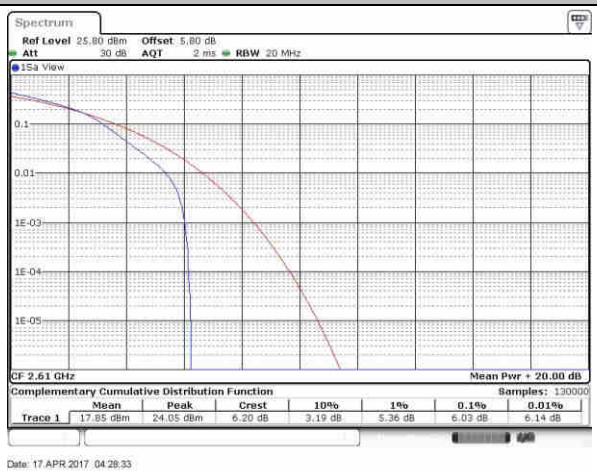

Highest Channel / Full RB

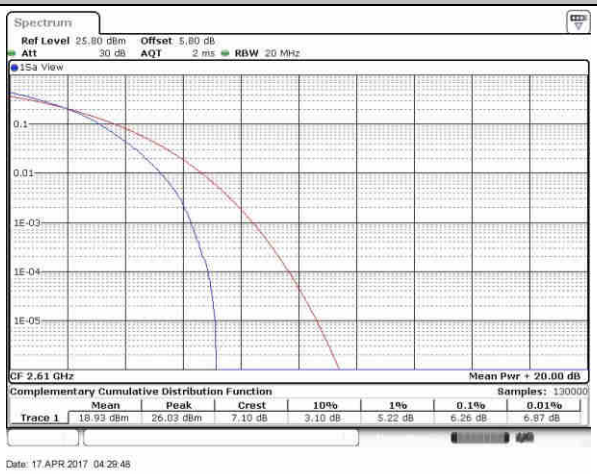

LTE Band 41 / 20MHz / QPSK

Lowest Channel / 1RB

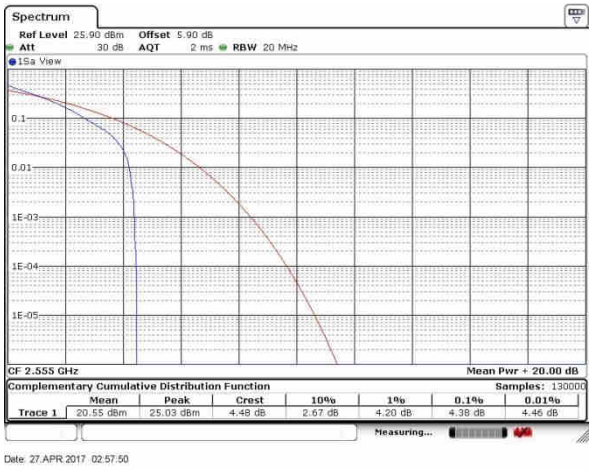

Lowest Channel / Full RB

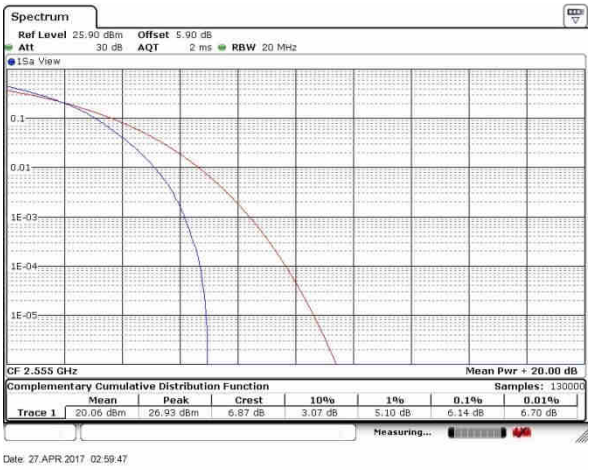

Middle Channel / 1RB

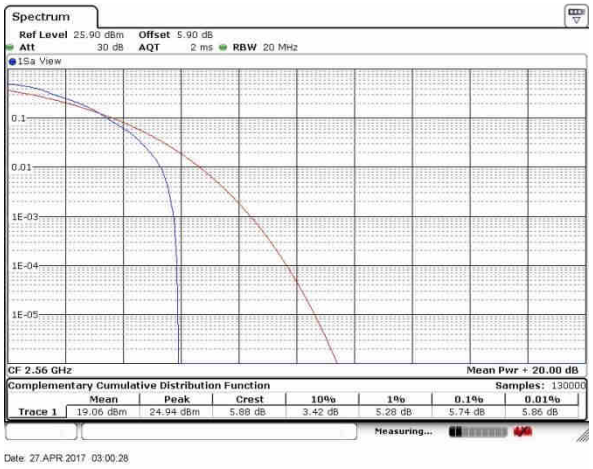

Middle Channel / Full RB

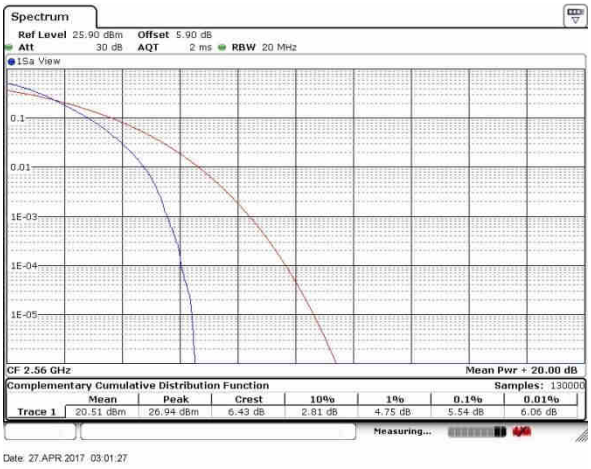

Highest Channel / 1RB

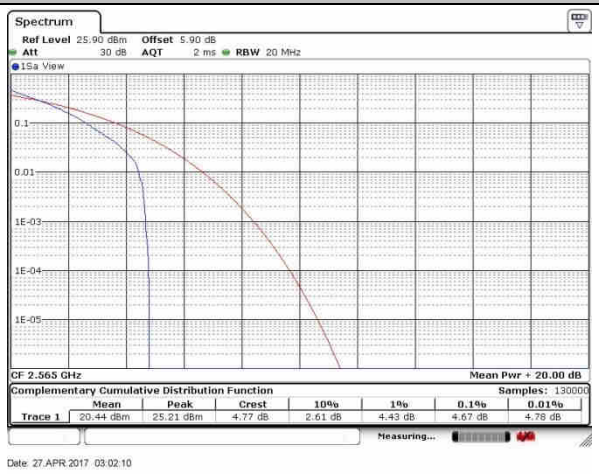

Highest Channel / Full RB

LTE Band 41 / 20MHz / 16QAM

Lowest Channel / 1RB

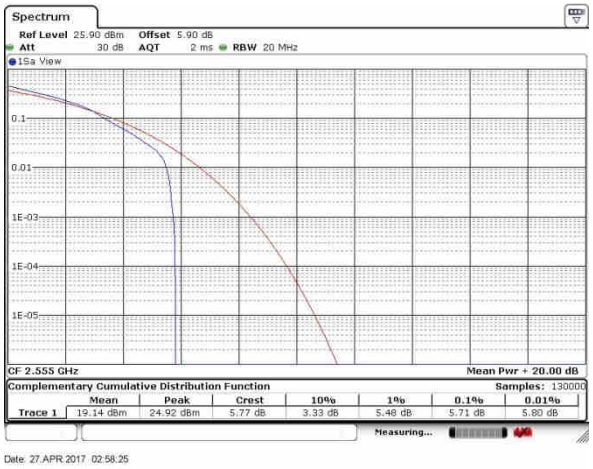

Lowest Channel / Full RB

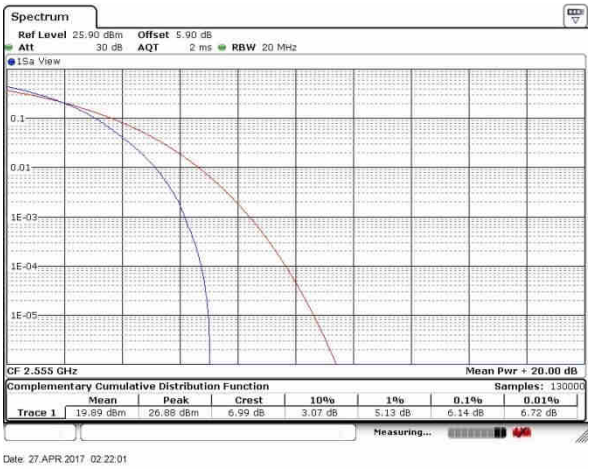

Middle Channel / 1RB

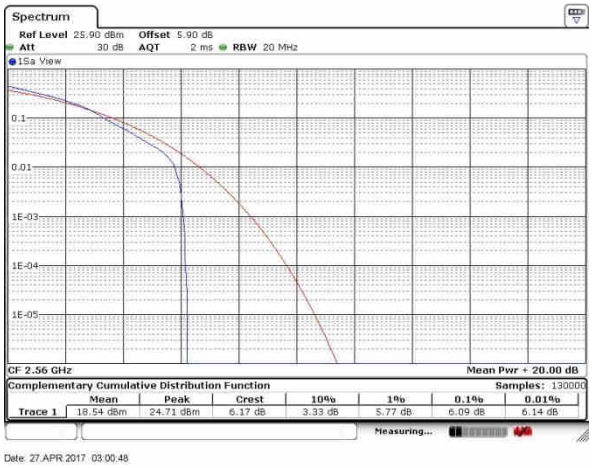

Middle Channel / Full RB

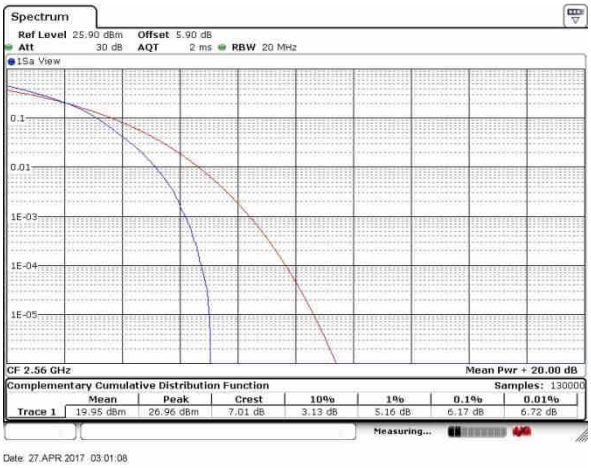

Highest Channel / 1RB

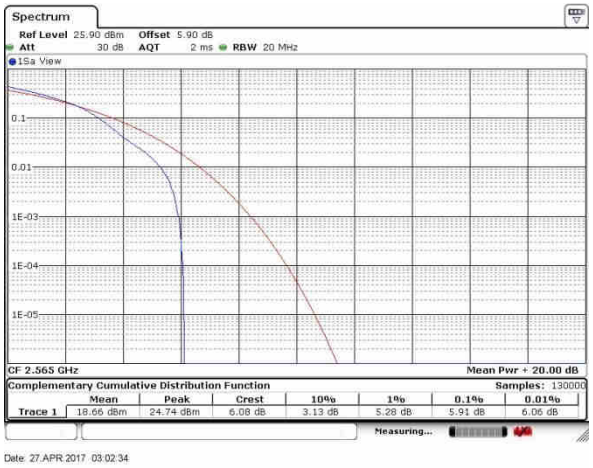

Highest Channel / Full RB

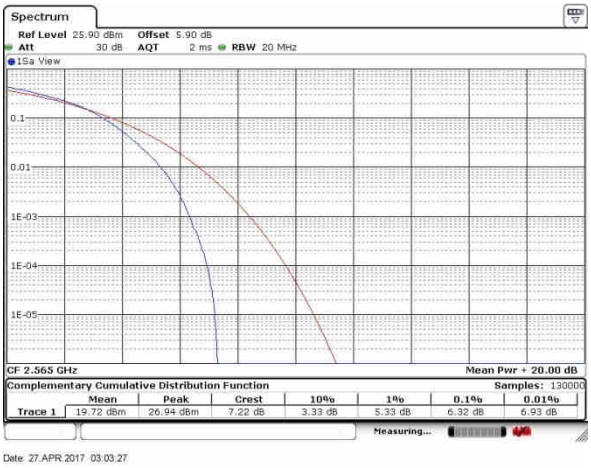

26dB Bandwidth

Mode	LTE Band 7 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.905	4.975	9.81	9.75	14.356	14.476	20.14	20.26
Middle CH	-	-	-	-	4.845	4.825	9.77	9.75	14.236	14.446	20.06	20.42
Highest CH	-	-	-	-	4.855	4.925	9.85	9.81	14.236	14.386	20.18	20.34

Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		CH26765	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.295	3.009	3.027	4.905	4.815	9.85	9.85	14.176	14.296	14.505	14.505
Middle CH	1.29	1.29	3.015	3.063	4.935	4.915	9.75	9.77	14.505	14.715	-	-
Highest CH	1.292	1.284	3.033	3.009	4.875	4.805	9.75	9.67	14.206	14.326	-	-

Mode	LTE Band 38 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.935	4.835	9.79	9.63	14.356	14.236	20.06	20.1
Middle CH	-	-	-	-	4.895	4.835	9.71	9.65	14.386	14.266	20.02	20.14
Highest CH	-	-	-	-	4.705	4.875	9.77	9.75	14.296	14.266	20.18	20.1

Mode	LTE Band 41 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					4.92	4.949	9.754	9.899	14.414	14.284	20.087	20.087
Middle CH					4.891	4.906	9.754	9.783	14.24	14.284	20.26	20.145
Highest CH					4.848	4.805	9.841	9.609	14.24	14.501	20.087	20.087

LTE Band 7

Lowest Channel / 5MHz / QPSK

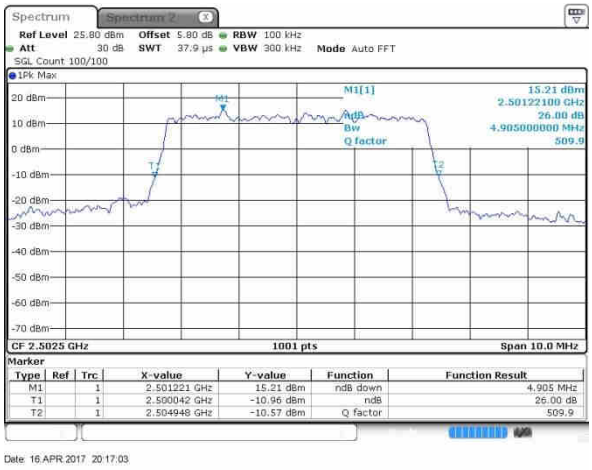

Lowest Channel / 5MHz / 16QAM

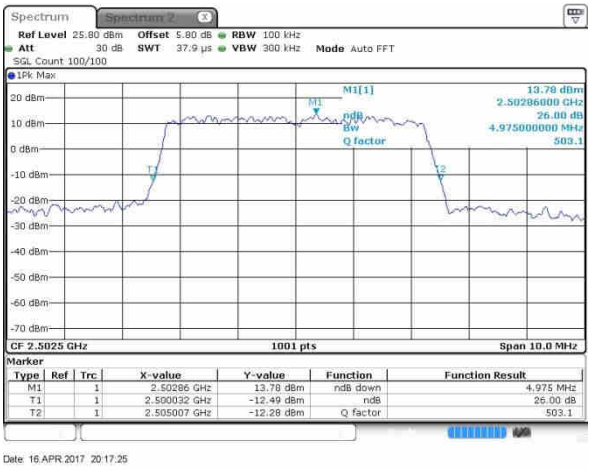

Middle Channel / 5MHz / QPSK

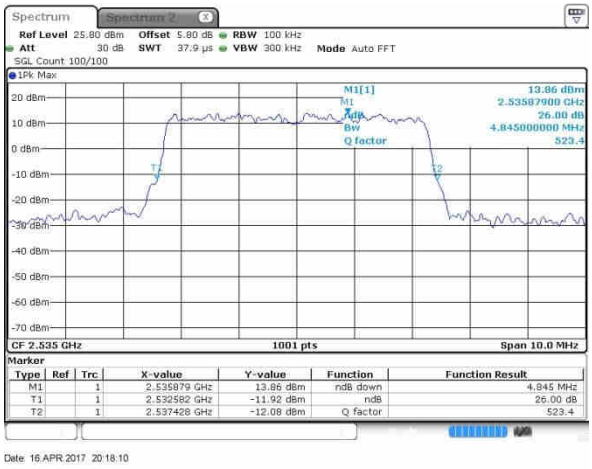

Middle Channel / 5MHz / 16QAM

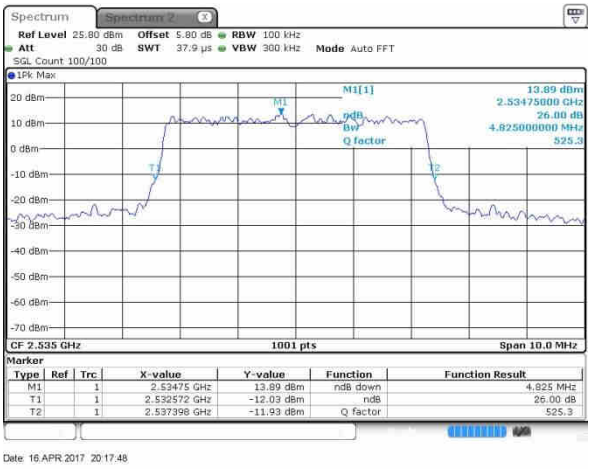

Highest Channel / 5MHz / QPSK

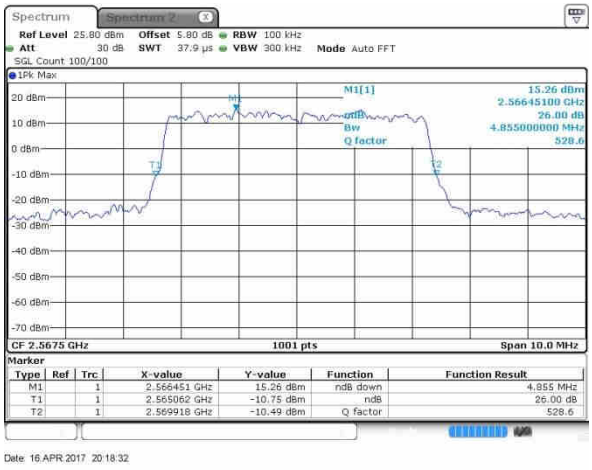

Highest Channel / 5MHz / 16QAM

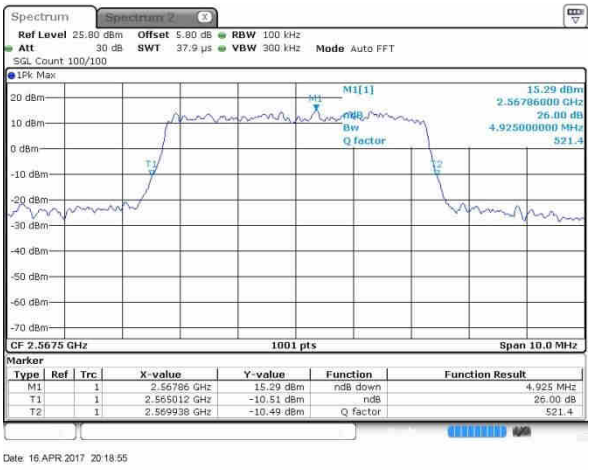

LTE Band 7

Lowest Channel / 10MHz / QPSK

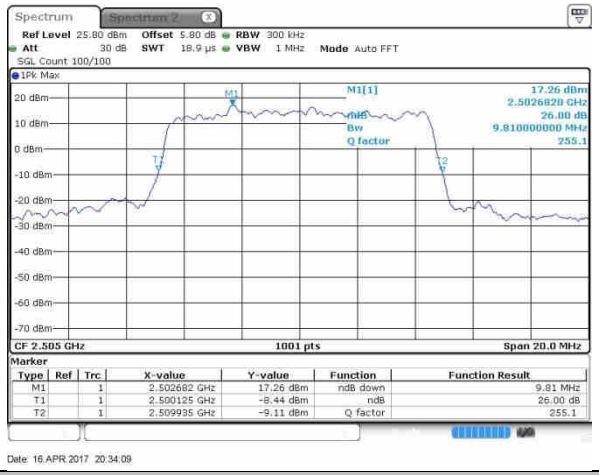

Lowest Channel / 10MHz / 16QAM

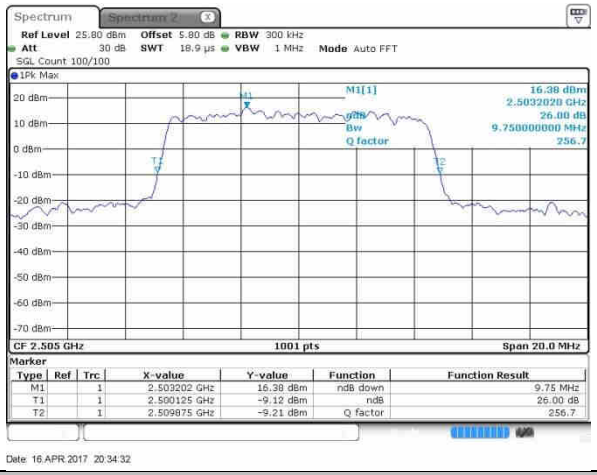

Middle Channel / 10MHz / QPSK

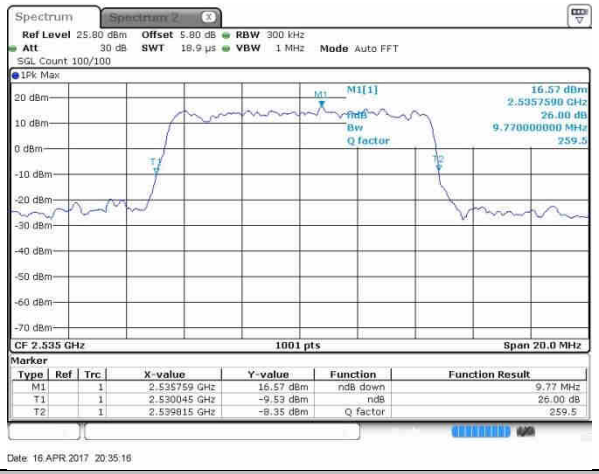

Middle Channel / 10MHz / 16QAM

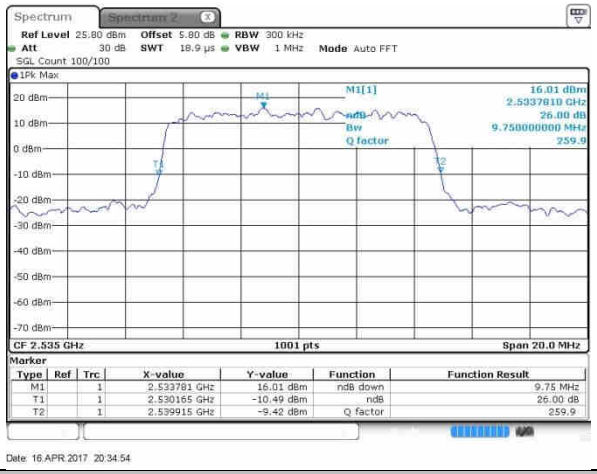

Highest Channel / 10MHz / QPSK

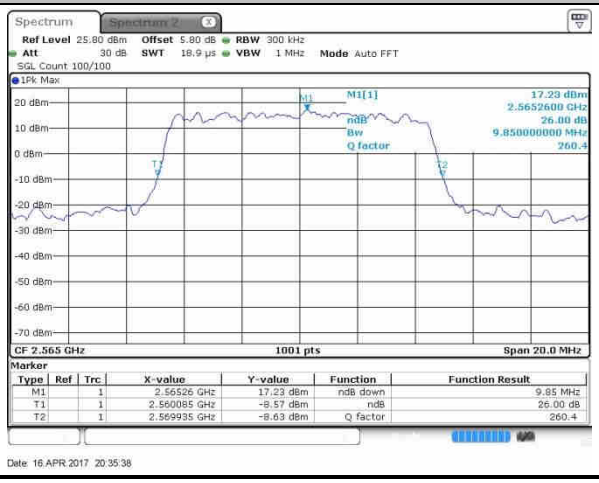

Highest Channel / 10MHz / 16QAM

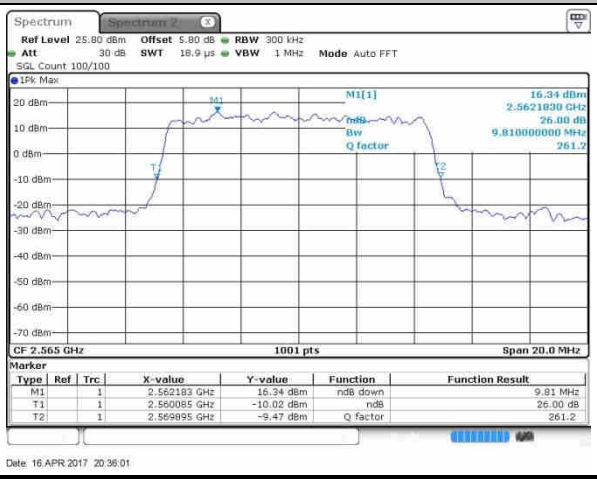

LTE Band 7

Lowest Channel / 15MHz / QPSK

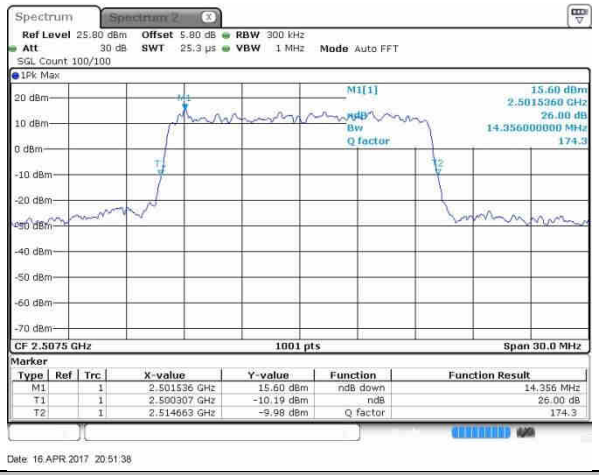

Lowest Channel / 15MHz / 16QAM

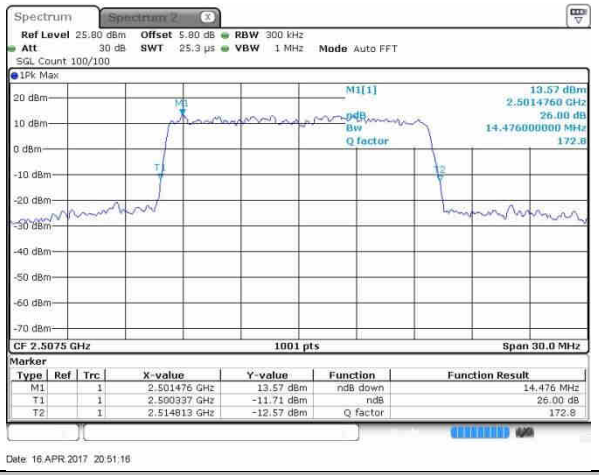

Middle Channel / 15MHz / QPSK

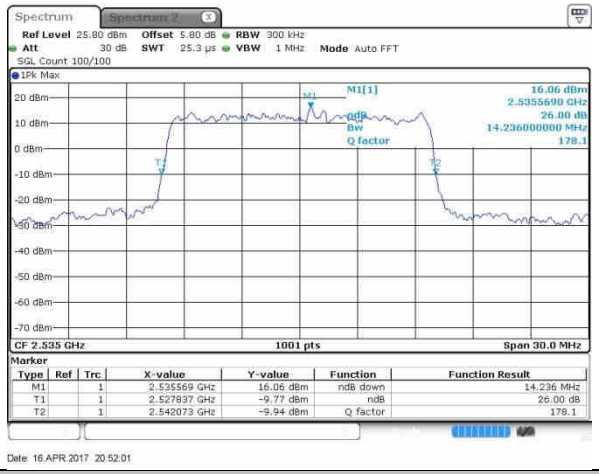

Middle Channel / 15MHz / 16QAM

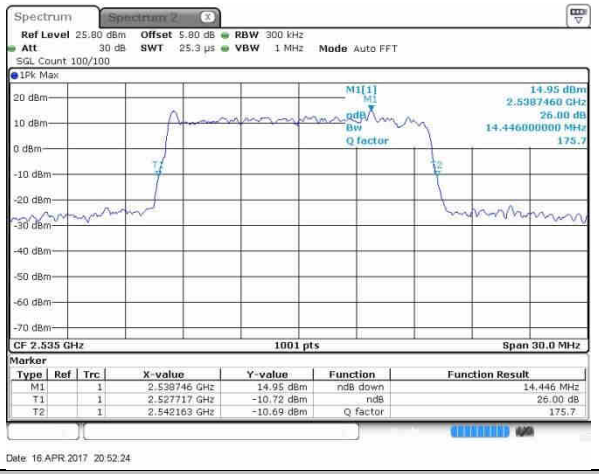

Highest Channel / 15MHz / QPSK

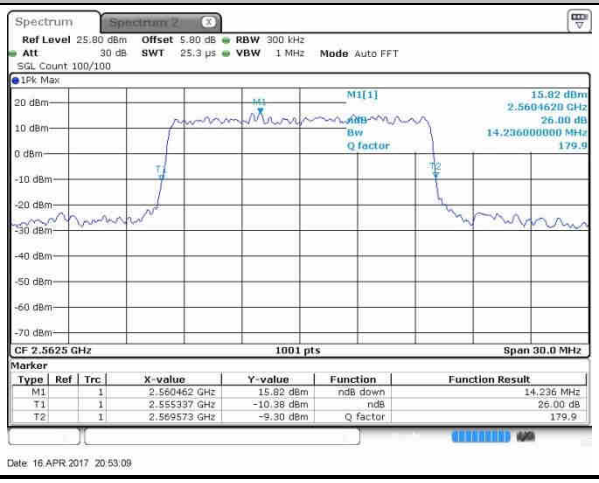

Highest Channel / 15MHz / 16QAM

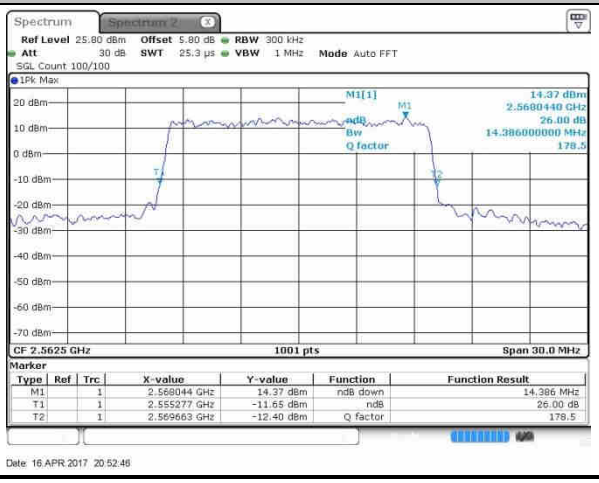

LTE Band 7

Lowest Channel / 20MHz / QPSK

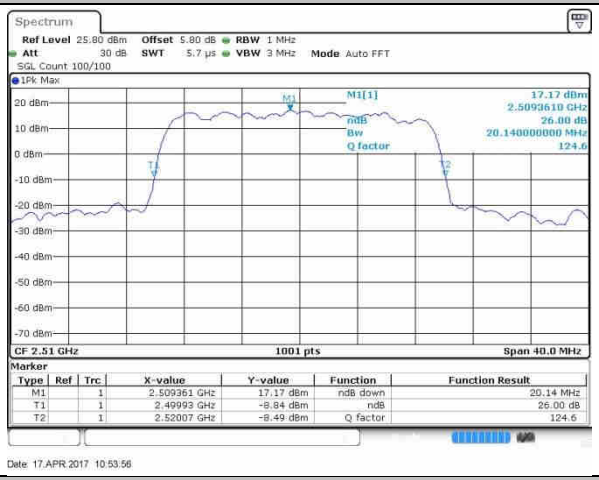

Lowest Channel / 20MHz / 16QAM

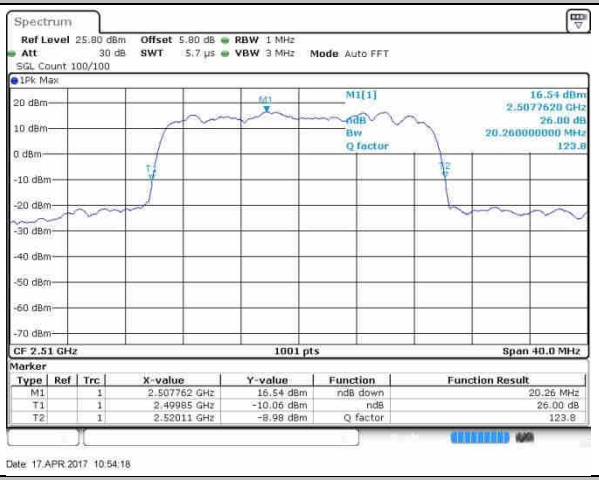

Middle Channel / 20MHz / QPSK

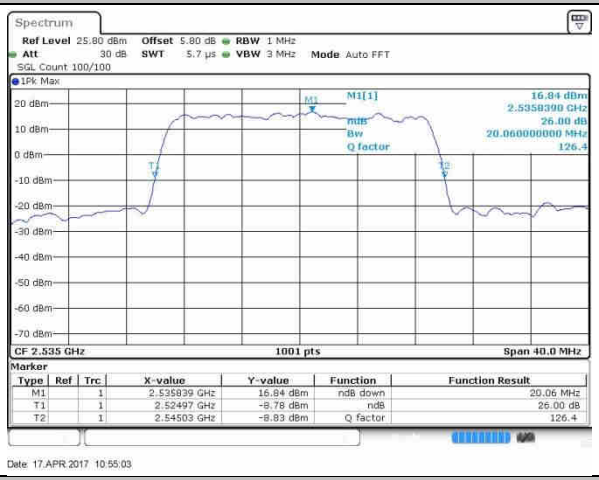

Middle Channel / 20MHz / 16QAM

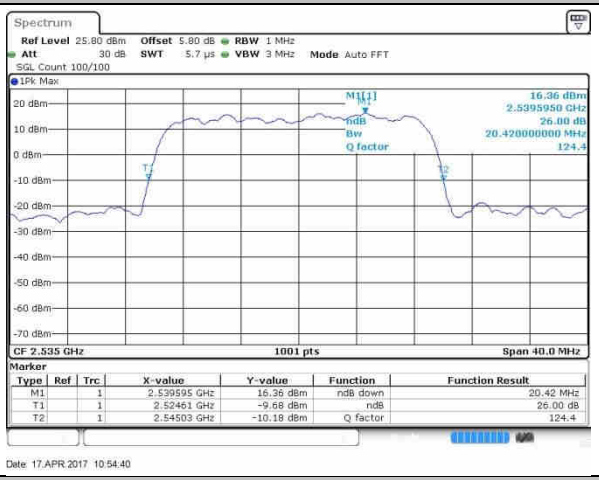

Highest Channel / 20MHz / QPSK

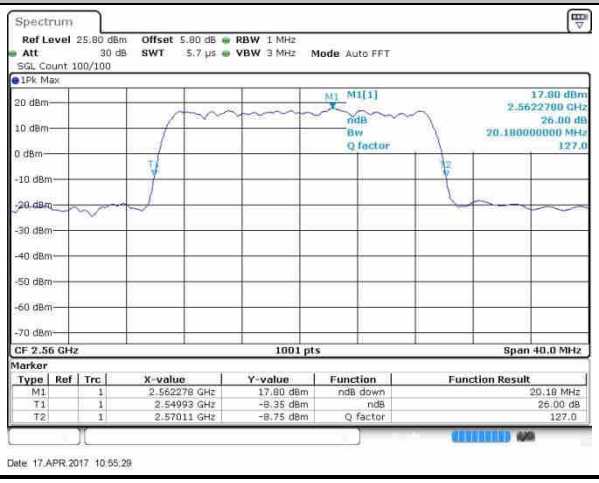

Highest Channel / 20MHz / 16QAM

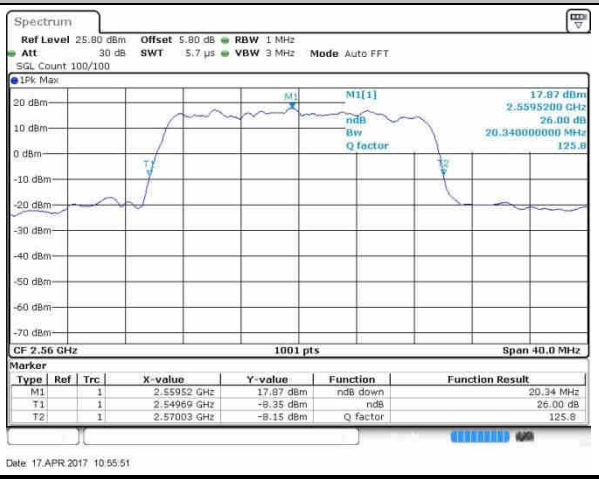

LTE Band 26

Lowest Channel / 1.4MHz / QPSK

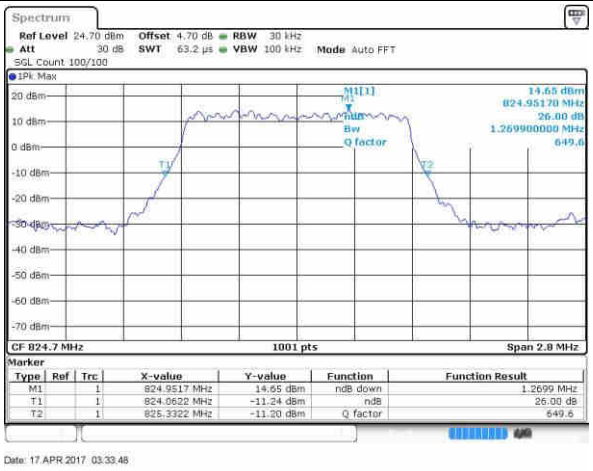

Lowest Channel / 1.4MHz / 16QAM

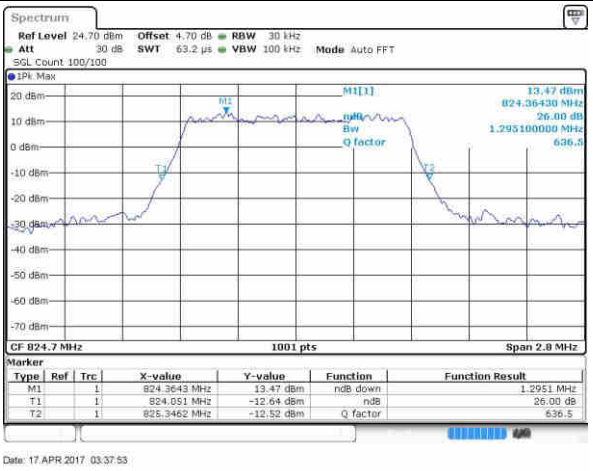

Middle Channel / 1.4MHz / QPSK

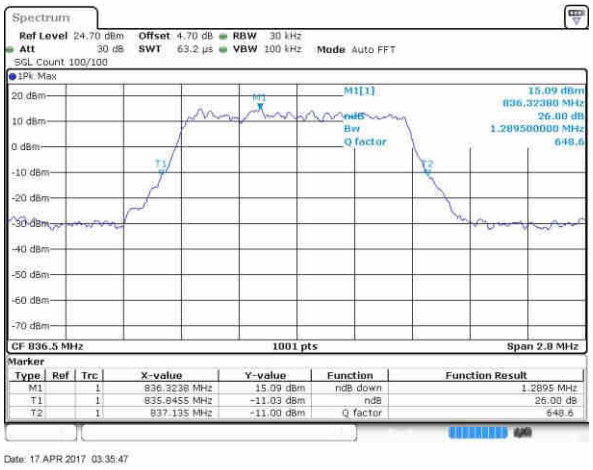

Middle Channel / 1.4MHz / 16QAM

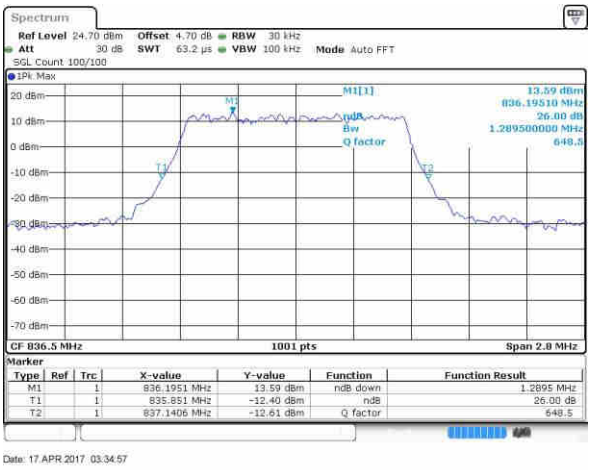

Highest Channel / 1.4MHz / QPSK

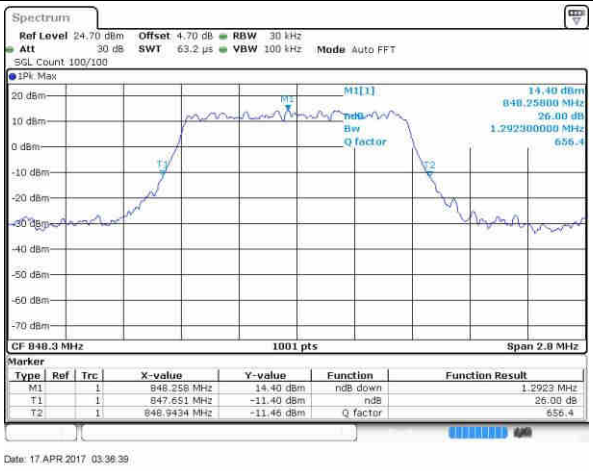

Highest Channel / 1.4MHz / 16QAM

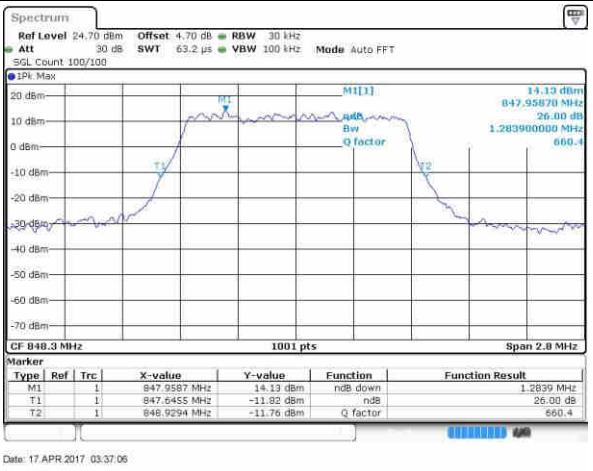

LTE Band 26

Lowest Channel / 3MHz / QPSK

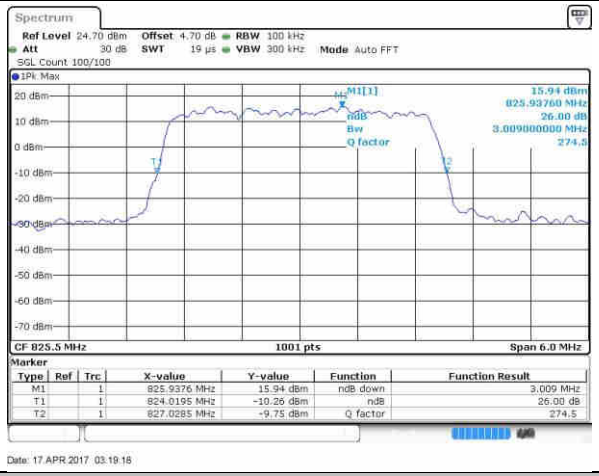

Lowest Channel / 3MHz / 16QAM

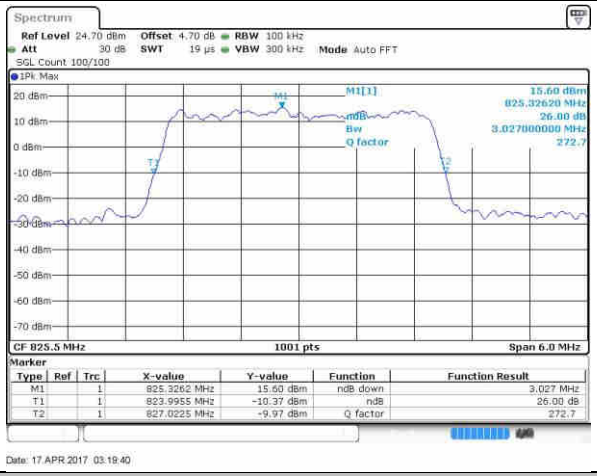

Middle Channel / 3MHz / QPSK

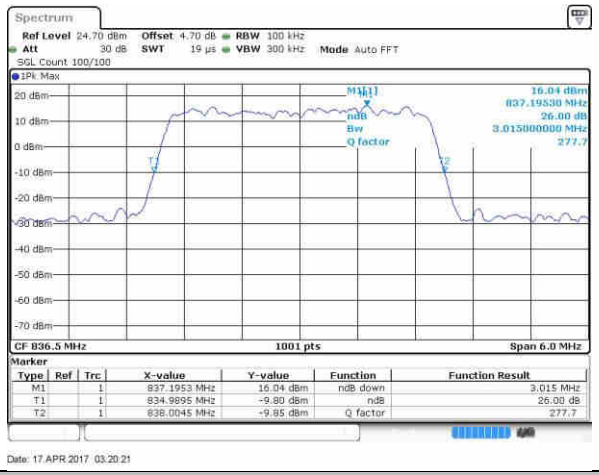

Middle Channel /3MHz / 16QAM

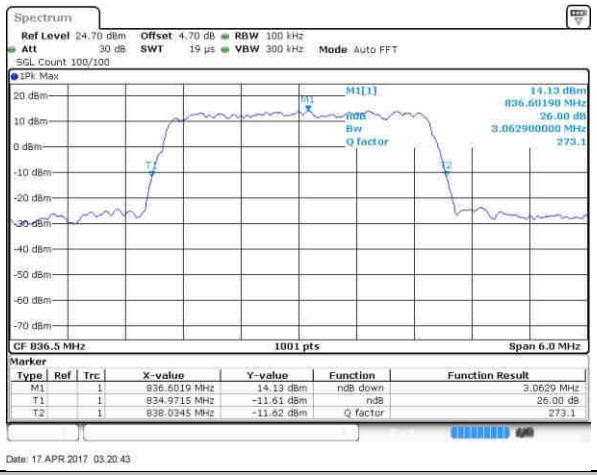

Highest Channel /3MHz / QPSK

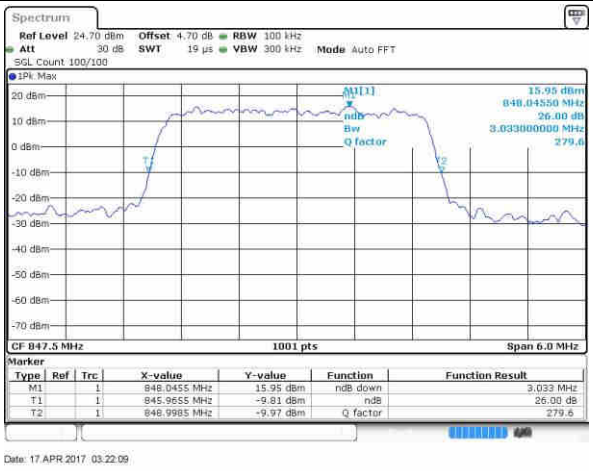

Highest Channel /3MHz / 16QAM

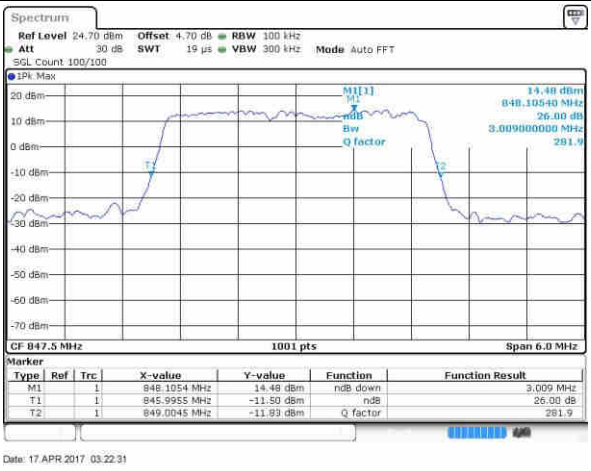

LTE Band 26

Lowest Channel / 5MHz / QPSK

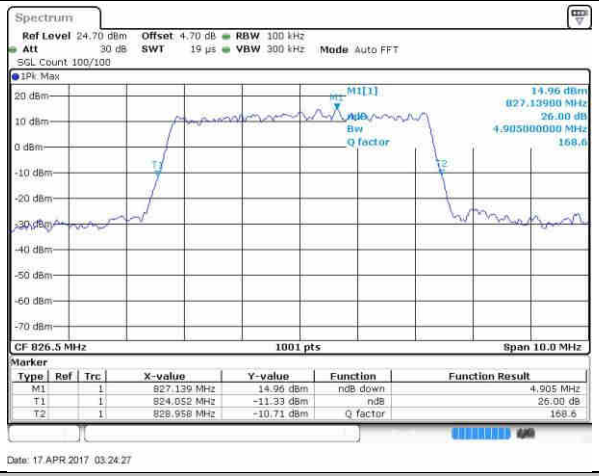

Lowest Channel / 5MHz / 16QAM

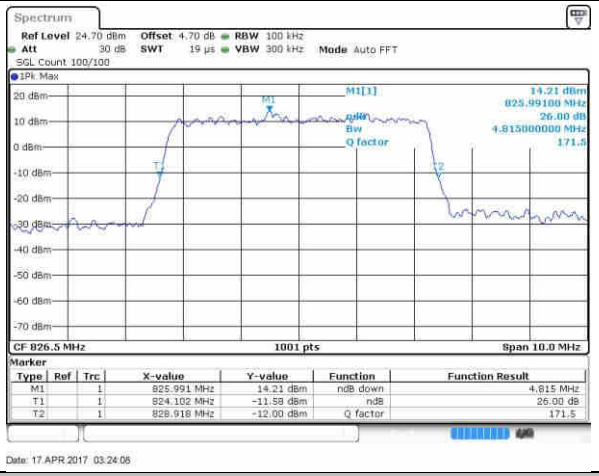

Middle Channel / 5MHz / QPSK

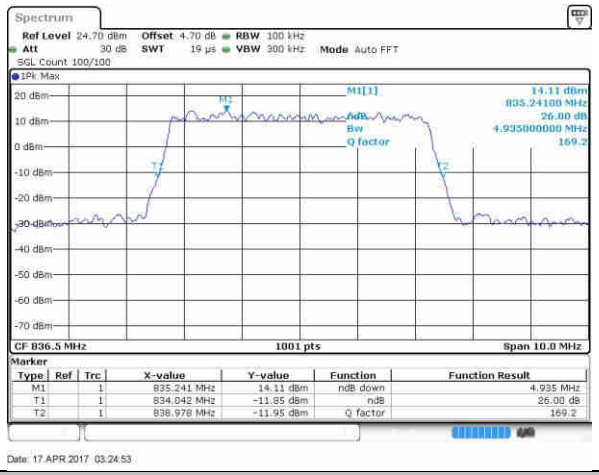

Middle Channel / 5MHz / 16QAM

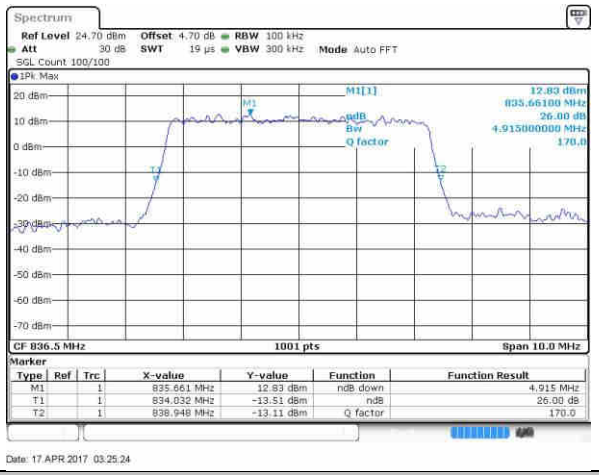

Highest Channel / 5MHz / QPSK

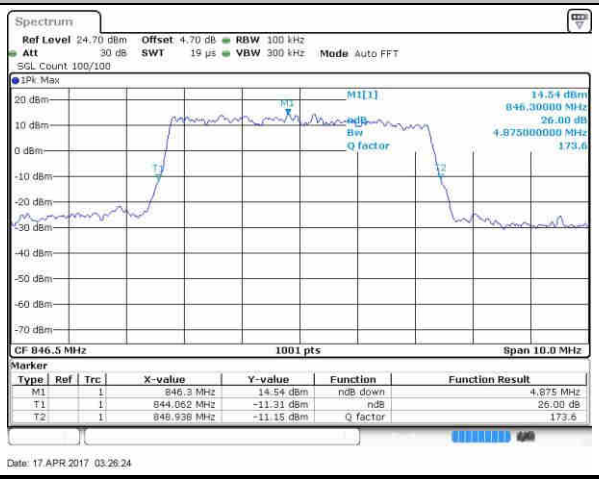

Highest Channel / 5MHz / 16QAM

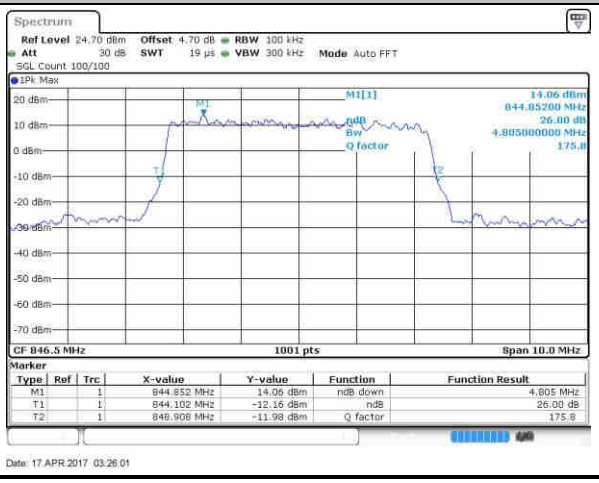

LTE Band 26

Lowest Channel / 10MHz / QPSK

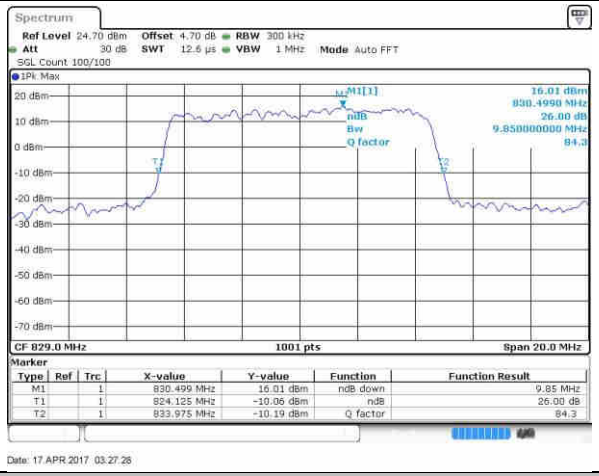

Lowest Channel / 10MHz / 16QAM

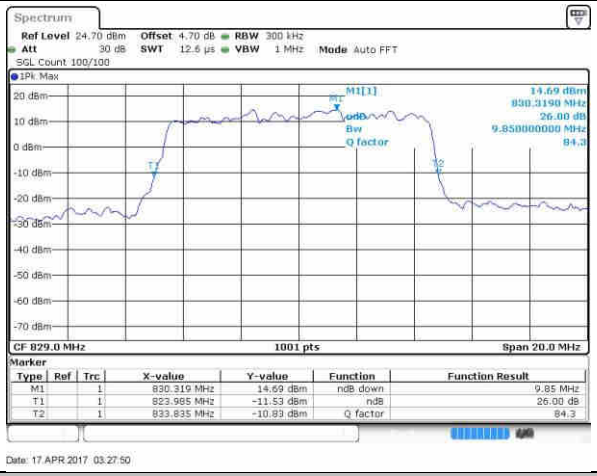

Middle Channel / 10MHz / QPSK

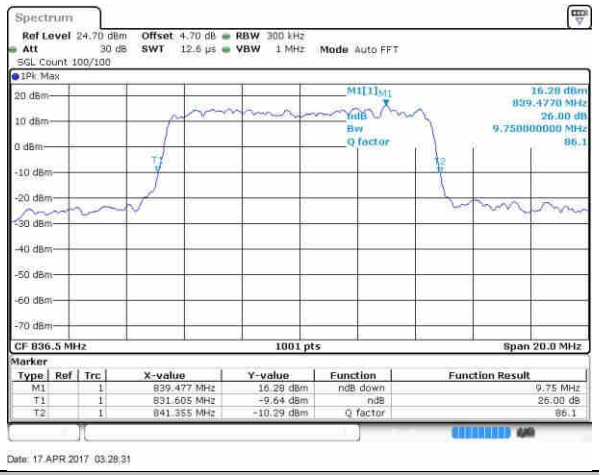

Middle Channel / 10MHz / 16QAM

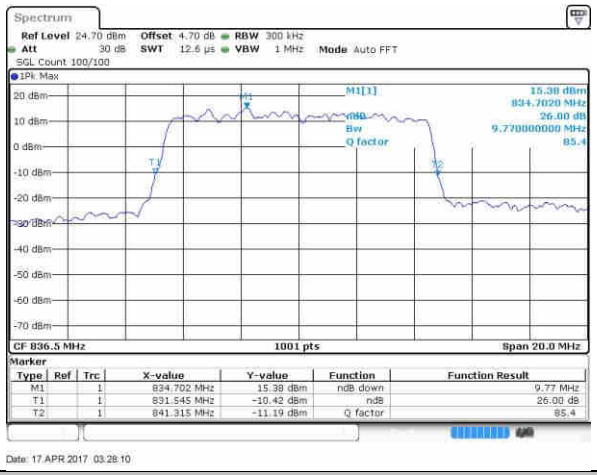

Highest Channel / 10MHz / QPSK

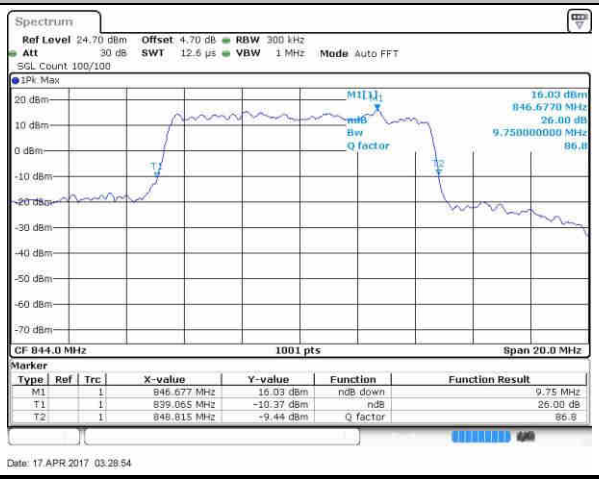

Highest Channel / 10MHz / 16QAM

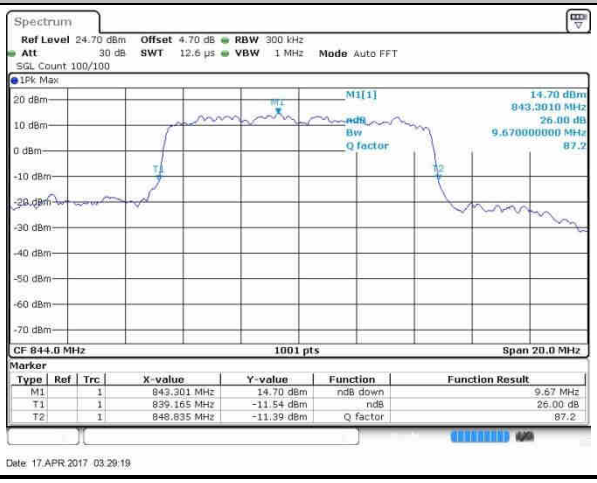

LTE Band 26

Lowest Channel / 15MHz / QPSK

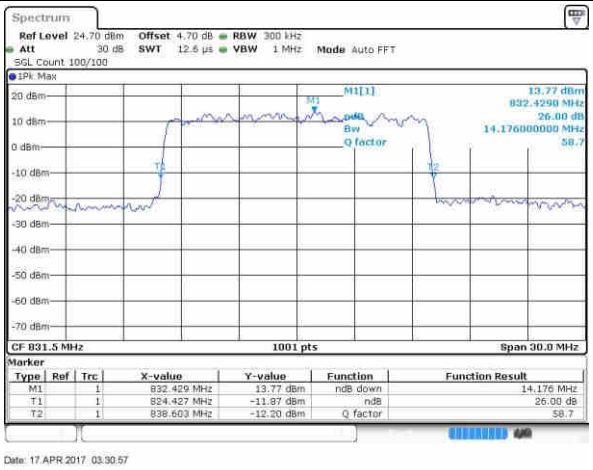

Lowest Channel / 15MHz / 16QAM

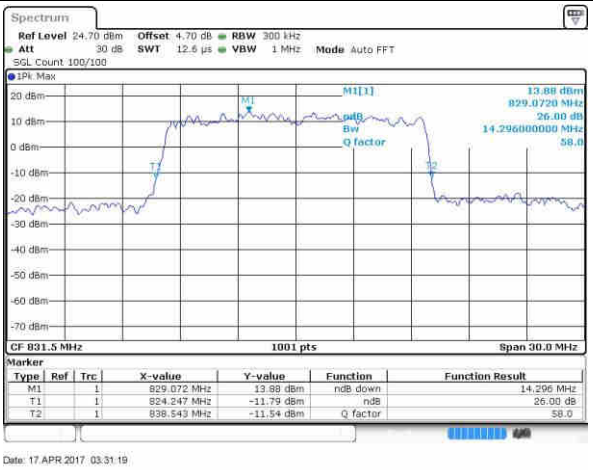

Middle Channel / 15MHz / QPSK

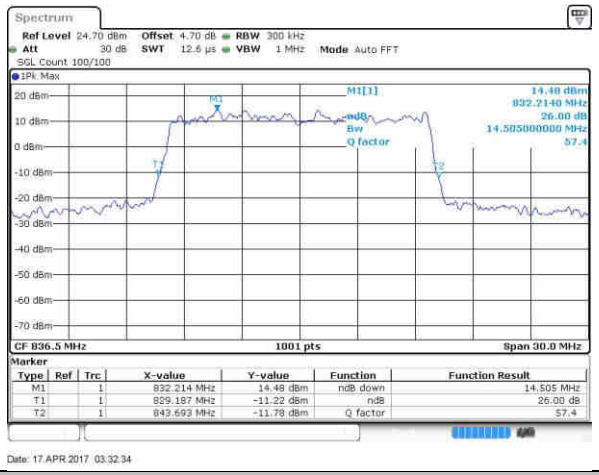

Middle Channel / 15MHz / 16QAM

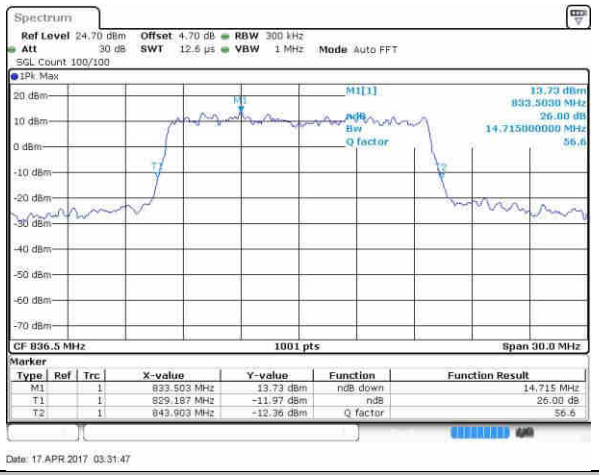

Highest Channel / 15MHz / QPSK

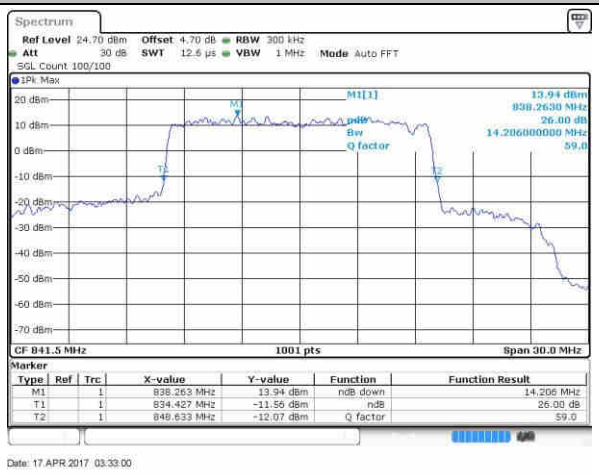

Highest Channel / 15MHz / 16QAM

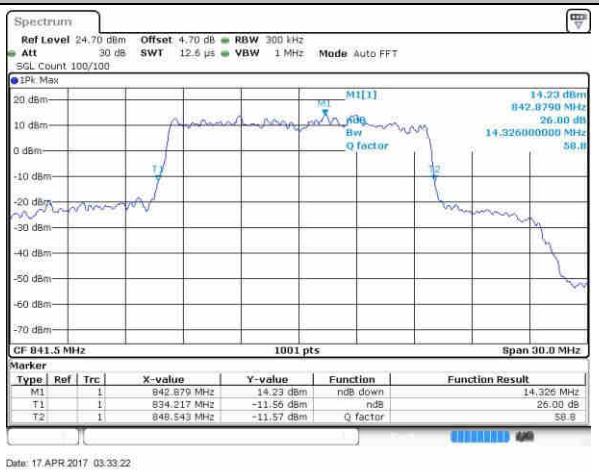

LTE Band 26	
CH26765 / QPSK	CH26765 / 16QAM
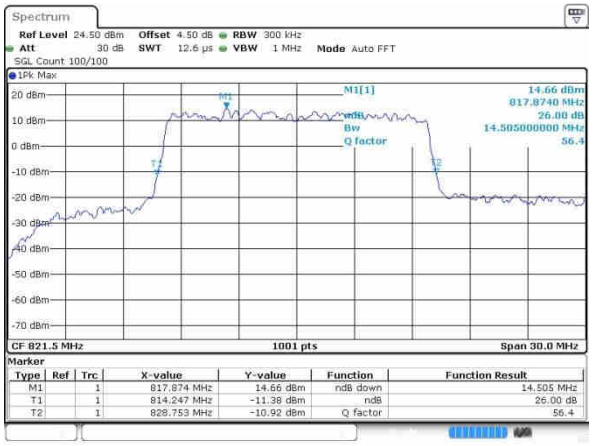	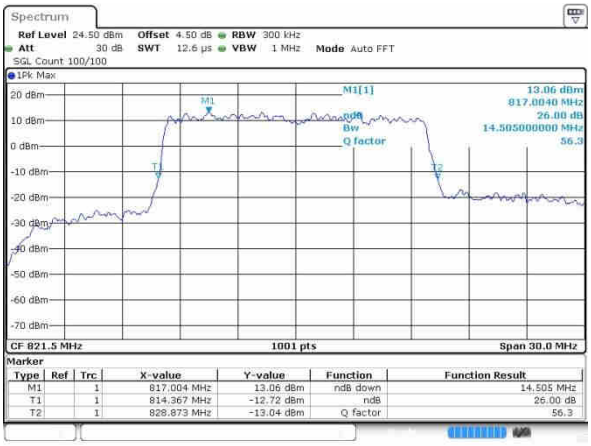

LTE Band 38

Lowest Channel / 5MHz / QPSK

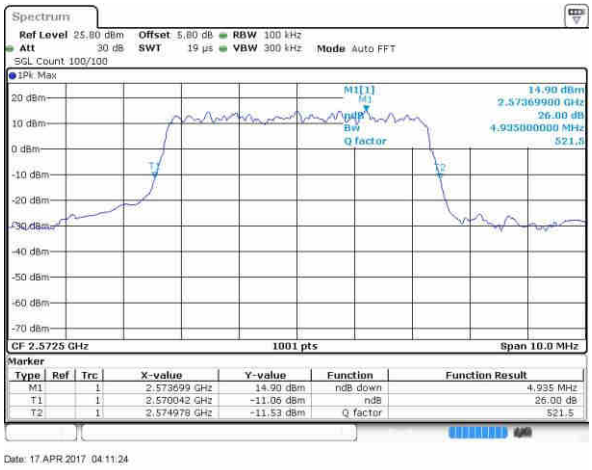

Lowest Channel / 5MHz / 16QAM

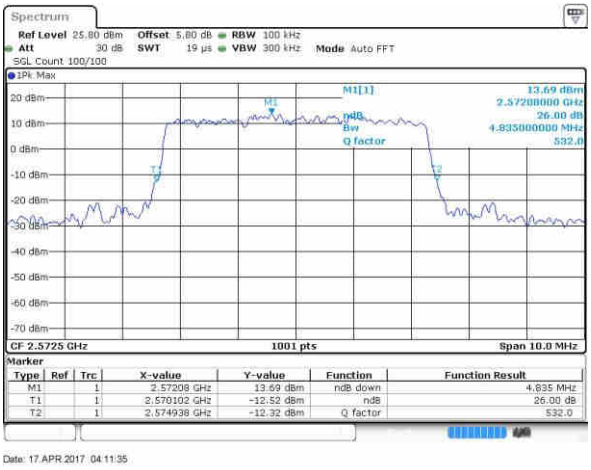

Middle Channel / 5MHz / QPSK

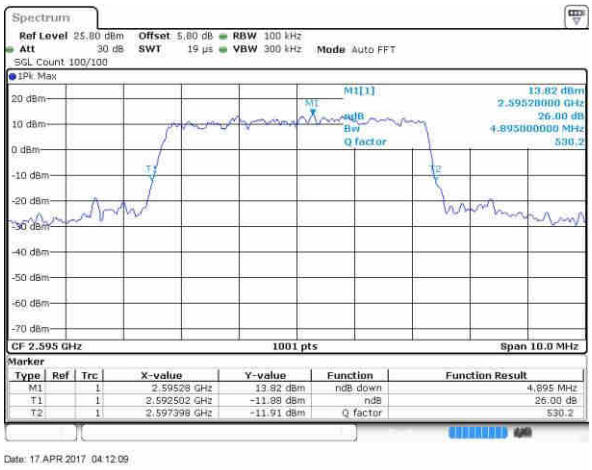

Middle Channel / 5MHz / 16QAM

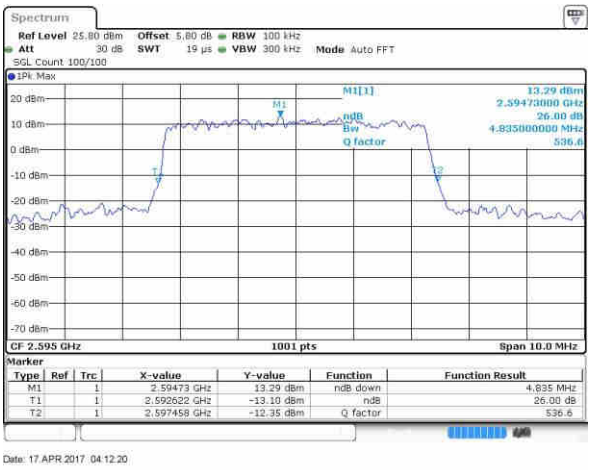

Highest Channel / 5MHz / QPSK

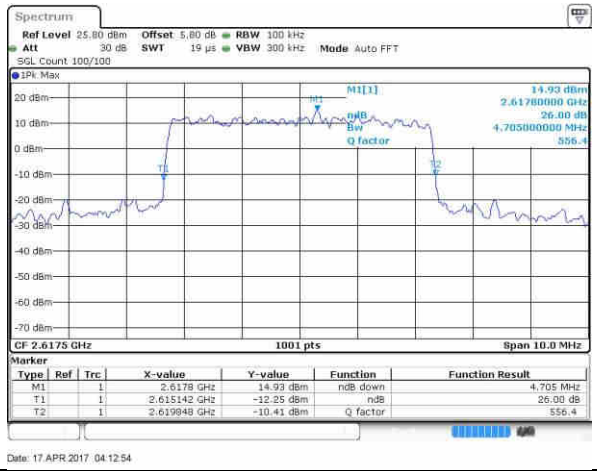

Highest Channel / 5MHz / 16QAM

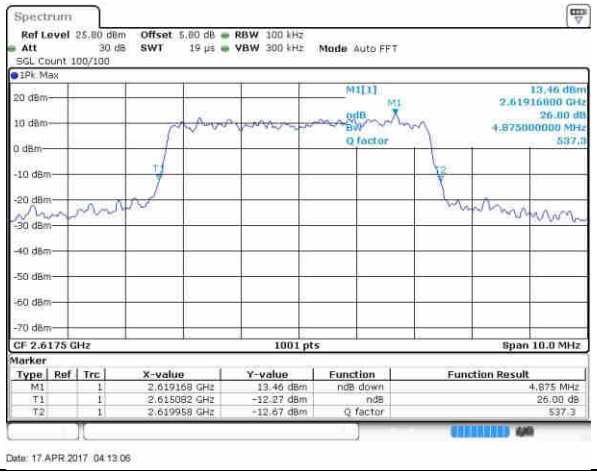

LTE Band 38

Lowest Channel / 10MHz / QPSK

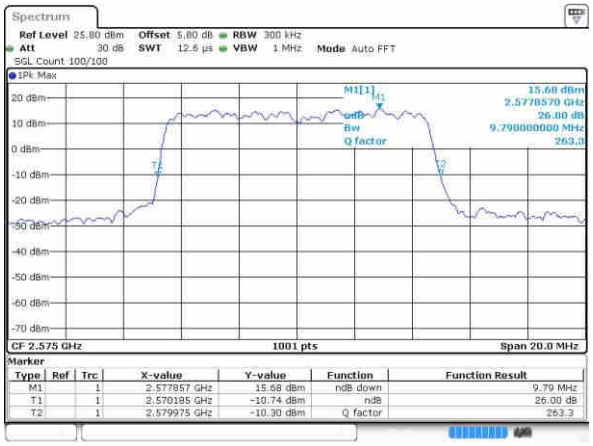

Lowest Channel / 10MHz / 16QAM

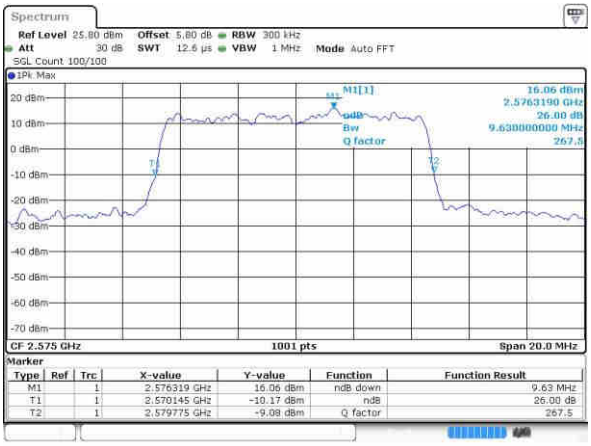

Middle Channel / 10MHz / QPSK

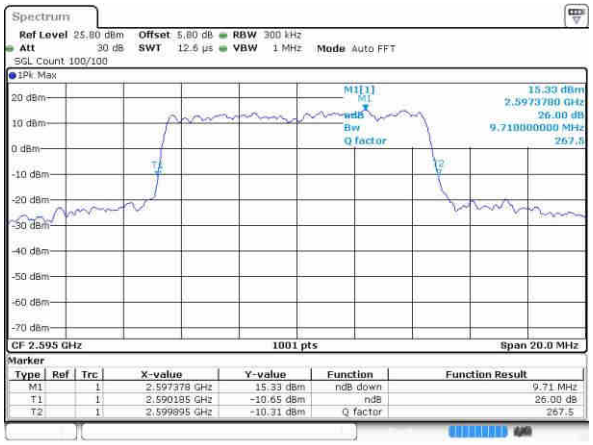

Middle Channel / 10MHz / 16QAM

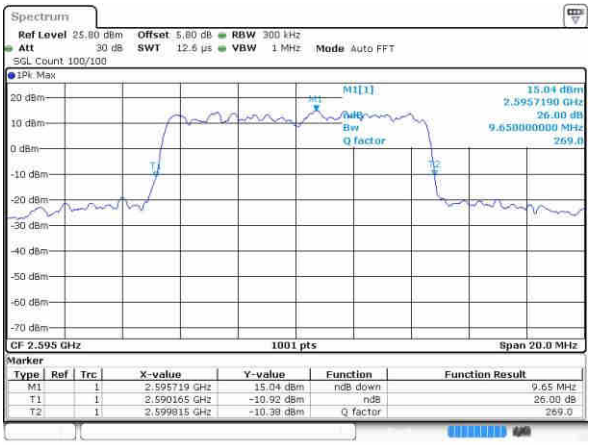

Highest Channel / 10MHz / QPSK

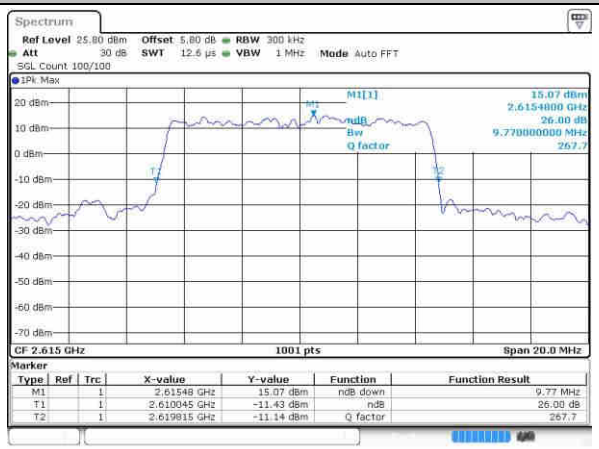

Highest Channel / 10MHz / 16QAM

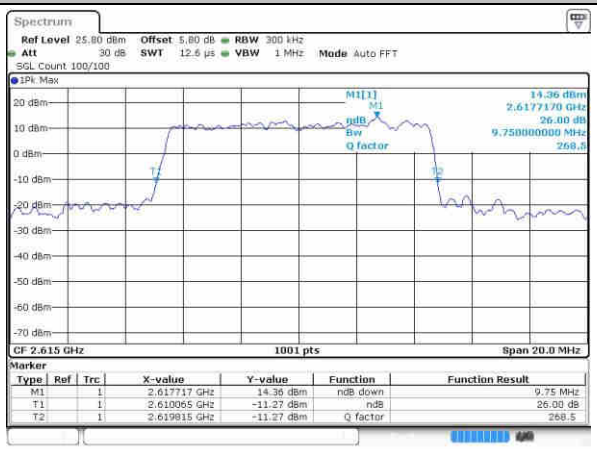

LTE Band 38

Lowest Channel / 15MHz / QPSK

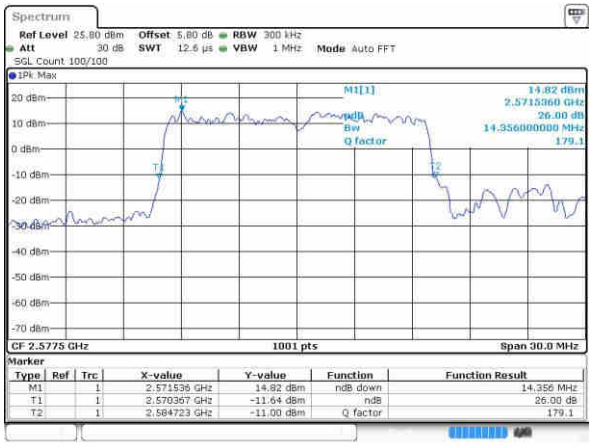

Lowest Channel / 15MHz / 16QAM

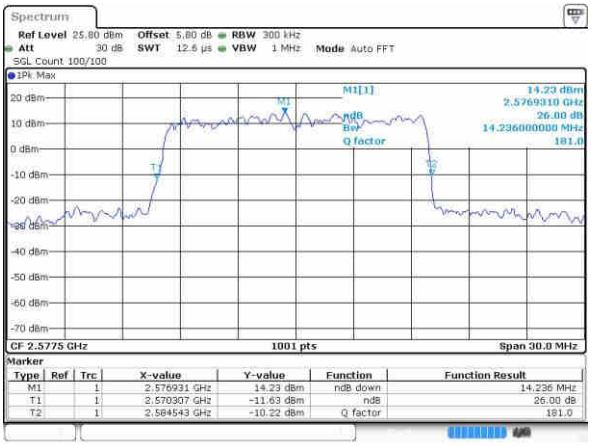

Middle Channel / 15MHz / QPSK

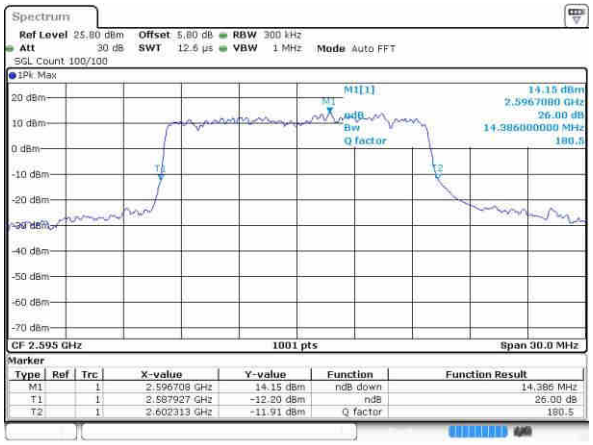

Middle Channel / 15MHz / 16QAM

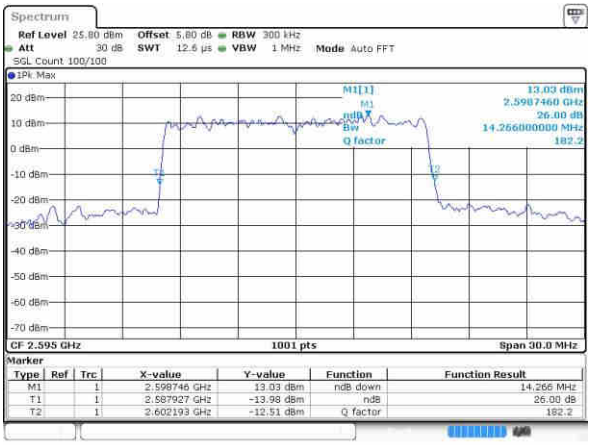

Highest Channel / 15MHz / QPSK

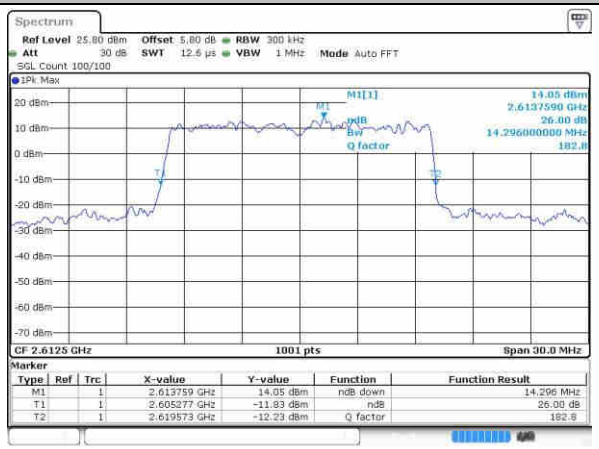

Highest Channel / 15MHz / 16QAM

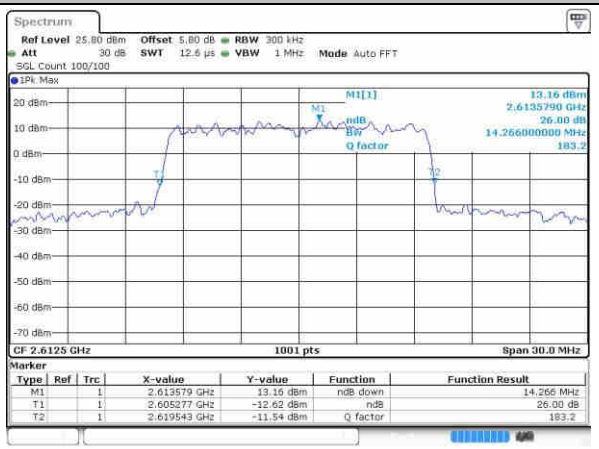

LTE Band 38

Lowest Channel / 20MHz / QPSK

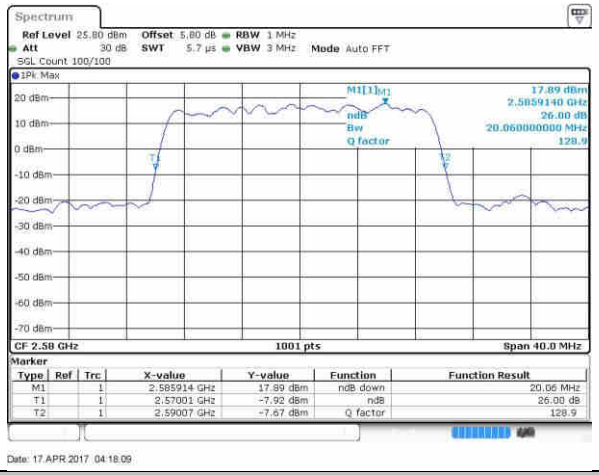

Lowest Channel / 20MHz / 16QAM

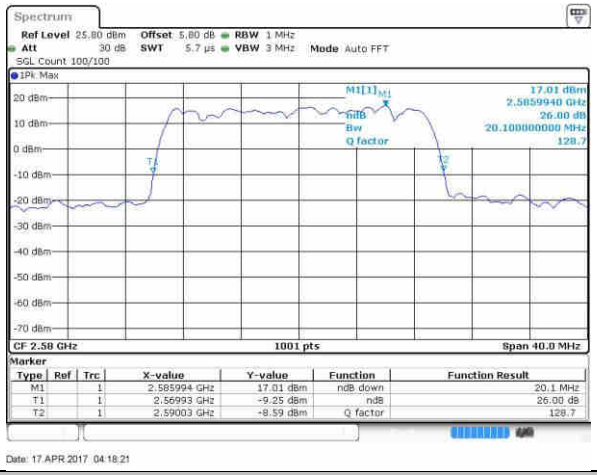

Middle Channel / 20MHz / QPSK

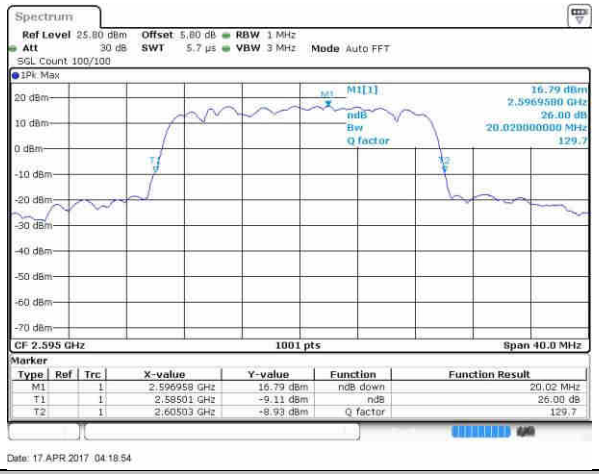

Middle Channel / 20MHz / 16QAM

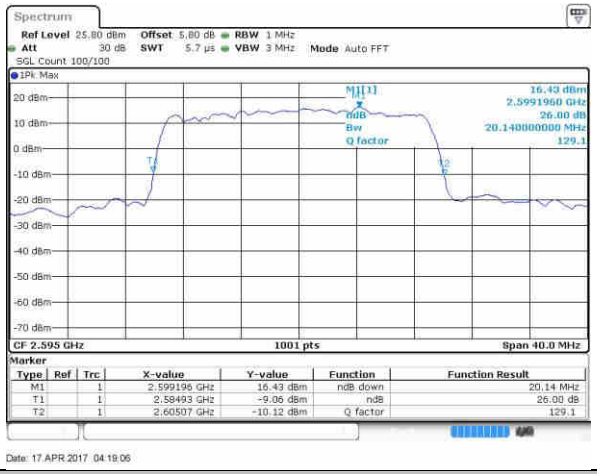

Highest Channel / 20MHz / QPSK

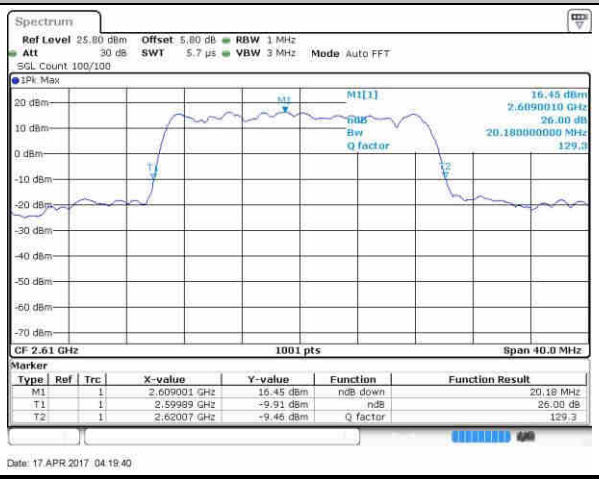
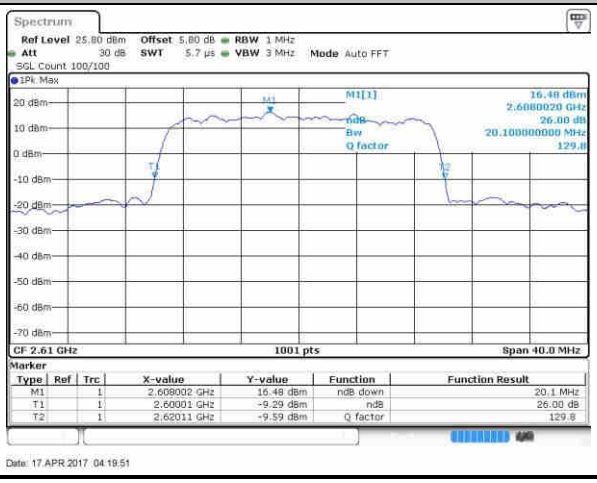
Highest Channel / 20MHz / 16QAM