FCC RF Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	10870, 10869
FCC ID	:	IHDT56WK4
STANDARD	:	47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

This is a data re-used report which is only valid together with the original test report. The product was received on Jun. 17, 2017 and completely tested on Jul. 12, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager

Testing Laboratory 2627

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Specification of Accessory 7
1.6 Modification of EUT 7
1.7 Re-use of Measured Data 8
1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 9
1.9 Testing Location 12
1.10 Applicable Standards 12

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **13**

2.1 Test Mode 13
2.2 Connection Diagram of Test System 15
2.3 Support Unit used in test configuration and system 15
2.4 Measurement Results Explanation Example 15
2.5 Frequency List of Low/Middle/High Channels 16

3 CONDUCTED TEST ITEMS **18**

3.1 Measuring Instruments 18
3.2 Test Setup 18
3.3 Test Result of Conducted Test 18
3.4 Conducted Output Power and ERP/EIRP 19
3.5 Peak-to-Average Ratio 20
3.6 Occupied Bandwidth 21
3.7 Conducted Band Edge 22
3.8 Conducted Spurious Emission 24
3.9 Frequency Stability 25

4 RADIATED TEST ITEMS **26**

4.1 Measuring Instruments 26
4.2 Test Setup 26
4.3 Test Result of Radiated Test 26
4.4 Radiated Spurious Emission 27

5 LIST OF MEASURING EQUIPMENT **28**

6 UNCERTAINTY OF EVALUATION **29**

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

APPENDIX D. ORIGINAL REPORT

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG761702-03B	Rev. 01	Initial issue of report	Aug. 07, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 66)	< 43+10log$_{10}$(P[Watts])	PASS	Under limit 25.81 dB at 2496.000 MHz

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	10870, 10869
FCC ID	IHDT56WK4
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE/NFC WLAN 2.4G 802.11b/g/n HT20/HT40/ WLAN 5G 802.11a/n HT20/HT40/ WLAN 5G 802.11ac VHT20/VHT40/VHT80/ Bluetooth V3.0 + EDR/ Bluetooth V4.0 LE/ Bluetooth v4.1 LE / Bluetooth v4.2 LE / Bluetooth v5.0 LE
IMEI Code	Conducted: 356485080009379/356485080009387 Radiation: 356485080012159/356485080012167
HW Version	DVT2
SW Version	NPW26.75
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1(Model name: 10869) and sample 2(Model name: 10870), the differences between two samples are only for SIM slot, sample 1 is dual SIM slot, sample 2 is single SIM slot. We only choose dual SIM sample to perform full tests.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 66 : 2110.7 MHz ~ 2199.3 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 2 : 23.05 dBm LTE Band 4 : 23.12 dBm LTE Band 5 : 23.12 dBm LTE Band 66 : 23.07 dBm
Antenna Gain	LTE Band 2 : -1.60 dBi LTE Band 4 : -0.90 dBi LTE Band 5 : -1.60 dBi LTE Band 66 : -0.90 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	**Brand Name**	Motorola (Salom)	**Model Name**	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 2 (US)	**Brand Name**	Motorola (Chenyang)	**Model Name**	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
AC Adapter 3 (US)	**Brand Name**	Motorola (LiteOn)	**Model Name**	SC-22
	Power Rating	I/P: 100 - 240 Vac, 500 mA, O/P: 5/9/12 Vdc, 3000/1600/1200 mA		
Battery	**Brand Name**	Motorola (Sunwoda)	**Model Name**	HX40
	Power Rating	3.8Vdc, 2810mAh	**Type**	Li-ion
Earphone	**Brand Name**	Motorola (Cosonic)	**Model Name**	SH38C16618
	Signal Line Type	1.10 meter, non-shielded cable, without ferrite core		
USB Cable 1	**Brand Name**	Motorola (Saibao)	**Model Name**	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 2	**Brand Name**	Motorola (Foxlink)	**Model Name**	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		
USB Cable 3	**Brand Name**	Motorola (Cabletech)	**Model Name**	SKN6473A
	Signal Line Type	1.10 meter, shielded cable, without ferrite core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Re-use of Measured Data

1.7.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 10870, 10869, FCC ID: IHDT56WK4) is electrically identical to the reference device (Model: 10647, FCC ID: IHDT56WK1) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.7.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., some difference of population/depopulation to enable support of different cellular bands, please refer to the Operational Description.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG761702-01B for the reference device Model: 10647, FCC ID: IHDT56WK1):

1.7.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission, the test result were consistent with FCC ID: IHDT56WK1 and LTE Band 2/4/5/66 to re-test.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.7.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE (LTE)	IHDT56WK1	Part22H.24E.27L.27M.27H.27F (FG761702-01B)	All sections applicable for LTE Band 7/12/17

1.8 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.1355	1M10W7D	-	0.1148
3	1851.5 ~ 1908.5	2M72G7D	-	0.1377	2M74W7D	-	0.1169
5	1852.5 ~ 1907.5	4M51G7D	-	0.1368	4M51W7D	-	0.1169
10	1855.0 ~ 1905.0	9M05G7D	0.0025	0.1368	9M03W7D	-	0.1161
15	1857.5 ~ 1902.5	13M5G7D	-	0.1396	13M5W7D	-	0.1202
20	1860.0 ~ 1900.0	18M4G7D	-	0.1374	18M5W7D	-	0.1189

LTE Band 2		64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M09W7D	-	0.1119
3	1851.5 ~ 1908.5	2M73W7D	-	0.1130
5	1852.5 ~ 1907.5	4M48W7D	-	0.1117
10	1855.0 ~ 1905.0	9M07W7D	-	0.1135
15	1857.5 ~ 1902.5	13M5W7D	-	0.1161
20	1860.0 ~ 1900.0	18M5W7D	-	0.1143

LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.1600	1M10W7D	-	0.1355
3	1711.5 ~ 1753.5	2M73G7D	-	0.1626	2M73W7D	-	0.1384
5	1712.5 ~ 1752.5	4M49G7D	-	0.1618	4M51W7D	-	0.1371
10	1715.0 ~ 1750.0	9M05G7D	0.0036	0.1637	9M09W7D	-	0.1406
15	1717.5 ~ 1747.5	13M5G7D	-	0.1641	13M5W7D	-	0.1409
20	1720.0 ~ 1745.0	18M4G7D	-	0.1667	18M3W7D	-	0.1413

LTE Band 4		64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09W7D	-	0.1321
3	1711.5 ~ 1753.5	2M73W7D	-	0.1334
5	1712.5 ~ 1752.5	4M51W7D	-	0.1330
10	1715.0 ~ 1750.0	9M01W7D	-	0.1355
15	1717.5 ~ 1747.5	13M5W7D	-	0.1355
20	1720.0 ~ 1745.0	18M5W7D	-	0.1380

LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.0849	1M09W7D	-	0.0718
3	825.5 ~ 847.5	2M72G7D	-	0.0865	2M73W7D	-	0.0733
5	826.5 ~ 846.5	4M51G7D	-	0.0851	4M49W7D	-	0.0724
10	829.0 ~ 844.0	9M03G7D	0.0073	0.0855	9M05W7D	-	0.0723

LTE Band 5		64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09W7D	-	0.0698
3	825.5 ~ 847.5	2M73W7D	-	0.0710
5	826.5 ~ 846.5	4M51W7D	-	0.0700
10	829.0 ~ 844.0	9M07W7D	-	0.0705

LTE Band 66		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1779.3	1M10G7D	-	0.1626	1M09W7D	-	0.1374
3	1711.5 ~ 1778.5	2M73G7D	-	0.1648	2M73W7D	-	0.1416
5	1712.5 ~ 1777.5	4M51G7D	-	0.1611	4M50W7D	-	0.1365
10	1715.0 ~ 1775.0	9M05G7D	0.0065	0.1629	9M05W7D	-	0.1384
15	1717.5 ~ 1772.5	13M5G7D	-	0.1641	13M5W7D	-	0.1416
20	1720.0 ~ 1770.0	18M4G7D	-	0.1637	18M3W7D	-	0.1390

LTE Band 66		64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1779.3	1M09W7D	-	0.1352
3	1711.5 ~ 1778.5	2M72W7D	-	0.1330
5	1712.5 ~ 1777.5	4M51W7D	-	0.1306
10	1715.0 ~ 1775.0	9M11W7D	-	0.1334
15	1717.5 ~ 1772.5	13M4W7D	-	0.1361
20	1720.0 ~ 1770.0	18M5W7D	-	0.1358

1.9 Testing Location

Test Site	Sporton International (KunShan) INC.		
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v	v	v		v	v	v	v
	4						v	v	v	v	v		v	v	v	v
	5				v	-	-	v	v	v	v		v	v	v	v
	66						v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v	v			v	v	v	v
	66	v	v	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v		v	v		v
	4	v	v	v	v	v	v	v	v	v	v		v	v		v
	5	v	v	v	v	-	-	v	v	v	v		v	v		v
	66	v	v	v	v	v	v	v	v	v	v		v	v		v

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	66	v	v	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	5				v	-	-	v					v		v	
	66				v			v					v		v	
E.R.P./E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	66	v	v	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	- v			v				v	
	4	v	v	v	v	v	v	-			-				-	
	5	v	v	v	v	-	-	- v			v				v	
	66	v	v	v	v	v	v	v			v				v	
Note	1. The mark "**v** " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band 4 RSE test was covered by Band 66. 4. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

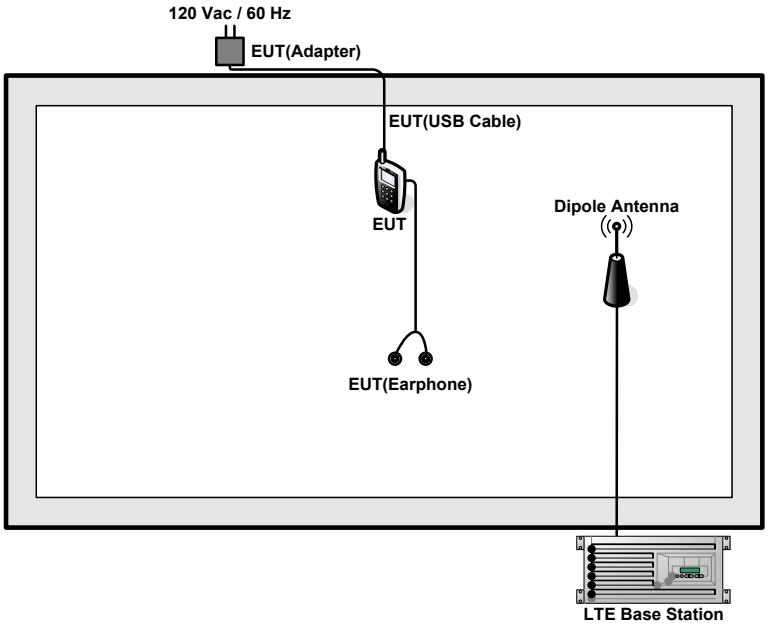

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.2 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 5.2 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

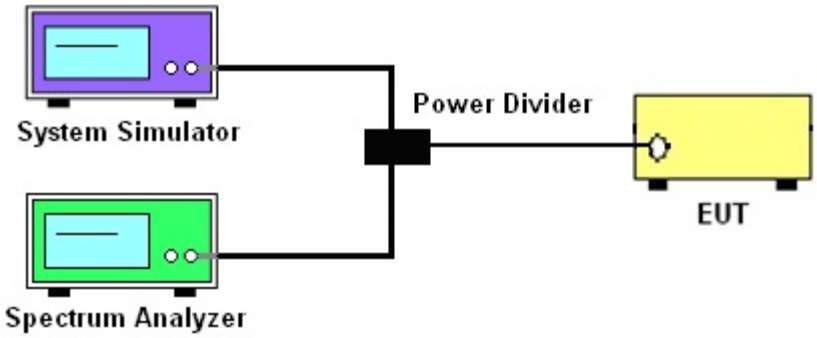

3.2.3 Frequency Stability

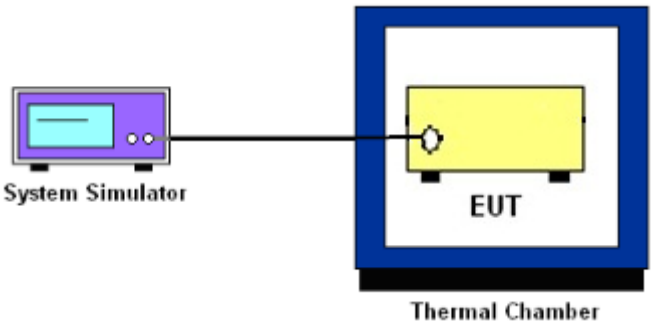

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4, Band 66.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.1 and 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz and 1710 – 1780 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

   Example:

   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

   = P(W)- [43 + 10log(P)] (dB)

   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

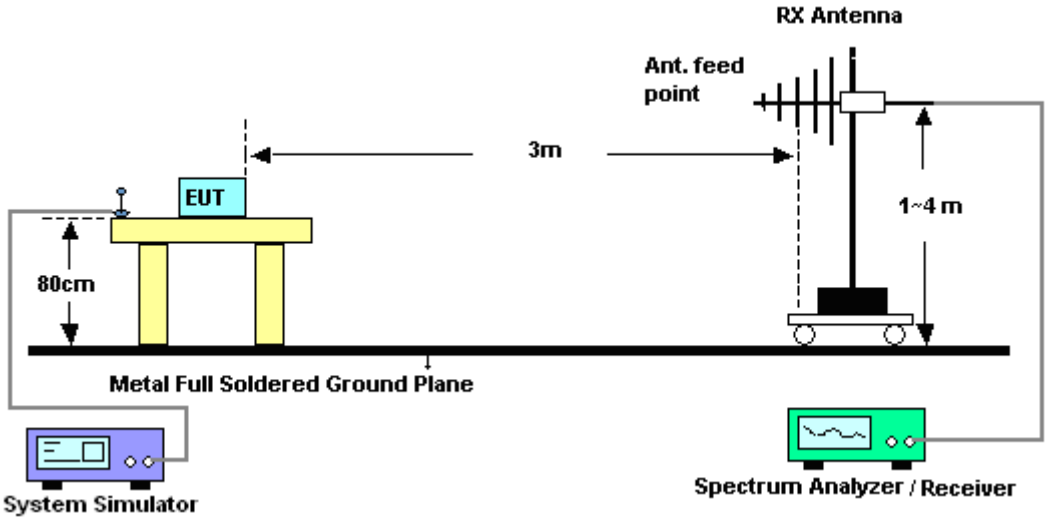

4.2.2 For radiated test above 1GHz

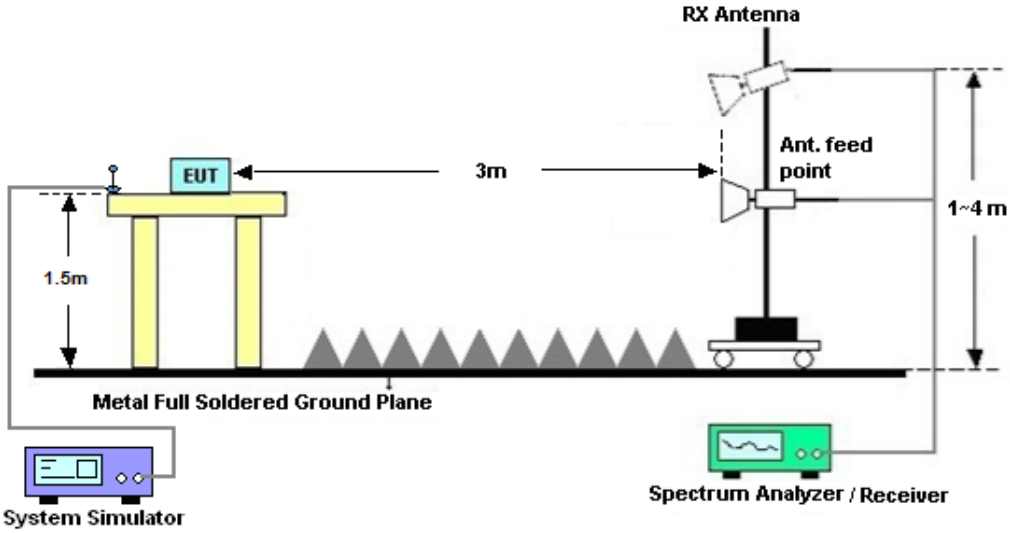

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
    The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jul. 03, 2017~ Jul. 06, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Jul. 03, 2017~ Jul. 06, 2017	Oct. 12, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Apr. 18, 2017	Jul. 12, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Apr. 22, 2017	Jul. 12, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Jul. 12, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	Jul. 12, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Jul. 12, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18~40GHz	Oct. 13, 2016	Jul. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Jul. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3 dB

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.84	22.96	22.98
20	1	49		22.74	22.92	22.78
20	1	99		22.73	22.86	22.78
20	50	0		21.84	22.08	21.92
20	50	24		21.79	22.02	21.89
20	50	50		21.80	21.94	21.87
20	100	0		21.75	22.03	21.90
20	1	0	16-QAM	22.13	22.35	22.33
20	1	49		22.13	22.27	22.07
20	1	99		22.07	22.22	22.08
20	50	0		20.79	21.04	20.92
20	50	24		20.82	21.01	20.88
20	50	50		20.77	20.94	20.84
20	100	0		20.68	20.98	20.87
20	1	0	64QAM	22.05	22.09	22.18
20	1	49		21.88	22.09	21.93
20	1	99		21.91	22.08	21.93
20	50	0		20.73	21.04	20.89
20	50	24		20.82	20.94	20.86
20	50	50		20.77	20.94	20.80
20	100	0		20.69	20.97	20.88
15	1	0	QPSK	22.78	23.05	23.02
15	1	37		22.63	22.88	22.85
15	1	74		22.78	22.90	22.88
15	36	0		21.75	22.03	22.04
15	36	20		21.73	21.96	21.96
15	36	39		21.81	21.97	21.95
15	75	0		21.71	22.01	21.98

15	1	0	16-QAM	22.13	22.40	22.37
15	1	37		21.98	22.26	22.22
15	1	74		22.08	22.27	22.18
15	36	0		20.77	21.01	21.00
15	36	20		20.71	20.96	20.94
15	36	39		20.78	20.93	20.91
15	75	0		20.67	20.92	20.93
15	1	0	64QAM	22.01	22.25	22.19
15	1	37		21.85	22.09	22.06
15	1	74		21.89	22.09	22.07
15	36	0		20.73	20.99	20.99
15	36	20		20.71	20.95	20.93
15	36	39		20.77	20.94	20.9
15	75	0		20.67	20.94	20.93

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.70	22.96	22.93
10	1	25		22.67	22.89	22.86
10	1	49		22.72	22.90	22.88
10	25	0		21.71	21.98	21.94
10	25	12		21.72	21.97	21.93
10	25	25		21.67	21.91	21.88
10	50	0		21.70	21.98	21.95
10	1	0	16-QAM	21.98	22.24	22.25
10	1	25		21.95	22.20	22.19
10	1	49		21.99	22.20	22.18
10	25	0		20.70	20.94	20.89
10	25	12		20.68	20.97	20.92
10	25	25		20.66	20.92	20.88
10	50	0		20.70	20.95	20.92
10	1	0	64QAM	21.92	22.14	22.15
10	1	25		21.83	22.04	22.04
10	1	49		21.86	22.02	22.01
10	25	0		20.70	20.96	20.90
10	25	12		20.71	20.99	20.95
10	25	25		20.65	20.92	20.88
10	50	0		20.66	20.93	20.90
5	1	0	QPSK	22.66	22.96	22.94
5	1	12		22.63	22.89	22.87
5	1	24		22.64	22.89	22.85
5	12	0		21.68	21.94	21.89
5	12	7		21.71	21.97	21.91
5	12	13		21.63	21.91	21.89
5	25	0		21.66	21.93	21.89
5	1	0	16-QAM	21.97	22.28	22.21
5	1	12		21.97	22.22	22.15
5	1	24		21.96	22.21	22.19
5	12	0		20.68	20.93	20.89
5	12	7		20.71	20.99	20.90

5	12	13		20.68	20.96	20.89
5	25	0		20.66	20.89	20.89
5	1	0		21.89	22.08	22.08
5	1	12		21.79	22.06	22.08
5	1	24		21.76	22.08	22.01
5	12	0	**64QAM**	20.69	20.95	20.88
5	12	7		20.69	20.93	20.88
5	12	13		20.66	20.91	20.87
5	25	0		20.65	20.92	20.88

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.63	22.86	22.85
3	1	8		22.71	22.99	22.91
3	1	14		22.68	22.86	22.82
3	8	0		21.65	21.90	21.85
3	8	4		21.69	21.94	21.90
3	8	7		21.61	21.92	21.83
3	15	0		21.64	21.92	21.85
3	1	0	16-QAM	21.91	22.19	22.13
3	1	8		21.97	22.25	22.28
3	1	14		21.92	22.21	22.12
3	8	0		20.72	20.96	20.90
3	8	4		20.74	21.02	20.94
3	8	7		20.68	20.95	20.90
3	15	0		20.65	20.91	20.86
3	1	0	64QAM	21.80	22.00	22.00
3	1	8		21.90	22.13	22.13
3	1	14		21.74	21.96	22.03
3	8	0		20.65	20.92	20.87
3	8	4		20.69	20.91	20.89
3	8	7		20.63	20.90	20.86
3	15	0		20.65	20.89	20.85
1.4	1	0	QPSK	22.58	22.82	22.75
1.4	1	3		22.64	22.87	22.82
1.4	1	5		22.55	22.79	22.75
1.4	3	0		22.63	22.85	22.84
1.4	3	1		22.68	22.92	22.87
1.4	3	3		22.68	22.92	22.88
1.4	6	0		21.57	21.84	21.77
1.4	1	0	16-QAM	21.83	22.16	22.08
1.4	1	3		21.90	22.20	22.15
1.4	1	5		21.86	22.14	22.06
1.4	3	0		21.64	21.88	21.85
1.4	3	1		21.69	21.93	21.89

1.4	3	3		21.67	21.95	21.86
1.4	6	0		20.67	20.93	20.86
1.4	1	0	64QAM	21.76	21.99	21.98
1.4	1	3		21.77	22.09	22.05
1.4	1	5		21.70	21.91	21.97
1.4	3	0		21.69	21.86	21.87
1.4	3	1		21.70	21.9	21.87
1.4	3	3		21.70	21.89	21.89
1.4	6	0		20.59	20.83	20.79

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.04	23.1	23.12
20	1	49		22.78	22.86	22.94
20	1	99		22.84	22.78	22.86
20	50	0		21.98	22.03	22.06
20	50	24		21.93	21.95	22.04
20	50	50		21.94	21.91	21.99
20	100	0		21.91	21.99	22.08
20	1	0	16-QAM	22.34	22.4	22.4
20	1	49		22.12	22.17	22.3
20	1	99		22.17	22.09	22.17
20	50	0		21	21.08	21.06
20	50	24		20.89	20.98	21.08
20	50	50		20.94	20.92	20.99
20	100	0		20.93	20.97	21.06
20	1	0	64QAM	22.24	22.3	22.24
20	1	49		21.96	22.06	22.12
20	1	99		22	21.94	22.03
20	50	0		20.98	21.06	21.01
20	50	24		20.89	20.98	21.07
20	50	50		20.93	20.92	20.98
20	100	0		20.92	20.97	21.08
15	1	0	QPSK	22.98	23.05	23.05
15	1	37		22.78	22.87	22.93
15	1	74		22.88	22.84	22.92
15	36	0		21.93	22.02	22.07
15	36	20		21.87	21.98	22.06
15	36	39		21.98	21.9	21.96
15	75	0		21.91	21.98	22.03
15	1	0	16-QAM	22.28	22.39	22.35
15	1	37		22.1	22.21	22.25
15	1	74		22.18	22.18	22.2
15	36	0		20.96	21.04	21.08

15	36	20		20.92	20.99	21
15	36	39		20.95	20.89	20.99
15	75	0		20.88	20.98	21.04
15	1	0		22.2	22.22	22.19
15	1	37		22.03	22.05	22.08
15	1	74		22.1	22.01	22.07
15	36	0	64QAM	20.95	20.98	21.08
15	36	20		20.92	20.98	21.02
15	36	39		20.97	20.89	20.99
15	75	0		20.88	20.96	21.04

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.85	22.98	23.04
10	1	25		22.75	22.86	22.95
10	1	49		22.7	22.82	22.88
10	25	0		21.81	21.99	22.05
10	25	12		21.78	21.94	22.01
10	25	25		21.74	21.9	21.98
10	50	0		21.78	21.92	22.02
10	1	0	16-QAM	22.13	22.3	22.38
10	1	25		22.01	22.17	22.28
10	1	49		21.98	22.14	22.22
10	25	0		20.82	20.98	21.03
10	25	12		20.79	20.97	20.99
10	25	25		20.75	20.92	20.95
10	50	0		20.8	20.94	21.01
10	1	0	64QAM	21.99	22.13	22.22
10	1	25		21.92	22.01	22.13
10	1	49		21.83	22	22.07
10	25	0		20.81	20.97	21.04
10	25	12		20.8	20.98	20.99
10	25	25		20.74	20.93	20.95
10	50	0		20.77	20.94	21.01
5	1	0	QPSK	22.81	22.9	22.99
5	1	12		22.74	22.85	22.93
5	1	24		22.68	22.86	22.9
5	12	0		21.76	21.9	21.97
5	12	7		21.8	21.95	21.96
5	12	13		21.75	21.88	21.97
5	25	0		21.75	21.9	21.99
5	1	0	16-QAM	22.05	22.27	22.24
5	1	12		22.03	22.23	22.25
5	1	24		21.98	22.13	22.25
5	12	0		20.76	20.92	20.99
5	12	7		20.78	20.97	21

5	12	13		20.75	20.93	20.94
5	25	0		20.78	20.93	20.95
5	1	0	64QAM	21.97	22.09	22.14
5	1	12		21.9	22.02	22.07
5	1	24		21.9	22	22.05
5	12	0		20.77	20.92	21
5	12	7		20.76	20.97	20.97
5	12	13		20.75	20.91	20.93
5	25	0		20.77	20.93	20.93

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.73	22.89	22.94
3	1	8		22.84	22.97	23.01
3	1	14		22.71	22.85	22.88
3	8	0		21.76	21.92	21.93
3	8	4		21.75	21.93	21.98
3	8	7		21.77	21.88	21.95
3	15	0		21.75	21.93	21.95
3	1	0	16-QAM	22.01	22.19	22.19
3	1	8		22.07	22.28	22.31
3	1	14		21.96	22.12	22.19
3	8	0		20.83	20.99	21.01
3	8	4		20.83	21	21.01
3	8	7		20.8	20.94	20.97
3	15	0		20.8	20.91	20.95
3	1	0	64QAM	21.93	22.03	22.08
3	1	8		22	22.13	22.15
3	1	14		21.85	21.97	22
3	8	0		20.76	20.95	20.97
3	8	4		20.81	20.96	20.98
3	8	7		20.73	20.89	20.94
3	15	0		20.77	20.87	20.91
1.4	1	0	QPSK	22.63	22.79	22.85
1.4	1	3		22.73	22.84	22.91
1.4	1	5		22.62	22.78	22.81
1.4	3	0		22.71	22.82	22.87
1.4	3	1		22.76	22.88	22.92
1.4	3	3		22.77	22.91	22.94
1.4	6	0		21.66	21.84	21.88
1.4	1	0	16-QAM	21.94	22.11	22.18
1.4	1	3		22.01	22.17	22.22
1.4	1	5		21.93	22.09	22.17
1.4	3	0		21.72	21.85	21.92
1.4	3	1		21.77	21.9	21.95

1.4	3	3		21.77	21.91	21.95
1.4	6	0		20.77	20.91	20.95
1.4	1	0	64QAM	21.8	22.01	22
1.4	1	3		21.88	22.05	22.11
1.4	1	5		21.78	21.96	22
1.4	3	0		21.73	21.89	21.96
1.4	3	1		21.78	21.91	21.98
1.4	3	3		21.78	21.94	21.97
1.4	6	0		20.7	20.81	20.89

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.88	22.97	23.03
10	1	25		22.94	23.07	23.02
10	1	49		22.91	22.99	22.91
10	25	0		22	22.13	22.12
10	25	12		21.92	22.12	22.09
10	25	25		21.97	22.11	22.06
10	50	0		21.99	22.11	22.08
10	1	0	16-QAM	22.12	22.29	22.33
10	1	25		22.21	22.34	22.3
10	1	49		22.3	22.29	22.04
10	25	0		20.92	21.13	21.12
10	25	12		20.99	21.15	21.12
10	25	25		20.96	21.11	21.07
10	50	0		20.98	21.13	21.12
10	1	0	64QAM	22.04	22.12	22.23
10	1	25		22.08	22.21	22.18
10	1	49		22.12	22.16	22.12
10	25	0		20.89	21.11	21.11
10	25	12		21.01	21.13	21.12
10	25	25		20.97	21.08	21.02
10	50	0		20.99	21.1	21.1
5	1	0	QPSK	22.88	23.05	23.03
5	1	12		22.83	23	22.99
5	1	24		22.91	23.04	22.89
5	12	0		21.89	22.14	22.06
5	12	7		21.91	22.14	22.06
5	12	13		21.97	22.13	22.01
5	25	0		21.88	22.08	22.05
5	1	0	16-QAM	22.08	22.35	22.33
5	1	12		22.04	22.33	22.24
5	1	24		22.16	22.3	22.13
5	12	0		20.9	21.09	21.09
5	12	7		20.93	21.17	21.09

5	12	13		21.01	21.1	21.01
5	25	0		20.89	21.11	21.05
5	1	0	64QAM	22.06	22.2	22.18
5	1	12		21.98	22.18	22.13
5	1	24		22.07	22.14	22.18
5	12	0		20.91	21.08	21.08
5	12	7		20.93	21.11	21.08
5	12	13		20.99	21.07	20.99
5	25	0		20.9	21.1	21.03

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.85	23.02	22.99
3	1	8		22.93	23.12	23.03
3	1	14		22.81	23.02	22.92
3	8	0		21.9	22.07	22.04
3	8	4		21.93	22.1	22.03
3	8	7		21.91	22.08	21.98
3	15	0		21.89	22.08	22.02
3	1	0	16-QAM	22.08	22.31	22.24
3	1	8		22.19	22.4	22.29
3	1	14		22.07	22.26	22.04
3	8	0		20.96	21.14	21.1
3	8	4		20.99	21.15	21.08
3	8	7		20.95	21.12	21.05
3	15	0		20.92	21.09	21.04
3	1	0	64QAM	21.98	22.15	22.11
3	1	8		22.07	22.26	22.2
3	1	14		21.95	22.16	22.16
3	8	0		20.92	21.11	21.03
3	8	4		20.91	21.1	21.07
3	8	7		20.89	21.07	21.04
3	15	0		20.88	21.08	20.97
1.4	1	0	QPSK	22.75	22.94	22.81
1.4	1	3		22.79	23.02	22.87
1.4	1	5		22.71	22.92	22.8
1.4	3	0		22.8	22.97	22.88
1.4	3	1		22.87	23.03	22.93
1.4	3	3		22.84	23.04	22.93
1.4	6	0		21.83	22.02	21.92
1.4	1	0	16-QAM	22	22.25	22.05
1.4	1	3		22.07	22.31	22.13
1.4	1	5		22.01	22.22	22.04
1.4	3	0		21.81	21.99	21.87

1.4	3	1		21.84	22.05	21.92
1.4	3	3		21.87	22.06	21.94
1.4	6	0		20.89	21.06	21
1.4	1	0	64QAM	21.89	22.12	22.01
1.4	1	3		21.91	22.19	22.03
1.4	1	5		21.83	22.09	21.98
1.4	3	0		21.87	22.02	21.95
1.4	3	1		21.87	22.09	21.99
1.4	3	3		21.88	22.09	21.99
1.4	6	0		20.79	20.98	20.88

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.95	23.04	22.91
20	1	49		22.93	22.96	22.76
20	1	99		22.82	22.73	22.44
20	50	0		21.89	21.99	21.8
20	50	24		21.85	21.98	21.67
20	50	50		21.84	21.89	21.58
20	100	0		21.85	21.96	21.64
20	1	0	16-QAM	22.23	22.3	22.2
20	1	49		22.26	22.33	22.1
20	1	99		22.19	22.06	21.77
20	50	0		20.89	21.02	20.84
20	50	24		20.82	20.97	20.67
20	50	50		20.9	20.91	20.59
20	100	0		20.81	20.95	20.64
20	1	0	64QAM	22.16	22.16	22.05
20	1	49		22.1	22.23	21.93
20	1	99		22.03	21.94	21.68
20	50	0		20.84	21	20.82
20	50	24		20.8	20.95	20.64
20	50	50		20.88	20.92	20.61
20	100	0		20.84	20.95	20.65
15	1	0	QPSK	22.88	23.03	22.86
15	1	37		22.91	23.05	22.72
15	1	74		22.86	22.86	22.5
15	36	0		21.79	21.95	21.64
15	36	20		21.88	22.03	21.69
15	36	39		21.74	21.86	21.56
15	75	0		21.77	21.92	21.62
15	1	0	16-QAM	22.2	22.36	22.19
15	1	37		22.21	22.41	22.1
15	1	74		22.17	22.18	21.8
15	36	0		20.83	20.93	20.62
15	36	20		20.87	21.02	20.67

15	36	39		20.74	20.9	20.56
15	75	0		20.76	20.88	20.61
15	1	0	64QAM	22.09	22.24	22.05
15	1	37		22.09	22.21	21.93
15	1	74		22.03	22.08	21.75
15	36	0		20.8	20.92	20.6
15	36	20		20.89	21.01	20.67
15	36	39		20.78	20.89	20.57
15	75	0		20.76	20.94	20.6

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.9	23.02	22.68
10	1	25		22.91	23	22.66
10	1	49		22.74	22.86	22.51
10	25	0		21.89	22	21.66
10	25	12		21.78	21.95	21.64
10	25	25		21.8	21.94	21.59
10	50	0		21.83	21.97	21.62
10	1	0	16-QAM	22.24	22.28	22.02
10	1	25		22.15	22.31	21.93
10	1	49		22.04	22.2	21.76
10	25	0		20.86	20.98	20.65
10	25	12		20.82	20.94	20.62
10	25	25		20.8	20.93	20.55
10	50	0		20.85	20.95	20.62
10	1	0	64QAM	22.09	22.15	21.86
10	1	25		22.04	22.13	21.84
10	1	49		21.95	22.04	21.77
10	25	0		20.82	20.97	20.62
10	25	12		20.59	20.99	20.63
10	25	25		20.57	20.94	20.58
10	50	0		20.55	20.94	20.63
5	1	0	QPSK	22.71	22.83	22.47
5	1	12		22.84	22.97	22.63
5	1	24		22.64	22.78	22.39
5	12	0		21.83	21.79	21.56
5	12	7		21.89	21.88	21.65
5	12	13		21.82	21.93	21.57
5	25	0		21.8	21.93	21.58
5	1	0	16-QAM	21.99	22.13	21.78
5	1	12		22.14	22.25	21.94
5	1	24		21.92	22.08	21.78
5	12	0		20.8	20.94	20.57
5	12	7		20.9	21.03	20.67

5	12	13		20.84	20.95	20.58
5	25	0		20.82	20.89	20.57
5	1	0	64QAM	21.92	21.98	21.66
5	1	12		22.06	21.92	21.56
5	1	24		21.45	21.66	21.69
5	12	0		20.85	20.79	20.81
5	12	7		20.92	21.01	21.43
5	12	13		20.82	20.94	20.58
5	25	0		20.79	20.93	20.56

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.74	22.85	22.47
3	1	8		22.89	23.07	22.71
3	1	14		22.74	22.79	22.47
3	8	0		21.81	21.97	21.61
3	8	4		21.94	22.03	21.66
3	8	7		21.86	21.96	21.59
3	15	0		21.84	21.97	21.62
3	1	0	16-QAM	22.04	22.14	21.8
3	1	8		22.24	22.41	21.99
3	1	14		22	22.12	21.74
3	8	0		20.91	21.04	20.68
3	8	4		20.97	21.07	20.72
3	8	7		20.9	21	20.68
3	15	0		20.88	20.97	20.62
3	1	0	64QAM	21.9	22.04	21.65
3	1	8		22.14	21.88	21.88
3	1	14		21.45	21.83	21.6
3	8	0		20.89	20.6	20.65
3	8	4		21.01	21.03	20.69
3	8	7		20.81	20.97	20.64
3	15	0		20.84	20.96	20.59
1.4	1	0	QPSK	22.77	22.89	22.49
1.4	1	3		22.88	22.99	22.59
1.4	1	5		22.74	22.89	22.49
1.4	3	0		22.84	22.96	22.59
1.4	3	1		22.9	23	22.63
1.4	3	3		22.93	23.01	22.67
1.4	6	0		21.82	21.96	21.58
1.4	1	0	16-QAM	22.06	22.16	21.78
1.4	1	3		22.16	22.28	21.88
1.4	1	5		22.09	22.18	21.77
1.4	3	0		21.83	21.95	21.6
1.4	3	1		21.89	22.01	21.65

1.4	3	3		21.87	22.04	21.66
1.4	6	0		20.91	21.03	20.66
1.4	1	0	64QAM	21.95	22.11	21.73
1.4	1	3		22.01	22.21	21.82
1.4	1	5		21.92	22.07	22.03
1.4	3	0		21.89	22.05	21.79
1.4	3	1		21.94	21.99	21.95
1.4	3	3		21.93	22.04	21.7
1.4	6	0		20.82	20.96	20.02

ERP/EIRP

LTE Band 2 (G_T - L_C = -1.60 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	22.68	22.92	22.88	22.71	22.99	22.91	22.66	22.96	22.94
Conducted Power (Watts)	0.1854	0.1959	0.1941	0.1866	0.1991	0.1954	0.1845	0.1977	0.1968
EIRP(dBm)	21.08	21.32	21.28	21.11	21.39	21.31	21.06	21.36	21.34
EIRP(Watts)	0.1282	0.1355	0.1343	0.1291	0.1377	0.1352	0.1276	0.1368	0.1361

LTE Band 2 (G_T - L_C = -1.60 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	22.70	22.96	22.93	22.78	23.05	23.02	22.84	22.96	22.98
Conducted Power (Watts)	0.1862	0.1977	0.1963	0.1897	0.2018	0.2004	0.1923	0.1977	0.1986
EIRP(dBm)	21.10	21.36	21.33	21.18	21.45	21.42	21.24	21.36	21.38
EIRP(Watts)	0.1288	0.1368	0.1358	0.1312	0.1396	0.1387	0.1330	0.1368	0.1374

LTE Band 2 (G_T - L_C = -1.60 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	21.90	22.20	22.15	21.97	22.25	22.28	21.97	22.28	22.21
Conducted Power (Watts)	0.1549	0.1660	0.1641	0.1574	0.1679	0.1690	0.1574	0.1690	0.1663
EIRP(dBm)	20.30	20.60	20.55	20.37	20.65	20.68	20.37	20.68	20.61
EIRP(Watts)	0.1072	0.1148	0.1135	0.1089	0.1161	0.1169	0.1089	0.1169	0.1151

LTE Band 2 (G_T - L_C = -1.60 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	21.98	22.24	22.25	22.13	22.40	22.37	22.13	22.35	22.33
Conducted Power (Watts)	0.1578	0.1675	0.1679	0.1633	0.1738	0.1726	0.1633	0.1718	0.1710
EIRP(dBm)	20.38	20.64	20.65	20.53	20.80	20.77	20.53	20.75	20.73
EIRP(Watts)	0.1091	0.1159	0.1161	0.1130	0.1202	0.1194	0.1130	0.1189	0.1183

LTE Band 2 (G_T - L_C = -1.60 dB) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
Conducted Power (dBm)	21.77	22.09	22.05	21.90	22.13	22.13	21.89	22.08	22.08
Conducted Power (Watts)	0.1503	0.1618	0.1603	0.1549	0.1633	0.1633	0.1545	0.1614	0.1614
EIRP(dBm)	20.17	20.49	20.45	20.30	20.53	20.53	20.29	20.48	20.48
EIRP(Watts)	0.1040	0.1119	0.1109	0.1072	0.1130	0.1130	0.1069	0.1117	0.1117

LTE Band 2 (G_T - L_C = -1.60 dB) 64QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
Conducted Power (dBm)	21.92	22.14	22.15	22.01	22.25	22.19	22.05	22.09	22.18
Conducted Power (Watts)	0.1556	0.1637	0.1641	0.1589	0.1679	0.1656	0.1603	0.1618	0.1652
EIRP(dBm)	20.32	20.54	20.55	20.41	20.65	20.59	20.45	20.49	20.58
EIRP(Watts)	0.1076	0.1132	0.1135	0.1099	0.1161	0.1146	0.1109	0.1119	0.1143

LTE Band 4 (G_T - L_C = -0.90 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.77	22.91	22.94	22.84	22.97	23.01	22.81	22.90	22.99
Conducted Power (Watts)	0.1892	0.1954	0.1968	0.1923	0.1982	0.2000	0.1910	0.1950	0.1991
EIRP(dBm)	21.87	22.01	22.04	21.94	22.07	22.11	21.91	22.00	22.09
EIRP(Watts)	0.1538	0.1589	0.1600	0.1563	0.1611	0.1626	0.1552	0.1585	0.1618

LTE Band 4 (G_T - L_C = -0.90 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	22.85	22.98	23.04	22.98	23.05	23.05	23.04	23.10	23.12
Conducted Power (Watts)	0.1928	0.1986	0.2014	0.1986	0.2018	0.2018	0.2014	0.2042	0.2051
EIRP(dBm)	21.95	22.08	22.14	22.08	22.15	22.15	22.14	22.20	22.22
EIRP(Watts)	0.1567	0.1614	0.1637	0.1614	0.1641	0.1641	0.1637	0.1660	0.1667

LTE Band 4 (G_T - L_C = -0.90 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	22.01	22.17	22.22	22.07	22.28	22.31	22.05	22.27	22.27
Conducted Power (Watts)	0.1589	0.1648	0.1667	0.1611	0.1690	0.1702	0.1603	0.1687	0.1687
EIRP(dBm)	21.11	21.27	21.32	21.17	21.38	21.41	21.15	21.37	21.34
EIRP(Watts)	0.1291	0.1340	0.1355	0.1309	0.1374	0.1384	0.1303	0.1371	0.1361

LTE Band 4 (G_T - L_C = -0.90 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	22.13	22.30	22.38	22.28	22.39	22.35	22.34	22.40	22.40
Conducted Power (Watts)	0.1633	0.1698	0.1730	0.1690	0.1734	0.1718	0.1714	0.1738	0.1738
EIRP(dBm)	21.23	21.40	21.48	21.38	21.49	21.45	21.44	21.50	21.50
EIRP(Watts)	0.1327	0.1380	0.1406	0.1374	0.1409	0.1396	0.1393	0.1413	0.1413

LTE Band 4 (G_T - L_C = -0.90 dB) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	21.88	22.05	22.11	22.00	22.13	22.15	21.97	22.09	22.14
Conducted Power (Watts)	0.1542	0.1603	0.1626	0.1585	0.1633	0.1641	0.1574	0.1618	0.1637
EIRP(dBm)	20.98	21.15	21.21	21.10	21.23	21.25	21.07	21.19	21.24
EIRP(Watts)	0.1253	0.1303	0.1321	0.1288	0.1327	0.1334	0.1279	0.1315	0.1330

LTE Band 4 (G_T - L_C = -0.90 dB) 64QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	21.99	22.13	22.22	22.20	22.22	22.19	22.24	22.30	22.24
Conducted Power (Watts)	0.1581	0.1633	0.1667	0.1660	0.1667	0.1656	0.1675	0.1698	0.1675
EIRP(dBm)	21.09	21.23	21.32	21.30	21.32	21.29	21.34	21.40	21.34
EIRP(Watts)	0.1285	0.1327	0.1355	0.1349	0.1355	0.1346	0.1361	0.1380	0.1361

LTE Band 5 (G_T - L_C = -1.60 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.84	23.04	22.93	22.93	23.12	23.03	22.88	23.05	23.03
Conducted Power (Watts)	0.1923	0.2014	0.1963	0.1963	0.2051	0.2009	0.1941	0.2018	0.2009
ERP(dBm)	19.09	19.29	19.18	19.18	19.37	19.28	19.13	19.30	19.28
ERP(Watts)	0.0811	0.0849	0.0828	0.0828	0.0865	0.0847	0.0818	0.0851	0.0847

LTE Band 5 (G_T - L_C = -1.60 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.94	23.07	23.02
Conducted Power (Watts)	0.1968	0.2028	0.2004
ERP(dBm)	19.19	19.32	19.27
ERP(Watts)	0.0830	0.0855	0.0845

LTE Band 5 (G_T - L_C = -1.60 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.07	22.31	22.13	22.19	22.40	22.29	22.08	22.35	22.33
Conducted Power (Watts)	0.1611	0.1702	0.1633	0.1656	0.1738	0.1694	0.1614	0.1718	0.1710
ERP(dBm)	18.32	18.56	18.38	18.44	18.65	18.54	18.33	18.60	18.58
ERP(Watts)	0.0679	0.0718	0.0689	0.0698	0.0733	0.0714	0.0681	0.0724	0.0721

LTE Band 5 (G_T - L_C = -1.60 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.21	22.34	22.30
Conducted Power (Watts)	0.1663	0.1714	0.1698
ERP(dBm)	18.46	18.59	18.55
ERP(Watts)	0.0701	0.0723	0.0716

LTE Band 5 (G_T - L_C = -1.60 dB) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	21.91	22.19	22.03	22.07	22.26	22.20	22.06	22.20	22.18
Conducted Power (Watts)	0.1552	0.1656	0.1596	0.1611	0.1683	0.1660	0.1607	0.1660	0.1652
ERP(dBm)	18.16	18.44	18.28	18.32	18.51	18.45	18.31	18.45	18.43
ERP(Watts)	0.0655	0.0698	0.0673	0.0679	0.0710	0.0700	0.0678	0.0700	0.0697

LTE Band 5 (G_T - L_C = -1.60 dB) 64QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.04	22.12	22.23
Conducted Power (Watts)	0.1600	0.1629	0.1671
ERP(dBm)	18.29	18.37	18.48
ERP(Watts)	0.0675	0.0687	0.0705

LTE Band 66 (G_T - L_C = -0.90 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	131979	132322	132665	131987	132322	132657	131997	132322	132647
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1745	1779.3	1711.5	1745	1778.5	1712.5	1745	1777.5
Conducted Power (dBm)	22.93	23.01	22.67	22.89	23.07	22.71	22.84	22.97	22.63
Conducted Power (Watts)	0.1963	0.2000	0.1849	0.1945	0.2028	0.1866	0.1923	0.1982	0.1832
EIRP(dBm)	22.03	22.11	21.77	21.99	22.17	21.81	21.94	22.07	21.73
EIRP(Watts)	0.1596	0.1626	0.1503	0.1581	0.1648	0.1517	0.1563	0.1611	0.1489

LTE Band 66 (G_T - L_C = -0.90 dB)) QPSK									
Bandwidth	10M			15M			20M		
Channel	132022	132322	132622	132047	132322	132597	132072	132322	132572
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	1715	1745	1775	1717.5	1745	1772.5	1720	1745	1770
Conducted Power (dBm)	22.90	23.02	22.68	22.91	23.05	22.72	22.95	23.04	22.91
Conducted Power (Watts)	0.1950	0.2004	0.1854	0.1954	0.2018	0.1871	0.1972	0.2014	0.1954
EIRP(dBm)	22.00	22.12	21.78	22.01	22.15	21.82	22.05	22.14	22.01
EIRP(Watts)	0.1585	0.1629	0.1507	0.1589	0.1641	0.1521	0.1603	0.1637	0.1589

LTE Band 66 (G_T - L_C =-0.90 dB)) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	131979	132322	132665	131987	132322	132657	131997	132322	132647
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1745	1779.3	1711.5	1745	1778.5	1712.5	1745	1777.5
Conducted Power (dBm)	22.16	22.28	21.88	22.24	22.41	21.99	22.14	22.25	22.25
Conducted Power (Watts)	0.1644	0.1690	0.1542	0.1675	0.1742	0.1581	0.1637	0.1679	0.1679
EIRP(dBm)	21.26	21.38	20.98	21.34	21.51	21.09	21.24	21.35	21.04
EIRP(Watts)	0.1337	0.1374	0.1253	0.1361	0.1416	0.1285	0.1330	0.1365	0.1271

LTE Band 66 (G_T - L_C = -0.90 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	132022	132322	132622	132047	132322	132597	132072	132322	132572
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	1715	1745	1775	1717.5	1745	1772.5	1720	1745	1770
Conducted Power (dBm)	22.15	22.31	21.93	22.21	22.41	22.10	22.26	22.33	22.10
Conducted Power (Watts)	0.1641	0.1702	0.1560	0.1663	0.1742	0.1622	0.1683	0.1710	0.1622
EIRP(dBm)	21.25	21.41	21.03	21.31	21.51	21.20	21.36	21.43	21.20
EIRP(Watts)	0.1334	0.1384	0.1268	0.1352	0.1416	0.1318	0.1368	0.1390	0.1318

LTE Band 66 (G_T - L_C = -0.90 dB)) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	131979	132322	132665	131987	132322	132657	131997	132322	132647
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1745	1779.3	1711.5	1745	1778.5	1712.5	1745	1777.5
Conducted Power (dBm)	22.01	22.21	21.82	22.14	21.88	21.88	22.06	21.92	21.56
Conducted Power (Watts)	0.1589	0.1663	0.1521	0.1637	0.1542	0.1542	0.1607	0.1556	0.1432
EIRP(dBm)	21.11	21.31	20.92	21.24	20.98	20.98	21.16	21.02	20.66
EIRP(Watts)	0.1291	0.1352	0.1236	0.1330	0.1253	0.1253	0.1306	0.1265	0.1164

LTE Band 66 (G_T - L_C = -0.90 dB) 64QAM									
Bandwidth	10M			15M			20M		
Channel	132022	132322	132622	132047	132322	132597	132072	132322	132572
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(Mid)
Frequency (MHz)	1715	1745	1775	1717.5	1745	1772.5	1720	1745	1770
Conducted Power (dBm)	22.09	22.15	21.86	22.09	22.24	22.05	22.10	22.23	21.93
Conducted Power (Watts)	0.1618	0.1641	0.1535	0.1618	0.1675	0.1603	0.1622	0.1671	0.1560
EIRP(dBm)	21.19	21.25	20.96	21.19	21.34	21.15	21.20	21.33	21.03
EIRP(Watts)	0.1315	0.1334	0.1247	0.1315	0.1361	0.1303	0.1318	0.1358	0.1268

Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.41	4.96	5.30	5.97	PASS
Middle CH	4.87	4.84	5.71	5.83	
Highest CH	4.81	4.84	6.03	5.97	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	4.96	5.88	PASS		
Middle CH	5.74	5.68			
Highest CH	5.39	5.86			

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.30	4.99	6.12	6.14	PASS
Middle CH	4.99	5.28	5.80	6.06	
Highest CH	5.10	5.30	6.12	6.38	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	6.09	6.00	PASS		
Middle CH	5.62	6.03			
Highest CH	5.80	6.26			

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.42	5.28	6.41	6.14	PASS
Middle CH	5.28	5.42	5.97	6.2	
Highest CH	5.25	5.42	5.94	6.26	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	5.8	6.23	PASS		
Middle CH	5.71	6.26			
Highest CH	5.88	6.26			

Mode	LTE Band 66 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.04	5.07	6.12	6.09	PASS
Middle CH	5.07	5.39	5.8	6.35	
Highest CH	5.42	5.19	6.35	6.12	

Mod.	64QAM		Limit: 13dB
RB Size	1RB	Full RB	Result
Lowest CH	5.68	6.03	PASS
Middle CH	5.57	6.29	
Highest CH	5.91	6.17	

LTE Band 2 / 20MHz / QPSK

Lowest Channel / 1RB

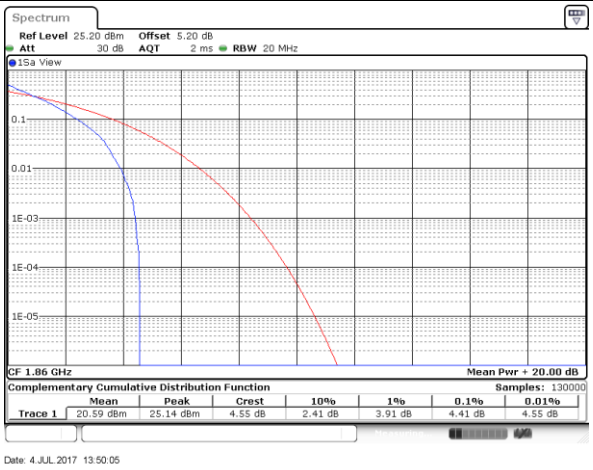

Lowest Channel / Full RB

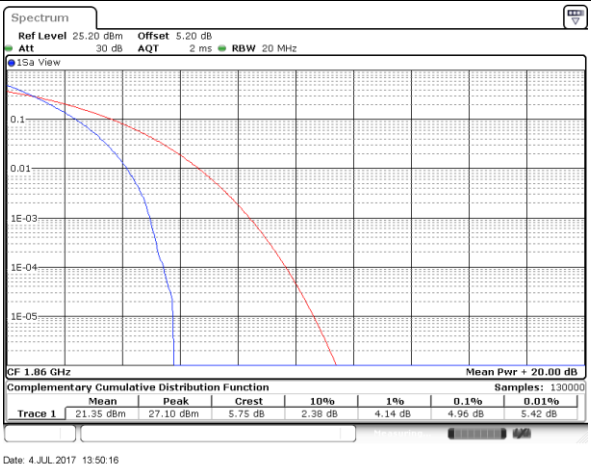

Middle Channel / 1RB

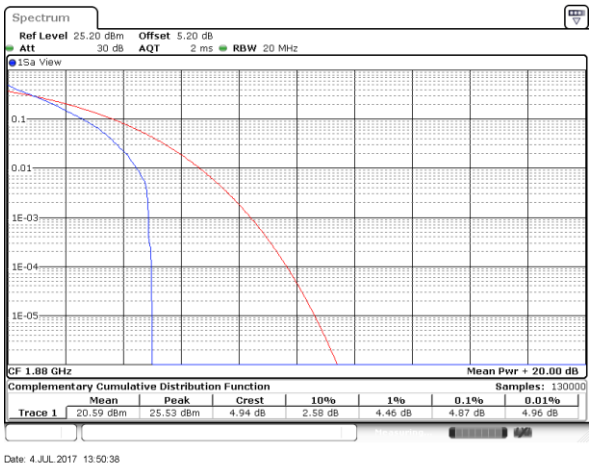

Middle Channel / Full RB

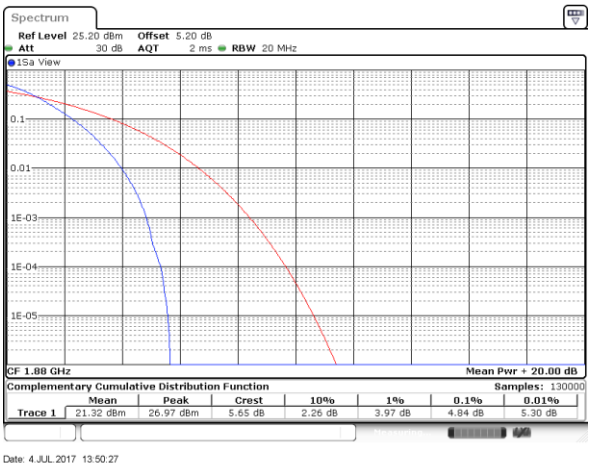

Highest Channel / 1RB

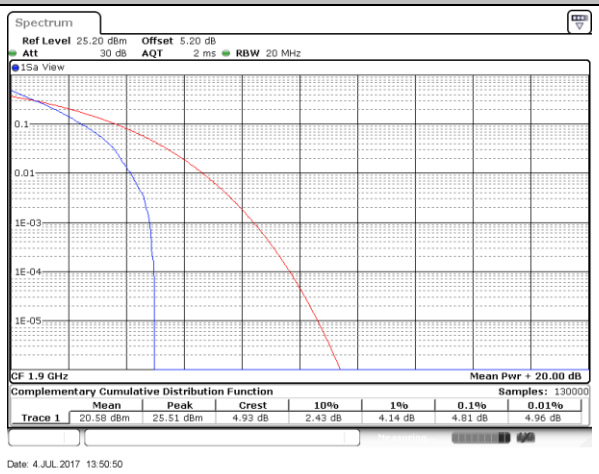

Highest Channel / Full RB

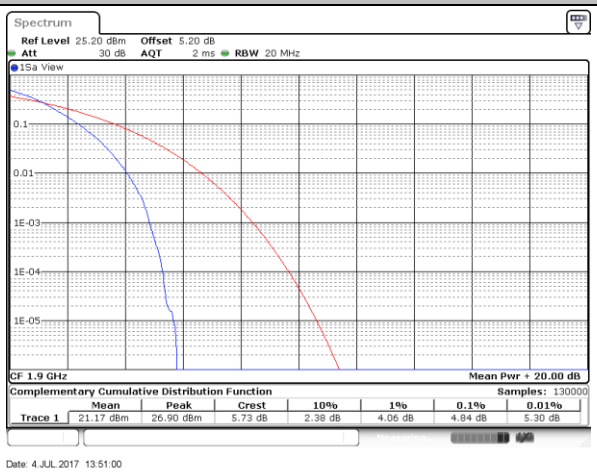

LTE Band 2 / 20MHz / 16QAM

Lowest Channel / 1RB

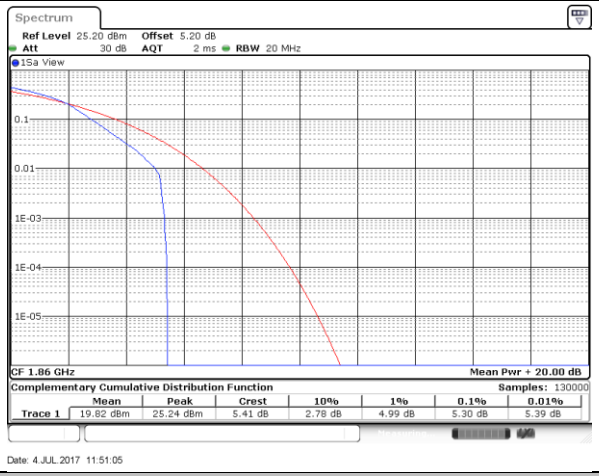

Lowest Channel / Full RB

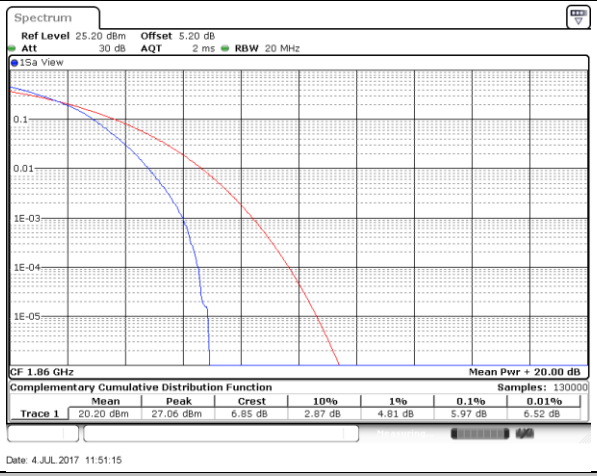

Middle Channel / 1RB

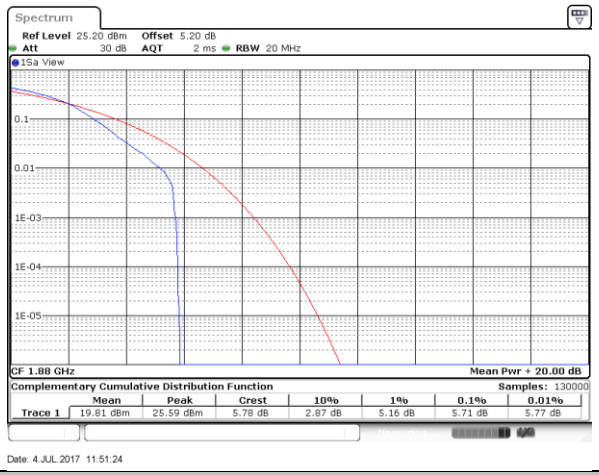

Middle Channel / Full RB

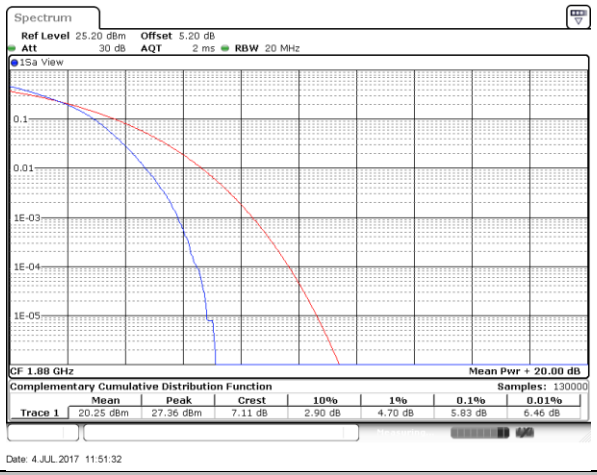

Highest Channel / 1RB

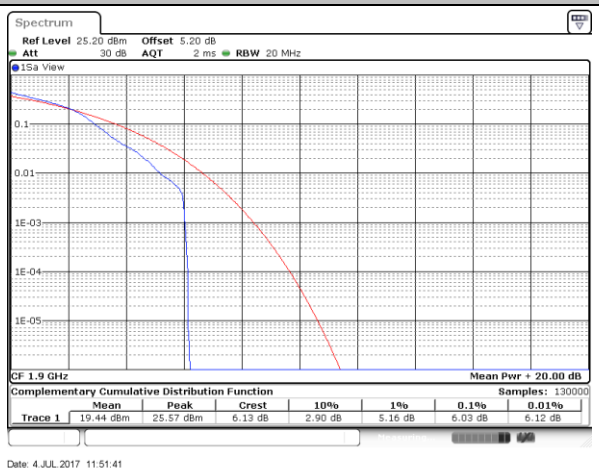

Highest Channel / Full RB

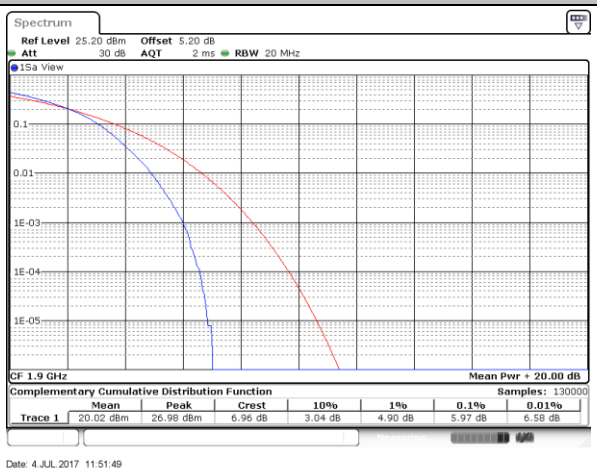

LTE Band 2 / 20MHz / 64QAM

Lowest Channel / 1RB

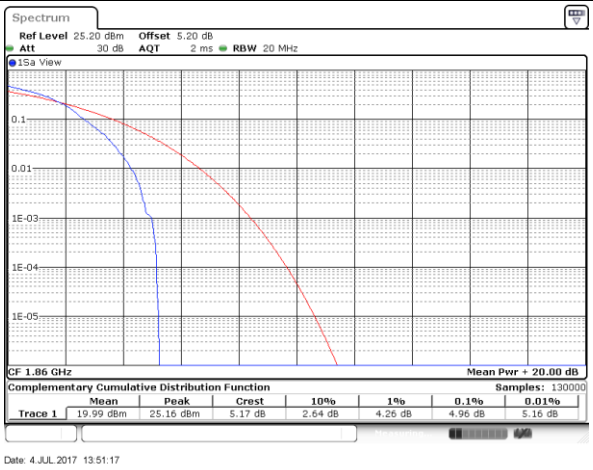

Lowest Channel / Full RB

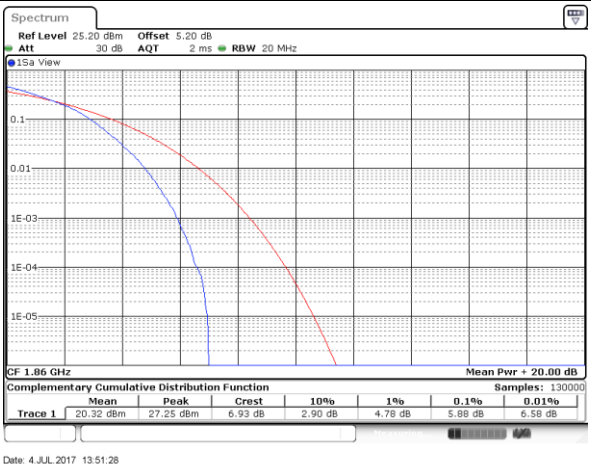

Middle Channel / 1RB

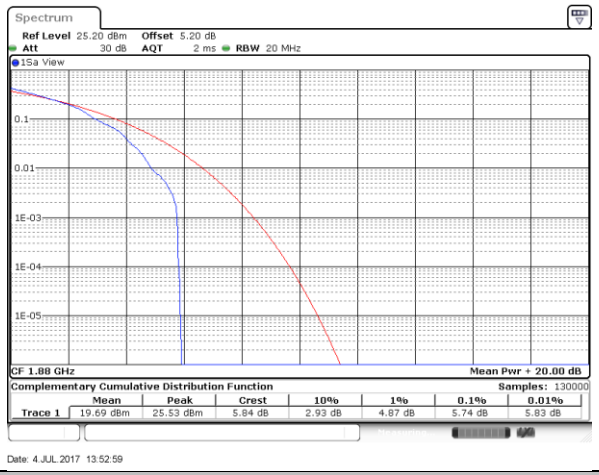

Middle Channel / Full RB

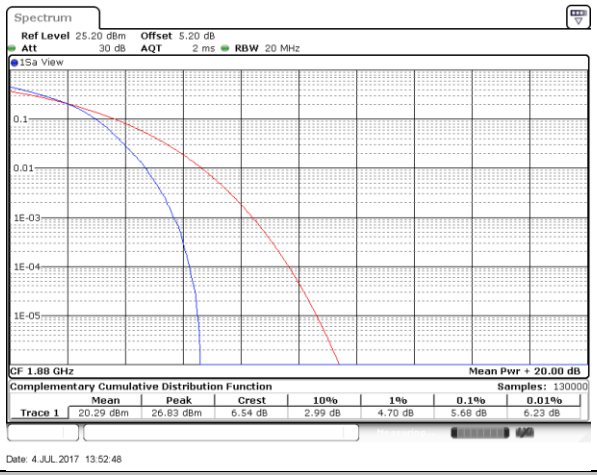

Highest Channel / 1RB

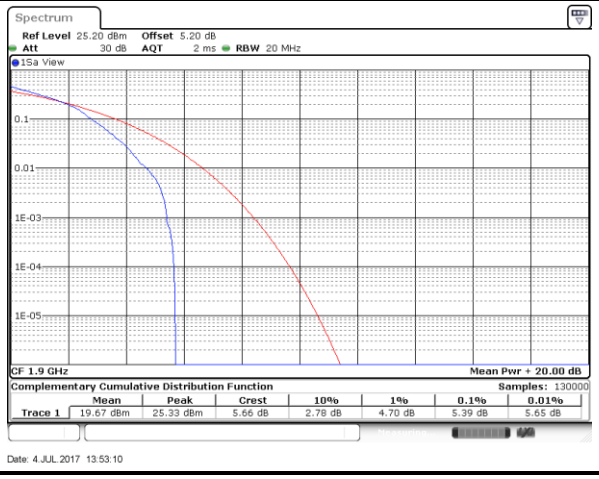

Highest Channel / Full RB

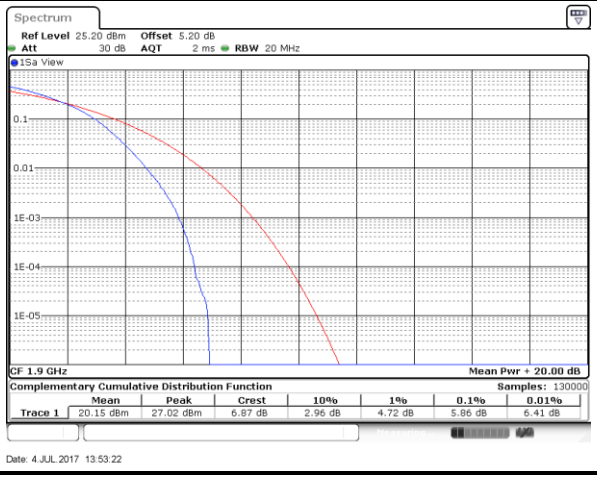

LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

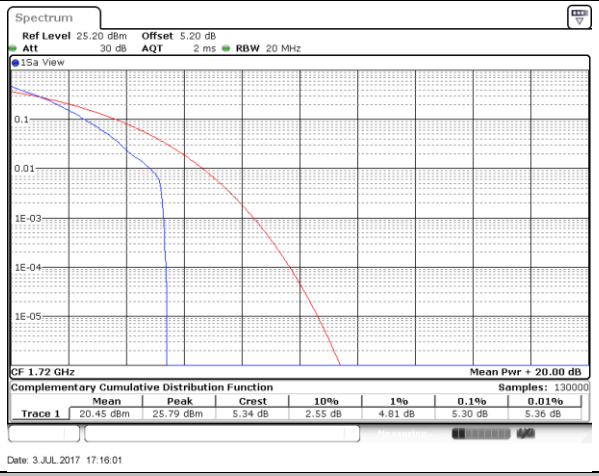

Lowest Channel / Full RB

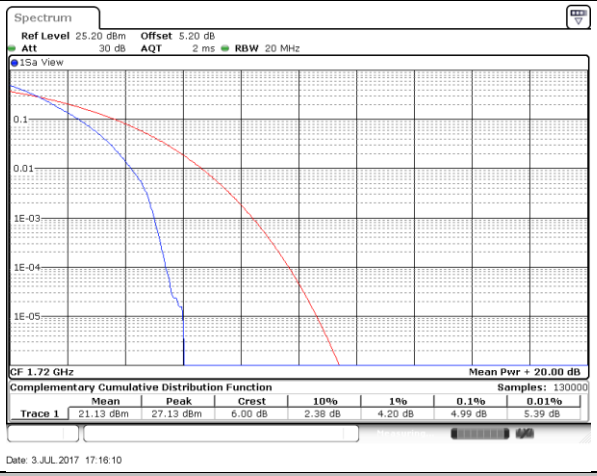

Middle Channel / 1RB

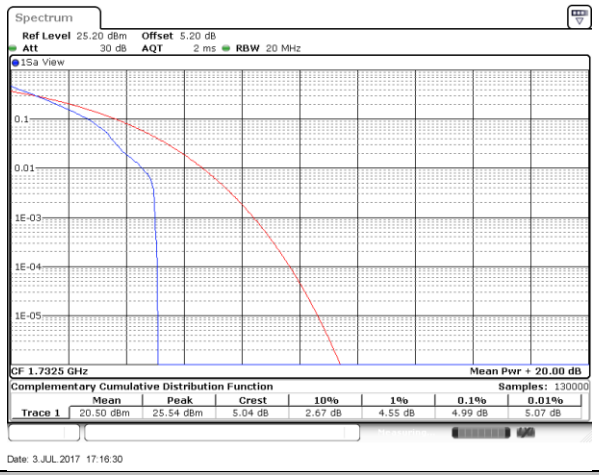

Middle Channel / Full RB

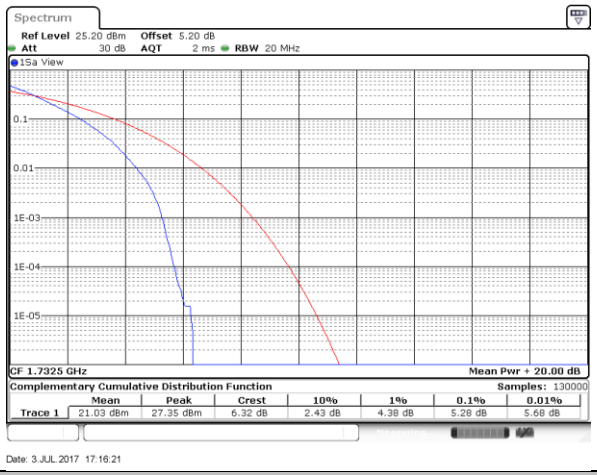

Highest Channel / 1RB

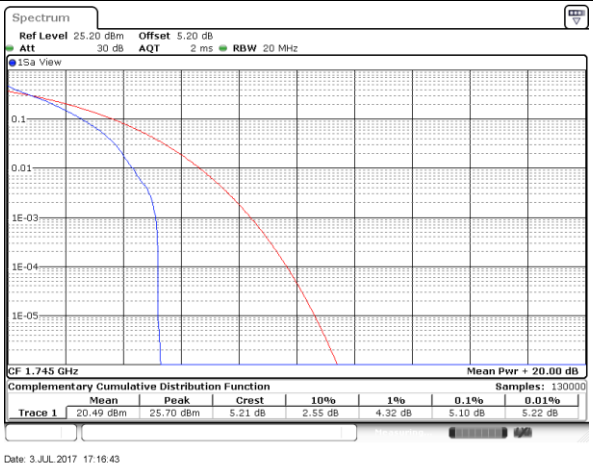

Highest Channel / Full RB

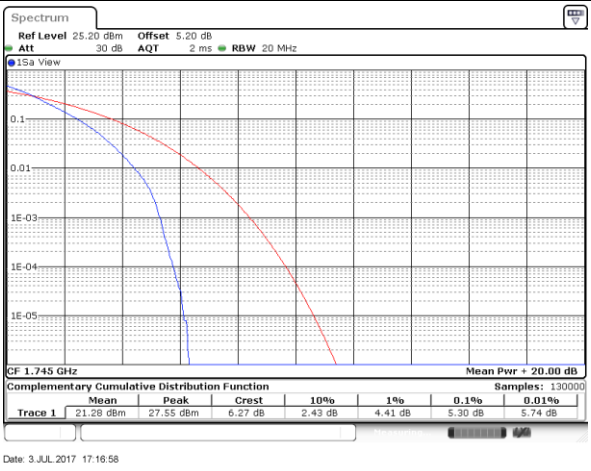

LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

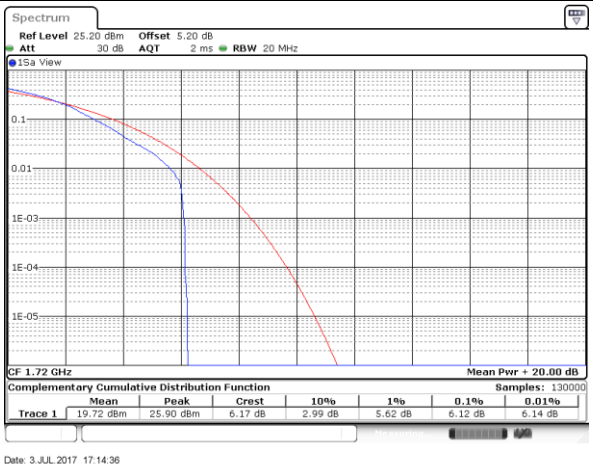

Lowest Channel / Full RB

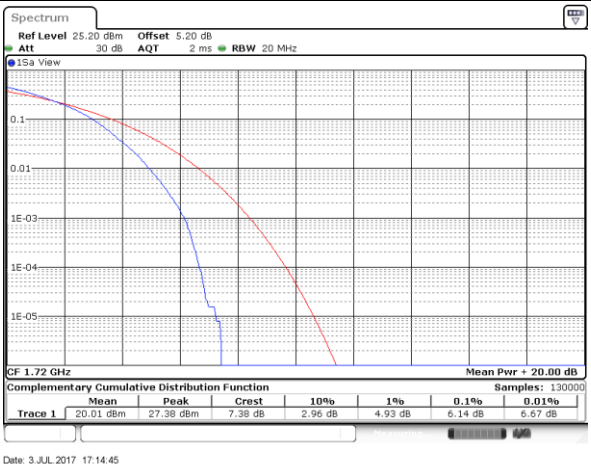

Middle Channel / 1RB

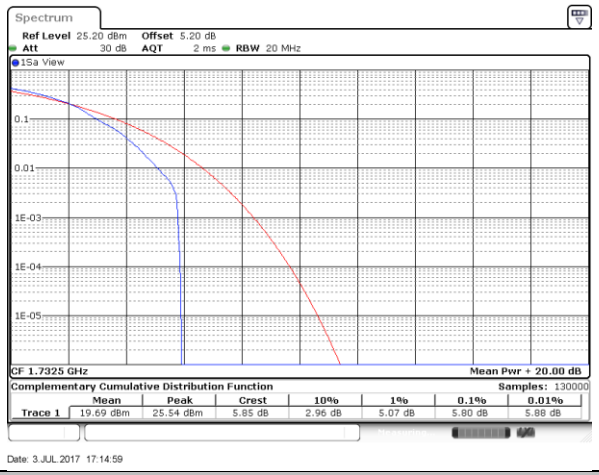

Middle Channel / Full RB

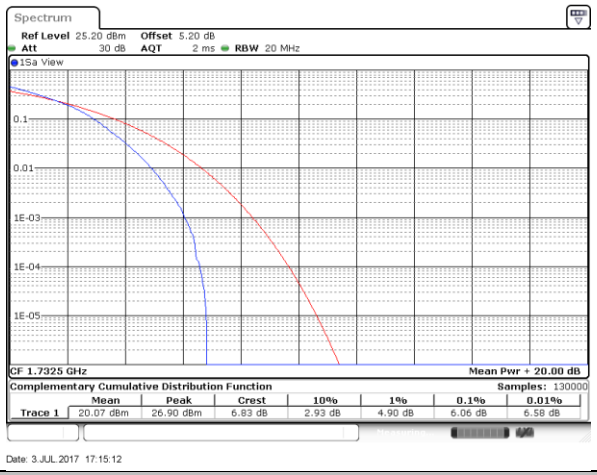

Highest Channel / 1RB

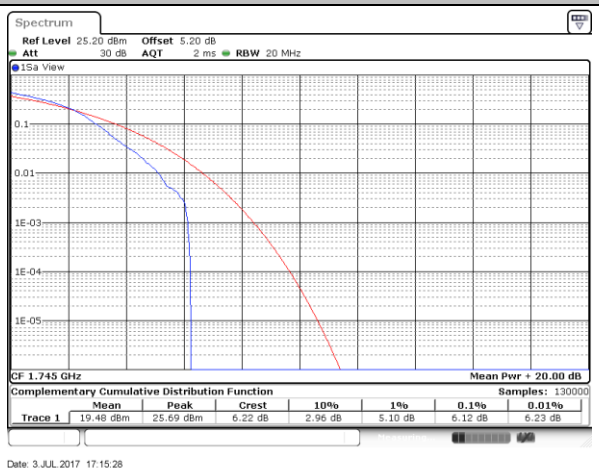

Highest Channel / Full RB

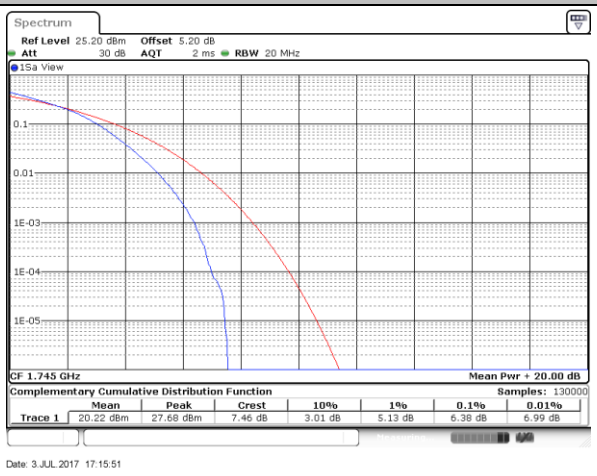

LTE Band 4 / 20MHz / 64QAM

Lowest Channel / 1RB

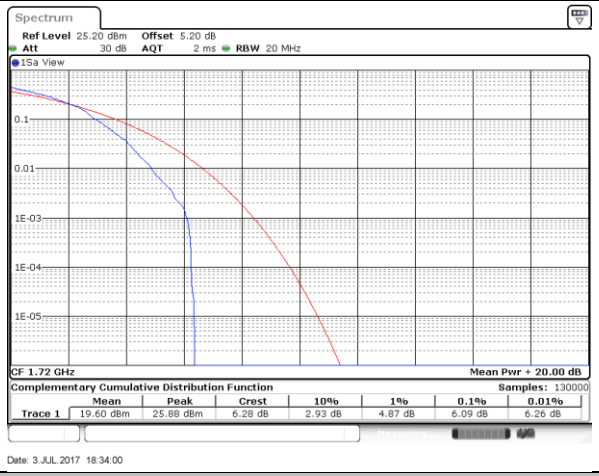

Lowest Channel / Full RB

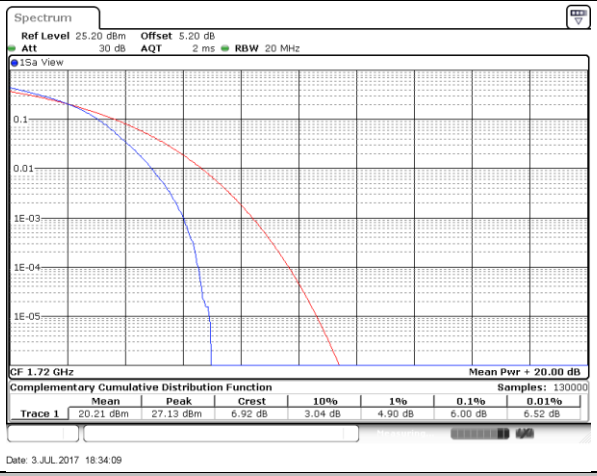

Middle Channel / 1RB

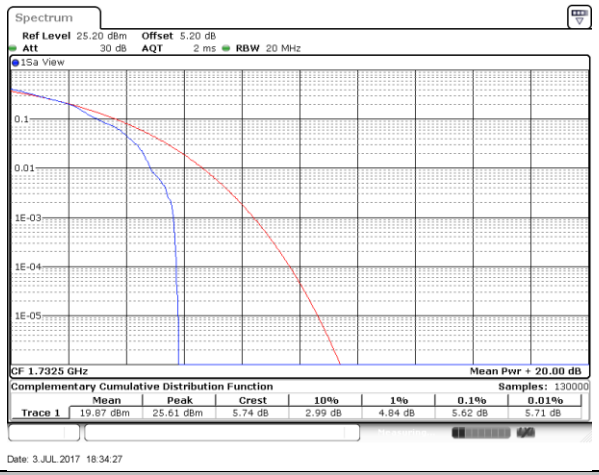

Middle Channel / Full RB

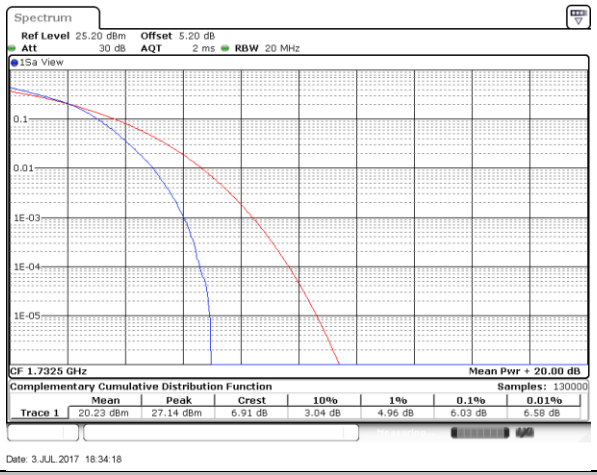

Highest Channel / 1RB

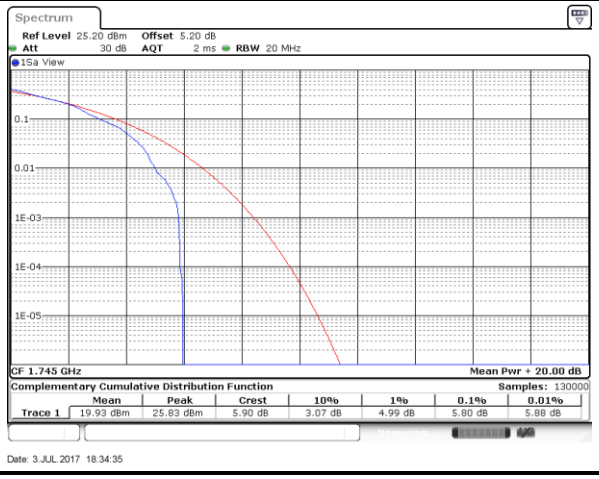

Highest Channel / Full RB

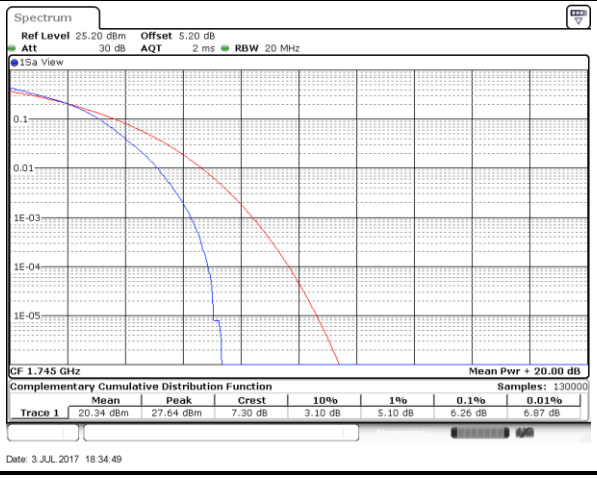

LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB

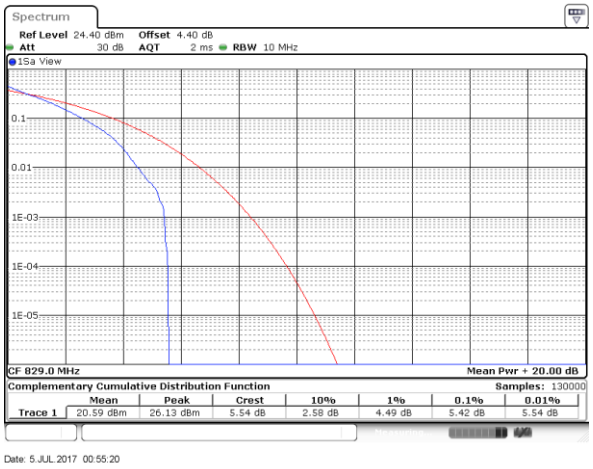

Lowest Channel / Full RB

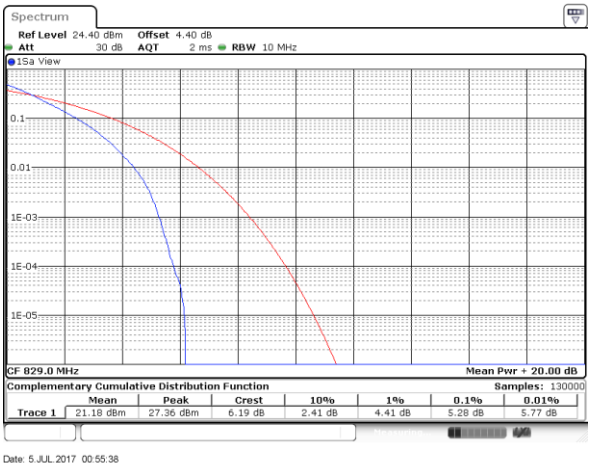

Middle Channel / 1RB

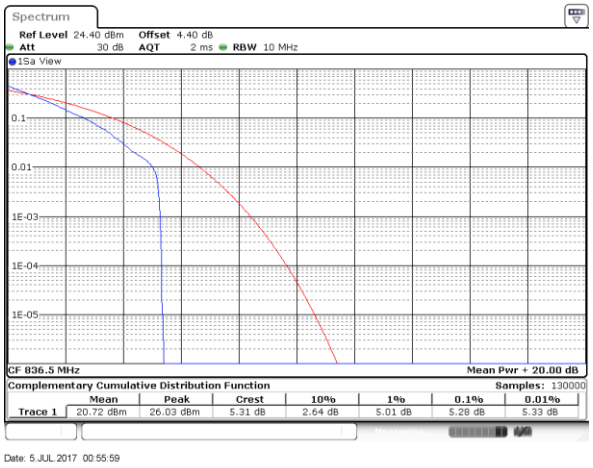

Middle Channel / Full RB

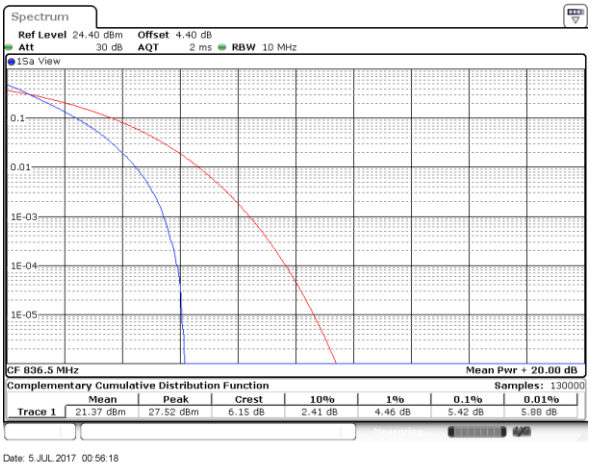

Highest Channel / 1RB

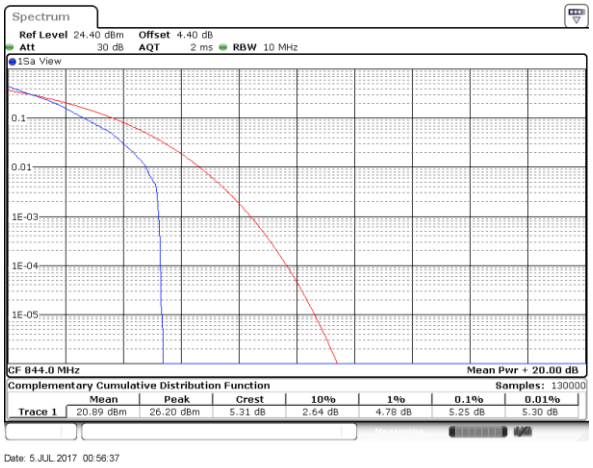

Highest Channel / Full RB

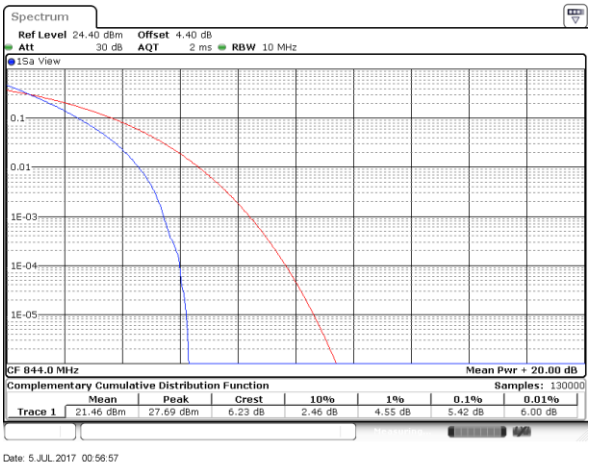

LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

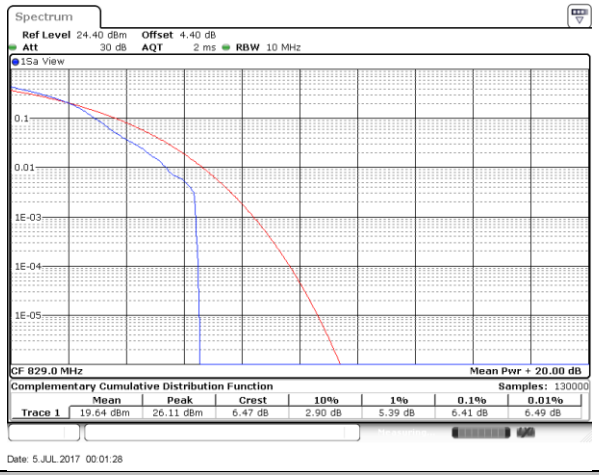

Lowest Channel / Full RB

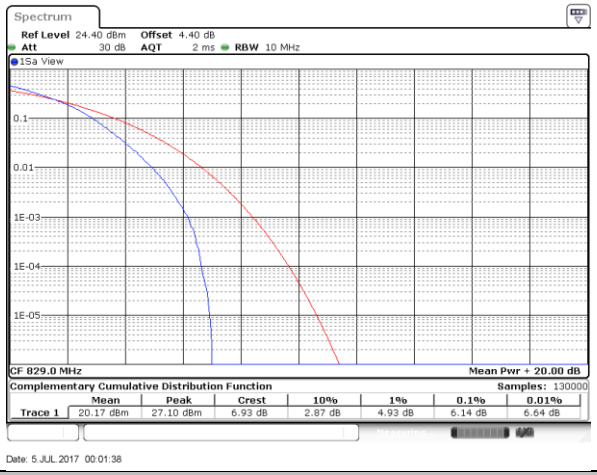

Middle Channel / 1RB

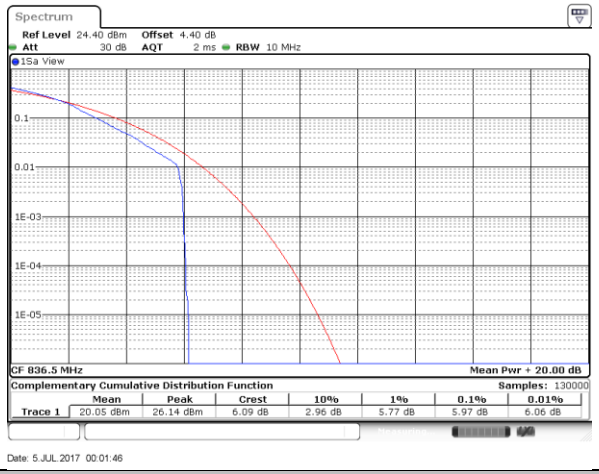

Middle Channel / Full RB

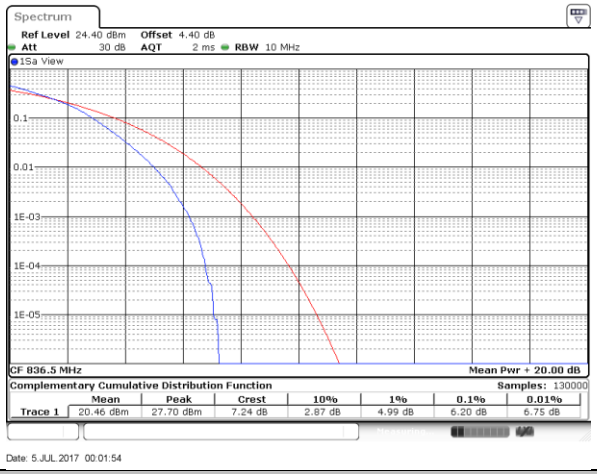

Highest Channel / 1RB

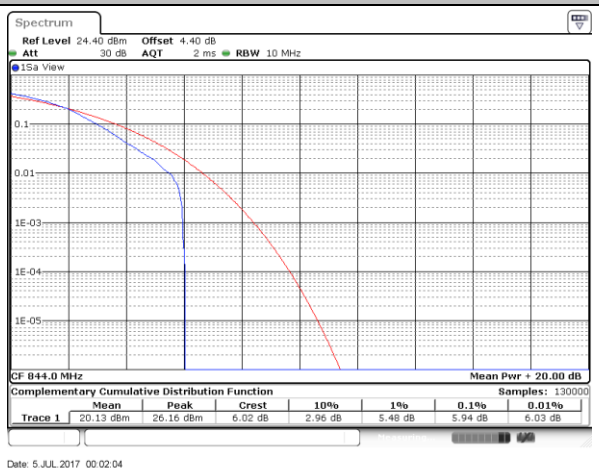

Highest Channel / Full RB

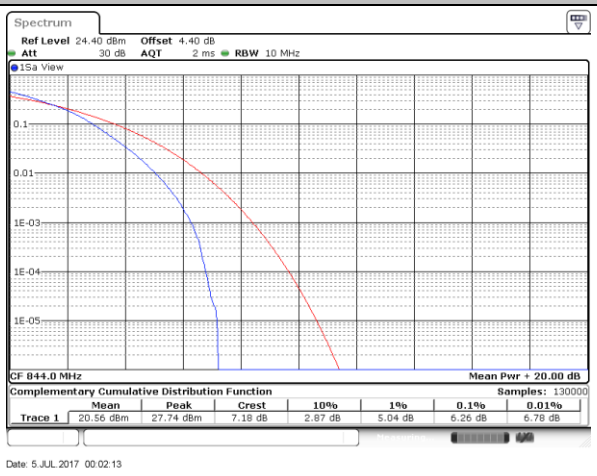

LTE Band 5 / 10MHz / 64QAM

Lowest Channel / 1RB

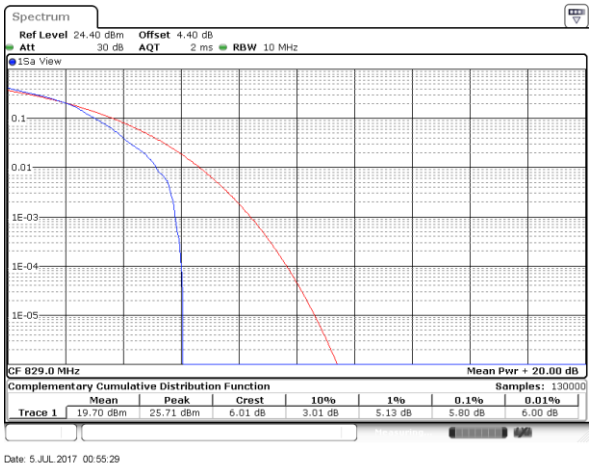

Lowest Channel / Full RB

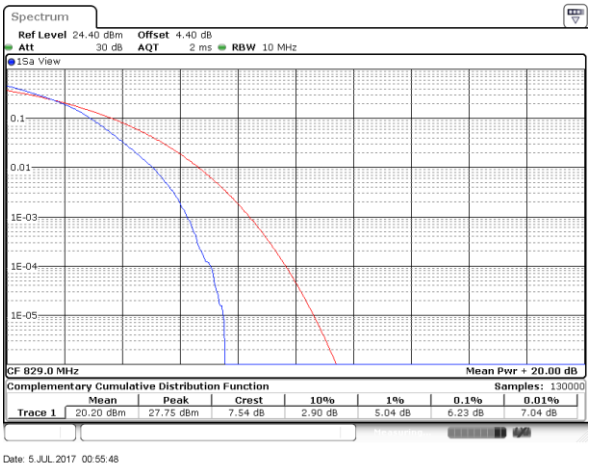

Middle Channel / 1RB

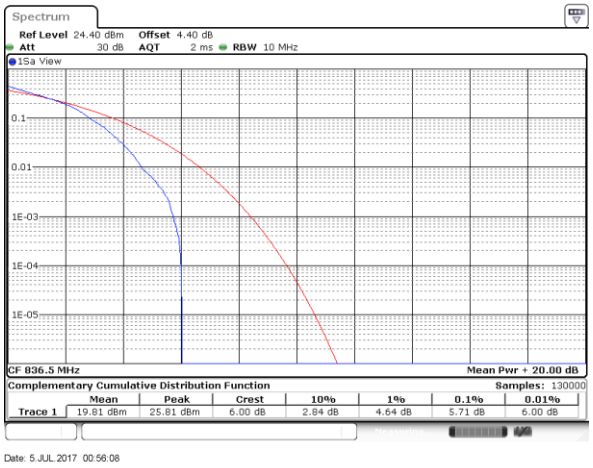

Middle Channel / Full RB

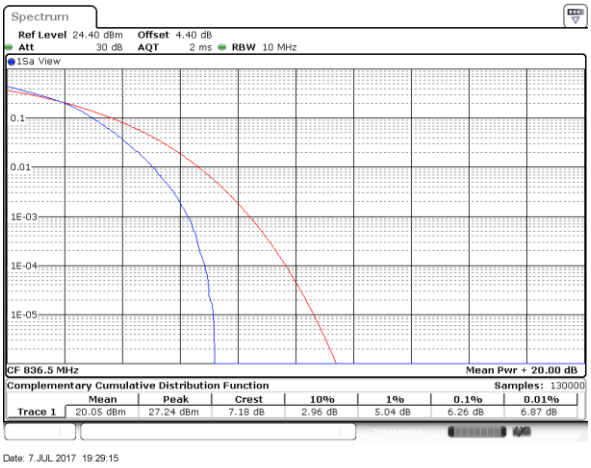

Highest Channel / 1RB

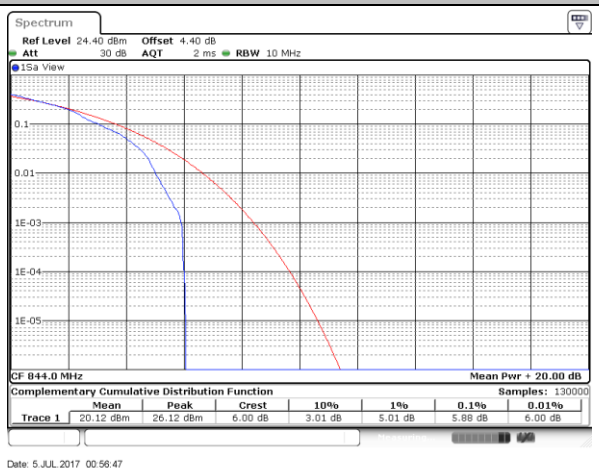

Highest Channel / Full RB

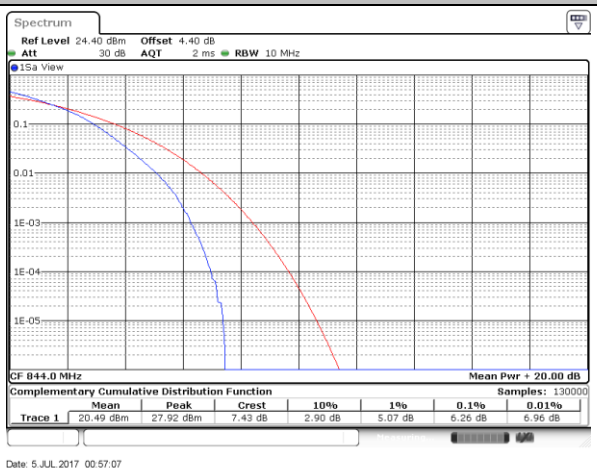

LTE Band 66 / 20MHz / QPSK

Lowest Channel / 1RB

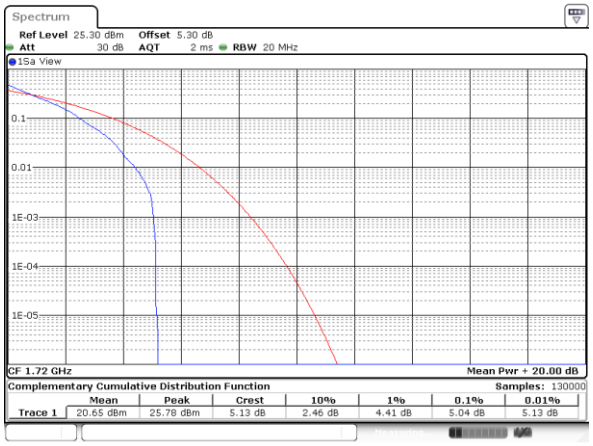

Lowest Channel / Full RB

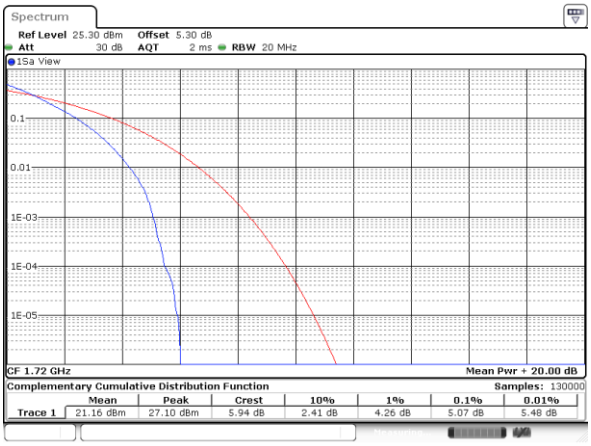

Middle Channel / 1RB

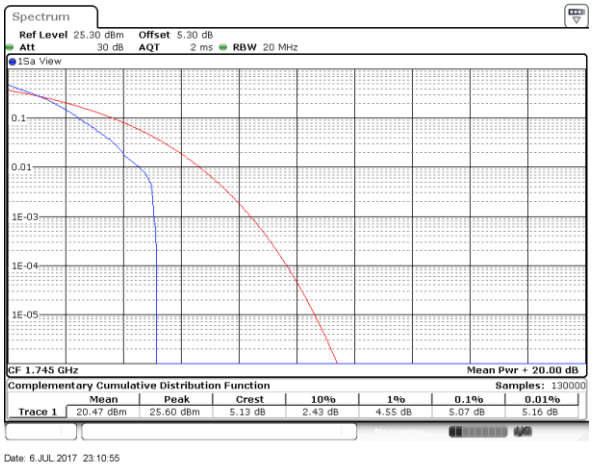

Middle Channel / Full RB

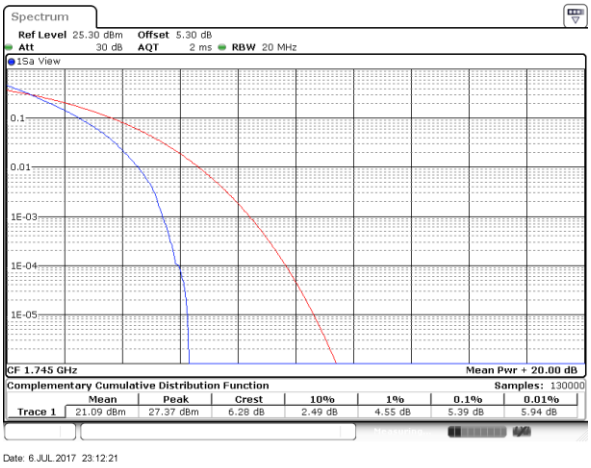

Highest Channel / 1RB

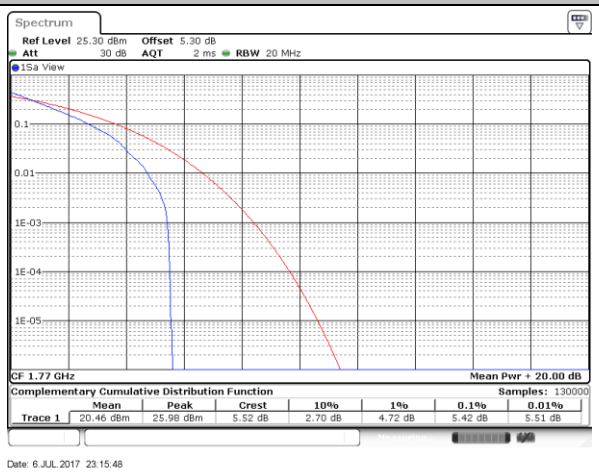

Highest Channel / Full RB

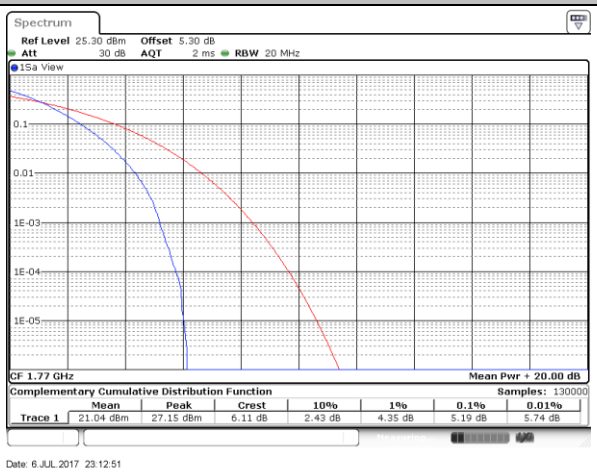

LTE Band 66 / 20MHz / 16QAM

Lowest Channel / 1RB

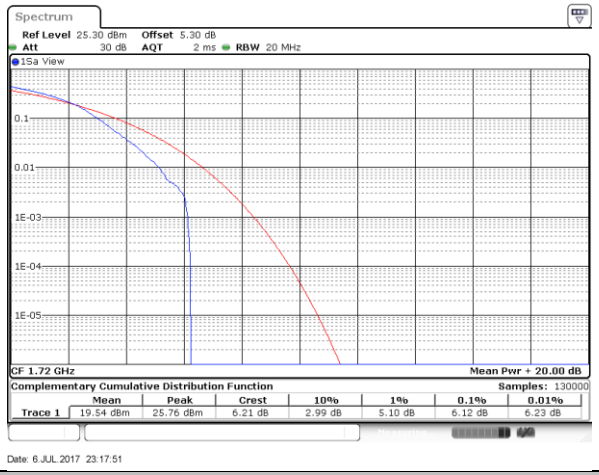

Lowest Channel / Full RB

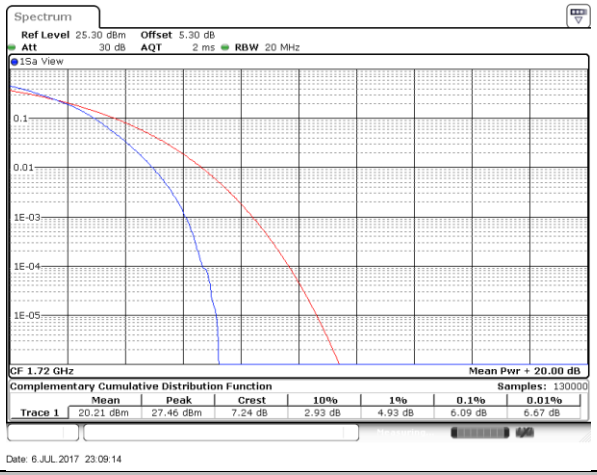

Middle Channel / 1RB

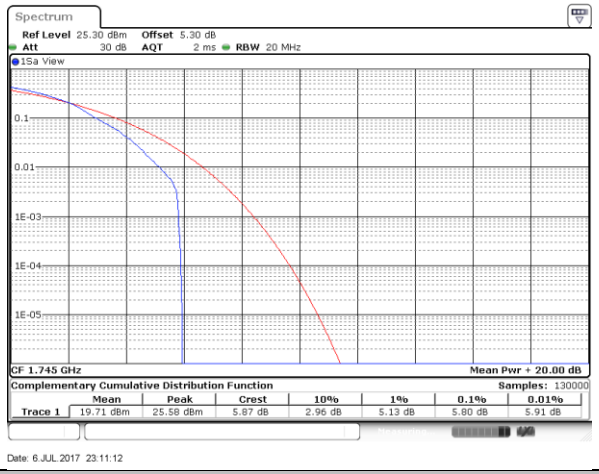

Middle Channel / Full RB

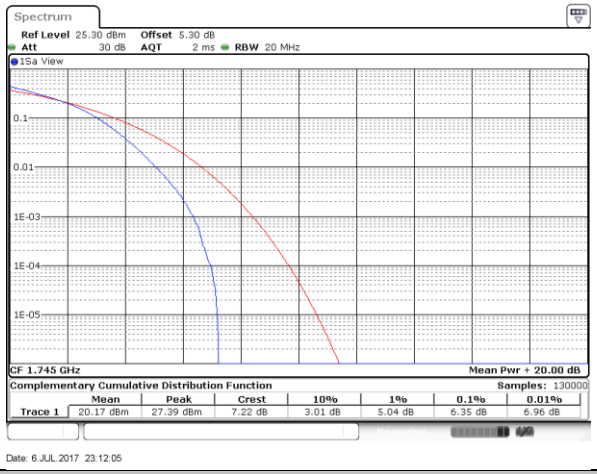

Highest Channel / 1RB

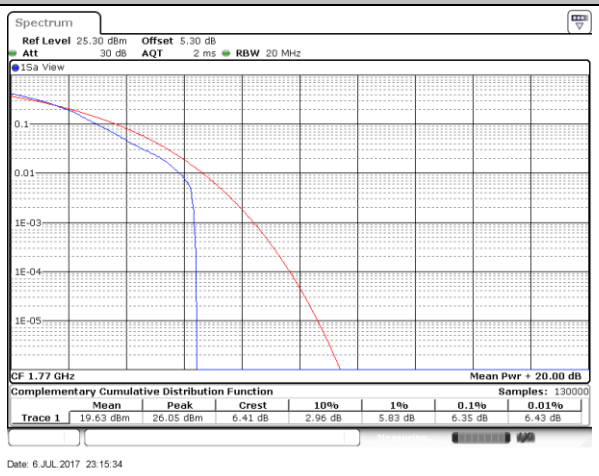

Highest Channel / Full RB

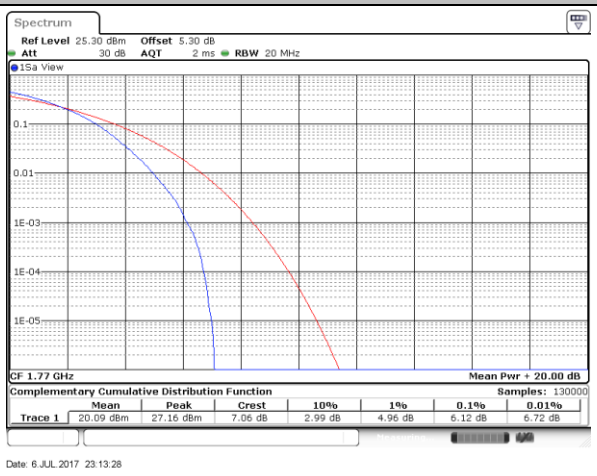

LTE Band 66 / 20MHz / 64QAM

Lowest Channel / 1RB

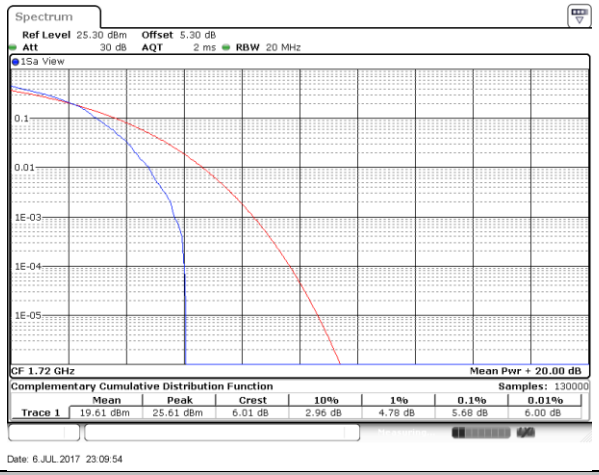

Lowest Channel / Full RB

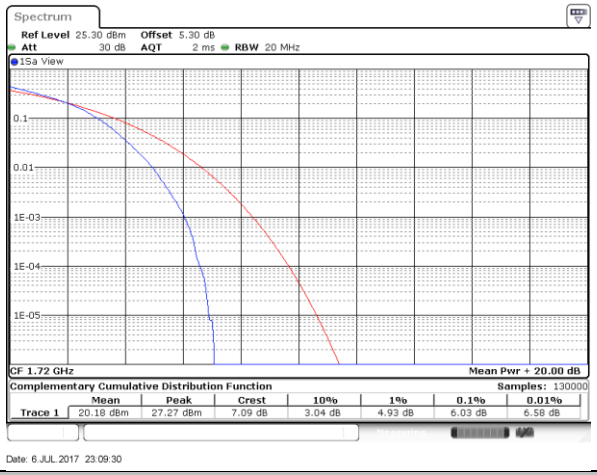

Middle Channel / 1RB

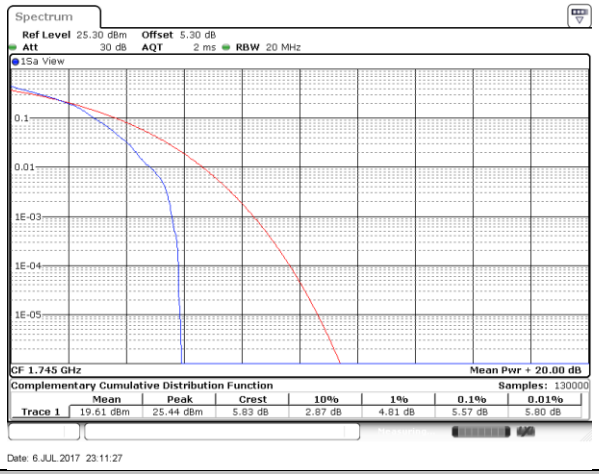

Middle Channel / Full RB

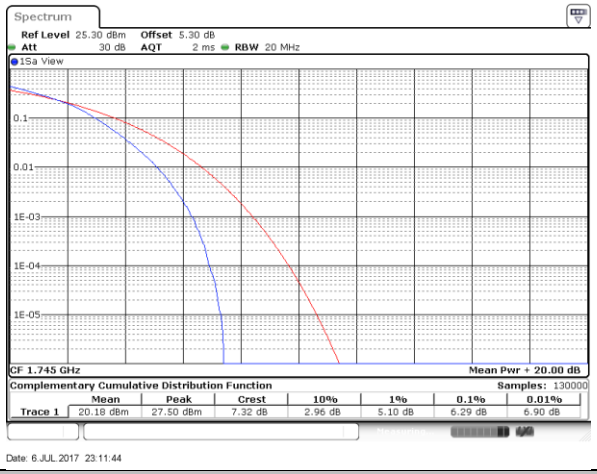

Highest Channel / 1RB

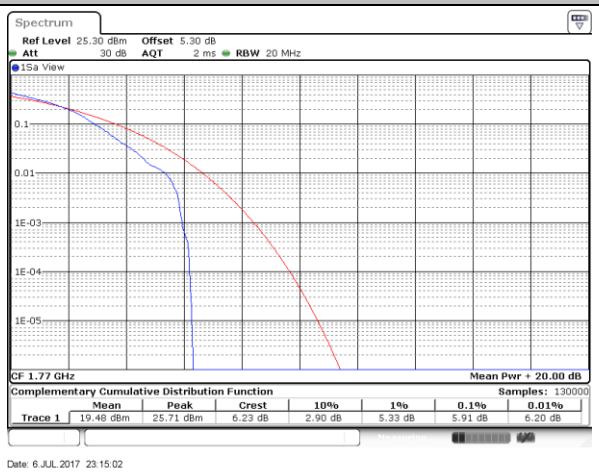

Highest Channel / Full RB

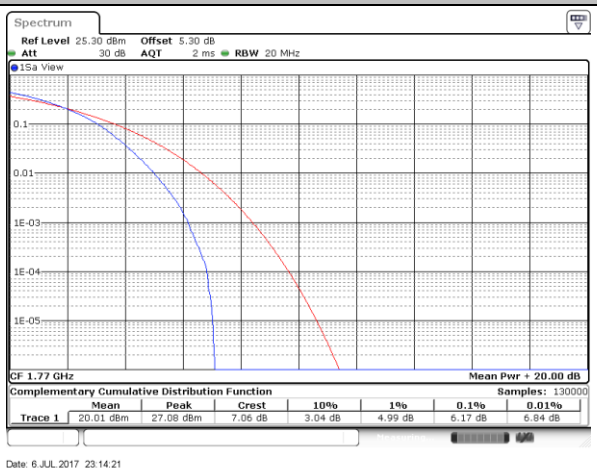

26dB Bandwidth

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.239	1.231	3.039	2.937	4.855	4.925	9.93	9.81	14.296	14.296	20.14	20.22
Middle CH	1.233	1.231	3.039	2.991	4.915	4.835	9.77	9.67	14.416	14.505	20.26	20.1
Highest CH	1.231	1.231	3.033	3.051	4.855	4.915	9.95	9.93	14.326	14.535	20.18	20.14
BW	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz						
Mod.	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM						
Lowest CH	1.248	3.003	4.895	9.81	14.565	20.38						
Middle CH	1.225	3.075	4.965	9.91	14.356	20.1						
Highest CH	1.231	3.027	4.925	9.67	14.116	20.06						

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.23	3.03	2.99	4.86	4.86	9.79	9.61	14.27	14.48	20.06	20.14
Middle CH	1.22	1.23	2.97	2.96	4.91	4.89	9.69	9.69	14.33	14.42	20.14	20.18
Highest CH	1.23	1.22	3.03	3.01	4.84	4.87	9.63	9.73	14.36	14.39	20.18	20.14
BW	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz						
Mod.	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM						
Lowest CH	1.23	3.00	4.88	9.77	14.48	20.02						
Middle CH	1.22	3.00	4.86	9.89	14.36	20.18						
Highest CH	1.23	3.02	4.99	9.71	14.66	20.06						

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		1.4MHz	3MHz	5MHz	10MHz
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	64QAM	64QAM	64QAM	64QAM
Lowest CH	1.228	1.239	3.039	2.991	4.915	4.975	9.73	9.67	1.24	3.03	4.87	9.79
Middle CH	1.225	1.225	3.045	2.997	4.895	4.895	9.85	9.71	1.22	3.06	4.84	9.65
Highest CH	1.225	1.228	3.015	2.967	4.885	4.955	9.77	9.73	1.21	3.05	4.86	9.87

Mode	LTE Band 66 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.222	1.222	3.033	3.009	4.885	4.855	9.89	9.69	14.565	14.535	20.22	20.14
Middle CH	1.225	1.234	2.991	3.033	4.955	4.925	9.73	9.95	14.446	14.236	20.1	20.18
Highest CH	1.231	1.225	2.997	2.967	4.925	4.885	9.81	9.87	14.416	14.505	20.22	20.22

BW	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
Mod.	64QAM	64QAM	64QAM	64QAM	64QAM	64QAM
Lowest CH	1.214	3.021	4.895	9.69	14.535	19.98
Middle CH	1.220	2.991	4.875	9.67	14.505	20.34
Highest CH	1.236	2.991	4.845	9.65	14.266	19.98

LTE Band 2

Lowest Channel / 1.4MHz / QPSK

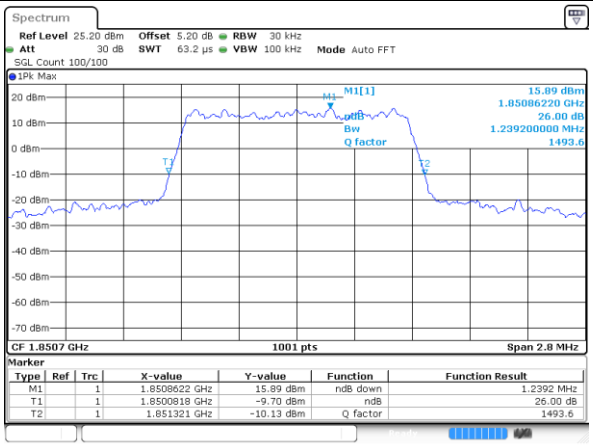

Lowest Channel / 1.4MHz / 16QAM

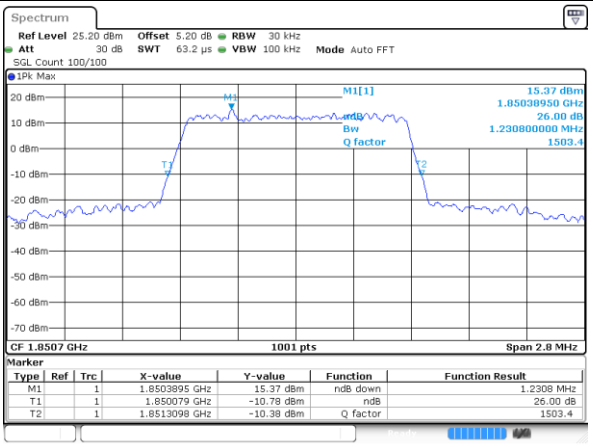

Middle Channel / 1.4MHz / QPSK

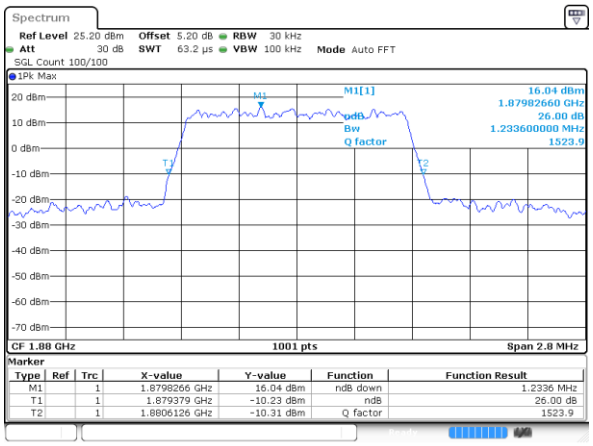

Middle Channel / 1.4MHz / 16QAM

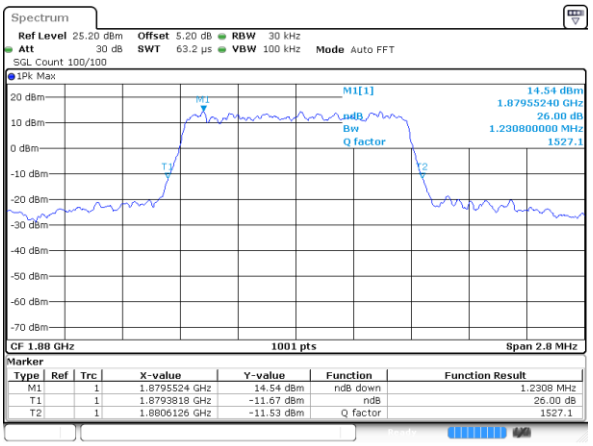

Highest Channel / 1.4MHz / QPSK

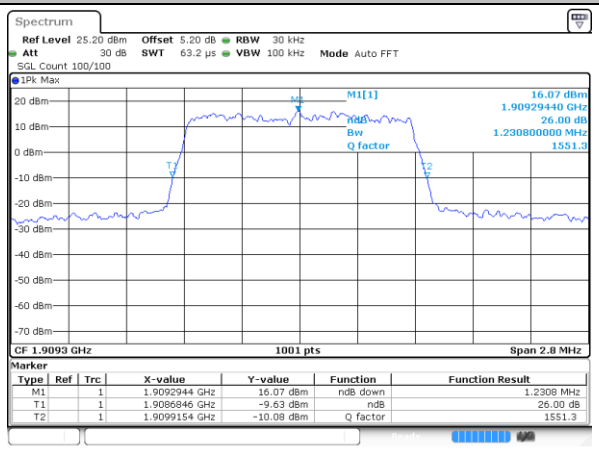

Highest Channel / 1.4MHz / 16QAM

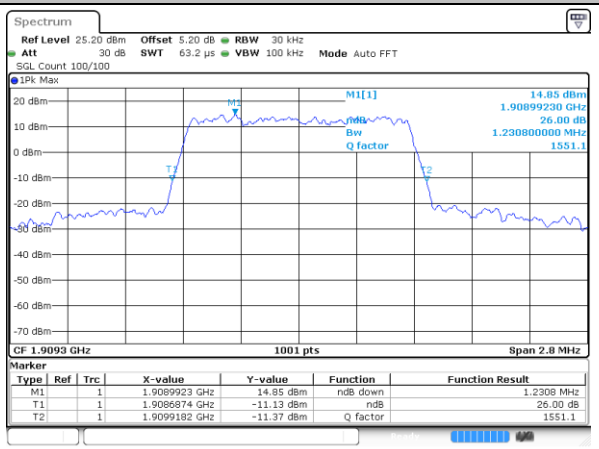

LTE Band 2

Lowest Channel / 3MHz / QPSK

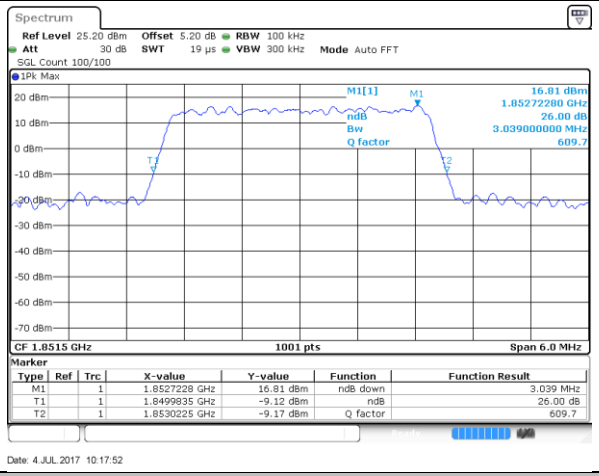

Lowest Channel / 3MHz / 16QAM

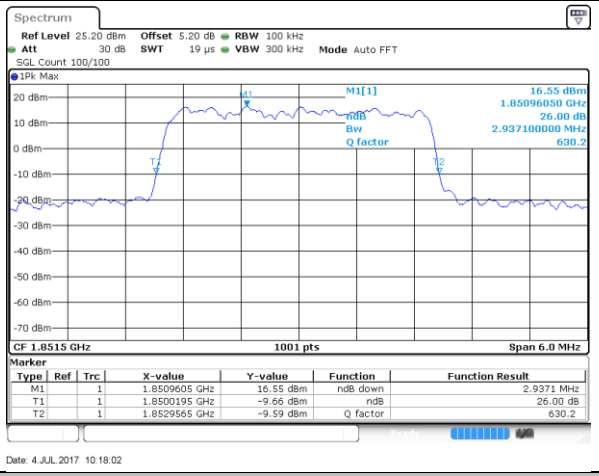

Middle Channel / 3MHz / QPSK

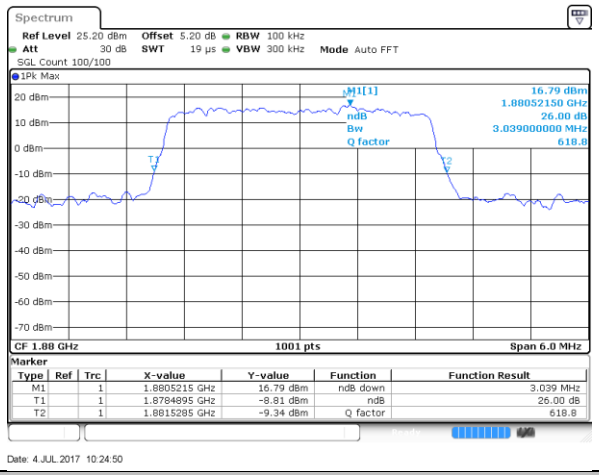

Middle Channel /3MHz / 16QAM

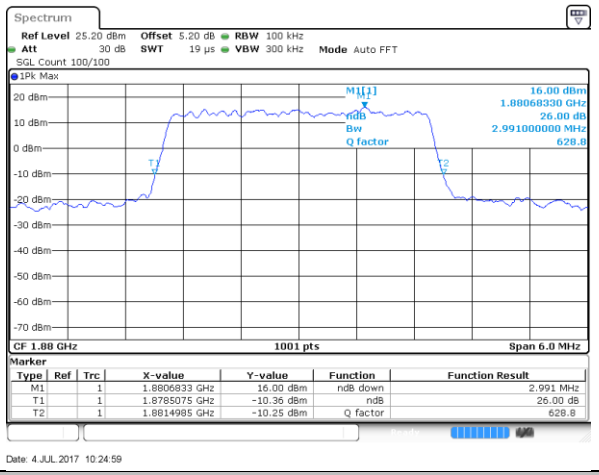

Highest Channel /3MHz / QPSK

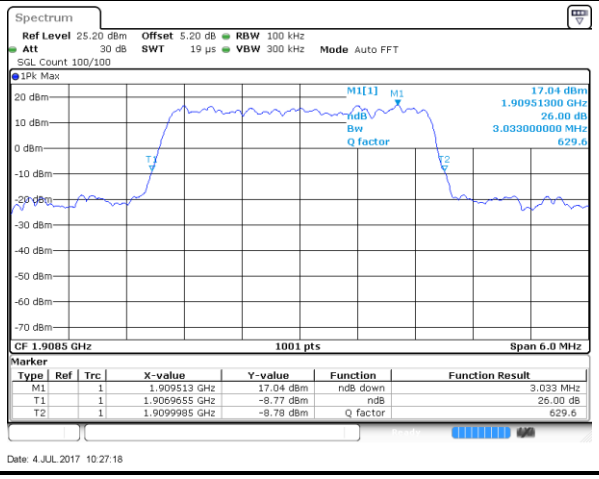

Highest Channel /3MHz / 16QAM

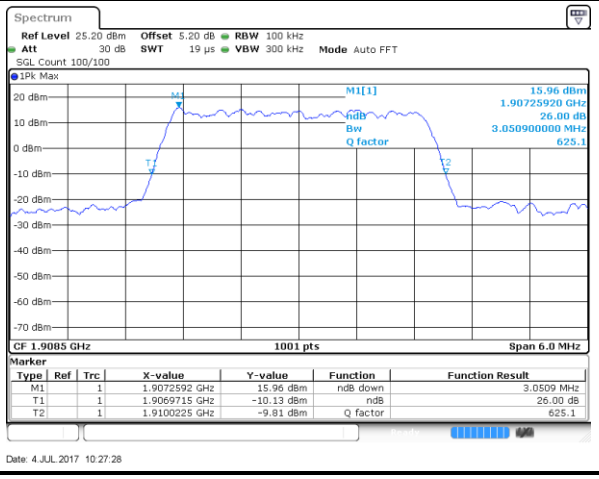

LTE Band 2

Lowest Channel / 5MHz / QPSK

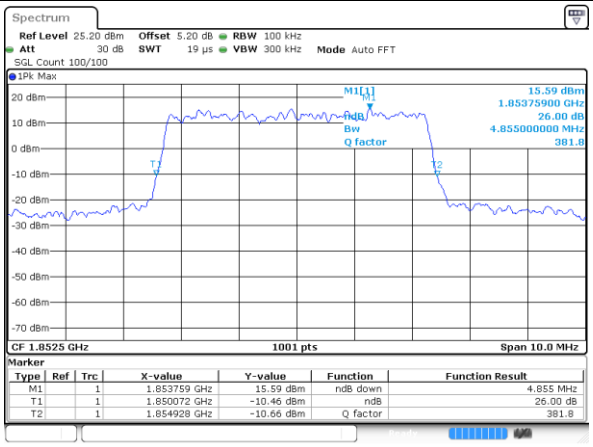

Lowest Channel / 5MHz / 16QAM

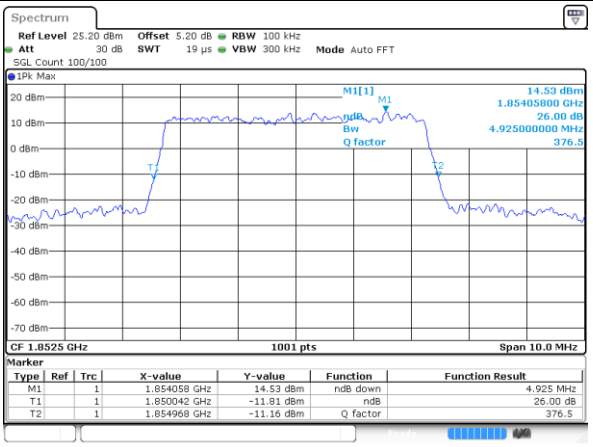

Middle Channel / 5MHz / QPSK

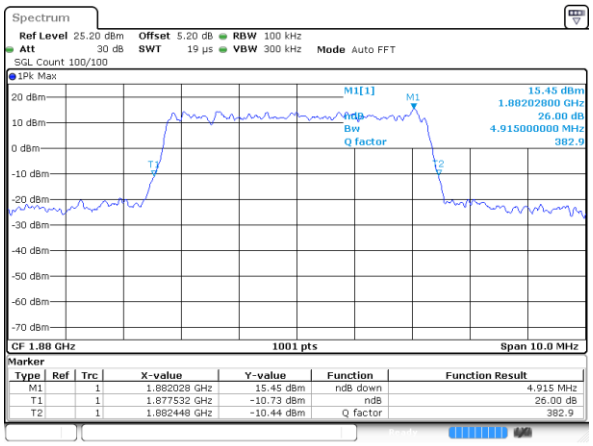

Middle Channel / 5MHz / 16QAM

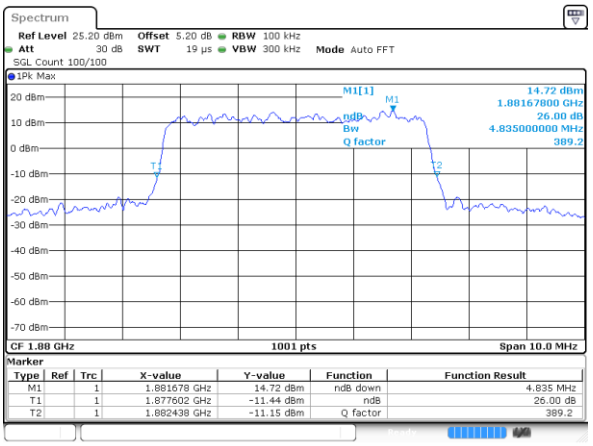

Highest Channel / 5MHz / QPSK

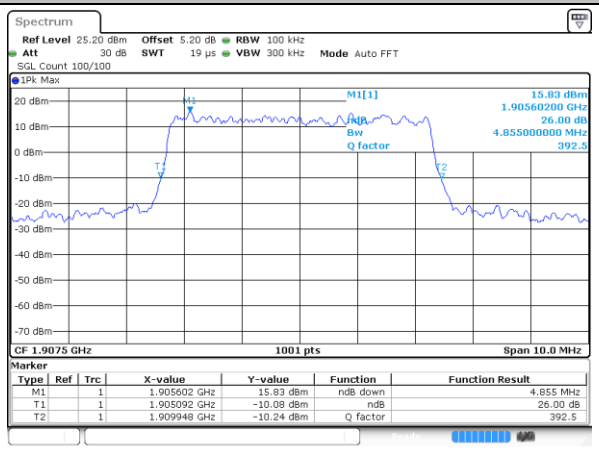

Highest Channel / 5MHz / 16QAM

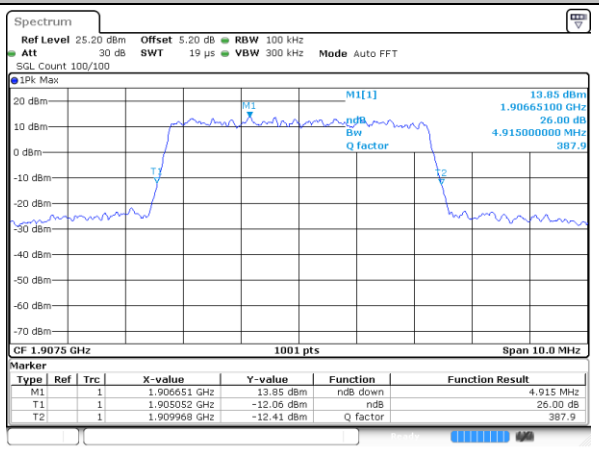

LTE Band 2

Lowest Channel / 10MHz / QPSK

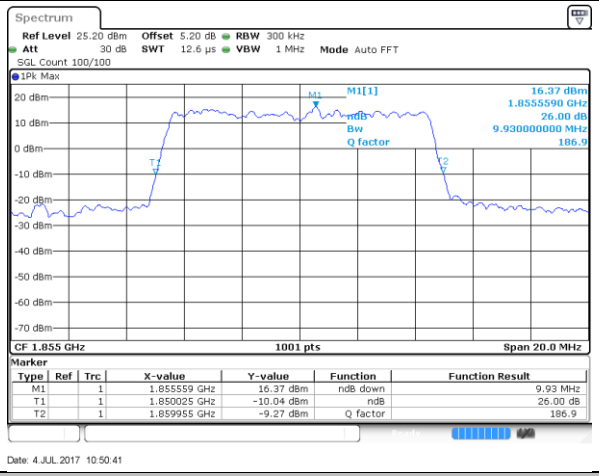

Lowest Channel / 10MHz / 16QAM

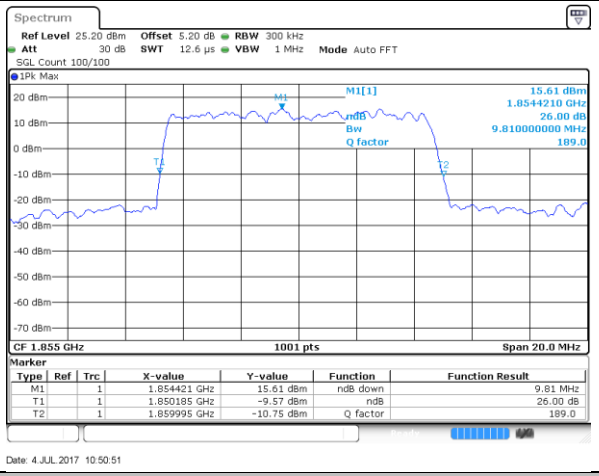

Middle Channel / 10MHz / QPSK

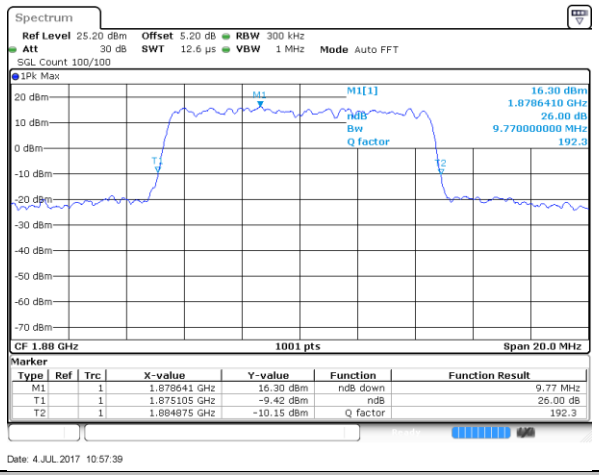

Middle Channel / 10MHz / 16QAM

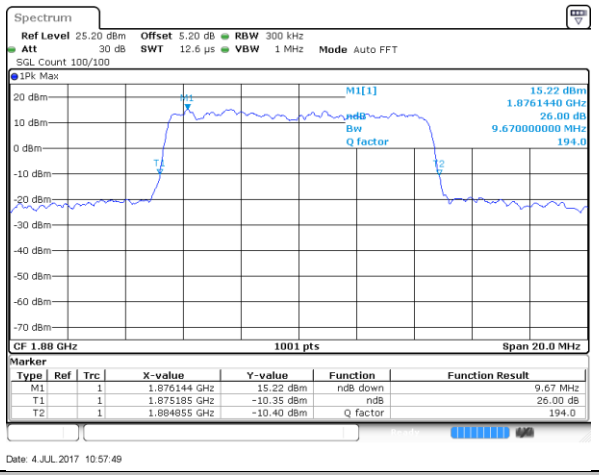

Highest Channel / 10MHz / QPSK

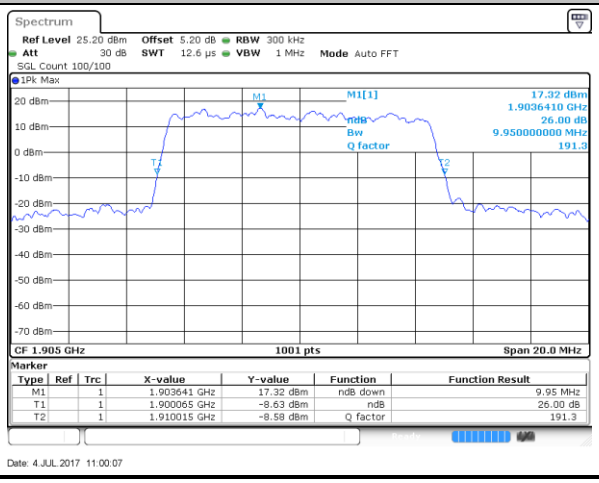
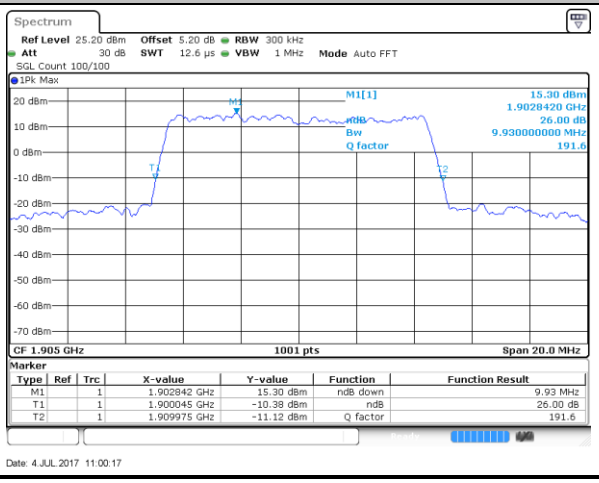
Highest Channel / 10MHz / 16QAM