



FCC Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1922-2
FCC ID : IHDT56XB8
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Dec. 08, 2017 and testing was completed on Dec. 21, 2017.

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

***No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China***



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Specification of Accessory	7
1.6. Modification of EUT	8
1.7. Test Location	8
1.8. Applicable Standards	9
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1. Test Mode	10
2.2. Connection Diagram of Test System	12
2.3. Support Unit used in test configuration and system.....	14
2.4. EUT Operation Test Setup	14
3. TEST RESULT	15
3.1. Test of AC Conducted Emission Measurement	15
3.2. Test of Radiated Emission Measurement	21
4. LIST OF MEASURING EQUIPMENT	27
5. UNCERTAINTY OF EVALUATION	28
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC7D0507-04	Rev. 01	Initial issue of report	Feb. 06, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.67 dB at 13.560 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.07 dB at 43.770 MHz for Quasi-Peak



1. General Description

1.1. Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2. Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1922-2
FCC ID	IHDT56XB8
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE
IMEI Code	Conduction: 351861090015314 Radiation: 351861090015272
HW Version	DVT1B
SW Version	fastboot_aljeter_oem_userdebug_8.0.0_OPP27.38_1080_intc fg-test-keys
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7: 2622.5 MHz ~ 2687.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz FM : 88 MHz ~ 108 MHz
Antenna Type	WWAN : LDS Antenna WLAN : Monopole Antenna Bluetooth : Monopole Antenna GNSS: Monopole Antenna NFC : Loop Antenna FM: External headset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM

1.5. Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Salom)	Model Name	SC-22 SPN5970A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(EU)	Brand Name	Motorola (Salom)	Model Name	SC-23 SPN5971A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(UK)	Brand Name	Motorola (Salom)	Model Name	SC-24 SPN5972A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(IN)	Brand Name	Motorola (Salom)	Model Name	SC-25 SPN5973A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(AU)	Brand Name	Motorola (Salom)	Model Name	SC-26 SPN5974A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(AR)	Brand Name	Motorola (Salom)	Model Name	SC-27 SPN5975A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(BR)	Brand Name	Motorola (Salom)	Model Name	SC-28 SPN5976A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 1(BR)	Brand Name	Motorola (Salom)	Model Name	SC-28 SPN5997A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 2(US)	Brand Name	Motorola (Chenyang)	Model Name	SC-22 SPN5993A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 2(EU)	Brand Name	Motorola (Chenyang)	Model Name	SC-23 SPN5989A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 2(UK)	Brand Name	Motorola (Chenyang)	Model Name	SC-24 SPN5990A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 2(IN)	Brand Name	Motorola (Chenyang)	Model Name	SC-25 SPN5991A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
AC Adapter 2(AU)	Brand Name	Motorola (Chenyang)	Model Name	SC-26 SPN5988A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		

AC Adapter 2(AR)	Brand Name	Motorola (Chenyang)	Model Name	SC-27 SPN5992A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5Vdc,3000mA or 9Vdc,1600mA or 12Vdc,1200mA		
Battery	Brand Name	Lenovo (SCUD)	Model Name	BL270
	Power Rating	3.85/4.4Vdc,4000mAh	Type	Li-ion
Earphone	Brand Name	Motorola(NEW LEADER)	Model Name	NLD-EM307E-02SF
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SLQ-A077A
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		

1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	CO01-KS	03CH02-KS	630927

Note: The test site complies with ANSI C63.4 2014 requirement.



1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Test Items	Function Type
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + Camera (Rear) <Fig.1>
	Mode 2 : GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + Camera (Front) <Fig.1>
	Mode 3 : WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + MPEG4 <Fig.1>
	Mode 4 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + NFC On <Fig.1>
	Mode 5 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + GNSS Rx <Fig.2>
	Mode 6 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 2) + Earphone + Battery + NFC On <Fig.1>
	Mode 7 : LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx <Fig.3>
	Mode 8 : USB Cable (Charging from Adapter 1) + FM Rx (88MHz) + Earphone + Battery <Fig.4>
	Mode 9 : USB Cable (Charging from Adapter 1) + FM Rx (98MHz) + Earphone + Battery <Fig.4>
	Mode 10 : USB Cable (Charging from Adapter 1) + FM Rx (108MHz) + Earphone + Battery <Fig.4>
	Mode 11 : USB Cable (Charging from Adapter 2) + FM Rx (108MHz) + Earphone + Battery <Fig.4>

Radiated Emissions < 1GHz	Mode 1 : GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + Camera (Rear) <Fig.1> Mode 2 : GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + Camera (Front) <Fig.1> Mode 3 : WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + MPEG4 <Fig.1> Mode 4 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + NFC On <Fig.1> Mode 5 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + GNSS Rx <Fig.2> Mode 6 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 2) + Earphone + Battery + NFC On <Fig.1> Mode 7 : LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx <Fig.3> Mode 8 : USB Cable (Charging from Adapter 1) + FM Rx (88MHz) + Earphone + Battery <Fig.4> Mode 9 : USB Cable (Charging from Adapter 1) + FM Rx (98MHz) + Earphone + Battery <Fig.4> Mode 10 : USB Cable (Charging from Adapter 1) + FM Rx (108MHz) + Earphone + Battery <Fig.4> Mode 11 : USB Cable (Charging from Adapter 2) + FM Rx (108MHz) + Earphone + Battery <Fig.4>
Radiated Emissions ≥ 1GHz	Mode 1 : WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + GNSS Rx <Fig.2> Mode 2 : LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx <Fig.3>
Remark: 1. The worst case of AC is mode 4; and the USB data link mode is mode 7, the test data of these modes are reported. 2. The worst case of RE < 1G is mode 5; and the USB data link mode is mode 7, the test data of these modes are reported. 3. Data Link with Notebook means data application transferred mode between EUT and Notebook.	


2.2. Connection Diagram of Test System

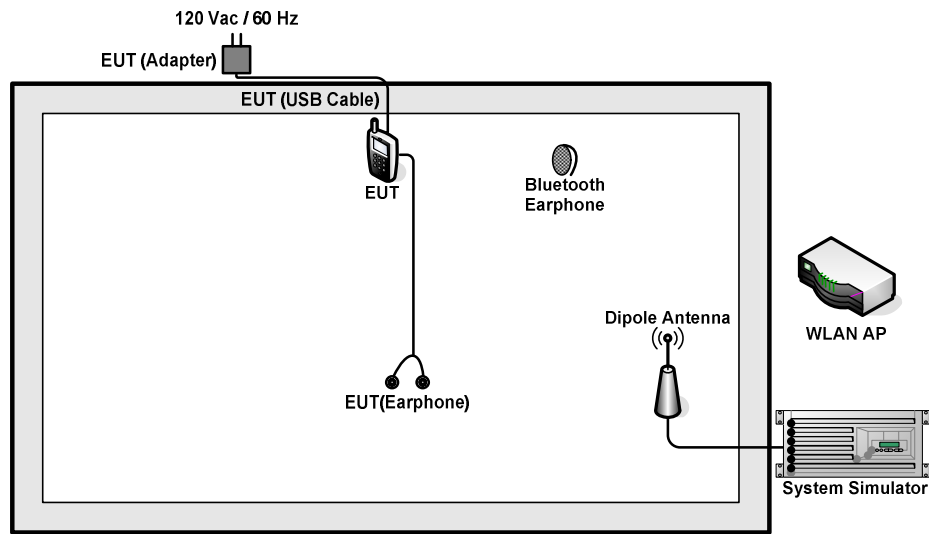


<Fig.1>

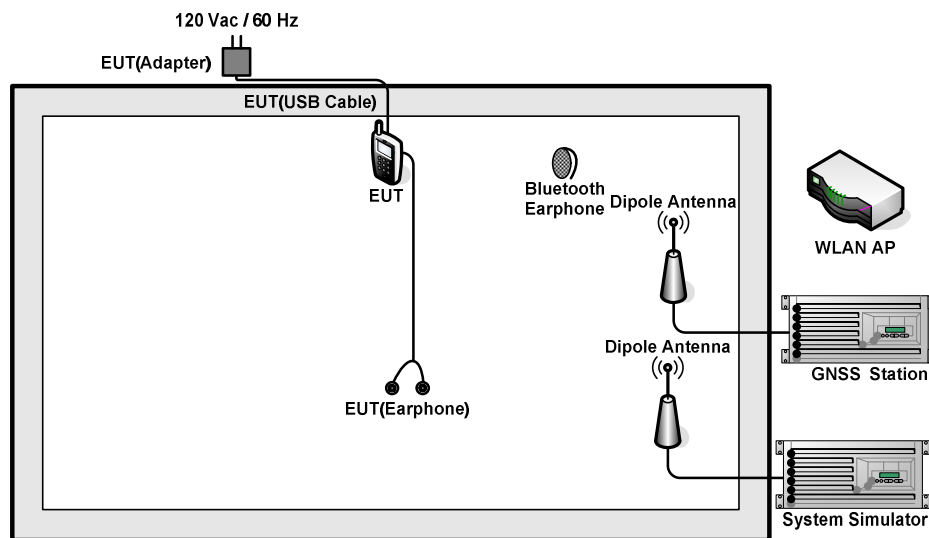

<Fig.2>

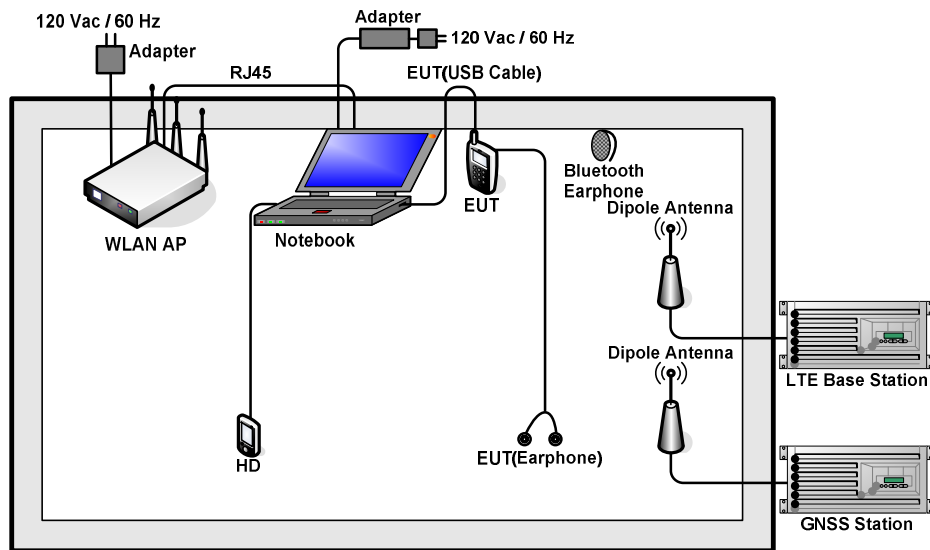

<Fig.3>

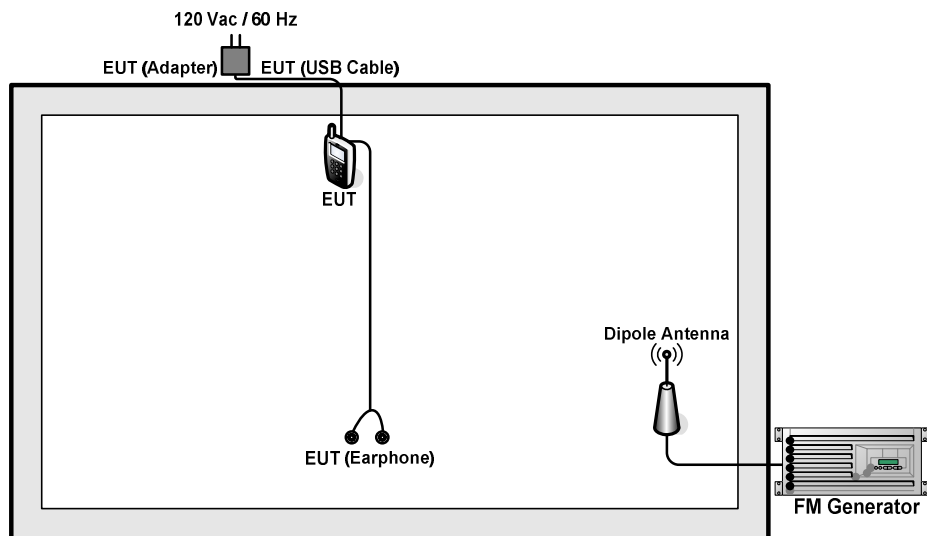

<Fig.4>

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	FM Generator	R&S	SMBV100A	N/A	N/A	Unshielded, 1.8 m
4.	GNSS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
5.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
6.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded, 1.8 m
7.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	Notebook	Dell	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
10.	Hard Disk	Lenovo	F310	FCC DoC	Shielded, 0.5 m	N/A
11.	SD Card	SanDisk	Ultra	N/A	N/A	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.
5. The EUT was turned to Radio frequency channels, FM88 MHz, FM98 MHz and FM108 MHz, from FM Generator.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

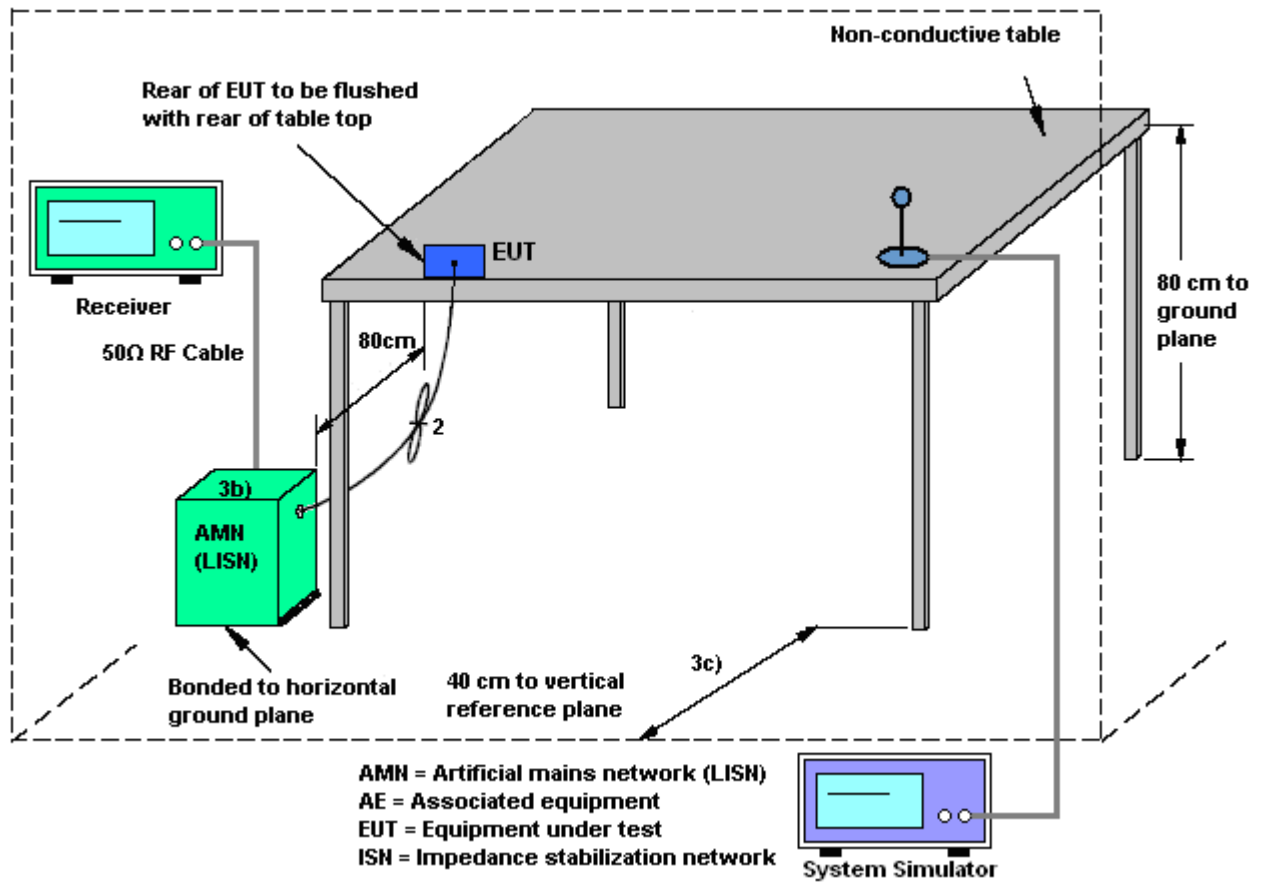



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 4	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + NFC On		

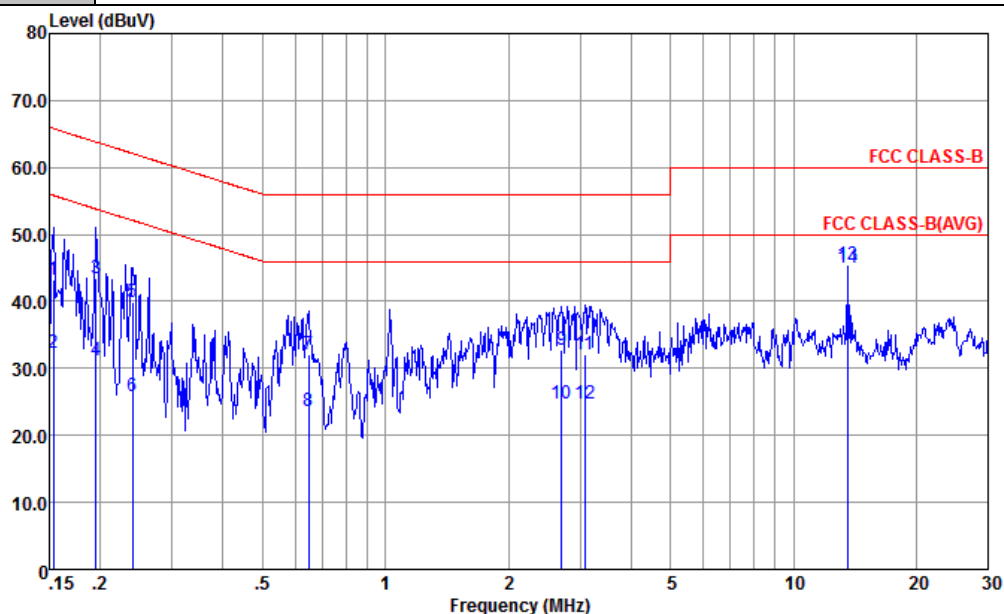


Site : CO01-KS
Condition : FCC CLASS-B LISN-L-171013-060103 LINE
Project : (FC) 7D0507-04
mode : Mode 4
: 351861090015314 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	43.27	-22.55	65.82	32.50	0.16	10.61	QP
2	0.153	32.37	-23.45	55.82	21.60	0.16	10.61	Average
3	0.195	43.56	-20.24	63.80	32.89	0.20	10.47	QP
4	0.195	31.26	-22.54	53.80	20.59	0.20	10.47	Average
5	0.240	39.95	-22.13	62.08	29.30	0.21	10.44	QP
6	0.240	25.85	-26.23	52.08	15.20	0.21	10.44	Average
7	0.647	32.06	-23.94	56.00	21.60	0.26	10.20	QP
8	0.647	23.66	-22.34	46.00	13.20	0.26	10.20	Average
9	2.707	32.80	-23.20	56.00	22.30	0.31	10.19	QP
10	2.707	24.70	-21.30	46.00	14.20	0.31	10.19	Average
11	3.074	32.11	-23.89	56.00	21.61	0.32	10.18	QP
12	3.074	24.71	-21.29	46.00	14.21	0.32	10.18	Average
13	13.560	45.38	-14.62	60.00	34.71	0.28	10.39	QP
14 *	13.560	44.98	-5.02	50.00	34.31	0.28	10.39	Average



Test Mode :	Mode 4	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + NFC On		

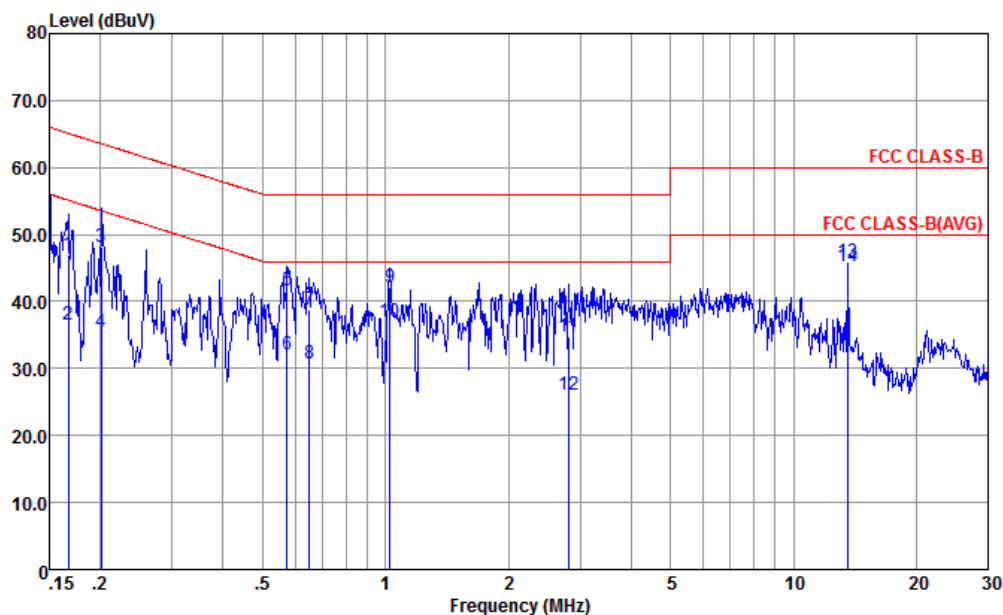


Site : CO01-KS
Condition : FCC CLASS-B LISN-N-171013-060103 NEUTRAL
Project : (FC) 7D0507-04
mode : Mode 4
: 351861090015314 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV		dB	dBuV	dB	dB	
1	0.167	47.04	-18.08	65.12	36.20	0.28	10.56	QP
2	0.167	36.44	-18.68	55.12	25.60	0.28	10.56	Average
3	0.201	48.04	-15.54	63.58	37.31	0.28	10.45	QP
4	0.201	35.34	-18.24	53.58	24.61	0.28	10.45	Average
5	0.573	41.74	-14.26	56.00	31.20	0.29	10.25	QP
6	0.573	32.14	-13.86	46.00	21.60	0.29	10.25	Average
7	0.651	38.69	-17.31	56.00	28.20	0.30	10.19	QP
8	0.651	30.79	-15.21	46.00	20.30	0.30	10.19	Average
9	1.027	42.22	-13.78	56.00	31.80	0.31	10.11	QP
10	1.027	37.02	-8.98	46.00	26.60	0.31	10.11	Average
11	2.809	34.72	-21.28	56.00	24.20	0.33	10.19	QP
12	2.809	26.02	-19.98	46.00	15.50	0.33	10.19	Average
13	13.560	45.83	-14.17	60.00	35.21	0.23	10.39	QP
14 *	13.560	45.33	-4.67	50.00	34.71	0.23	10.39	Average



Test Mode :	Mode 7	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx		

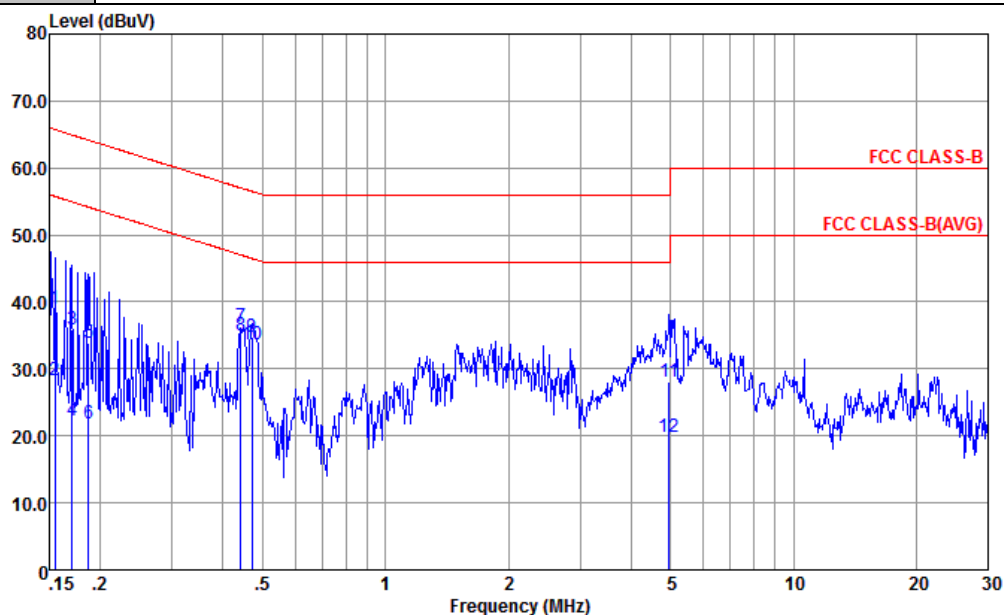


Site : CO01-KS
Condition : FCC CLASS-B LISN-L-161017-060103 LINE
Project : (FC) 7D0507-04

: 351861090015314 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.155	39.11	-26.63	65.74	28.20	0.52	10.39	QP
2	0.155	28.31	-27.43	55.74	17.40	0.52	10.39	Average
3	0.170	35.99	-28.95	64.94	25.20	0.42	10.37	QP
4	0.170	22.39	-32.55	54.94	11.60	0.42	10.37	Average
5	0.187	33.98	-30.17	64.15	23.30	0.33	10.35	QP
6	0.187	21.88	-32.27	54.15	11.20	0.33	10.35	Average
7	0.442	36.26	-20.76	57.02	25.80	0.27	10.19	QP
8 *	0.442	34.96	-12.06	47.02	24.50	0.27	10.19	Average
9	0.471	34.76	-21.73	56.49	24.30	0.27	10.19	QP
10	0.471	33.56	-12.93	46.49	23.10	0.27	10.19	Average
11	4.952	28.05	-27.95	56.00	17.60	0.21	10.24	QP
12	4.952	19.75	-26.25	46.00	9.30	0.21	10.24	Average



Test Mode :	Mode 7	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx		

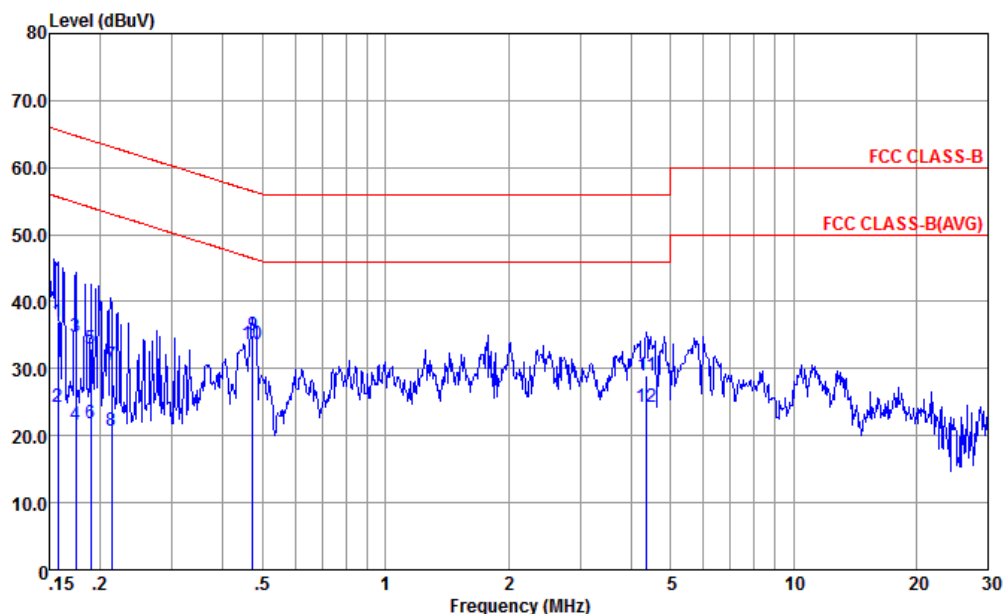

Site : CO01-KS
Condition : FCC CLASS-B LISN-N-161017-060103 NEUTRAL
Project : (FC) 7D0507-04

: 351861090015314 #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	37.02	-28.58	65.60	26.30	0.34	10.38	QP
2	0.157	24.22	-31.38	55.60	13.50	0.34	10.38	Average
3	0.174	34.66	-30.11	64.77	23.97	0.33	10.36	QP
4	0.174	21.66	-33.11	54.77	10.97	0.33	10.36	Average
5	0.189	32.94	-31.12	64.06	22.27	0.33	10.34	QP
6	0.189	21.94	-32.12	54.06	11.27	0.33	10.34	Average
7	0.213	30.62	-32.48	63.10	19.97	0.33	10.32	QP
8	0.213	20.62	-32.48	53.10	9.97	0.33	10.32	Average
9	0.474	35.07	-21.38	56.45	24.50	0.38	10.19	QP
10 *	0.474	33.67	-12.78	46.45	23.10	0.38	10.19	Average
11	4.361	28.93	-27.07	56.00	18.31	0.38	10.24	QP
12	4.361	24.19	-21.81	46.00	13.57	0.38	10.24	Average

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

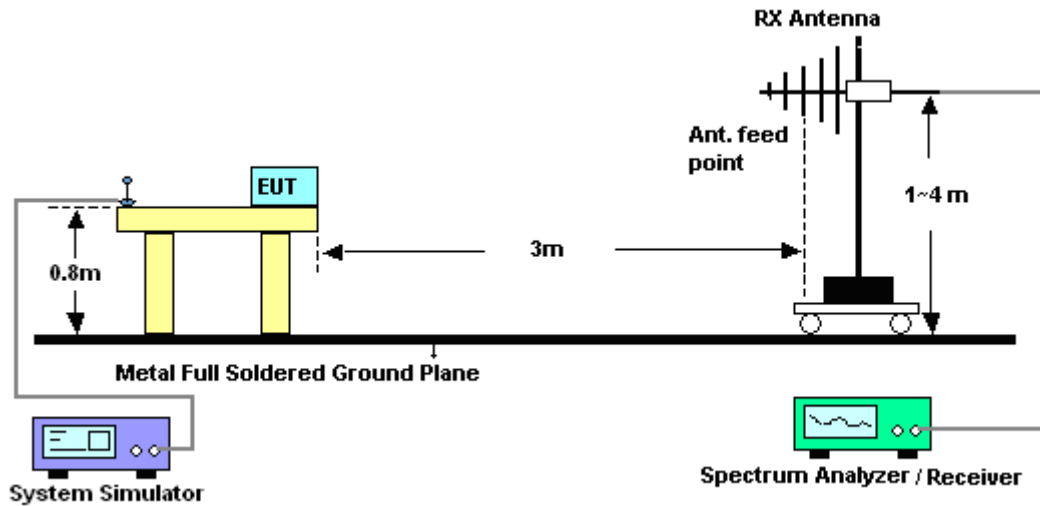


For radiated emissions above 1GHz

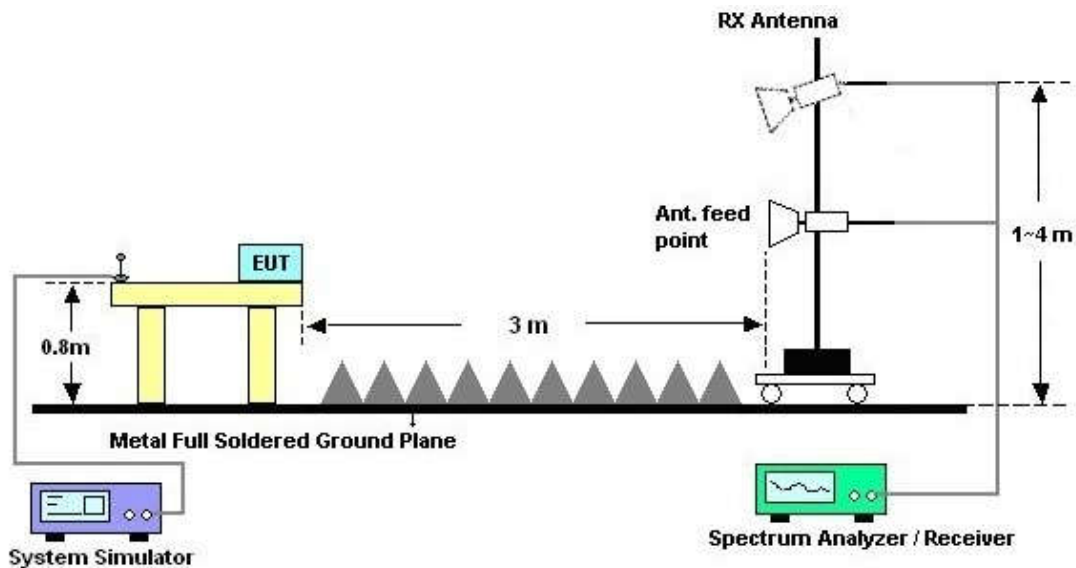



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 5	Temperature :	21~22°C
Test Engineer :	Leo Liao	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + GNSS Rx		

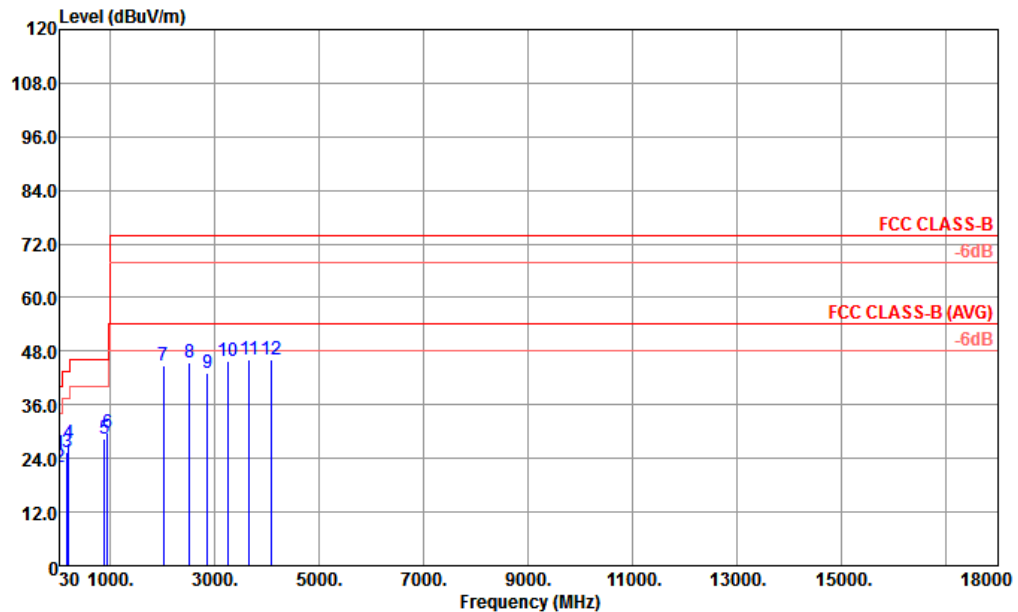


Site : 03CH02-KS
Condition : FCC CLASS-B 3m 02 LF ANT HORIZONTAL

Mode : 5
IMEI : 351861090015272 #5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	31.08	25.05	-14.95	40.00	31.26	25.23	0.59	32.03	100	0 Peak
2	42.96	22.18	-17.82	40.00	33.04	20.57	0.65	32.08	---	--- Peak
3	173.91	25.38	-18.12	43.50	39.11	16.68	1.35	31.76	---	--- Peak
4	207.39	27.55	-15.95	43.50	41.74	15.97	1.49	31.65	---	--- Peak
5	888.00	28.42	-17.58	46.00	25.53	27.41	3.08	27.60	---	--- Peak
6	953.80	29.85	-16.15	46.00	25.18	28.58	3.21	27.12	---	--- Peak
7	2018.00	44.90	-29.10	74.00	42.66	30.36	4.63	32.75	---	--- Peak
8	2526.00	45.30	-28.70	74.00	39.03	31.53	5.29	30.55	---	--- Peak
9	2868.00	43.06	-30.94	74.00	34.88	32.20	5.88	29.90	---	--- Peak
10	3252.00	45.84	-28.16	74.00	37.06	33.17	6.23	30.62	---	--- Peak
11	3660.00	46.03	-27.97	74.00	35.59	34.03	6.51	30.10	---	--- Peak
12	4086.00	46.18	-27.82	74.00	34.70	35.26	7.01	30.79	---	--- Peak



Test Mode :	Mode 5	Temperature :	21~22°C
Test Engineer :	Leo Liao	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter 1) + Earphone + Battery + GNSS Rx		

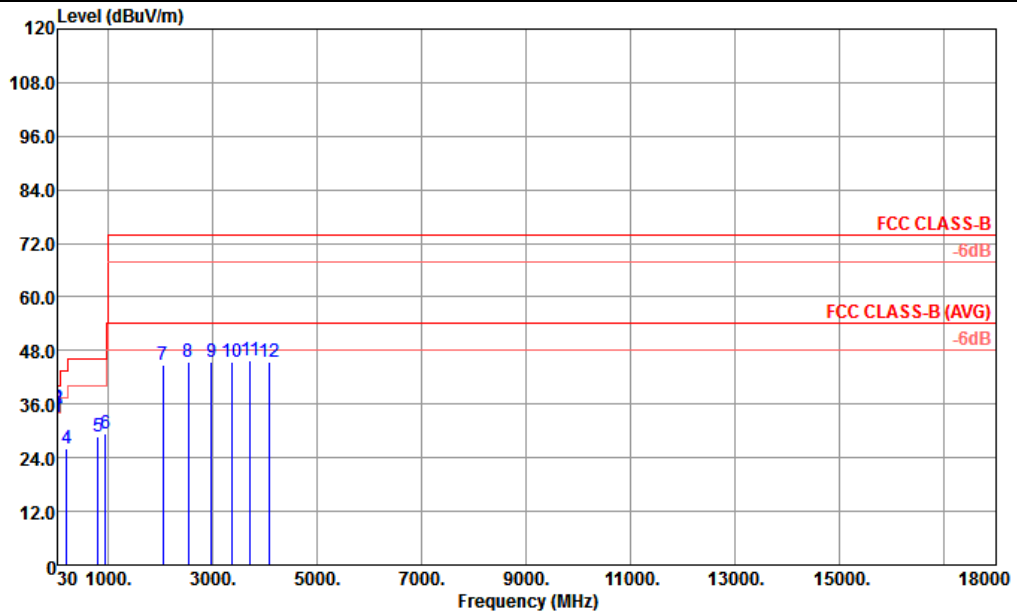


Site : 03CH02-KS
Condition : FCC CLASS-B 3m 02 LF ANT VERTICAL

Mode : 5
IMEI : 351861090015272 #5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg
1	31.35	33.05	-6.95	40.00	39.25	25.23	0.60	32.03	---
2 !	40.80	35.26	-4.74	40.00	44.57	22.10	0.64	32.05	---
3 !	43.77	34.93	-5.07	40.00	45.80	20.57	0.66	32.10	100 280 QP
4	209.01	26.10	-17.40	43.50	40.24	16.01	1.50	31.65	---
5	811.00	28.76	-17.24	46.00	27.64	26.62	2.73	28.23	---
6	944.70	29.49	-16.51	46.00	25.10	28.38	3.19	27.18	---
7	2048.00	44.90	-29.10	74.00	42.61	30.47	4.71	32.89	---
8	2530.00	45.54	-28.46	74.00	39.27	31.53	5.29	30.55	---
9	2986.00	45.37	-28.63	74.00	35.70	32.55	5.95	28.83	---
10	3384.00	45.30	-28.70	74.00	36.02	33.35	6.27	30.34	---
11	3717.00	45.84	-28.16	74.00	34.93	34.48	6.55	30.12	---
12	4089.00	45.44	-28.56	74.00	33.96	35.26	7.01	30.79	---



Test Mode :	Mode 7	Temperature :	21~22°C
Test Engineer :	Leo Liao	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx		

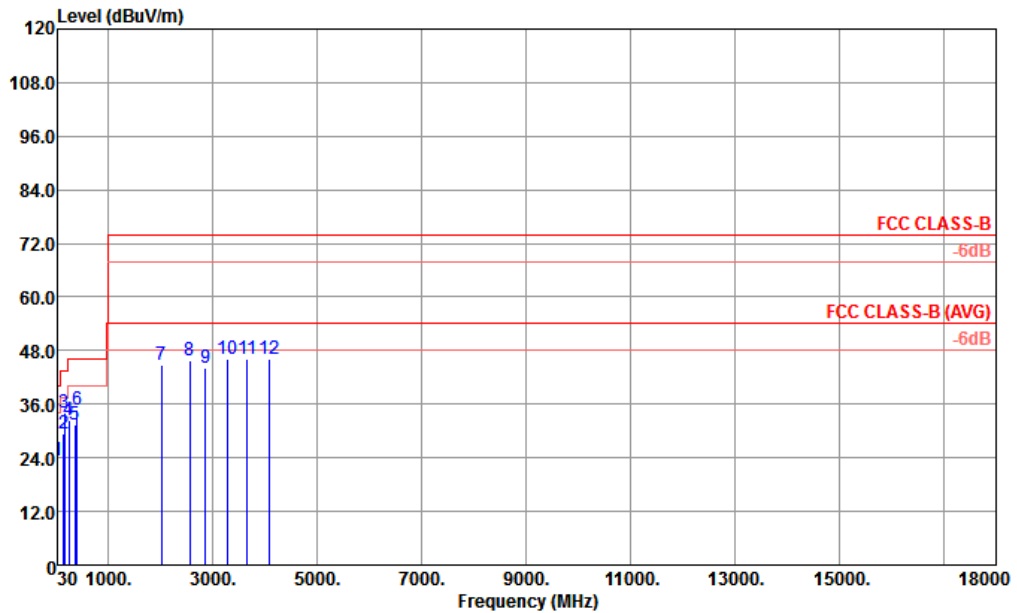


Site : 03CH02-KS
Condition : FCC CLASS-B 3m 02 LF ANT HORIZONTAL
Project : (FC)7D0507-04

IMEI : 351861090015272 #5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	42.15	23.25	-16.75	40.00	33.35	21.33	0.65	32.08	---	---	Peak
2	155.28	29.42	-14.08	43.50	42.66	17.30	1.28	31.82	---	---	Peak
3	165.81	34.04	-9.46	43.50	47.55	16.96	1.32	31.79	100	0	Peak
4	253.83	32.27	-13.73	46.00	45.03	17.00	1.76	31.52	---	---	Peak
5	361.60	31.54	-14.46	46.00	39.29	21.16	1.95	30.86	---	---	Peak
6	402.90	34.74	-11.26	46.00	37.70	25.66	2.08	30.70	---	---	Peak
7	2018.00	44.90	-29.10	74.00	42.66	30.36	4.63	32.75	---	---	Peak
8	2560.00	45.72	-28.28	74.00	39.35	31.59	5.31	30.53	---	---	Peak
9	2868.00	44.06	-29.94	74.00	35.88	32.20	5.88	29.90	---	---	Peak
10	3297.00	46.07	-27.93	74.00	37.08	33.23	6.25	30.49	---	---	Peak
11	3660.00	46.03	-27.97	74.00	35.59	34.03	6.51	30.10	---	---	Peak
12	4086.00	46.18	-27.82	74.00	34.70	35.26	7.01	30.79	---	---	Peak



Test Mode :	Mode 7	Temperature :	21~22°C
Test Engineer :	Leo Liao	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 7 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + Battery + GNSS Rx		

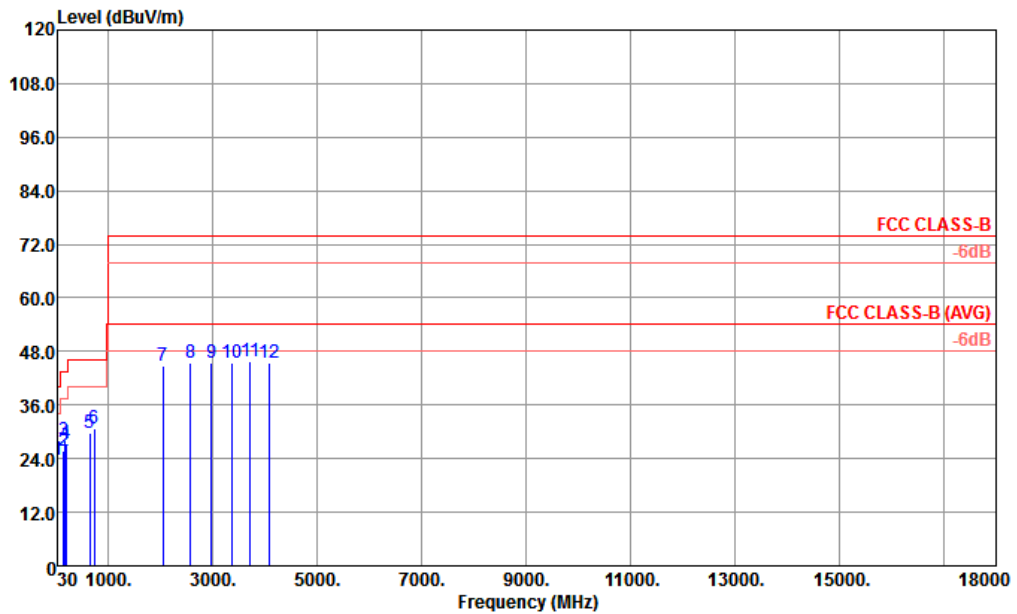

Site : 03CH02-KS
Condition : FCC CLASS-B 3m 02 LF ANT VERTICAL
Project : (FC)7D0507-04

IMEI : 351861090015272 #5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	41.88	23.74	-16.26	40.00	33.83	21.33	0.65	32.07	---	Peak
2	155.28	25.70	-17.80	43.50	38.94	17.30	1.28	31.82	---	Peak
3	165.54	28.01	-15.49	43.50	41.52	16.96	1.32	31.79	---	Peak
4	192.00	27.36	-16.14	43.50	41.57	16.07	1.42	31.70	---	Peak
5	645.10	29.68	-16.32	46.00	31.04	25.31	2.68	29.35	---	Peak
6	735.40	30.59	-15.41	46.00	29.89	26.62	2.80	28.72	100	0 Peak
7	2048.00	44.90	-29.10	74.00	42.61	30.47	4.71	32.89	---	Peak
8	2576.00	45.30	-28.70	74.00	38.85	31.62	5.34	30.51	---	Peak
9	2986.00	45.37	-28.63	74.00	35.70	32.55	5.95	28.83	---	Peak
10	3384.00	45.30	-28.70	74.00	36.02	33.35	6.27	30.34	---	Peak
11	3717.00	45.84	-28.16	74.00	34.93	34.48	6.55	30.12	---	Peak
12	4089.00	45.44	-28.56	74.00	33.96	35.26	7.01	30.79	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 20, 2017	Dec. 21, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Dec. 21, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Dec. 21, 2017	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Dec. 21, 2017	Oct. 11, 2018	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 08, 2017	Dec. 17, 2017	Aug. 07, 2018	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 18, 2017	Dec. 17, 2017	Apr. 17, 2018	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~2GHz	Jan. 22, 2017	Dec. 17, 2017	Jan. 21, 2018	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 21, 2017	Dec. 17, 2017	Oct. 20, 2018	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Dec. 17, 2017	Feb. 14, 2018	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18GHz~40GHz	Oct. 12, 2017	Dec. 17, 2017	Oct. 11, 2018	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 07, 2017	Dec. 17, 2017	Aug. 06, 2018	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 12, 2017	Dec. 17, 2017	Oct. 11, 2018	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Dec. 17, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 17, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 17, 2017	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.7dB
--	-------