

# FCC SAR Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT1944-6  
FCC ID : IHDT56XF5  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



**Sporton International (Kunshan) Inc.**

No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China



## **Table of Contents**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                     | <b>4</b>  |
| <b>2. Administration Data .....</b>                         | <b>5</b>  |
| <b>3. Guidance Applied.....</b>                             | <b>5</b>  |
| <b>4. Equipment Under Test (EUT) Information.....</b>       | <b>6</b>  |
| 4.1 General Information .....                               | 6         |
| 4.2 Specification of Accessory .....                        | 7         |
| 4.3 General LTE SAR Test and Reporting Considerations ..... | 8         |
| <b>5. Re-use of Measured Data .....</b>                     | <b>10</b> |
| 5.1 Introduction Section .....                              | 10        |
| 5.2 Difference Section.....                                 | 10        |
| 5.3 Spot Check Verification Data Section.....               | 11        |
| 5.4 Reference detail Section .....                          | 11        |
| <b>6. RF Exposure Limits.....</b>                           | <b>12</b> |
| 6.1 Uncontrolled Environment.....                           | 12        |
| 6.2 Controlled Environment.....                             | 12        |
| <b>7. Specific Absorption Rate (SAR).....</b>               | <b>13</b> |
| 7.1 Introduction .....                                      | 13        |
| 7.2 SAR Definition.....                                     | 13        |
| <b>8. System Description and Setup .....</b>                | <b>14</b> |
| 8.1 E-Field Probe .....                                     | 15        |
| 8.2 Data Acquisition Electronics (DAE) .....                | 15        |
| 8.3 Phantom.....                                            | 16        |
| 8.4 Device Holder.....                                      | 17        |
| <b>9. Measurement Procedures .....</b>                      | <b>18</b> |
| 9.1 Spatial Peak SAR Evaluation .....                       | 18        |
| 9.2 Power Reference Measurement.....                        | 19        |
| 9.3 Area Scan .....                                         | 19        |
| 9.4 Zoom Scan.....                                          | 20        |
| 9.5 Volume Scan Procedures.....                             | 20        |
| 9.6 Power Drift Monitoring.....                             | 20        |
| <b>10. Test Equipment List.....</b>                         | <b>21</b> |
| <b>11. System Verification .....</b>                        | <b>22</b> |
| 11.1 Tissue Simulating Liquids .....                        | 22        |
| 11.2 Tissue Verification .....                              | 23        |
| 11.3 System Performance Check Results .....                 | 23        |
| <b>12. RF Exposure Positions .....</b>                      | <b>24</b> |
| 12.1 Ear and handset reference point .....                  | 24        |
| 12.2 Definition of the cheek position .....                 | 25        |
| 12.3 Definition of the tilt position .....                  | 26        |
| 12.4 Body Worn Accessory .....                              | 27        |
| 12.5 Product Specific 10g SAR Exposure.....                 | 28        |
| 12.6 Wireless Router.....                                   | 28        |
| <b>13. Conducted RF Output Power (Unit: dBm).....</b>       | <b>29</b> |
| <b>14. Antenna Location .....</b>                           | <b>42</b> |
| <b>15. SAR Test Results .....</b>                           | <b>43</b> |
| 15.1 Head SAR .....                                         | 45        |
| 15.2 Hotspot SAR .....                                      | 46        |
| 15.3 Body Worn Accessory SAR.....                           | 48        |
| 15.4 Repeated SAR Measurement .....                         | 49        |
| <b>16. Simultaneous Transmission Analysis.....</b>          | <b>50</b> |
| 16.1 Head Exposure Conditions .....                         | 51        |
| 16.2 Hotspot Exposure Conditions.....                       | 52        |
| 16.3 Body-Worn Accessory Exposure Conditions .....          | 54        |
| <b>17. Uncertainty Assessment .....</b>                     | <b>55</b> |
| <b>18. References .....</b>                                 | <b>56</b> |
| <b>Appendix A. Plots of System Performance Check</b>        |           |
| <b>Appendix B. Plots of High SAR Measurement</b>            |           |
| <b>Appendix C. DASY Calibration Certificate</b>             |           |
| <b>Appendix D. Test Setup Photos</b>                        |           |
| <b>Appendix E. Reference Report</b>                         |           |

## Revision History

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FA7D2007-01 | Rev. 01 | Initial issue of report | Feb. 23, 2018 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1944-6**, are as follows.

| Highest 1g SAR Summary |                |                  |                                              |                             |                               |                                                    |
|------------------------|----------------|------------------|----------------------------------------------|-----------------------------|-------------------------------|----------------------------------------------------|
| Equipment Class        | Frequency Band |                  | Head<br>(Separation 0mm)                     | Hotspot<br>(Separation 5mm) | Body-worn<br>(Separation 5mm) | Highest Simultaneous Transmission<br>1g SAR (W/kg) |
|                        |                |                  | 1g SAR (W/kg)                                |                             |                               |                                                    |
| Licensed               | GSM            | GSM850           | 0.30                                         | 0.72                        | 0.72                          | 1.56                                               |
|                        |                | GSM1900          | 0.10                                         | 0.94                        | 0.77                          |                                                    |
|                        | WCDMA          | Band V           | 0.40                                         | 0.84                        | 0.84                          |                                                    |
|                        |                | Band II          | 0.20                                         | 0.93                        | 0.87                          |                                                    |
|                        | LTE            | Band 5           | 0.42                                         | 0.93                        | 0.93                          |                                                    |
|                        |                | Band 7           | 0.33                                         | 1.14                        | 1.14                          |                                                    |
|                        |                | Band 26          | 0.32                                         | 0.73                        | 0.73                          |                                                    |
|                        |                | Band 38          | 0.25                                         | 1.03                        | 1.03                          |                                                    |
|                        |                | Band 41          | 0.25                                         | 0.98                        | 0.98                          |                                                    |
| DTS                    | WLAN           | 2.4GHz WLAN      | 1.14                                         | 0.34                        | 0.34                          | 1.48                                               |
| DSS                    | Bluetooth      | 2.4GHz Bluetooth |                                              | <0.10                       | <0.10                         | 1.19                                               |
| Equipment Class        | Frequency Band |                  | Highest SAR Summary                          |                             |                               |                                                    |
|                        |                |                  | Product Specific 10g SAR (W/kg)<br>(Gap 0mm) |                             |                               |                                                    |
| Licensed               | GSM            | GSM1900          | 3.13                                         |                             |                               |                                                    |
|                        | WCDMA          | Band II          | 3.67                                         |                             |                               |                                                    |
|                        | LTE            | Band 7           | 2.87                                         |                             |                               |                                                    |
| Date of Testing:       |                |                  | 2018/1/27 ~ 2018/2/3                         |                             |                               |                                                    |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

## **2. Administration Data**

| Testing Laboratory |                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site          | Sporton International (Kunshan) Inc.                                                                                                             |
| Test Site Location | No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province<br>215335 China<br>TEL : +86-512-57900158<br>FAX : +86-512-57900958 |

| Applicant    |                                                    |
|--------------|----------------------------------------------------|
| Company Name | Motorola Mobility LLC                              |
| Address      | 222 W,Merchandise Mart Plaza, Chicago IL 60654 USA |

| Manufacturer |                                                     |
|--------------|-----------------------------------------------------|
| Company Name | Motorola Mobility LLC                               |
| Address      | 222 W, Merchandise Mart Plaza, Chicago IL 60654 USA |

## **3. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

## **4. Equipment Under Test (EUT) Information**

### **4.1 General Information**

| Product Feature & Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Mobile Cellular Phone                                                                                                                                                                                                                                                                                                                                                                                                           |
| Brand Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Motorola                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Model Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | XT1944-6                                                                                                                                                                                                                                                                                                                                                                                                                        |
| FCC ID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | IHDT56XF5                                                                                                                                                                                                                                                                                                                                                                                                                       |
| IMEI Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SIM1: 351876090026657<br>SIM2: 351876090026665                                                                                                                                                                                                                                                                                                                                                                                  |
| Wireless Technology and Frequency Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>LTE Band 5: 824.7 MHz ~ 848.3 MHz<br>LTE Band 7: 2502.5 MHz ~ 2567.5 MHz<br>LTE Band 26: 814.7 MHz ~ 848.3 MHz<br>LTE Band 38: 2572.5 MHz ~ 2617.5 MHz<br>LTE Band 41: 2537.5 MHz ~ 2652.5 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | GSM/GPRS/EGPRS<br>RMC/AMR 12.2Kbps<br>HSDPA<br>HSUPA<br>DC-HSDPA<br>HSPA+ (16QAM uplink is not supported)<br>LTE: QPSK, 16QAM<br>WLAN 2.4GHz 802.11b/g/n HT20<br>Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE                                                                                                                                                                                    |
| HW Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | DVT1B                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SW Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | nora_row_n-userdebug 8.0.0 OPP27.60 222 intcfg,test-keys                                                                                                                                                                                                                                                                                                                                                                        |
| GSM / (E)GPRS Transfer mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.                                                                                                                                                                                                                                                              |
| EUT Stage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Identical Prototype                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Remark:</b> <ol style="list-style-type: none"> <li>This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.</li> <li>This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.</li> <li>This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.</li> <li>When the phone is in talking mode and receiver worked, all WWAN powers are full power.</li> <li>When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in WLAN 2.4GHz.</li> <li>The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II and LTE band 7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)</li> <li>When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II and LTE band 7/38/41.</li> <li>This device hotspot reduced power and P-sensor reduced power level are the same. So only show one reduced power level for hotspot reduced power and P-sensor reduced power for this application.</li> <li>P-sensor can detect handheld state, for bottom side of product specific 10g SAR condition, WCDMA band II reduced powers will be active. For GSM1900, LTE band 7/38/41, the power levels are the same as the full power.</li> <li>There are two different types of EUT. They are dual SIM card mobile and single SIM card mobile. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan two types of EUT, we found test result of the sample that dual SIM was the worst, so we chose dual SIM card mobile to perform all test.</li> <li>For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.</li> </ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                 |



12. This is a variant report for XT1944-6, Based on the similarity between two models, LTE Band 26/38/41 full SAR testing, other WWAN bands and WLAN/BT spot check are performed for this application and found the reference SAR value can represent this application, so all the test cases (except for LTE Band 26/38/41) were leverage from reference test report (Sporton Report Number FA7D2007 as Appendix E).

#### **4.2 Specification of Accessory**

| Specification of Accessory |                  |                                                     |            |                                |
|----------------------------|------------------|-----------------------------------------------------|------------|--------------------------------|
| AC Adapter 1(US)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SPN5945A C-P35                 |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 1(EU)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SPN5944A C-P36                 |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 1(UK)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SPN5940A C-P37                 |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 1(IN)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SA18C19493 C-P49               |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 1(AU)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SPN5953A C-P48                 |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 1(AR)           | Brand Name       | Motorola (Acbel)                                    | Model Name | SPN5942A C-P47                 |
|                            | Power Rating     | I/P: 100-240 Vac, 500mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 2(US)           | Brand Name       | Motorola (Salom)                                    | Model Name | SSW-2919UMTJ C-P35<br>SPN5945A |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 2(EU)           | Brand Name       | Motorola (Salom)                                    | Model Name | SSW-2919EU C-P36<br>SPN5944A   |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 2(UK)           | Brand Name       | Motorola (Salom)                                    | Model Name | SSW-2919UK C-P37<br>SPN5940A   |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 2(AU)           | Brand Name       | Motorola (Salom)                                    | Model Name | SSW-2919AU C-P48<br>SPN5953A   |
|                            | Power Rating     | I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc,2000mA         |            |                                |
| AC Adapter 2(AR)           | Brand Name       | Motorola (Salom)                                    | Model Name | SSW-2919AR C-P47<br>SPN5955A   |
|                            | Power Rating     | I/P: 100-240 Vac, 500mA, O/P: 5.2Vdc,2000mA         |            |                                |
| Battery                    | Brand Name       | Lenovo (SCUD)                                       | Model Name | BL270                          |
|                            | Power Rating     | 3.85/4.4Vdc,4000mAh                                 | Type       | Li-ion                         |
| Earphone                   | Brand Name       | Motorola<br>(NEW Leaders)                           | Model Name | NLD-EM300V-01SF                |
|                            | Signal Line Type | 1.2 meter, non-shielded cable, without ferrite core |            |                                |
| USB Cable                  | Brand Name       | Motorola (Saibao)                                   | Model Name | SLQ-A081A                      |
|                            | Signal Line Type | 1.0 meter, shielded cable, without ferrite core     |            |                                |

### 4.3 General LTE SAR Test and Reporting Considerations

| Summarized necessary items addressed in KDB 941225 D05 v02r05 |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                               |         |       |        |        |        |          |
|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|---------|-------|--------|--------|--------|----------|
| FCC ID                                                        | IHDT56XF5                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                               |         |       |        |        |        |          |
| Equipment Name                                                | Mobile Cellular Phone                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                               |         |       |        |        |        |          |
| Operating Frequency Range of each LTE transmission band       | LTE Band 5: 824.7 MHz ~ 848.3 MHz<br>LTE Band 7: 2502.5 MHz ~ 2567.5 MHz<br>LTE Band 26: 814.7 MHz ~ 848.3 MHz<br>LTE Band 38: 2572.5 MHz ~ 2617.5 MHz<br>LTE Band 41: 2537.5 MHz ~ 2652.5 MHz                                                                                                                                                                                                                                                                |                                                               |         |       |        |        |        |          |
| Channel Bandwidth                                             | LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz<br>LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz<br>LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz<br>LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz<br>LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz                                                                                                                                                                                                                                             |                                                               |         |       |        |        |        |          |
| Uplink Modulations Used                                       | QPSK and 16QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                               |         |       |        |        |        |          |
| LTE Voice / Data requirements                                 | Voice and Data                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                               |         |       |        |        |        |          |
| LTE Release Version                                           | R9, Cat4                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                               |         |       |        |        |        |          |
| CA Support                                                    | Not Supported                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                               |         |       |        |        |        |          |
| LTE MPR permanently built-in by design                        | Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3                                                                                                                                                                                                                                                                                                                                                                                       |                                                               |         |       |        |        |        |          |
|                                                               | Modulation                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |         |       |        |        |        | MPR (dB) |
|                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1.4 MHz                                                       | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
|                                                               | QPSK                                                                                                                                                                                                                                                                                                                                                                                                                                                          | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
|                                                               | 16 QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ≤ 5                                                           | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
|                                                               | 16 QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                        | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |
|                                                               | 64 QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ≤ 5                                                           | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 2      |
|                                                               | 64 QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                        | > 5                                                           | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 3      |
|                                                               | 256 QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ≥ 1                                                           |         |       |        |        |        | ≤ 5      |
| LTE A-MPR                                                     | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)                                                                                                                                                                                                                                                                 |                                                               |         |       |        |        |        |          |
| Spectrum plots for RB configuration                           | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.                                                                                                                                                                                                                                                        |                                                               |         |       |        |        |        |          |
| Power reduction applied to satisfy SAR compliance             | Yes<br>1. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)<br>2. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 7/38/41. |                                                               |         |       |        |        |        |          |

| Transmission (H, M, L) channel numbers and frequencies in each LTE band |                   |             |                  |             |                  |             |                  |             |                   |
|-------------------------------------------------------------------------|-------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|-------------------|
| LTE Band 5                                                              |                   |             |                  |             |                  |             |                  |             |                   |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz  |             | Bandwidth 5 MHz  |             | Bandwidth 10 MHz |             |                   |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |                   |
| L                                                                       | 20407             | 824.7       | 20415            | 825.5       | 20425            | 826.5       | 20450            | 829         |                   |
| M                                                                       | 20525             | 836.5       | 20525            | 836.5       | 20525            | 836.5       | 20525            | 836.5       |                   |
| H                                                                       | 20643             | 848.3       | 20635            | 847.5       | 20625            | 846.5       | 20600            | 844         |                   |
| LTE Band 7                                                              |                   |             |                  |             |                  |             |                  |             |                   |
|                                                                         | Bandwidth 5 MHz   |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |                   |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |                   |
| L                                                                       | 20775             | 2502.5      | 20800            | 2505        | 20825            | 2507.5      | 20850            | 2510        |                   |
| M                                                                       | 21100             | 2535        | 21100            | 2535        | 21100            | 2535        | 21100            | 2535        |                   |
| H                                                                       | 21425             | 2567.5      | 21400            | 2565        | 21375            | 2562.5      | 21350            | 2560        |                   |
| LTE Band 26                                                             |                   |             |                  |             |                  |             |                  |             |                   |
|                                                                         | Bandwidth 1.4 MHz |             | Bandwidth 3 MHz  |             | Bandwidth 5 MHz  |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz  |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. # Freq. (MHz) |
| L                                                                       | 26697             | 814.7       | 26705            | 815.5       | 26715            | 816.5       | 26740            | 819         | 26765 821.5       |
| M                                                                       | 26865             | 831.5       | 26865            | 831.5       | 26865            | 831.5       | 26865            | 831.5       | 26865 831.5       |
| H                                                                       | 27033             | 848.3       | 27025            | 847.5       | 27015            | 846.5       | 26990            | 844         | 26965 841.5       |
| LTE Band 38                                                             |                   |             |                  |             |                  |             |                  |             |                   |
|                                                                         | Bandwidth 5 MHz   |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |                   |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |                   |
| L                                                                       | 37775             | 2572.5      | 37800            | 2575        | 37825            | 2577.5      | 37850            | 2580        |                   |
| M                                                                       | 38000             | 2595        | 38000            | 2595        | 38000            | 2595        | 38000            | 2595        |                   |
| H                                                                       | 38225             | 2617.5      | 38200            | 2615        | 38175            | 2612.5      | 38150            | 2610        |                   |
| LTE Band 41                                                             |                   |             |                  |             |                  |             |                  |             |                   |
|                                                                         | Bandwidth 5 MHz   |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |                   |
|                                                                         | Ch. #             | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |                   |
| L                                                                       | 40065             | 2537.5      | 40090            | 2540        | 40115            | 2542.5      | 40140            | 2545        |                   |
| LM                                                                      | 40385             | 2569.5      | 40390            | 2570        | 40395            | 2570.5      | 40400            | 2571        |                   |
| HM                                                                      | 40705             | 2601.5      | 40690            | 2600        | 40685            | 2599.5      | 40670            | 2598        |                   |
| H                                                                       | 41215             | 2652.5      | 41190            | 2650        | 41165            | 2647.5      | 41140            | 2645        |                   |

## **5. Re-use of Measured Data**

### **5.1 Introduction Section**

This application re-uses data collected on a similar device. The subject device of this application (Model: XT1944-6, FCC ID: IHDT56XF5) is electrically identical to the reference device (Model: XT1944-3, XT1944-4, FCC ID: IHDT56XF4) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

### **5.2 Difference Section**

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration “PED” file.

The re-used RF data includes the following bands provided in Appendix E (Sporton SAR Report No. FA7D2007 for the reference device Model: XT1944-3, XT1944-4, FCC ID: IHDT56XF4):

- GSM850/1900
- WCDMA Band V/II
- LTE Band 5/7
- WLAN/Bluetooth

LTE Band 26/38/41 full SAR test, spot check for WWAN (except for LTE Band 26/38/41) and BT/WLAN are performed for ensure that SAR measurement for both device are the same. So, the original SAR value can represent this application.

### 5.3 Spot Check Verification Data Section

| Band       | BW (MHz) | Modulation | RB Size | RB offset | Mode            | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Original model (FCC ID: IHDT56XF4) |                     |                        |                        | Spot check model (FCC ID: IHDT56XF5) |                     |                        |                        | Deviation |
|------------|----------|------------|---------|-----------|-----------------|---------------|----------|------------|-------|-------------|------------------------------------|---------------------|------------------------|------------------------|--------------------------------------|---------------------|------------------------|------------------------|-----------|
|            |          |            |         |           |                 |               |          |            |       |             | Average Power (dBm)                | Tune-Up Limit (dBm) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) | Average Power (dBm)                  | Tune-Up Limit (dBm) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |           |
| WLAN2.4GHz | -        | -          | -       | -         | 802.11b 1Mbps   | Left Cheek    | -        | Reduced    | 1     | 2412        | 16.2                               | 17                  | 0.922                  | 1.136                  | 16.2                                 | 17                  | 0.835                  | 1.029                  | -0.09%    |
| GSM850     | -        | -          | -       | -         | GPRS 2 Tx slots | Back          | 5        | Full       | 251   | 848.8       | 29.53                              | 30                  | 0.65                   | 0.724                  | 29.53                                | 30                  | 0.661                  | 0.737                  | 0.02%     |
| GSM1900    | -        | -          | -       | -         | GPRS 2 Tx slots | Bottom Side   | 5        | Reduced    | 810   | 1909.8      | 21.98                              | 22.5                | 0.835                  | 0.941                  | 21.98                                | 22.5                | 0.636                  | 0.717                  | -0.24%    |
| WCDMA V    | -        | -          | -       | -         | RMC 12.2Kbps    | Back          | 5        | Full       | 4132  | 826.4       | 23.12                              | 24                  | 0.686                  | 0.840                  | 23.12                                | 24                  | 0.679                  | 0.832                  | -0.01%    |
| WCDMA II   | -        | -          | -       | -         | RMC 12.2Kbps    | Bottom Side   | 5        | Reduced    | 9538  | 1907.6      | 16.2                               | 16.5                | 0.867                  | 0.929                  | 16.2                                 | 16.5                | 0.743                  | 0.796                  | -0.14%    |
| LTE Band 7 | 20M      | QPSK       | 1       | 49        | -               | Front         | 5        | Reduced    | 21350 | 2560        | 18.82                              | 19                  | 1.060                  | 1.105                  | 18.82                                | 19                  | 1.03                   | 1.074                  | -0.03%    |
| Bluetooth  | -        | -          | -       | -         | 1Mbps           | Front         | 5        | Full       | 39    | 2441        | 11.26                              | 11.50               | 0.043                  | 0.049                  | 11.26                                | 11.50               | 0.041                  | 0.047                  | -0.04%    |

**Note:** In the table above, all the deviation of SAR test results are compliant with uncertainty budget.

### 5.4 Reference detail Section

| Reference FCC ID | Folder Test/RF Exposure | Report Title/Section    |
|------------------|-------------------------|-------------------------|
| IHDT56XF4        | RF Exposure(FA7D2007)   | All sections applicable |

## **6. RF Exposure Limits**

### **6.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **6.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **7. Specific Absorption Rate (SAR)**

### **7.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **7.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

## 8. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**

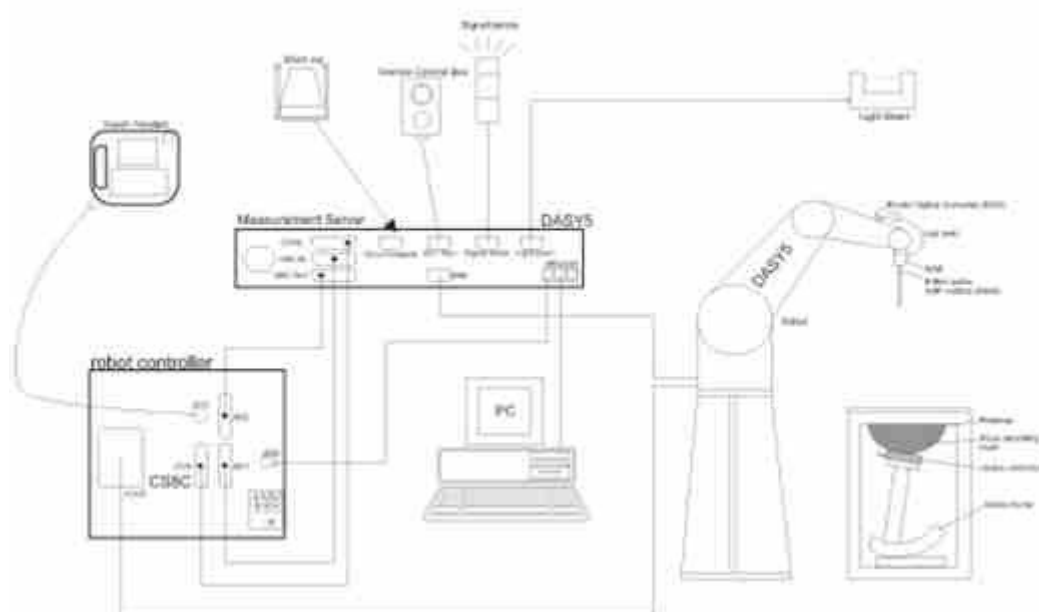


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>
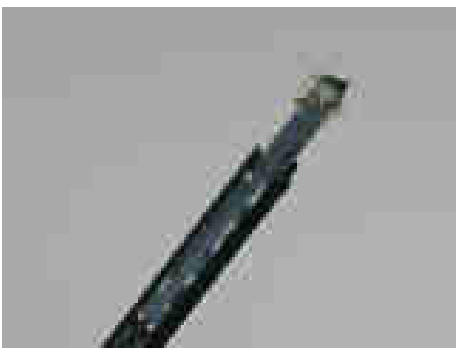
|                      |                                                                                                                                                                                  |                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – 4 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)                                                                                                                      |                                                                                    |
| <b>Directivity</b>   | $\pm 0.2$ dB in TSL (rotation around probe axis)<br>$\pm 0.3$ dB in TSL (rotation normal to probe axis)                                                                          |                                                                                    |
| <b>Dynamic Range</b> | 5 $\mu$ W/g – >100 mW/g;<br>Linearity: $\pm 0.2$ dB                                                                                                                              |                                                                                    |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 3.9 mm (body: 12 mm)<br>Distance from probe tip to dipole centers: 3.0 mm                                                   |                                                                                    |

### <EX3DV4 Probe>

|                      |                                                                                                                                                           |                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetric design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – >6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                   |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g – >100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)                                                                       |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 2.5 mm (body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                      |                                                                                     |

## 8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**

### 8.3 Phantom

#### <SAM Twin Phantom>

|                   |                                                         |                                                                                    |
|-------------------|---------------------------------------------------------|------------------------------------------------------------------------------------|
| Shell Thickness   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm             |  |
| Filling Volume    | Approx. 25 liters                                       |                                                                                    |
| Dimensions        | Length: 1000 mm; Width: 500 mm; Height: adjustable feet |                                                                                    |
| Measurement Areas | Left Hand, Right Hand, Flat Phantom                     |                                                                                    |

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

#### <ELI Phantom>

|                 |                                                  |                                                                                     |
|-----------------|--------------------------------------------------|-------------------------------------------------------------------------------------|
| Shell Thickness | 2 ± 0.2 mm (sagging: <1%)                        |  |
| Filling Volume  | Approx. 30 liters                                |                                                                                     |
| Dimensions      | Major ellipse axis: 600 mm<br>Minor axis: 400 mm |                                                                                     |

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 8.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## 9. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## 9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                              |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | $5 \pm 1$ mm                                                                                                                                                                                                                                                           | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm     |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                 |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | $\leq 2$ GHz: $\leq 15$ mm<br>$2 - 3$ GHz: $\leq 12$ mm                                                                                                                                                                                                                | $3 - 4$ GHz: $\leq 12$ mm<br>$4 - 6$ GHz: $\leq 10$ mm |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                        |

## 9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|                                                                                                                                                                                                                                                                                                             |                                           |                                                                                             | $\leq 3$ GHz                                         | $> 3$ GHz                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$                                                                                                                                                                                                                      |                                           |                                                                                             | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm* | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                             | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |                                                                                             | $\leq 5$ mm                                          | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                             | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                          | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                             |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$         |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                    | x, y, z                                   |                                                                                             | $\geq 30$ mm                                         | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.                                                                                                                                                           |                                           |                                                                                             |                                                      |                                                                               |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                           |                                                                                             |                                                      |                                                                               |

## 9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 10. Test Equipment List

| Manufacturer  | Name of Equipment             | Type/Model    | Serial Number | Calibration |           |
|---------------|-------------------------------|---------------|---------------|-------------|-----------|
|               |                               |               |               | Last Cal.   | Due Date  |
| SPEAG         | 835MHz System Validation Kit  | D835V2        | 4d091         | 2017/12/5   | 2018/12/4 |
| SPEAG         | 2600MHz System Validation Kit | D2600V2       | 1061          | 2017/12/7   | 2018/12/6 |
| SPEAG         | Data Acquisition Electronics  | DAE4          | 1326          | 2017/9/15   | 2018/9/14 |
| SPEAG         | Data Acquisition Electronics  | DAE4          | 1279          | 2018/1/3    | 2019/1/2  |
| SPEAG         | Dosimetric E-Field Probe      | EX3DV4        | 3753          | 2017/5/5    | 2018/5/4  |
| SPEAG         | Dosimetric E-Field Probe      | ES3DV3        | 3293          | 2017/9/25   | 2018/9/24 |
| SPEAG         | SAM Twin Phantom              | QD 000 P40 CB | TP-1842       | NCR         | NCR       |
| SPEAG         | SAM Twin Phantom              | QD 000 P40 CB | TP-1839       | NCR         | NCR       |
| SPEAG         | Phone Positioner              | N/A           | N/A           | NCR         | NCR       |
| Anritsu       | Radio communication analyzer  | MT8820C       | 6201300654    | 2017/8/7    | 2018/8/6  |
| Agilent       | ENA Series Network Analyzer   | E5071C        | MY46111157    | 2017/4/18   | 2018/4/17 |
| SPEAG         | DAK Kit                       | DAK3.5        | 1146          | 2017/7/18   | 2018/7/17 |
| R&S           | Signal Generator              | SMR20         | 102049        | 2017/8/17   | 2018/8/16 |
| Anritsu       | Power Meter                   | ML2495A       | 1419002       | 2017/5/15   | 2018/5/14 |
| Anritsu       | Power Sensor                  | MA2411B       | 1339124       | 2017/5/15   | 2018/5/14 |
| Anritsu       | Power Meter                   | ML2495A       | 1218006       | 2017/10/6   | 2018/10/5 |
| Anritsu       | Power Sensor                  | MA2411B       | 1207363       | 2017/10/6   | 2018/10/5 |
| EXA           | Spectrum Analyzer             | N9010A        | MY55150244    | 2017/4/18   | 2018/4/17 |
| WISEWIND      | Hygrometer                    | WISEWIND 0905 | 0905          | 2017/4/20   | 2018/4/19 |
| JM            | DIGITAC THERMOMETER           | JM222         | AA1207166     | 2017/4/19   | 2018/4/18 |
| ARRA          | Power Divider                 | A3200-2       | N/A           | Note        |           |
| Agilent       | Dual Directional Coupler      | 778D          | 50422         | Note        |           |
| PASTERNAK     | Dual Directional Coupler      | PE2214-10     | N/A           | Note        |           |
| MCL           | Attenuation1                  | BW-S10W5+     | N/A           | Note        |           |
| MCL           | Attenuation2                  | BW-S10W5+     | N/A           | Note        |           |
| MCL           | Attenuation3                  | BW-S10W5+     | N/A           | Note        |           |
| AR            | Amplifier                     | 5S1G4         | 333096        | Note        |           |
| mini-circuits | Amplifier                     | ZVE-3W-83+    | 162601250     | Note        |           |

**Note:**

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

## 11. System Verification

### 11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

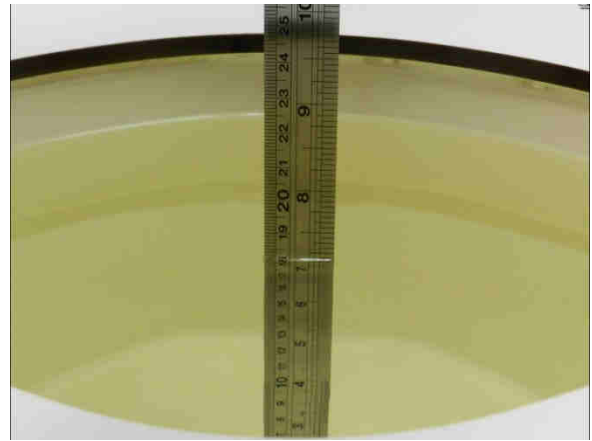


Fig 10.2 Photo of Liquid Height for Body SAR

## 11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) |
|-----------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| For Head        |           |           |               |          |               |          |                           |                               |
| 835             | 40.3      | 57.9      | 0.2           | 1.4      | 0.2           | 0        | 0.90                      | 41.5                          |
| 2600            | 54.8      | 0         | 0             | 0.1      | 0             | 45.1     | 1.96                      | 39.0                          |
| For Body        |           |           |               |          |               |          |                           |                               |
| 835             | 50.8      | 48.2      | 0             | 0.9      | 0.1           | 0        | 0.97                      | 55.2                          |
| 2600            | 68.1      | 0         | 0             | 0.1      | 0             | 31.8     | 2.16                      | 52.5                          |


### <Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date      |
|-----------------|-------------|-------------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|-----------|
| 835             | Head        | 22.7              | 0.922                     | 42.088                        | 0.90                             | 41.50                                | 2.44                   | 1.42                       | ±5        | 2018/1/27 |
| 2600            | Head        | 22.8              | 2.005                     | 37.795                        | 1.96                             | 39.00                                | 2.30                   | -3.09                      | ±5        | 2018/1/27 |
| 835             | Body        | 22.7              | 0.997                     | 54.249                        | 0.97                             | 55.20                                | 2.78                   | -1.72                      | ±5        | 2018/1/27 |
| 2600            | Body        | 22.9              | 2.223                     | 52.979                        | 2.16                             | 52.50                                | 2.92                   | 0.91                       | ±5        | 2018/2/3  |

## 11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date      | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|-------------|------------------|------------|-----------|---------|------------------------|------------------------|--------------------------|---------------|
| 2018/1/27 | 835             | Head        | 250              | 4d091      | 3293      | 1326    | 2.45                   | 9.48                   | 9.80                     | 3.38          |
| 2018/1/27 | 2600            | Head        | 250              | 1061       | 3293      | 1326    | 13.20                  | 58.20                  | 52.80                    | -9.28         |
| 2018/1/27 | 835             | Body        | 250              | 4d091      | 3293      | 1326    | 2.40                   | 9.72                   | 9.60                     | -1.23         |
| 2018/2/3  | 2600            | Body        | 250              | 1061       | 3753      | 1279    | 13.50                  | 56.40                  | 540                      | -4.26         |

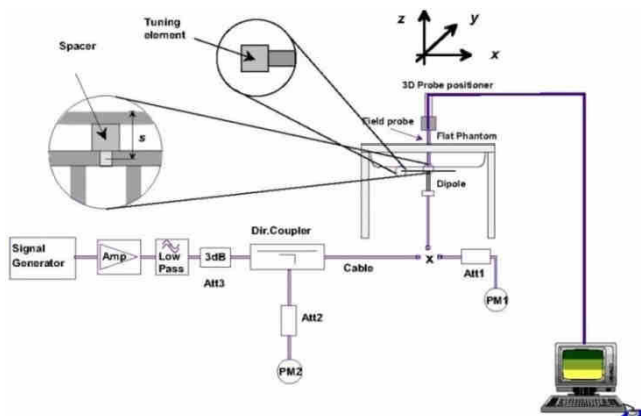

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 12. RF Exposure Positions

### 12.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

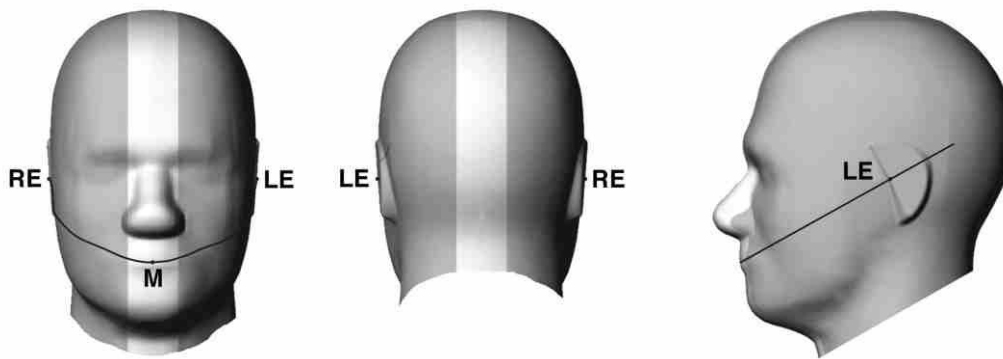


Fig 9.1.1 Front, back, and side views of SAM twin phantom

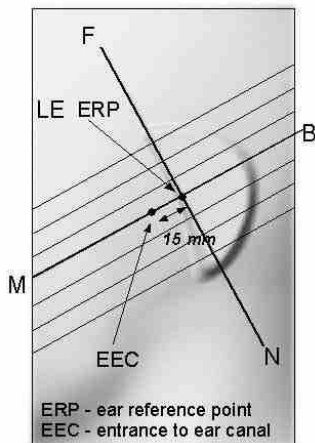


Fig 9.1.2 Close-up side view of phantom showing the ear region.


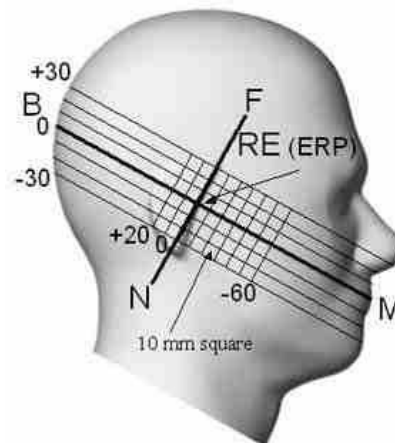



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

## 12.2 Definition of the cheek position




1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

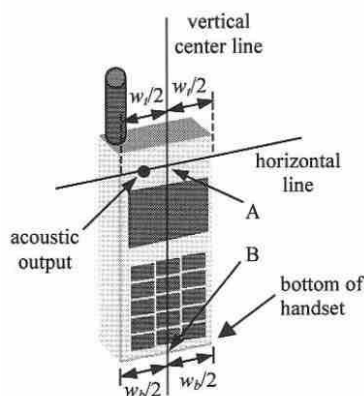

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

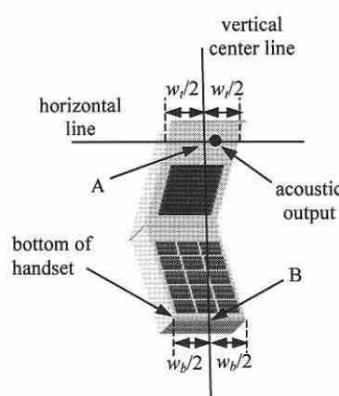


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**



**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

### **12.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

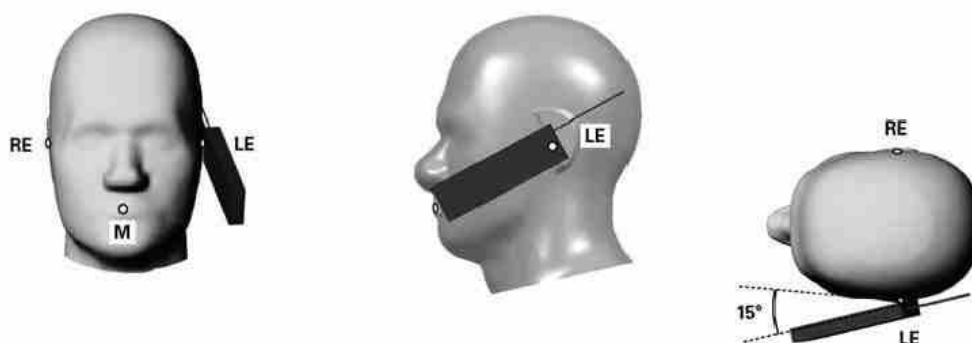


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

## 12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters) only the accessory that dictates the closest spacing to the body is tested.

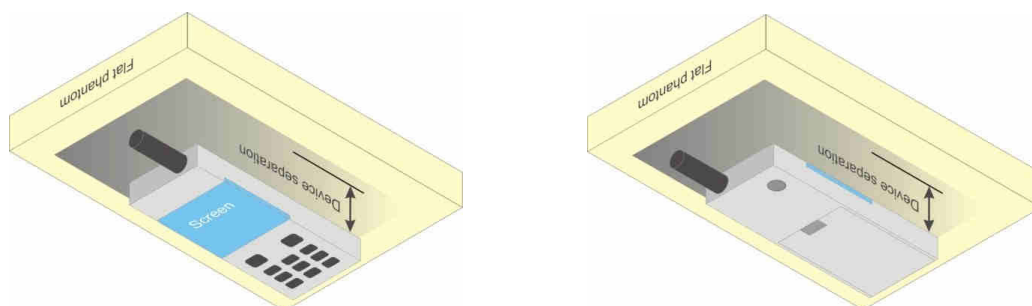

**Fig 9.4 Body Worn Position**



### **12.5 Product Specific 10g SAR Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **12.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

### **13. Conducted RF Output Power (Unit: dBm)**

#### **<LTE Conducted Power>**

##### **General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

### <Full Power Mode>

#### <LTE Band 26>

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low<br>Ch. / Freq. | Power Middle<br>Ch. / Freq. | Power High<br>Ch. / Freq. | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|------------|---------|-----------|--------------------------|-----------------------------|---------------------------|---------------------------|-------------|
| Channel         |            |         |           | 26765                    | 26865                       | 26965                     |                           |             |
| Frequency (MHz) |            |         |           | 821.5                    | 831.5                       | 841.5                     |                           |             |
| 15              | QPSK       | 1       | 0         | 22.91                    | 22.94                       | 22.82                     |                           |             |
| 15              | QPSK       | 1       | 37        | 22.88                    | 22.85                       | 22.87                     | 24                        | 0           |
| 15              | QPSK       | 1       | 74        | 22.89                    | 22.87                       | 22.78                     | 23                        | 1           |
| 15              | QPSK       | 36      | 0         | 21.99                    | 21.89                       | 21.82                     |                           |             |
| 15              | QPSK       | 36      | 20        | 22.00                    | 22.01                       | 21.83                     |                           |             |
| 15              | QPSK       | 36      | 39        | 21.96                    | 21.87                       | 21.85                     |                           |             |
| 15              | QPSK       | 75      | 0         | 22.02                    | 22.03                       | 21.84                     | 23                        | 1           |
| 15              | 16QAM      | 1       | 0         | 22.23                    | 22.1                        | 22.11                     |                           |             |
| 15              | 16QAM      | 1       | 37        | 22.14                    | 22.13                       | 21.67                     |                           |             |
| 15              | 16QAM      | 1       | 74        | 22.16                    | 22.07                       | 21.91                     | 22                        | 2           |
| 15              | 16QAM      | 36      | 0         | 20.87                    | 20.88                       | 20.72                     |                           |             |
| 15              | 16QAM      | 36      | 20        | 20.9                     | 20.92                       | 20.75                     |                           |             |
| 15              | 16QAM      | 36      | 39        | 20.85                    | 20.88                       | 20.66                     |                           |             |
| 15              | 16QAM      | 75      | 0         | 20.89                    | 20.87                       | 20.77                     | 24                        | 0           |
| Channel         |            |         |           | 26740                    | 26865                       | 26990                     |                           |             |
| Frequency (MHz) |            |         |           | 819                      | 831.5                       | 844                       |                           |             |
| 10              | QPSK       | 1       | 0         | 22.96                    | 22.7                        | 22.98                     | 24                        | 0           |
| 10              | QPSK       | 1       | 25        | 22.92                    | 22.79                       | 23.16                     |                           |             |
| 10              | QPSK       | 1       | 49        | 22.58                    | 22.93                       | 22.7                      |                           |             |
| 10              | QPSK       | 25      | 0         | 22.01                    | 22.07                       | 21.92                     | 23                        | 1           |
| 10              | QPSK       | 25      | 12        | 22.03                    | 22.02                       | 21.9                      |                           |             |
| 10              | QPSK       | 25      | 25        | 21.96                    | 21.96                       | 21.86                     |                           |             |
| 10              | QPSK       | 50      | 0         | 21.97                    | 21.94                       | 21.81                     |                           |             |
| 10              | 16QAM      | 1       | 0         | 22.01                    | 21.51                       | 22.04                     | 23                        | 1           |
| 10              | 16QAM      | 1       | 25        | 21.43                    | 21.53                       | 22.02                     |                           |             |
| 10              | 16QAM      | 1       | 49        | 21.44                    | 21.45                       | 21.54                     |                           |             |
| 10              | 16QAM      | 25      | 0         | 20.81                    | 20.88                       | 20.73                     | 22                        | 2           |
| 10              | 16QAM      | 25      | 12        | 20.93                    | 20.92                       | 20.78                     |                           |             |
| 10              | 16QAM      | 25      | 25        | 20.98                    | 20.89                       | 20.78                     |                           |             |
| 10              | 16QAM      | 50      | 0         | 20.98                    | 20.85                       | 20.83                     |                           |             |



# FCC SAR Test Report

Report No. : FA7D2007-01


| Channel         |       |    |    | 26715 | 26865 | 27015 | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------------|-------------|
| Frequency (MHz) |       |    |    | 816.5 | 831.5 | 846.5 |                           |             |
| 5               | QPSK  | 1  | 0  | 22.97 | 22.76 | 22.66 | 24                        | 0           |
| 5               | QPSK  | 1  | 12 | 23.11 | 22.75 | 22.8  |                           |             |
| 5               | QPSK  | 1  | 24 | 22.97 | 22.84 | 22.56 |                           |             |
| 5               | QPSK  | 12 | 0  | 22.05 | 21.9  | 21.8  | 23                        | 1           |
| 5               | QPSK  | 12 | 7  | 22.12 | 21.96 | 21.79 |                           |             |
| 5               | QPSK  | 12 | 13 | 22.04 | 21.85 | 21.81 |                           |             |
| 5               | QPSK  | 25 | 0  | 21.93 | 21.87 | 21.81 |                           |             |
| 5               | 16QAM | 1  | 0  | 21.36 | 21.15 | 21.04 | 23                        | 1           |
| 5               | 16QAM | 1  | 12 | 21.74 | 21.63 | 21.57 |                           |             |
| 5               | 16QAM | 1  | 24 | 21.23 | 21.23 | 21.47 |                           |             |
| 5               | 16QAM | 12 | 0  | 20.86 | 20.62 | 20.71 | 22                        | 2           |
| 5               | 16QAM | 12 | 7  | 20.84 | 20.73 | 20.88 |                           |             |
| 5               | 16QAM | 12 | 13 | 20.76 | 20.67 | 20.74 |                           |             |
| 5               | 16QAM | 25 | 0  | 20.95 | 20.71 | 20.73 |                           |             |
| Channel         |       |    |    | 26705 | 26865 | 27025 | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 815.5 | 831.5 | 847.5 |                           |             |
| 3               | QPSK  | 1  | 0  | 23.13 | 22.95 | 22.76 | 24                        | 0           |
| 3               | QPSK  | 1  | 8  | 23.28 | 23.09 | 22.74 |                           |             |
| 3               | QPSK  | 1  | 14 | 22.94 | 23.08 | 22.53 |                           |             |
| 3               | QPSK  | 8  | 0  | 21.97 | 21.96 | 21.87 | 23                        | 1           |
| 3               | QPSK  | 8  | 4  | 22.04 | 21.96 | 21.83 |                           |             |
| 3               | QPSK  | 8  | 7  | 22.07 | 22.03 | 21.81 |                           |             |
| 3               | QPSK  | 15 | 0  | 22.06 | 21.99 | 21.84 |                           |             |
| 3               | 16QAM | 1  | 0  | 22.07 | 21.91 | 22.17 | 23                        | 1           |
| 3               | 16QAM | 1  | 8  | 22.2  | 21.59 | 21.92 |                           |             |
| 3               | 16QAM | 1  | 14 | 22.22 | 21.25 | 21.46 |                           |             |
| 3               | 16QAM | 8  | 0  | 21.03 | 20.67 | 20.82 | 22                        | 2           |
| 3               | 16QAM | 8  | 4  | 21.11 | 20.95 | 20.8  |                           |             |
| 3               | 16QAM | 8  | 7  | 21.16 | 20.89 | 20.8  |                           |             |
| 3               | 16QAM | 15 | 0  | 21.09 | 20.88 | 20.88 |                           |             |
| Channel         |       |    |    | 26697 | 26865 | 27033 | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 814.7 | 831.5 | 848.3 |                           |             |
| 1.4             | QPSK  | 1  | 0  | 22.79 | 22.73 | 22.69 | 24                        | 0           |
| 1.4             | QPSK  | 1  | 3  | 23.09 | 22.94 | 22.85 |                           |             |
| 1.4             | QPSK  | 1  | 5  | 22.96 | 22.94 | 22.72 |                           |             |
| 1.4             | QPSK  | 3  | 0  | 23.04 | 22.97 | 22.78 |                           |             |
| 1.4             | QPSK  | 3  | 1  | 23.16 | 23.27 | 22.74 |                           |             |
| 1.4             | QPSK  | 3  | 3  | 23.14 | 23.12 | 22.85 | 23                        | 1           |
| 1.4             | QPSK  | 6  | 0  | 21.99 | 21.96 | 21.71 |                           |             |
| 1.4             | 16QAM | 1  | 0  | 21.58 | 21.42 | 21.39 | 23                        | 1           |
| 1.4             | 16QAM | 1  | 3  | 21.66 | 21.63 | 21.5  |                           |             |
| 1.4             | 16QAM | 1  | 5  | 21.56 | 21.81 | 21.34 |                           |             |
| 1.4             | 16QAM | 3  | 0  | 21.95 | 21.76 | 21.72 |                           |             |
| 1.4             | 16QAM | 3  | 1  | 22.1  | 21.79 | 21.72 |                           |             |
| 1.4             | 16QAM | 3  | 3  | 22.11 | 21.94 | 21.75 |                           |             |
| 1.4             | 16QAM | 6  | 0  | 20.85 | 20.72 | 20.71 | 22                        | 2           |

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

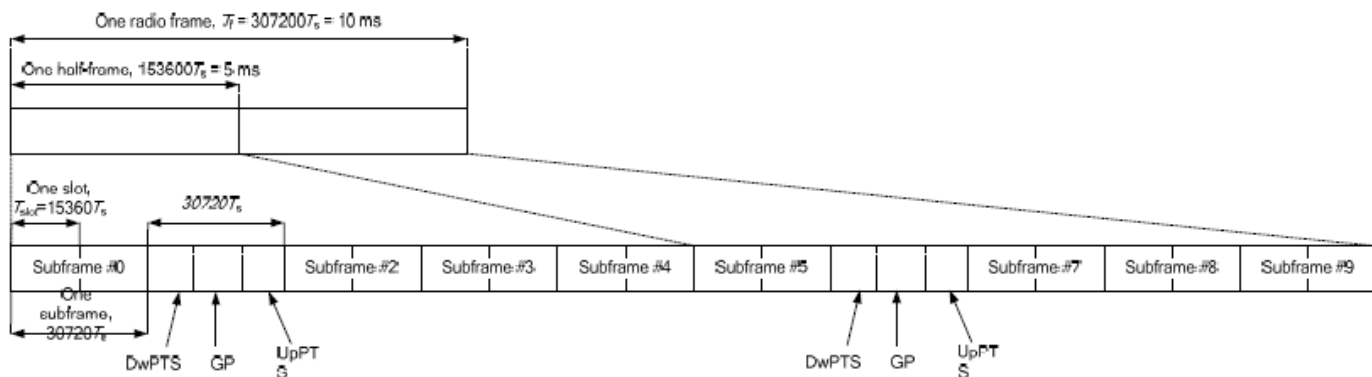

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$                   | $2192 \cdot T_s$               | $2560 \cdot T_s$                 |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $7680 \cdot T_s$                   | $4384 \cdot T_s$               | $5120 \cdot T_s$                 |
| 5                              | $6592 \cdot T_s$                 |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  | -                              | -                                |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  |                                |                                  |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  |                                |                                  |

| Special subframe (30720·T <sub>s</sub> ): Normal cyclic prefix in downlink (UpPTS) |                                |                                |                                  |
|------------------------------------------------------------------------------------|--------------------------------|--------------------------------|----------------------------------|
|                                                                                    | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe                                         | 0~4                            | 7.13%                          | 8.33%                            |
|                                                                                    | 5~9                            | 14.3%                          | 16.7%                            |

| Special subframe(30720·T <sub>s</sub> ): Extended cyclic prefix in downlink (UpPTS) |                                |                                |                                  |
|-------------------------------------------------------------------------------------|--------------------------------|--------------------------------|----------------------------------|
|                                                                                     | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe                                          | 0~3                            | 7.13%                          | 8.33%                            |
|                                                                                     | 4~7                            | 14.3%                          | 16.7%                            |

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

**<Full Power Mode>**
**<LTE Band 38>**

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel         |            |         |           | 37850                 | 38000                    | 38150                  |                     |          |
| Frequency (MHz) |            |         |           | 2580                  | 2595                     | 2610                   |                     |          |
| 20              | QPSK       | 1       | 0         | 22.07                 | 22.01                    | 22.28                  | 24                  | 0        |
| 20              | QPSK       | 1       | 49        | 22.27                 | 22.29                    | 22.16                  |                     |          |
| 20              | QPSK       | 1       | 99        | 22.30                 | 22.14                    | 22.12                  |                     |          |
| 20              | QPSK       | 50      | 0         | 21.28                 | 21.3                     | 21.18                  | 23                  | 1        |
| 20              | QPSK       | 50      | 24        | 21.37                 | 21.33                    | 21.11                  |                     |          |
| 20              | QPSK       | 50      | 50        | 21.26                 | 21.28                    | 21.26                  |                     |          |
| 20              | QPSK       | 100     | 0         | 21.32                 | 21.26                    | 21.11                  | 23                  | 1        |
| 20              | 16QAM      | 1       | 0         | 21.08                 | 21.03                    | 21.08                  |                     |          |
| 20              | 16QAM      | 1       | 49        | 21.2                  | 21.04                    | 21.1                   |                     |          |
| 20              | 16QAM      | 1       | 99        | 21.02                 | 21.04                    | 21.01                  | 22                  | 2        |
| 20              | 16QAM      | 50      | 0         | 20.22                 | 20.23                    | 20.12                  |                     |          |
| 20              | 16QAM      | 50      | 24        | 20.25                 | 20.19                    | 20.16                  |                     |          |
| 20              | 16QAM      | 50      | 50        | 20.33                 | 20.34                    | 20.21                  | 22                  | 2        |
| 20              | 16QAM      | 100     | 0         | 20.12                 | 20.33                    | 20.17                  |                     |          |
| Channel         |            |         |           | 37825                 | 38000                    | 38175                  | Tune-up limit (dBm) | MPR (dB) |
| Frequency (MHz) |            |         |           | 2577.5                | 2595                     | 2612.5                 |                     |          |
| 15              | QPSK       | 1       | 0         | 22.08                 | 22.11                    | 22.37                  | 24                  | 0        |
| 15              | QPSK       | 1       | 37        | 22.15                 | 22.39                    | 22.17                  |                     |          |
| 15              | QPSK       | 1       | 74        | 22.09                 | 22.12                    | 22.29                  |                     |          |
| 15              | QPSK       | 36      | 0         | 21.14                 | 21.25                    | 21.14                  | 23                  | 1        |
| 15              | QPSK       | 36      | 20        | 21.17                 | 21.19                    | 21.12                  |                     |          |
| 15              | QPSK       | 36      | 39        | 21.34                 | 21.21                    | 21.23                  |                     |          |
| 15              | QPSK       | 75      | 0         | 21.19                 | 21.29                    | 21.2                   | 23                  | 1        |
| 15              | 16QAM      | 1       | 0         | 21.01                 | 21.07                    | 21.08                  |                     |          |
| 15              | 16QAM      | 1       | 37        | 21.16                 | 21.05                    | 21.05                  |                     |          |
| 15              | 16QAM      | 1       | 74        | 21.05                 | 21.02                    | 21.07                  | 22                  | 2        |
| 15              | 16QAM      | 36      | 0         | 20.19                 | 20.15                    | 20.13                  |                     |          |
| 15              | 16QAM      | 36      | 20        | 20.23                 | 20.19                    | 20.11                  |                     |          |
| 15              | 16QAM      | 36      | 39        | 20.26                 | 20.3                     | 20.15                  | 22                  | 2        |
| 15              | 16QAM      | 75      | 0         | 20.12                 | 20.33                    | 20.13                  |                     |          |



# FCC SAR Test Report

Report No. : FA7D2007-01

| Channel         |       |    |    | 37800  | 38000 | 38200  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------------|-------------|
| Frequency (MHz) |       |    |    | 2575   | 2595  | 2615   |                           |             |
| 10              | QPSK  | 1  | 0  | 22.09  | 22.12 | 22.06  | 24                        | 0           |
| 10              | QPSK  | 1  | 25 | 22.07  | 22.29 | 22.33  |                           |             |
| 10              | QPSK  | 1  | 49 | 22.3   | 22.35 | 22.27  |                           |             |
| 10              | QPSK  | 25 | 0  | 21.19  | 21.33 | 21.31  | 23                        | 1           |
| 10              | QPSK  | 25 | 12 | 21.23  | 21.23 | 21.2   |                           |             |
| 10              | QPSK  | 25 | 25 | 21.31  | 21.23 | 21.35  |                           |             |
| 10              | QPSK  | 50 | 0  | 21.29  | 21.27 | 21.27  |                           |             |
| 10              | 16QAM | 1  | 0  | 21.02  | 21.06 | 21.06  | 23                        | 1           |
| 10              | 16QAM | 1  | 25 | 21.16  | 21.09 | 21.13  |                           |             |
| 10              | 16QAM | 1  | 49 | 21.17  | 21.01 | 21.07  |                           |             |
| 10              | 16QAM | 25 | 0  | 20.11  | 20.22 | 20.17  | 22                        | 2           |
| 10              | 16QAM | 25 | 12 | 20.1   | 20.38 | 20.4   |                           |             |
| 10              | 16QAM | 25 | 25 | 20.37  | 20.4  | 20.4   |                           |             |
| 10              | 16QAM | 50 | 0  | 20.23  | 20.24 | 20.43  |                           |             |
| Channel         |       |    |    | 37775  | 38000 | 38225  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 2572.5 | 2595  | 2617.5 |                           |             |
| 5               | QPSK  | 1  | 0  | 22.03  | 22.07 | 22.17  | 24                        | 0           |
| 5               | QPSK  | 1  | 12 | 22.17  | 22.34 | 22.16  |                           |             |
| 5               | QPSK  | 1  | 24 | 22.05  | 22.05 | 22.09  |                           |             |
| 5               | QPSK  | 12 | 0  | 21.16  | 21.13 | 21.27  | 23                        | 1           |
| 5               | QPSK  | 12 | 7  | 21.16  | 21.11 | 21.3   |                           |             |
| 5               | QPSK  | 12 | 13 | 21.16  | 21.23 | 21.2   |                           |             |
| 5               | QPSK  | 25 | 0  | 21.17  | 21.29 | 21.27  |                           |             |
| 5               | 16QAM | 1  | 0  | 21.02  | 21.06 | 21.04  | 23                        | 1           |
| 5               | 16QAM | 1  | 12 | 21.06  | 21.04 | 21.02  |                           |             |
| 5               | 16QAM | 1  | 24 | 21.01  | 21.01 | 21.03  |                           |             |
| 5               | 16QAM | 12 | 0  | 20.17  | 21.07 | 20.14  | 22                        | 2           |
| 5               | 16QAM | 12 | 7  | 20.18  | 20.02 | 20.01  |                           |             |
| 5               | 16QAM | 12 | 13 | 20.11  | 20.13 | 21.08  |                           |             |
| 5               | 16QAM | 25 | 0  | 20.43  | 20.47 | 20.1   |                           |             |

**<LTE Band 41>**

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Low Ch. / Freq. | Power Middle High Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel         |            |         |           | 40140                 | 40400                        | 40670                         | 41140                  | 24                  | 0        |
| Frequency (MHz) |            |         |           | 2545                  | 2571                         | 2598                          | 2645                   |                     |          |
| 20              | QPSK       | 1       | 0         | 22.77                 | 22.73                        | 22.65                         | 22.67                  |                     |          |
| 20              | QPSK       | 1       | 49        | 22.52                 | 22.87                        | 22.68                         | 22.90                  | 23                  | 1        |
| 20              | QPSK       | 1       | 99        | 22.52                 | 22.58                        | 22.49                         | 22.79                  |                     |          |
| 20              | QPSK       | 50      | 0         | 21.93                 | 21.74                        | 21.92                         | 21.96                  |                     |          |
| 20              | QPSK       | 50      | 24        | 21.77                 | 21.89                        | 21.96                         | 21.86                  | 23                  | 1        |
| 20              | QPSK       | 50      | 50        | 21.67                 | 21.94                        | 21.87                         | 21.87                  |                     |          |
| 20              | QPSK       | 100     | 0         | 21.68                 | 21.33                        | 21.85                         | 21.93                  |                     |          |
| 20              | 16QAM      | 1       | 0         | 21.58                 | 21.67                        | 21.38                         | 21.7                   | 23                  | 1        |
| 20              | 16QAM      | 1       | 49        | 21.52                 | 21.48                        | 21.68                         | 21.54                  |                     |          |
| 20              | 16QAM      | 1       | 99        | 21.4                  | 21.29                        | 21.28                         | 21.45                  |                     |          |
| 20              | 16QAM      | 50      | 0         | 20.64                 | 20.68                        | 21.05                         | 21.03                  | 22                  | 2        |
| 20              | 16QAM      | 50      | 24        | 20.9                  | 20.83                        | 20.91                         | 20.95                  |                     |          |
| 20              | 16QAM      | 50      | 50        | 20.72                 | 20.89                        | 20.82                         | 20.96                  |                     |          |
| 20              | 16QAM      | 100     | 0         | 20.73                 | 20.89                        | 20.78                         | 21.01                  | 24                  | 0        |
| Channel         |            |         |           | 40115                 | 40395                        | 40685                         | 41165                  |                     |          |
| Frequency (MHz) |            |         |           | 2542.5                | 2570.5                       | 2599.5                        | 2647.5                 |                     |          |
| 15              | QPSK       | 1       | 0         | 22.81                 | 22.73                        | 22.64                         | 22.69                  | 24                  | 0        |
| 15              | QPSK       | 1       | 37        | 22.63                 | 22.73                        | 22.81                         | 22.95                  |                     |          |
| 15              | QPSK       | 1       | 74        | 22.62                 | 22.72                        | 22.76                         | 22.81                  |                     |          |
| 15              | QPSK       | 36      | 0         | 21.87                 | 21.81                        | 21.82                         | 21.92                  | 23                  | 1        |
| 15              | QPSK       | 36      | 20        | 21.84                 | 21.8                         | 21.84                         | 21.82                  |                     |          |
| 15              | QPSK       | 36      | 39        | 21.66                 | 21.94                        | 21.76                         | 21.89                  |                     |          |
| 15              | QPSK       | 75      | 0         | 21.71                 | 21.73                        | 21.79                         | 21.85                  | 23                  | 1        |
| 15              | 16QAM      | 1       | 0         | 22.1                  | 21.73                        | 21.63                         | 21.53                  |                     |          |
| 15              | 16QAM      | 1       | 37        | 21.43                 | 21.68                        | 21.73                         | 21.79                  |                     |          |
| 15              | 16QAM      | 1       | 74        | 21.32                 | 21.44                        | 21.67                         | 21.67                  | 22                  | 2        |
| 15              | 16QAM      | 36      | 0         | 20.84                 | 20.81                        | 20.72                         | 20.83                  |                     |          |
| 15              | 16QAM      | 36      | 20        | 20.69                 | 20.91                        | 20.73                         | 20.85                  |                     |          |
| 15              | 16QAM      | 36      | 39        | 20.66                 | 20.95                        | 20.67                         | 20.84                  | 22                  | 2        |
| 15              | 16QAM      | 75      | 0         | 20.75                 | 20.77                        | 20.83                         | 20.84                  |                     |          |



# FCC SAR Test Report

Report No. : FA7D2007-01

| Channel         |       |    |    | 40090  | 40390  | 40690  | 41190  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|-------|----|----|--------|--------|--------|--------|---------------------------|-------------|
| Frequency (MHz) |       |    |    | 2540   | 2570   | 2600   | 2650   |                           |             |
| 10              | QPSK  | 1  | 0  | 22.77  | 22.64  | 22.63  | 22.77  | 24                        | 0           |
| 10              | QPSK  | 1  | 25 | 22.71  | 22.62  | 22.81  | 22.81  |                           |             |
| 10              | QPSK  | 1  | 49 | 22.57  | 22.71  | 22.6   | 22.81  |                           |             |
| 10              | QPSK  | 25 | 0  | 21.79  | 21.76  | 21.85  | 21.97  | 23                        | 1           |
| 10              | QPSK  | 25 | 12 | 21.77  | 21.94  | 21.79  | 22.02  |                           |             |
| 10              | QPSK  | 25 | 25 | 21.75  | 21.97  | 21.84  | 21.84  |                           |             |
| 10              | QPSK  | 50 | 0  | 21.8   | 21.96  | 21.88  | 21.92  |                           |             |
| 10              | 16QAM | 1  | 0  | 21.6   | 21.63  | 21.45  | 21.89  | 23                        | 1           |
| 10              | 16QAM | 1  | 25 | 21.38  | 21.64  | 21.58  | 21.57  |                           |             |
| 10              | 16QAM | 1  | 49 | 21.35  | 21.69  | 21.38  | 21.45  |                           |             |
| 10              | 16QAM | 25 | 0  | 20.94  | 20.71  | 20.78  | 20.86  | 22                        | 2           |
| 10              | 16QAM | 25 | 12 | 20.81  | 20.79  | 20.85  | 20.84  |                           |             |
| 10              | 16QAM | 25 | 25 | 21.03  | 20.84  | 20.88  | 20.99  |                           |             |
| 10              | 16QAM | 50 | 0  | 20.73  | 20.82  | 20.88  | 20.81  |                           |             |
| Channel         |       |    |    | 40065  | 40385  | 40705  | 41215  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 2537.5 | 2569.5 | 2601.5 | 2652.5 |                           |             |
| 5               | QPSK  | 1  | 0  | 22.58  | 22.55  | 22.63  | 22.77  | 24                        | 0           |
| 5               | QPSK  | 1  | 12 | 22.64  | 22.81  | 22.72  | 22.89  |                           |             |
| 5               | QPSK  | 1  | 24 | 22.36  | 22.78  | 22.53  | 22.7   |                           |             |
| 5               | QPSK  | 12 | 0  | 21.66  | 21.74  | 21.82  | 21.97  | 23                        | 1           |
| 5               | QPSK  | 12 | 7  | 21.77  | 21.79  | 21.93  | 21.89  |                           |             |
| 5               | QPSK  | 12 | 13 | 21.71  | 21.77  | 21.78  | 21.94  |                           |             |
| 5               | QPSK  | 25 | 0  | 21.64  | 21.83  | 21.89  | 21.91  |                           |             |
| 5               | 16QAM | 1  | 0  | 21.04  | 21.17  | 21.3   | 21.64  | 23                        | 1           |
| 5               | 16QAM | 1  | 12 | 21.22  | 21.64  | 21.6   | 21.5   |                           |             |
| 5               | 16QAM | 1  | 24 | 21.4   | 21.54  | 21.58  | 21.75  |                           |             |
| 5               | 16QAM | 12 | 0  | 20.66  | 20.75  | 20.72  | 20.77  | 22                        | 2           |
| 5               | 16QAM | 12 | 7  | 20.76  | 20.8   | 20.73  | 20.83  |                           |             |
| 5               | 16QAM | 12 | 13 | 20.61  | 20.85  | 20.76  | 20.97  |                           |             |
| 5               | 16QAM | 25 | 0  | 20.95  | 20.99  | 20.95  | 21.26  |                           |             |

### <Reduced Power Mode for Hotspot On/P-Sensor On>

**<LTE Band 38>**

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low<br>Ch. / Freq. | Power Middle<br>Ch. / Freq. | Power High<br>Ch. / Freq. | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|------------|---------|-----------|--------------------------|-----------------------------|---------------------------|---------------------------|-------------|
| Channel         |            |         |           | 37850                    | 38000                       | 38150                     |                           |             |
| Frequency (MHz) |            |         |           | 2580                     | 2595                        | 2610                      |                           |             |
| 20              | QPSK       | 1       | 0         | 19.71                    | 19.77                       | 20                        | 21                        | 0           |
| 20              | QPSK       | 1       | 49        | 19.8                     | 20.01                       | 19.99                     |                           |             |
| 20              | QPSK       | 1       | 99        | 20.05                    | 19.78                       | 19.78                     |                           |             |
| 20              | QPSK       | 50      | 0         | 19.84                    | 19.8                        | 19.77                     | 21                        | 0           |
| 20              | QPSK       | 50      | 24        | 19.96                    | 19.8                        | 19.65                     |                           |             |
| 20              | QPSK       | 50      | 50        | 19.85                    | 19.88                       | 19.9                      |                           |             |
| 20              | QPSK       | 100     | 0         | 19.9                     | 19.8                        | 19.73                     | 21                        | 0           |
| 20              | 16QAM      | 1       | 0         | 19.72                    | 19.36                       | 19.78                     |                           |             |
| 20              | 16QAM      | 1       | 49        | 19.79                    | 19.68                       | 19.78                     |                           |             |
| 20              | 16QAM      | 1       | 99        | 19.45                    | 19.32                       | 19.68                     | 21                        | 0           |
| 20              | 16QAM      | 50      | 0         | 19.84                    | 19.8                        | 19.65                     |                           |             |
| 20              | 16QAM      | 50      | 24        | 19.86                    | 19.8                        | 19.55                     |                           |             |
| 20              | 16QAM      | 50      | 50        | 19.98                    | 19.81                       | 19.7                      | 21                        | 0           |
| 20              | 16QAM      | 100     | 0         | 19.96                    | 19.84                       | 19.78                     |                           |             |
| Channel         |            |         |           | 37825                    | 38000                       | 38175                     | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |            |         |           | 2577.5                   | 2595                        | 2612.5                    |                           |             |
| 15              | QPSK       | 1       | 0         | 19.66                    | 19.69                       | 19.94                     | 21                        | 0           |
| 15              | QPSK       | 1       | 37        | 19.94                    | 19.71                       | 19.78                     |                           |             |
| 15              | QPSK       | 1       | 74        | 19.79                    | 19.57                       | 19.79                     |                           |             |
| 15              | QPSK       | 36      | 0         | 19.86                    | 19.86                       | 19.7                      | 21                        | 0           |
| 15              | QPSK       | 36      | 20        | 19.93                    | 19.86                       | 19.74                     |                           |             |
| 15              | QPSK       | 36      | 39        | 19.91                    | 19.86                       | 19.81                     |                           |             |
| 15              | QPSK       | 75      | 0         | 19.9                     | 19.8                        | 19.74                     | 21                        | 0           |
| 15              | 16QAM      | 1       | 0         | 19.47                    | 19.65                       | 19.77                     |                           |             |
| 15              | 16QAM      | 1       | 37        | 19.86                    | 19.73                       | 19.58                     |                           |             |
| 15              | 16QAM      | 1       | 74        | 19.43                    | 19.59                       | 19.3                      | 21                        | 0           |
| 15              | 16QAM      | 36      | 0         | 19.7                     | 19.7                        | 19.55                     |                           |             |
| 15              | 16QAM      | 36      | 20        | 19.81                    | 19.81                       | 19.58                     |                           |             |
| 15              | 16QAM      | 36      | 39        | 19.68                    | 19.81                       | 19.65                     | 21                        | 0           |
| 15              | 16QAM      | 75      | 0         | 19.79                    | 19.94                       | 19.58                     |                           |             |



# FCC SAR Test Report

Report No. : FA7D2007-01

| Channel         |       |    |    | 37800  | 38000 | 38200  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------------|-------------|
| Frequency (MHz) |       |    |    | 2575   | 2595  | 2615   |                           |             |
| 10              | QPSK  | 1  | 0  | 19.71  | 19.77 | 20     | 21                        | 0           |
| 10              | QPSK  | 1  | 25 | 19.8   | 20.05 | 19.99  |                           |             |
| 10              | QPSK  | 1  | 49 | 19.91  | 19.78 | 19.78  |                           |             |
| 10              | QPSK  | 25 | 0  | 19.84  | 19.8  | 19.77  | 21                        | 0           |
| 10              | QPSK  | 25 | 12 | 19.85  | 19.8  | 19.65  |                           |             |
| 10              | QPSK  | 25 | 25 | 19.96  | 19.88 | 19.9   |                           |             |
| 10              | QPSK  | 50 | 0  | 19.8   | 19.9  | 19.73  |                           |             |
| 10              | 16QAM | 1  | 0  | 19.72  | 19.36 | 19.78  | 21                        | 0           |
| 10              | 16QAM | 1  | 25 | 19.79  | 19.68 | 19.78  |                           |             |
| 10              | 16QAM | 1  | 49 | 19.45  | 19.32 | 19.68  |                           |             |
| 10              | 16QAM | 25 | 0  | 19.84  | 19.8  | 19.65  | 21                        | 0           |
| 10              | 16QAM | 25 | 12 | 19.86  | 19.8  | 19.55  |                           |             |
| 10              | 16QAM | 25 | 25 | 19.98  | 19.81 | 19.7   |                           |             |
| 10              | 16QAM | 50 | 0  | 19.96  | 19.84 | 19.78  |                           |             |
| Channel         |       |    |    | 37775  | 38000 | 38225  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 2572.5 | 2595  | 2617.5 |                           |             |
| 5               | QPSK  | 1  | 0  | 19.74  | 19.84 | 19.72  | 21                        | 0           |
| 5               | QPSK  | 1  | 12 | 19.86  | 19.88 | 19.74  |                           |             |
| 5               | QPSK  | 1  | 24 | 19.66  | 19.55 | 19.68  |                           |             |
| 5               | QPSK  | 12 | 0  | 19.77  | 19.79 | 19.79  | 21                        | 0           |
| 5               | QPSK  | 12 | 7  | 19.68  | 19.75 | 19.71  |                           |             |
| 5               | QPSK  | 12 | 13 | 19.77  | 19.74 | 19.79  |                           |             |
| 5               | QPSK  | 25 | 0  | 19.79  | 19.86 | 19.82  |                           |             |
| 5               | 16QAM | 1  | 0  | 19.73  | 19.62 | 19.41  | 21                        | 0           |
| 5               | 16QAM | 1  | 12 | 19.67  | 19.77 | 19.62  |                           |             |
| 5               | 16QAM | 1  | 24 | 19.24  | 19.51 | 19.25  |                           |             |
| 5               | 16QAM | 12 | 0  | 19.79  | 19.71 | 19.61  | 21                        | 0           |
| 5               | 16QAM | 12 | 7  | 19.8   | 19.76 | 19.61  |                           |             |
| 5               | 16QAM | 12 | 13 | 19.67  | 19.75 | 19.59  |                           |             |
| 5               | 16QAM | 25 | 0  | 20.04  | 20    | 19.88  |                           |             |

**<LTE Band 41>**

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Low Ch. / Freq. | Power Middle High Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel         |            |         |           | 40140                 | 40400                        | 40670                         | 41140                  | 21                  | 0        |
| Frequency (MHz) |            |         |           | 2545                  | 2571                         | 2598                          | 2645                   |                     |          |
| 20              | QPSK       | 1       | 0         | 20.41                 | 20.29                        | 20.27                         | 20.31                  |                     |          |
| 20              | QPSK       | 1       | 49        | 20.26                 | 20.48                        | 20.49                         | 20.52                  | 21                  | 1        |
| 20              | QPSK       | 1       | 99        | 20.29                 | 20.25                        | 20.13                         | 20.35                  |                     |          |
| 20              | QPSK       | 50      | 0         | 20.46                 | 20.43                        | 20.47                         | 20.59                  |                     |          |
| 20              | QPSK       | 50      | 24        | 20.4                  | 20.52                        | 20.59                         | 20.33                  | 21                  | 1        |
| 20              | QPSK       | 50      | 50        | 20.32                 | 20.56                        | 20.36                         | 20.44                  |                     |          |
| 20              | QPSK       | 100     | 0         | 20.34                 | 20.48                        | 20.47                         | 20.54                  |                     |          |
| 20              | 16QAM      | 1       | 0         | 20.14                 | 20.35                        | 20.09                         | 20.17                  | 21                  | 1        |
| 20              | 16QAM      | 1       | 49        | 20.15                 | 20.19                        | 20.29                         | 20.1                   |                     |          |
| 20              | 16QAM      | 1       | 99        | 19.89                 | 20.24                        | 19.93                         | 20.21                  |                     |          |
| 20              | 16QAM      | 50      | 0         | 20.39                 | 20.38                        | 20.51                         | 20.44                  | 21                  | 2        |
| 20              | 16QAM      | 50      | 24        | 20.45                 | 20.47                        | 20.52                         | 20.21                  |                     |          |
| 20              | 16QAM      | 50      | 50        | 20.25                 | 20.52                        | 20.46                         | 20.48                  |                     |          |
| 20              | 16QAM      | 100     | 0         | 20.39                 | 20.7                         | 20.4                          | 20.38                  | 21                  | 2        |
| Channel         |            |         |           | 40115                 | 40395                        | 40685                         | 41165                  |                     |          |
| Frequency (MHz) |            |         |           | 2542.5                | 2570.5                       | 2599.5                        | 2647.5                 |                     |          |
| 15              | QPSK       | 1       | 0         | 20.45                 | 20.38                        | 20.12                         | 20.27                  | 21                  | 0        |
| 15              | QPSK       | 1       | 37        | 20.44                 | 20.63                        | 20.49                         | 20.37                  |                     |          |
| 15              | QPSK       | 1       | 74        | 20.34                 | 20.43                        | 20.22                         | 20.49                  |                     |          |
| 15              | QPSK       | 36      | 0         | 20.41                 | 20.42                        | 20.37                         | 20.48                  | 21                  | 1        |
| 15              | QPSK       | 36      | 20        | 20.35                 | 20.52                        | 20.44                         | 20.46                  |                     |          |
| 15              | QPSK       | 36      | 39        | 20.39                 | 20.66                        | 20.44                         | 20.3                   |                     |          |
| 15              | QPSK       | 75      | 0         | 20.37                 | 20.54                        | 20.4                          | 20.38                  | 21                  | 1        |
| 15              | 16QAM      | 1       | 0         | 20.71                 | 20.6                         | 20.29                         | 20.29                  |                     |          |
| 15              | 16QAM      | 1       | 37        | 20.5                  | 20.52                        | 20.24                         | 20.15                  |                     |          |
| 15              | 16QAM      | 1       | 74        | 20.05                 | 20.33                        | 20.22                         | 20.14                  | 21                  | 2        |
| 15              | 16QAM      | 36      | 0         | 20.48                 | 20.41                        | 20.25                         | 20.31                  |                     |          |
| 15              | 16QAM      | 36      | 20        | 20.24                 | 20.52                        | 20.24                         | 20.31                  |                     |          |
| 15              | 16QAM      | 36      | 39        | 20.3                  | 20.47                        | 20.26                         | 20.46                  | 21                  | 2        |
| 15              | 16QAM      | 75      | 0         | 20.41                 | 20.48                        | 20.35                         | 20.37                  |                     |          |




# FCC SAR Test Report

Report No. : FA7D2007-01

| Channel         |       |    |    | 40090  | 40390  | 40690  | 41190  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
|-----------------|-------|----|----|--------|--------|--------|--------|---------------------------|-------------|
| Frequency (MHz) |       |    |    | 2540   | 2570   | 2600   | 2650   |                           |             |
| 10              | QPSK  | 1  | 0  | 20.33  | 20.3   | 20.2   | 20.25  | 21                        | 0           |
| 10              | QPSK  | 1  | 25 | 20.25  | 20.37  | 20.23  | 20.33  |                           |             |
| 10              | QPSK  | 1  | 49 | 20.28  | 20.45  | 20.1   | 20.44  |                           |             |
| 10              | QPSK  | 25 | 0  | 20.46  | 20.39  | 20.48  | 20.51  | 21                        | 1           |
| 10              | QPSK  | 25 | 12 | 20.47  | 20.49  | 20.55  | 20.37  |                           |             |
| 10              | QPSK  | 25 | 25 | 20.43  | 20.62  | 20.44  | 20.44  |                           |             |
| 10              | QPSK  | 50 | 0  | 20.35  | 20.6   | 20.46  | 20.47  |                           |             |
| 10              | 16QAM | 1  | 0  | 20.24  | 20.24  | 19.85  | 19.58  | 21                        | 1           |
| 10              | 16QAM | 1  | 25 | 20.1   | 20.2   | 20.03  | 20.12  |                           |             |
| 10              | 16QAM | 1  | 49 | 19.99  | 20.22  | 19.88  | 20     |                           |             |
| 10              | 16QAM | 25 | 0  | 20.6   | 20.45  | 20.53  | 20.76  | 21                        | 2           |
| 10              | 16QAM | 25 | 12 | 20.46  | 20.45  | 20.6   | 20.67  |                           |             |
| 10              | 16QAM | 25 | 25 | 20.66  | 20.48  | 20.54  | 20.67  |                           |             |
| 10              | 16QAM | 50 | 0  | 20.3   | 20.46  | 20.51  | 20.38  |                           |             |
| Channel         |       |    |    | 40065  | 40385  | 40705  | 41215  | Tune-up<br>limit<br>(dBm) | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 2537.5 | 2569.5 | 2601.5 | 2652.5 |                           |             |
| 5               | QPSK  | 1  | 0  | 20.23  | 20.24  | 20.14  | 20.23  | 21                        | 0           |
| 5               | QPSK  | 1  | 12 | 20.28  | 20.27  | 20.2   | 20.42  |                           |             |
| 5               | QPSK  | 1  | 24 | 20.2   | 20.27  | 20.1   | 20.4   |                           |             |
| 5               | QPSK  | 12 | 0  | 20.28  | 20.34  | 20.4   | 20.44  | 21                        | 1           |
| 5               | QPSK  | 12 | 7  | 20.29  | 20.42  | 20.45  | 20.48  |                           |             |
| 5               | QPSK  | 12 | 13 | 20.32  | 20.39  | 20.26  | 20.44  |                           |             |
| 5               | QPSK  | 25 | 0  | 20.36  | 20.43  | 20.37  | 20.65  |                           |             |
| 5               | 16QAM | 1  | 0  | 20.23  | 19.95  | 19.99  | 20.04  | 21                        | 1           |
| 5               | 16QAM | 1  | 12 | 19.96  | 20.25  | 20.18  | 20.18  |                           |             |
| 5               | 16QAM | 1  | 24 | 19.82  | 19.95  | 19.85  | 20.27  |                           |             |
| 5               | 16QAM | 12 | 0  | 20.29  | 20.25  | 20.21  | 20.28  | 21                        | 2           |
| 5               | 16QAM | 12 | 7  | 20.39  | 20.5   | 20.22  | 20.44  |                           |             |
| 5               | 16QAM | 12 | 13 | 20.3   | 20.39  | 20.16  | 20.38  |                           |             |
| 5               | 16QAM | 25 | 0  | 20.52  | 20.59  | 20.54  | 20.85  |                           |             |

## 14. Antenna Location

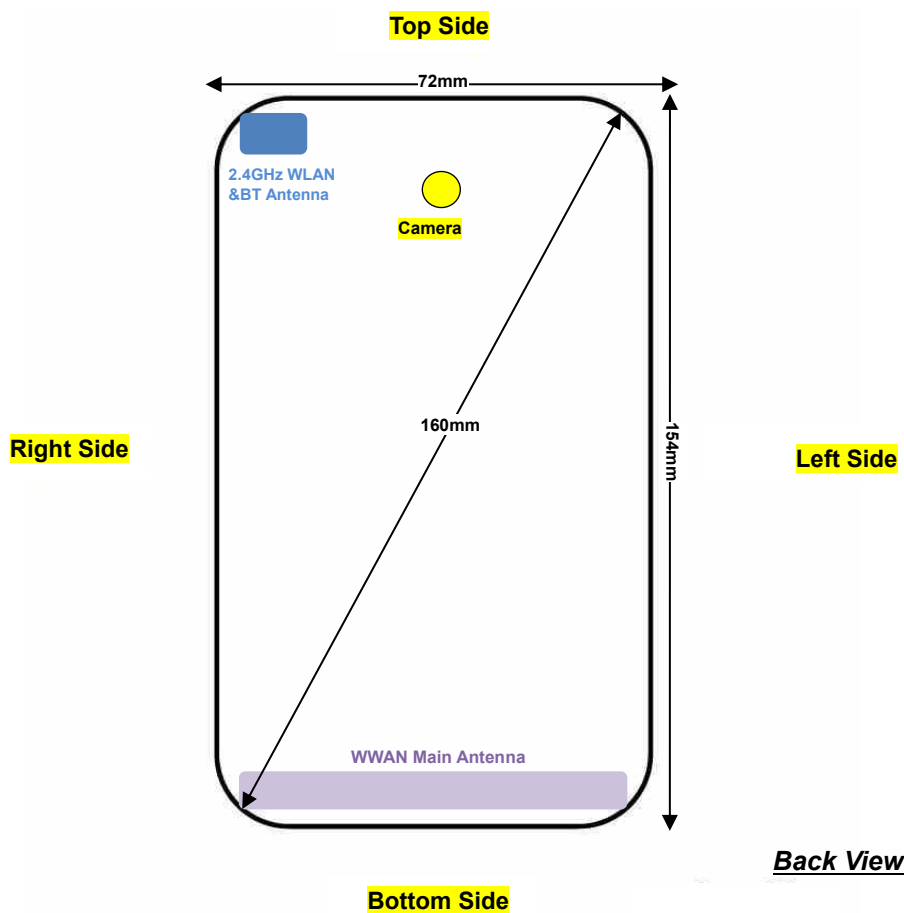

| Distance of the Antenna to the EUT surface/edge |        |        |          |             |            |           |
|-------------------------------------------------|--------|--------|----------|-------------|------------|-----------|
| Antennas                                        | Back   | Front  | Top Side | Bottom Side | Right Side | Left Side |
| WWAN Main                                       | ≤ 25mm | ≤ 25mm | >25mm    | ≤ 25mm      | ≤ 25mm     | ≤ 25mm    |
| BT&WLAN                                         | ≤ 25mm | ≤ 25mm | ≤ 25mm   | >25mm       | ≤ 25mm     | >25mm     |

| Positions for SAR tests; Hotspot mode |      |       |          |             |            |           |
|---------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas                              | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| WWAN Main                             | Yes  | Yes   | No       | Yes         | Yes        | Yes       |
| BT&WLAN                               | Yes  | Yes   | Yes      | No          | Yes        | No        |

**General Note:**

Referring to KDB 941225 D06 v02r01, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

## 15. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.  
The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is  $\geq 0.8$ W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. When the phone is in talking mode and receiver worked, all WWAN powers are full power.
6. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in WLAN 2.4GHz.
7. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II and LTE band 7/38/41 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
8. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II and LTE band 7/38/41.
9. This device hotspot reduced power and P-sensor reduced power level are the same. So only show one reduced power level for hotspot reduced power and P-sensor reduced power for this application.
10. P-sensor can detect handheld state, for bottom side of product specific 10g SAR condition, WCDMA band II reduced powers will be active. For GSM1900, LTE band 7, the power levels are the same as the full power.
11. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
  - a. When hotspot is not worked, GSM1900, WCDMA Band II, LTE Band 7 product specific 10g SAR is required.
  - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

## 15.1 Head SAR

### <FDD LTE SAR>

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Right Cheek   | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.12             | 0.215                  | 0.274                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Right Cheek   | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.11             | 0.181                  | 0.227                  |
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Right Tilted  | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.02             | 0.140                  | 0.179                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Right Tilted  | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.04             | 0.118                  | 0.148                  |
| 01       | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Left Cheek    | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.01             | 0.252                  | 0.322                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Left Cheek    | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.03             | 0.210                  | 0.264                  |
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Left Tilted   | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | -0.14            | 0.101                  | 0.129                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Left Tilted   | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.01             | 0.087                  | 0.109                  |

### <TDD LTE SAR>

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 0Offset   | Right Cheek   | Full       | 38000 | 2595        | 22.14               | 24                  | 1.535                  | 62.9         | 1.006                     | 0.09             | 0.115                  | 0.178                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 0Offset   | Right Cheek   | Full       | 38000 | 2595        | 21.33               | 23                  | 1.469                  | 62.9         | 1.006                     | 0.02             | 0.080                  | 0.118                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 0Offset   | Right Tilted  | Full       | 38000 | 2595        | 22.14               | 24                  | 1.535                  | 62.9         | 1.006                     | 0.07             | 0.096                  | 0.148                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 0Offset   | Right Tilted  | Full       | 38000 | 2595        | 21.33               | 23                  | 1.469                  | 62.9         | 1.006                     | 0.12             | 0.067                  | 0.099                  |
| 02       | LTE Band 38 | 20M      | QPSK       | 1RB     | 0Offset   | Left Cheek    | Full       | 38000 | 2595        | 22.14               | 24                  | 1.535                  | 62.9         | 1.006                     | 0.06             | 0.161                  | 0.249                  |
|          | LTE Band 38 | 20M      | QPSK       | 5RB     | 0Offset   | Left Cheek    | Full       | 38000 | 2595        | 21.33               | 23                  | 1.469                  | 62.9         | 1.006                     | 0.02             | 0.111                  | 0.164                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 0Offset   | Left Tilted   | Full       | 38000 | 2595        | 22.14               | 24                  | 1.535                  | 62.9         | 1.006                     | 0.03             | 0.082                  | 0.127                  |
|          | LTE Band 38 | 20M      | QPSK       | 5RB     | 0Offset   | Left Tilted   | Full       | 38000 | 2595        | 21.33               | 23                  | 1.469                  | 62.9         | 1.006                     | 0.13             | 0.055                  | 0.081                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Right Cheek   | Full       | 41140 | 2645        | 22.9                | 24                  | 1.288                  | 62.9         | 1.006                     | -0.14            | 0.099                  | 0.128                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Right Cheek   | Full       | 41140 | 2645        | 21.96               | 23                  | 1.271                  | 62.9         | 1.006                     | 0.03             | 0.069                  | 0.088                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Right Tilted  | Full       | 41140 | 2645        | 22.9                | 24                  | 1.288                  | 62.9         | 1.006                     | 0.01             | 0.116                  | 0.150                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Right Tilted  | Full       | 41140 | 2645        | 21.96               | 23                  | 1.271                  | 62.9         | 1.006                     | 0.06             | 0.076                  | 0.097                  |
| 03       | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Left Cheek    | Full       | 41140 | 2645        | 22.9                | 24                  | 1.288                  | 62.9         | 1.006                     | -0.10            | 0.189                  | 0.245                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Left Cheek    | Full       | 41140 | 2645        | 21.96               | 23                  | 1.271                  | 62.9         | 1.006                     | 0.01             | 0.127                  | 0.162                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Left Tilted   | Full       | 41140 | 2645        | 22.9                | 24                  | 1.288                  | 62.9         | 1.006                     | -0.13            | 0.118                  | 0.153                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Left Tilted   | Full       | 41140 | 2645        | 21.96               | 23                  | 1.271                  | 62.9         | 1.006                     | 0.15             | 0.086                  | 0.110                  |

## 15.2 Hotspot SAR

### <FDD LTE SAR>

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Front         | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.02             | 0.383                  | 0.489                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Front         | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.01             | 0.329                  | 0.413                  |
| 04       | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Back          | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | -0.04            | 0.575                  | 0.734                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Back          | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.02             | 0.485                  | 0.609                  |
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Left Side     | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.06             | 0.455                  | 0.581                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Left Side     | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.06             | 0.373                  | 0.468                  |
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Right Side    | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.14             | 0.366                  | 0.467                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Right Side    | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.03             | 0.311                  | 0.391                  |
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Bottom Side   | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.08             | 0.159                  | 0.203                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Bottom Side   | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.04             | 0.132                  | 0.166                  |



**<TDD LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 05       | LTE Band 38 | 20M      | QPSK       | 1RB     | 99Offset  | Front         | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.03             | 0.774                  | <b>1.031</b>           |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 50Offset  | Front         | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.02             | 0.730                  | 0.950                  |
|          | LTE Band 38 | 20M      | QPSK       | 100RB   | 0Offset   | Front         | 5        | Reduced    | 38000 | 2595        | 19.8                | 21                  | 1.318                  | 62.9         | 1.006                     | 0.01             | 0.680                  | 0.902                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 99Offset  | Back          | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.01             | 0.702                  | 0.935                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 50Offset  | Back          | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.02             | 0.716                  | 0.932                  |
|          | LTE Band 38 | 20M      | QPSK       | 100RB   | 0Offset   | Back          | 5        | Reduced    | 38000 | 2595        | 19.8                | 21                  | 1.318                  | 62.9         | 1.006                     | 0.02             | 0.716                  | 0.950                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 99Offset  | Left Side     | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.02             | 0.231                  | 0.308                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 50Offset  | Left Side     | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.01             | 0.236                  | 0.307                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 99Offset  | Right Side    | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.02             | 0.126                  | 0.168                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 50Offset  | Right Side    | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | -0.08            | 0.126                  | 0.164                  |
|          | LTE Band 38 | 20M      | QPSK       | 1RB     | 99Offset  | Bottom Side   | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | -0.01            | 0.410                  | 0.546                  |
|          | LTE Band 38 | 20M      | QPSK       | 50RB    | 50Offset  | Bottom Side   | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.01             | 0.443                  | 0.577                  |
| 06       | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.13             | 0.873                  | <b>0.981</b>           |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40140 | 2545        | 20.26               | 21                  | 1.186                  | 62.9         | 1.006                     | 0.10             | 0.566                  | 0.675                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40400 | 2571        | 20.48               | 21                  | 1.127                  | 62.9         | 1.006                     | 0.17             | 0.659                  | 0.747                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40670 | 2598        | 20.49               | 21                  | 1.125                  | 62.9         | 1.006                     | 0.01             | 0.776                  | 0.878                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | 0.01             | 0.846                  | 0.935                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40140 | 2545        | 20.46               | 21                  | 1.132                  | 62.9         | 1.006                     | 0.02             | 0.539                  | 0.614                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40400 | 2571        | 20.43               | 21                  | 1.140                  | 62.9         | 1.006                     | 0.02             | 0.621                  | 0.712                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40670 | 2598        | 20.47               | 21                  | 1.130                  | 62.9         | 1.006                     | 0.01             | 0.766                  | 0.871                  |
|          | LTE Band 41 | 20M      | QPSK       | 100RB   | 0Offset   | Front         | 5        | Reduced    | 41140 | 2645        | 20.54               | 21                  | 1.112                  | 62.9         | 1.006                     | 0.10             | 0.834                  | 0.933                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.01             | 0.855                  | 0.961                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40140 | 2545        | 20.26               | 21                  | 1.186                  | 62.9         | 1.006                     | 0.10             | 0.520                  | 0.620                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40400 | 2571        | 20.48               | 21                  | 1.127                  | 62.9         | 1.006                     | 0.17             | 0.621                  | 0.704                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40670 | 2598        | 20.49               | 21                  | 1.125                  | 62.9         | 1.006                     | 0.01             | 0.758                  | 0.858                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | 0.02             | 0.805                  | 0.890                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40140 | 2545        | 20.46               | 21                  | 1.132                  | 62.9         | 1.006                     | 0.02             | 0.532                  | 0.606                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40400 | 2571        | 20.43               | 21                  | 1.140                  | 62.9         | 1.006                     | 0.02             | 0.601                  | 0.689                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40670 | 2598        | 20.47               | 21                  | 1.130                  | 62.9         | 1.006                     | 0.01             | 0.730                  | 0.830                  |
|          | LTE Band 41 | 20M      | QPSK       | 100RB   | 0Offset   | Back          | 5        | Reduced    | 41140 | 2645        | 20.54               | 21                  | 1.112                  | 62.9         | 1.006                     | 0.1              | 0.781                  | 0.873                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Left Side     | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.02             | 0.256                  | 0.288                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Left Side     | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | -0.03            | 0.258                  | 0.285                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Right Side    | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.01             | 0.116                  | 0.130                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Right Side    | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | -0.09            | 0.115                  | 0.127                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Bottom Side   | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.15             | 0.447                  | 0.502                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Bottom Side   | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | 0.11             | 0.443                  | 0.490                  |



### **15.3 Body Worn Accessory SAR**

#### **<FDD LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|------------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
|          | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Front         | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | 0.02             | 0.383                  | 0.489                  |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Front         | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.01             | 0.329                  | 0.413                  |
| 07       | LTE Band 26 | 15M      | QPSK       | 1RB     | 0Offset   | Back          | 5mm      | Full       | 26865 | 831.5       | 22.94               | 24                  | 1.276                  | -0.04            | 0.575                  | <b>0.734</b>           |
|          | LTE Band 26 | 15M      | QPSK       | 36RB    | 20Offset  | Back          | 5mm      | Full       | 26865 | 831.5       | 22.01               | 23                  | 1.256                  | 0.02             | 0.485                  | 0.609                  |

#### **<TDD LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 08       | LTE Band38  | 20M      | QPSK       | 1RB     | 99Offset  | Front         | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.03             | 0.774                  | <b>1.031</b>           |
|          | LTE Band38  | 20M      | QPSK       | 50RB    | 50Offset  | Front         | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.02             | 0.730                  | 0.950                  |
|          | LTE Band38  | 20M      | QPSK       | 100RB   | 0Offset   | Front         | 5        | Reduced    | 38000 | 2595        | 19.8                | 21                  | 1.318                  | 62.9         | 1.006                     | 0.01             | 0.680                  | 0.902                  |
|          | LTE Band38  | 20M      | QPSK       | 1RB     | 99Offset  | Back          | 5        | Reduced    | 38000 | 2595        | 19.78               | 21                  | 1.324                  | 62.9         | 1.006                     | 0.01             | 0.702                  | 0.935                  |
|          | LTE Band38  | 20M      | QPSK       | 50RB    | 50Offset  | Back          | 5        | Reduced    | 38000 | 2595        | 19.88               | 21                  | 1.294                  | 62.9         | 1.006                     | 0.02             | 0.716                  | 0.932                  |
|          | LTE Band38  | 20M      | QPSK       | 100RB   | 0Offset   | Back          | 5        | Reduced    | 38000 | 2595        | 19.8                | 21                  | 1.318                  | 62.9         | 1.006                     | 0.02             | 0.716                  | 0.950                  |
| 09       | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.13             | 0.873                  | <b>0.981</b>           |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40140 | 2545        | 20.26               | 21                  | 1.186                  | 62.9         | 1.006                     | 0.10             | 0.566                  | 0.675                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40400 | 2571        | 20.48               | 21                  | 1.127                  | 62.9         | 1.006                     | 0.17             | 0.659                  | 0.747                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 40670 | 2598        | 20.49               | 21                  | 1.125                  | 62.9         | 1.006                     | 0.01             | 0.776                  | 0.878                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | 0.01             | 0.846                  | 0.935                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40140 | 2545        | 20.46               | 21                  | 1.132                  | 62.9         | 1.006                     | 0.02             | 0.539                  | 0.614                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40400 | 2571        | 20.43               | 21                  | 1.140                  | 62.9         | 1.006                     | 0.02             | 0.621                  | 0.712                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Front         | 5        | Reduced    | 40670 | 2598        | 20.47               | 21                  | 1.130                  | 62.9         | 1.006                     | 0.01             | 0.766                  | 0.871                  |
|          | LTE Band 41 | 20M      | QPSK       | 100RB   | 0Offset   | Front         | 5        | Reduced    | 41140 | 2645        | 20.54               | 21                  | 1.112                  | 62.9         | 1.006                     | 0.10             | 0.834                  | 0.933                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.01             | 0.855                  | 0.961                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40140 | 2545        | 20.26               | 21                  | 1.186                  | 62.9         | 1.006                     | 0.10             | 0.520                  | 0.620                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40400 | 2571        | 20.48               | 21                  | 1.127                  | 62.9         | 1.006                     | 0.17             | 0.621                  | 0.704                  |
|          | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Back          | 5        | Reduced    | 40670 | 2598        | 20.49               | 21                  | 1.125                  | 62.9         | 1.006                     | 0.01             | 0.758                  | 0.858                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 41140 | 2645        | 20.59               | 21                  | 1.099                  | 62.9         | 1.006                     | 0.02             | 0.805                  | 0.890                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40140 | 2545        | 20.46               | 21                  | 1.132                  | 62.9         | 1.006                     | 0.02             | 0.532                  | 0.606                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40400 | 2571        | 20.43               | 21                  | 1.140                  | 62.9         | 1.006                     | 0.02             | 0.601                  | 0.689                  |
|          | LTE Band 41 | 20M      | QPSK       | 50RB    | 0Offset   | Back          | 5        | Reduced    | 40670 | 2598        | 20.47               | 21                  | 1.130                  | 62.9         | 1.006                     | 0.01             | 0.730                  | 0.830                  |
|          | LTE Band 41 | 20M      | QPSK       | 100RB   | 0Offset   | Back          | 5        | Reduced    | 41140 | 2645        | 20.54               | 21                  | 1.112                  | 62.9         | 1.006                     | 0.1              | 0.781                  | 0.873                  |

### 15.4 Repeated SAR Measurement

| No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Power Mode | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|-----|-------------|----------|------------|---------|-----------|---------------|----------|------------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|-------|------------------------|
| 1st | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.13             | 0.873                  | 1     | 0.981                  |
| 2nd | LTE Band 41 | 20M      | QPSK       | 1RB     | 49Offset  | Front         | 5        | Reduced    | 41140 | 2645        | 20.52               | 21                  | 1.117                  | 62.9         | 1.006                     | 0.13             | 0.858                  | 1.018 | 0.964                  |

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 16. Simultaneous Transmission Analysis

| No. | Simultaneous Transmission Configurations | Portable Handset |           |         |                          | Note         |
|-----|------------------------------------------|------------------|-----------|---------|--------------------------|--------------|
|     |                                          | Head             | Body-worn | Hotspot | Product specific 10g SAR |              |
| 1.  | GSM Voice + WLAN2.4GHz                   | Yes              | Yes       |         |                          |              |
| 2.  | GPRS/EDGE + WLAN2.4GHz                   | Yes              | Yes       | Yes     | Yes                      | WLAN Hotspot |
| 3.  | WCDMA + WLAN2.4GHz                       | Yes              | Yes       | Yes     | Yes                      | WLAN Hotspot |
| 4.  | LTE + WLAN2.4GHz                         | Yes              | Yes       | Yes     | Yes                      | WLAN Hotspot |
| 5.  | GSM Voice + Bluetooth                    |                  | Yes       |         |                          |              |
| 6.  | GPRS/EDGE + Bluetooth                    |                  | Yes       | Yes     | Yes                      | BT Tethering |
| 7.  | WCDMA + Bluetooth                        |                  | Yes       | Yes     | Yes                      | BT Tethering |
| 8.  | LTE + Bluetooth                          |                  | Yes       | Yes     | Yes                      | BT Tethering |

**General Note:**

1. This is a variant report for XT1944-6, Based on the similarity between two models, LTE Band 26/38/41 full SAR testing, other WWAN bands and WLAN/BT spot check are performed for this application and found the reference SAR value can represent this application, so all the test cases(except for LTE Band 26/38/41) were leverage from reference test report (Sporton Report Number FA7D2007 as Appendix E).
2. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
3. EUT will choose each GSM, WCDMA, and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
4. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
5. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
6. All licensed modes share the same antenna part and cannot transmit simultaneously.
7. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
8. The reported SAR summation is calculated based on the same configuration and test position.
9. For Bluetooth/WLAN 2.4GHz product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg. So simultaneous transmission 10g SAR is not required.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar 1g SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$  for 1g SAR, simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg.

**16.1 Head Exposure Conditions**

| WWAN Band |         | Exposure Position | 1                | 2                | 1+2<br>Summed<br>1g SAR (W/kg) |
|-----------|---------|-------------------|------------------|------------------|--------------------------------|
|           |         |                   | WWAN             | 2.4GHz WLAN      |                                |
|           |         |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |
| GSM       | GSM850  | Right Cheek       | 0.298            | 0.369            | 0.67                           |
|           |         | Right Tilted      | 0.183            | 0.382            | 0.57                           |
|           |         | Left Cheek        | 0.301            | 1.136            | 1.44                           |
|           |         | Left Tilted       | 0.173            | 0.761            | 0.93                           |
|           | GSM1900 | Right Cheek       | 0.100            | 0.369            | 0.47                           |
|           |         | Right Tilted      | 0.033            | 0.382            | 0.42                           |
|           |         | Left Cheek        | 0.062            | 1.136            | 1.20                           |
|           |         | Left Tilted       | 0.024            | 0.761            | 0.79                           |
| WCDMA     | Band V  | Right Cheek       | 0.374            | 0.369            | 0.74                           |
|           |         | Right Tilted      | 0.234            | 0.382            | 0.62                           |
|           |         | Left Cheek        | 0.403            | 1.136            | 1.54                           |
|           |         | Left Tilted       | 0.249            | 0.761            | 1.01                           |
|           | Band II | Right Cheek       | 0.203            | 0.369            | 0.57                           |
|           |         | Right Tilted      | 0.094            | 0.382            | 0.48                           |
|           |         | Left Cheek        | 0.144            | 1.136            | 1.28                           |
|           |         | Left Tilted       | 0.069            | 0.761            | 0.83                           |
| LTE       | Band 5  | Right Cheek       | 0.393            | 0.369            | 0.76                           |
|           |         | Right Tilted      | 0.233            | 0.382            | 0.62                           |
|           |         | Left Cheek        | 0.424            | 1.136            | 1.56                           |
|           |         | Left Tilted       | 0.240            | 0.761            | 1.00                           |
|           | Band 7  | Right Cheek       | 0.211            | 0.369            | 0.58                           |
|           |         | Right Tilted      | 0.160            | 0.382            | 0.54                           |
|           |         | Left Cheek        | 0.326            | 1.136            | 1.46                           |
|           |         | Left Tilted       | 0.173            | 0.761            | 0.93                           |
|           | Band 26 | Right Cheek       | 0.274            | 0.369            | 0.64                           |
|           |         | Right Tilted      | 0.179            | 0.382            | 0.56                           |
|           |         | Left Cheek        | 0.322            | 1.136            | 1.46                           |
|           |         | Left Tilted       | 0.129            | 0.761            | 0.89                           |
|           | Band 38 | Right Cheek       | 0.178            | 0.369            | 0.55                           |
|           |         | Right Tilted      | 0.148            | 0.382            | 0.53                           |
|           |         | Left Cheek        | 0.249            | 1.136            | 1.39                           |
|           |         | Left Tilted       | 0.127            | 0.761            | 0.89                           |
|           | Band 41 | Right Cheek       | 0.128            | 0.369            | 0.50                           |
|           |         | Right Tilted      | 0.150            | 0.382            | 0.53                           |
|           |         | Left Cheek        | 0.245            | 1.136            | 1.38                           |
|           |         | Left Tilted       | 0.153            | 0.761            | 0.91                           |

### 16.2 Hotspot Exposure Conditions

| WWAN Band |         | Exposure Position | 1                        | 2                               | 3                             | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|-----------|---------|-------------------|--------------------------|---------------------------------|-------------------------------|--------------------------------|--------------------------------|
|           |         |                   | WWAN<br>1g SAR<br>(W/kg) | 2.4GHz WLAN<br>1g SAR<br>(W/kg) | Bluetooth<br>1g SAR<br>(W/kg) |                                |                                |
| GSM       | GSM850  | Front             | 0.464                    | 0.344                           | 0.049                         | 0.81                           | 0.51                           |
|           |         | Back              | 0.724                    | 0.344                           | 0.046                         | 1.07                           | 0.77                           |
|           |         | Left Side         | 0.504                    |                                 |                               | 0.50                           | 0.50                           |
|           |         | Right Side        | 0.521                    | 0.344                           | 0.039                         | 0.87                           | 0.56                           |
|           |         | Top Side          |                          | 0.344                           | 0.037                         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.144                    |                                 |                               | 0.14                           | 0.14                           |
|           | GSM1900 | Front             | 0.338                    | 0.344                           | 0.049                         | 0.68                           | 0.39                           |
|           |         | Back              | 0.765                    | 0.344                           | 0.046                         | 1.11                           | 0.81                           |
|           |         | Left Side         | 0.090                    |                                 |                               | 0.09                           | 0.09                           |
|           |         | Right Side        | 0.116                    | 0.344                           | 0.039                         | 0.46                           | 0.16                           |
|           |         | Top Side          |                          | 0.344                           | 0.037                         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.941                    |                                 |                               | 0.94                           | 0.94                           |
| WCDMA     | Band V  | Front             | 0.641                    | 0.344                           | 0.049                         | 0.99                           | 0.69                           |
|           |         | Back              | 0.840                    | 0.344                           | 0.046                         | 1.18                           | 0.89                           |
|           |         | Left Side         | 0.590                    |                                 |                               | 0.59                           | 0.59                           |
|           |         | Right Side        | 0.577                    | 0.344                           | 0.039                         | 0.92                           | 0.62                           |
|           |         | Top Side          |                          | 0.344                           | 0.037                         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.197                    |                                 |                               | 0.20                           | 0.20                           |
|           | Band II | Front             | 0.390                    | 0.344                           | 0.049                         | 0.73                           | 0.44                           |
|           |         | Back              | 0.872                    | 0.344                           | 0.046                         | 1.22                           | 0.92                           |
|           |         | Left Side         | 0.304                    |                                 |                               | 0.30                           | 0.30                           |
|           |         | Right Side        | 0.314                    | 0.344                           | 0.039                         | 0.66                           | 0.35                           |
|           |         | Top Side          |                          | 0.344                           | 0.037                         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.929                    |                                 |                               | 0.93                           | 0.93                           |

| WWAN Band |         | Exposure Position | 1             | 2             | 3             | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|-----------|---------|-------------------|---------------|---------------|---------------|--------------------------------|--------------------------------|
|           |         |                   | WWAN          | 2.4GHz WLAN   | Bluetooth     |                                |                                |
|           |         |                   | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) |                                |                                |
| LTE       | Band 5  | Front             | 0.775         | 0.344         | 0.049         | 1.12                           | 0.82                           |
|           |         | Back              | 0.930         | 0.344         | 0.046         | 1.27                           | 0.98                           |
|           |         | Left Side         | 0.878         |               |               | 0.88                           | 0.88                           |
|           |         | Right Side        | 0.726         | 0.344         | 0.039         | 1.07                           | 0.77                           |
|           |         | Top Side          |               | 0.344         | 0.037         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.190         |               |               | 0.19                           | 0.19                           |
|           | Band 7  | Front             | 1.136         | 0.344         | 0.049         | 1.48                           | 1.19                           |
|           |         | Back              | 0.999         | 0.344         | 0.046         | 1.34                           | 1.05                           |
|           |         | Left Side         | 0.273         |               |               | 0.27                           | 0.27                           |
|           |         | Right Side        | 0.256         | 0.344         | 0.039         | 0.60                           | 0.30                           |
|           |         | Top Side          |               | 0.344         | 0.037         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.577         |               |               | 0.58                           | 0.58                           |
|           | Band 26 | Front             | 0.489         | 0.344         | 0.049         | 0.83                           | 0.54                           |
|           |         | Back              | 0.734         | 0.344         | 0.046         | 1.08                           | 0.78                           |
|           |         | Left Side         | 0.581         |               |               | 0.58                           | 0.58                           |
|           |         | Right Side        | 0.467         | 0.344         | 0.039         | 0.81                           | 0.51                           |
|           |         | Top Side          |               | 0.344         | 0.037         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.203         |               |               | 0.20                           | 0.20                           |
|           | Band 38 | Front             | 1.031         | 0.344         | 0.049         | 1.38                           | 1.08                           |
|           |         | Back              | 0.950         | 0.344         | 0.046         | 1.29                           | 1.00                           |
|           |         | Left Side         | 0.308         |               |               | 0.31                           | 0.31                           |
|           |         | Right Side        | 0.168         | 0.344         | 0.039         | 0.51                           | 0.21                           |
|           |         | Top Side          |               | 0.344         | 0.037         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.577         |               |               | 0.58                           | 0.58                           |
|           | Band 41 | Front             | 0.981         | 0.344         | 0.049         | 1.33                           | 1.03                           |
|           |         | Back              | 0.961         | 0.344         | 0.046         | 1.31                           | 1.01                           |
|           |         | Left Side         | 0.288         |               |               | 0.29                           | 0.29                           |
|           |         | Right Side        | 0.130         | 0.344         | 0.039         | 0.47                           | 0.17                           |
|           |         | Top Side          |               | 0.344         | 0.037         | 0.34                           | 0.04                           |
|           |         | Bottom Side       | 0.502         |               |               | 0.50                           | 0.50                           |

**16.3 Body-Worn Accessory Exposure Conditions**

| WWAN Band |         | Exposure Position | 1             | 2             | 3             | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|-----------|---------|-------------------|---------------|---------------|---------------|--------------------------------|--------------------------------|
|           |         |                   | WWAN          | 2.4GHz WLAN   | Bluetooth     |                                |                                |
|           |         |                   | 1g SAR (W/kg) | 1g SAR (W/kg) | 1g SAR (W/kg) |                                |                                |
| GSM       | GSM850  | Front             | 0.464         | 0.344         | 0.049         | 0.81                           | 0.51                           |
|           |         | Back              | 0.724         | 0.344         | 0.046         | 1.07                           | 0.77                           |
|           | GSM1900 | Front             | 0.338         | 0.344         | 0.049         | 0.68                           | 0.39                           |
|           |         | Back              | 0.765         | 0.344         | 0.046         | 1.11                           | 0.81                           |
| WCDMA     | Band V  | Front             | 0.641         | 0.344         | 0.049         | 0.99                           | 0.69                           |
|           |         | Back              | 0.840         | 0.344         | 0.046         | 1.18                           | 0.89                           |
|           | Band II | Front             | 0.390         | 0.344         | 0.049         | 0.73                           | 0.44                           |
|           |         | Back              | 0.872         | 0.344         | 0.046         | 1.22                           | 0.92                           |
| LTE       | Band 5  | Front             | 0.775         | 0.344         | 0.049         | 1.12                           | 0.82                           |
|           |         | Back              | 0.930         | 0.344         | 0.046         | 1.27                           | 0.98                           |
|           | Band 7  | Front             | 1.136         | 0.344         | 0.049         | 1.48                           | 1.19                           |
|           |         | Back              | 0.999         | 0.344         | 0.046         | 1.34                           | 1.05                           |
|           | Band 26 | Front             | 0.489         | 0.344         | 0.049         | 0.83                           | 0.54                           |
|           |         | Back              | 0.734         | 0.344         | 0.046         | 1.08                           | 0.78                           |
|           | Band 38 | Front             | 1.031         | 0.344         | 0.049         | 1.38                           | 1.08                           |
|           |         | Back              | 0.950         | 0.344         | 0.046         | 1.29                           | 1.00                           |
|           | Band 41 | Front             | 0.981         | 0.344         | 0.049         | 1.33                           | 1.03                           |
|           |         | Back              | 0.961         | 0.344         | 0.046         | 1.31                           | 1.01                           |

**Test Engineer:** Nick Hu

## **17. Uncertainty Assessment**

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.



---

**Appendix A. Plots of System Performance Check**

The plots are shown as follows.

## System Check\_Head\_835MHz

### DUT: D835V2-SN:4d091

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_850 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 42.088$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(6.3, 6.3, 6.3); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.35 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.04 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.32 W/kg

**SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 2.25 W/kg

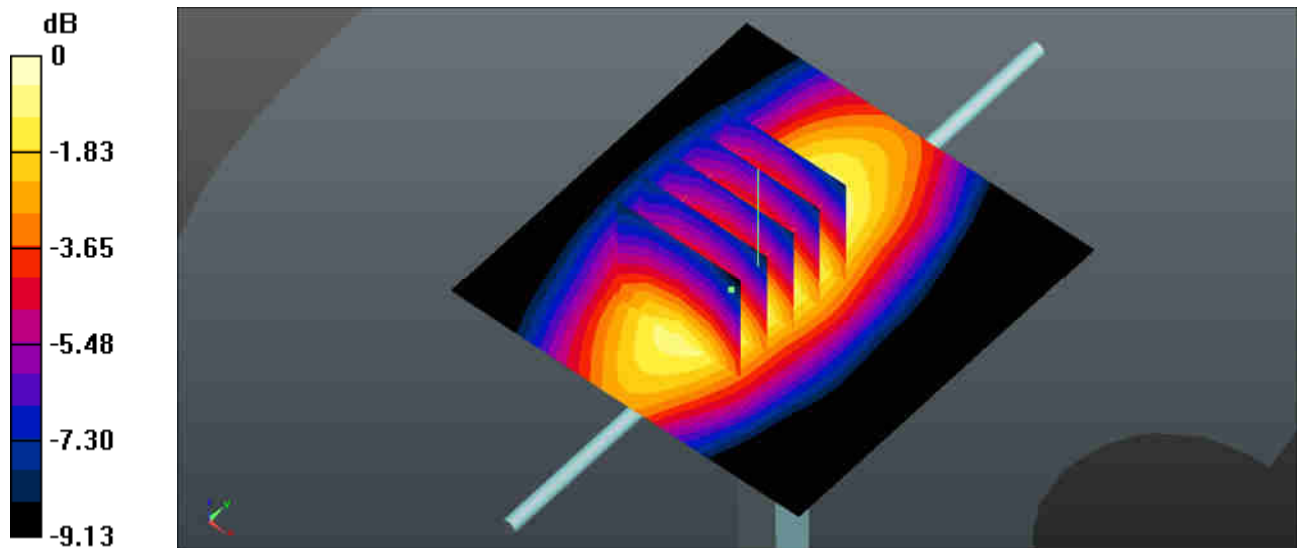

0 dB = 2.25 W/kg = 3.52 dBW/kg

## System Check\_Head\_2600MHz

**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.005$  S/m;  $\epsilon_r = 37.795$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(4.5, 4.5, 4.5); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.4 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.81 V/m; Power Drift = -0.33 dB

Peak SAR (extrapolated) = 17.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.23 W/kg**

Maximum value of SAR (measured) = 15.5 W/kg

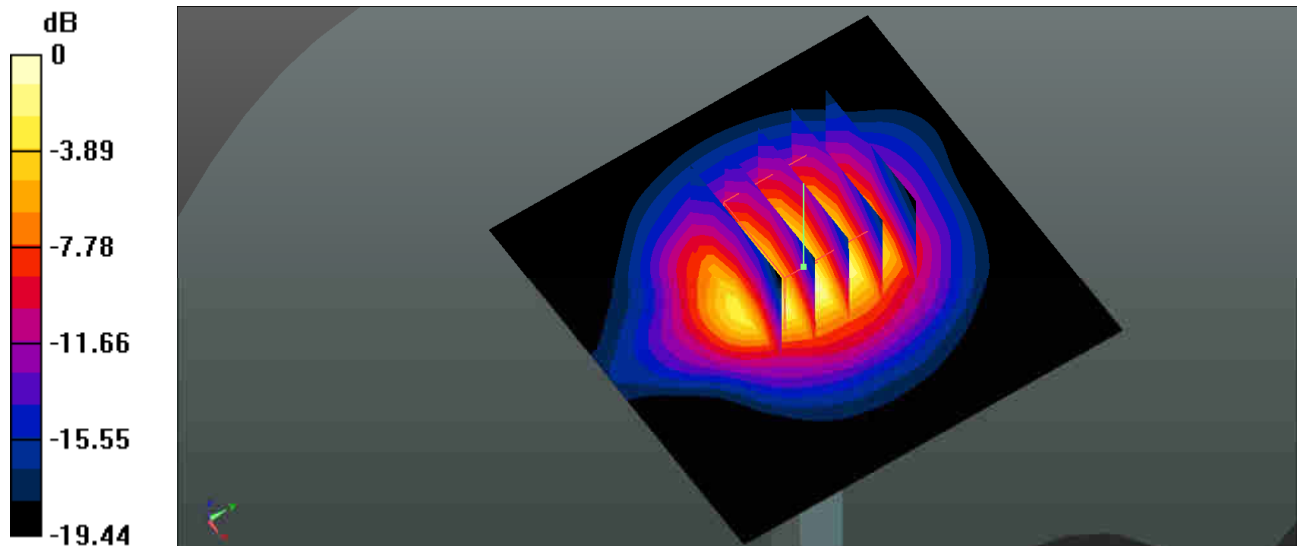

0 dB = 15.5 W/kg = 11.90 dBW/kg

## System Check\_Body\_835MHz

**DUT: D835V2-SN:4d091**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.997 \text{ S/m}$ ;  $\epsilon_r = 54.249$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(6.19, 6.19, 6.19); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $2.66 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $48.34 \text{ V/m}$ ; Power Drift =  $-0.43 \text{ dB}$

Peak SAR (extrapolated) =  $2.55 \text{ W/kg}$

**SAR(1 g) =  $2.4 \text{ W/kg}$ ; SAR(10 g) =  $1.59 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.49 \text{ W/kg}$

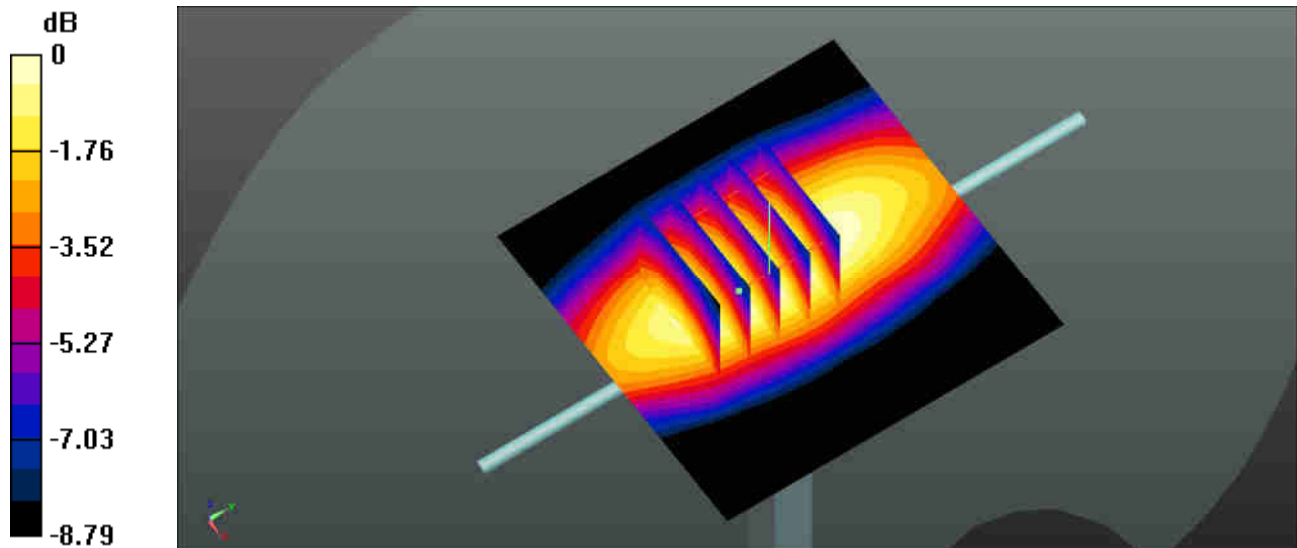

0 dB =  $2.49 \text{ W/kg}$  =  $3.96 \text{ dBW/kg}$

**System Check\_Body\_2600MHz****DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.223$  S/m;  $\epsilon_r = 52.979$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 27.5 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.54 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 35.0 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.42 W/kg**

Maximum value of SAR (measured) = 27.2 W/kg

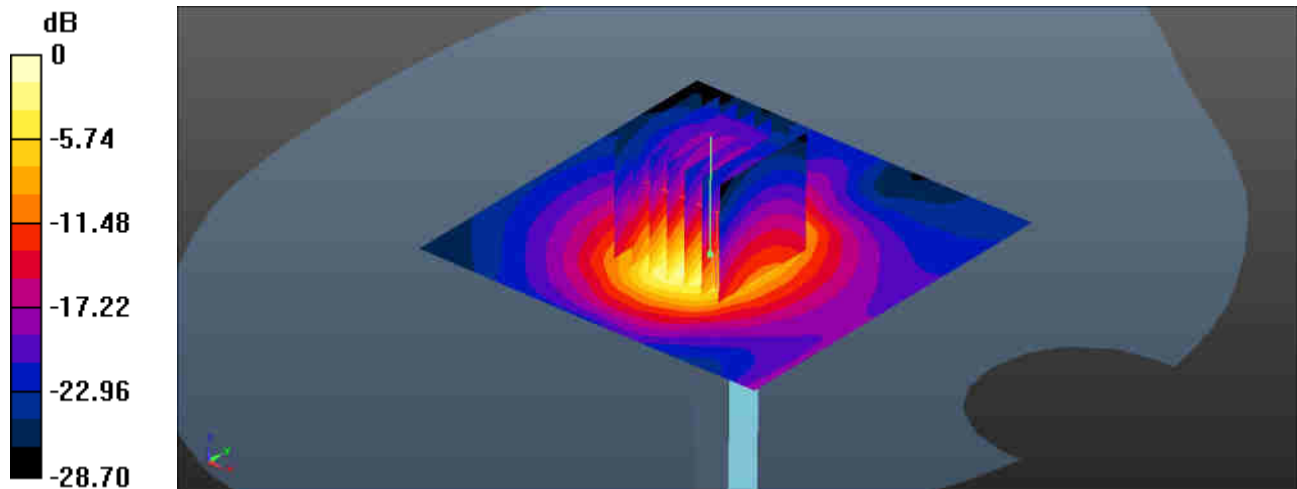

0 dB = 27.5 W/kg = 14.39 dBW/kg



---

**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

**01\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch26865**


Communication System: UID 0, FDD\_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 42.136$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3293; ConvF(6.3, 6.3, 6.3); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26865/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.314 W/kg

**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.344 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.390 W/kg  
**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.184 W/kg**  
Maximum value of SAR (measured) = 0.307 W/kg

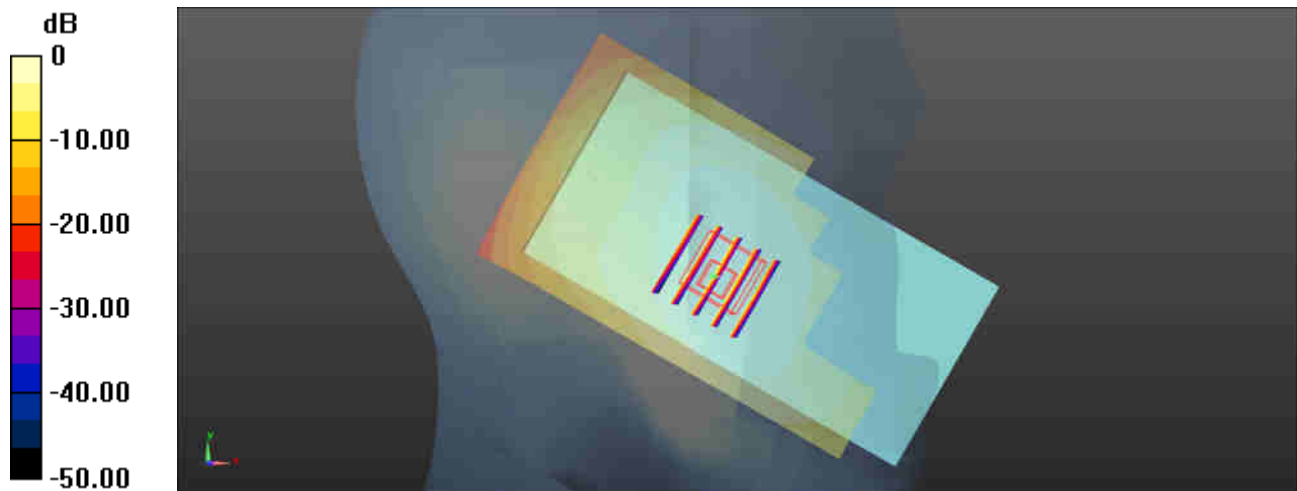

**02\_LTE Band 38\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch38000**

Communication System: UID 0, TDD\_LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.999$  S/m;  $\epsilon_r = 37.808$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(4.5, 4.5, 4.5); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch38000/Area Scan (71x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.261 W/kg



**Ch38000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.861 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.322 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.235 W/kg

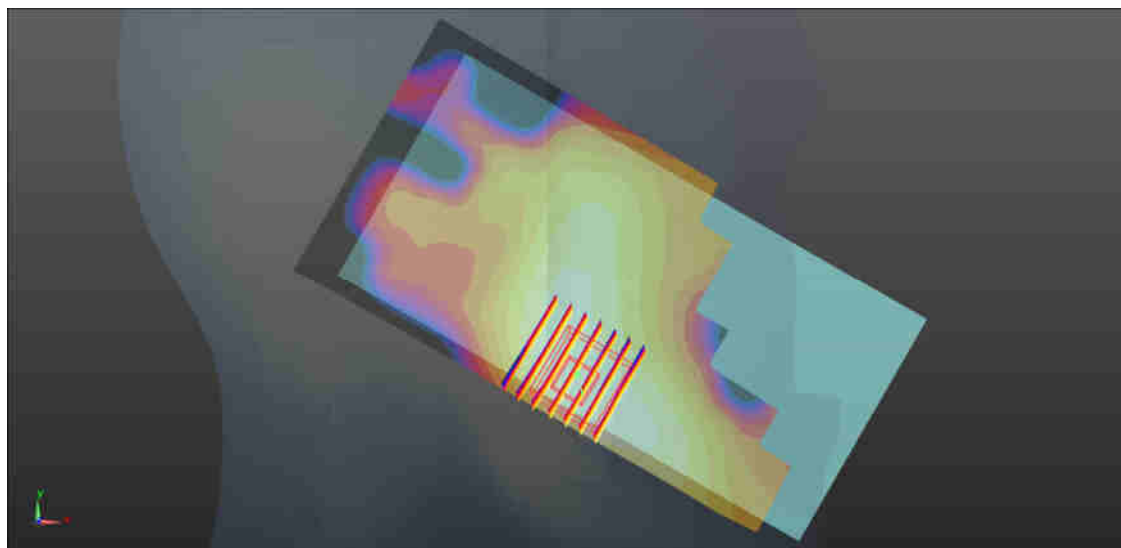

0 dB = 0.235 W/kg = -6.29 dBW/kg

**03\_LTE Band 41\_20M\_QPSK\_1RB\_49Offset\_Left Cheek\_0mm\_Ch41140**


Communication System: UID 0, TDD\_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.59  
Medium: HSL\_2600 Medium parameters used (interpolated):  $f = 2645$  MHz;  $\sigma = 2.055$  S/m;  $\epsilon_r = 37.616$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3293; ConvF(4.5, 4.5, 4.5); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM3; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch41140/Area Scan (81x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.277 W/kg

**Ch41140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 4.637 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.392 W/kg  
**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.098 W/kg**  
Maximum value of SAR (measured) = 0.278 W/kg

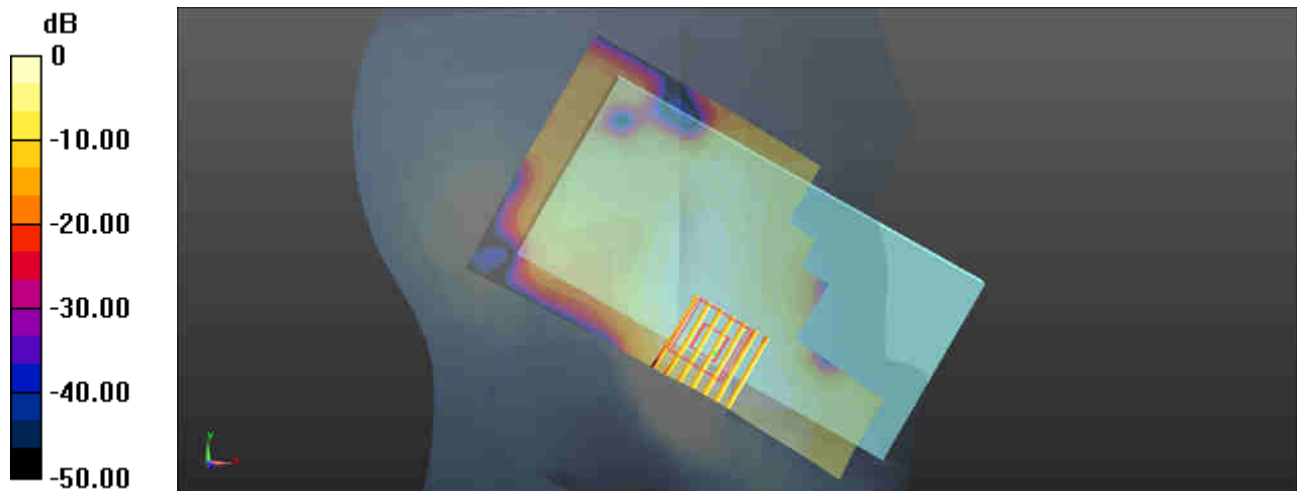

0 dB = 0.277 W/kg = -5.58 dBW/kg

**04\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch26865**

Communication System: UID 0, FDD\_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 54.284$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(6.19, 6.19, 6.19); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26865/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.98 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.841 W/kg

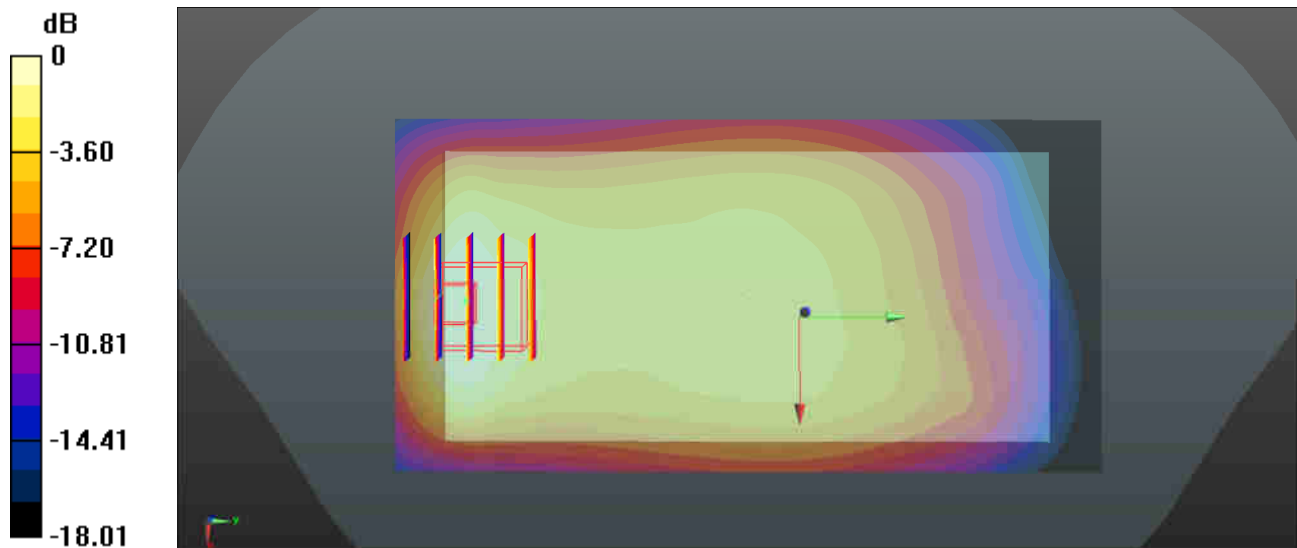

0 dB = 0.841 W/kg = -0.75 dBW/kg

**05\_LTE Band 38\_20M\_QPSK\_1RB\_99Offset\_Front\_5mm\_Ch38000**


Communication System: UID 0, TDD\_LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 2.216$  S/m;  $\epsilon_r = 52.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch38000/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Ch38000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.478 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.79 W/kg  
**SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.332 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

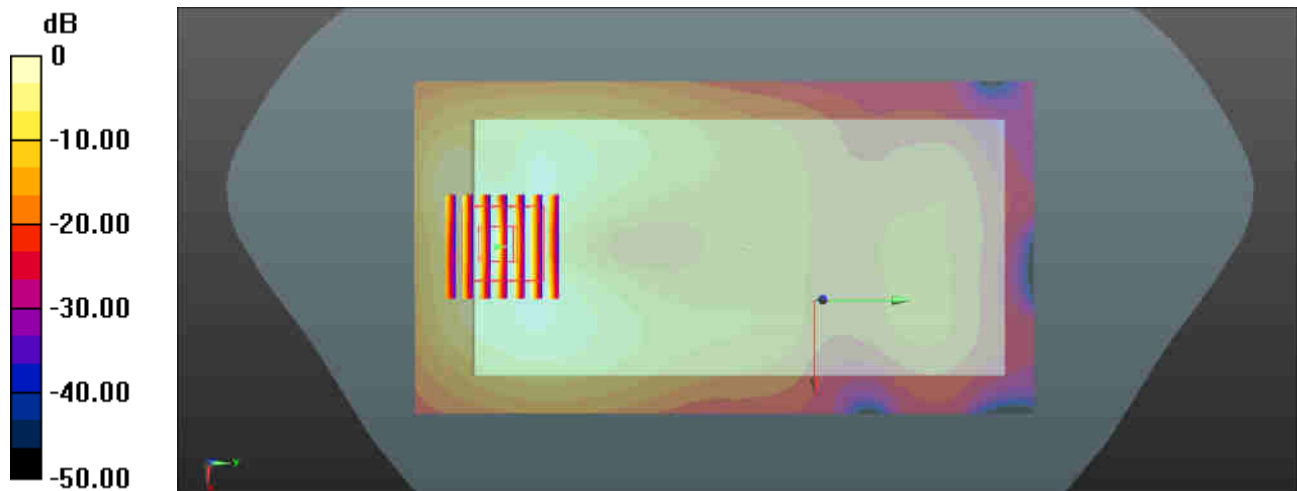

0 dB = 1.27 W/kg = 1.04 dBW/kg

**06\_LTE Band 41\_20M\_QPSK\_1RB\_49Offset\_Front\_5mm\_Ch41140**


Communication System: UID 0, TDD\_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600 Medium parameters used:  $f = 2645$  MHz;  $\sigma = 2.284$  S/m;  $\epsilon_r = 52.812$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch41140/Area Scan (81x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 1.42 W/kg

**Ch41140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 4.427 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 2.12 W/kg  
**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.372 W/kg**  
Maximum value of SAR (measured) = 1.49 W/kg

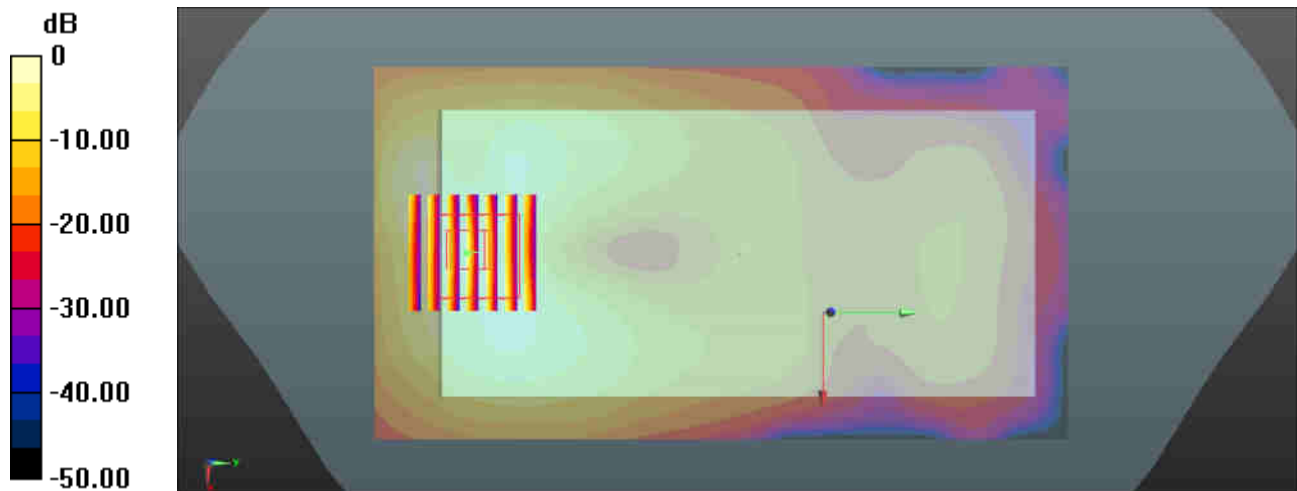

0 dB = 1.42 W/kg = 1.52 dBW/kg

**07\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch26865**

Communication System: UID 0, FDD\_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: MSL\_850 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 54.284$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3293; ConvF(6.19, 6.19, 6.19); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1326; Calibrated: 2017.9.15
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch26865/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


**Ch26865/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.98 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.841 W/kg

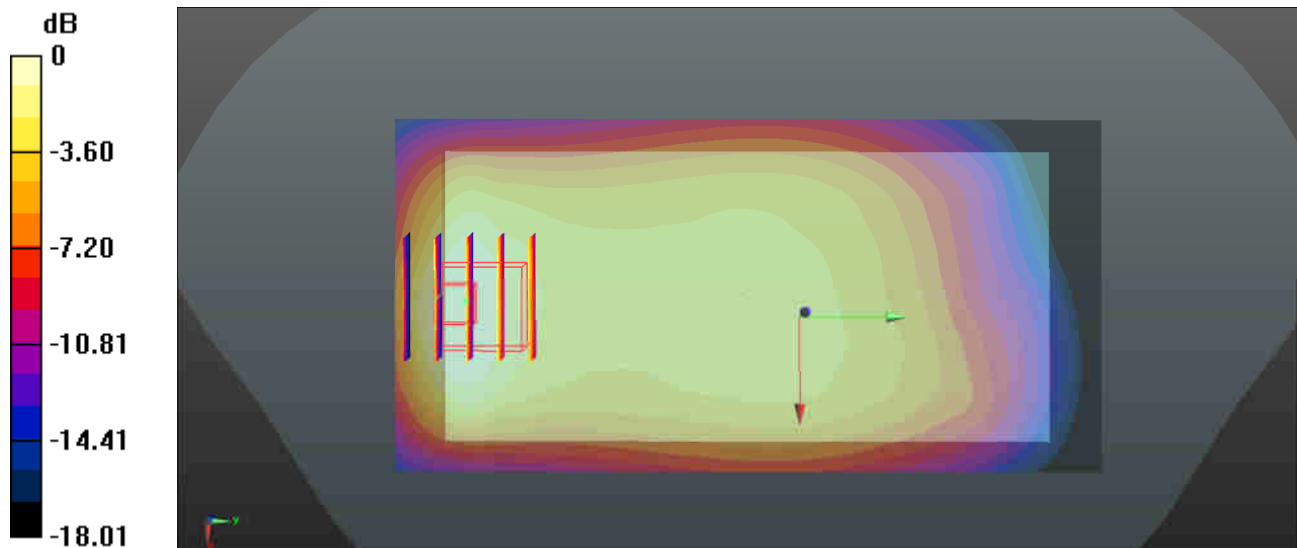

0 dB = 0.841 W/kg = -0.75 dBW/kg

**08\_LTE Band 38\_20M\_QPSK\_1RB\_99Offset\_Front\_5mm\_Ch38000**


Communication System: UID 0, TDD\_LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 2.216$  S/m;  $\epsilon_r = 52.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch38000/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Ch38000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.478 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.79 W/kg  
**SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.332 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

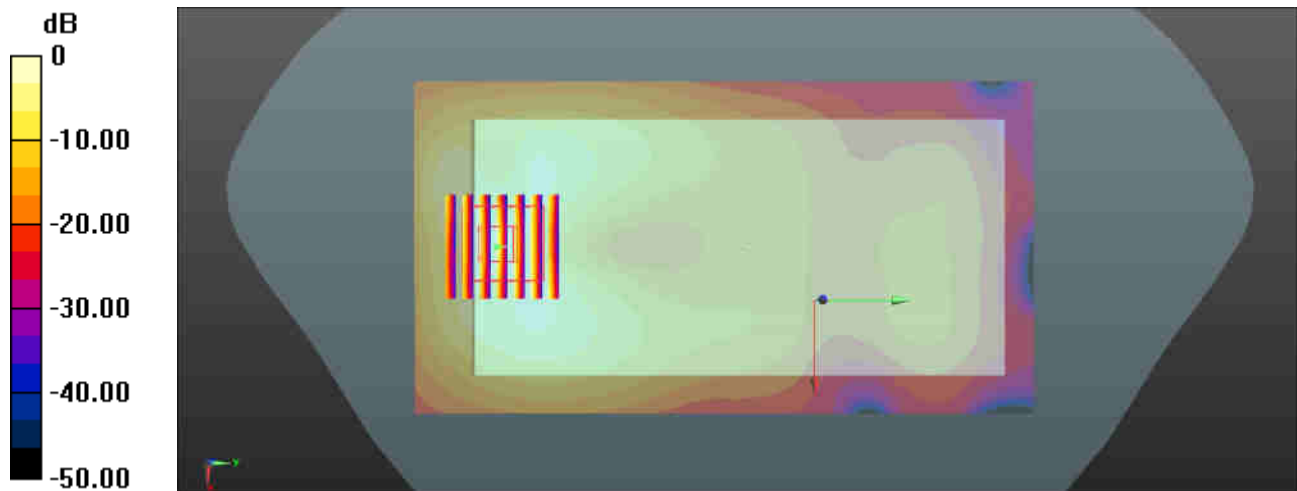

0 dB = 1.27 W/kg = 1.04 dBW/kg

**09\_LTE Band 41\_20M\_QPSK\_1RB\_49Offset\_Front\_5mm\_Ch41140**

Communication System: UID 0, TDD\_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.59

Medium: MSL\_2600 Medium parameters used:  $f = 2645$  MHz;  $\sigma = 2.284$  S/m;  $\epsilon_r = 52.812$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.14, 7.14, 7.14); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch41140/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg


**Ch41140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.427 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.12 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.372 W/kg**

Maximum value of SAR (measured) = 1.49 W/kg

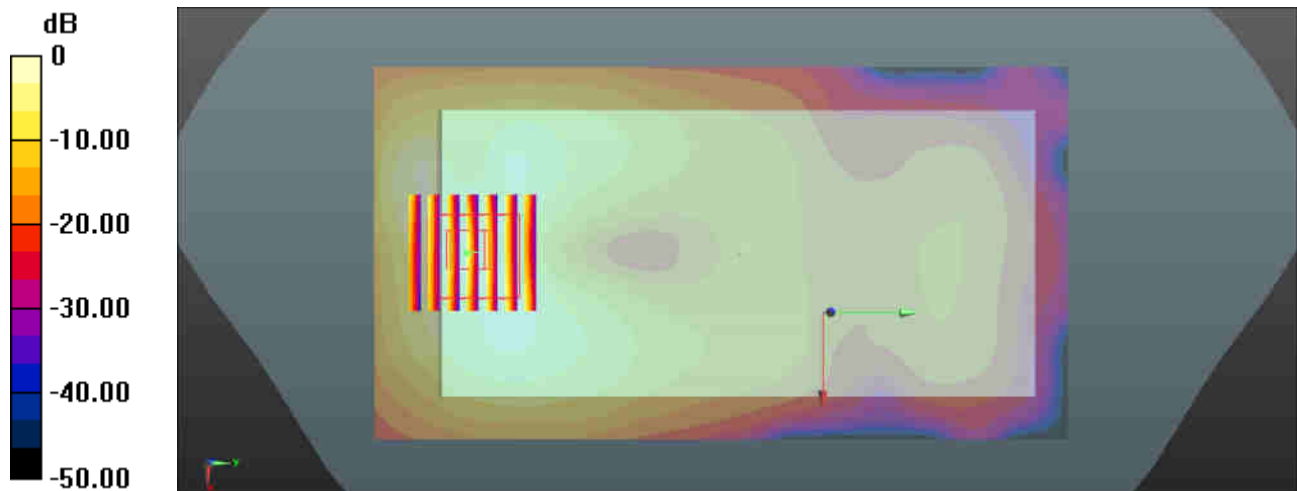

0 dB = 1.42 W/kg = 1.52 dBW/kg



---

**Appendix C.     DASY Calibration Certificate**

The DASY calibration certificates are shown as follows.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

**Sporton**

Certificate No: **Z17-97259**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d091**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **December 5, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102196     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Power sensor NRV-Z5     | 100596     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Reference Probe EX3DV4  | SN 3617    | 23-Jan-17(SPEAG,No.EX3-3617_Jan17)       | Jan-18                |
| DAE3                    | SN 536     | 09-Oct-17(CTTL-SPEAG,No.Z17-97198)       | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286)           | Jan-18                |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285)           | Jan-18                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: December 9, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

#### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                          |              |
|------------------------------|--------------------------|--------------|
| DASY Version                 | DASY52                   | 52.10.0.1446 |
| Extrapolation                | Advanced Extrapolation   |              |
| Phantom                      | Triple Flat Phantom 5.1C |              |
| Distance Dipole Center - TSL | 15 mm                    | with Spacer  |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm        |              |
| Frequency                    | 835 MHz $\pm$ 1 MHz      |              |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 41.7 $\pm$ 6 % | 0.88 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | <1.0 °C             | ----           | ----                 |

## SAR result with Head TSL

|                                                |                    |                                |
|------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 $cm^3$ (1 g) of Head TSL   | Condition          |                                |
| SAR measured                                   | 250 mW input power | 2.32 mW / g                    |
| SAR for nominal Head TSL parameters            | normalized to 1W   | 9.48 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | Condition          |                                |
| SAR measured                                   | 250 mW input power | 1.53 mW / g                    |
| SAR for nominal Head TSL parameters            | normalized to 1W   | 6.22 mW / g $\pm$ 18.7 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 54.7 $\pm$ 6 % | 0.96 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | <1.0 °C             | ----           | ----                 |

## SAR result with Body TSL

|                                                |                    |                                |
|------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 $cm^3$ (1 g) of Body TSL   | Condition          |                                |
| SAR measured                                   | 250 mW input power | 2.42 mW / g                    |
| SAR for nominal Body TSL parameters            | normalized to 1W   | 9.72 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | Condition          |                                |
| SAR measured                                   | 250 mW input power | 1.60 mW / g                    |
| SAR for nominal Body TSL parameters            | normalized to 1W   | 6.42 mW / g $\pm$ 18.7 % (k=2) |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 48.7Ω- 3.69jΩ |
| Return Loss                          | - 28.1dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 46.6Ω- 4.62jΩ |
| Return Loss                          | - 24.5dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.258 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 12.04.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d091**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 41.67$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.73, 9.73, 9.73); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn536; Calibrated: 10/9/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.89V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

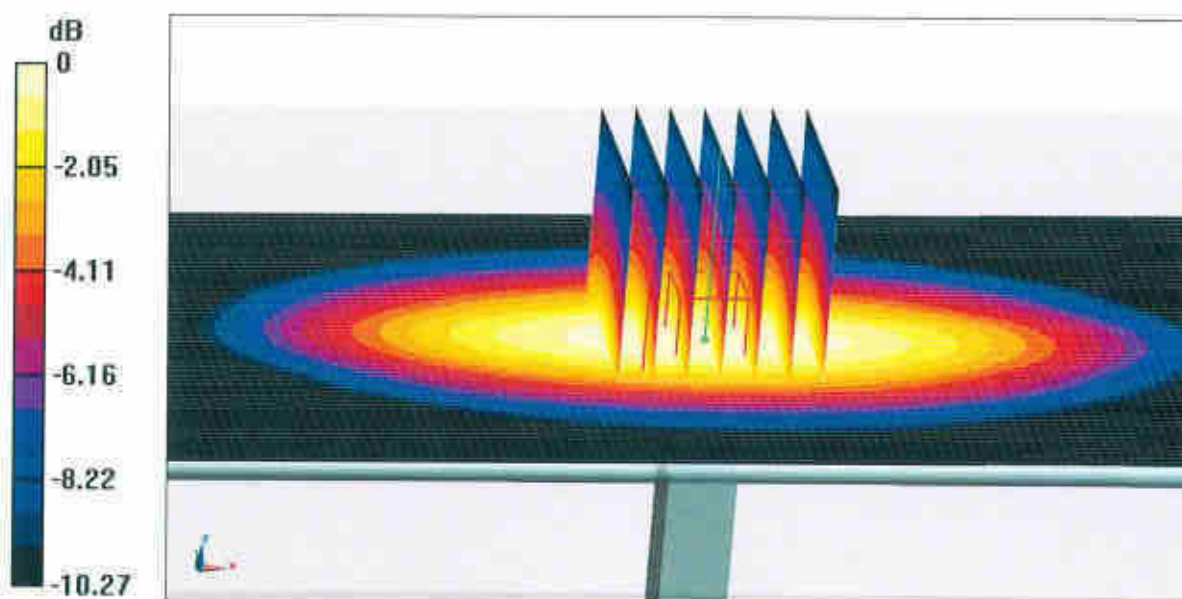


0 dB = 3.10 W/kg = 4.91 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cntl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

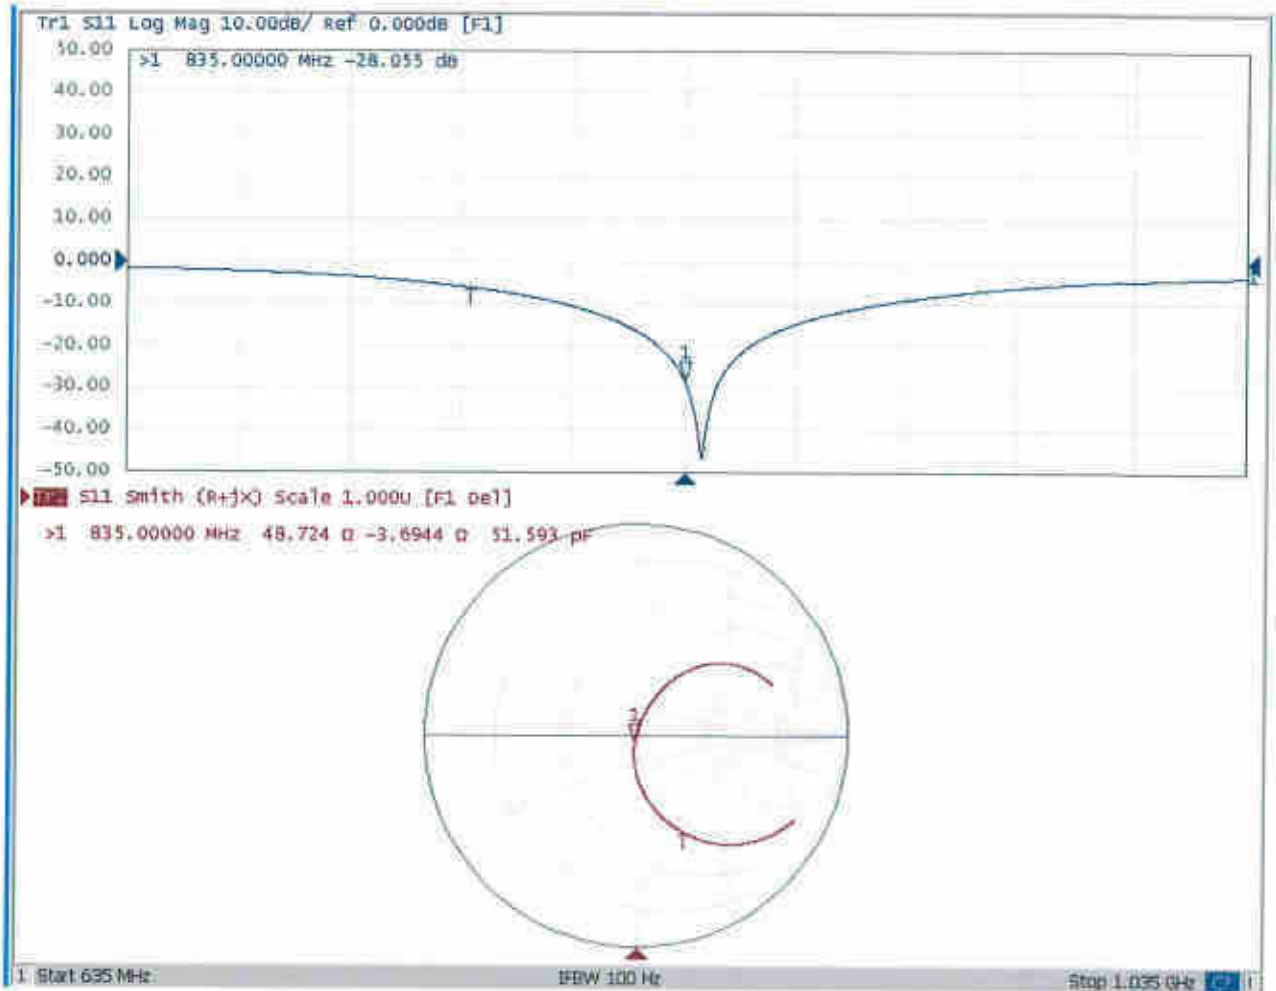



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 12.05.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d091**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.962$  S/m;  $\epsilon_r = 54.65$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(9.64, 9.64, 9.64); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn536; Calibrated: 10/9/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.88 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.6 W/kg**

Maximum value of SAR (measured) = 3.20 W/kg

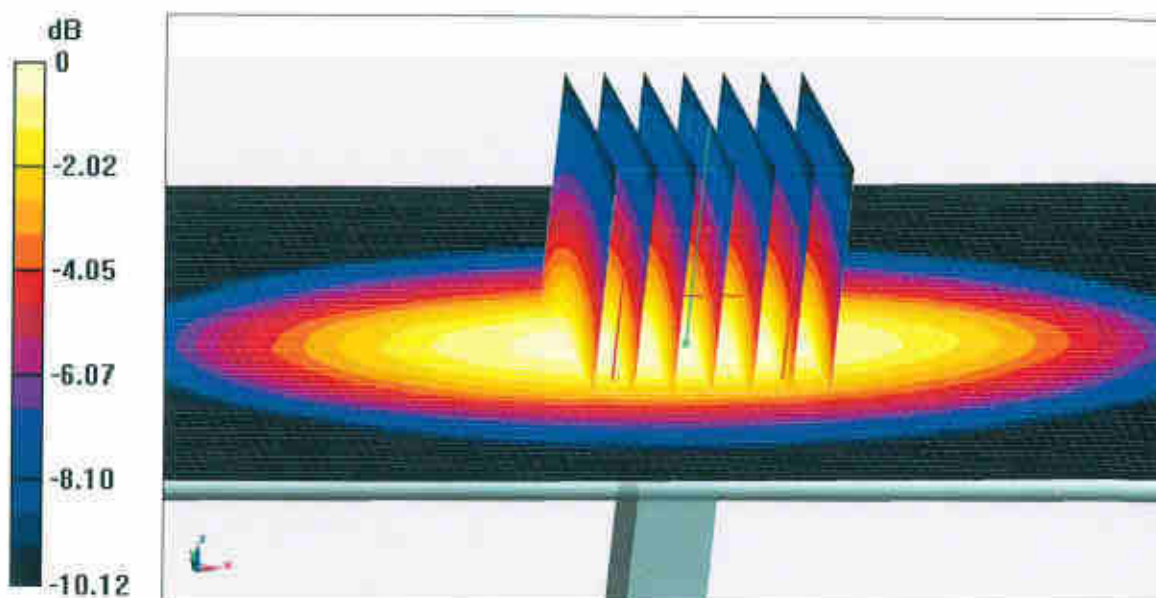


0 dB = 3.20 W/kg = 5.05 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [entl@chinattl.com](mailto:entl@chinattl.com) <http://www.chinattl.cn>

## Impedance Measurement Plot for Body TSL

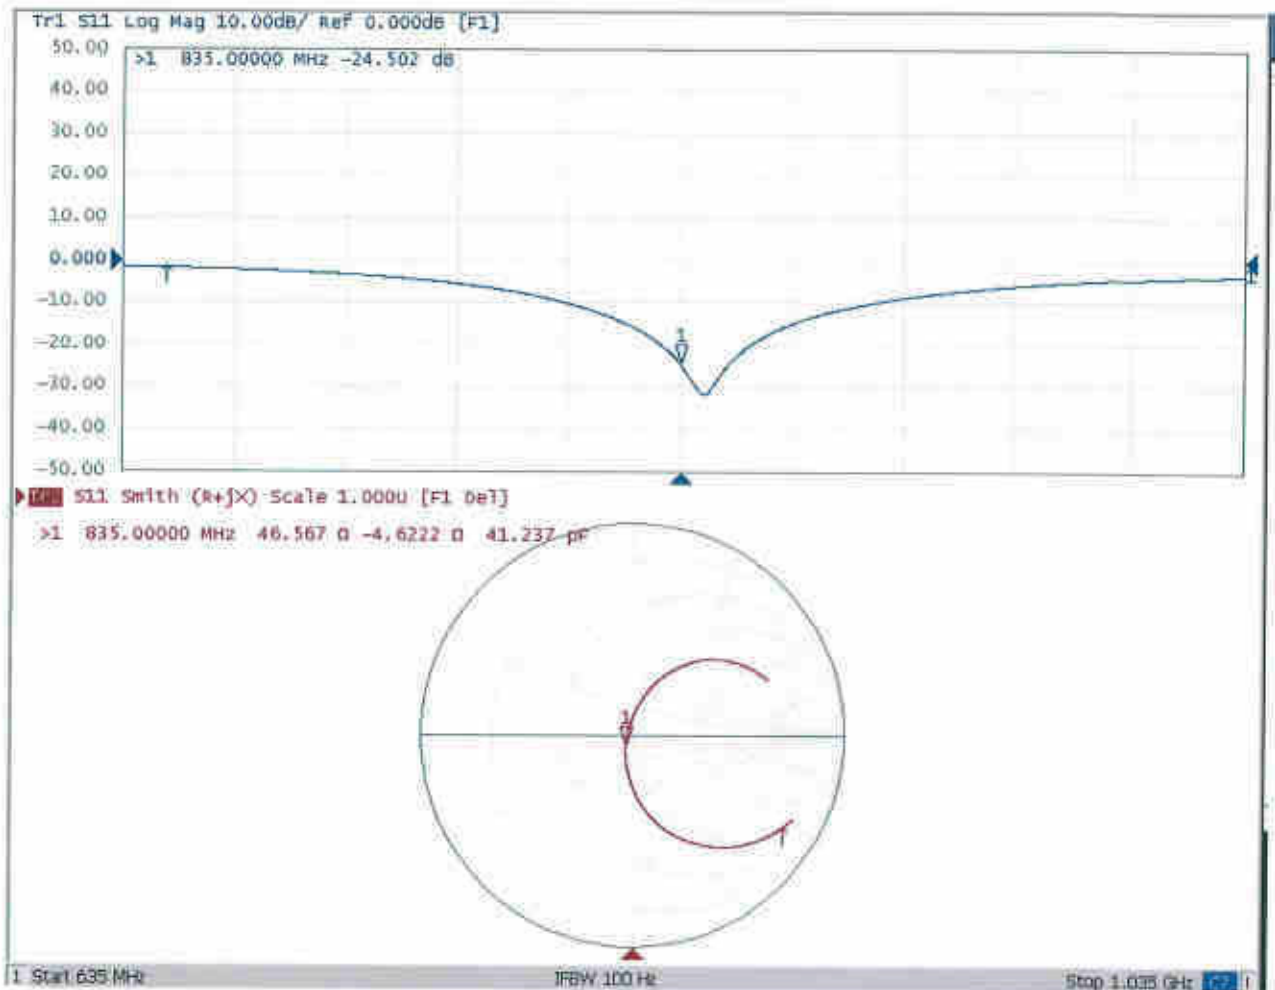



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

**Sporton**

Certificate No: **Z17-97255**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1061**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **December 7, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102196     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Power sensor NRV-Z5     | 100596     | 02-Mar-17 (CTTL, No.J17X01254)           | Mar-18                |
| Reference Probe EX3DV4  | SN 3617    | 23-Jan-17(SPEAG,No.EX3-3617_Jan17)       | Jan-18                |
| DAE3                    | SN 536     | 09-Oct-17(CTTL-SPEAG,No.Z17-97198)       | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 13-Jan-17 (CTTL, No.J17X00286)           | Jan-18                |
| Network Analyzer E5071C | MY46110673 | 13-Jan-17 (CTTL, No.J17X00285)           | Jan-18                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: December 10, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g****CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                              |                          |              |
|------------------------------|--------------------------|--------------|
| DASY Version                 | DASY52                   | 52.10.0.1446 |
| Extrapolation                | Advanced Extrapolation   |              |
| Phantom                      | Triple Flat Phantom 5.1C |              |
| Distance Dipole Center - TSL | 10 mm                    | with Spacer  |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm        |              |
| Frequency                    | 2600 MHz $\pm$ 1 MHz     |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.0           | 1.96 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.4 $\pm$ 6 % | 1.99 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | <1.0 °C             | ---            | ---                  |

**SAR result with Head TSL**

|                                                |                    |                                |
|------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 $cm^3$ (1 g) of Head TSL   | Condition          |                                |
| SAR measured                                   | 250 mW input power | 14.6 mW / g                    |
| SAR for nominal Head TSL parameters            | normalized to 1W   | 58.2 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | Condition          |                                |
| SAR measured                                   | 250 mW input power | 6.50 mW / g                    |
| SAR for nominal Head TSL parameters            | normalized to 1W   | 26.0 mW / g $\pm$ 18.7 % (k=2) |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.5           | 2.16 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.6 $\pm$ 6 % | 2.13 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | <1.0 °C             | ---            | ---                  |

**SAR result with Body TSL**

|                                                |                    |                                |
|------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 $cm^3$ (1 g) of Body TSL   | Condition          |                                |
| SAR measured                                   | 250 mW input power | 14.0 mW / g                    |
| SAR for nominal Body TSL parameters            | normalized to 1W   | 56.4 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | Condition          |                                |
| SAR measured                                   | 250 mW input power | 6.23 mW / g                    |
| SAR for nominal Body TSL parameters            | normalized to 1W   | 25.0 mW / g $\pm$ 18.7 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

<http://www.chinattl.cn>

## Appendix(Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 49.4Ω- 6.08jΩ |
| Return Loss                          | - 24.3dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 46.2Ω- 5.19jΩ |
| Return Loss                          | - 23.5dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.013 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 12.07.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 39.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.3, 7.3, 7.3); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn536; Calibrated: 10/9/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.7 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.5 W/kg**

Maximum value of SAR (measured) = 25.1 W/kg

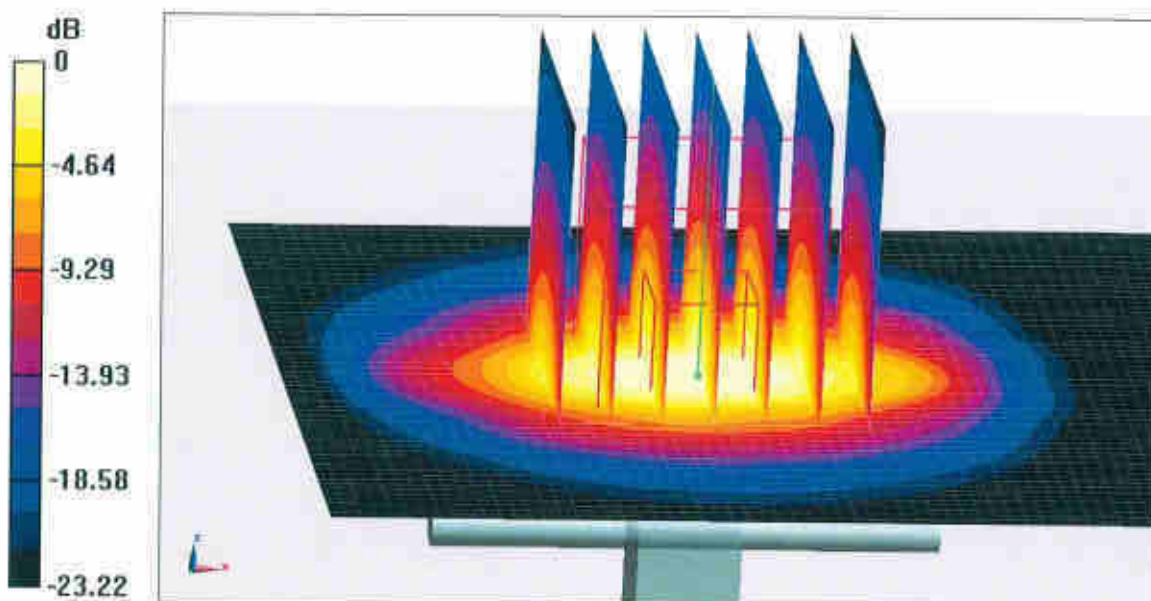

**0 dB = 25.1 W/kg = 14.00 dBW/kg**



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

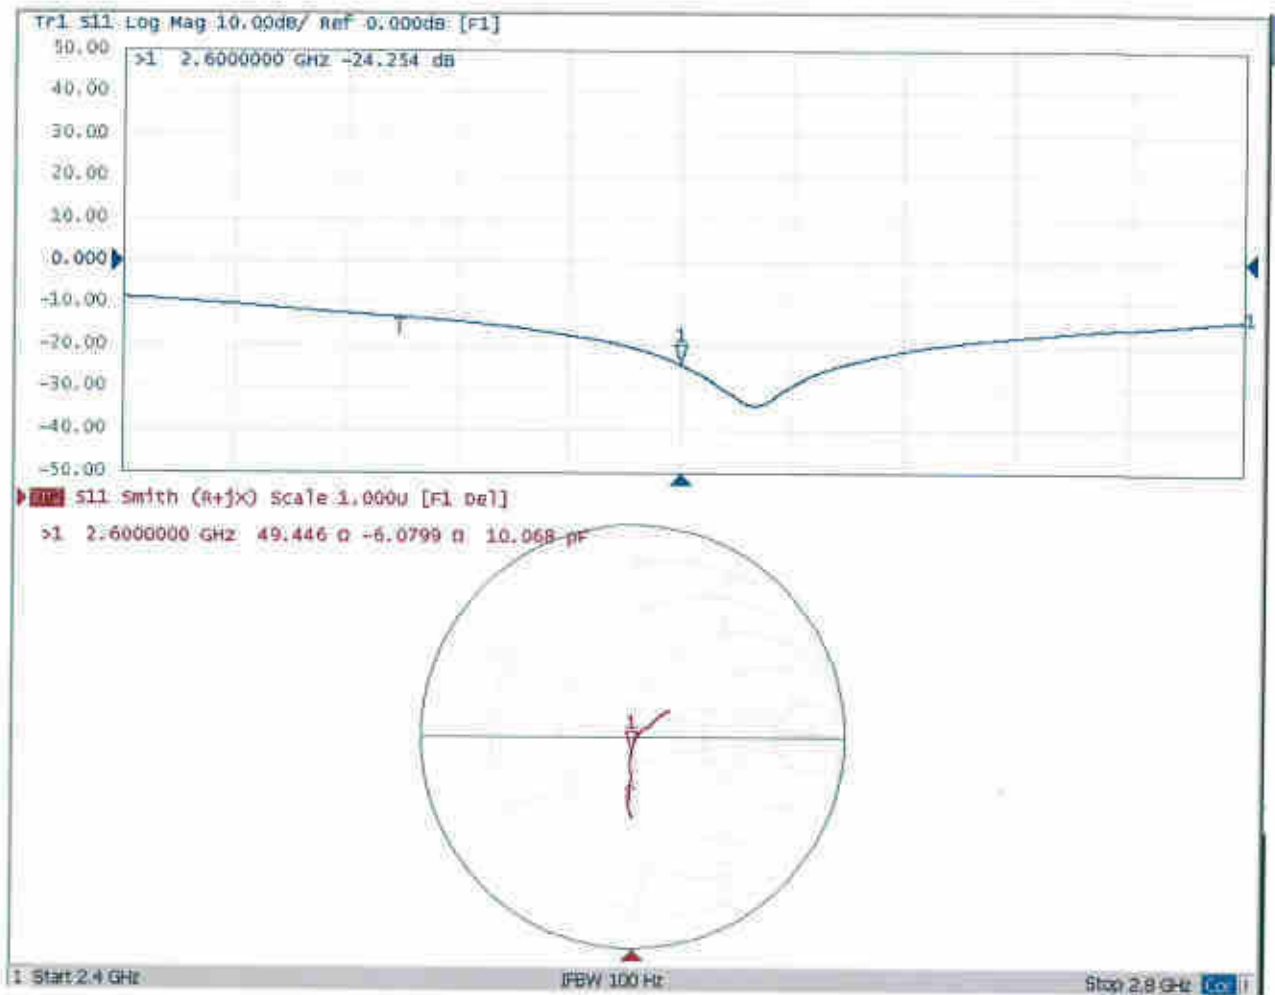



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## **DASY5 Validation Report for Body TSL**

Date: 12.07.2017

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.127$  S/m;  $\epsilon_r = 52.63$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.48, 7.48, 7.48); Calibrated: 1/23/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn536; Calibrated: 10/9/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**

Reference Value = 96.43 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.0 W/kg

**SAR(1 g) = 14 W/kg; SAR(10 g) = 6.23 W/kg**

Maximum value of SAR (measured) = 23.8 W/kg

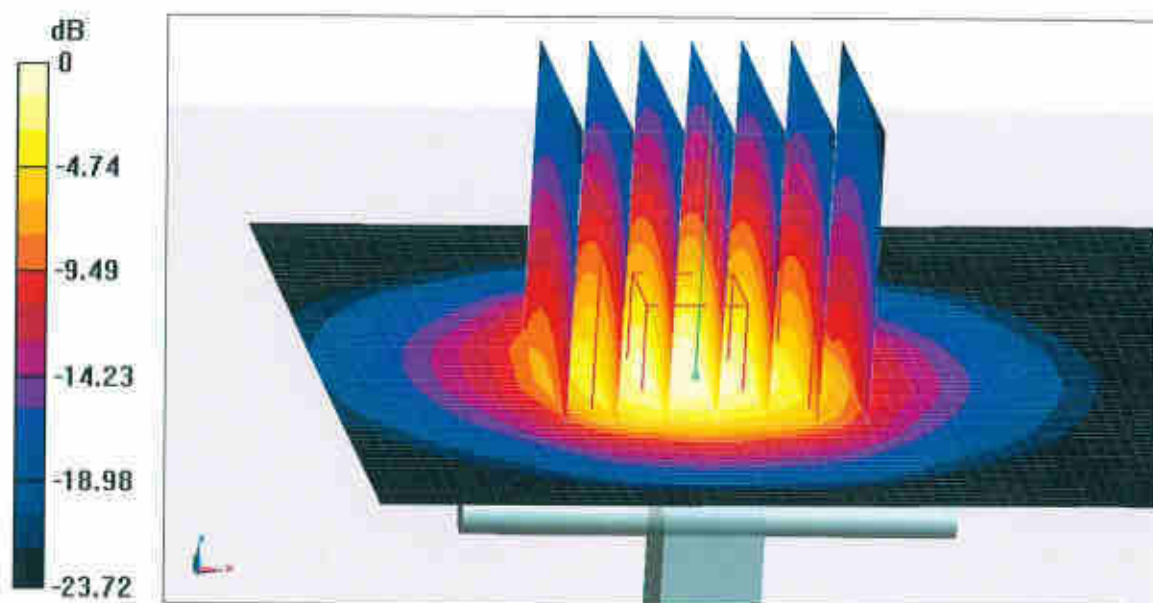

**0 dB = 23.8 W/kg = 13.77 dBW/kg**



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

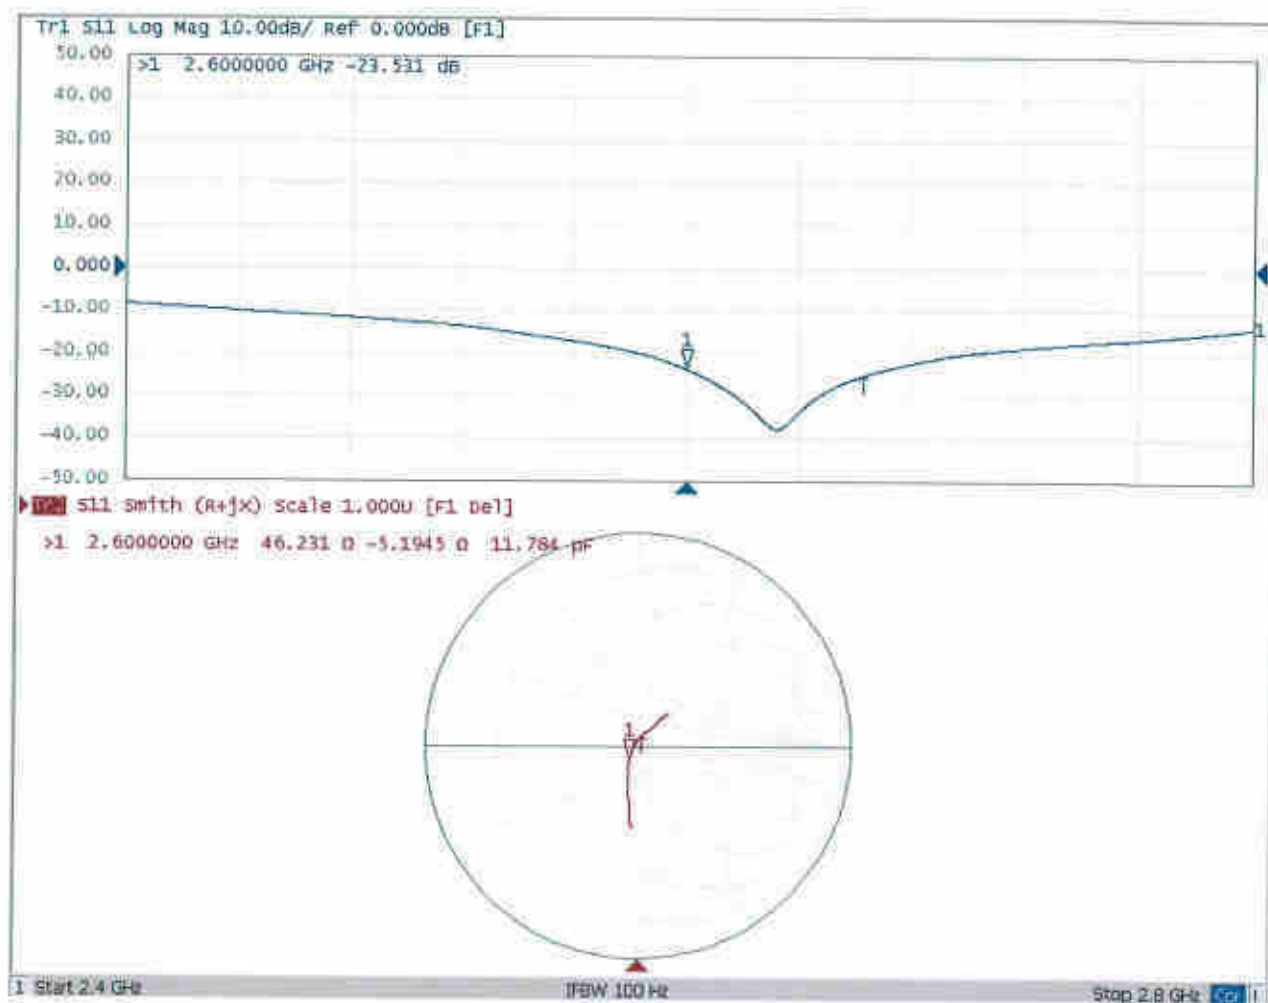



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Client : **Sporton International INC**

Certificate No: **Z17-97153**

## CALIBRATION CERTIFICATE

Object

DAE4 - SN: 1326

Calibration Procedure(s)

FF-Z11-002-01

Calibration Procedure for the Data Acquisition Electronics  
(DAEx)

Calibration date:

September 15, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ ) $^{\circ}\text{C}$  and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 27-Jun-17 (CTTL, No.J17X05859)           | June-18               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: September 18, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.