



BT CH 78 2480MHz	*	2480	99.59	-	-	96.82	27.54	6.33	31.1	354	311	P	H
	*	2480	74.8	-	-	-	-	-	-	-	-	A	H
		2483.52	46.7	-27.3	74	43.94	27.53	6.33	31.1	354	311	P	H
		2483.52	21.91	-32.09	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	104.64	-	-	101.87	27.54	6.33	31.1	100	16	P	V
	*	2480	79.85	-	-	-	-	-	-	-	-	A	V
		2483.52	51.52	-22.48	74	48.76	27.53	6.33	31.1	100	16	P	V
		2483.52	26.73	-27.27	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	35.15	-38.85	74	53.48	31.21	9.62	59.16	100	0	P	H
		4804	10.36	-43.64	54	-	-	-	-	-	-	A	H
													H
													H
		4804	35.19	-38.81	74	53.52	31.21	9.62	59.16	100	0	P	V
		4804	10.4	-43.6	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	35.87	-38.13	74	54.18	31.24	9.63	59.18	100	0	P	H
		4882	11.08	-42.92	54	-	-	-	-	-	-	A	H
		7323	41.19	-32.81	74	52.11	36.55	11.7	59.17	100	0	P	H
		7323	16.4	-37.6	54	-	-	-	-	-	-	A	H
		4882	34.74	-39.26	74	53.05	31.24	9.63	59.18	100	0	P	V
		4882	9.95	-44.05	54	-	-	-	-	-	-	A	V
		7323	42.46	-31.54	74	53.38	36.55	11.7	59.17	100	0	P	V
		7323	17.67	-36.33	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	35.58	-38.42	74	53.58	31.54	9.65	59.19	100	0	P	H
		4960	10.79	-43.21	54	-	-	-	-	-	-	A	H
		7440	41.18	-32.82	74	51.98	36.56	11.76	59.12	100	0	P	H
		7440	16.39	-37.61	54	-	-	-	-	-	-	A	H
		4960	37.11	-36.89	74	55.11	31.54	9.65	59.19	100	0	P	V
		4960	12.32	-41.68	54	-	-	-	-	-	-	A	V
		7440	41.39	-32.61	74	52.19	36.56	11.76	59.12	100	0	P	V
		7440	16.6	-37.4	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		52.31	23.75	-16.25	40	41.92	13.41	0.95	32.53	-	-	P	H
		96.93	23.22	-20.28	43.5	38.6	15.68	1.33	32.39	-	-	P	H
		298.69	38.1	-7.9	46	48.76	19.27	2.28	32.21	100	0	P	H
		325.85	31.05	-14.95	46	41.2	19.63	2.35	32.13	-	-	P	H
		426.73	29.92	-16.08	46	36.7	22.7	2.66	32.14	-	-	P	H
		722.58	34.22	-11.78	46	35.38	27.3	3.48	31.94	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		35.82	26.94	-13.06	40	36.49	22.13	0.77	32.45	100	0	P	V
		82.38	26.16	-13.84	40	43.58	13.78	1.24	32.44	-	-	P	V
		298.69	31.01	-14.99	46	41.67	19.27	2.28	32.21	-	-	P	V
		324.88	29.68	-16.32	46	39.87	19.6	2.35	32.14	-	-	P	V
		405.39	32.09	-13.91	46	39.34	22.11	2.6	31.96	-	-	P	V
		518.88	31.73	-14.27	46	37.4	24.1	2.96	32.73	-	-	P	V
													V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Leo Lee, Mancy Chou and Bigshow Wang	Temperature :	23.9~25.2°C
		Relative Humidity :	53~60%

Note symbol

-L	Low channel location
-R	High channel location



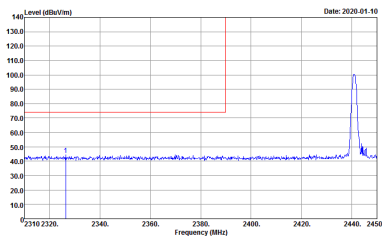
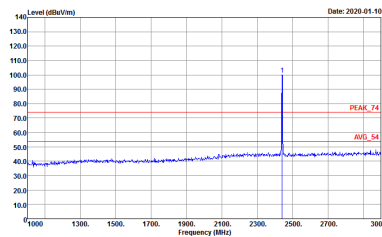
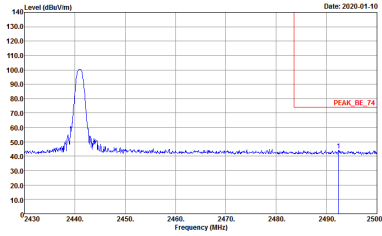
2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

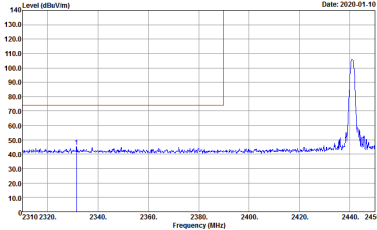
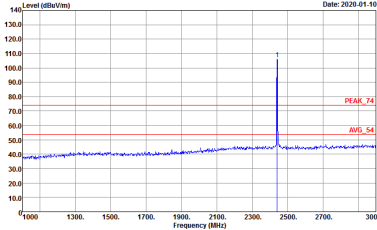
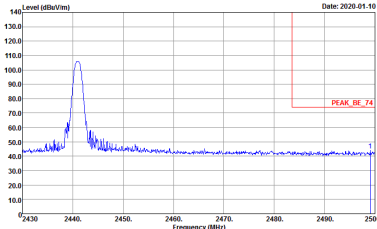
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 900635	Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 900635



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2020-01-10 Frequency (MHz) Site : 03CH15-11Y Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 900635	Level (dBuV/m) Date: 2020-01-10 Frequency (MHz) Site : 03CH15-11Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 900635

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2020-01-10 2460 2463.2465 2467.2469 2471 2473.2475 2477.2479 2481.2483 2485.2487 2489 2491 2493 2495 2497 2500 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 900635	Level (dBuV/m) Date: 2020-01-10 1000 1300 1500 1700 1900 2100 2300 2500 2700 3000 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 900635

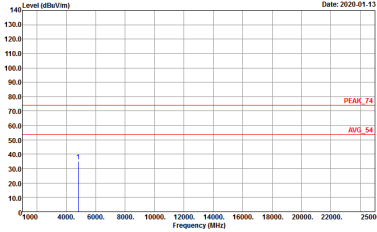
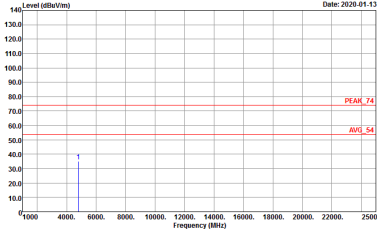


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2020-01-10 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 900635	Level (dBuV/m) Date: 2020-01-10 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 900635



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635

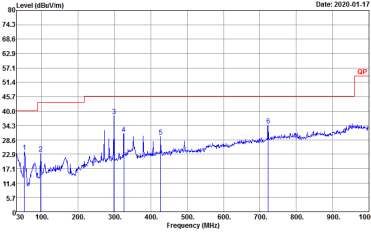
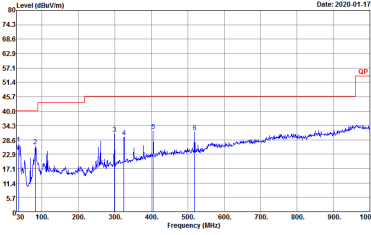


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-01-13 Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635	Level (dBuV/m) Date: 2020-01-13 Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635

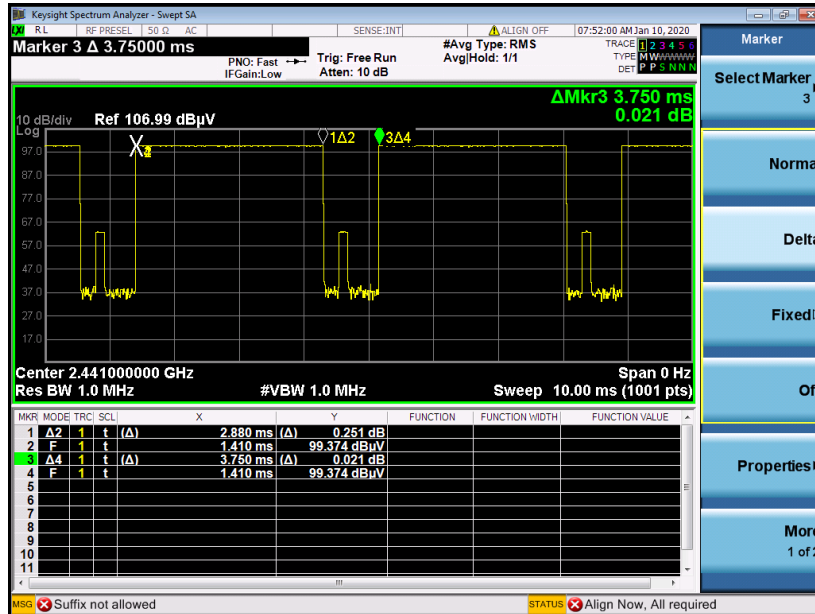
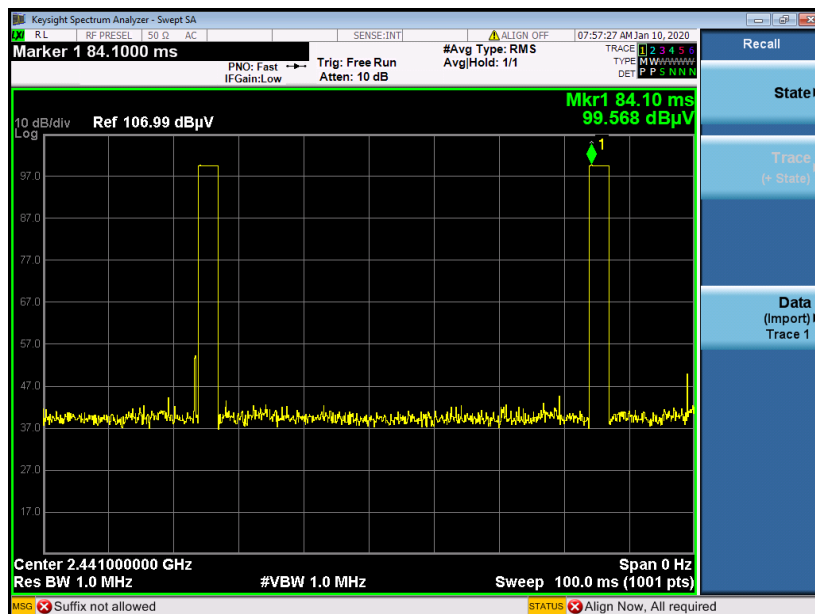


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-01-13 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak Project : 9D0635	Level (dBuV/m) Date: 2020-01-13 Frequency (MHz) Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak Project : 9D0635

Emission below 1GHz
2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 HORIZONTAL Detector : Peak Project : 9D0635	 Site : 03CH15-HY Condition : QP 3m BTLOG_15_41912 VERTICAL Detector : Peak Project : 9D0635

Appendix E. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

on time (Count Pulses) Plot on Channel 39

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

—————THE END—————