



Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High



	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5230.000	103.04	31.91	5.01	37.21	102.75	68.20	34.55	VERTICAL	peak
2	5350.000	47.89	32.02	5.09	37.18	47.82	68.20	-20.38	VERTICAL	peak
3	5358.051	49.12	32.03	5.10	37.18	49.07	74.00	-24.93	VERTICAL	peak

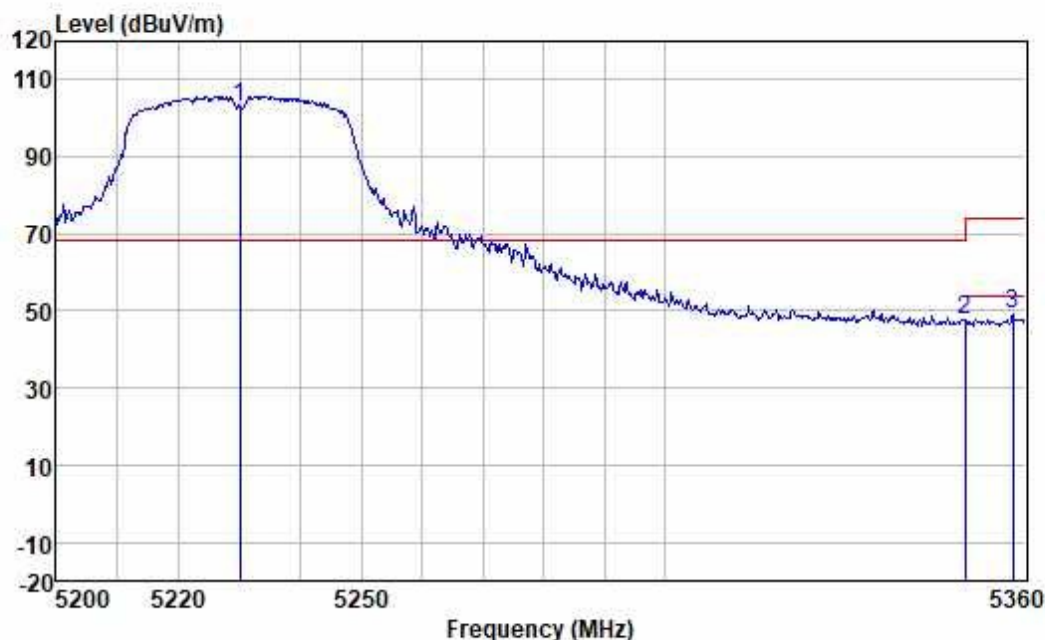


Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

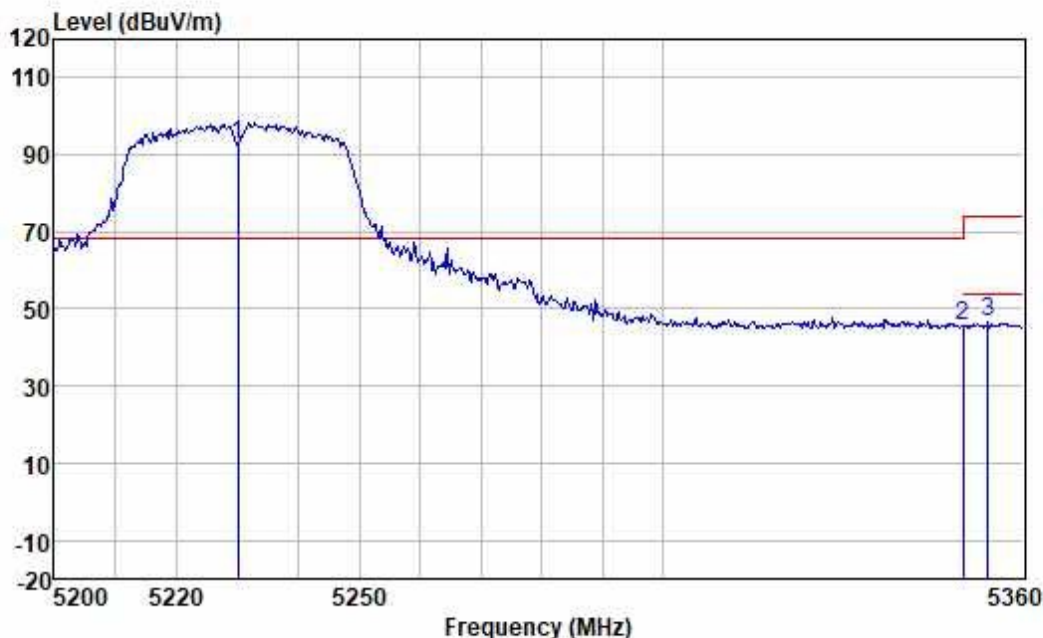

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5230.000	93.10	31.91	5.01	37.21	92.81	68.20	24.61	HORIZONTAL peak
2	5350.000	45.49	32.02	5.09	37.18	45.42	68.20	-22.78	HORIZONTAL peak
3	5354.155	46.55	32.03	5.10	37.18	46.50	74.00	-27.50	HORIZONTAL peak




Test Mode: 05; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

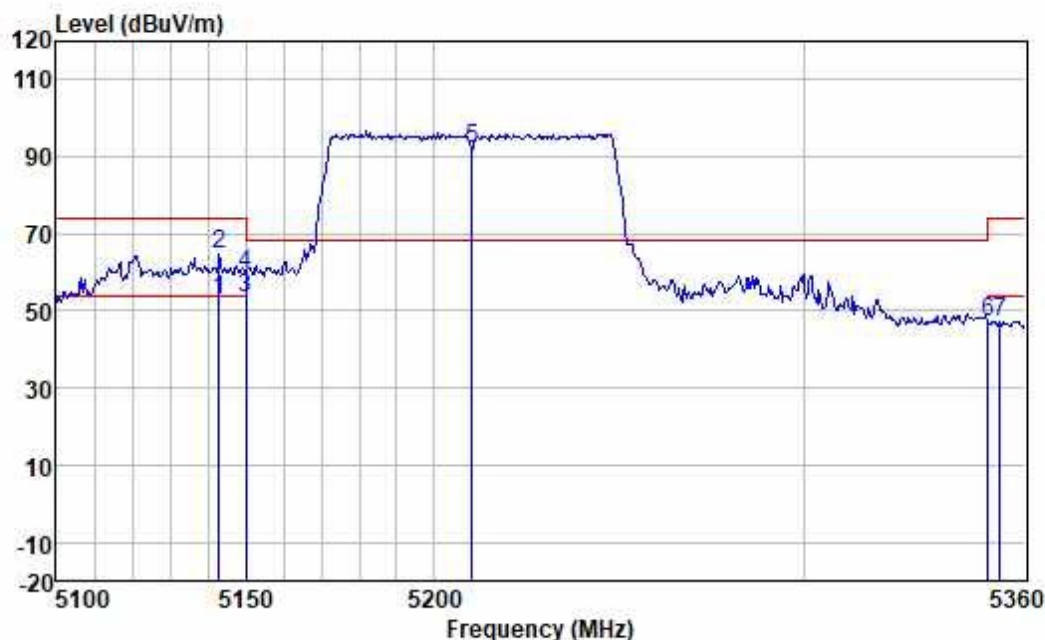

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5142.781	53.25	31.85	4.96	37.23	52.83	54.00	-1.17	VERTICAL	Average
2	5142.781	64.97	31.85	4.96	37.23	64.55	74.00	-9.45	VERTICAL	peak
3	5150.000	53.83	31.85	4.96	37.23	53.41	54.00	-0.59	VERTICAL	Average
4	5150.000	59.94	31.85	4.96	37.23	59.52	68.20	-8.68	VERTICAL	peak
5 *	5210.000	92.49	31.90	5.00	37.21	92.18	68.20	23.98	VERTICAL	peak
6	5350.000	47.03	32.02	5.09	37.18	46.96	68.20	-21.24	VERTICAL	peak
7	5353.341	47.43	32.02	5.09	37.18	47.36	74.00	-26.64	VERTICAL	peak




Test Mode: 05; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

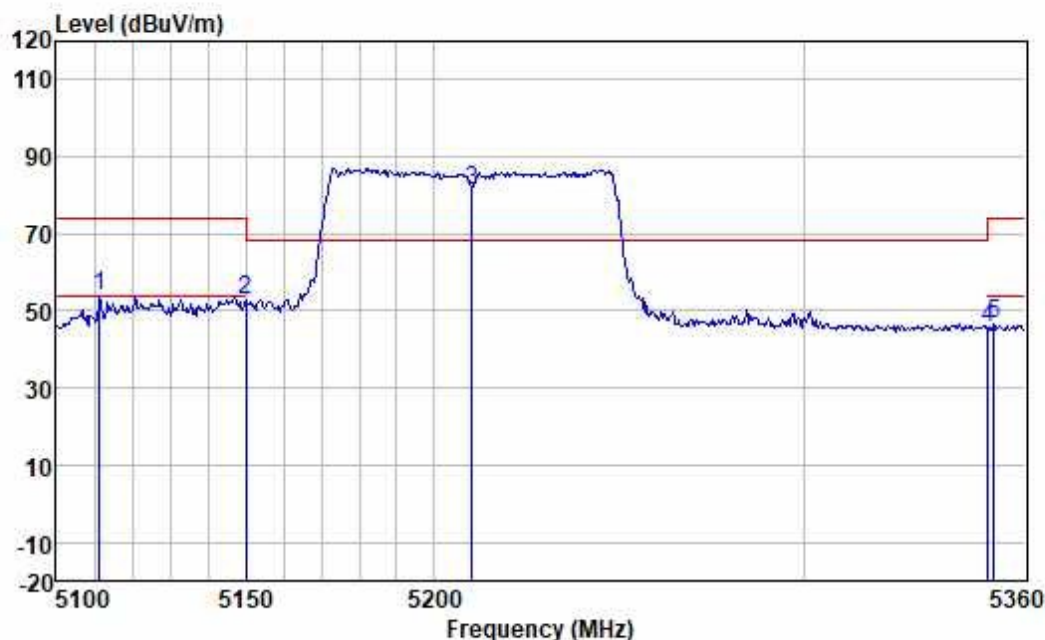

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5111.424	54.35	31.83	4.94	37.25	53.87	74.00	-20.13	HORIZONTAL	peak
2	5150.000	53.38	31.85	4.96	37.23	52.96	68.20	-15.24	HORIZONTAL	peak
3 *	5210.000	81.75	31.90	5.00	37.21	81.44	68.20	13.24	HORIZONTAL	peak
4	5350.000	45.52	32.02	5.09	37.18	45.45	68.20	-22.75	HORIZONTAL	peak
5	5351.744	46.61	32.02	5.09	37.18	46.54	74.00	-27.46	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

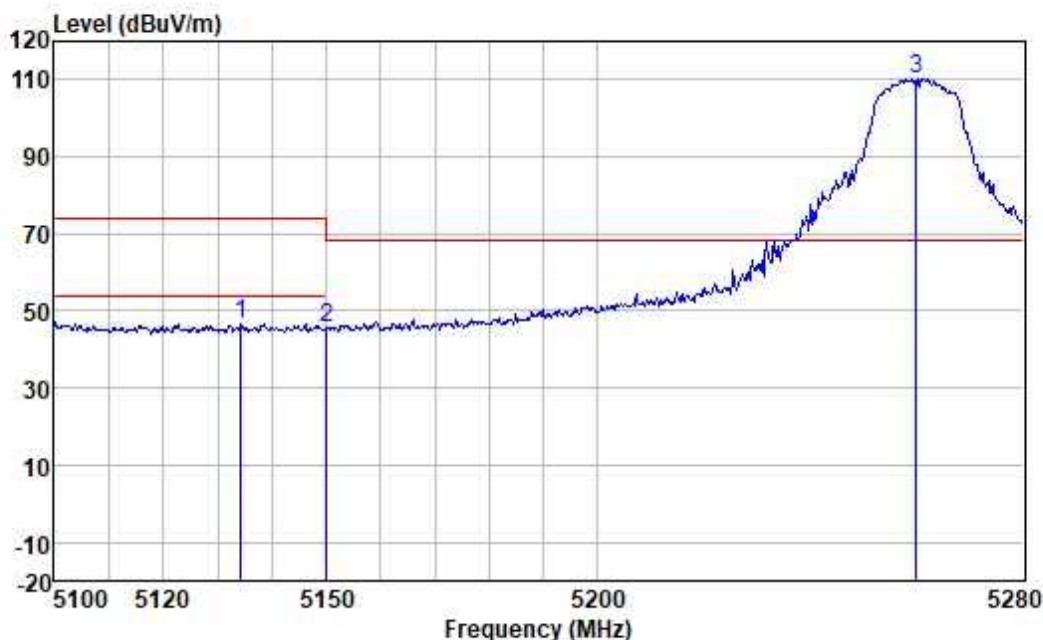

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5134.255	47.26	31.85	4.95	37.24	46.82	74.00	-27.18	VERTICAL	peak
2	5150.000	45.95	31.85	4.96	37.23	45.53	68.20	-22.67	VERTICAL	peak
3 *	5260.000	110.27	31.94	5.03	37.20	110.04	68.20	41.84	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

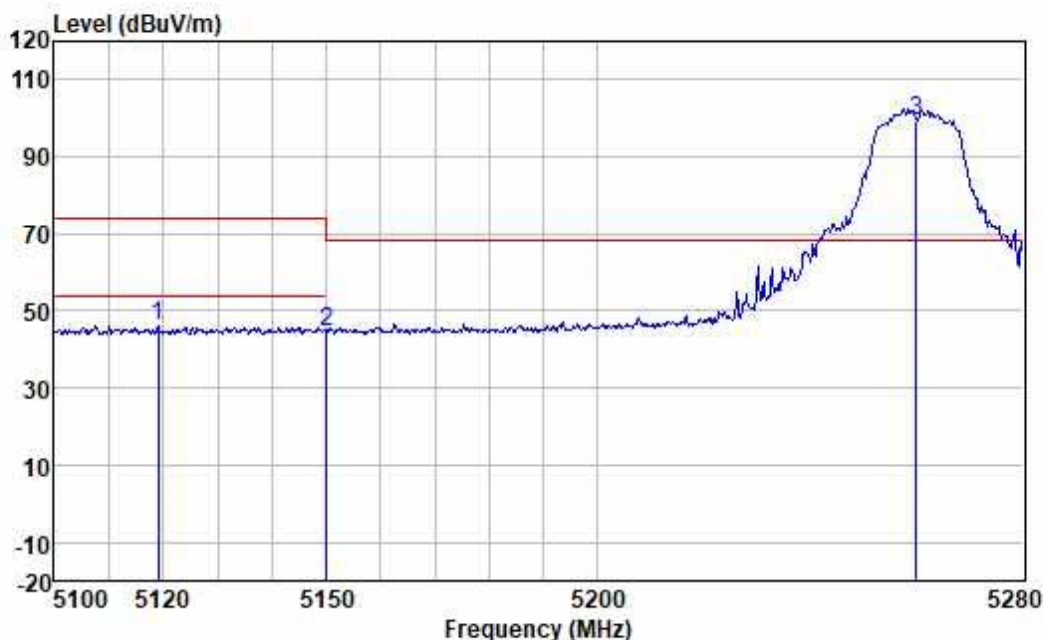

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	5119.141	46.79	31.84	4.95	37.25	46.33	74.00	-27.67	HORIZONTAL peak
2	5150.000	45.06	31.85	4.96	37.23	44.64	68.20	-23.56	HORIZONTAL peak
3 *	5260.000	99.67	31.94	5.03	37.20	99.44	68.20	31.24	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

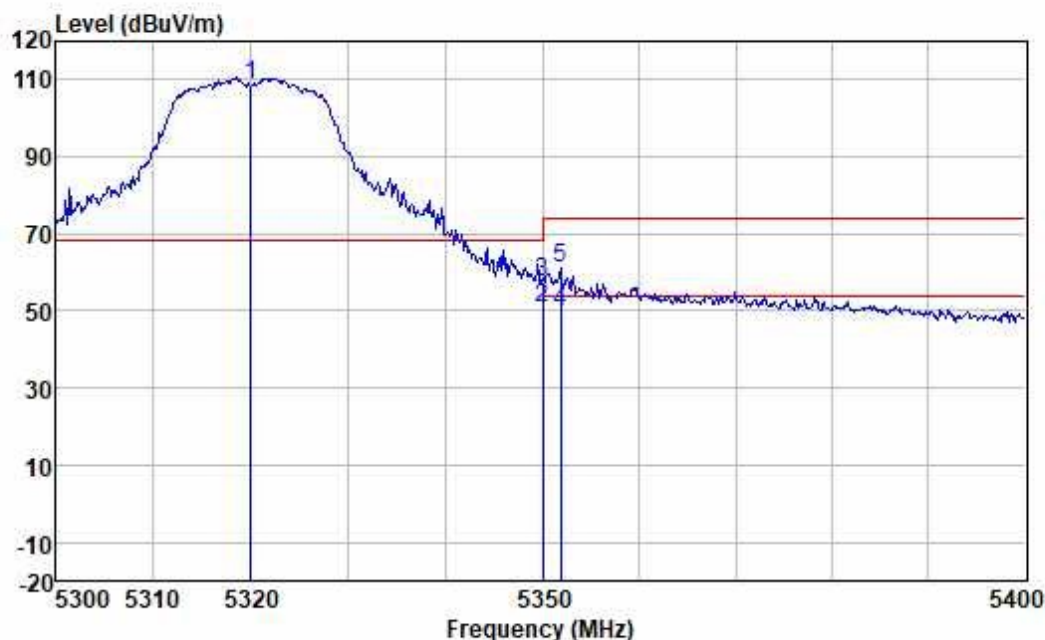

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5320.000	108.77	32.00	5.08	37.19	108.66	68.20	40.46	VERTICAL	peak
2	5350.000	50.71	32.02	5.09	37.18	50.64	54.00	-3.36	VERTICAL	Average
3	5350.000	57.80	32.02	5.09	37.18	57.73	68.20	-10.47	VERTICAL	peak
4	5351.867	49.98	32.02	5.09	37.18	49.91	54.00	-4.09	VERTICAL	Average
5	5351.867	61.25	32.02	5.09	37.18	61.18	74.00	-12.82	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

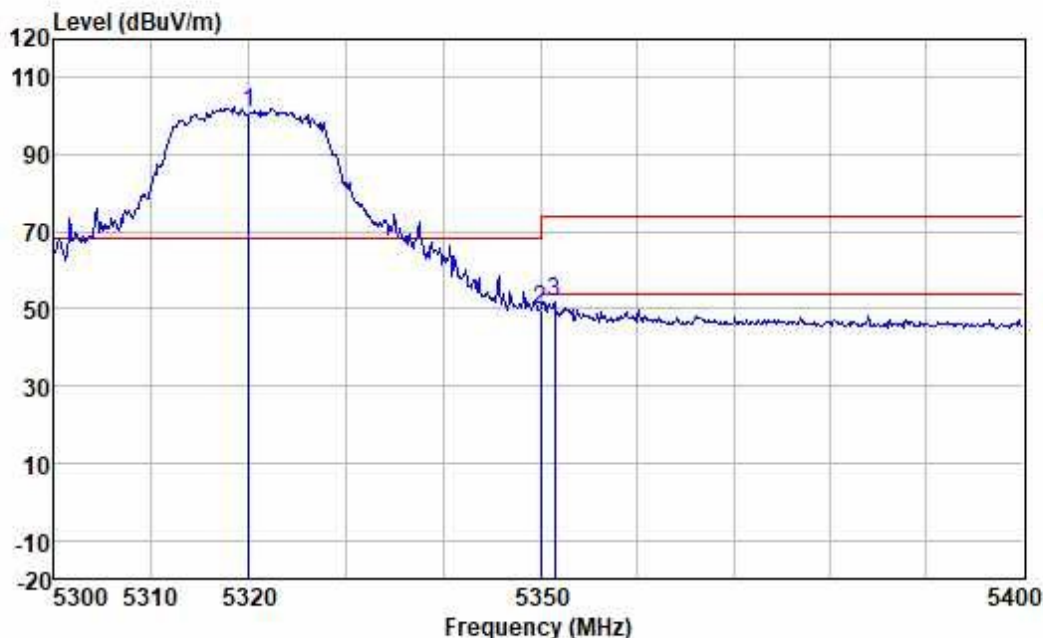

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5320.000	100.79	32.00	5.08	37.19	100.68	68.20	32.48	HORIZONTAL	peak
2	5350.000	49.92	32.02	5.09	37.18	49.85	68.20	-18.35	HORIZONTAL	peak
3	5351.467	51.85	32.02	5.09	37.18	51.78	74.00	-22.22	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

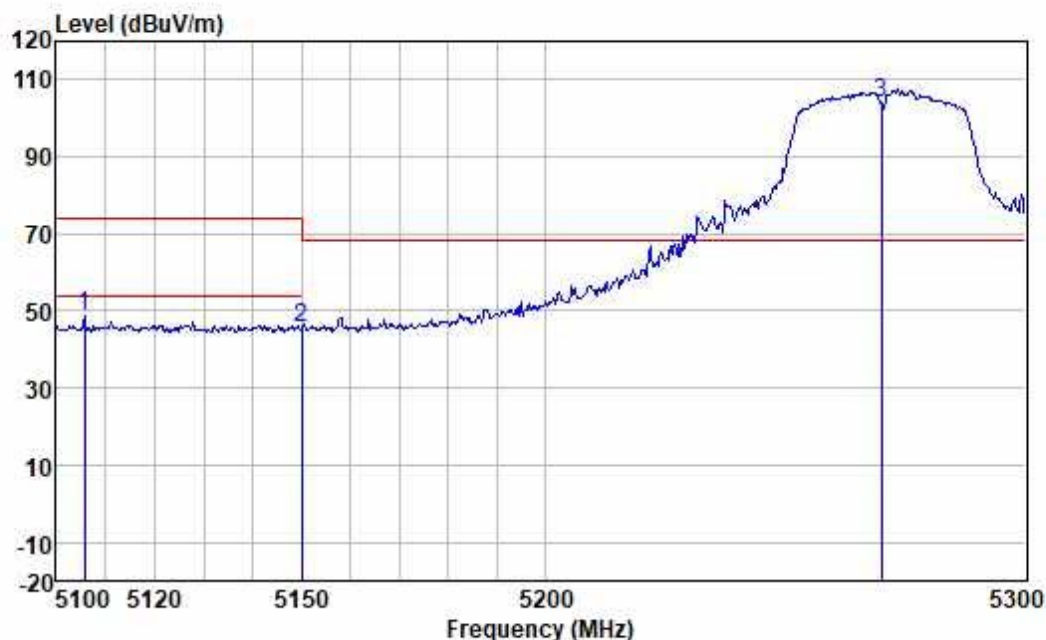

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5105.692	49.03	31.83	4.94	37.25	48.55	74.00	-25.45	VERTICAL peak
2	5150.000	45.85	31.85	4.96	37.23	45.43	68.20	-22.77	VERTICAL peak
3 *	5270.000	104.14	31.96	5.04	37.20	103.94	68.20	35.74	VERTICAL peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

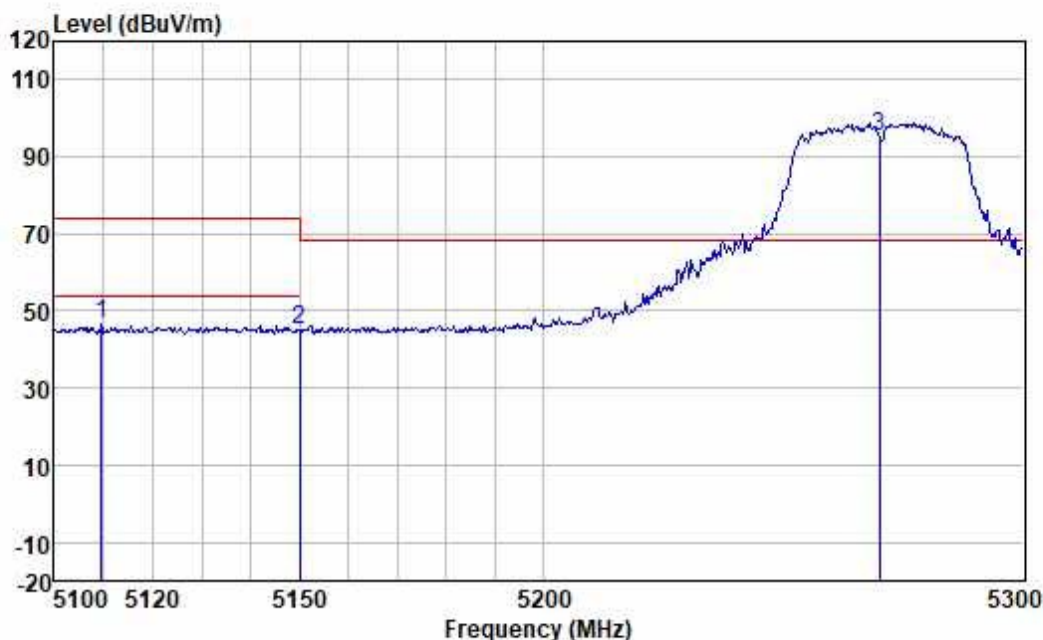

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5109.622	46.88	31.83	4.94	37.25	46.40	74.00	-27.60	HORIZONTAL peak
2	5150.000	45.39	31.85	4.96	37.23	44.97	68.20	-23.23	HORIZONTAL peak
3 *	5270.000	95.40	31.96	5.04	37.20	95.20	68.20	27.00	HORIZONTAL peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

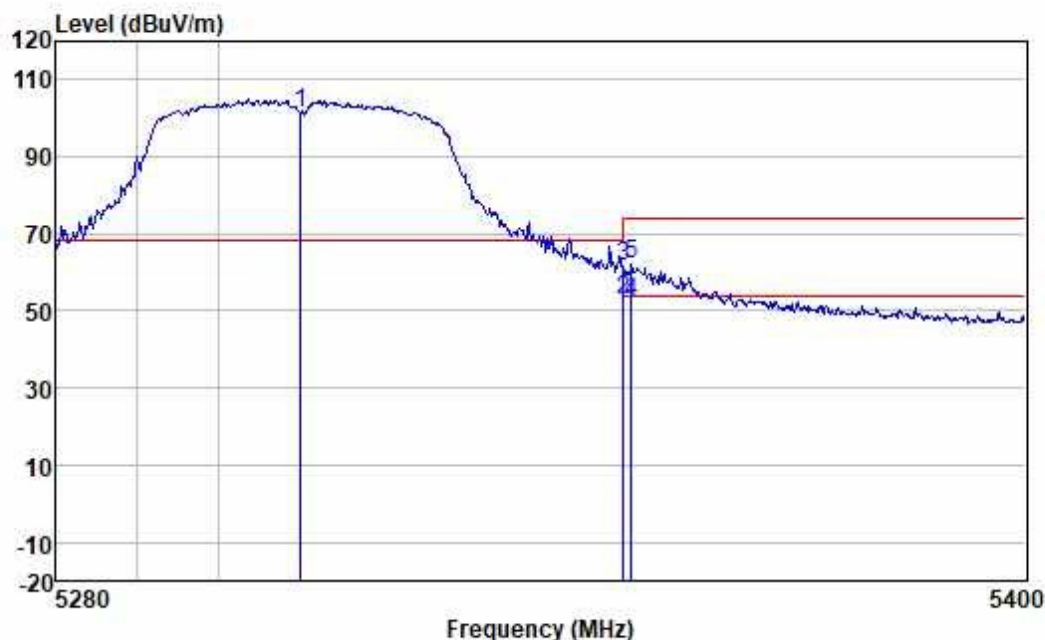

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	101.36	32.00	5.08	37.19	101.25	68.20	33.05	VERTICAL	peak
2	5350.000	53.16	32.02	5.09	37.18	53.09	54.00	-0.91	VERTICAL	Average
3	5350.000	61.52	32.02	5.09	37.18	61.45	68.20	-6.75	VERTICAL	peak
4	5350.955	52.24	32.02	5.09	37.18	52.17	54.00	-1.83	VERTICAL	Average
5	5350.955	62.08	32.02	5.09	37.18	62.01	74.00	-11.99	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

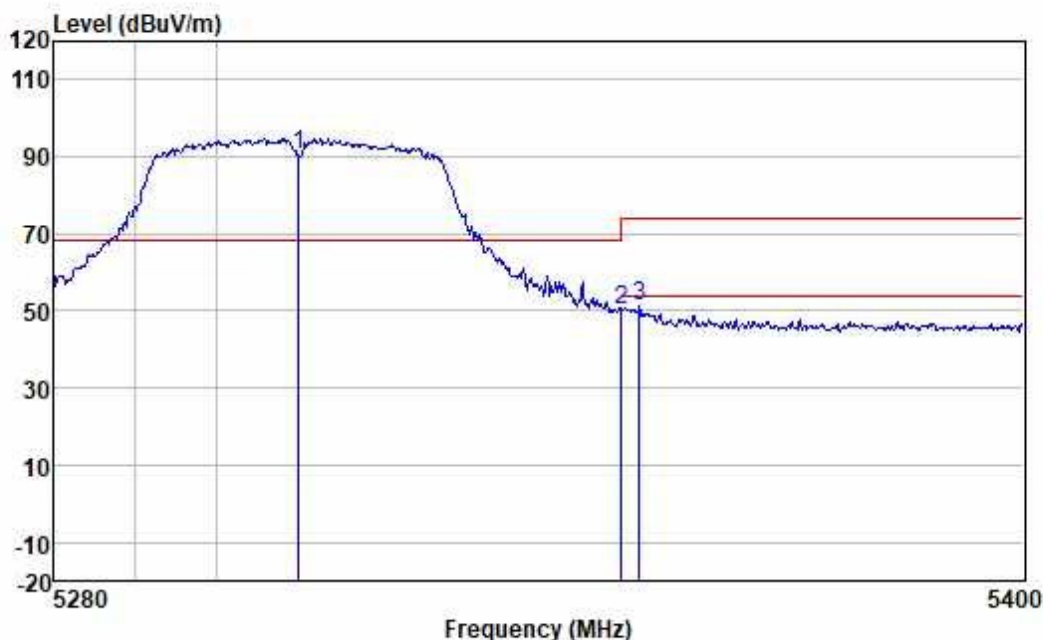

		ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5310.000	90.78	32.00	5.08	37.19	90.67	68.20	22.47	HORIZONTAL	peak
2	5350.000	50.38	32.02	5.09	37.18	50.31	68.20	-17.89	HORIZONTAL	peak
3	5352.157	51.25	32.02	5.09	37.18	51.18	74.00	-22.82	HORIZONTAL	peak




Test Mode: 06; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

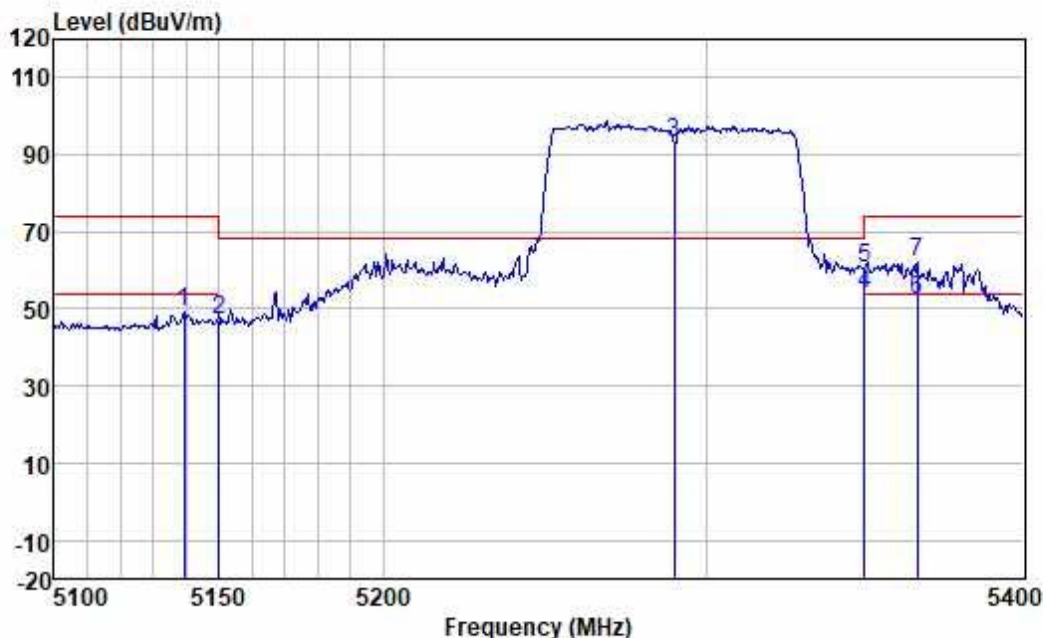

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5139.212	49.64	31.85	4.95	37.24	49.20	74.00	-24.80	VERTICAL	peak
2	5150.000	47.69	31.85	4.96	37.23	47.27	68.20	-20.93	VERTICAL	peak
3 *	5290.000	93.29	31.97	5.05	37.20	93.11	68.20	24.91	VERTICAL	peak
4	5350.000	53.71	32.02	5.09	37.18	53.64	54.00	-0.36	VERTICAL	Average
5	5350.000	60.75	32.02	5.09	37.18	60.68	68.20	-7.52	VERTICAL	peak
6	5366.461	52.47	32.03	5.10	37.18	52.42	54.00	-1.58	VERTICAL	Average
7	5366.461	62.18	32.03	5.10	37.18	62.13	74.00	-11.87	VERTICAL	peak




Test Mode: 06; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

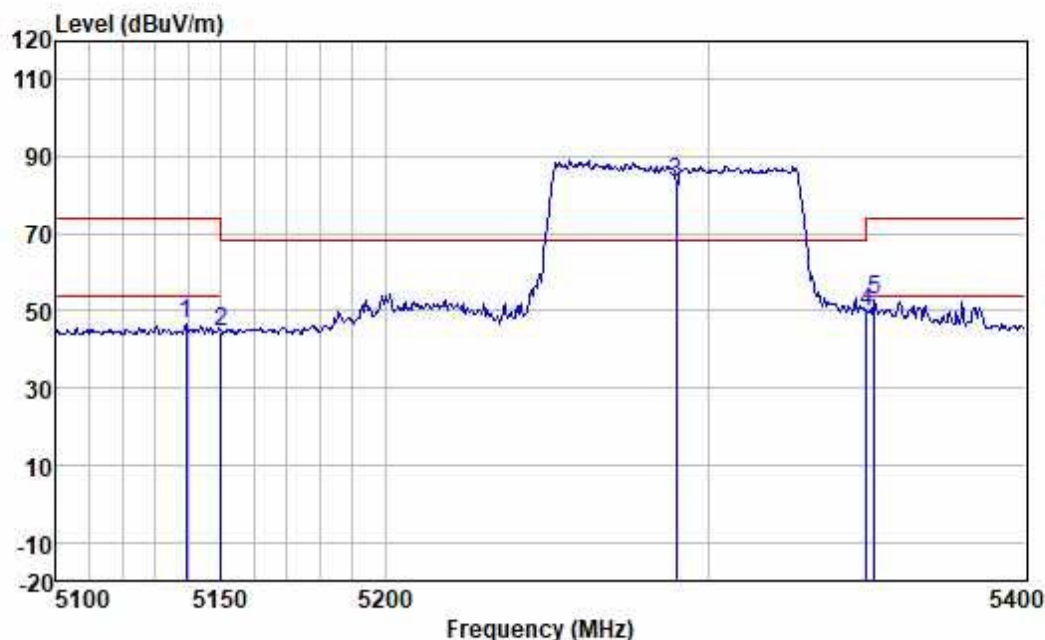

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5139.212	46.99	31.85	4.95	37.24	46.55	74.00	-27.45	HORIZONTAL peak
2	5150.000	45.11	31.85	4.96	37.23	44.69	68.20	-23.51	HORIZONTAL peak
3 *	5290.000	83.52	31.97	5.05	37.20	83.34	68.20	15.14	HORIZONTAL peak
4	5350.000	49.89	32.02	5.09	37.18	49.82	68.20	-18.38	HORIZONTAL peak
5	5352.370	52.80	32.02	5.09	37.18	52.73	74.00	-21.27	HORIZONTAL peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

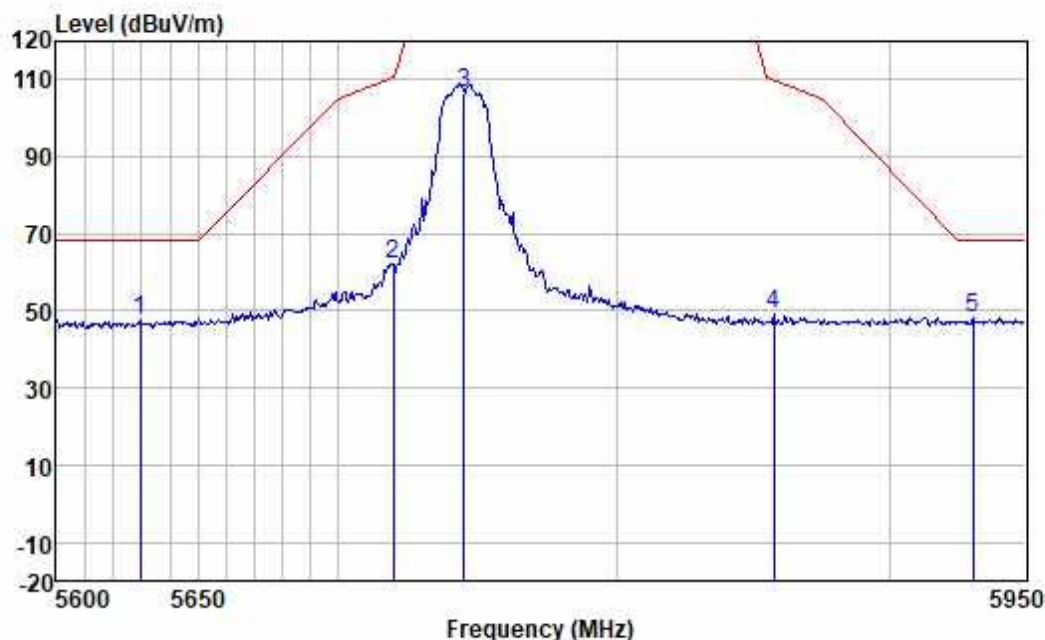

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5629.614	47.13	32.25	5.22	37.14	47.46	68.20	-20.74	VERTICAL	peak
2	5719.400	61.68	32.39	5.27	37.13	62.21	110.63	-48.42	VERTICAL	peak
3	5745.000	106.07	32.46	5.30	37.13	106.70	125.20	-18.50	VERTICAL	peak
4	5857.304	48.06	32.67	5.38	37.11	49.00	110.15	-61.15	VERTICAL	peak
5	5930.913	47.10	32.75	5.41	37.11	48.15	68.20	-20.05	VERTICAL	peak




Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

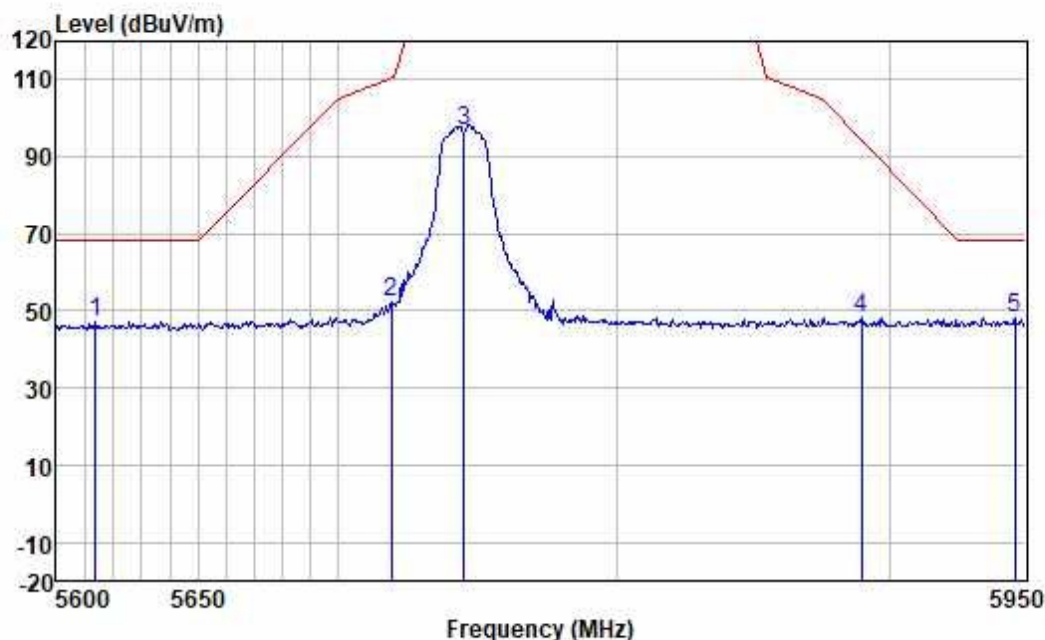

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5613.937	46.80	32.23	5.21	37.14	47.10	68.20	-21.10	HORIZONTAL	peak
2	5718.707	51.87	32.39	5.27	37.13	52.40	110.44	-58.04	HORIZONTAL	peak
3	5745.000	95.98	32.46	5.30	37.13	96.61	125.20	-28.59	HORIZONTAL	peak
4	5889.707	47.29	32.69	5.39	37.11	48.26	94.33	-46.07	HORIZONTAL	peak
5	5946.394	47.33	32.77	5.42	37.10	48.42	68.20	-19.78	HORIZONTAL	peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

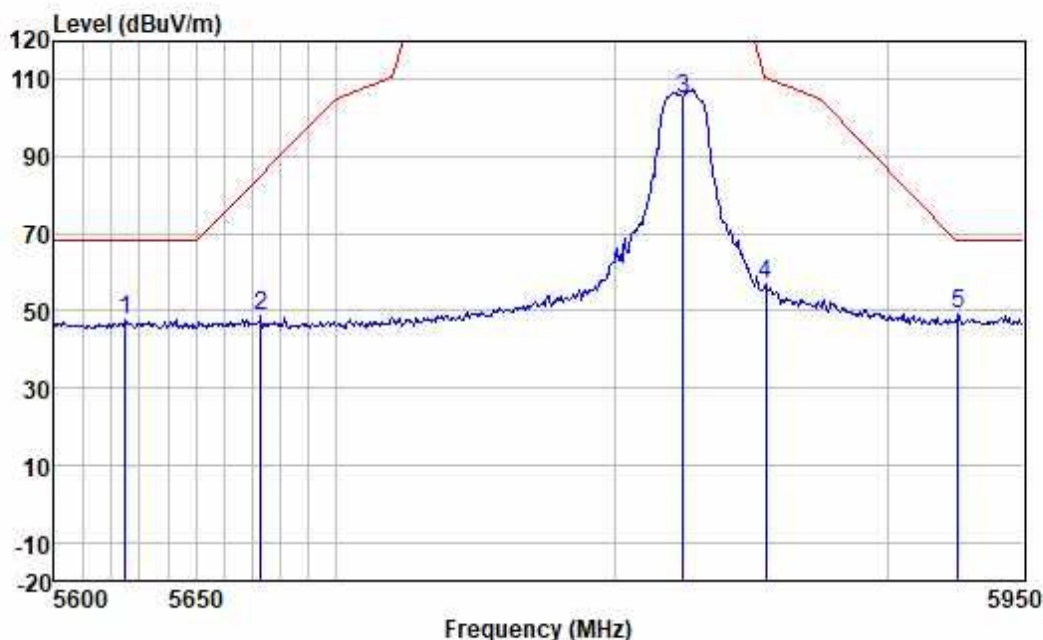

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5625.179	47.49	32.25	5.22	37.14	47.82	68.20	-20.38	VERTICAL	peak
2	5672.782	48.01	32.33	5.25	37.13	48.46	85.10	-36.64	VERTICAL	peak
3	5825.000	104.26	32.62	5.36	37.12	105.12	125.20	-20.08	VERTICAL	peak
4	5855.174	55.82	32.64	5.37	37.11	56.72	110.75	-54.03	VERTICAL	peak
5	5926.240	48.08	32.75	5.41	37.11	49.13	68.20	-19.07	VERTICAL	peak


Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

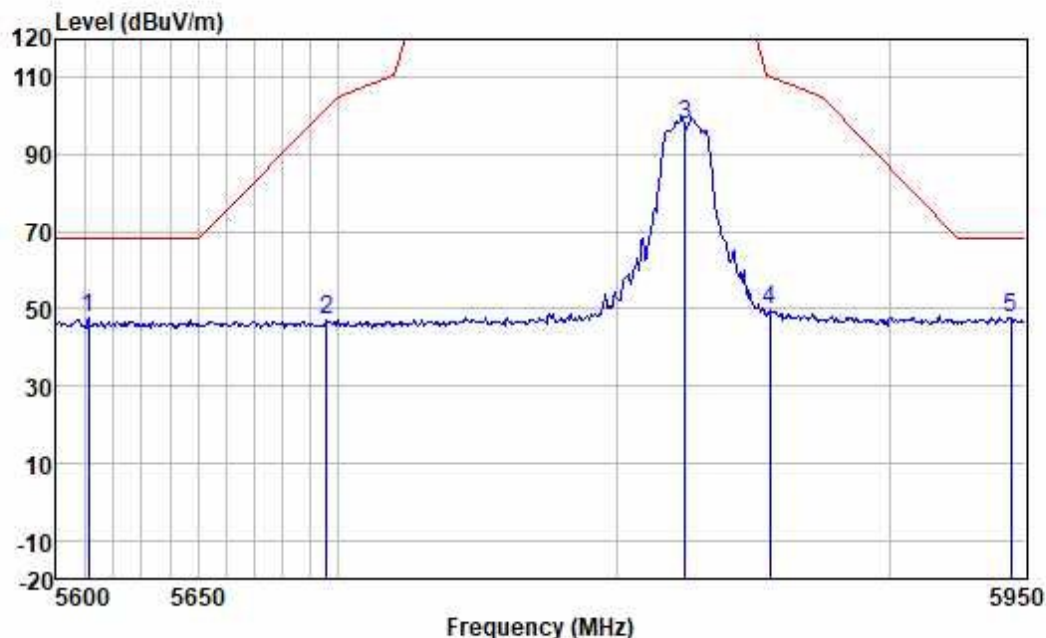

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5611.215	47.55	32.23	5.21	37.14	47.85	68.20	-20.35	HORIZONTAL	peak
2	5695.525	46.75	32.36	5.26	37.13	47.24	101.90	-54.66	HORIZONTAL	peak
3	5825.000	96.96	32.62	5.36	37.12	97.82	125.20	-27.38	HORIZONTAL	peak
4	5855.884	49.05	32.64	5.37	37.11	49.95	110.55	-60.60	HORIZONTAL	peak
5	5944.952	46.80	32.77	5.42	37.10	47.89	68.20	-20.31	HORIZONTAL	peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

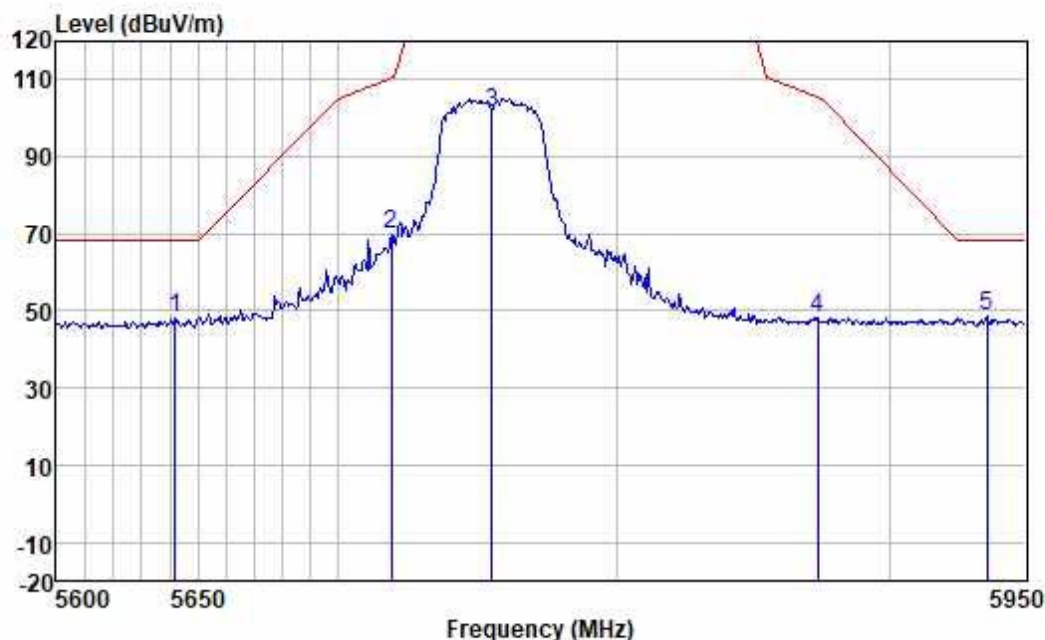

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5641.915	47.77	32.28	5.23	37.14	48.14	68.20	-20.06	VERTICAL	peak
2	5718.707	69.20	32.39	5.27	37.13	69.73	110.44	-40.71	VERTICAL	peak
3	5755.000	100.66	32.46	5.30	37.12	101.30	125.20	-23.90	VERTICAL	peak
4	5873.661	47.38	32.69	5.39	37.11	48.35	105.57	-57.22	VERTICAL	peak
5	5935.949	47.76	32.75	5.41	37.11	48.81	68.20	-19.39	VERTICAL	peak




Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

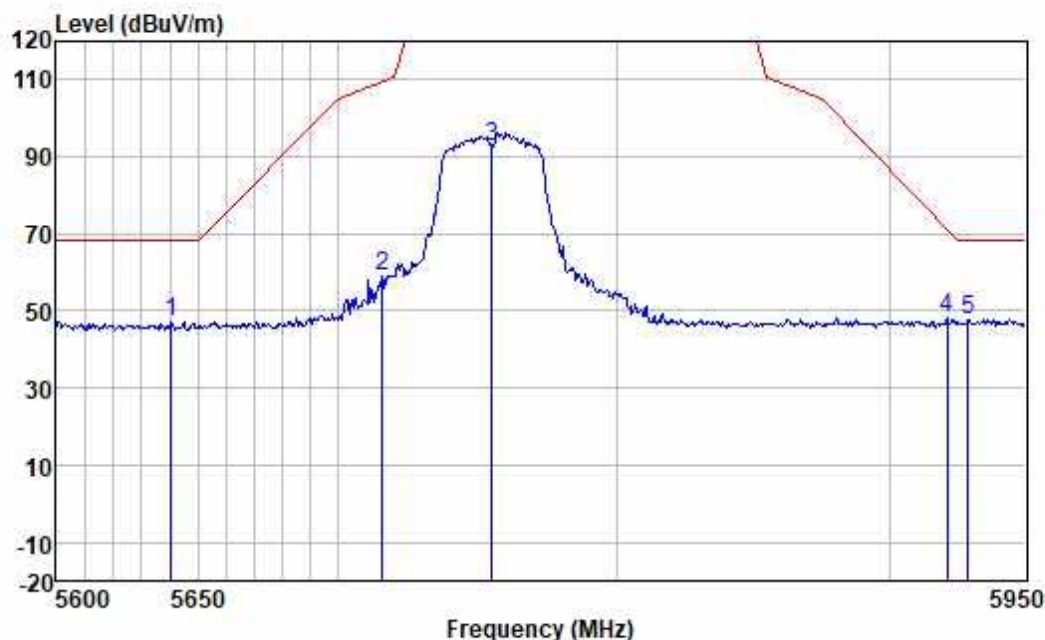

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5640.546	46.88	32.28	5.23	37.14	47.25	68.20	-20.95	HORIZONTAL	peak
2	5715.587	58.76	32.39	5.27	37.13	59.29	109.57	-50.28	HORIZONTAL	peak
3	5755.000	92.23	32.46	5.30	37.12	92.87	125.20	-32.33	HORIZONTAL	peak
4	5921.212	47.26	32.73	5.41	37.11	48.29	71.00	-22.71	HORIZONTAL	peak
5	5929.115	46.71	32.75	5.41	37.11	47.76	68.20	-20.44	HORIZONTAL	peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

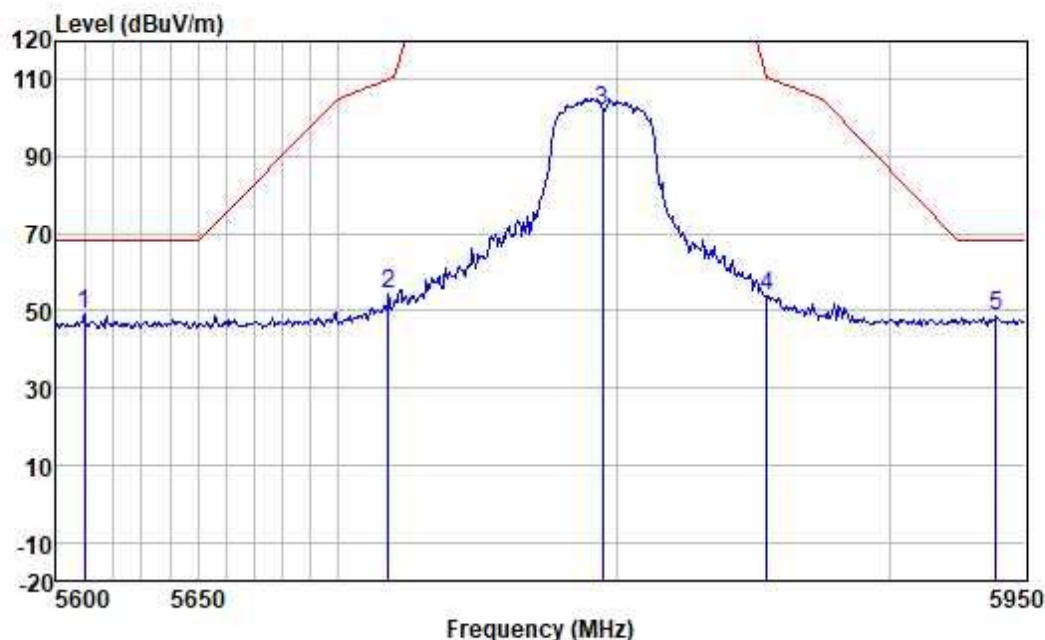

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5609.854	48.99	32.23	5.21	37.14	49.29	68.20	-18.91	VERTICAL	peak
2	5717.667	53.81	32.39	5.27	37.13	54.34	110.15	-55.81	VERTICAL	peak
3	5795.000	100.93	32.56	5.34	37.12	101.71	125.20	-23.49	VERTICAL	peak
4	5854.819	52.98	32.64	5.37	37.11	53.88	111.21	-57.33	VERTICAL	peak
5	5939.548	47.57	32.75	5.41	37.10	48.63	68.20	-19.57	VERTICAL	peak




Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

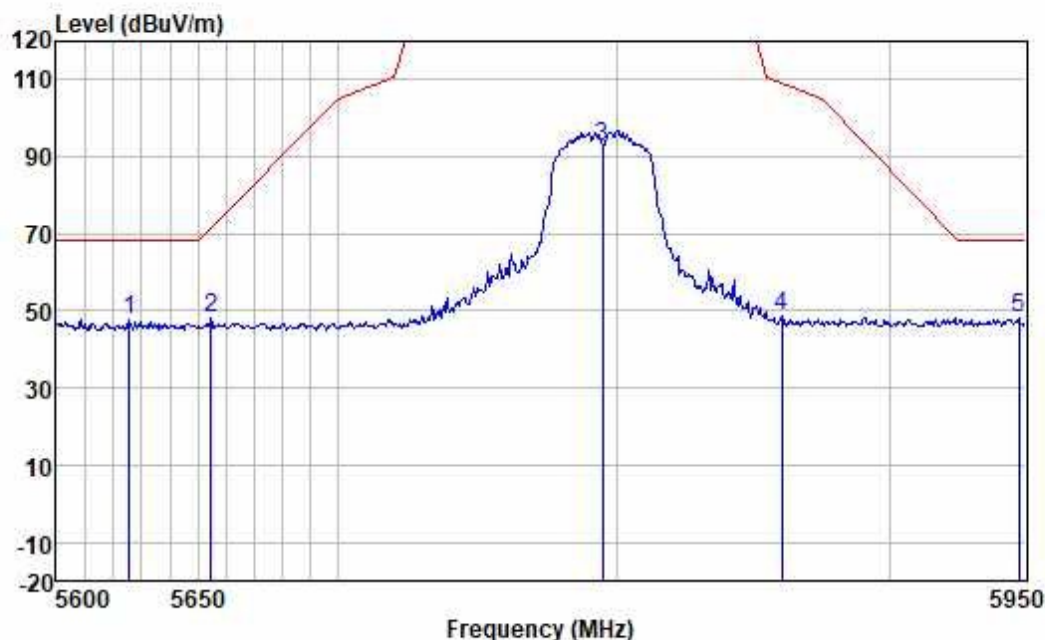

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5625.861	47.22	32.25	5.22	37.14	47.55	68.20	-20.65	HORIZONTAL peak
2	5654.584	47.60	32.28	5.23	37.14	47.97	71.61	-23.64	HORIZONTAL peak
3	5795.000	91.74	32.56	5.34	37.12	92.52	125.20	-32.68	HORIZONTAL peak
4	5860.146	47.84	32.67	5.38	37.11	48.78	109.36	-60.58	HORIZONTAL peak
5	5947.836	47.08	32.77	5.42	37.10	48.17	68.20	-20.03	HORIZONTAL peak




Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz

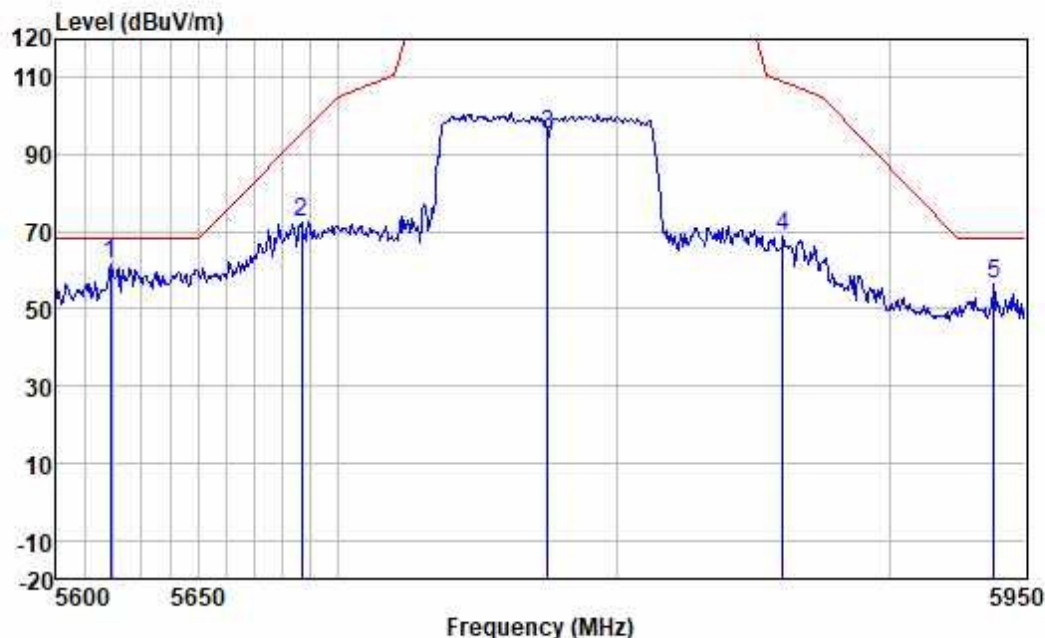

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5619.044	61.24	32.23	5.21	37.14	61.54	68.20	-6.66	VERTICAL peak
2	5686.900	72.19	32.33	5.25	37.13	72.64	95.54	-22.90	VERTICAL peak
3	5775.000	94.68	32.53	5.33	37.12	95.42	125.20	-29.78	VERTICAL peak
4	5860.856	67.85	32.67	5.38	37.11	68.79	109.16	-40.37	VERTICAL peak
5	5938.828	55.65	32.75	5.41	37.10	56.71	68.20	-11.49	VERTICAL peak




Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz

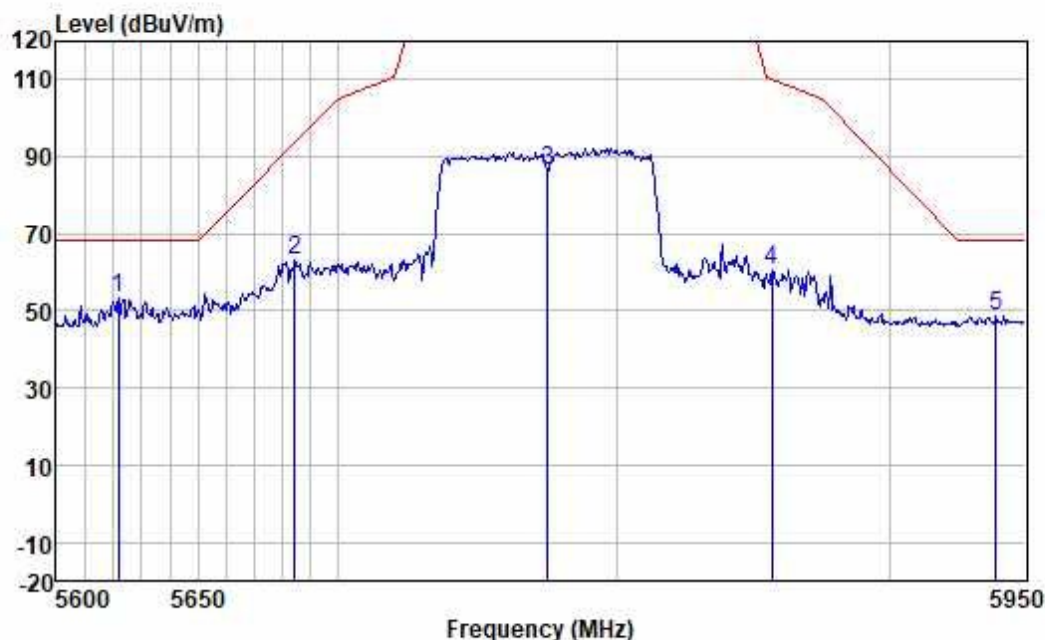

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5621.770	53.01	32.23	5.21	37.14	53.31	68.20	-14.89	HORIZONTAL	peak
2	5684.143	62.70	32.33	5.25	37.13	63.15	93.50	-30.35	HORIZONTAL	peak
3	5775.000	85.70	32.53	5.33	37.12	86.44	125.20	-38.76	HORIZONTAL	peak
4	5856.594	59.71	32.67	5.38	37.11	60.65	110.35	-49.70	HORIZONTAL	peak
5	5939.548	47.63	32.75	5.41	37.10	48.69	68.20	-19.51	HORIZONTAL	peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

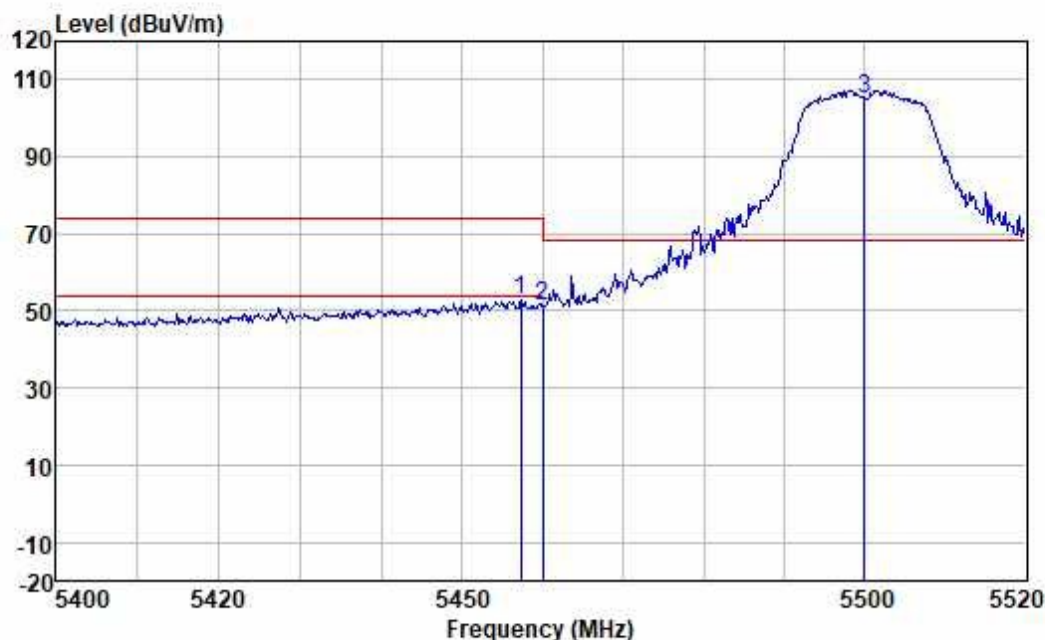

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5457.271	52.65	32.08	5.14	37.16	52.71	74.00	-21.29	VERTICAL	peak
2	5460.000	51.15	32.08	5.14	37.16	51.21	68.20	-16.99	VERTICAL	peak
3 *	5500.000	104.96	32.10	5.16	37.16	105.06	68.20	36.86	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

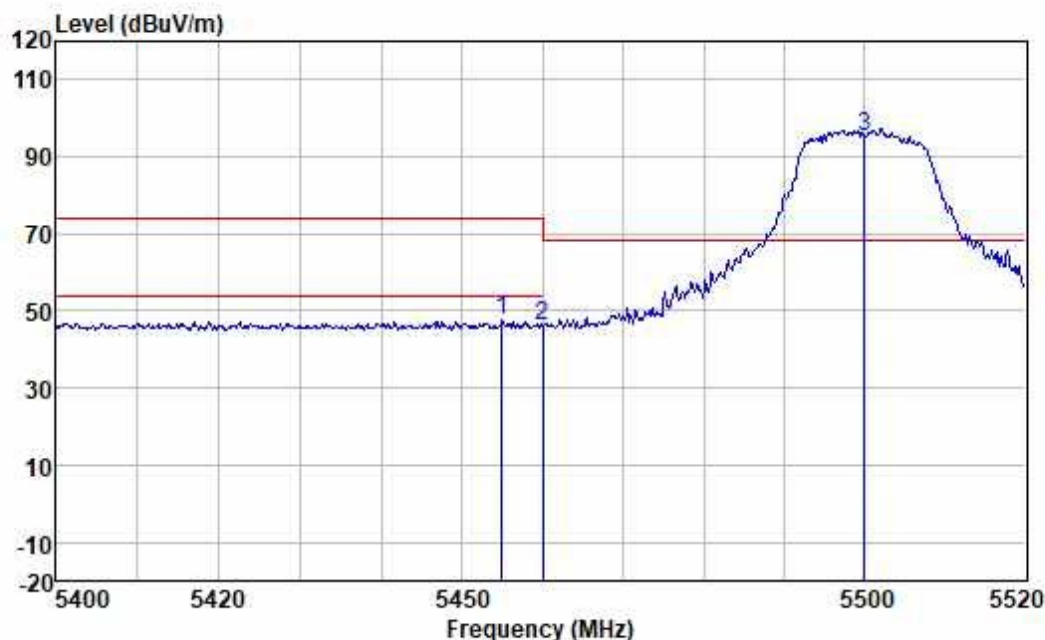

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5454.873	47.52	32.08	5.14	37.16	47.58	74.00	-26.42	HORIZONTAL peak
2	5460.000	46.21	32.08	5.14	37.16	46.27	68.20	-21.93	HORIZONTAL peak
3 *	5500.000	95.07	32.10	5.16	37.16	95.17	68.20	26.97	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

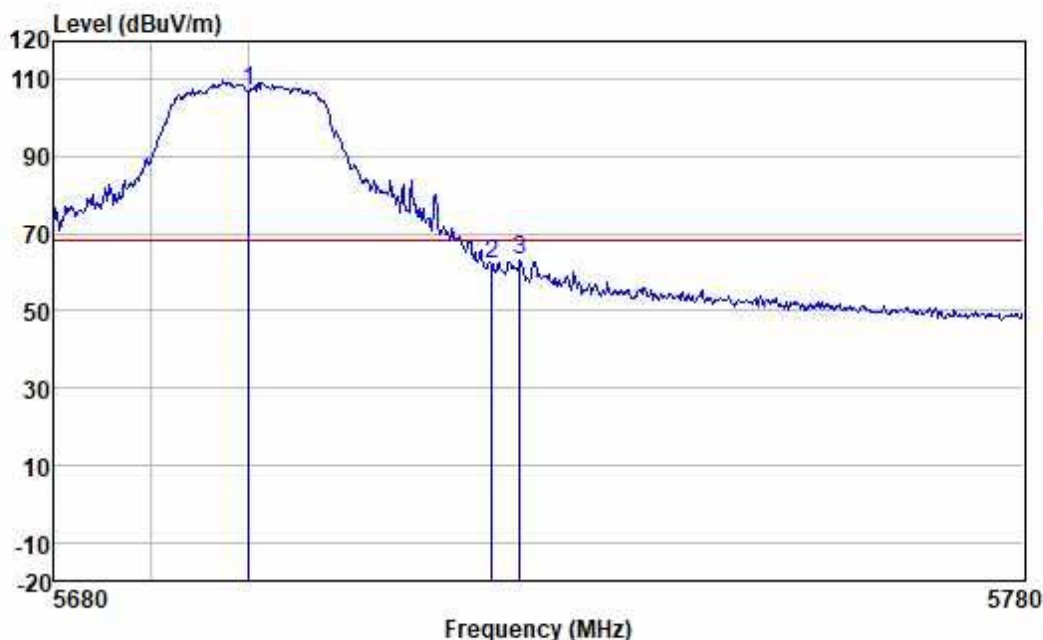

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5700.000	106.43	32.36	5.26	37.13	106.92	68.20	38.72	VERTICAL peak
2	5725.000	61.63	32.42	5.29	37.13	62.21	68.20	-5.99	VERTICAL peak
3	5727.882	62.44	32.42	5.29	37.13	63.02	68.20	-5.18	VERTICAL peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

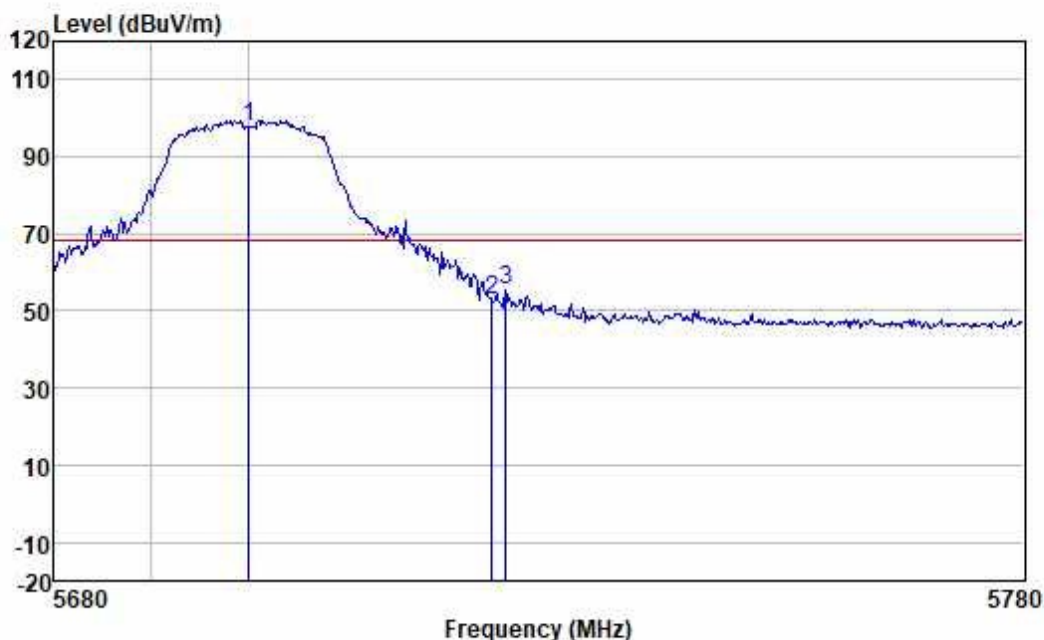

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5700.000	97.04	32.36	5.26	37.13	97.53	68.20	29.33	HORIZONTAL peak
2	5725.000	52.14	32.42	5.29	37.13	52.72	68.20	-15.48	HORIZONTAL peak
3	5726.483	54.69	32.42	5.29	37.13	55.27	68.20	-12.93	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

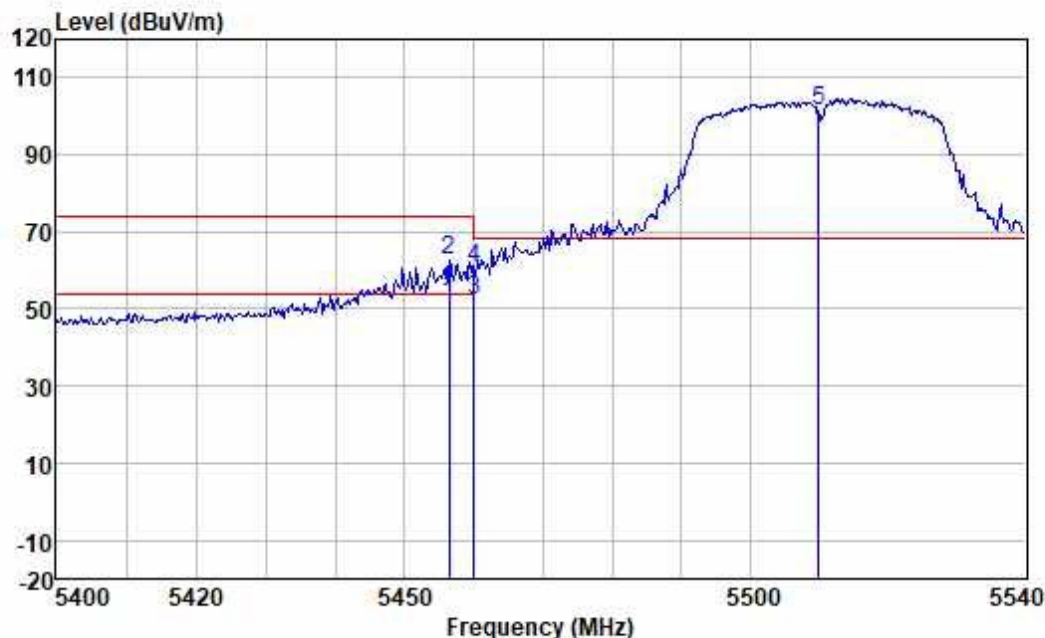

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5456.408	51.06	32.08	5.14	37.16	51.12	54.00	-2.88	VERTICAL	Average
2	5456.408	62.52	32.08	5.14	37.16	62.58	74.00	-11.42	VERTICAL	peak
3	5460.000	52.18	32.08	5.14	37.16	52.24	54.00	-1.76	VERTICAL	Average
4	5460.000	60.62	32.08	5.14	37.16	60.68	68.20	-7.52	VERTICAL	peak
5 *	5510.000	101.16	32.10	5.16	37.16	101.26	68.20	33.06	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

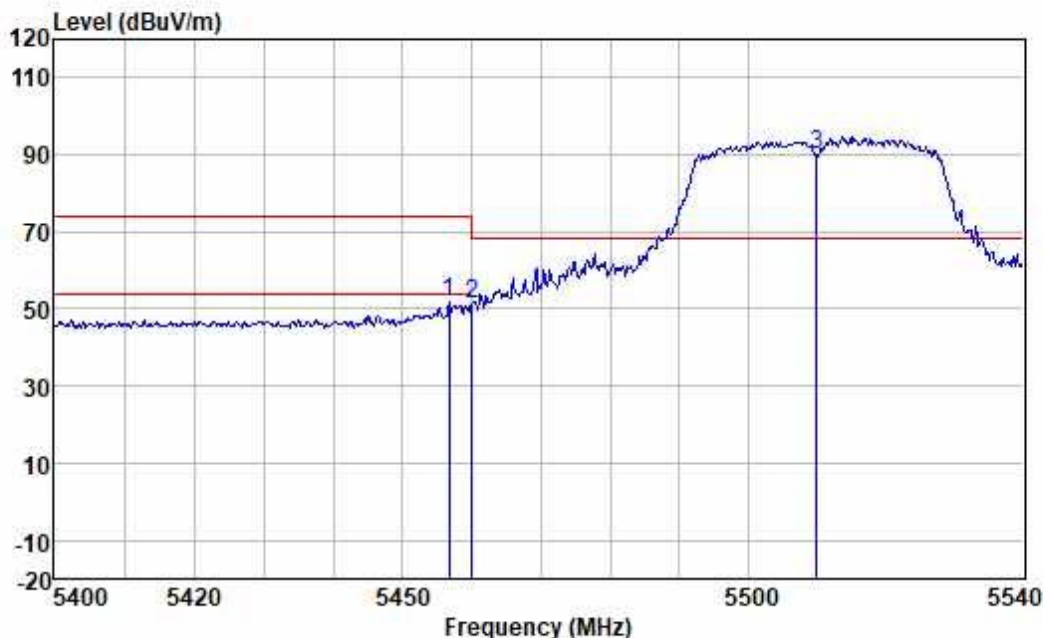

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	5456.688	51.89	32.08	5.14	37.16	51.95	74.00	-22.05	HORIZONTAL peak
2	5460.000	51.13	32.08	5.14	37.16	51.19	68.20	-17.01	HORIZONTAL peak
3 *	5510.000	90.17	32.10	5.16	37.16	90.27	68.20	22.07	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

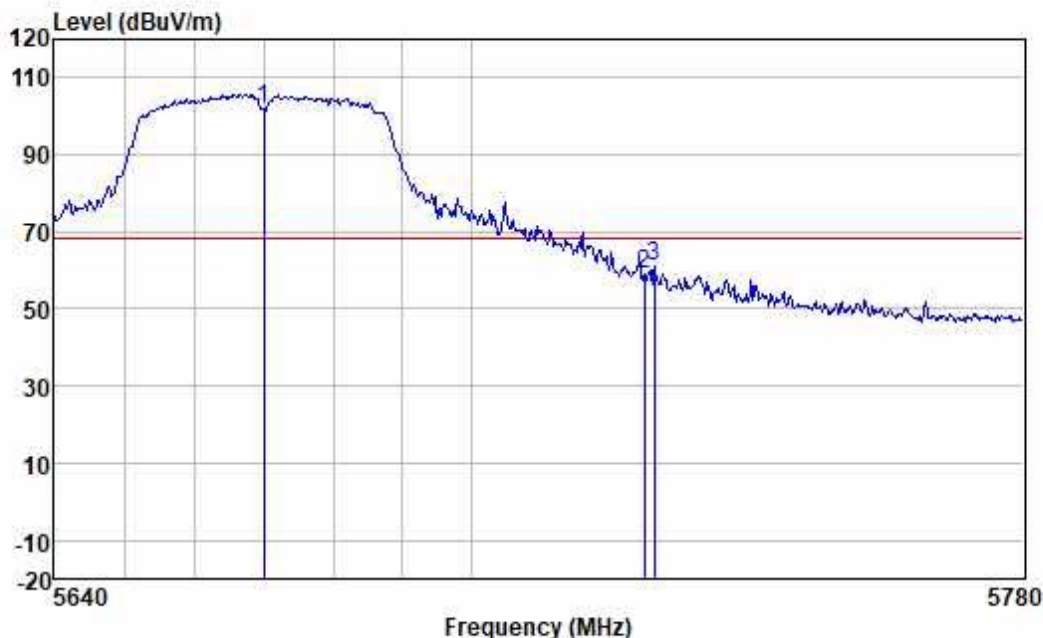

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 *	5670.000	101.45	32.30	5.24	37.13	101.86	68.20	33.66	VERTICAL	peak
2	5725.000	58.52	32.42	5.29	37.13	59.10	68.20	-9.10	VERTICAL	peak
3	5726.395	60.73	32.42	5.29	37.13	61.31	68.20	-6.89	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

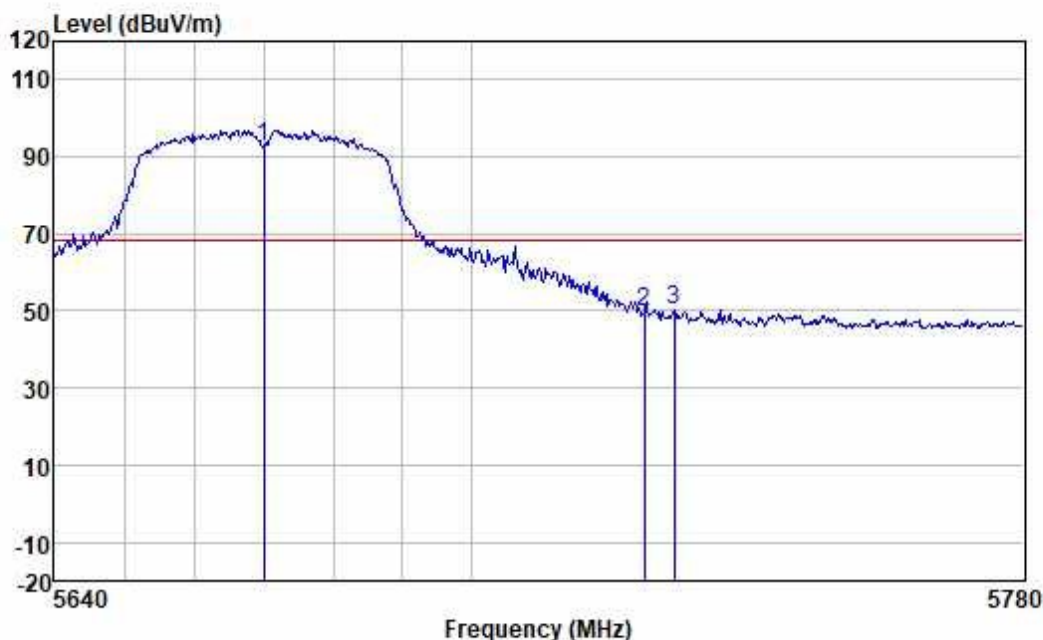

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5670.000	91.99	32.30	5.24	37.13	92.40	68.20	24.20	HORIZONTAL peak
2	5725.000	48.92	32.42	5.29	37.13	49.50	68.20	-18.70	HORIZONTAL peak
3	5729.204	49.49	32.42	5.29	37.13	50.07	68.20	-18.13	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

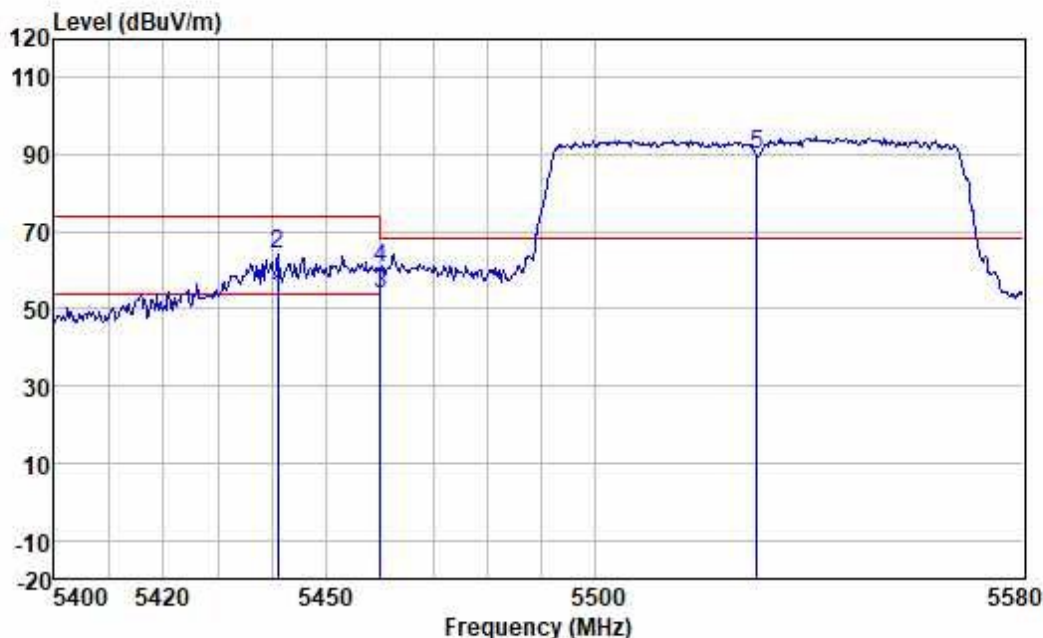

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	5441.057	52.77	32.07	5.14	37.17	52.81	54.00	-1.19	VERTICAL	Average
2	5441.057	63.98	32.07	5.14	37.17	64.02	74.00	-9.98	VERTICAL	peak
3	5460.000	53.91	32.08	5.14	37.16	53.97	54.00	-0.03	VERTICAL	Average
4	5460.000	60.72	32.08	5.14	37.16	60.78	68.20	-7.42	VERTICAL	peak
5 *	5530.000	89.85	32.13	5.17	37.15	90.00	68.20	21.80	VERTICAL	peak




Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

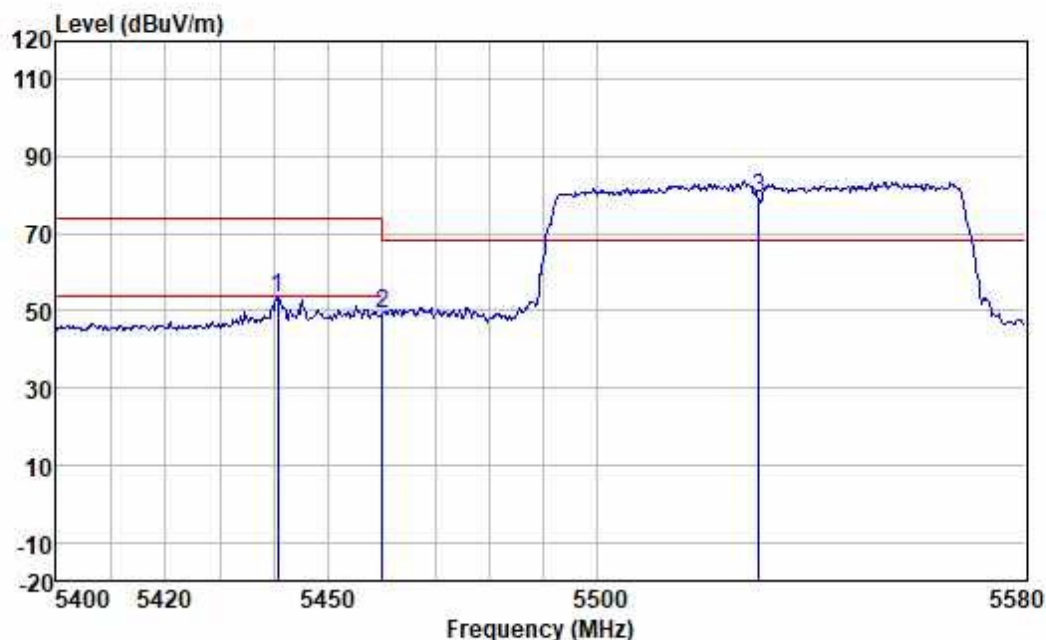

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	5440.701	53.25	32.07	5.14	37.17	53.29	74.00	-20.71	HORIZONTAL peak
2	5460.000	49.32	32.08	5.14	37.16	49.38	68.20	-18.82	HORIZONTAL peak
3 *	5530.000	79.14	32.13	5.17	37.15	79.29	68.20	11.09	HORIZONTAL peak




Test Mode: 07; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

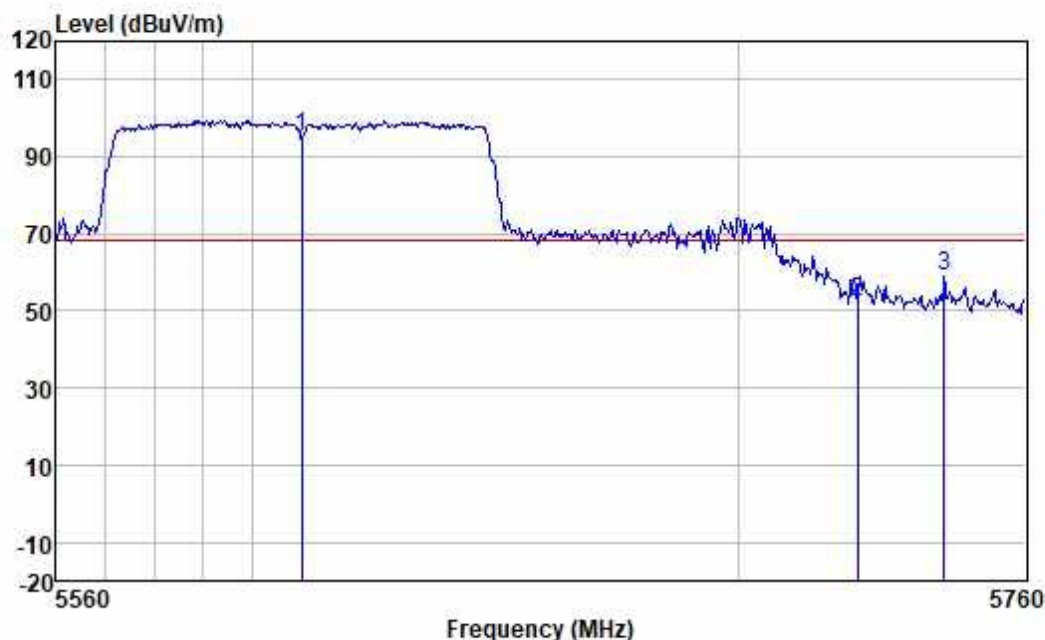

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5610.000	95.14	32.23	5.21	37.14	95.44	68.20	27.24	VERTICAL peak
2	5725.000	51.62	32.42	5.29	37.13	52.20	68.20	-16.00	VERTICAL peak
3	5743.130	58.63	32.46	5.30	37.13	59.26	68.20	-8.94	VERTICAL peak



Test Mode: 07; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

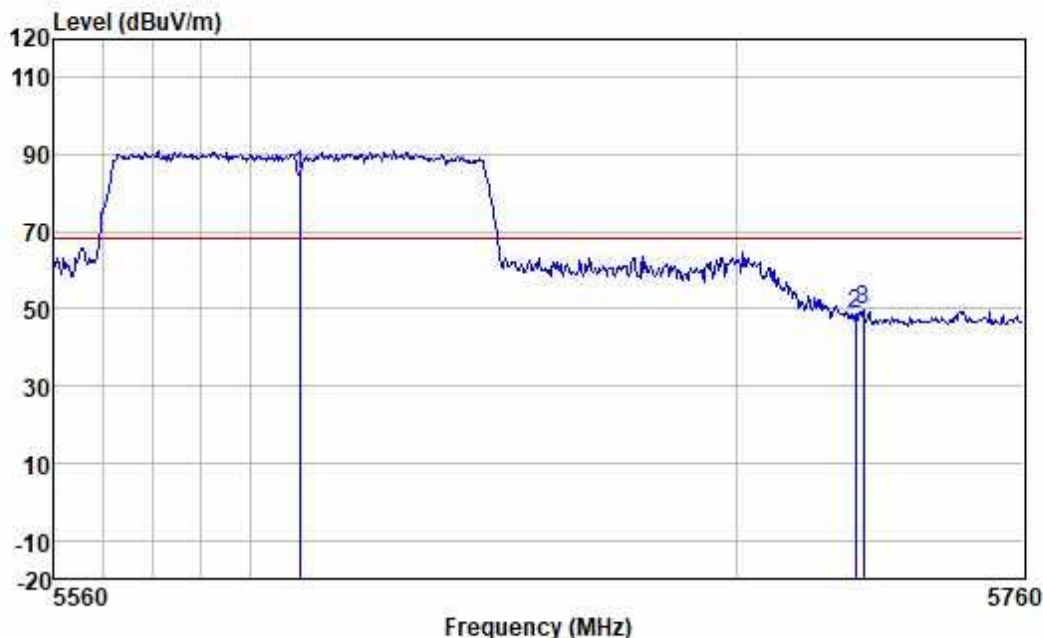

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	5610.000	84.82	32.23	5.21	37.14	85.12	68.20	16.92	HORIZONTAL peak
2	5725.000	47.96	32.42	5.29	37.13	48.54	68.20	-19.66	HORIZONTAL peak
3	5726.713	49.01	32.42	5.29	37.13	49.59	68.20	-18.61	HORIZONTAL peak



7.5 Duty Cycle

Test Requirement ANSI C63.10 (2020) Section 12.2

Test Method: ANSI C63.10 (2020) Section 12.2

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.



7.5.3 Test Setup Diagram

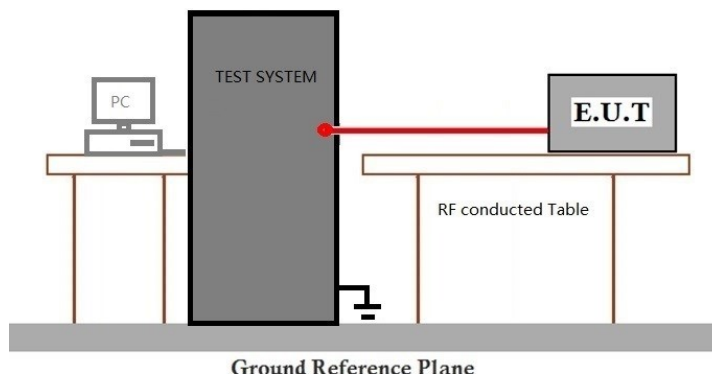

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.6 99% Bandwidth

Test Requirement ANSI C63.10 (2020) Section 12.4.2

Test Method: ANSI C63.10 (2020) Section 12.5.3

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.



7.6.3 Test Setup Diagram

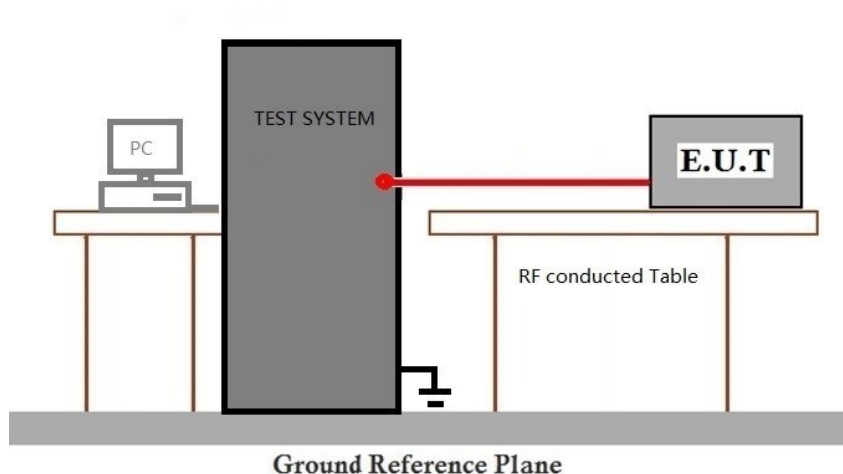

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C


Humidity: 55.7 % RH

Atmospheric Pressure: 1015 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

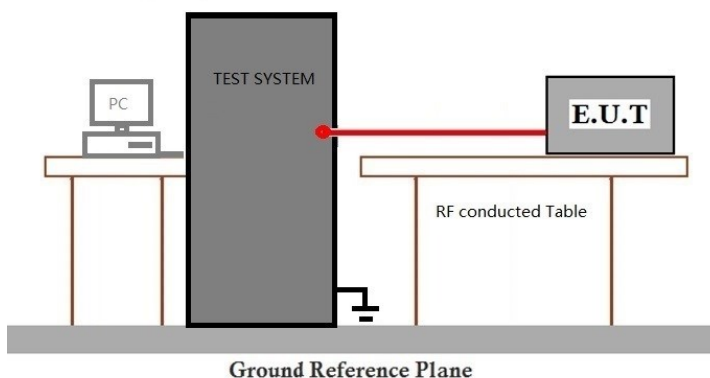

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 55.7 % RH

Atmospheric Pressure: 1015 mbar


7.8.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test 08

TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

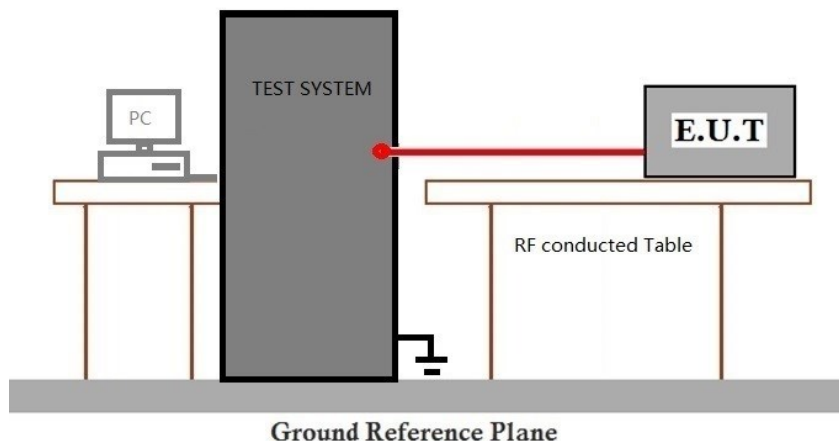

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark: * Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.	

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 55.7 % RH


Atmospheric Pressure: 1015 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.



7.9.3 Test Setup Diagram

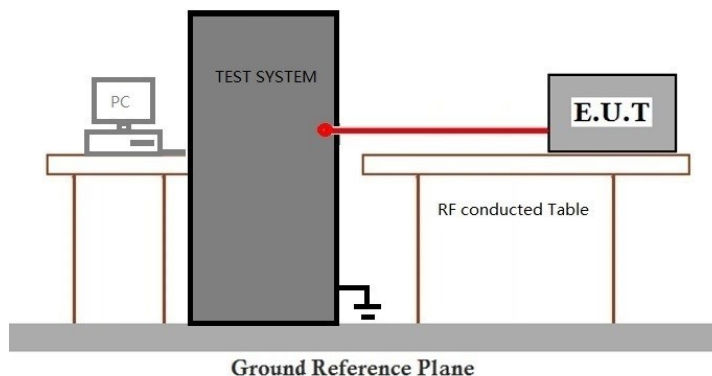

7.9.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details

7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 55.7 % RH


Atmospheric Pressure: 1015 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.



7.10.3 Test Setup Diagram

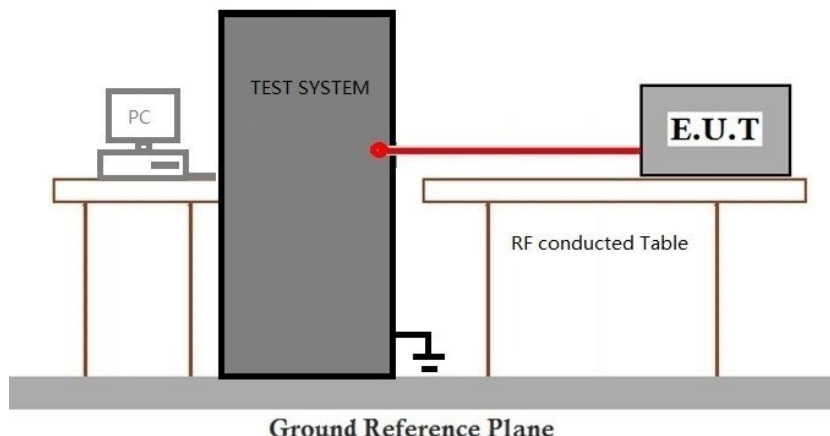

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details

7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2020) Section 6.8

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 55.7 % RH


Atmospheric Pressure: 1015 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac 20/40/80, Only the data of worst case is recorded in the report.



7.11.3 Test Setup Diagram

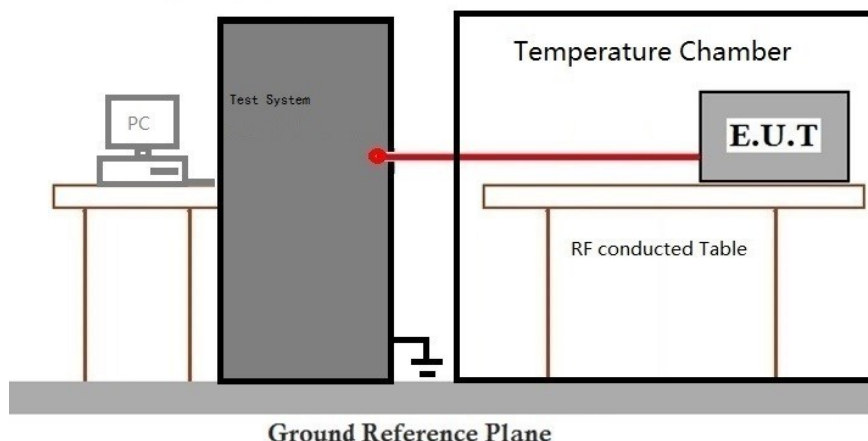

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR251000157705



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC-TRF-01) EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2510001577AT



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	1.397	1.558	89.67	0.47	2.70
		5200	1.397	1.540	90.71	0.42	1.40
		5240	1.396	1.572	88.80	0.52	3.74
		5260	1.398	1.572	88.93	0.51	3.50
		5300	1.396	1.556	89.72	0.47	2.14
		5320	1.397	1.590	87.86	0.56	4.17
		5500	1.397	1.593	87.70	0.57	4.61
		5580	1.396	1.582	88.24	0.54	4.28
		5700	1.399	1.573	88.94	0.51	3.61
		5745	1.397	1.989	70.24	1.53	22.32
		5785	1.397	1.566	89.21	0.50	2.30
		5825	1.396	1.563	89.32	0.49	2.28
802.11n (HT20)	SISO	5180	5.089	5.292	96.16	0.17	0.51
		5200	5.089	5.292	96.16	0.17	0.51
		5240	5.088	5.292	96.15	0.17	0.51
		5260	5.089	5.292	96.16	0.17	0.51
		5300	5.088	5.292	96.15	0.17	0.55
		5320	5.090	5.301	96.02	0.18	0.65
		5500	5.091	5.292	96.20	0.17	0.48
		5580	5.089	5.292	96.16	0.17	0.51
		5700	5.091	5.311	95.86	0.18	0.64
		5745	5.113	5.814	87.94	0.56	9.34
		5785	5.088	5.309	95.84	0.18	0.82
		5825	5.112	5.316	96.16	0.17	0.99



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Ant1							
Mode	Tx Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11n (HT40)	SISO	5190	2.469	2.672	92.40	0.34	0.72
		5230	2.469	2.672	92.40	0.34	0.72
		5270	2.467	2.671	92.36	0.35	0.69
		5310	2.470	2.672	92.44	0.34	0.03
		5510	2.470	2.672	92.44	0.34	0.03
		5550	2.470	2.672	92.44	0.34	0.03
		5670	2.469	2.672	92.40	0.34	0.32
		5755	2.470	2.856	86.48	0.63	6.90
		5795	2.469	2.672	92.40	0.34	1.05
802.11ac (VHT20)	SISO	5180	5.096	5.280	96.52	0.15	0.34
		5200	5.098	5.290	96.37	0.16	0.48
		5240	5.096	5.290	96.33	0.16	0.48
		5260	5.096	5.290	96.33	0.16	0.48
		5300	5.096	5.290	96.33	0.16	0.51
		5320	5.096	5.292	96.30	0.16	0.51
		5500	5.096	5.290	96.33	0.16	0.51
		5580	5.096	5.290	96.33	0.16	0.48
		5700	5.098	5.292	96.33	0.16	0.51
		5745	5.096	5.714	89.18	0.50	7.67
		5785	5.098	5.605	90.95	0.41	5.94
		5825	5.096	5.292	96.30	0.16	0.51
802.11ac (VHT40)	SISO	5190	2.569	2.762	93.01	0.31	0.61
		5230	2.570	2.763	93.01	0.31	0.92
		5270	2.570	2.763	93.01	0.31	0.92
		5310	2.570	2.763	93.01	0.31	0.61
		5510	2.570	2.763	93.01	0.31	0.92
		5550	2.570	2.762	93.05	0.31	0.92
		5670	2.570	2.763	93.01	0.31	0.92
		5755	2.570	2.763	93.01	0.31	0.92
		5795	2.569	2.762	93.01	0.31	0.92
802.11ac (VHT80)	SISO	5210	1.166	1.366	85.36	0.69	1.15
		5290	1.166	1.366	85.36	0.69	1.70
		5530	1.165	1.365	85.35	0.69	1.82
		5610	1.164	1.366	85.21	0.69	1.16
		5775	1.164	2.458	47.36	3.25	39.05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

1.2 Test Graph

1.2.1 Ant1

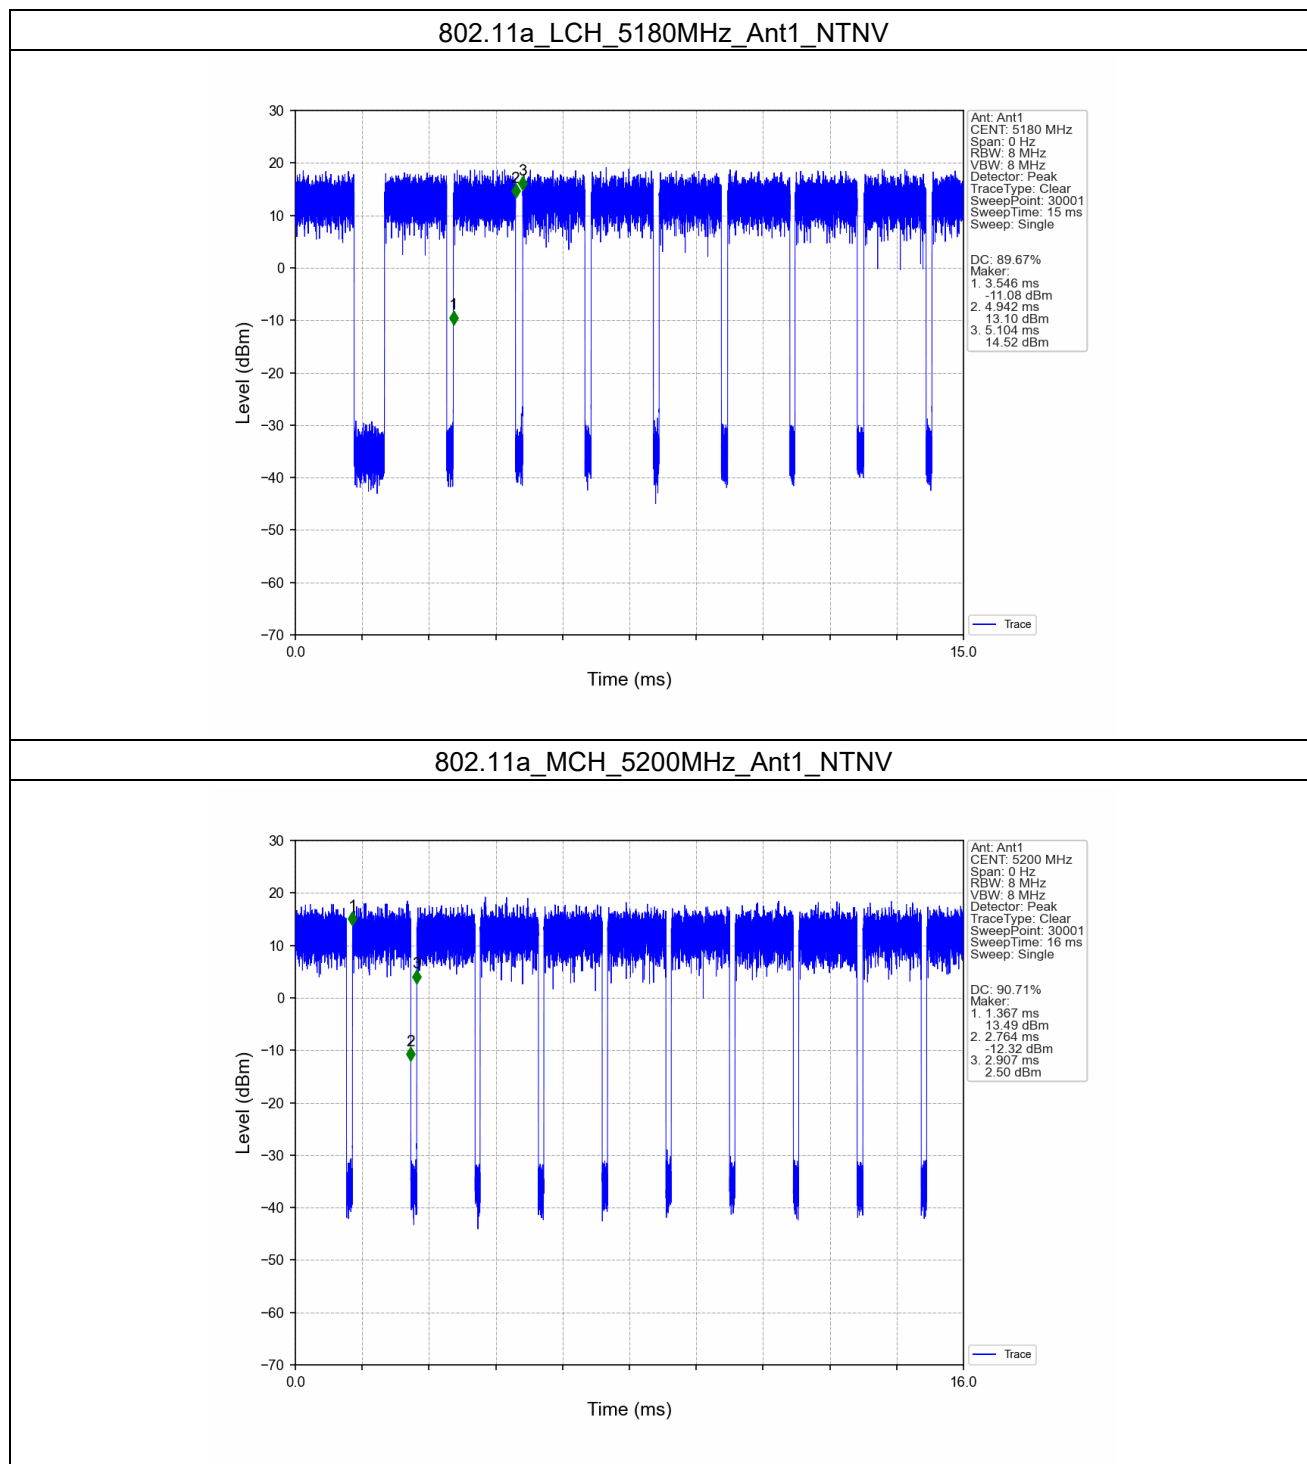

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (CMAA, CNAS, EEC Laboratory)


No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com


802.11a_HCH_5240MHz_Ant1_NTNV

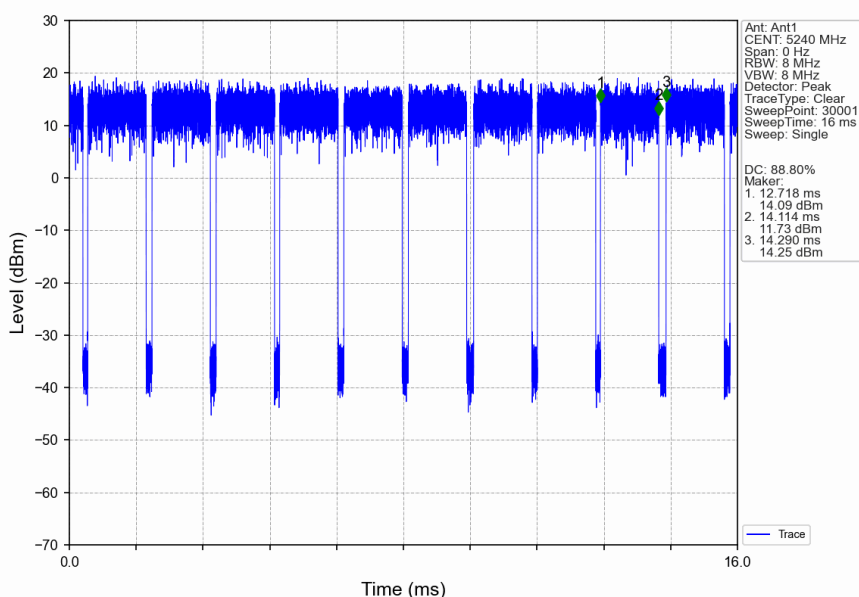


802.11a_LCH_5260MHz_Ant1_NTNV

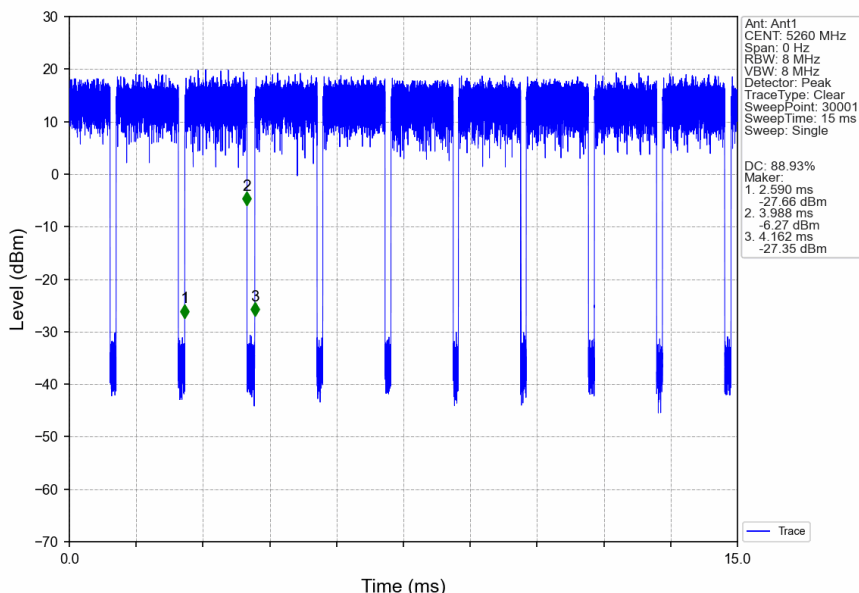


802.11a_MCH_5300MHz_Ant1_NTNV

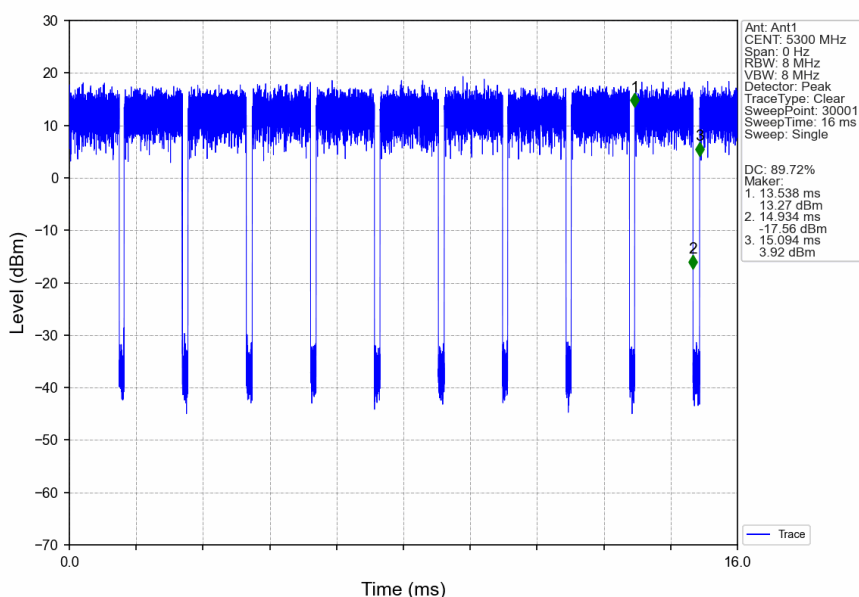


802.11a_HCH_5320MHz_Ant1_NTNV

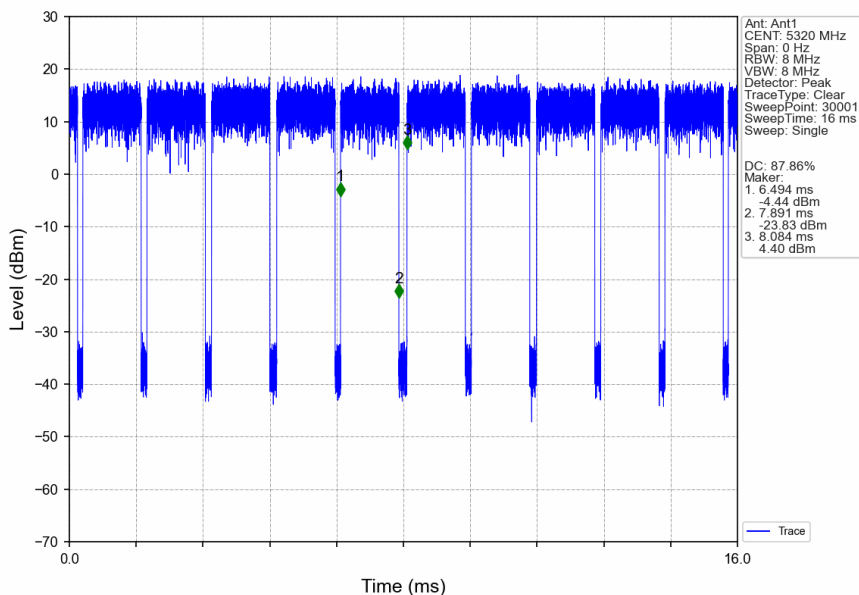


802.11a_LCH_5500MHz_Ant1_NTNV

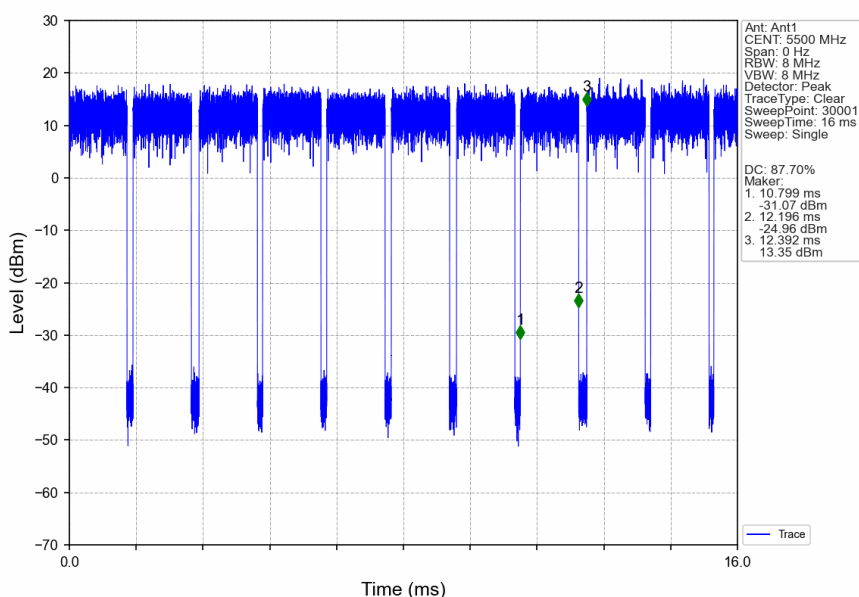


802.11a_MCH_5580MHz_Ant1_NTNV

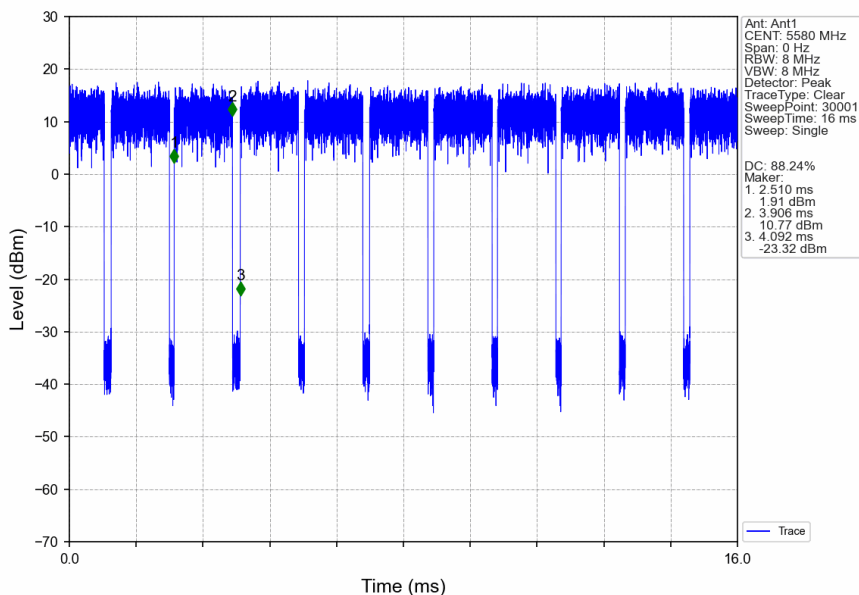


802.11a_HCH_5700MHz_Ant1_NTNV

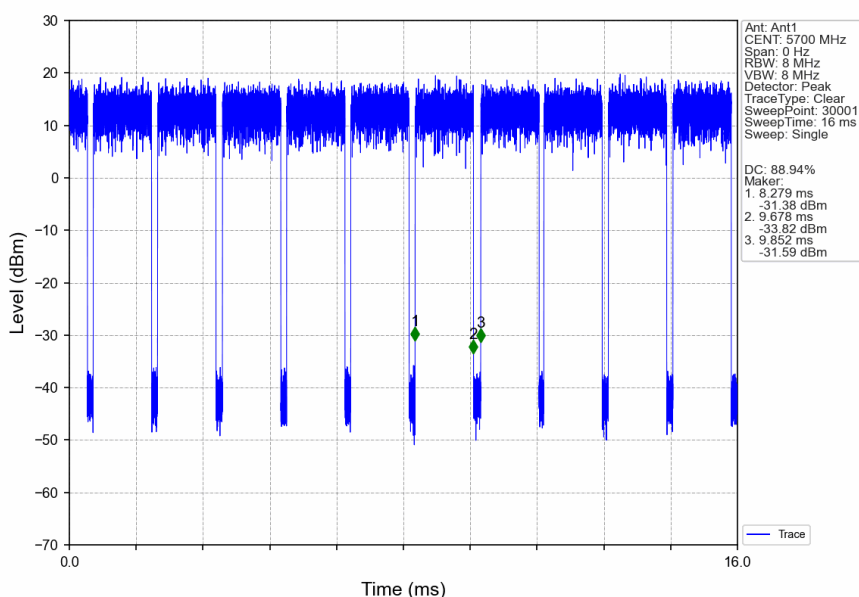


802.11a_LCH_5745MHz_Ant1_NTNV

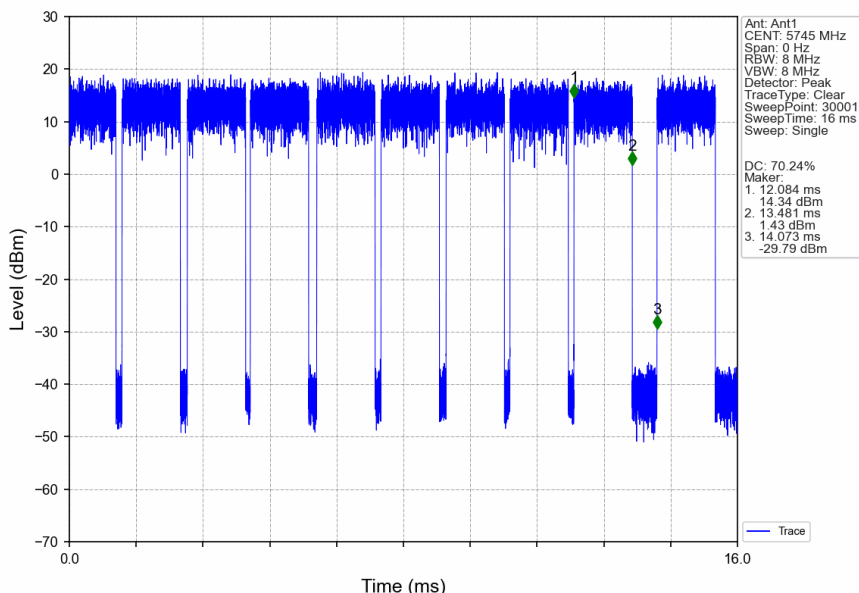


802.11a_MCH_5785MHz_Ant1_NTNV

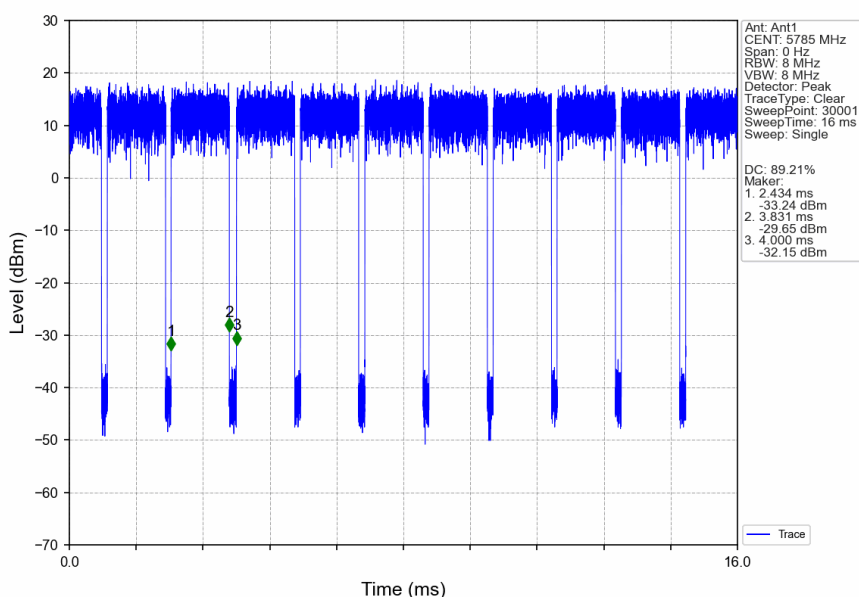


802.11a_HCH_5825MHz_Ant1_NTNV

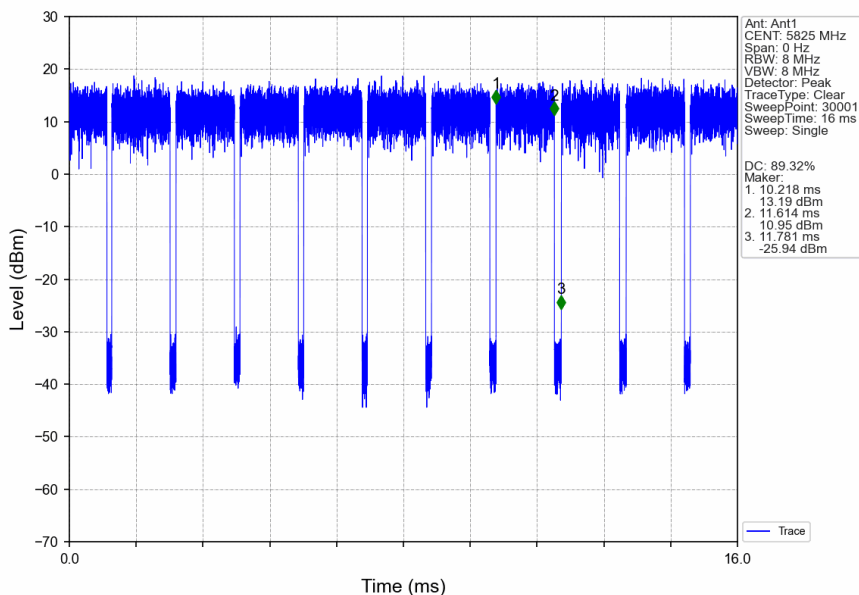


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

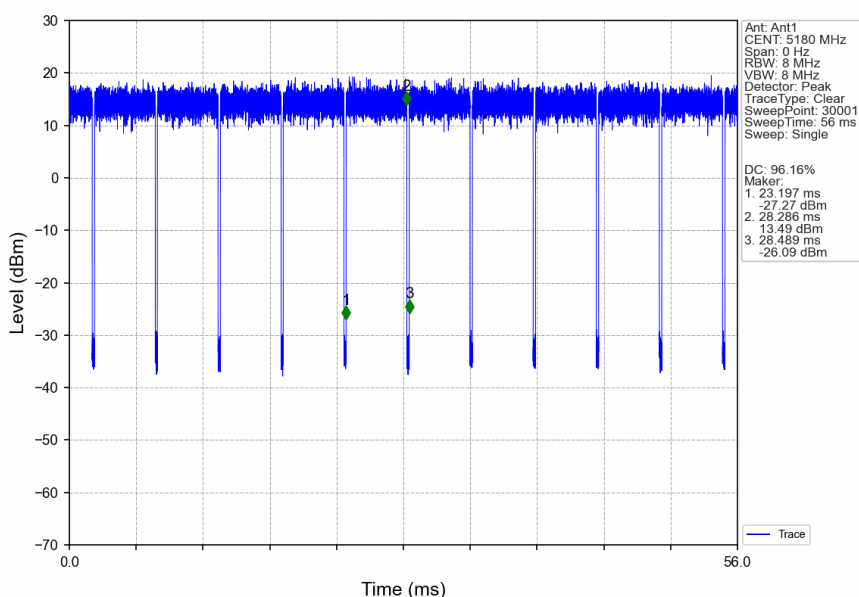


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

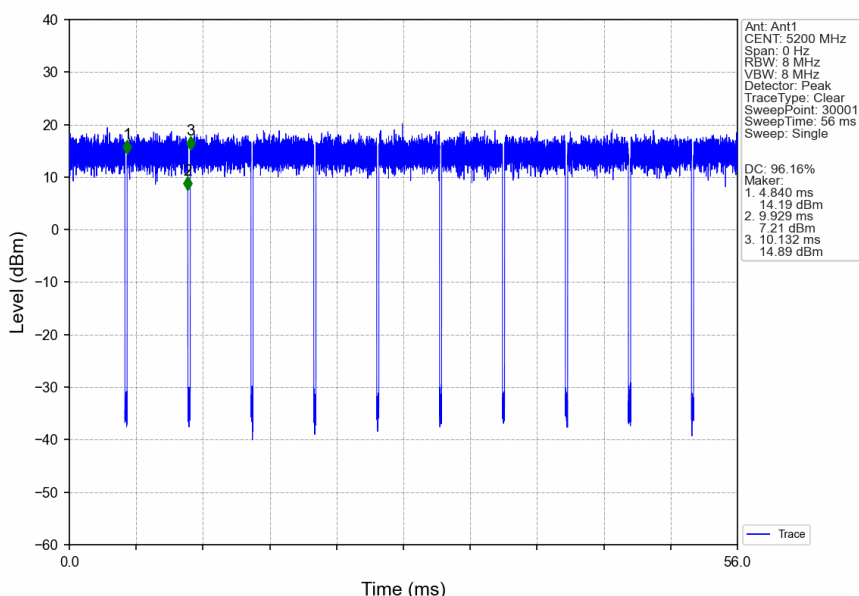


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

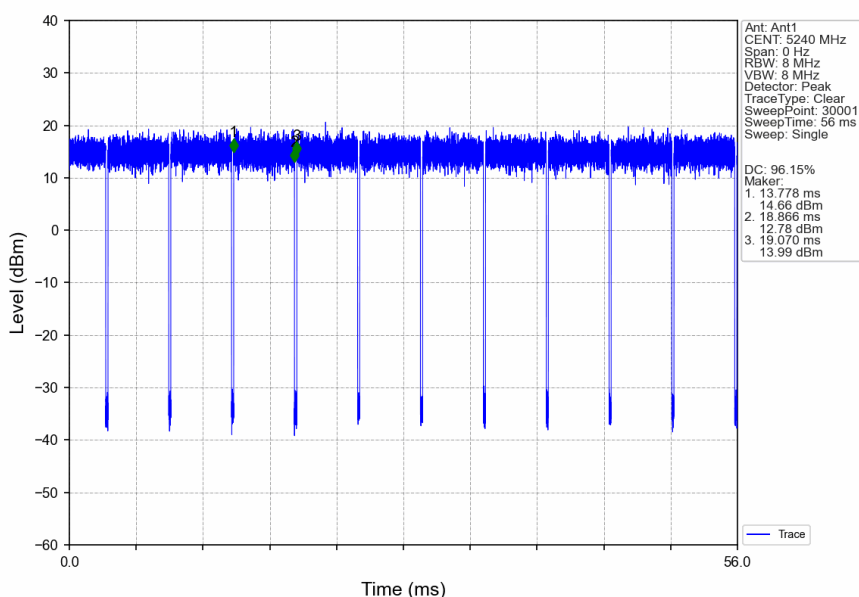


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

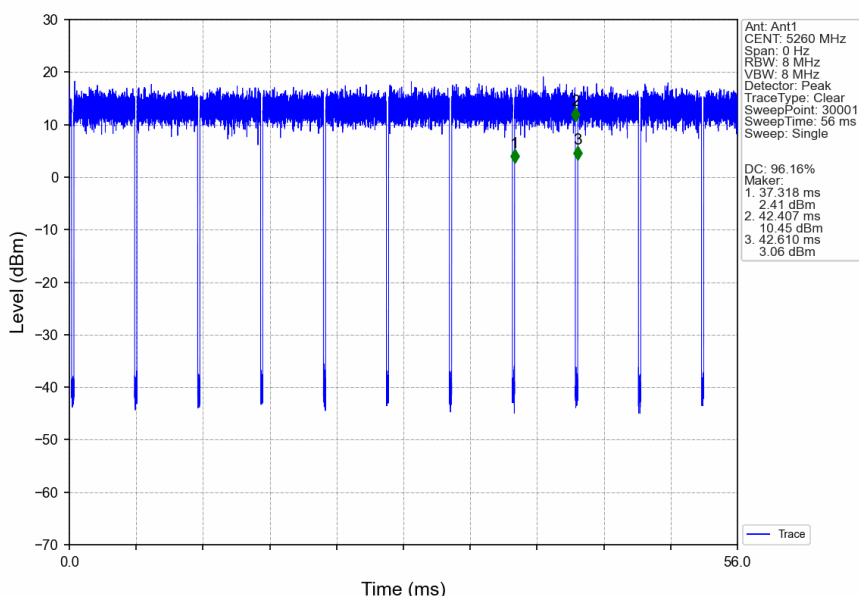


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

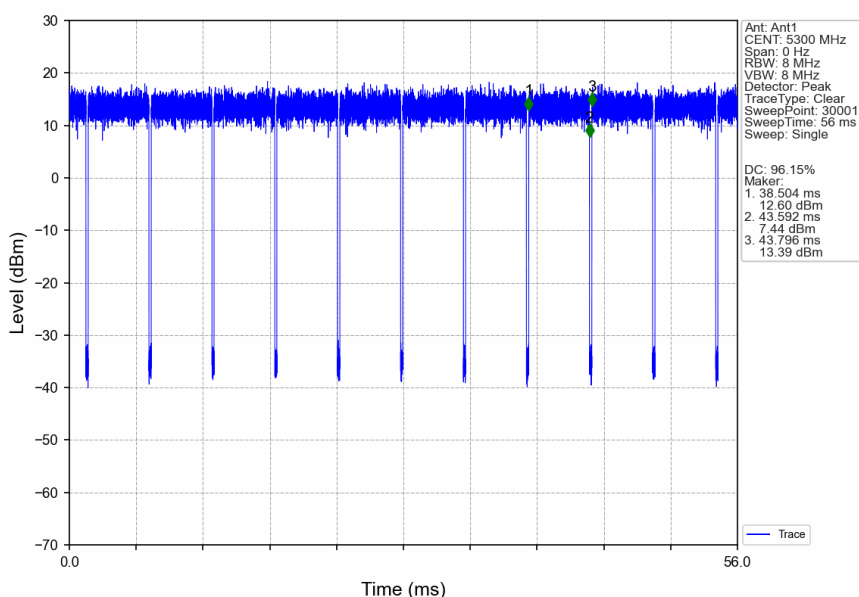


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

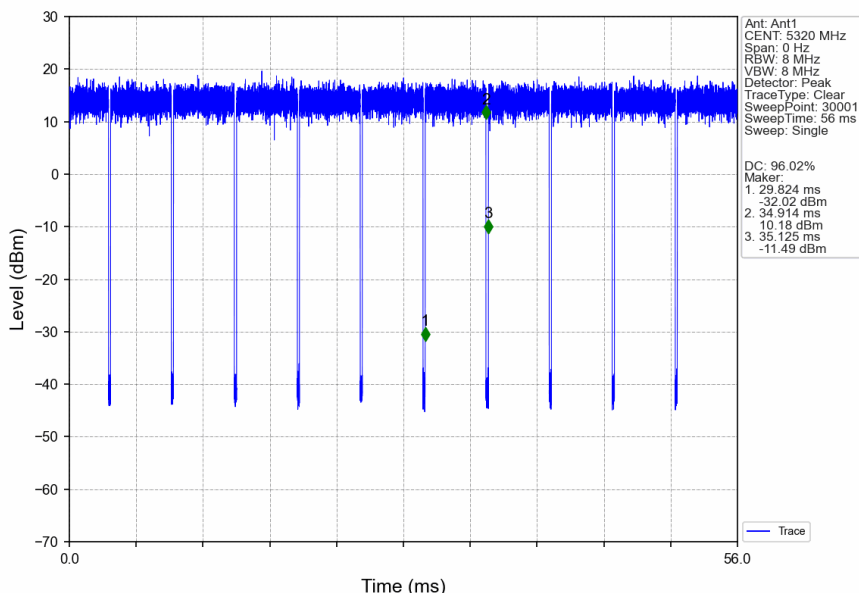


802.11n(HT20)_LCH_5500MHz_Ant1_NTNV

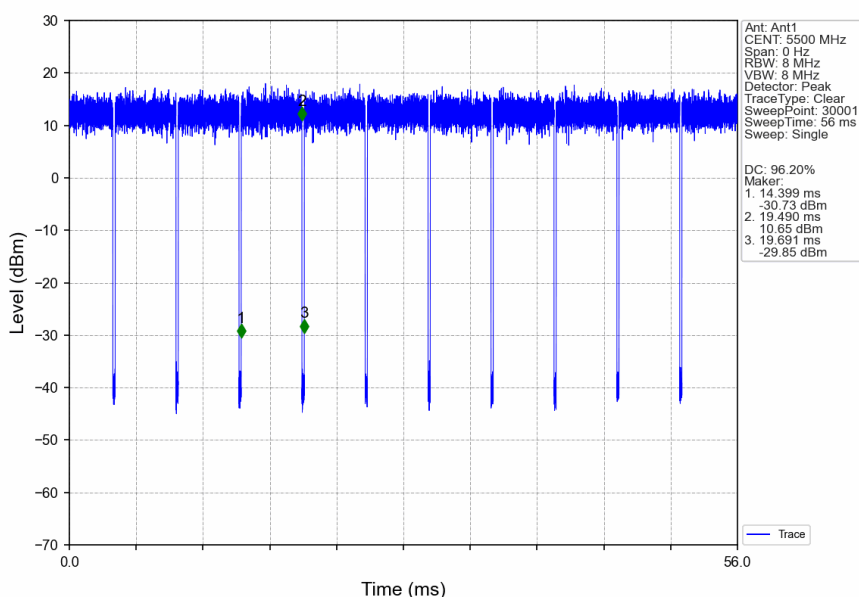


802.11n(HT20)_MCH_5580MHz_Ant1_NTNV

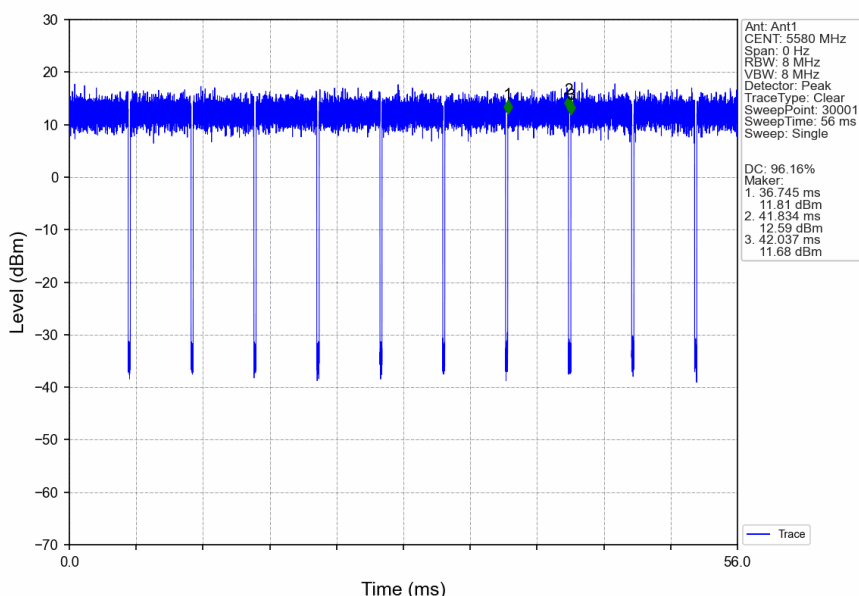


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

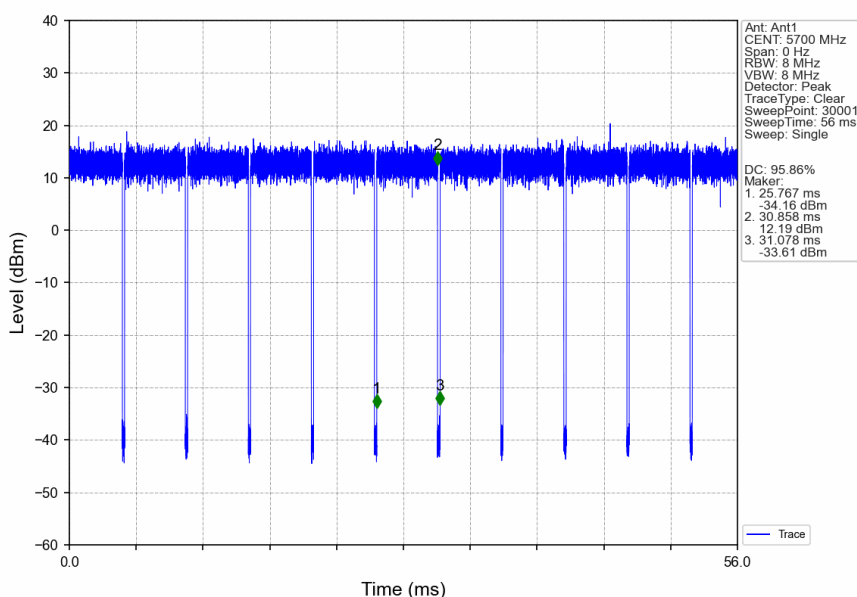


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

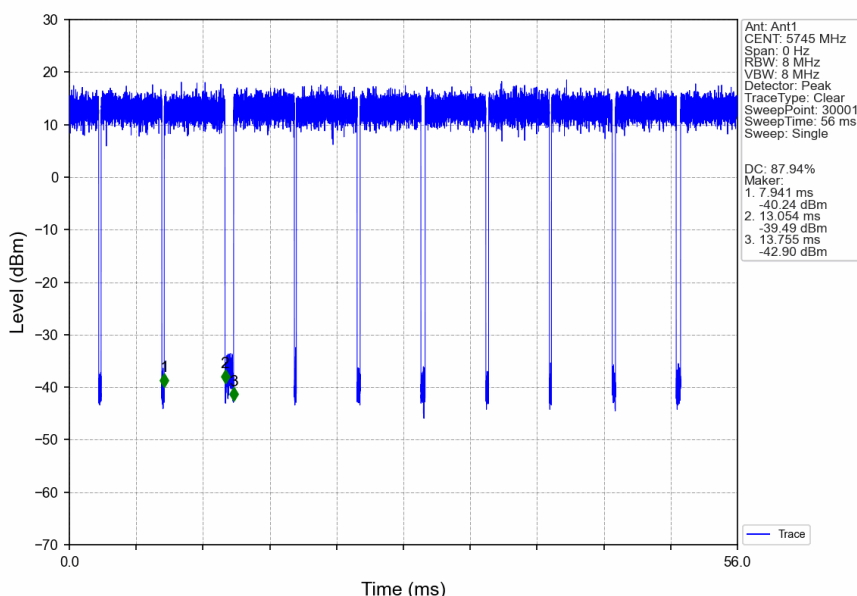


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

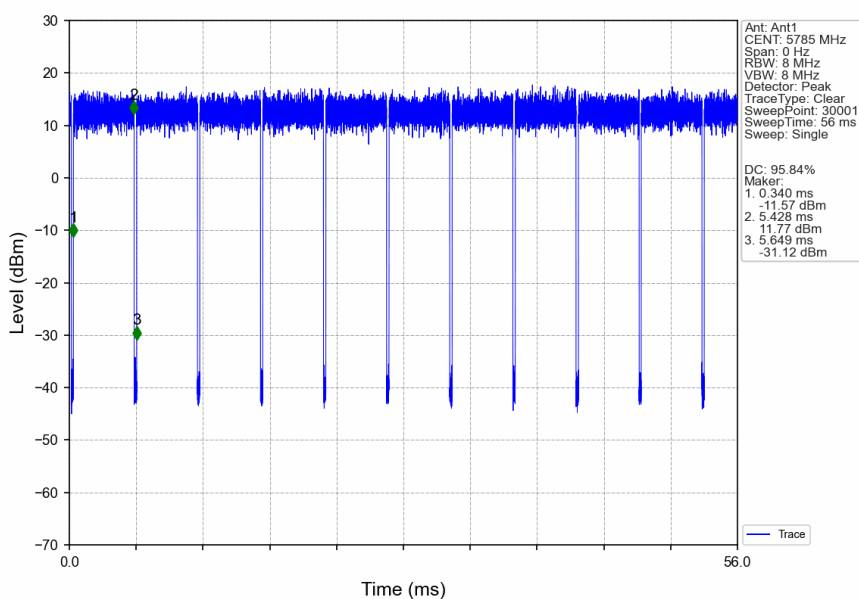


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

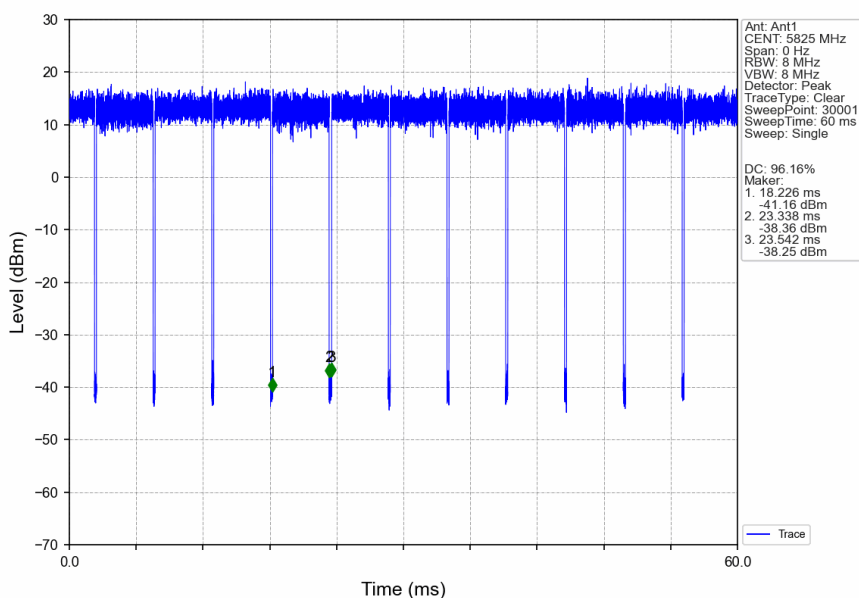


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

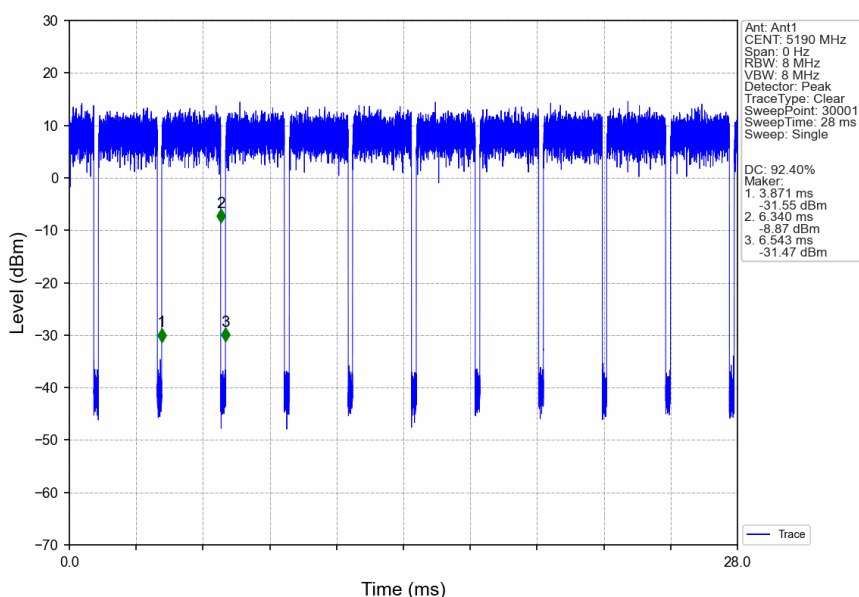


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

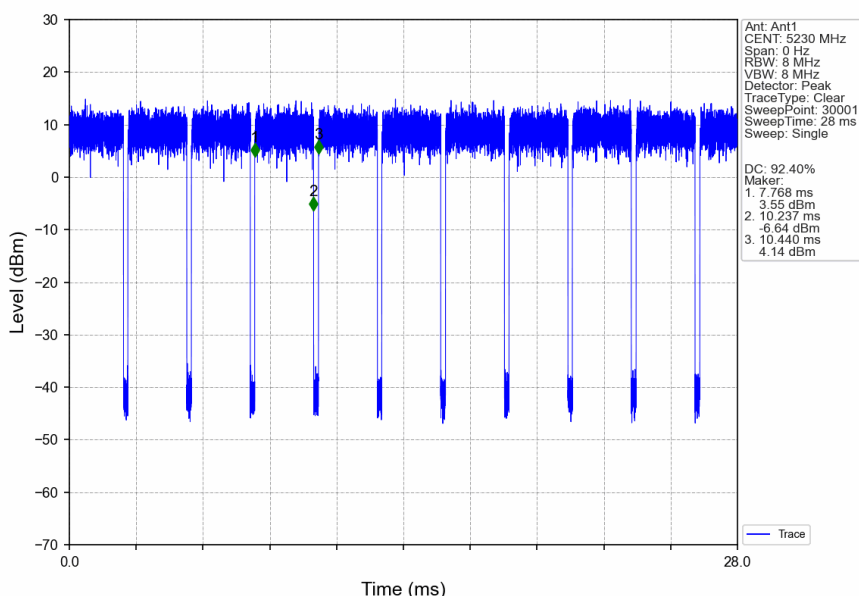


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

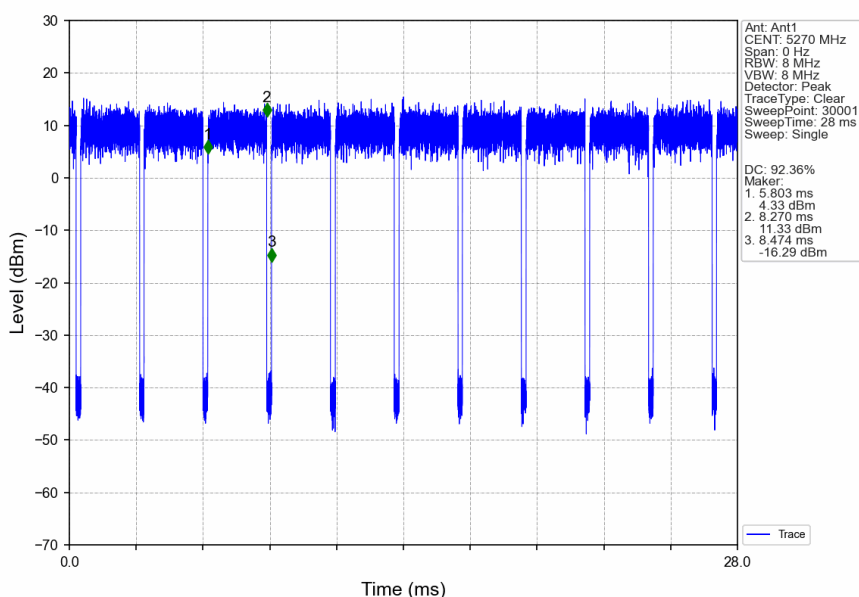


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

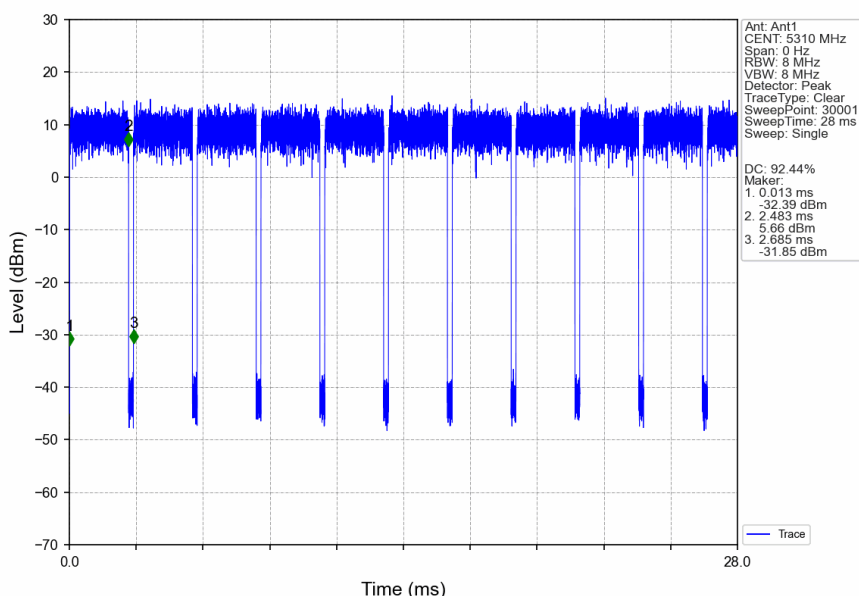


802.11n(HT40)_LCH_5510MHz_Ant1_NTNV

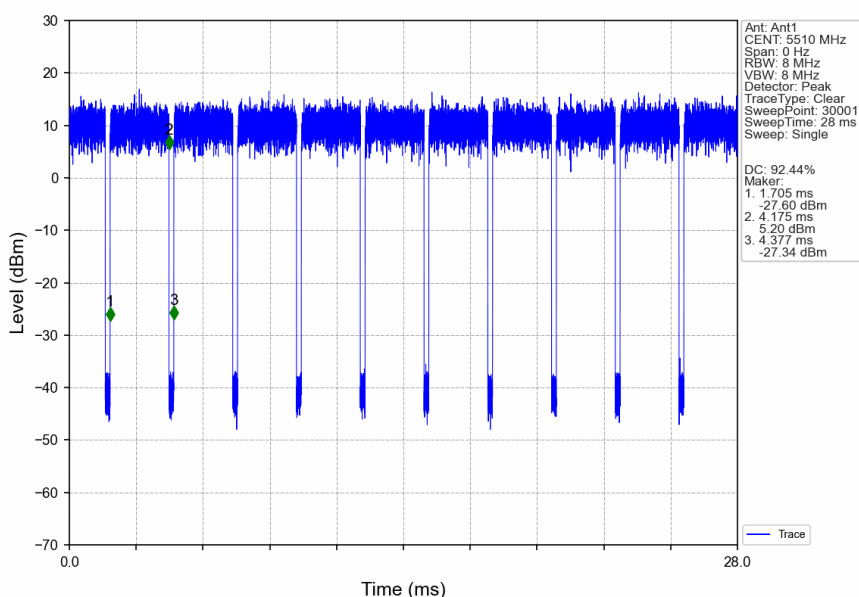


802.11n(HT40)_MCH_5550MHz_Ant1_NTNV

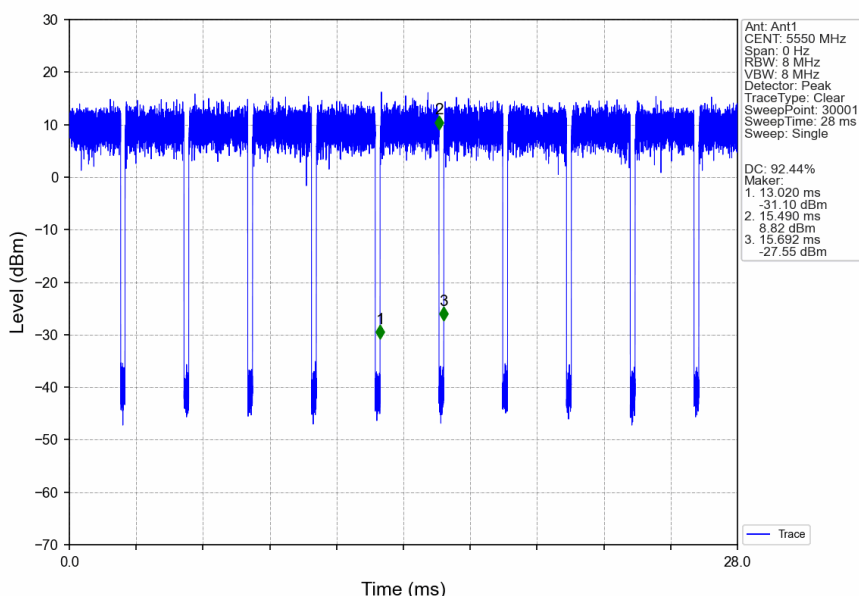


802.11n(HT40)_HCH_5670MHz_Ant1_NTNV

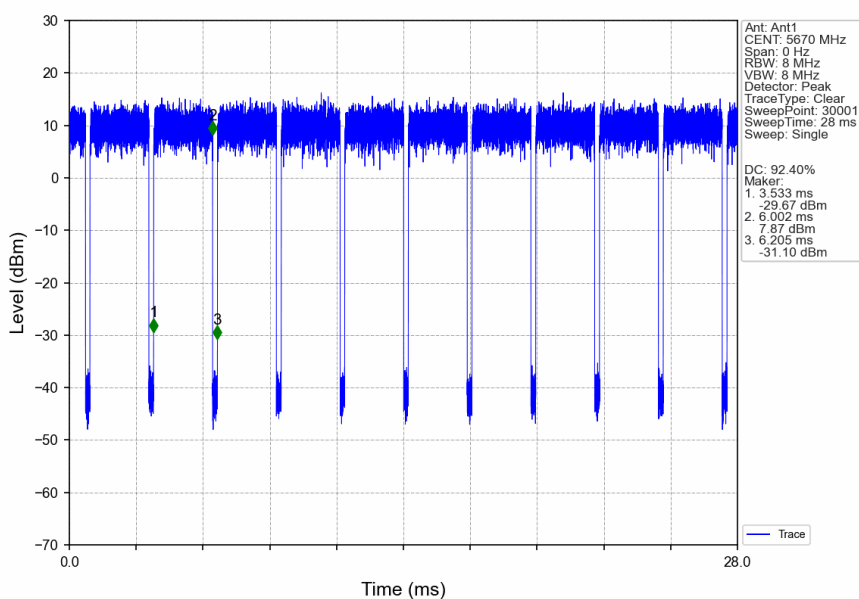


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

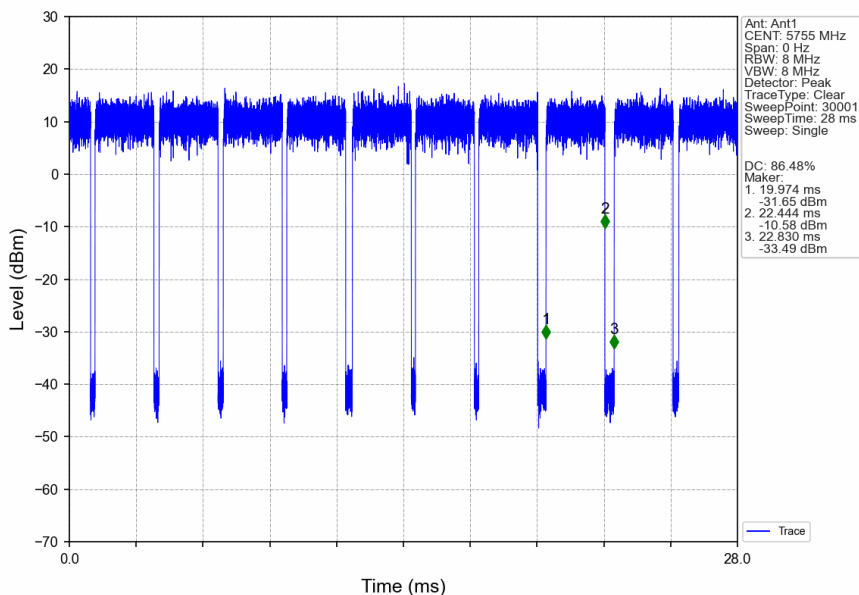


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

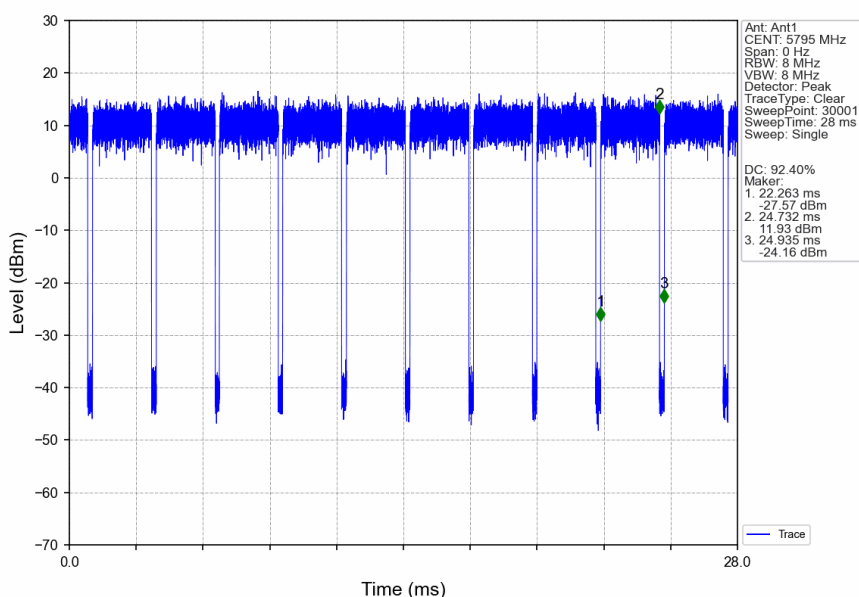


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

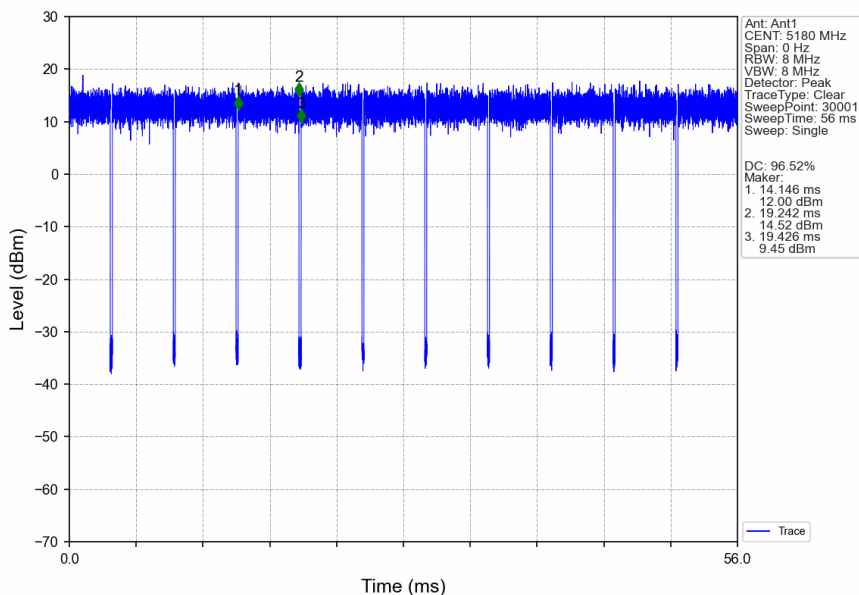


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

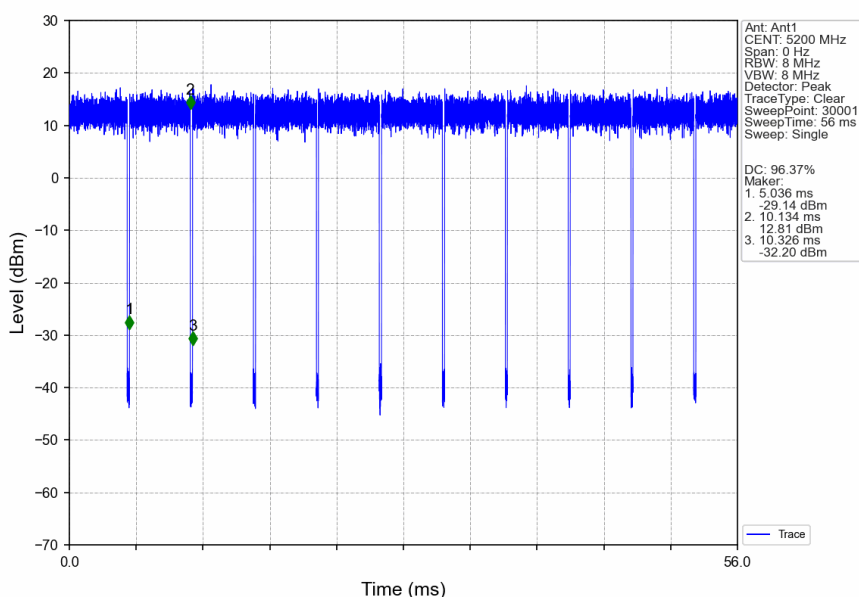


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

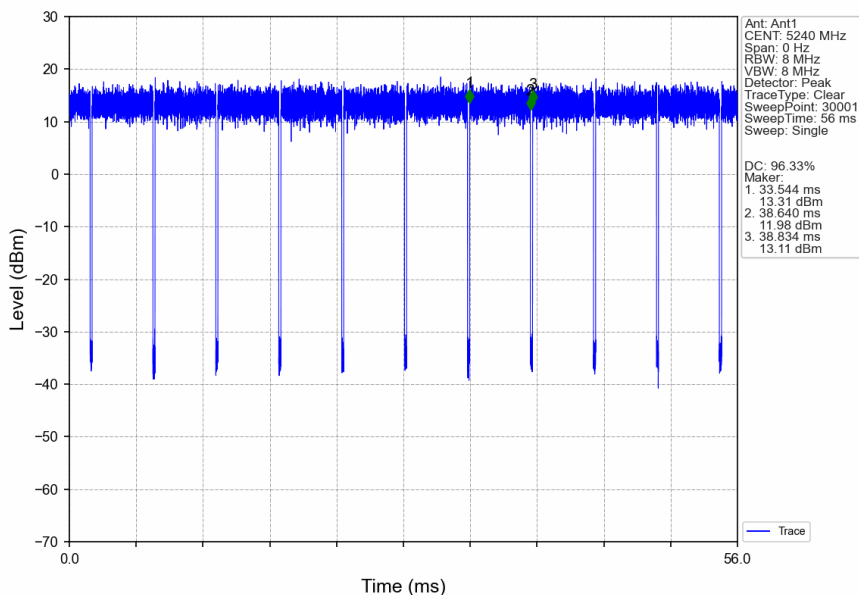


802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

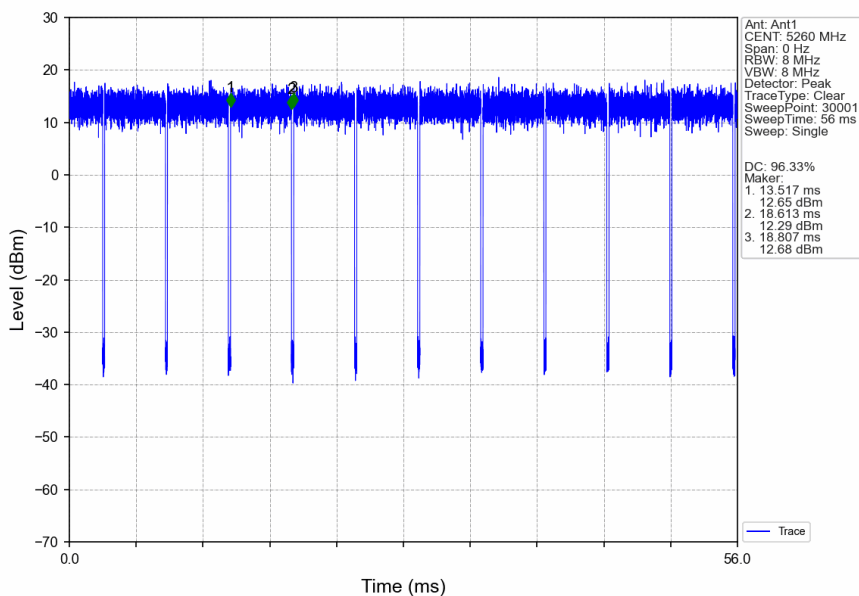


802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

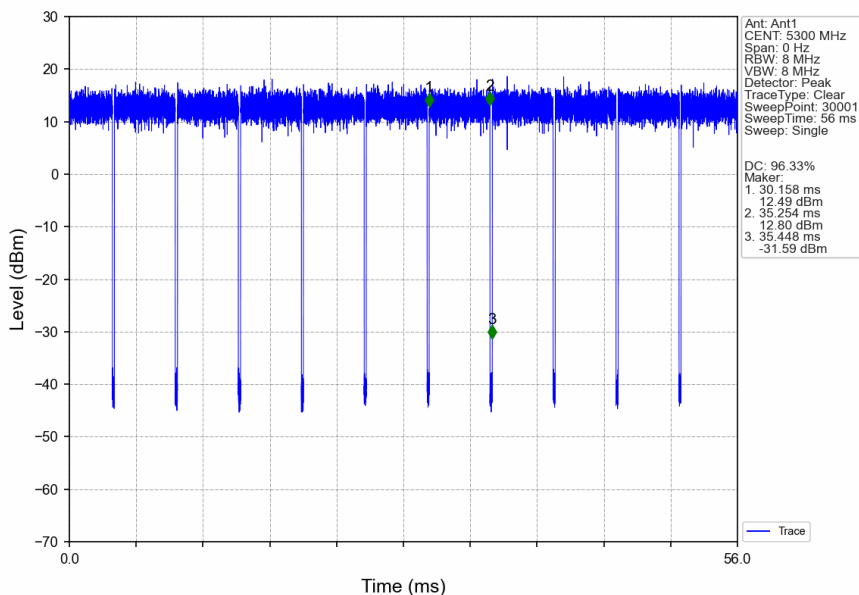


802.11ac(VHT20)_HCH_5320MHz_Ant1_NTNV

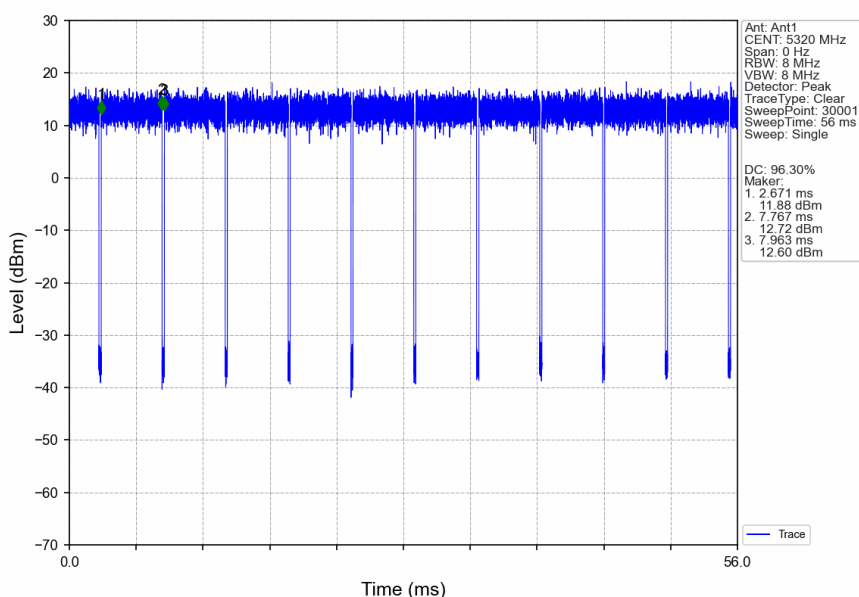


802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

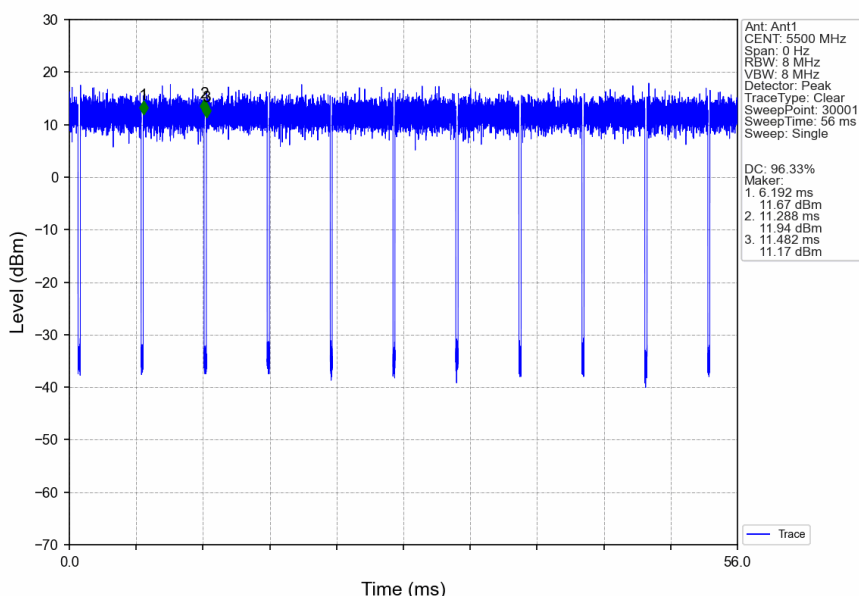


802.11ac(VHT20)_MCH_5580MHz_Ant1_NTNV

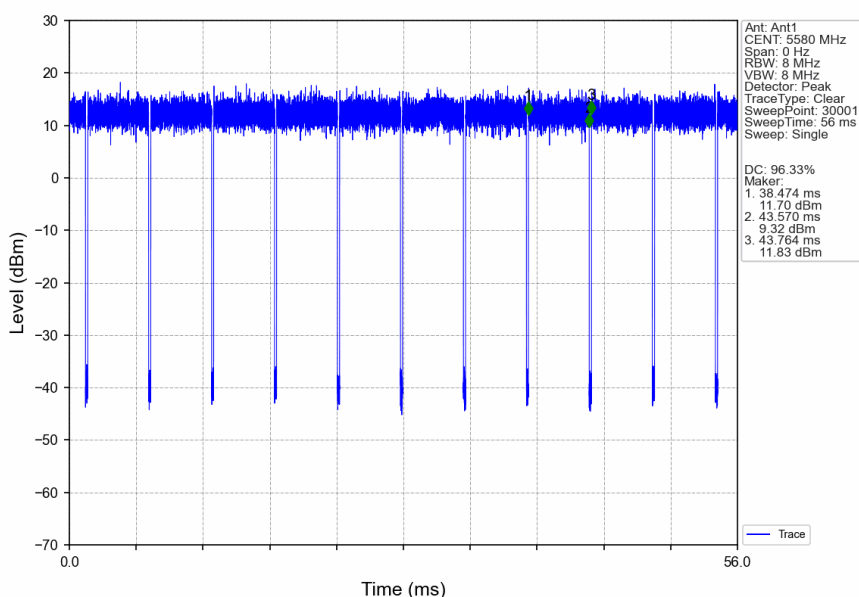


802.11ac(VHT20)_HCH_5700MHz_Ant1_NTNV

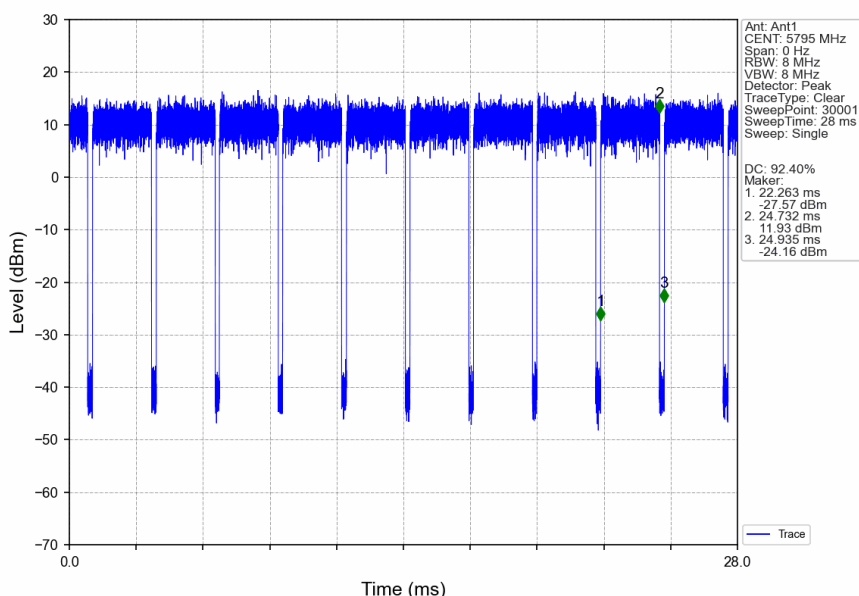


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

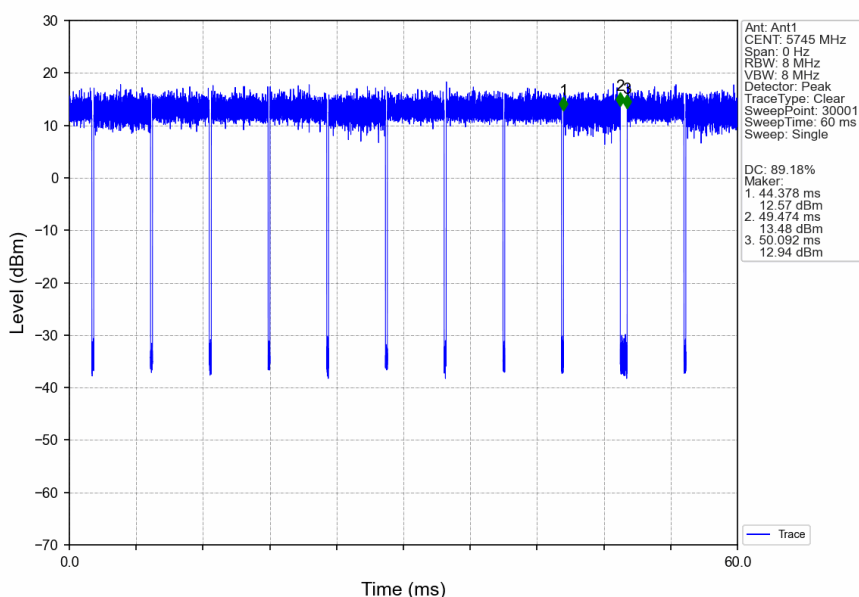


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

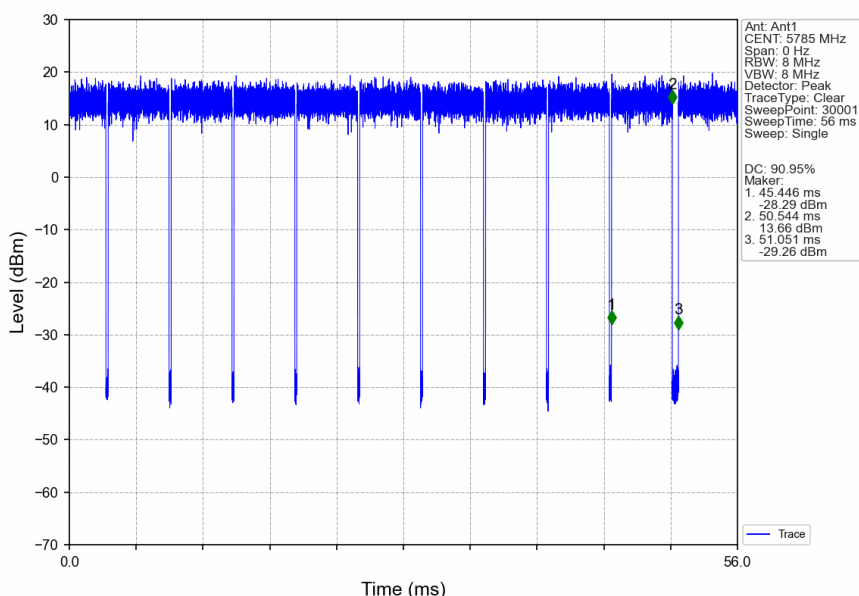


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

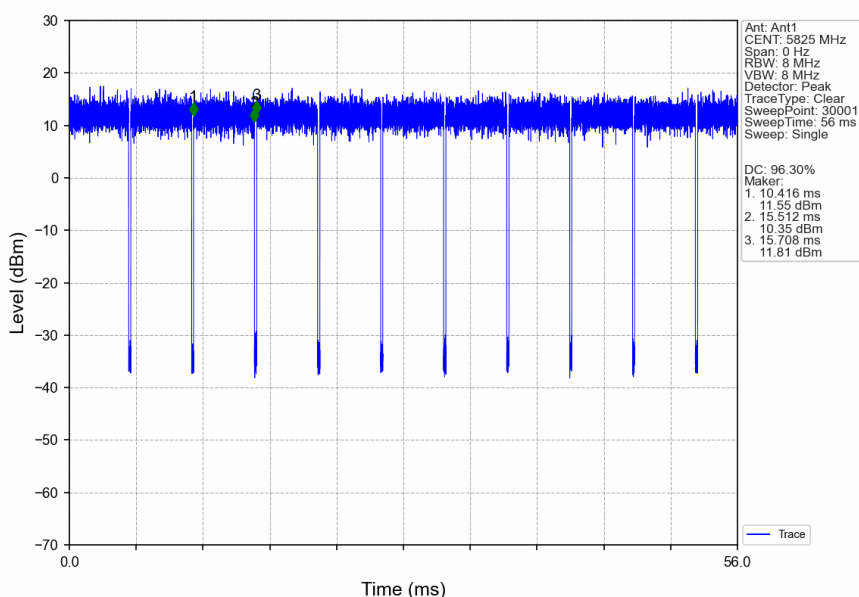


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

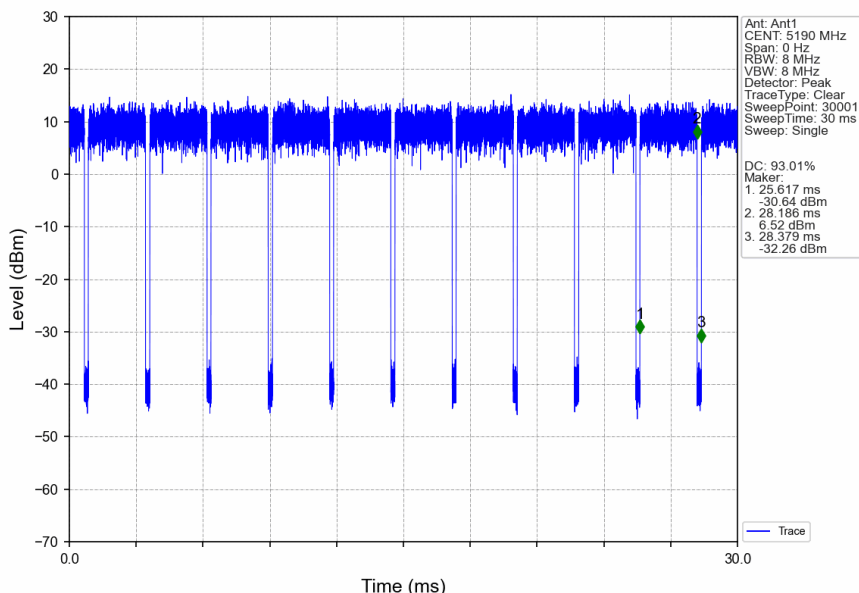


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

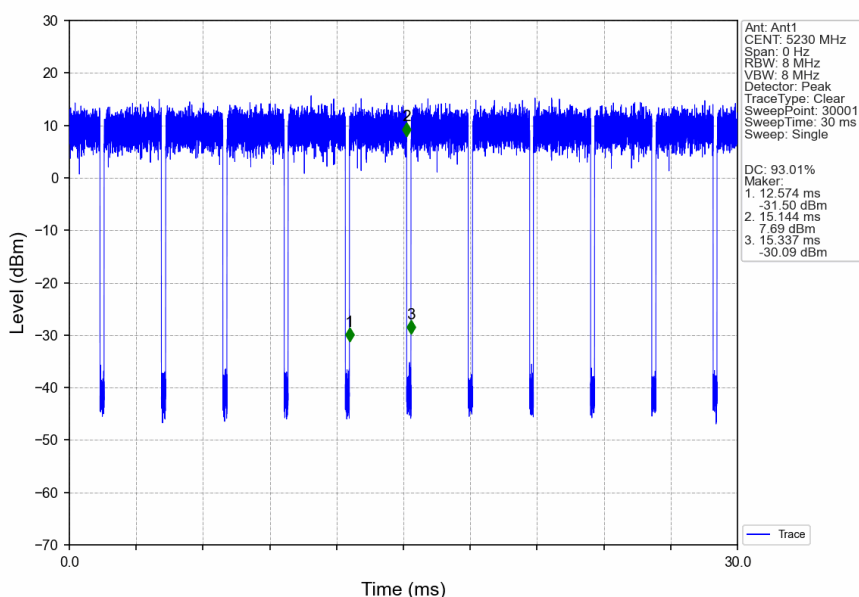

802.11ac(VHT40)_LCH_5270MHz_Ant1_NTNV

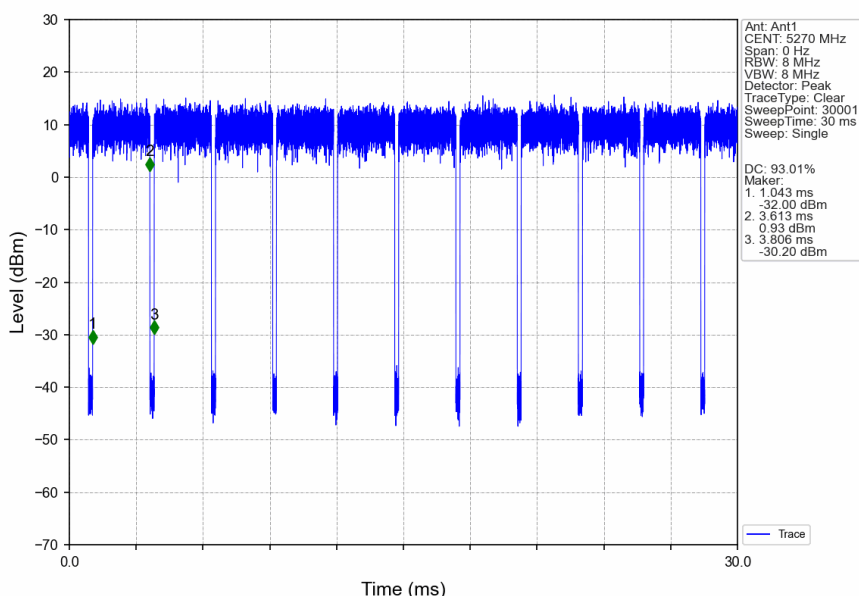

802.11ac(VHT40)_HCH_5310MHz_Ant1_NTNV

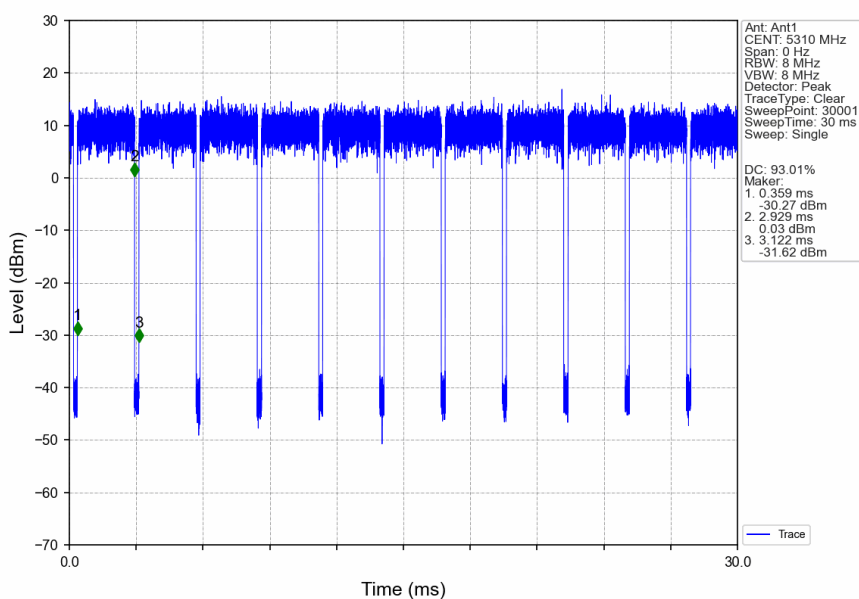

802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

