


FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Stylus Pen
BRAND NAME : Motorola
MODEL NAME : XT2604-1
FCC ID : IHDT6AC4
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S) : Dec. 25, 2025 ~ Dec. 26, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

TABLE OF CONTENTS	2
REVISION HISTORY	3
SUMMARY OF THE TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software	6
1.7 Applicable Standards.....	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode.....	7
2.2 Connection Diagram of Test System	7
2.3 Table for Supporting Units.....	7
3. TEST RESULTS.....	8
3.1 20dB and 99% Occupied Bandwidth Measurement	8
3.2 Radiated Emissions Measurement	10
3.3 Antenna Requirements.....	18
4. LIST OF MEASURING EQUIPMENT	19
5. UNCERTAINTY OF EVALUATION	20



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1103B	Rev. 01	Initial issue of report	Jan. 16, 2026

SUMMARY OF THE TEST RESULT

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 15.77 dB at 868.201MHz
-	15.207	AC Conducted Emission	Not Required	1
3.3	15.203	Antenna Requirements	Pass	-

Remark 1: The device is powered by a battery only and does not work when wirelessly charging in the charging case.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Stylus Pen
Brand Name	Motorola
Model Name	XT2604-1
FCC ID	IHDT6AC4
SN Code	Conducted: HVE6015E Radiation: HVE600PA
Frequency Range	111 ~ 494kHz
Type of Modulation	PWM
HW Version	0V2
SW Version	V1.0.33
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)			
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158			
Test Site No.	Sporton Site No.		FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	03CH07-KS	CN1257	314309
Test Engineer	Jacob Zhang	Moon		
Temperature	22~24℃	21~22℃		
Relative Humidity	53~55%	45~46%		

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2020/Cor 1-2023

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1 Descriptions of Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 1000 MHz).

Test Items	Function Type
Radiated Emission	Mode 1 : specific RF technology Tx

2.2 Connection Diagram of Test System

<Radiated Emission >

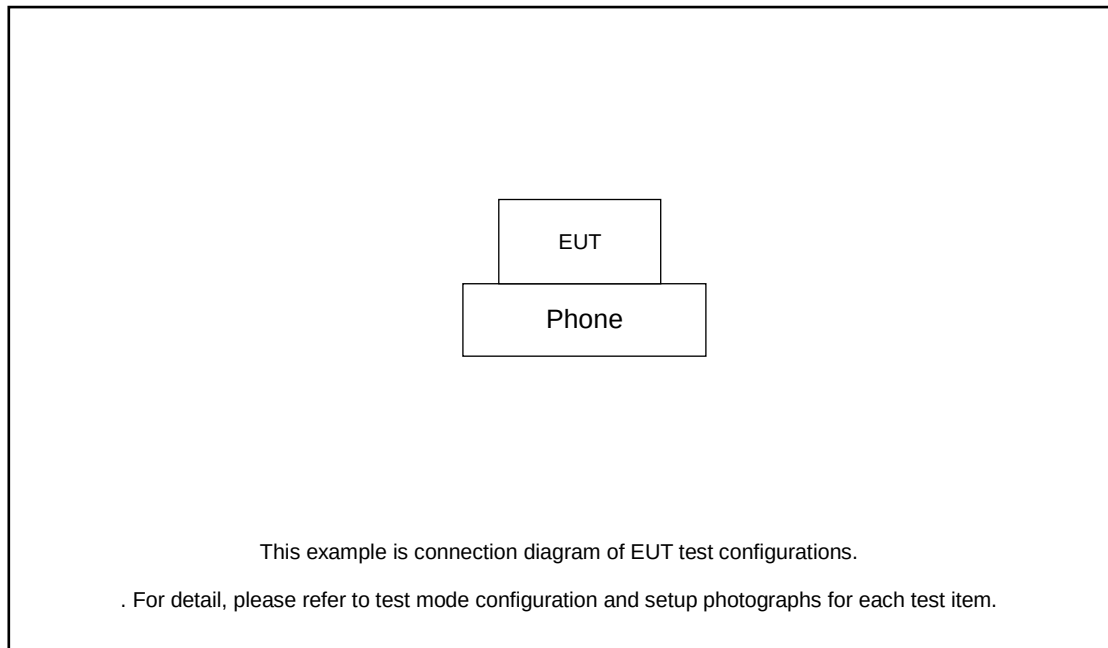

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Phone	N/A	N/A	N/A	N/A	N/A

3. Test Results

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only, 99% OBW shall not located within 15.205 restricted bands.

3.1.2 Measuring Instruments


See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB and 99% Occupied bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT, while the EUT is in operation.
2. Set the RBW=300Hz, the VBW=1kHz, Sweep=auto; Detector=peak, Trace=max hold;
3. Measure and record the results in the test report.

Remark: Because the measured signal is CW adjusting the RBW would not be practical since measured bandwidth will always changes with RBW.

3.1.4 Test Setup

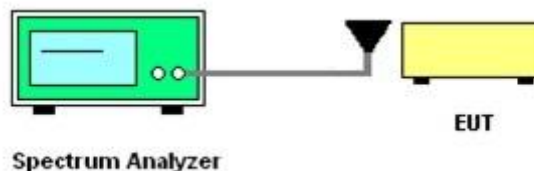


3.1.5 Test Result of Conducted Test Items

Test Engineer :	Jacob Zhang	Temperature :	22~24°C
		Relative Humidity :	53~55%


20dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
0.955	0.854



20 dB Bandwidth Plot

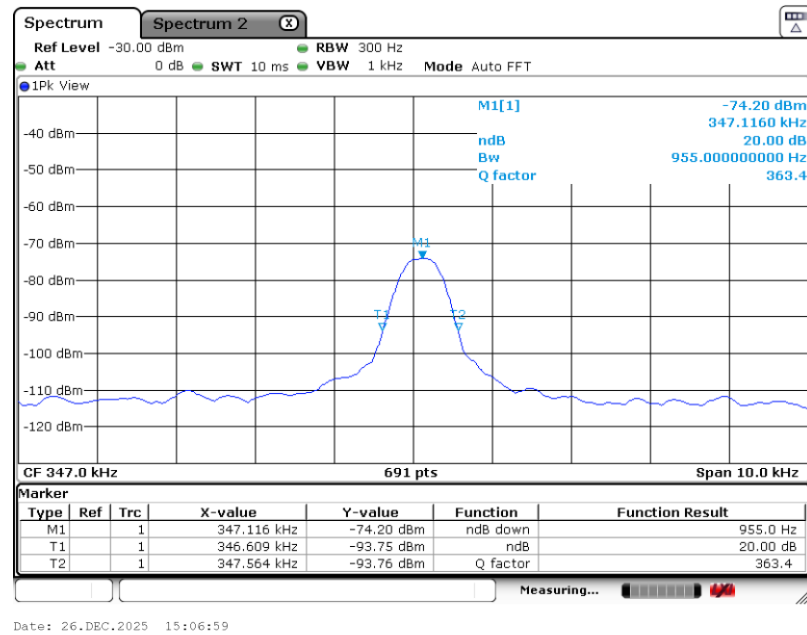

99% Occupied Bandwidth Plot

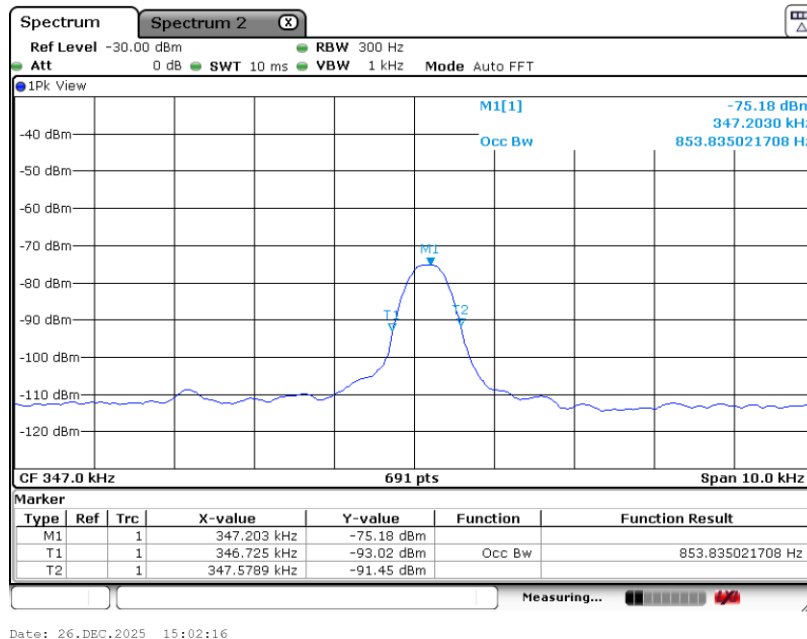

3.2 Radiated Emissions Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. specific line (dB μ V/m) = $20 \log$ Emission level (μ V/m)
4. Limit line = specific limits (dB μ V/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.2.4 Test Setup of Radiated Emission


For radiated emissions below 30MHz

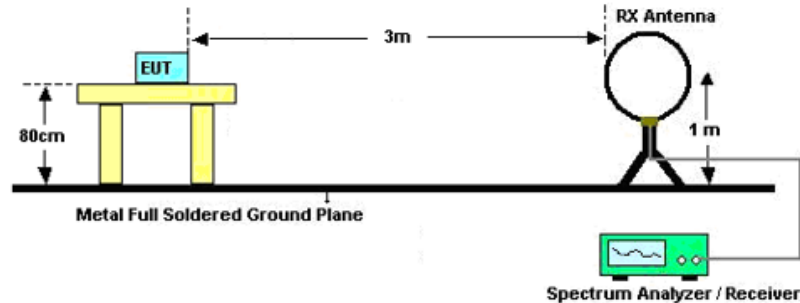


Note:

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.


For radiated emissions above 30MHz

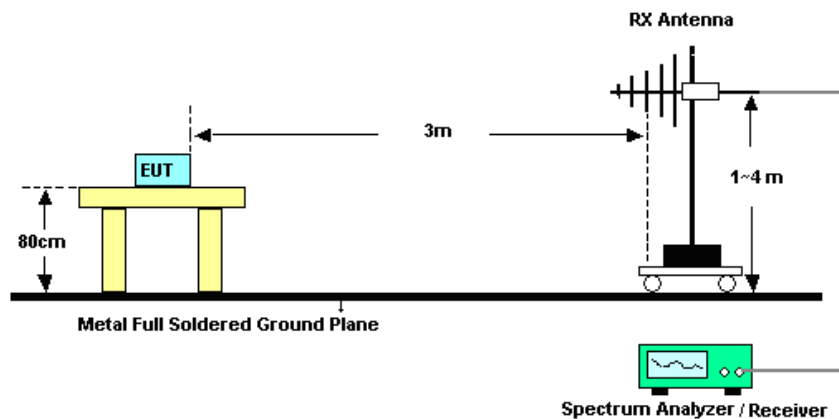

3.2.5 Test Result of Field Strength of Fundamental Emissions

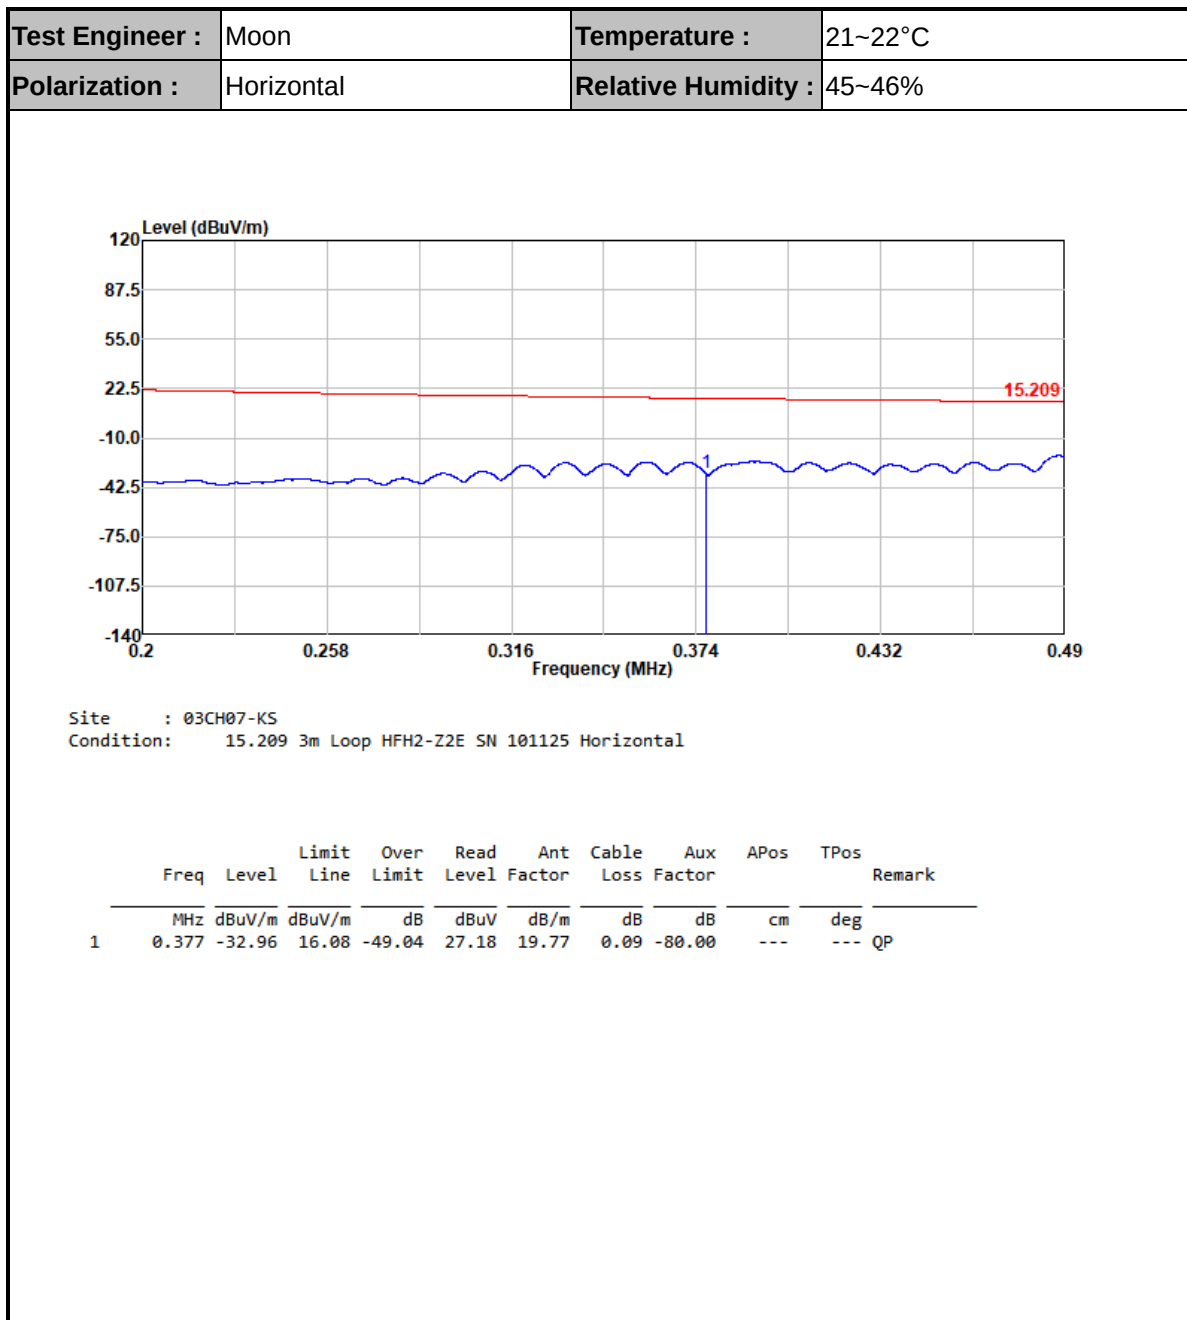

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

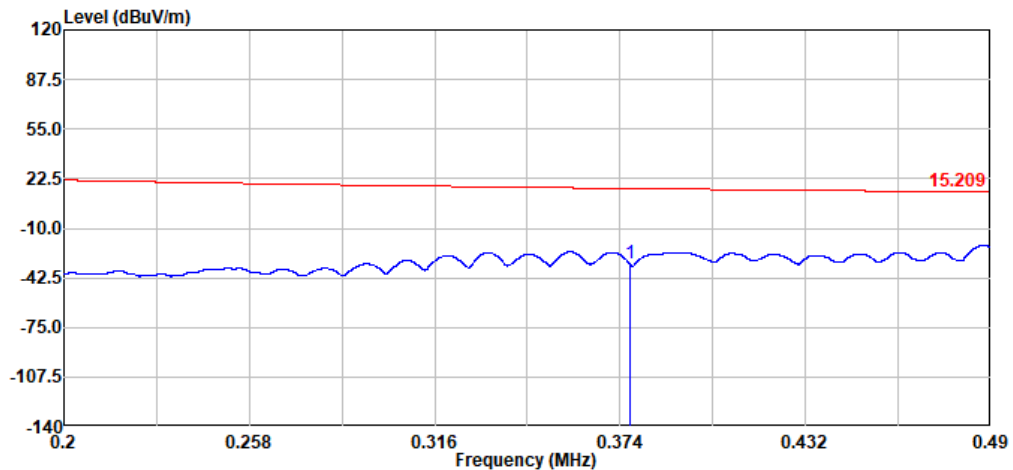

Site : 03CH07-KS
Condition: 15.209 3m Loop HFH2-Z2E SN 101125 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	0.377	-33.28	16.08	-49.36	26.86	19.77	0.09	-80.00	---	---	QP


Note:

1. The field strength is tested at 3m distance then convert to 300m by adding Distance extrapolation factor.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. specific line (dB μ V/m) = $20 \log$ Emission level (μ V/m)
4. Level(dB μ V/m) = Read Level(dB μ V) + Antenna Factor(dB/m) + Cable Loss(dB) + distance extrapolation factor
5. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)




3.2.6 Test Result of Radiated Emission (9kHz ~ 30MHz)

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

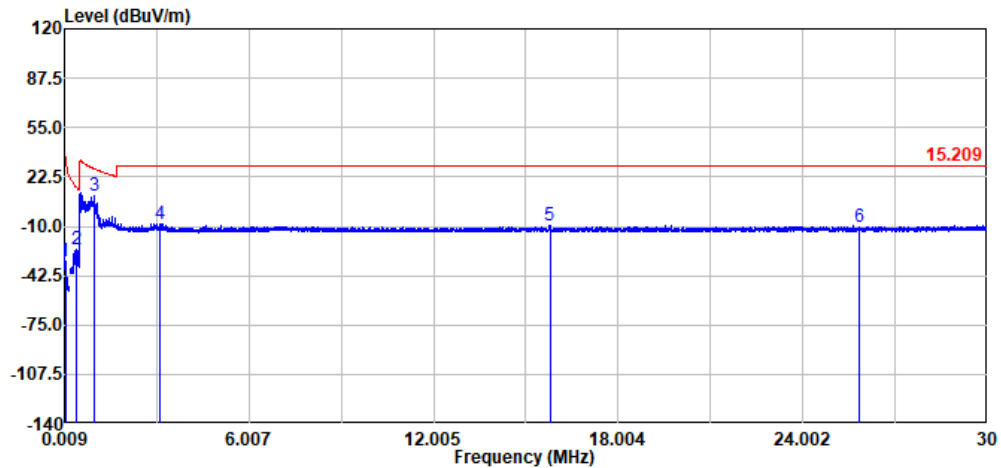

Site : 03CH07-KS
Condition: 15.209 3m Loop HFH2-Z2E SN 101125 Horizontal

	Freq	Level	Limit	Over	Read	Ant	Cable	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	0.034	-33.14	36.93	-70.07	26.69	20.08	0.09	-80.00	---	---	Average
2	0.391	-25.62	15.75	-41.37	34.52	19.77	0.09	-80.00	---	---	Average
3	0.975	10.24	27.78	-17.54	30.36	19.79	0.09	-40.00	---	---	QP
4	3.124	-8.06	29.50	-37.56	12.00	19.82	0.12	-40.00	---	---	QP
5	15.782	-9.46	29.50	-38.96	10.45	19.79	0.30	-40.00	---	---	QP
6	25.841	-10.46	29.50	-39.96	8.95	20.16	0.43	-40.00	---	---	QP

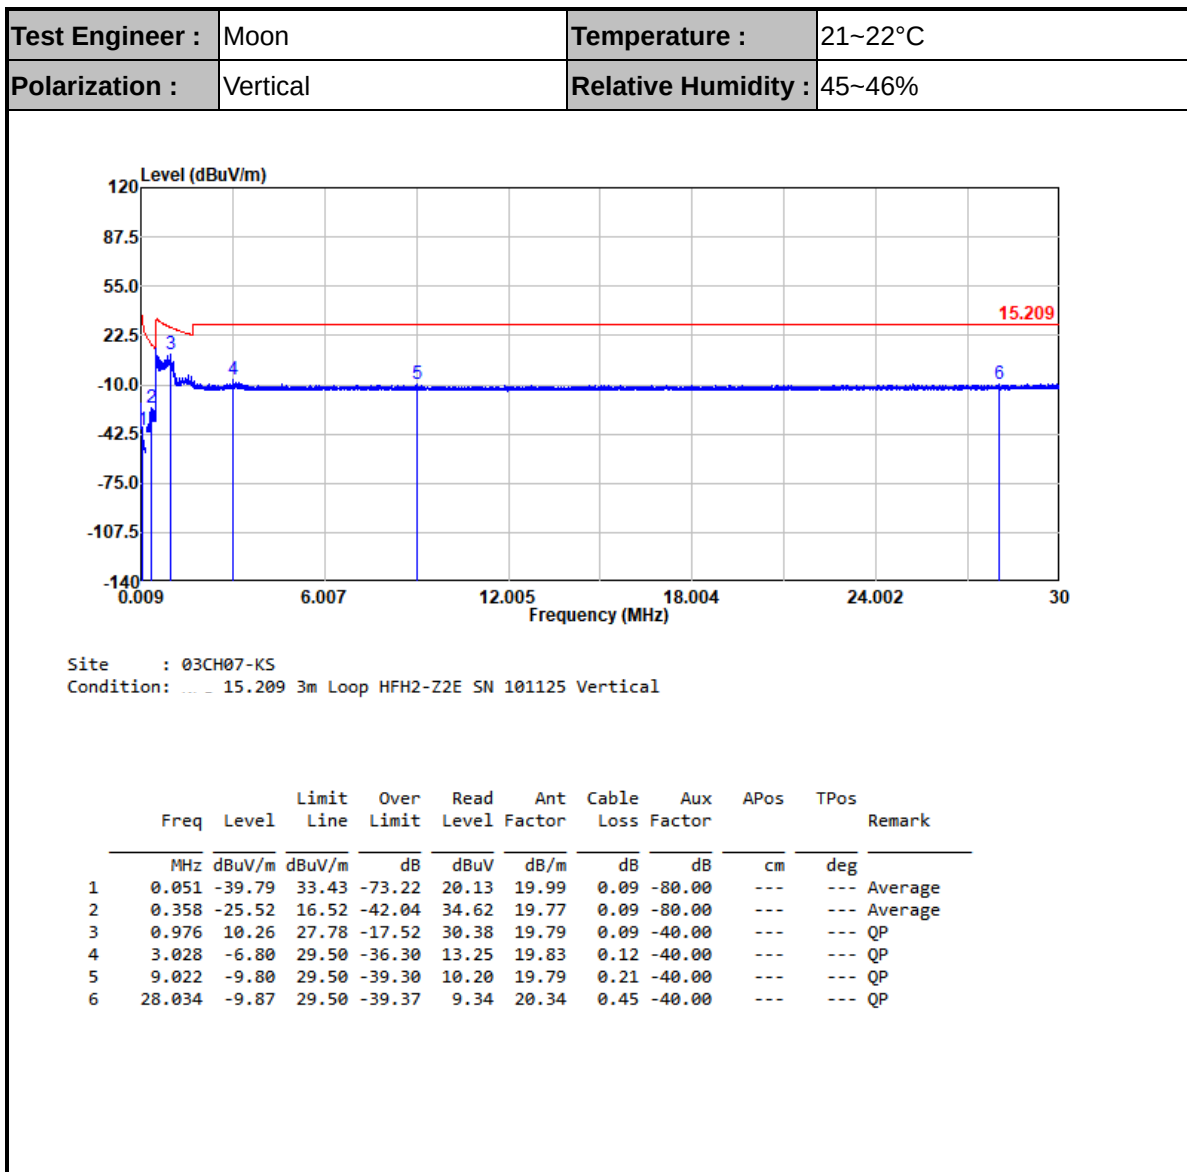


Note:

1. The field strength is tested at 3m distance then convert to 300m/30m by adding Distance extrapolation factor.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. specific line (dBμV/m) = 20 log Emission level (μV/m)
4. Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) + distance extrapolation factor
5. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

3.2.7 Test Result of Radiated Emission (30MHz ~ 1000MHz)

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

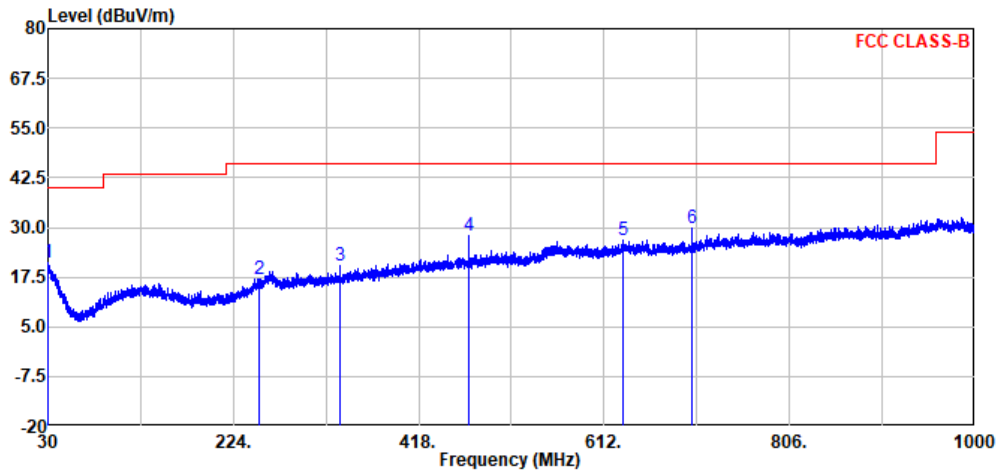


Site : 03CH07-KS
Condition: FCC CLASS-B 3m CBL6111D 59913 Horizontal

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	30.49	21.08	40.00	-18.92	28.02	24.65	0.48	32.07	---	---	Peak
2	251.65	17.09	46.00	-28.91	28.00	18.92	2.22	32.05	---	---	Peak
3	335.43	20.47	46.00	-25.53	30.17	19.84	2.57	32.11	---	---	Peak
4	470.87	28.09	46.00	-17.91	33.82	23.43	3.06	32.22	---	---	Peak
5	631.16	26.80	46.00	-19.20	29.02	26.51	3.54	32.27	---	---	Peak
6	704.03	29.93	46.00	-16.07	31.91	26.61	3.74	32.33	---	---	Peak



Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

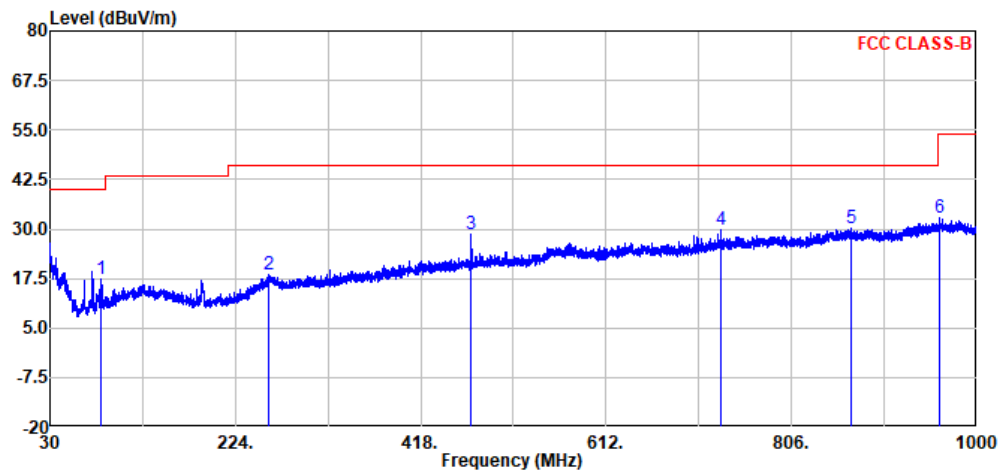

Site : 03CH07-KS
Condition: FCC CLASS-B 3m CBL6111D 59913 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	83.23	17.50	40.00	-22.50	34.58	13.79	1.19	32.06	---	---	Peak
2	258.31	18.33	46.00	-27.67	28.17	19.96	2.25	32.05	---	---	Peak
3	471.11	28.82	46.00	-17.18	34.55	23.43	3.06	32.22	---	---	Peak
4	732.28	29.94	46.00	-16.06	30.42	27.96	3.81	32.25	---	---	Peak
5	868.20	30.23	46.00	-15.77	28.21	29.43	4.17	31.58	---	---	Peak
6	961.44	32.70	54.00	-21.30	27.93	31.20	4.39	30.82	---	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



3.3 Antenna Requirements

3.3.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
MXE EMI Receiver	Keysight	N9038A	MY57290151	3Hz~8.4GHz	Jul. 02, 2025	Dec. 25, 2025	Jul. 01, 2026	Radiation (03CH07-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Dec. 25, 2025	Aug. 09, 2026	Radiation (03CH07-KS)
Bilog Antenna	TESEQ	CBL 6111D	49921	30MHz-1GHz	Mar. 24, 2025	Dec. 25, 2025	Mar. 23, 2026	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 25, 2025	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 25, 2025	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 25, 2025	NCR	Radiation (03CH07-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Dec. 26, 2025	Jul. 06, 2026	Conducted (TH01-KS)

NCR: No Calibration Required

5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0.384\%$

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.2 dB
---	--------

----- THE END -----