



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Stylus Pen
BRAND NAME : Motorola
MODEL NAME : XT2604-1
FCC ID : IHDT6AC4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Dec. 18, 2025 ~ Jan. 04, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 Antenna Requirements.....	18
4 LIST OF MEASURING EQUIPMENT.....	19
5 MEASUREMENT UNCERTAINTY.....	20
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5D1103A	Rev. 01	Initial issue of report	Jan. 16, 2026

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.52 dB at 2483.80 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	1
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark 1: The device is powered by a battery only and does not work when wirelessly charging in the charging case.

Conformity Assessment Condition:	
1.	The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2.	The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:	
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.	



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Stylus Pen
Brand Name	Motorola
Model Name	XT2604-1
FCC ID	IHDT6AC4
SN Code	Conducted: HVE6015E Radiation: HVE6013K
HW Version	0V2
SW Version	V1.0.33
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: -2.61 dBm (0.0005 W) BLE 2Mbps: -2.47 dBm (0.0006 W)
99% Occupied Bandwidth	BLE 1Mbps:1.019MHz BLE 2Mbps:2.002MHz
Antenna Type / Gain	Monopole FPC Antenna with gain 2.29 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH08-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020/Cor 1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps

2.3 Connection Diagram of Test System

Radiated Emission:

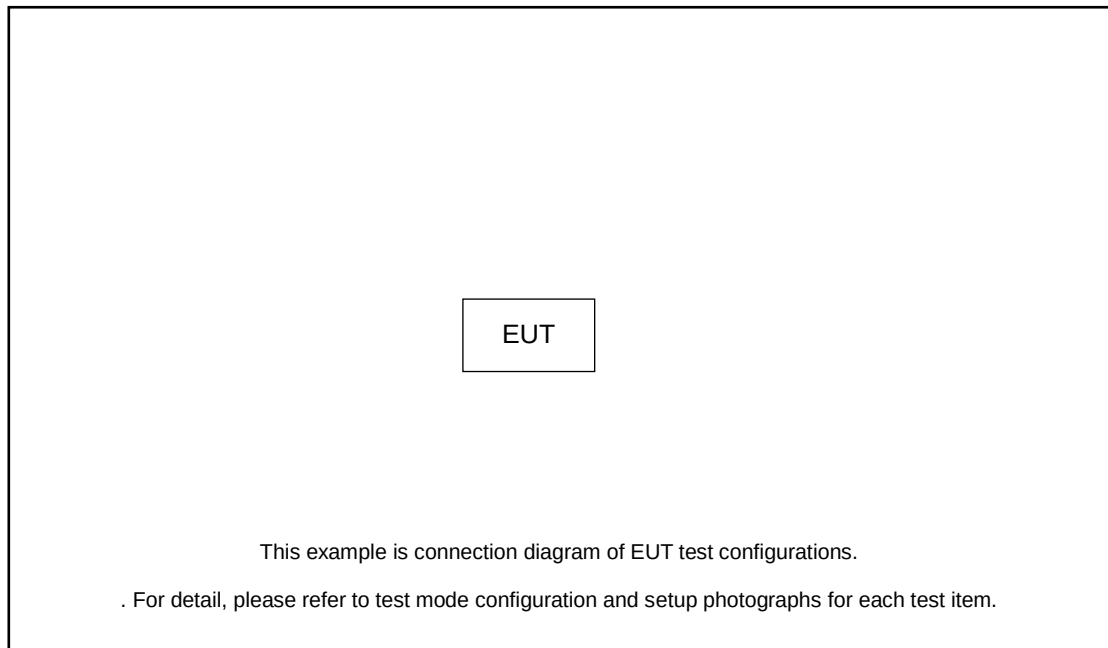

2.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.81 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.81 + 20 = 21.81 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) For average measurement: use duty cycle correction factor method.
Duty cycle = On time/(on+off) time
Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$
transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

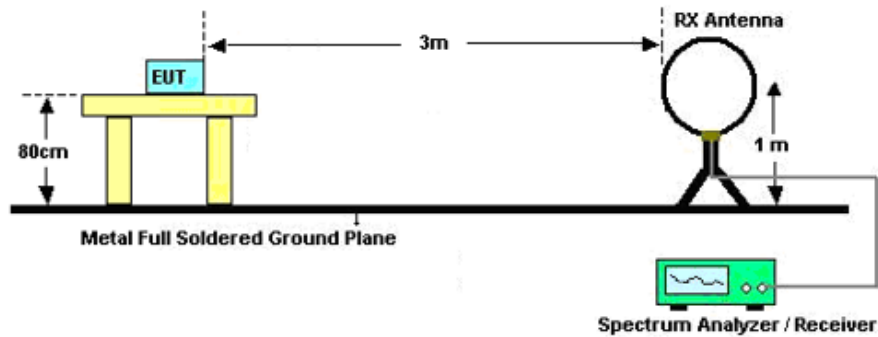

For radiated emissions from 30MHz to 1GHz

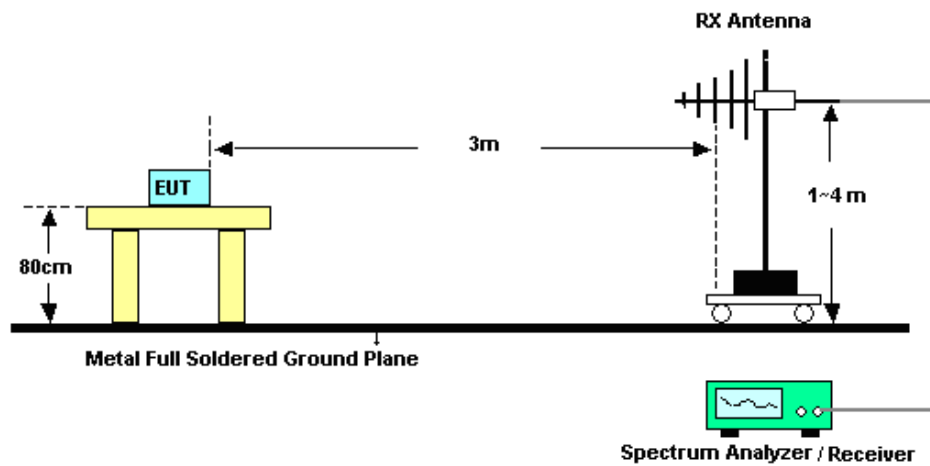

For radiated emissions above 1GHz

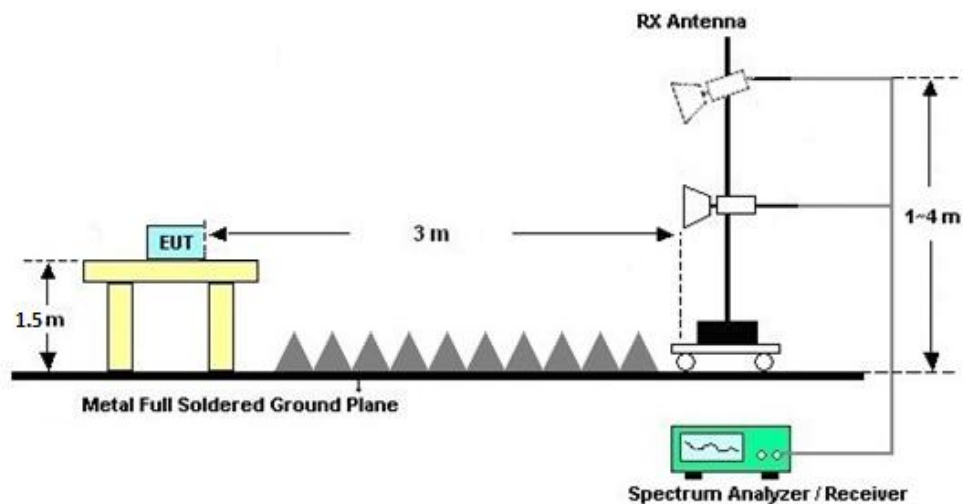

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Dec. 18, 2025~ Jan. 04, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Dec. 18, 2025~ Jan. 04, 2026	Jan. 01, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025		Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Dec. 18, 2025~ Jan. 04, 2026	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025		Dec. 24, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 02, 2025	Dec. 22, 2025	Jul. 01, 2026	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44GHz	Oct. 09, 2025	Dec. 22, 2025	Oct. 08, 2026	Radiation (03CH08-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Dec. 22, 2025	Aug. 09, 2026	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 12, 2025	Dec. 22, 2025	Aug. 11, 2026	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jun. 26, 2025	Dec. 22, 2025	Jun. 25, 2026	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1GHz~18GHz	May. 23, 2025	Dec. 22, 2025	May. 22, 2026	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Dec. 22, 2025	Oct. 17, 2026	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz~1GHz	Jan. 02, 2025	Dec. 22, 2025	Jan. 01, 2026	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 10, 2025	Dec. 22, 2025	Oct. 09, 2026	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Dec. 22, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 22, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Dec. 22, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Dec. 22, 2025	NCR	Radiation (03CH08-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.36 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.12.18~2025.12.22

Test Engineer: YANG


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.68	2401.65	2402.34	0.5	PASS
		2440	0.68	2439.65	2440.34	0.5	PASS
		2480	0.68	2479.66	2480.34	0.5	PASS
BLE_2M	Ant1	2402	1.17	2401.26	2402.43	0.5	PASS
		2440	1.16	2439.26	2440.42	0.5	PASS
		2480	1.17	2479.26	2480.42	0.5	PASS



Test Graphs

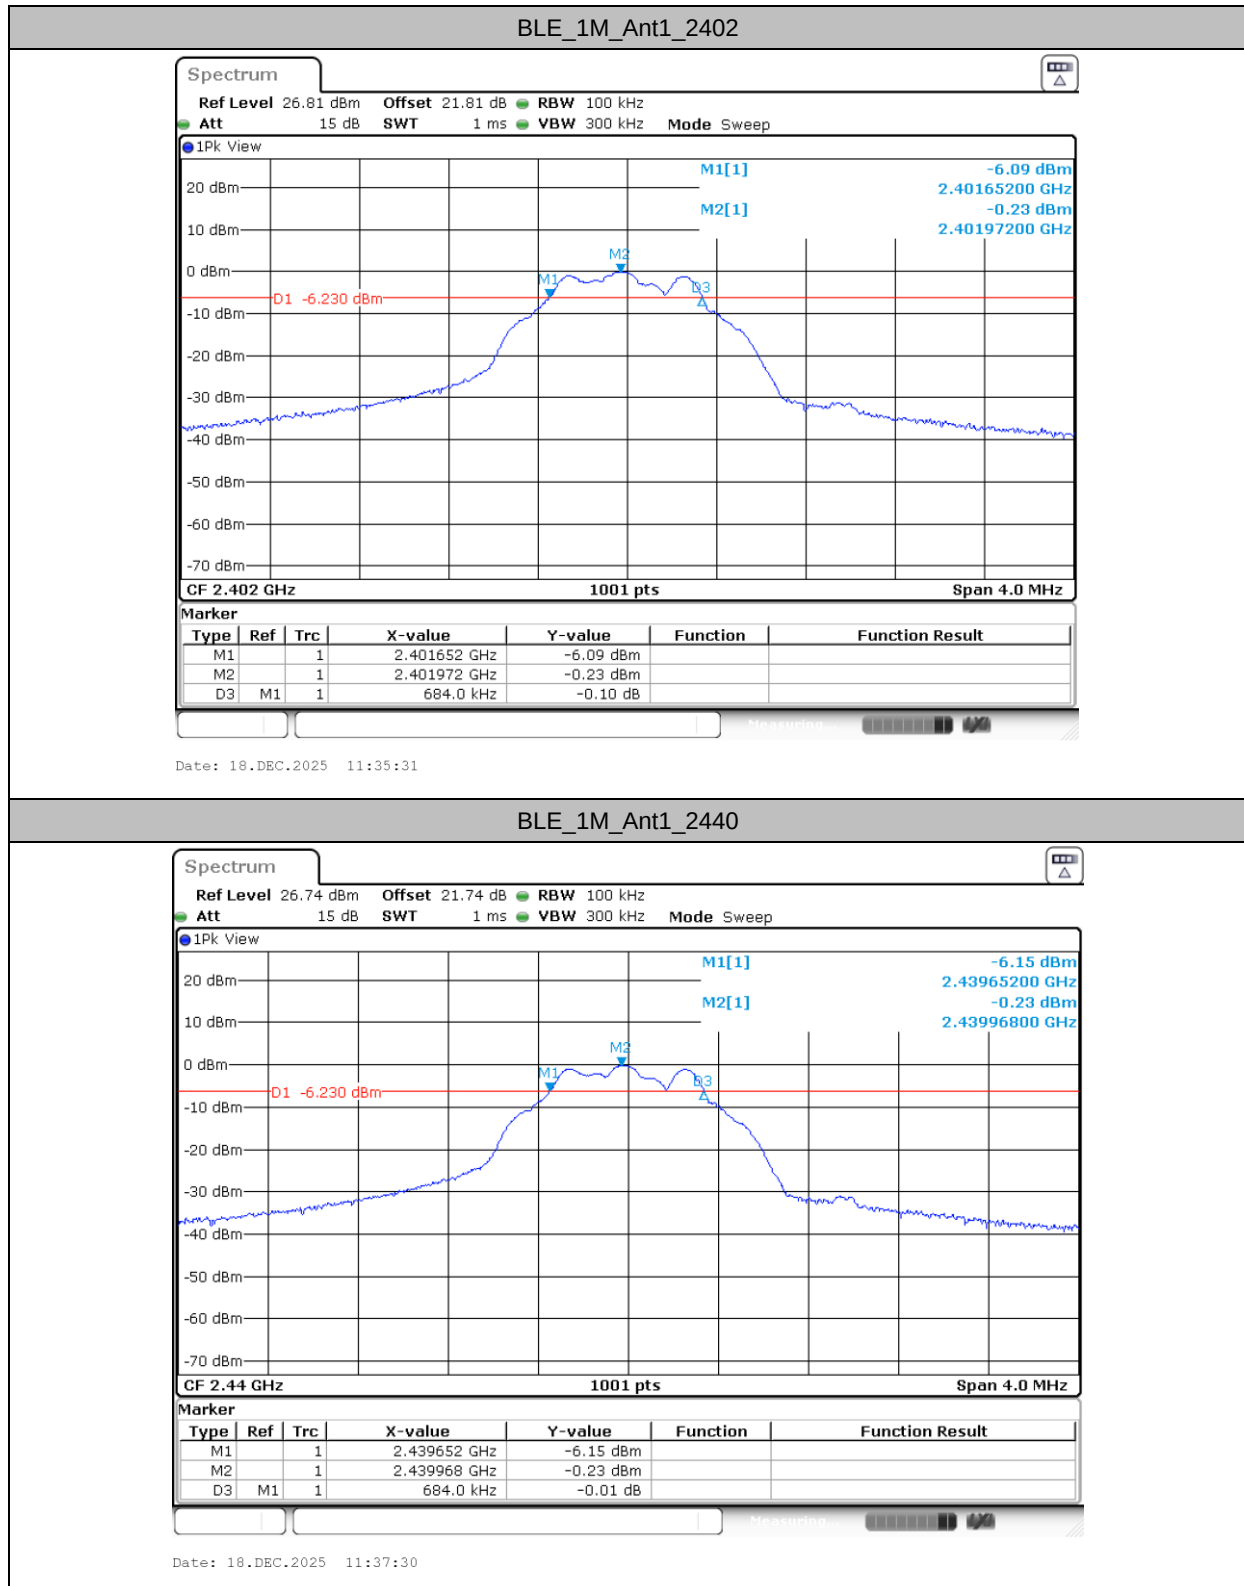

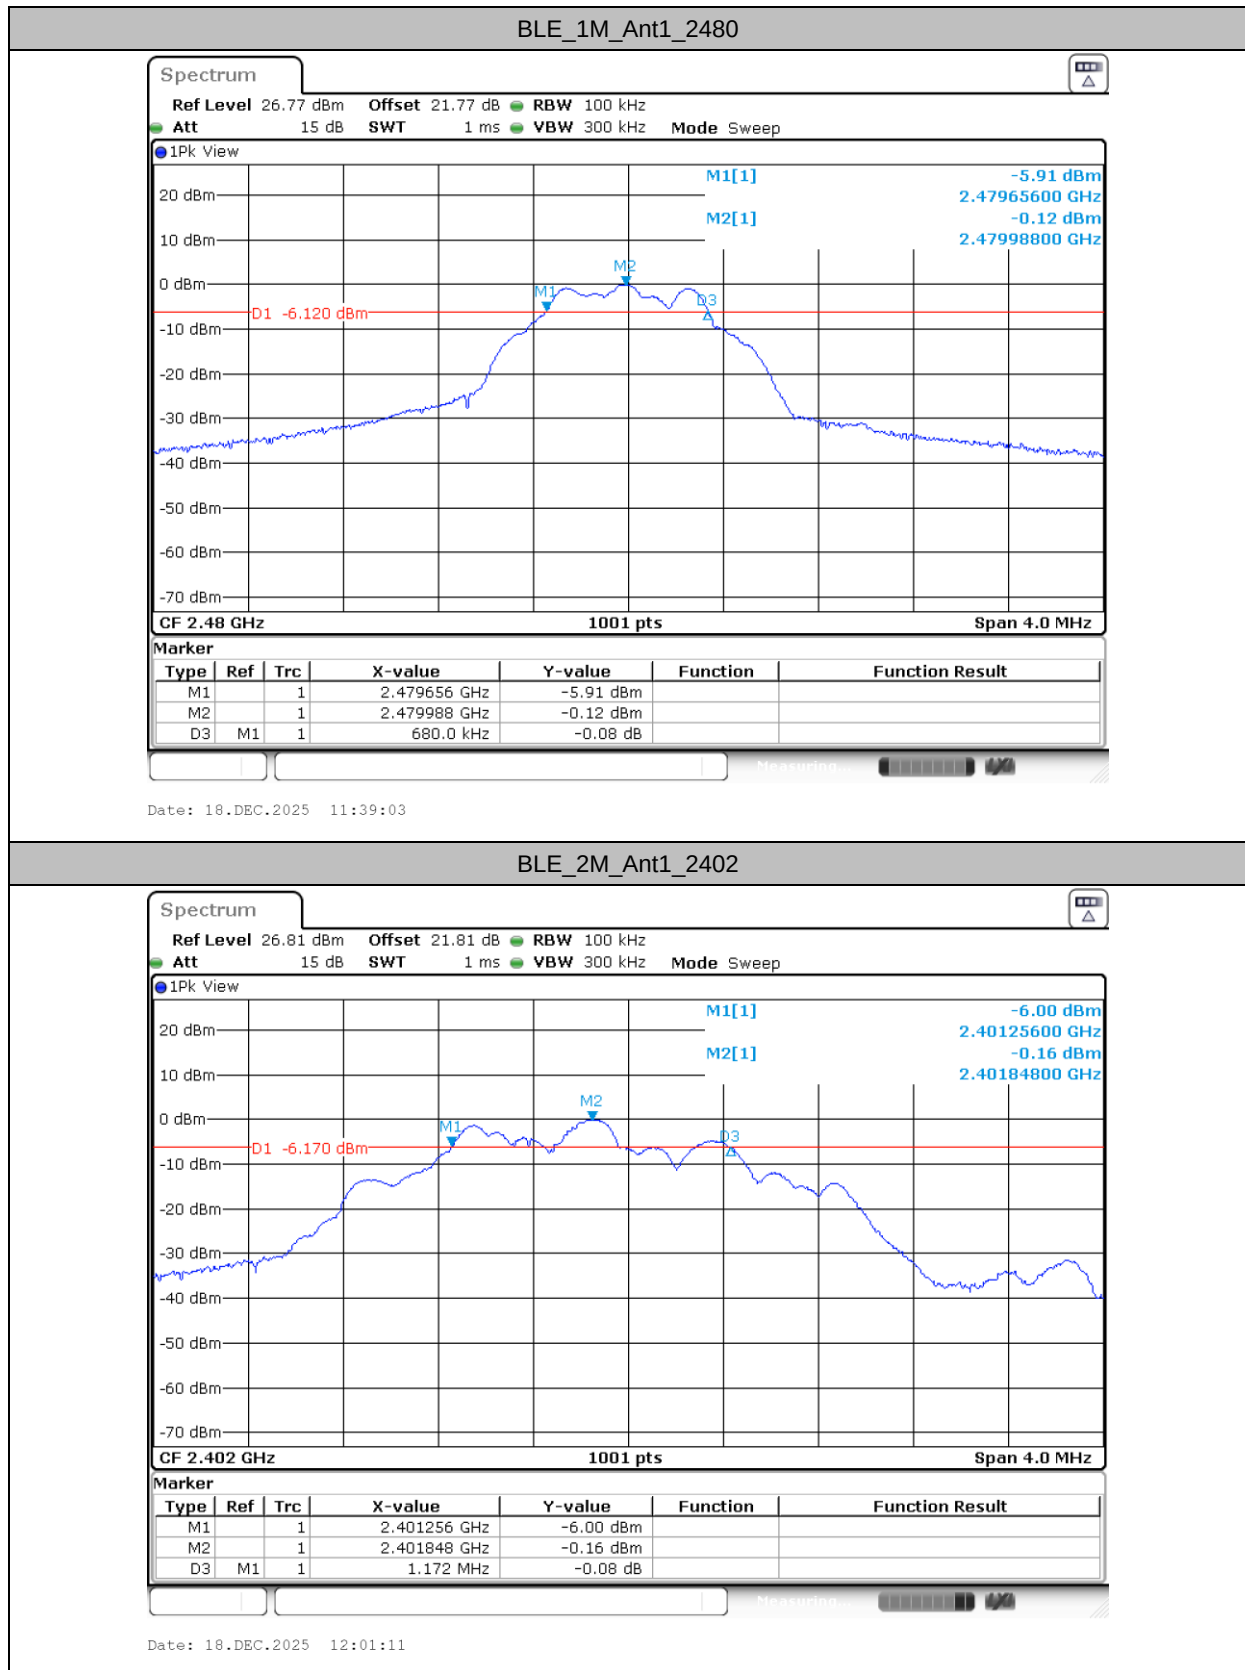

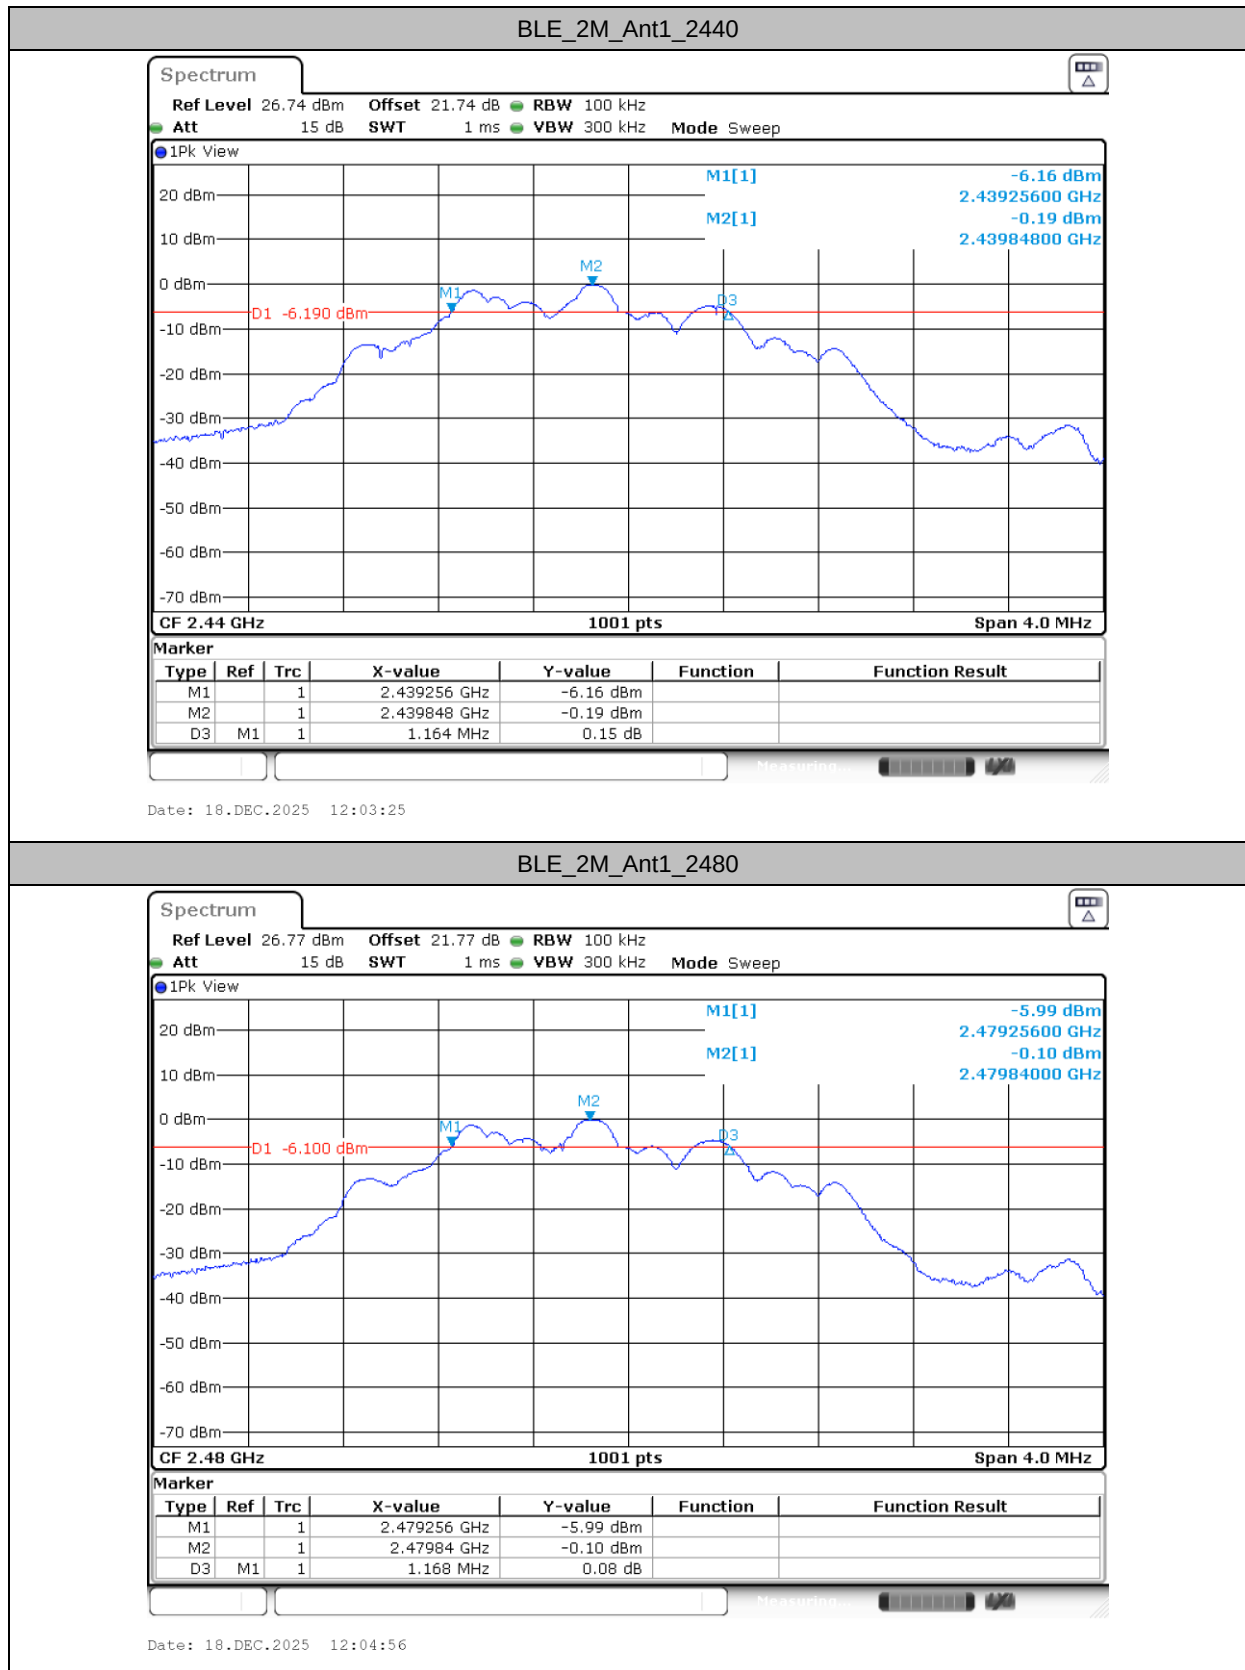




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE_1M	Ant1	2402	1.011	2401.4925	2402.5035
		2440	1.015	2439.4925	2440.5075
		2480	1.019	2479.4925	2480.5115
BLE_2M	Ant1	2402	1.998	2400.8771	2402.8751
		2440	2.002	2438.8731	2440.8751
		2480	2.002	2478.8731	2480.8751



Test Graphs

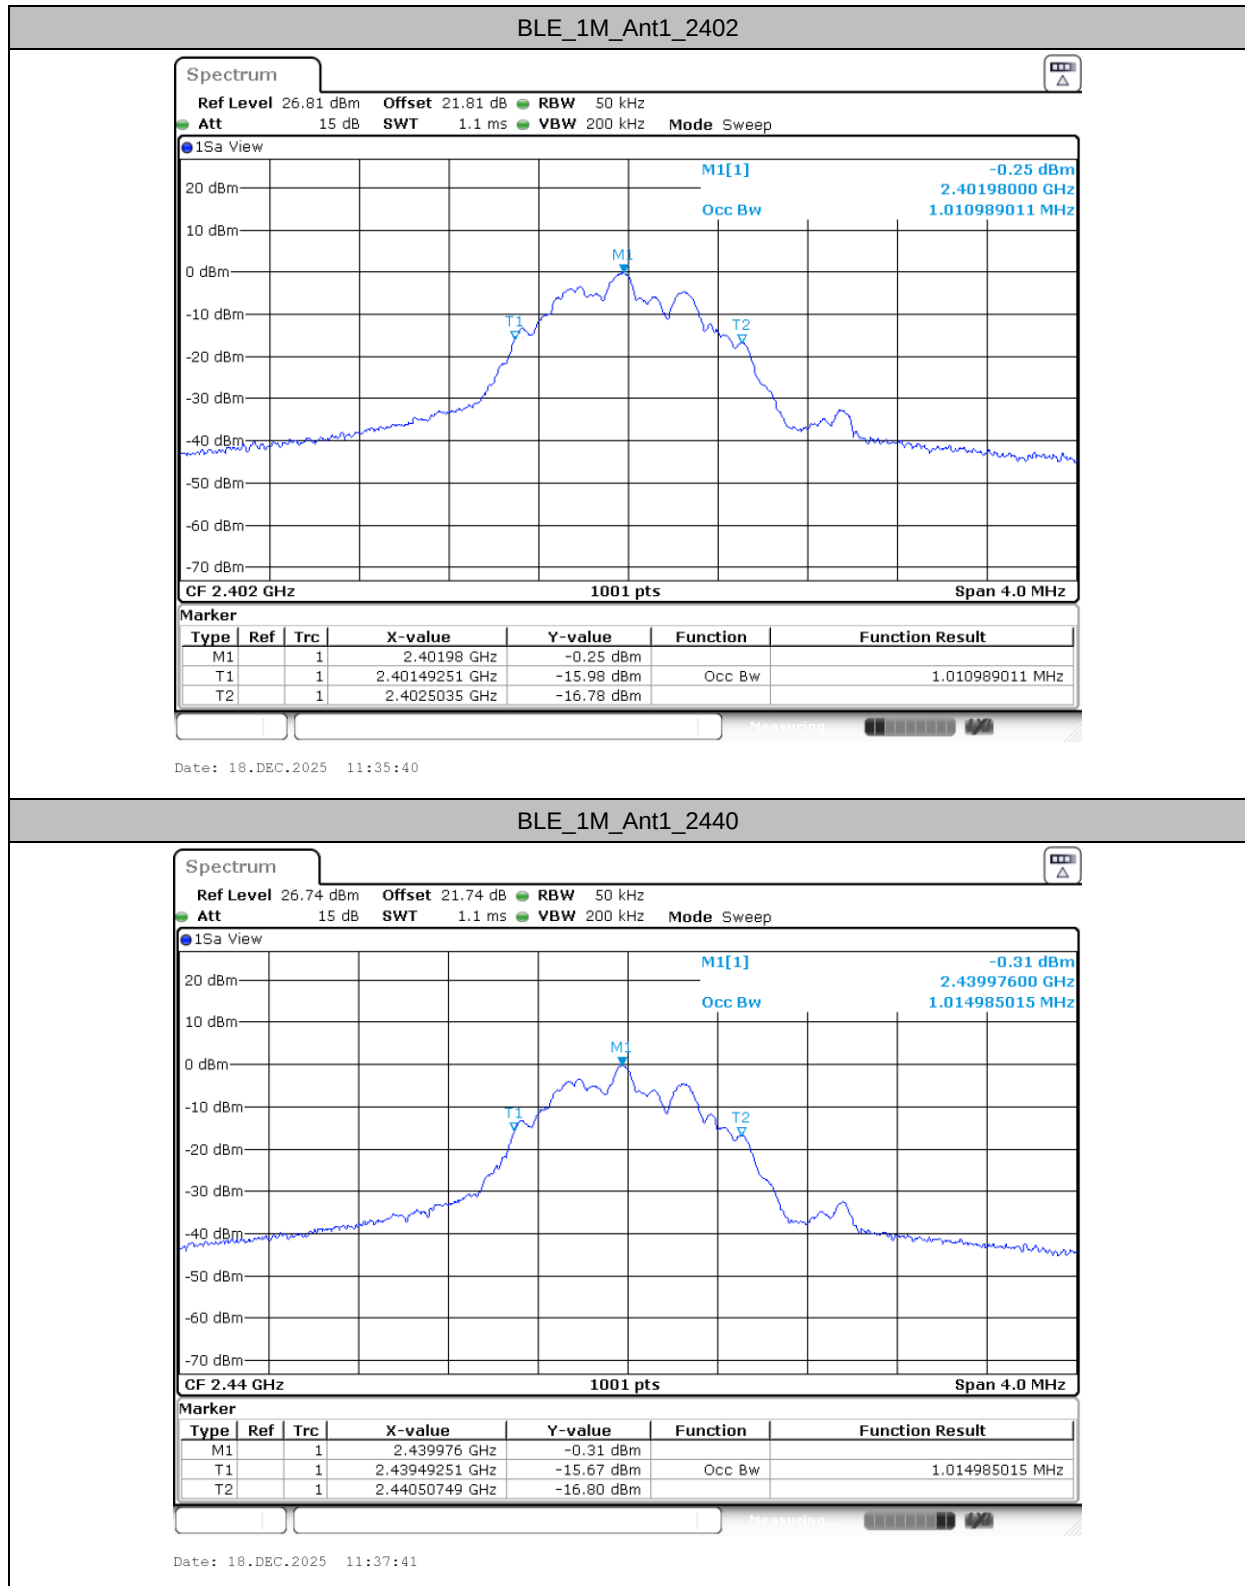

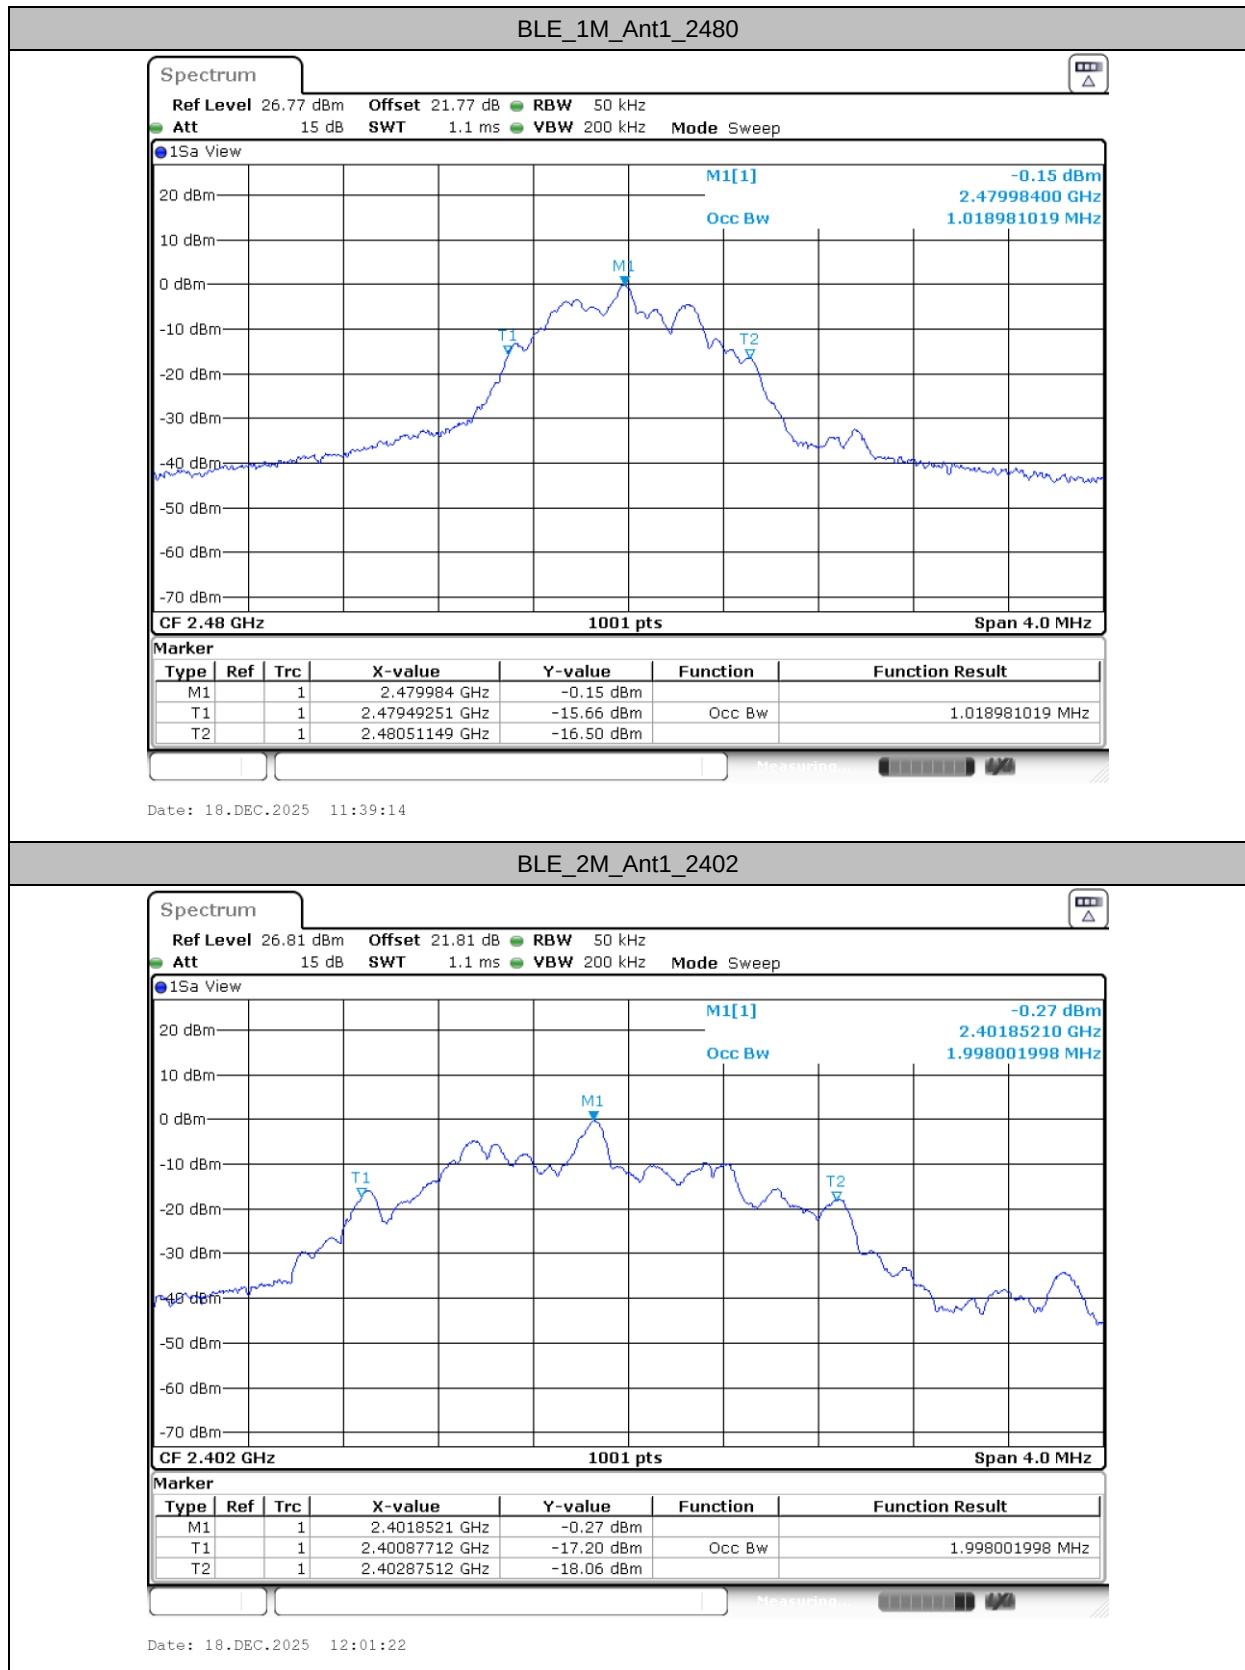

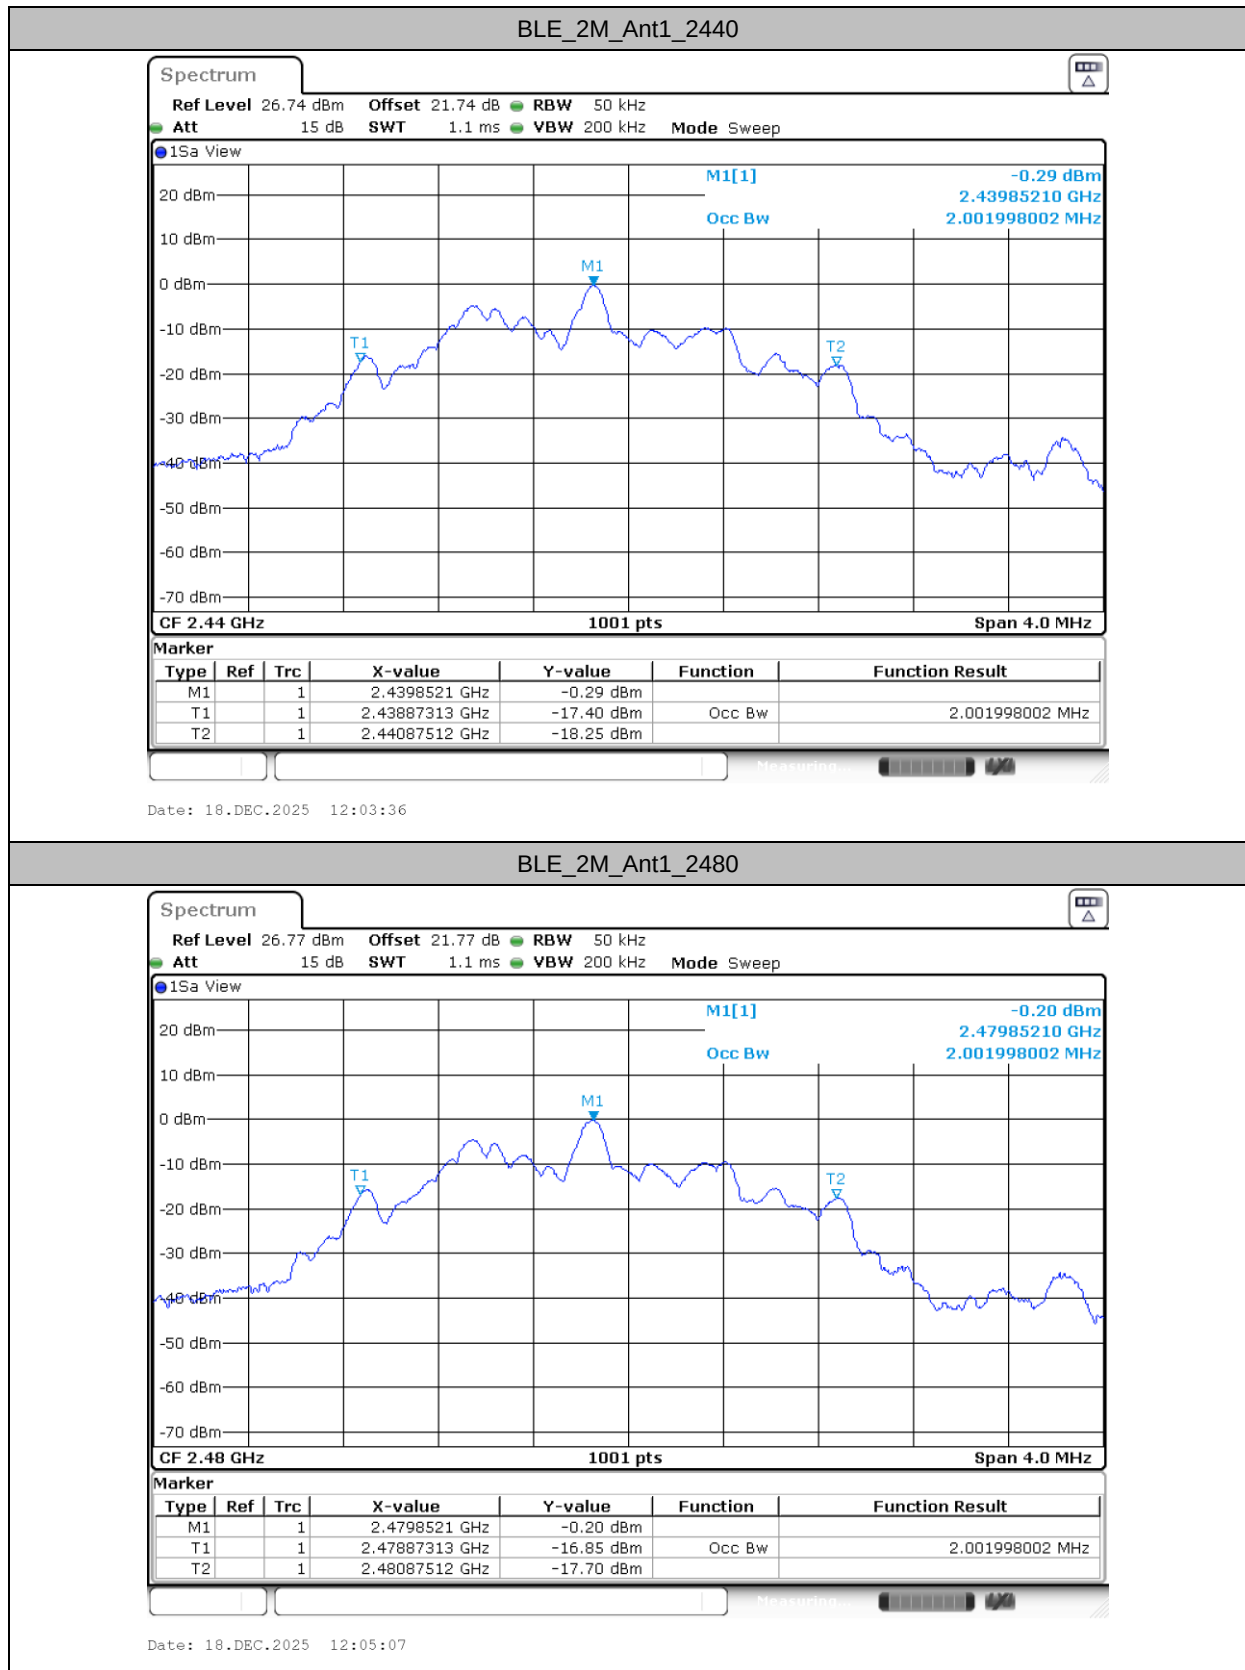



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail	Power Setting
BLE1M	Ant 1	0	-2.61	30.00	2.29	-0.32	36.00	Pass	0
		19	-3.01	30.00	2.29	-0.72	36.00	Pass	0
		39	-3.27	30.00	2.29	-0.98	36.00	Pass	0
BLE2M	Ant 1	0	-2.47	30.00	2.29	-0.18	36.00	Pass	0
		19	-2.71	30.00	2.29	-0.42	36.00	Pass	0
		39	-3.12	30.00	2.29	-0.83	36.00	Pass	0

Test Result Average

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting
BLE1M	Ant 1	0	10.57	-2.78	0
		19	10.57	-3.05	0
		39	10.57	-3.38	0
BLE2M	Ant 1	0	12.18	-2.57	0
		19	12.18	-2.85	0
		39	12.18	-3.23	0




Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-6.98	≤8.00	PASS
		2440	-7.39	≤8.00	PASS
		2480	-7.21	≤8.00	PASS
BLE_2M	Ant1	2402	-7.43	≤8.00	PASS
		2440	-8.23	≤8.00	PASS
		2480	-9.02	≤8.00	PASS



Test Graphs

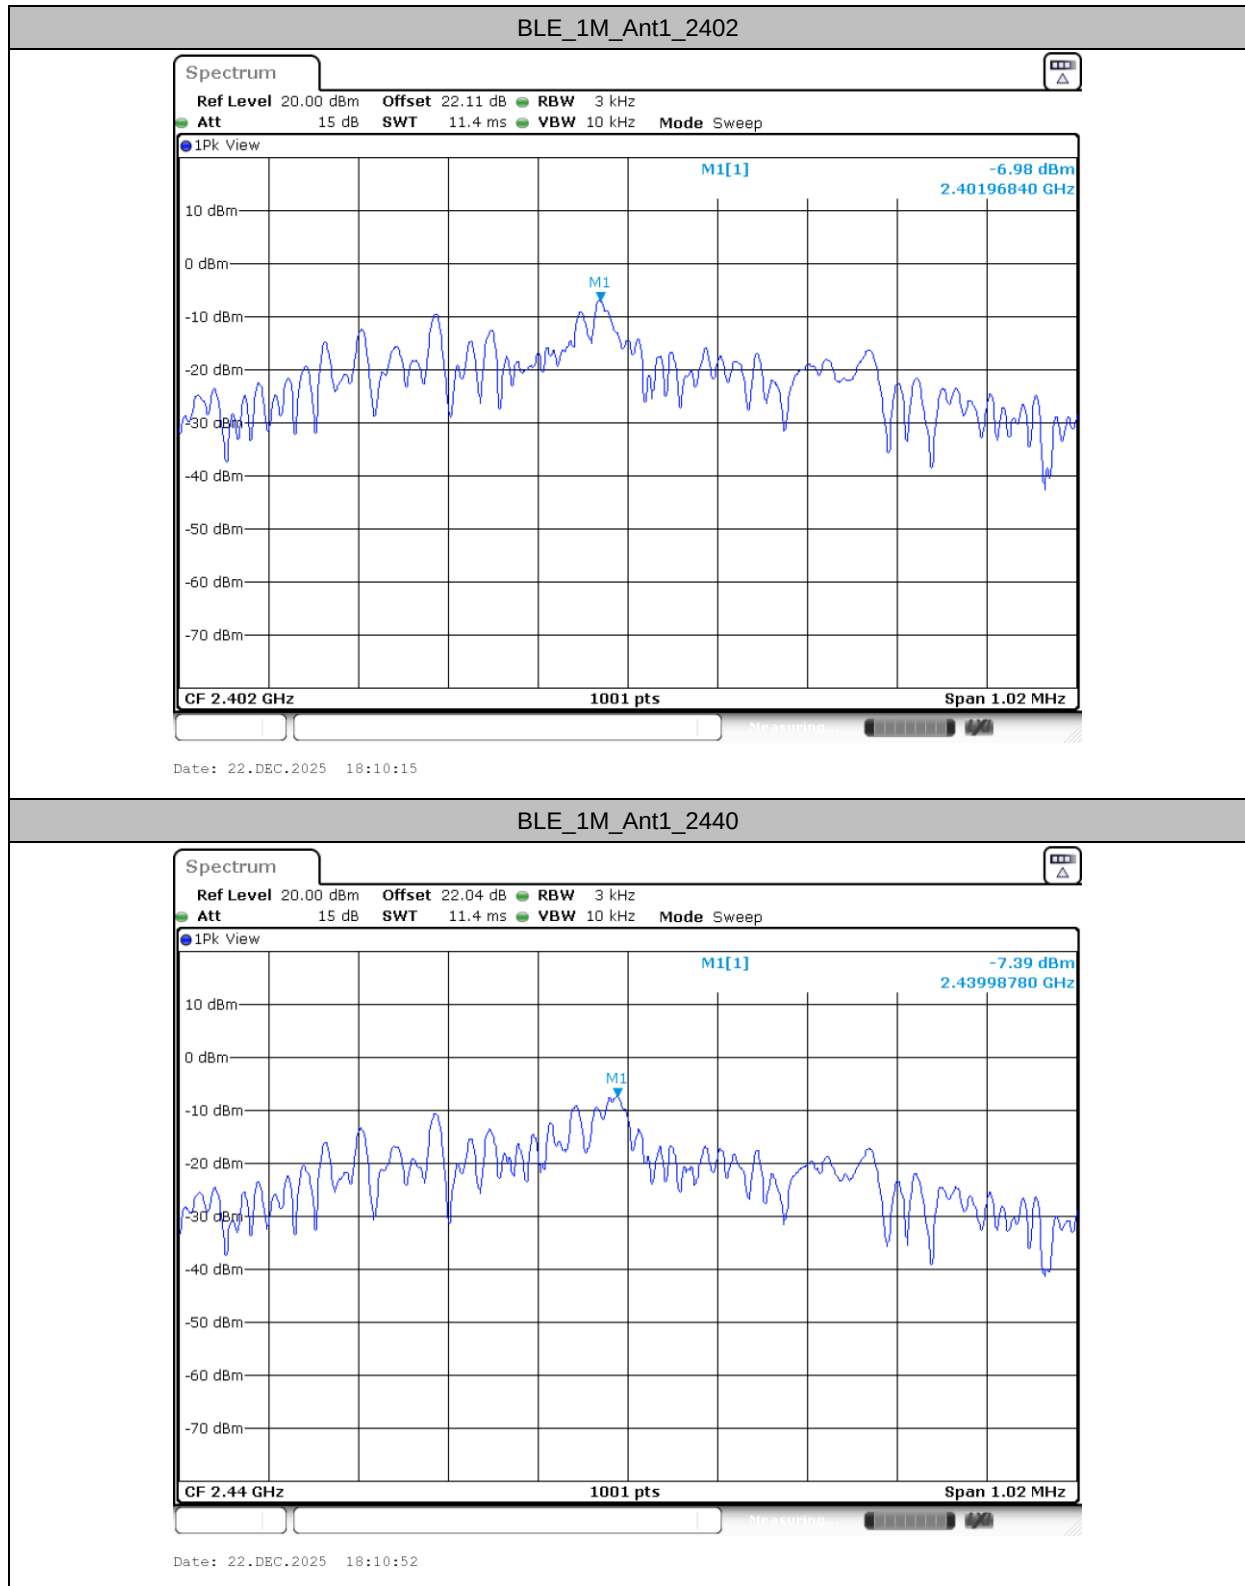

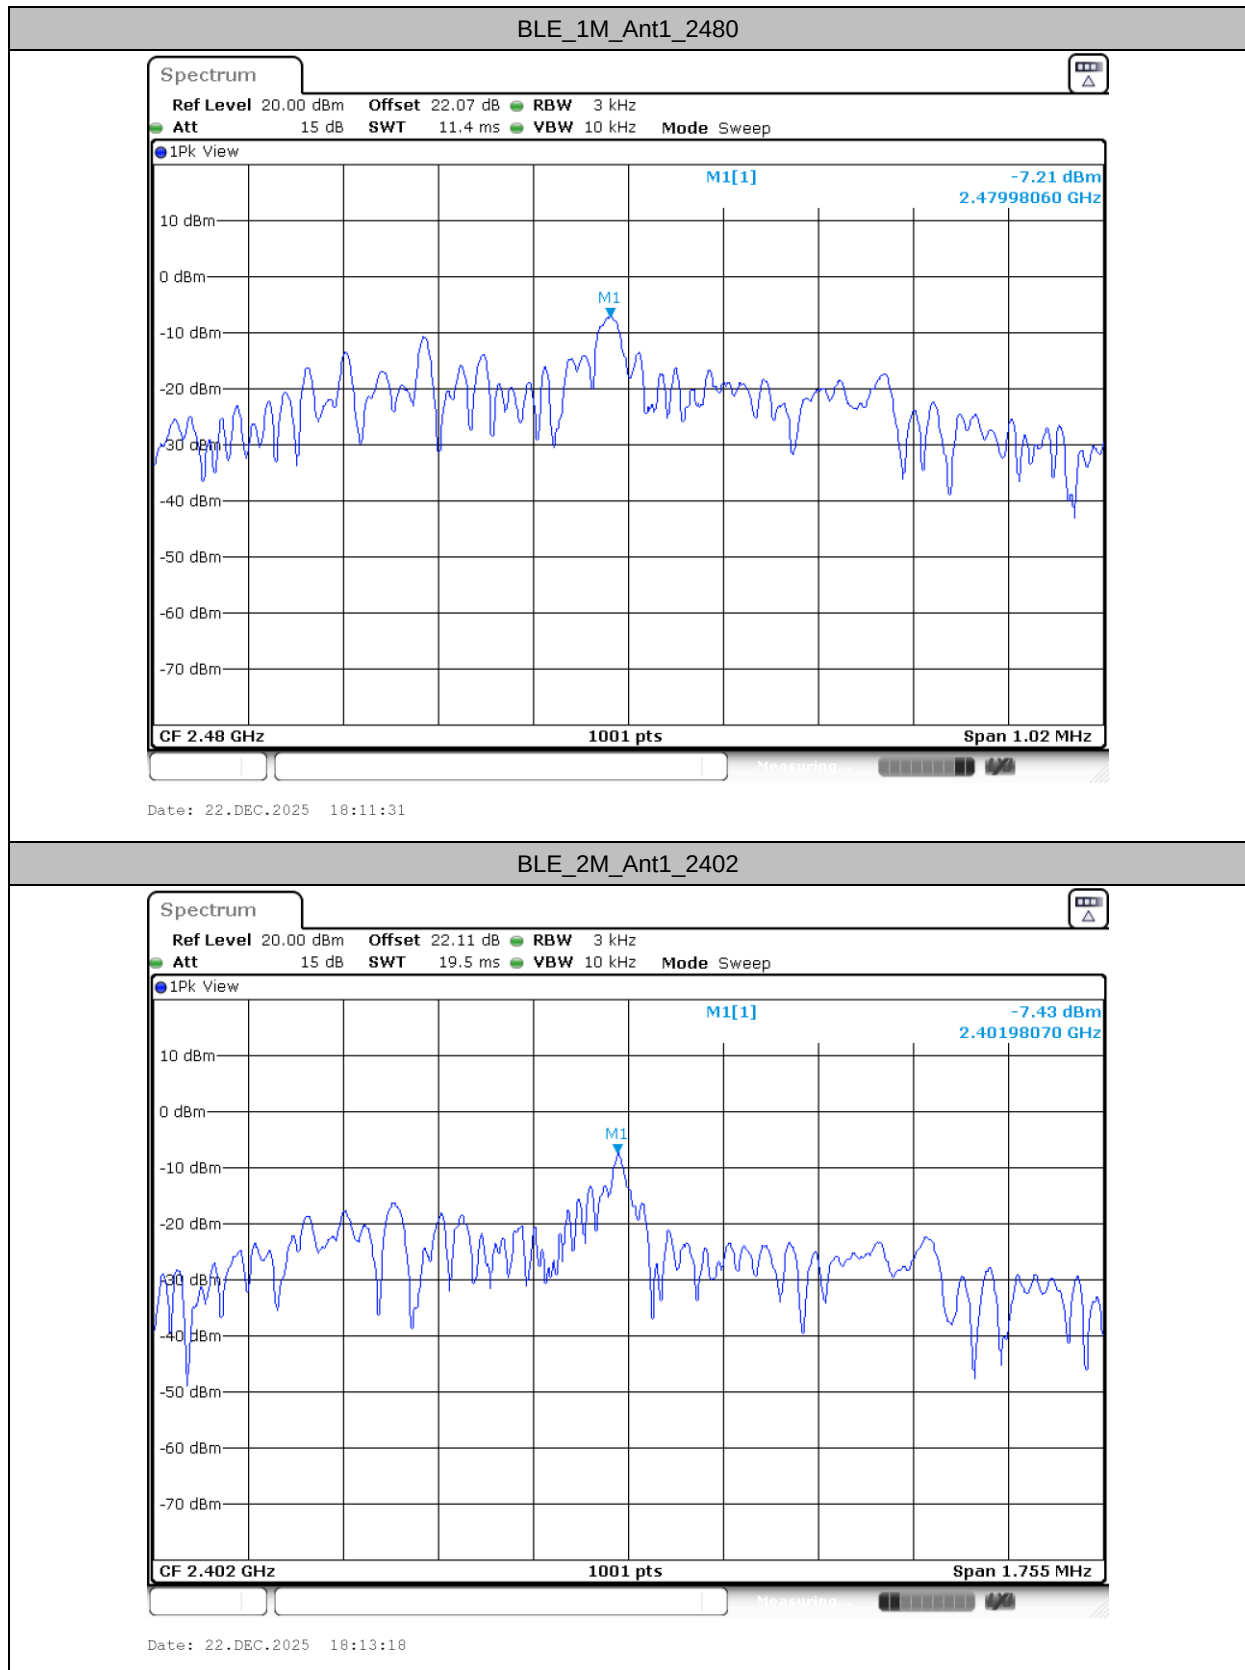

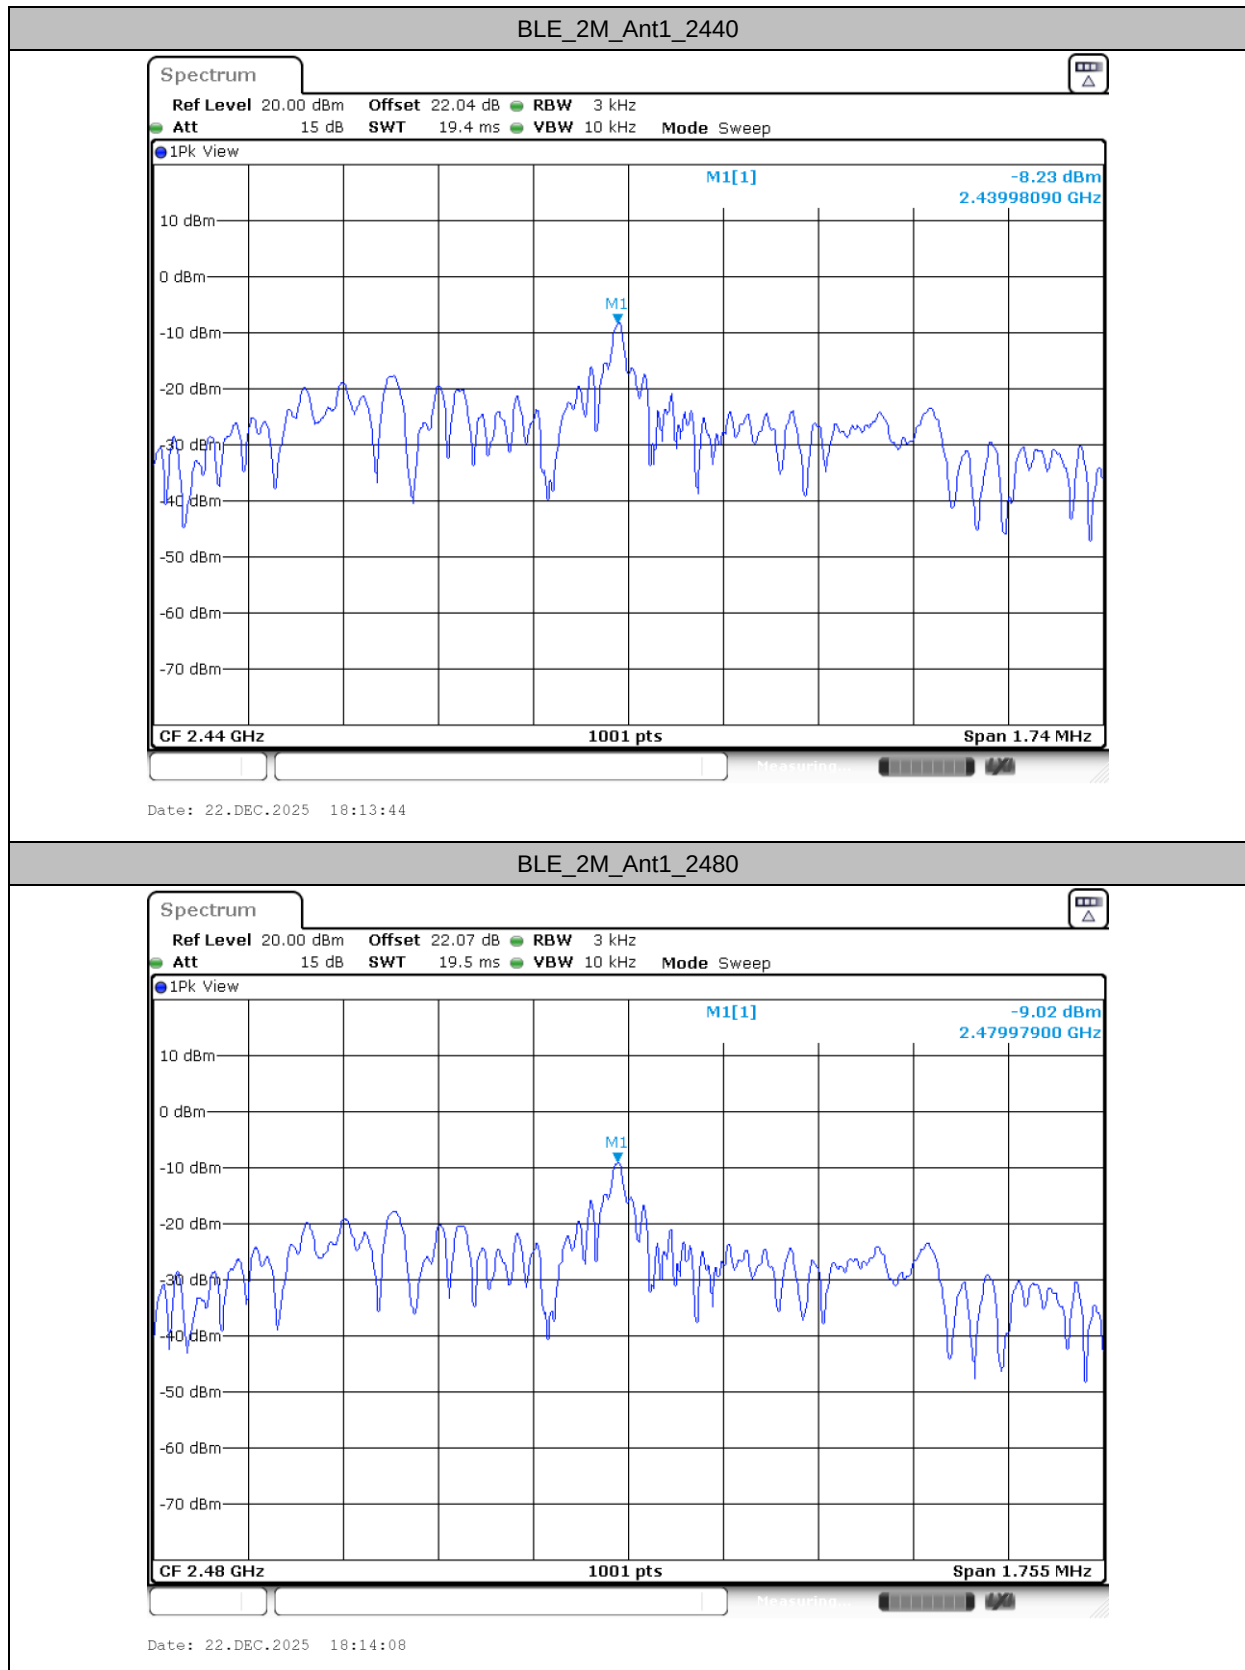



Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant1	2402	2401.96	-0.24
		2440	2439.97	-0.25
		2480	2479.99	-0.15
BLE_2M	Ant1	2402	2401.86	-0.22
		2440	2439.85	-0.26
		2480	2479.85	-0.15



Test Graphs



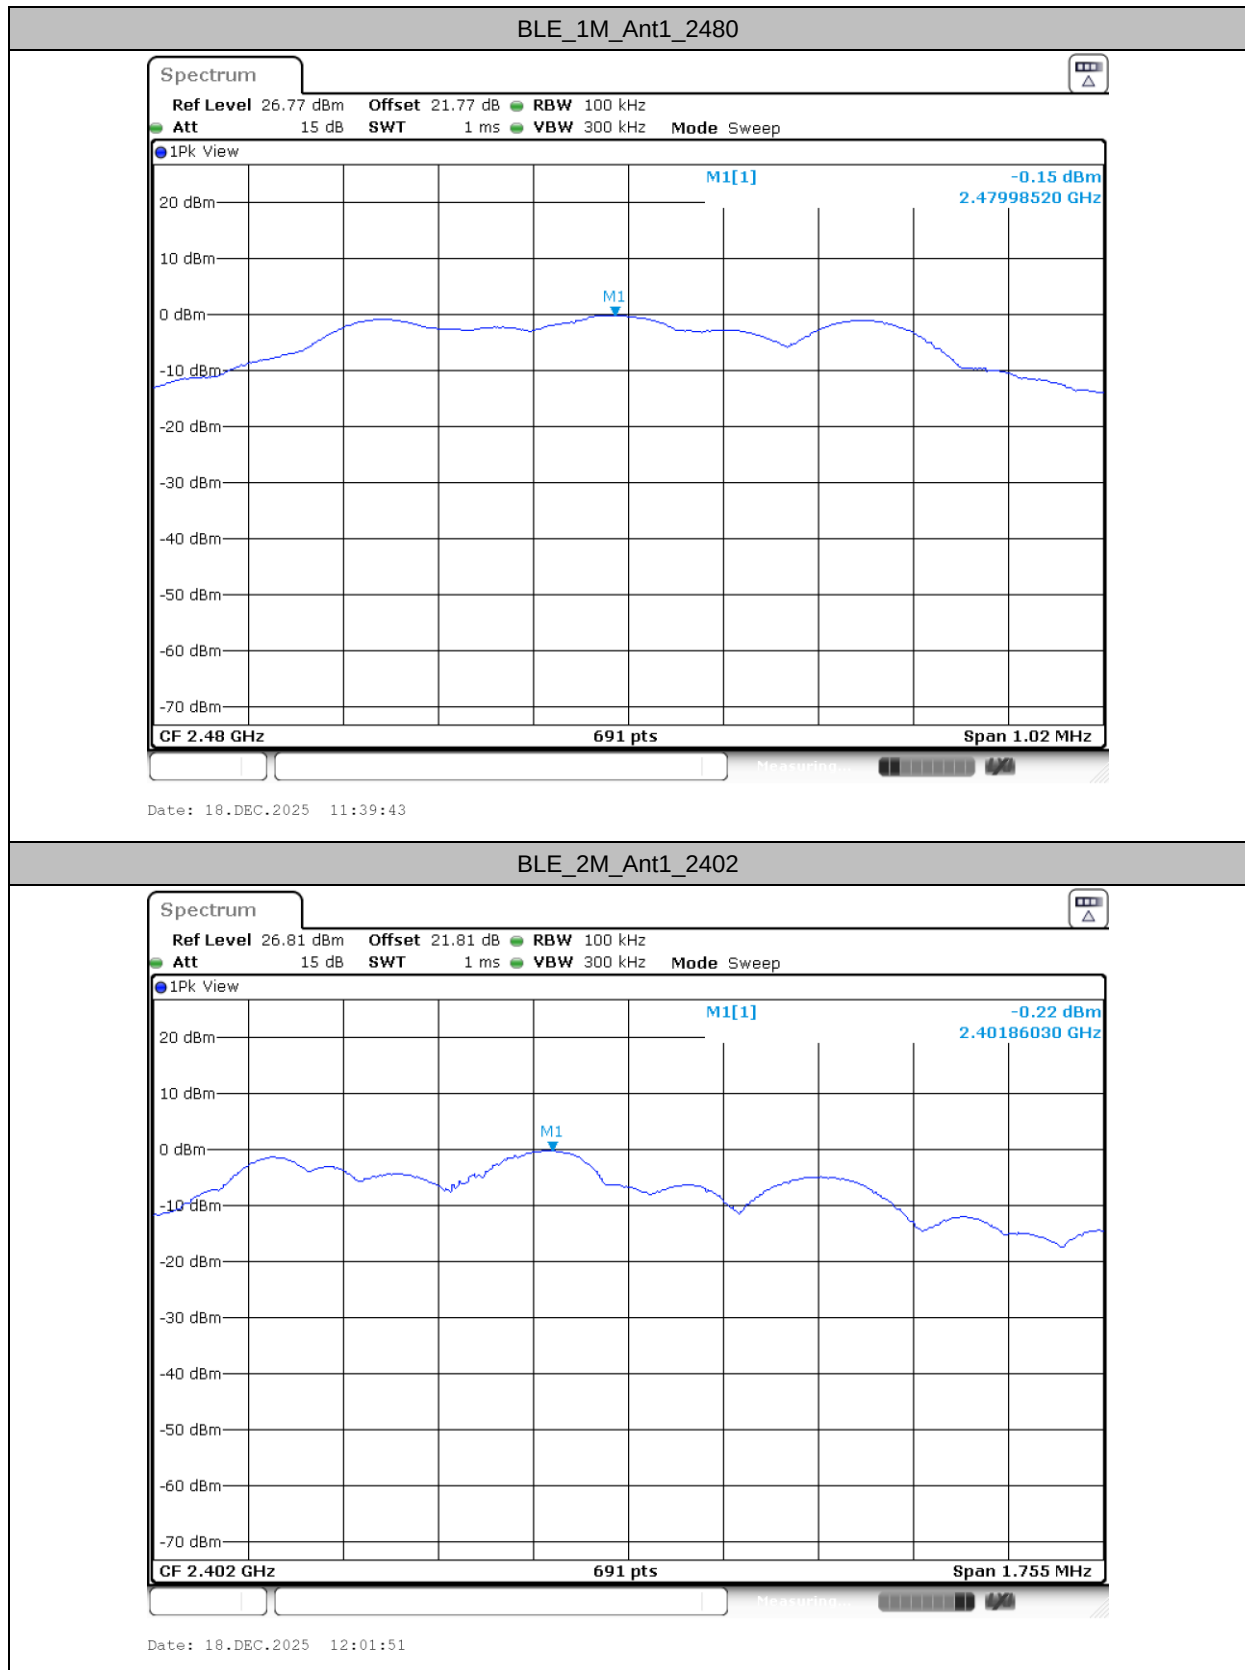

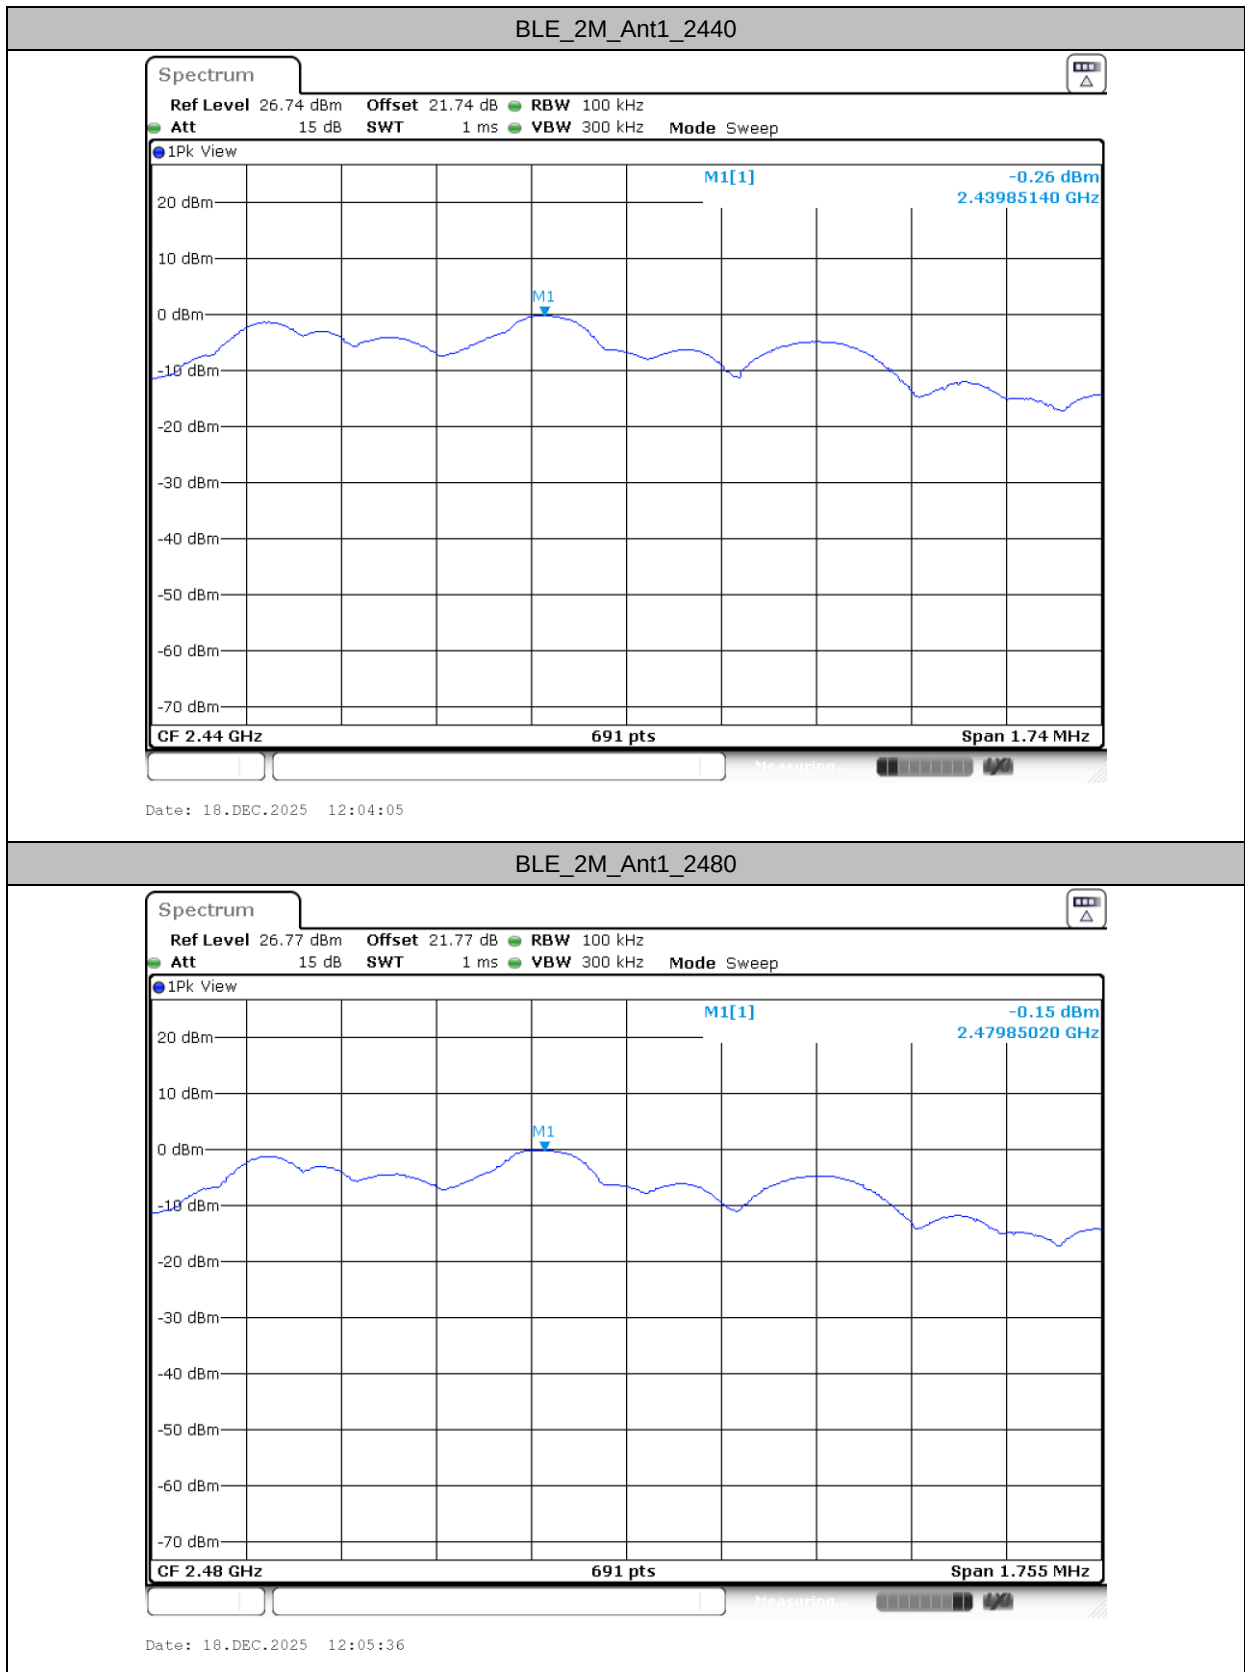




Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant1	Low	2402	-0.24	-37.07	≤-20.24	PASS
		High	2480	-0.15	-41.57	≤-20.15	PASS
BLE_2M	Ant1	Low	2402	-0.22	-34.43	≤-20.22	PASS
		High	2480	-0.15	-42.08	≤-20.15	PASS



Test Graphs

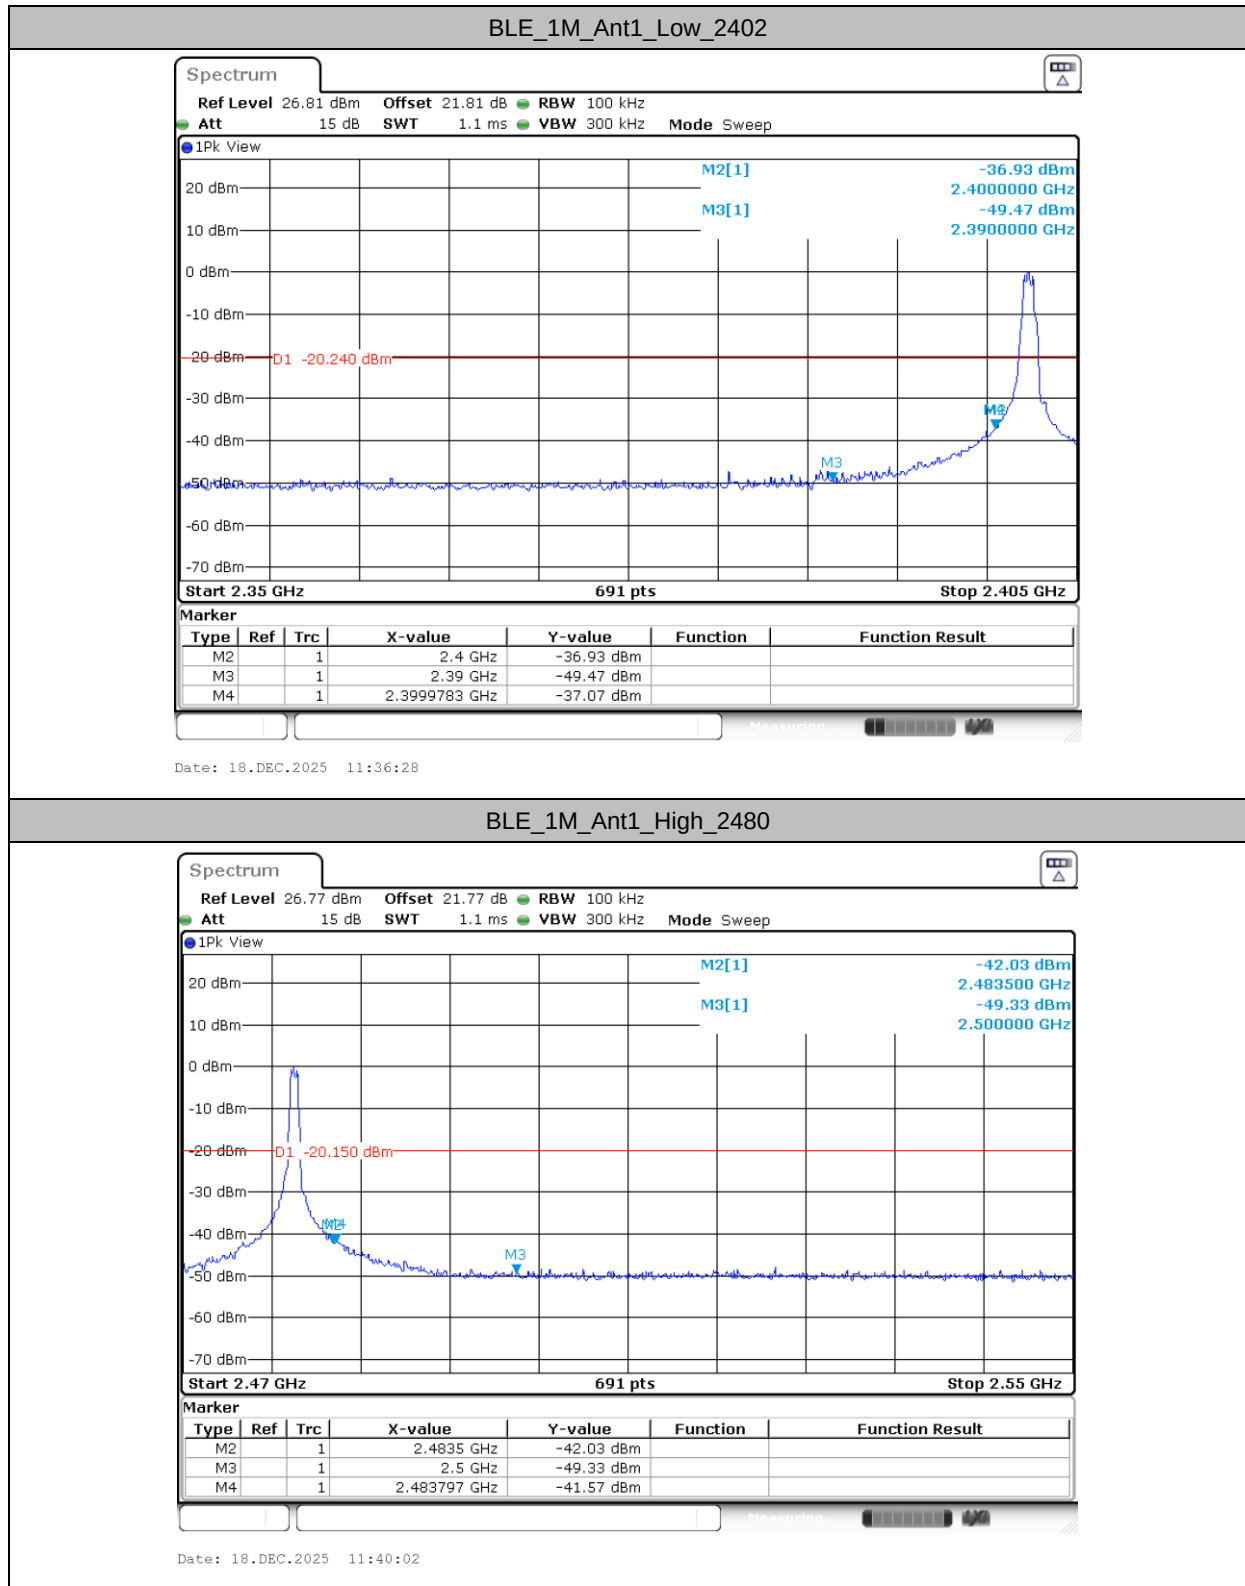

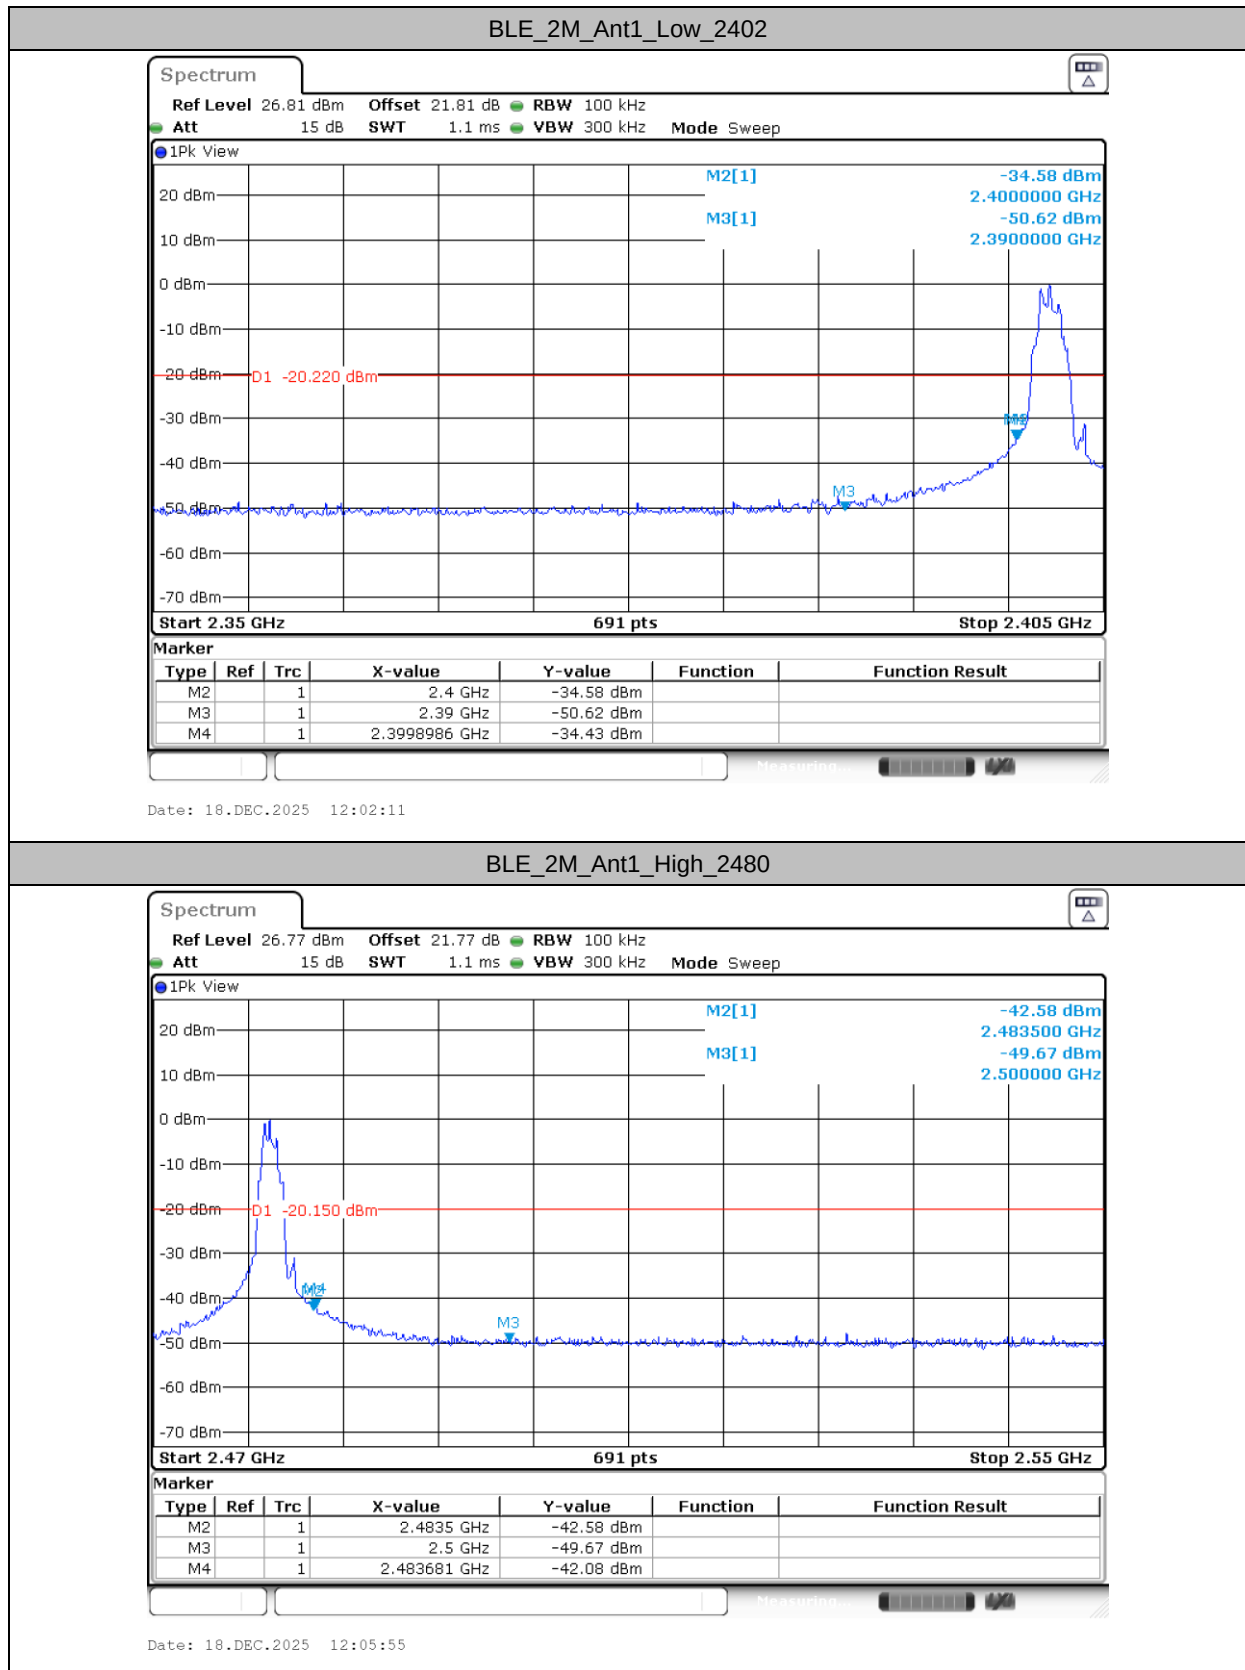




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant1	2402	30~1000	-0.24	-44.9	≤-20.24	PASS
			1000~26500	-0.24	-37.19	≤-20.24	PASS
		2440	30~1000	-0.25	-45.52	≤-20.25	PASS
			1000~26500	-0.25	-35.96	≤-20.25	PASS
		2480	30~1000	-0.15	-45.7	≤-20.15	PASS
			1000~26500	-0.15	-35.79	≤-20.15	PASS
BLE_2M	Ant1	2402	30~1000	-0.22	-44.65	≤-20.22	PASS
			1000~26500	-0.22	-36.08	≤-20.22	PASS
		2440	30~1000	-0.26	-45	≤-20.26	PASS
			1000~26500	-0.26	-36.56	≤-20.26	PASS
		2480	30~1000	-0.15	-44.93	≤-20.15	PASS
			1000~26500	-0.15	-35.66	≤-20.15	PASS





Test Graphs

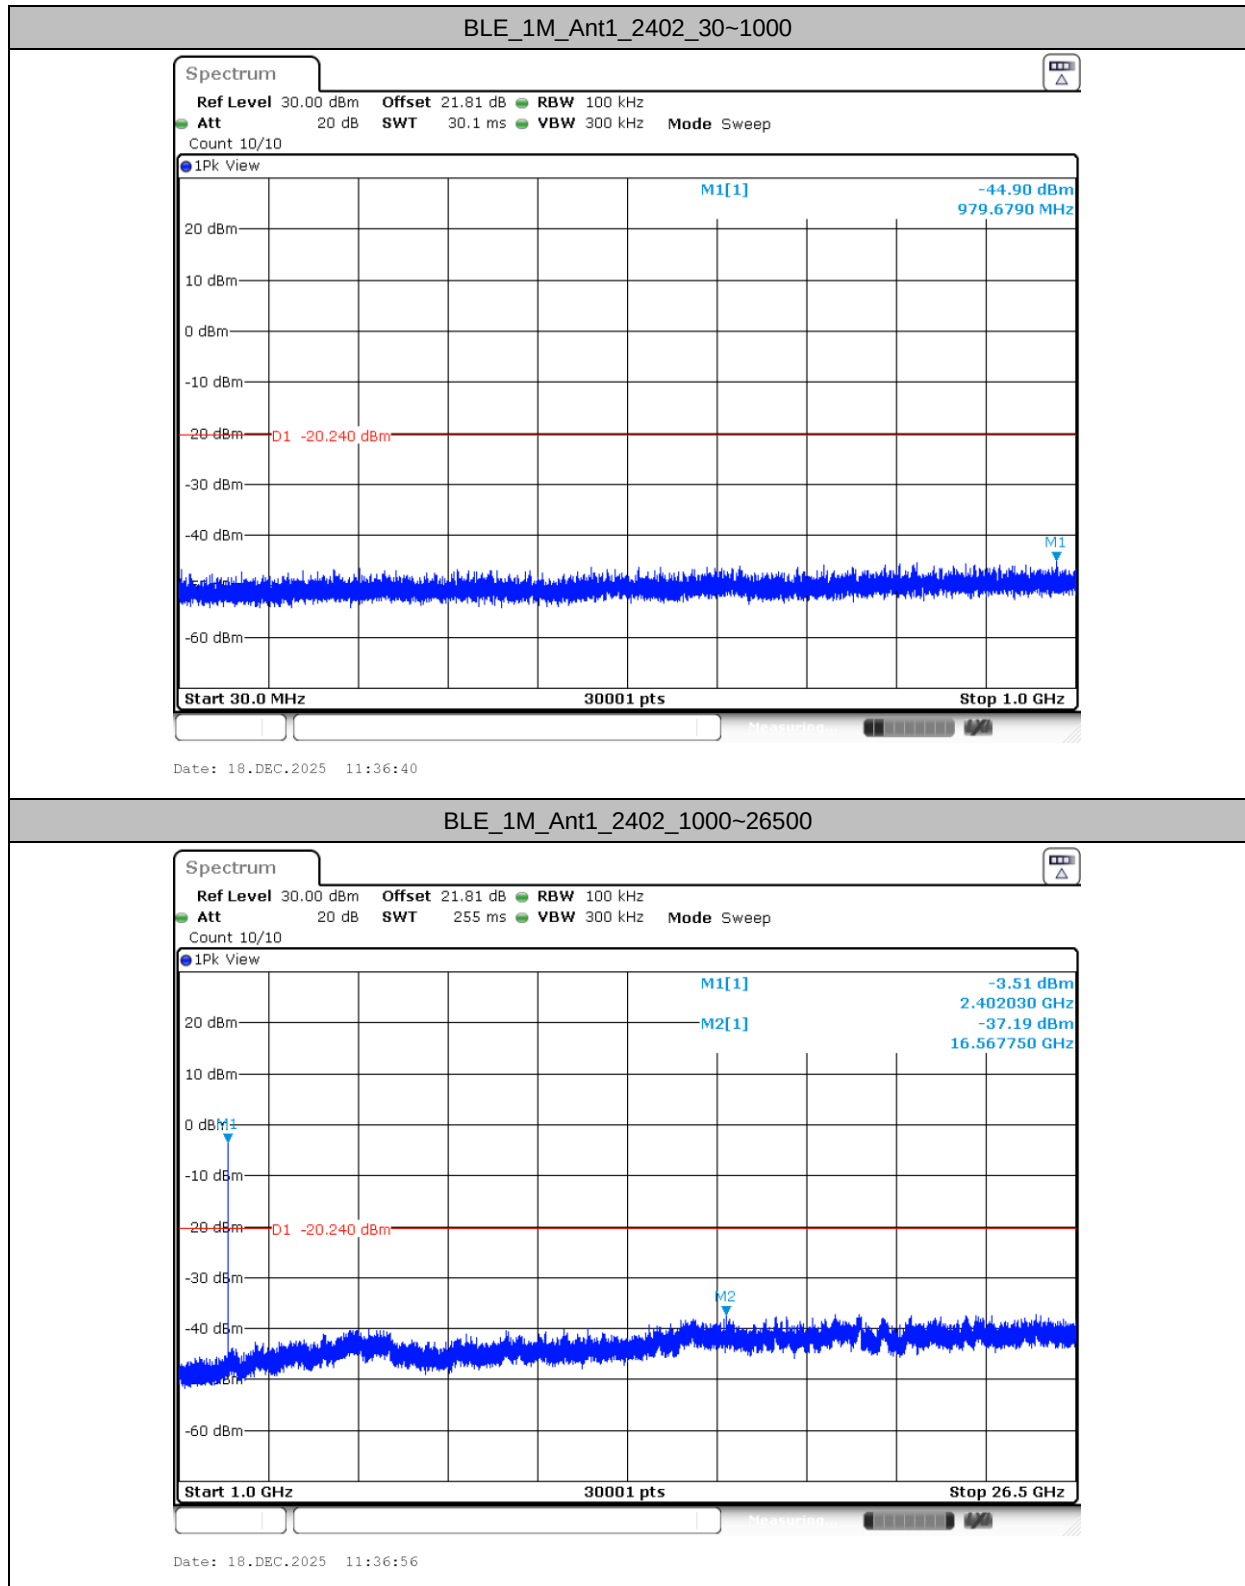


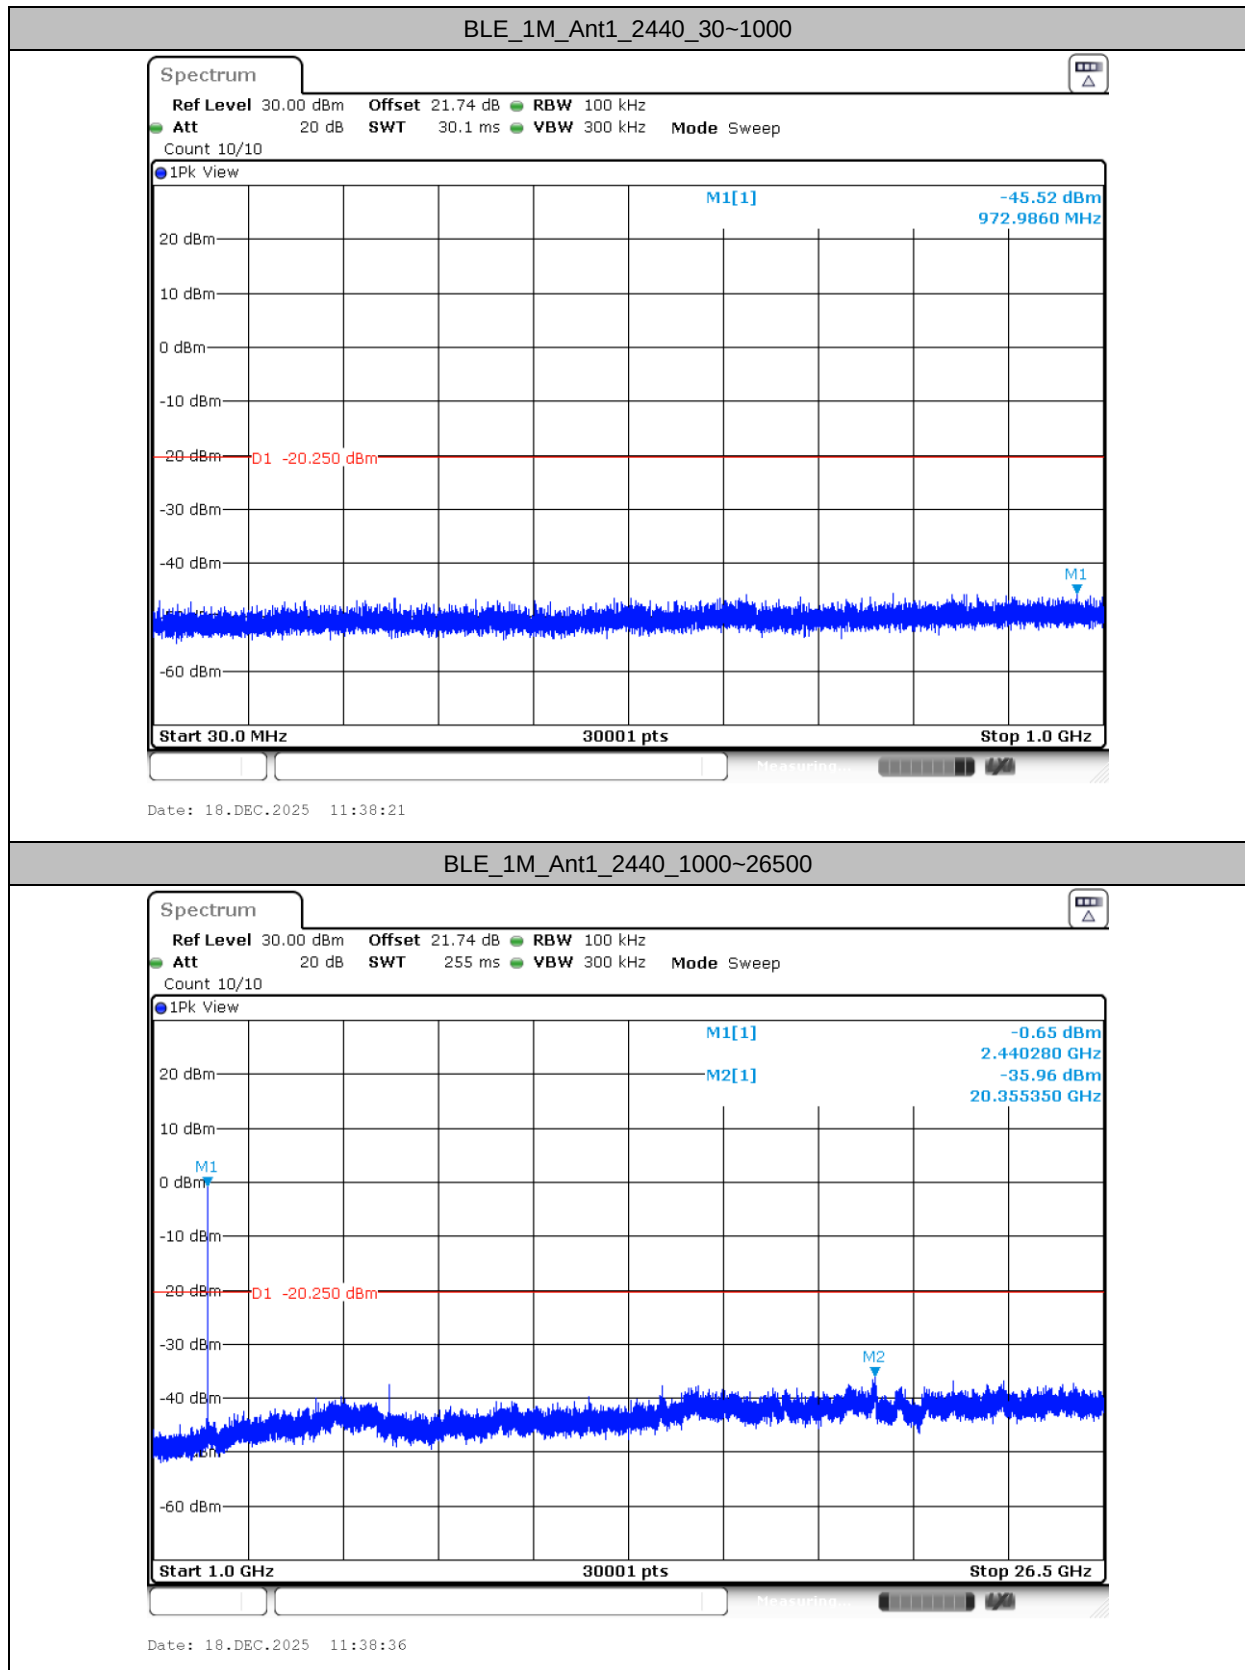

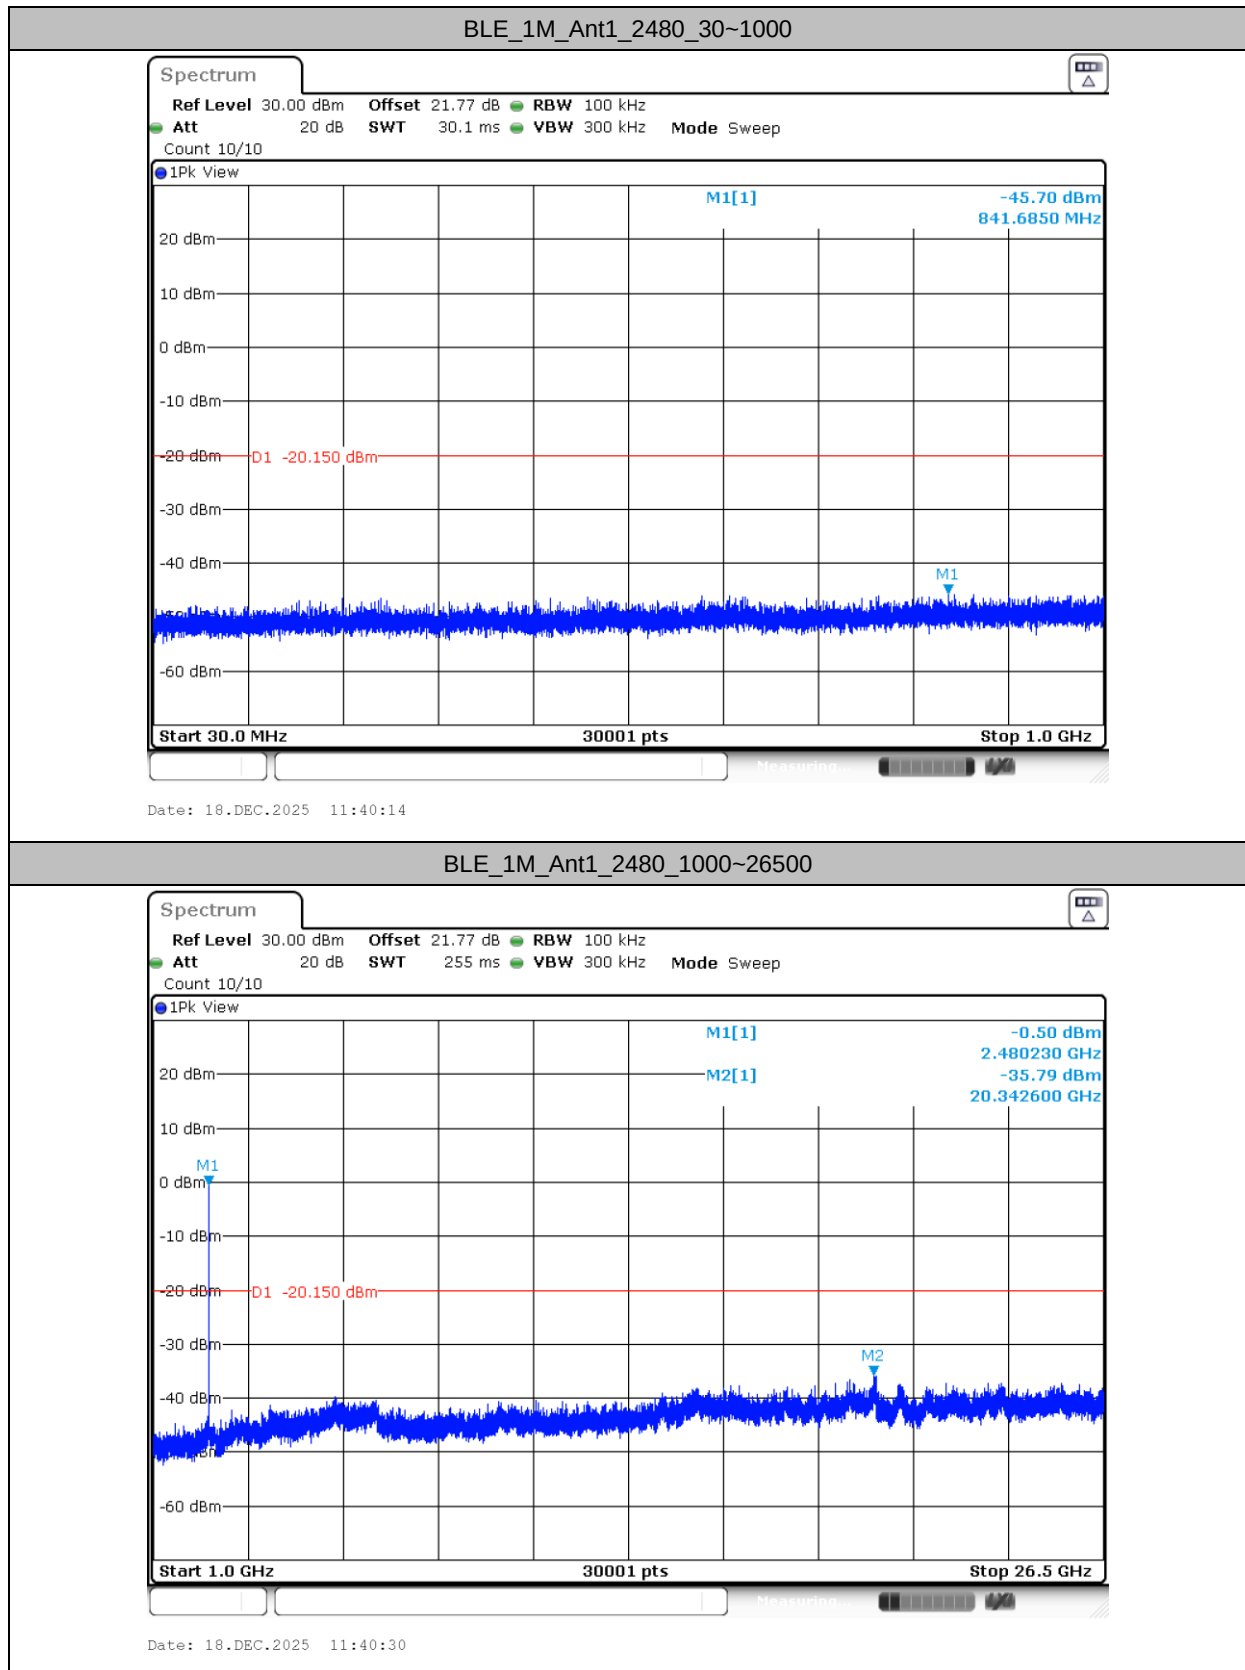

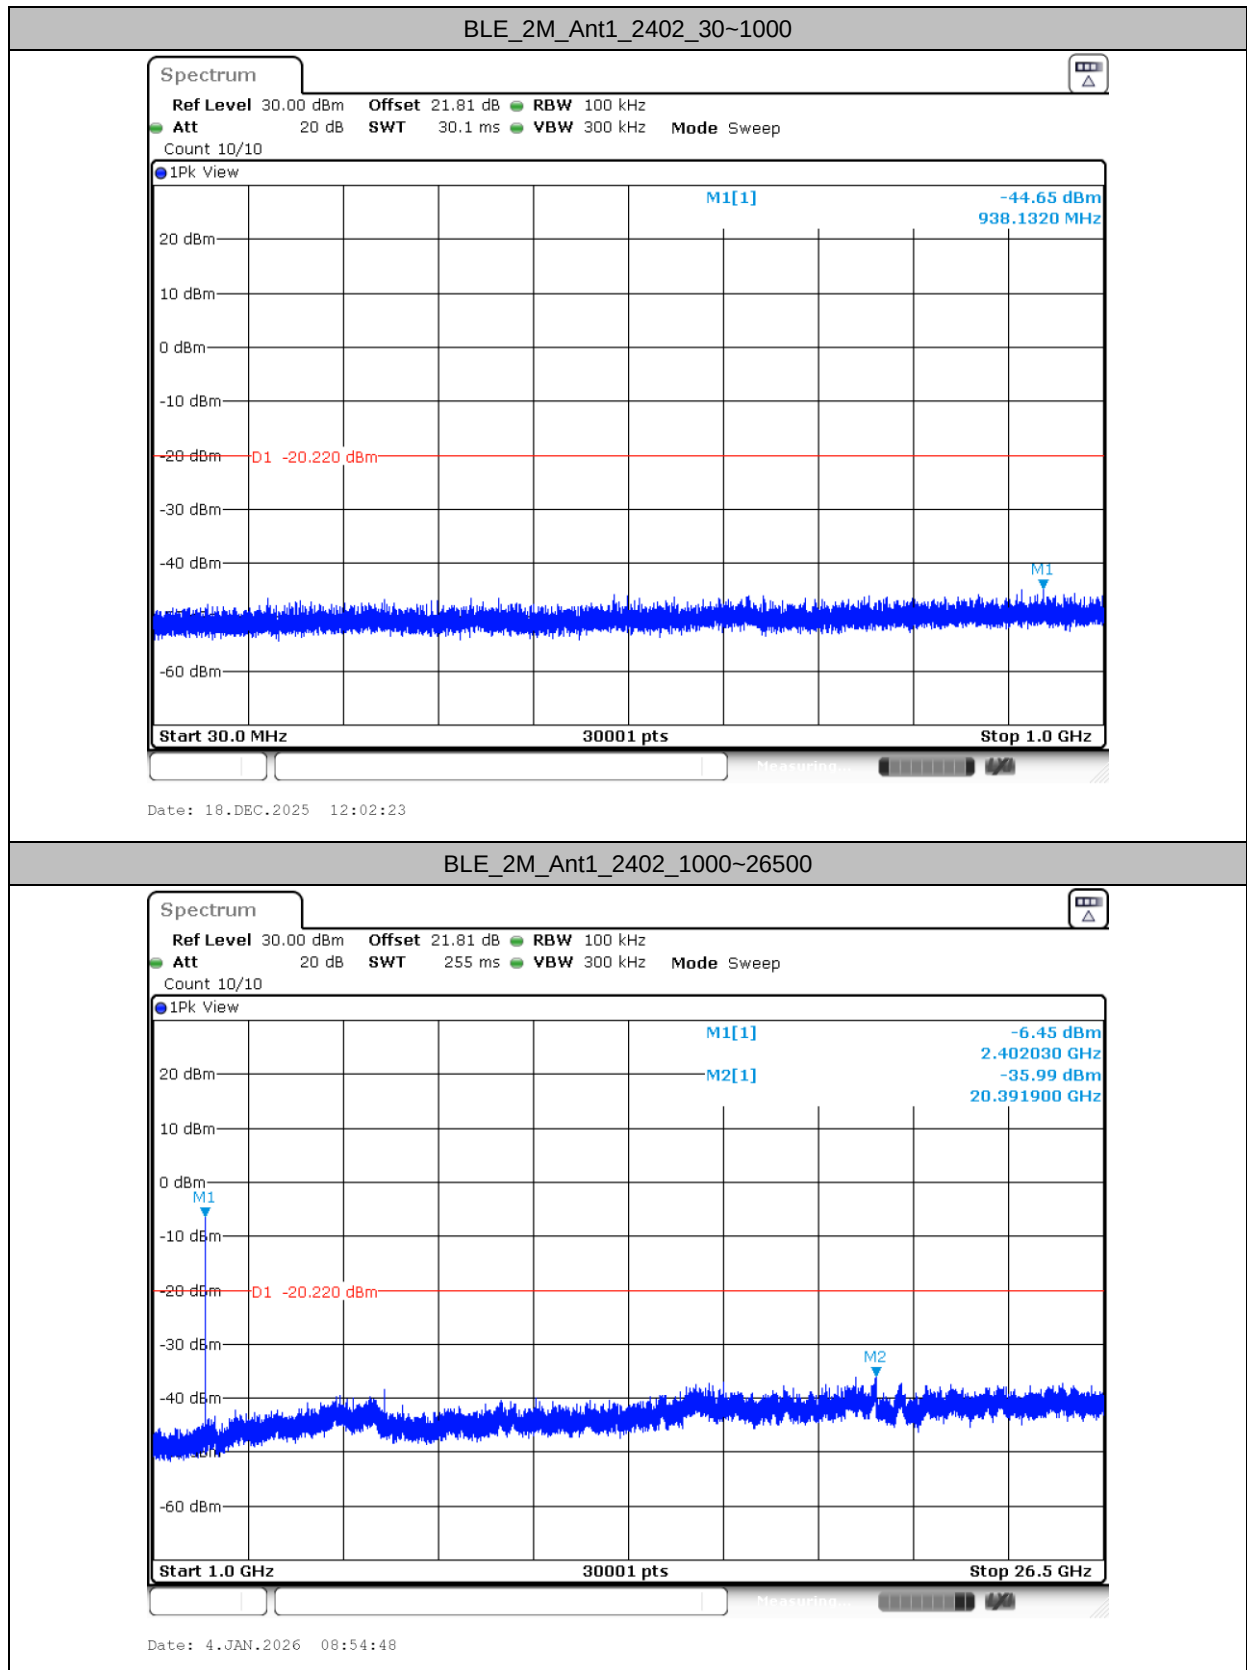

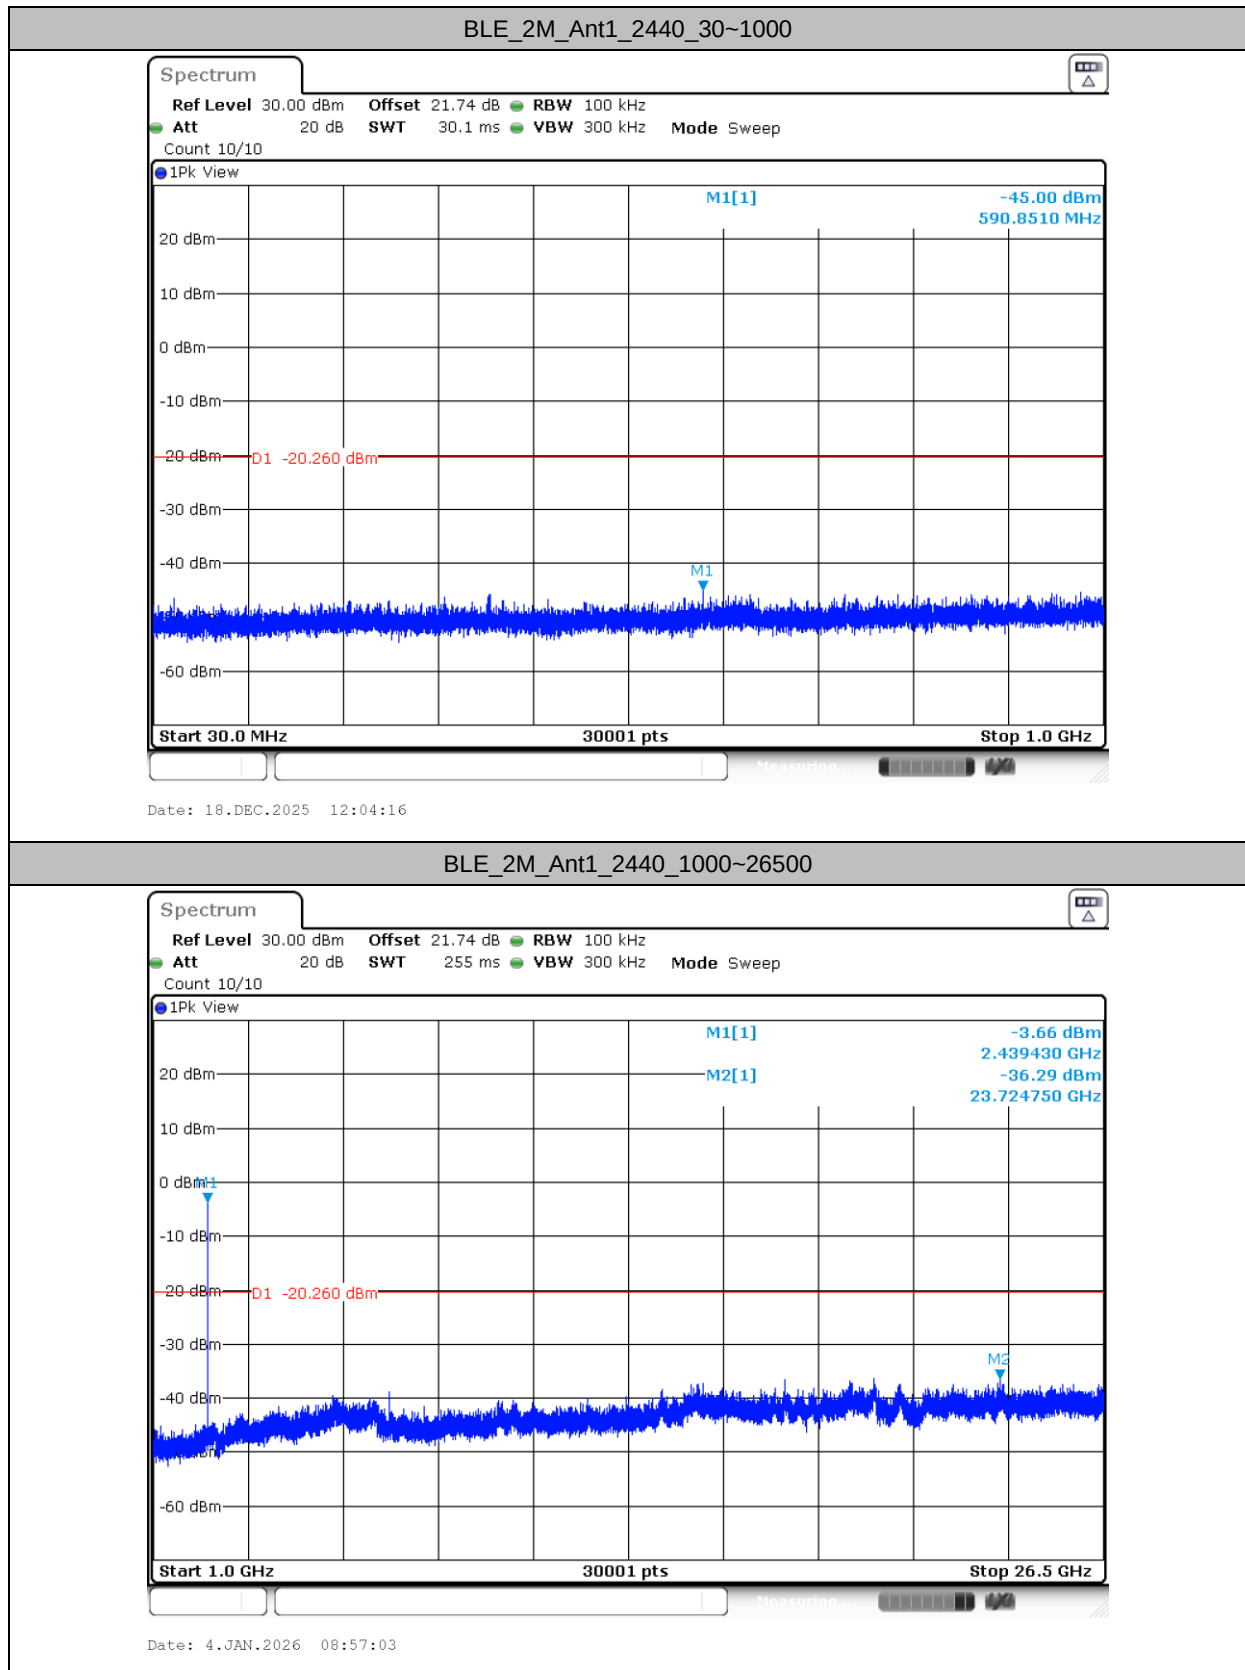

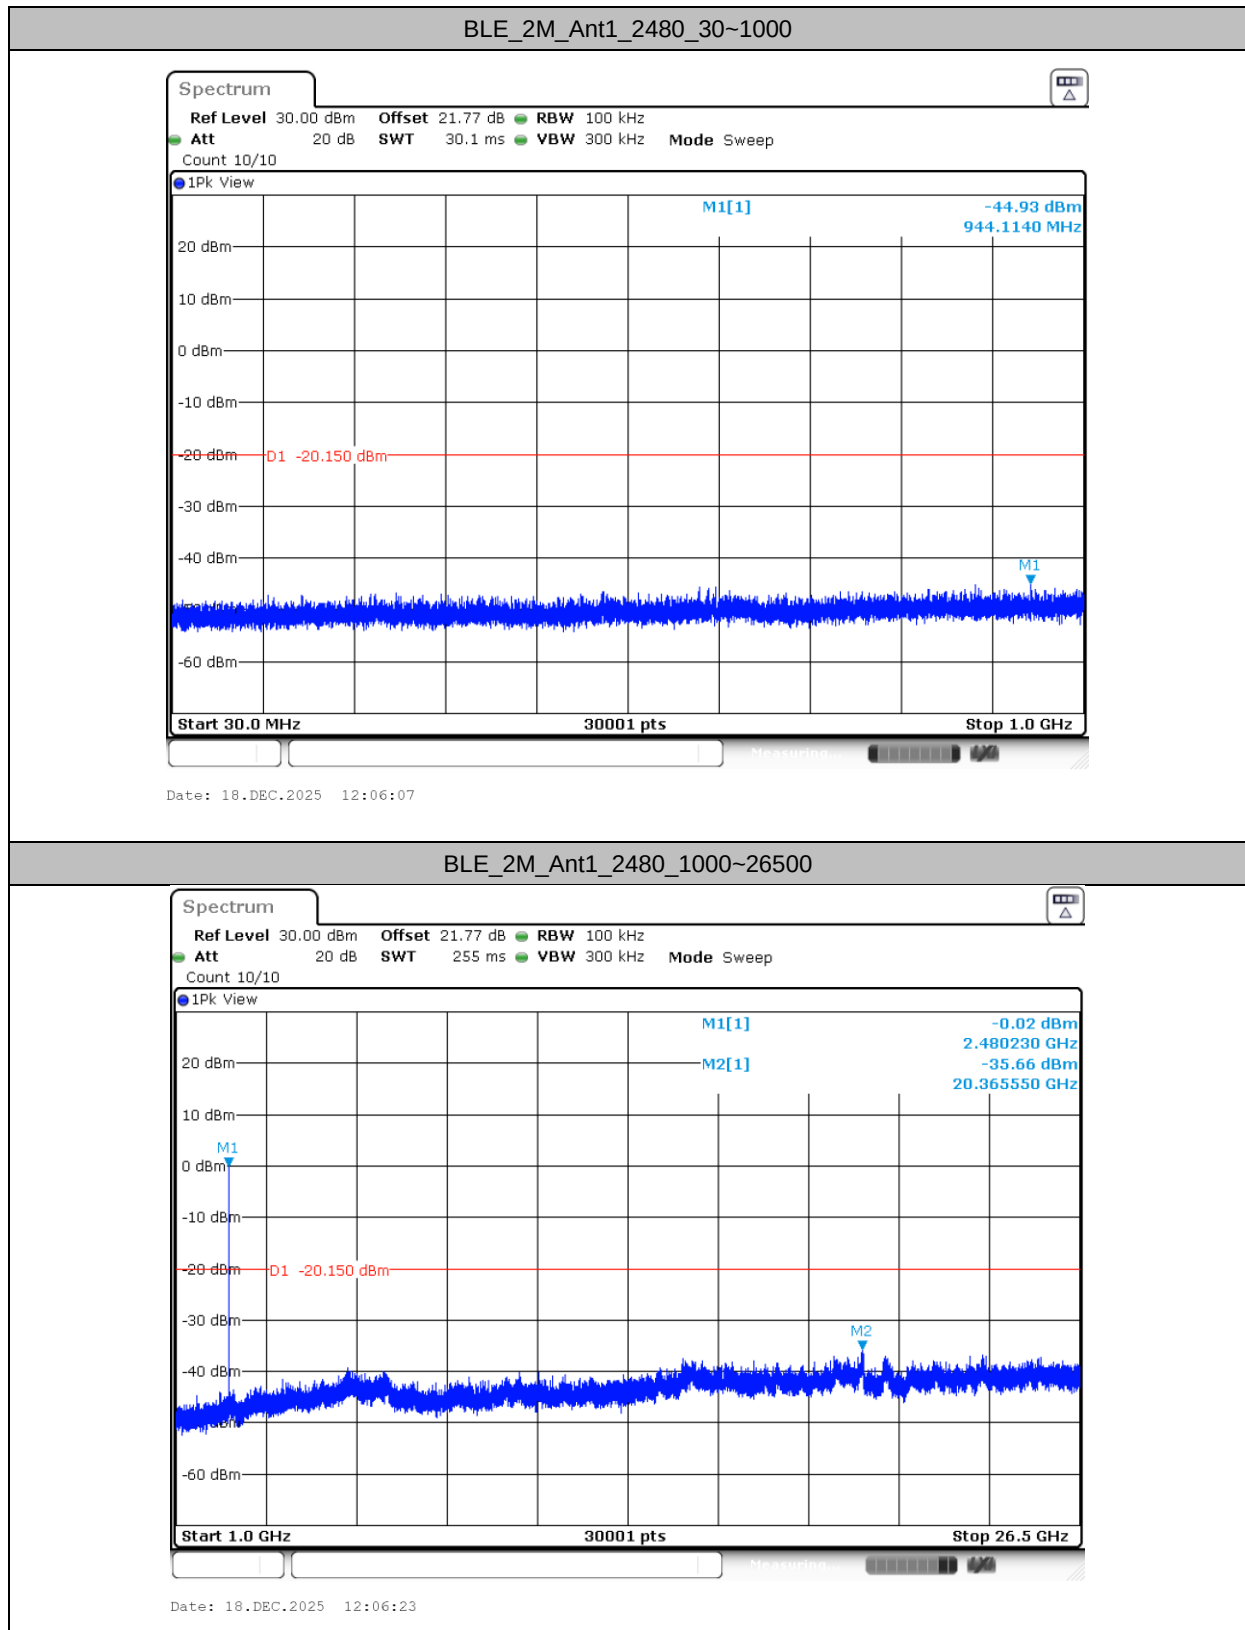



Appendix C. Radiated Spurious Emission

Test Engineer :	Jack Xia	Relative Humidity :	41 ~ 43 %
		Temperature :	20.2 ~ 21.5 °C




Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth-LE_GSKF	0	2402	1Mbps	-	-
Mode 2	2400-2483.5	SISO	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	SISO	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	SISO	Bluetooth-LE_GSKF	0	2402	2Mbps	-	-
Mode 5	2400-2483.5	SISO	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	SISO	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	0	2389.43	58.98	74.00	-15.02	V	PEAK	Pass	Band Edge
1	Bluetooth-LE_GSKF	0	7206.00	64.09	71.35	-7.26	V	Peak	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	7320.00	67.76	74.00	-6.24	H	PEAK	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.80	70.37	74.00	-3.63	V	PEAK	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	7440.00	68.62	74.00	-5.38	V	PEAK	Pass	Harmonic
4	Bluetooth-LE_GSKF	0	2389.69	59.46	74.00	-14.54	V	PEAK	Pass	Band Edge
4	Bluetooth-LE_GSKF	0	7206.00	63.96	68.25	-4.29	V	PEAK	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	7320.00	67.54	74.00	-6.46	H	PEAK	Pass	Harmonic
6	Bluetooth-LE_GSKF	39	2483.80	70.48	74.00	-3.52	V	PEAK	Pass	Band Edge
6	Bluetooth-LE_GSKF	39	7440.00	68.43	74.00	-5.57	H	PEAK	Pass	Harmonic

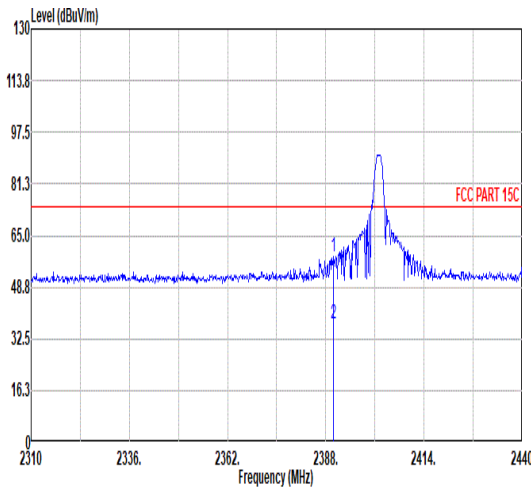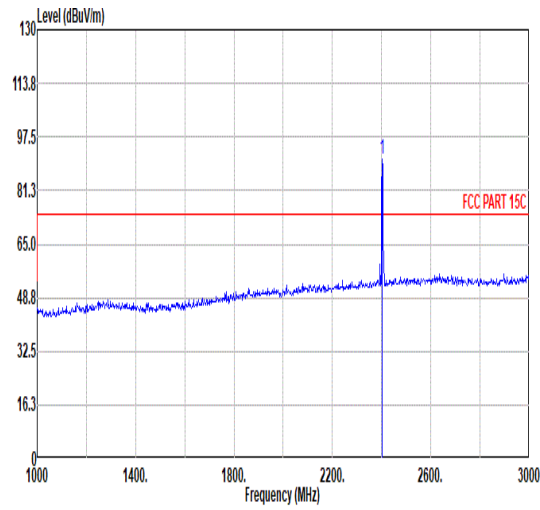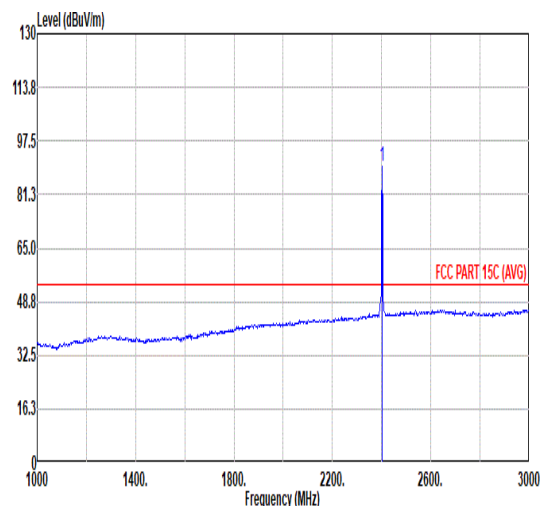

Mode	1																																																																				
	Band Edge																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																				
ANT	SISO																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>43.88</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>347</td><td>320</td><td>PEAK</td></tr><tr><td>2</td><td>2389.95</td><td>37.13</td><td>54.00</td><td>-16.87</td><td>22.63</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>347</td><td>320</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	58.38	74.00	-15.62	43.88	32.48	9.12	33.10	6.00	347	320	PEAK	2	2389.95	37.13	54.00	-16.87	22.63	32.48	9.12	33.10	6.00	347	320	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2389.95	58.38	74.00	-15.62	43.88	32.48	9.12	33.10	6.00	347	320	PEAK																																																									
2	2389.95	37.13	54.00	-16.87	22.63	32.48	9.12	33.10	6.00	347	320	AVERAGE																																																									
Avg																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>90.66</td><td>-----</td><td>-----</td><td>76.10</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>347</td><td>320</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.66	-----	-----	76.10	32.49	9.15	33.08	6.00	347	320	PEAK													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2402.00	90.66	-----	-----	76.10	32.49	9.15	33.08	6.00	347	320	PEAK																																																									
Avg	Blank																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>89.65</td><td>-----</td><td>-----</td><td>75.09</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>347</td><td>320</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	89.65	-----	-----	75.09	32.49	9.15	33.08	6.00	347	320	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2402.00	89.65	-----	-----	75.09	32.49	9.15	33.08	6.00	347	320	AVERAGE																																																									

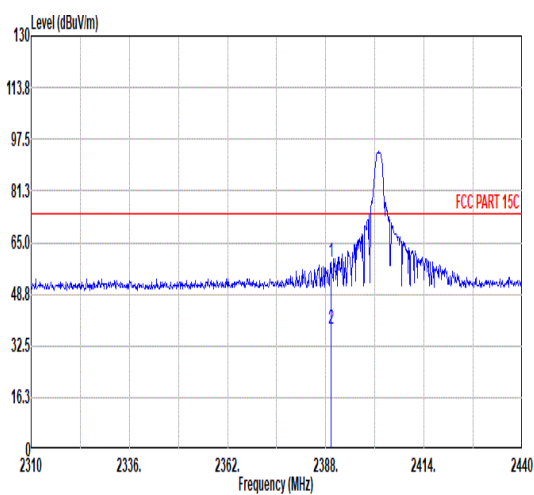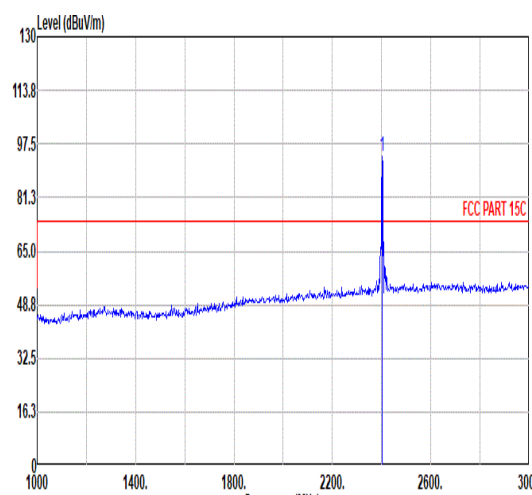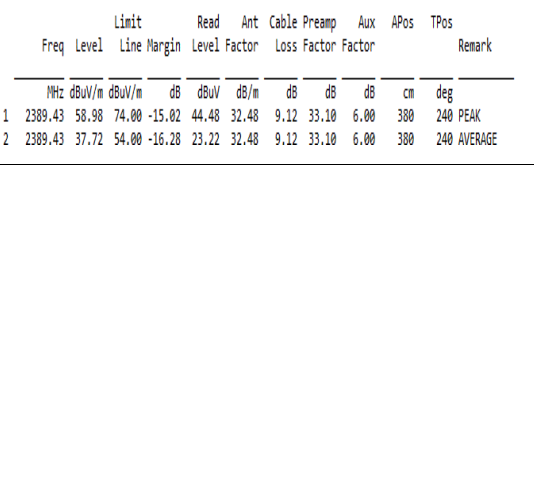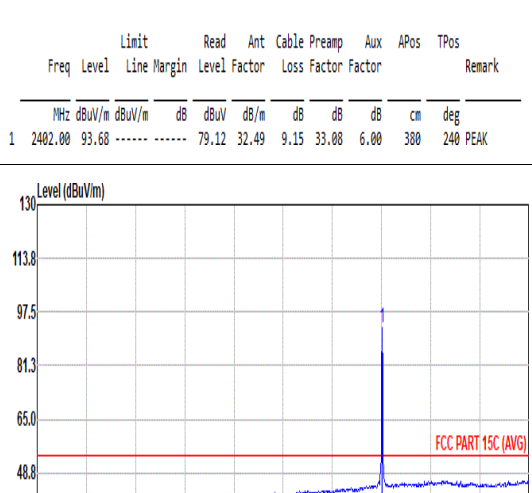

Mode	1																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																
ANT	SISO																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>58.98</td><td>74.00</td><td>-15.02</td><td>44.48</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>380</td><td>240</td><td>PEAK</td></tr><tr><td>2</td><td>2389.43</td><td>37.72</td><td>54.00</td><td>-16.28</td><td>23.22</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>380</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	58.98	74.00	-15.02	44.48	32.48	9.12	33.10	6.00	380	240	PEAK	2	2389.43	37.72	54.00	-16.28	23.22	32.48	9.12	33.10	6.00	380	240	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>93.68</td><td>-----</td><td>-----</td><td>79.12</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>380</td><td>240</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.68	-----	-----	79.12	32.49	9.15	33.08	6.00	380	240	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2389.43	58.98	74.00	-15.02	44.48	32.48	9.12	33.10	6.00	380	240	PEAK																																																																																																					
2	2389.43	37.72	54.00	-16.28	23.22	32.48	9.12	33.10	6.00	380	240	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2402.00	93.68	-----	-----	79.12	32.49	9.15	33.08	6.00	380	240	PEAK																																																																																																					
Avg																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>58.98</td><td>74.00</td><td>-15.02</td><td>44.48</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>380</td><td>240</td><td>PEAK</td></tr><tr><td>2</td><td>2389.43</td><td>37.72</td><td>54.00</td><td>-16.28</td><td>23.22</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>380</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	58.98	74.00	-15.02	44.48	32.48	9.12	33.10	6.00	380	240	PEAK	2	2389.43	37.72	54.00	-16.28	23.22	32.48	9.12	33.10	6.00	380	240	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.93</td><td>-----</td><td>-----</td><td>78.37</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>380</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.93	-----	-----	78.37	32.49	9.15	33.08	6.00	380	240	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2389.43	58.98	74.00	-15.02	44.48	32.48	9.12	33.10	6.00	380	240	PEAK																																																																																																					
2	2389.43	37.72	54.00	-16.28	23.22	32.48	9.12	33.10	6.00	380	240	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2402.00	92.93	-----	-----	78.37	32.49	9.15	33.08	6.00	380	240	AVERAGE																																																																																																					
Blank						<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.93</td><td>-----</td><td>-----</td><td>78.37</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>380</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.93	-----	-----	78.37	32.49	9.15	33.08	6.00	380	240	AVERAGE																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2402.00	92.93	-----	-----	78.37	32.49	9.15	33.08	6.00	380	240	AVERAGE																																																																																																					






Mode	1																																																																																																																																																																																																																																																																								
	Harmonic																																																																																																																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																																																																																																																																																																								
ANT	SISO																																																																																																																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																																		
Peak Avg																																																																																																																																																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>44.13</td><td>74.00</td><td>-29.87</td><td>62.78</td><td>34.40</td><td>11.39</td><td>64.44</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2 7207.00</td><td>64.08</td><td>71.66</td><td>-7.58</td><td>77.71</td><td>35.81</td><td>14.06</td><td>63.50</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3 9609.00</td><td>52.71</td><td>71.66</td><td>-18.95</td><td>60.81</td><td>36.82</td><td>16.38</td><td>61.30</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4 12010.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>55.71</td><td>38.00</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>5 12010.00</td><td>30.42</td><td>54.00</td><td>-23.58</td><td>34.45</td><td>38.00</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>0</td><td>Average</td></tr><tr><td>6 14410.00</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>55.21</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>100</td><td>13</td><td>Peak</td></tr><tr><td>7 14410.00</td><td>31.18</td><td>54.00</td><td>-22.82</td><td>33.95</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>100</td><td>13</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	44.13	74.00	-29.87	62.78	34.40	11.39	64.44	0.00	--	--	PEAK	2 7207.00	64.08	71.66	-7.58	77.71	35.81	14.06	63.50	0.00	--	--	PEAK	3 9609.00	52.71	71.66	-18.95	60.81	36.82	16.38	61.30	0.00	--	--	PEAK	4 12010.00	51.68	74.00	-22.32	55.71	38.00	18.29	61.12	0.00	100	0	PEAK	5 12010.00	30.42	54.00	-23.58	34.45	38.00	18.29	61.12	0.00	100	0	Average	6 14410.00	52.44	74.00	-21.56	55.21	39.32	20.11	62.20	0.00	100	13	Peak	7 14410.00	31.18	54.00	-22.82	33.95	39.32	20.11	62.20	0.00	100	13	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4804.00</td><td>46.33</td><td>74.00</td><td>-27.67</td><td>64.98</td><td>34.40</td><td>11.39</td><td>64.44</td><td>0.00</td><td>292</td><td>0</td><td>PEAK</td></tr><tr><td>2 4804.00</td><td>25.07</td><td>54.00</td><td>-28.93</td><td>43.72</td><td>34.40</td><td>11.39</td><td>64.44</td><td>0.00</td><td>292</td><td>0</td><td>Average</td></tr><tr><td>3 7206.00</td><td>64.09</td><td>71.35</td><td>-7.26</td><td>77.72</td><td>35.81</td><td>14.06</td><td>63.50</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4 9607.00</td><td>51.62</td><td>71.35</td><td>-19.73</td><td>59.73</td><td>36.81</td><td>16.38</td><td>61.30</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5 12009.00</td><td>51.26</td><td>74.00</td><td>-22.74</td><td>55.29</td><td>38.00</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>327</td><td>Peak</td></tr><tr><td>6 12009.00</td><td>34.44</td><td>54.00</td><td>-19.56</td><td>38.47</td><td>38.00</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>327</td><td>Average</td></tr><tr><td>7 14412.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>55.00</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>300</td><td>293</td><td>Peak</td></tr><tr><td>8 14412.00</td><td>31.77</td><td>54.00</td><td>-22.23</td><td>34.54</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>300</td><td>293</td><td>Average</td></tr><tr><td>9 16814.00</td><td>49.15</td><td>71.35</td><td>-22.20</td><td>48.09</td><td>41.99</td><td>21.91</td><td>62.84</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4804.00	46.33	74.00	-27.67	64.98	34.40	11.39	64.44	0.00	292	0	PEAK	2 4804.00	25.07	54.00	-28.93	43.72	34.40	11.39	64.44	0.00	292	0	Average	3 7206.00	64.09	71.35	-7.26	77.72	35.81	14.06	63.50	0.00	--	--	Peak	4 9607.00	51.62	71.35	-19.73	59.73	36.81	16.38	61.30	0.00	--	--	Peak	5 12009.00	51.26	74.00	-22.74	55.29	38.00	18.29	61.12	0.00	100	327	Peak	6 12009.00	34.44	54.00	-19.56	38.47	38.00	18.29	61.12	0.00	100	327	Average	7 14412.00	53.03	74.00	-20.97	55.00	39.32	20.11	62.20	0.00	300	293	Peak	8 14412.00	31.77	54.00	-22.23	34.54	39.32	20.11	62.20	0.00	300	293	Average	9 16814.00	49.15	71.35	-22.20	48.09	41.99	21.91	62.84	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																															
1 4804.00	44.13	74.00	-29.87	62.78	34.40	11.39	64.44	0.00	--	--	PEAK																																																																																																																																																																																																																																																														
2 7207.00	64.08	71.66	-7.58	77.71	35.81	14.06	63.50	0.00	--	--	PEAK																																																																																																																																																																																																																																																														
3 9609.00	52.71	71.66	-18.95	60.81	36.82	16.38	61.30	0.00	--	--	PEAK																																																																																																																																																																																																																																																														
4 12010.00	51.68	74.00	-22.32	55.71	38.00	18.29	61.12	0.00	100	0	PEAK																																																																																																																																																																																																																																																														
5 12010.00	30.42	54.00	-23.58	34.45	38.00	18.29	61.12	0.00	100	0	Average																																																																																																																																																																																																																																																														
6 14410.00	52.44	74.00	-21.56	55.21	39.32	20.11	62.20	0.00	100	13	Peak																																																																																																																																																																																																																																																														
7 14410.00	31.18	54.00	-22.82	33.95	39.32	20.11	62.20	0.00	100	13	Average																																																																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																															
1 4804.00	46.33	74.00	-27.67	64.98	34.40	11.39	64.44	0.00	292	0	PEAK																																																																																																																																																																																																																																																														
2 4804.00	25.07	54.00	-28.93	43.72	34.40	11.39	64.44	0.00	292	0	Average																																																																																																																																																																																																																																																														
3 7206.00	64.09	71.35	-7.26	77.72	35.81	14.06	63.50	0.00	--	--	Peak																																																																																																																																																																																																																																																														
4 9607.00	51.62	71.35	-19.73	59.73	36.81	16.38	61.30	0.00	--	--	Peak																																																																																																																																																																																																																																																														
5 12009.00	51.26	74.00	-22.74	55.29	38.00	18.29	61.12	0.00	100	327	Peak																																																																																																																																																																																																																																																														
6 12009.00	34.44	54.00	-19.56	38.47	38.00	18.29	61.12	0.00	100	327	Average																																																																																																																																																																																																																																																														
7 14412.00	53.03	74.00	-20.97	55.00	39.32	20.11	62.20	0.00	300	293	Peak																																																																																																																																																																																																																																																														
8 14412.00	31.77	54.00	-22.23	34.54	39.32	20.11	62.20	0.00	300	293	Average																																																																																																																																																																																																																																																														
9 16814.00	49.15	71.35	-22.20	48.09	41.99	21.91	62.84	0.00	--	--	Peak																																																																																																																																																																																																																																																														

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB






Mode	2																																																																																																																																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																																																																																																																																																																							
ANT	SISO																																																																																																																																																																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																																																																																	
Peak Avg																																																																																																																																																																																																																																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4881.00</td><td>48.36</td><td>74.00</td><td>-25.64</td><td>66.68</td><td>34.40</td><td>11.55</td><td>64.27</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>2</td><td>4881.00</td><td>27.10</td><td>54.00</td><td>-26.90</td><td>45.42</td><td>34.40</td><td>11.55</td><td>64.27</td><td>0.00</td><td>100</td><td>216</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>67.76</td><td>74.00</td><td>-6.24</td><td>81.14</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>143</td><td>342</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>46.50</td><td>54.00</td><td>-7.50</td><td>59.88</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>143</td><td>342</td><td>AVERAGE</td></tr><tr><td>5</td><td>9760.00</td><td>54.44</td><td>70.71</td><td>-16.27</td><td>62.22</td><td>37.02</td><td>16.51</td><td>61.31</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>6</td><td>12199.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>57.61</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>100</td><td>355</td><td>PEAK</td></tr><tr><td>7</td><td>12199.00</td><td>32.55</td><td>54.00</td><td>-21.45</td><td>36.35</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>100</td><td>355</td><td>Average</td></tr><tr><td>8</td><td>14641.00</td><td>52.18</td><td>70.71</td><td>-18.53</td><td>54.56</td><td>39.64</td><td>20.29</td><td>62.31</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4881.00	48.36	74.00	-25.64	66.68	34.40	11.55	64.27	0.00	100	216	PEAK	2	4881.00	27.10	54.00	-26.90	45.42	34.40	11.55	64.27	0.00	100	216	Average	3	7320.00	67.76	74.00	-6.24	81.14	35.84	14.19	63.41	0.00	143	342	PEAK	4	7320.00	46.50	54.00	-7.50	59.88	35.84	14.19	63.41	0.00	143	342	AVERAGE	5	9760.00	54.44	70.71	-16.27	62.22	37.02	16.51	61.31	0.00	--	--	PEAK	6	12199.00	53.81	74.00	-20.19	57.61	38.90	18.42	61.12	0.00	100	355	PEAK	7	12199.00	32.55	54.00	-21.45	36.35	38.90	18.42	61.12	0.00	100	355	Average	8	14641.00	52.18	70.71	-18.53	54.56	39.64	20.29	62.31	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4879.00</td><td>46.92</td><td>74.00</td><td>-27.08</td><td>65.25</td><td>34.40</td><td>11.55</td><td>64.28</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>67.23</td><td>74.00</td><td>-6.77</td><td>80.61</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>300</td><td>18</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>45.97</td><td>54.00</td><td>-8.03</td><td>59.35</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>300</td><td>18</td><td>AVERAGE</td></tr><tr><td>4</td><td>9759.00</td><td>49.39</td><td>72.95</td><td>-23.56</td><td>57.17</td><td>37.02</td><td>16.51</td><td>61.31</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>12199.00</td><td>50.98</td><td>74.00</td><td>-23.02</td><td>54.78</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>300</td><td>62</td><td>PEAK</td></tr><tr><td>6</td><td>12199.00</td><td>29.72</td><td>54.00</td><td>-24.28</td><td>33.52</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>300</td><td>62</td><td>Average</td></tr><tr><td>7</td><td>14640.00</td><td>49.39</td><td>72.95</td><td>-23.56</td><td>51.77</td><td>39.64</td><td>20.29</td><td>62.31</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>8</td><td>17080.00</td><td>52.72</td><td>72.95</td><td>-20.23</td><td>51.60</td><td>41.74</td><td>22.08</td><td>62.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4879.00	46.92	74.00	-27.08	65.25	34.40	11.55	64.28	0.00	--	--	PEAK	2	7320.00	67.23	74.00	-6.77	80.61	35.84	14.19	63.41	0.00	300	18	PEAK	3	7320.00	45.97	54.00	-8.03	59.35	35.84	14.19	63.41	0.00	300	18	AVERAGE	4	9759.00	49.39	72.95	-23.56	57.17	37.02	16.51	61.31	0.00	--	--	PEAK	5	12199.00	50.98	74.00	-23.02	54.78	38.90	18.42	61.12	0.00	300	62	PEAK	6	12199.00	29.72	54.00	-24.28	33.52	38.90	18.42	61.12	0.00	300	62	Average	7	14640.00	49.39	72.95	-23.56	51.77	39.64	20.29	62.31	0.00	--	--	PEAK	8	17080.00	52.72	72.95	-20.23	51.60	41.74	22.08	62.70	0.00	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																													
	1	4881.00	48.36	74.00	-25.64	66.68	34.40	11.55	64.27	0.00	100	216	PEAK																																																																																																																																																																																																																																																																																											
	2	4881.00	27.10	54.00	-26.90	45.42	34.40	11.55	64.27	0.00	100	216	Average																																																																																																																																																																																																																																																																																											
	3	7320.00	67.76	74.00	-6.24	81.14	35.84	14.19	63.41	0.00	143	342	PEAK																																																																																																																																																																																																																																																																																											
	4	7320.00	46.50	54.00	-7.50	59.88	35.84	14.19	63.41	0.00	143	342	AVERAGE																																																																																																																																																																																																																																																																																											
	5	9760.00	54.44	70.71	-16.27	62.22	37.02	16.51	61.31	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																											
6	12199.00	53.81	74.00	-20.19	57.61	38.90	18.42	61.12	0.00	100	355	PEAK																																																																																																																																																																																																																																																																																												
7	12199.00	32.55	54.00	-21.45	36.35	38.90	18.42	61.12	0.00	100	355	Average																																																																																																																																																																																																																																																																																												
8	14641.00	52.18	70.71	-18.53	54.56	39.64	20.29	62.31	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																												
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																														
1	4879.00	46.92	74.00	-27.08	65.25	34.40	11.55	64.28	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																												
2	7320.00	67.23	74.00	-6.77	80.61	35.84	14.19	63.41	0.00	300	18	PEAK																																																																																																																																																																																																																																																																																												
3	7320.00	45.97	54.00	-8.03	59.35	35.84	14.19	63.41	0.00	300	18	AVERAGE																																																																																																																																																																																																																																																																																												
4	9759.00	49.39	72.95	-23.56	57.17	37.02	16.51	61.31	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																												
5	12199.00	50.98	74.00	-23.02	54.78	38.90	18.42	61.12	0.00	300	62	PEAK																																																																																																																																																																																																																																																																																												
6	12199.00	29.72	54.00	-24.28	33.52	38.90	18.42	61.12	0.00	300	62	Average																																																																																																																																																																																																																																																																																												
7	14640.00	49.39	72.95	-23.56	51.77	39.64	20.29	62.31	0.00	--	--	PEAK																																																																																																																																																																																																																																																																																												
8	17080.00	52.72	72.95	-20.23	51.60	41.74	22.08	62.70	0.00	--	--	Peak																																																																																																																																																																																																																																																																																												

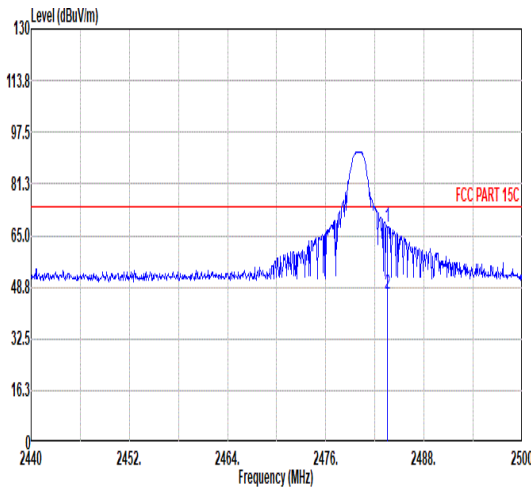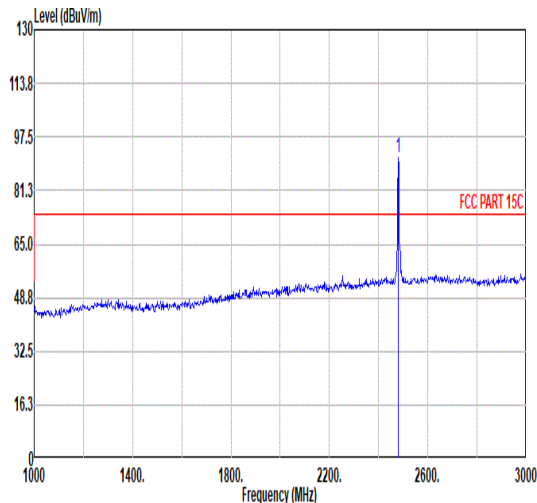
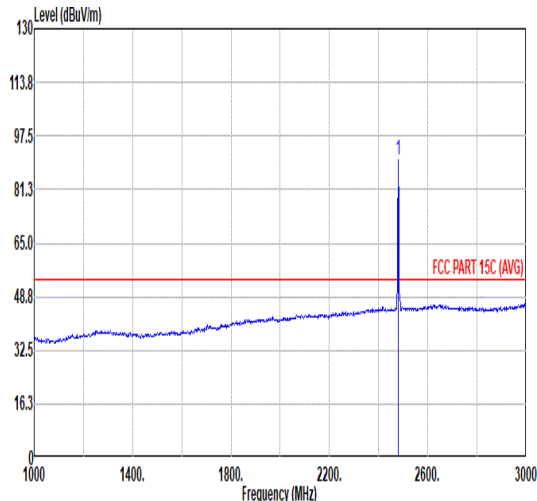


Mode	3																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																												
ANT	SISO																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																						
Peak																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>67.82</td><td>74.00</td><td>-6.18</td><td>53.11</td><td>32.33</td><td>9.23</td><td>32.85</td><td>6.00</td><td>100</td><td>77 PEAK</td></tr><tr><td>2</td><td>2483.50</td><td>46.57</td><td>54.00</td><td>-7.43</td><td>31.86</td><td>32.33</td><td>9.23</td><td>32.85</td><td>6.00</td><td>100</td><td>77 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	67.82	74.00	-6.18	53.11	32.33	9.23	32.85	6.00	100	77 PEAK	2	2483.50	46.57	54.00	-7.43	31.86	32.33	9.23	32.85	6.00	100	77 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>91.38</td><td>-----</td><td>-----</td><td>76.69</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>77 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.38	-----	-----	76.69	32.32	9.23	32.86	6.00	100	77 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.50	67.82	74.00	-6.18	53.11	32.33	9.23	32.85	6.00	100	77 PEAK																																																																																																		
2	2483.50	46.57	54.00	-7.43	31.86	32.33	9.23	32.85	6.00	100	77 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2480.00	91.38	-----	-----	76.69	32.32	9.23	32.86	6.00	100	77 PEAK																																																																																																		
Avg	Blank																																																																																																												
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>90.42</td><td>-----</td><td>-----</td><td>75.73</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>77 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.42	-----	-----	75.73	32.32	9.23	32.86	6.00	100	77 AVERAGE																																																							
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2480.00	90.42	-----	-----	75.73	32.32	9.23	32.86	6.00	100	77 AVERAGE																																																																																																		

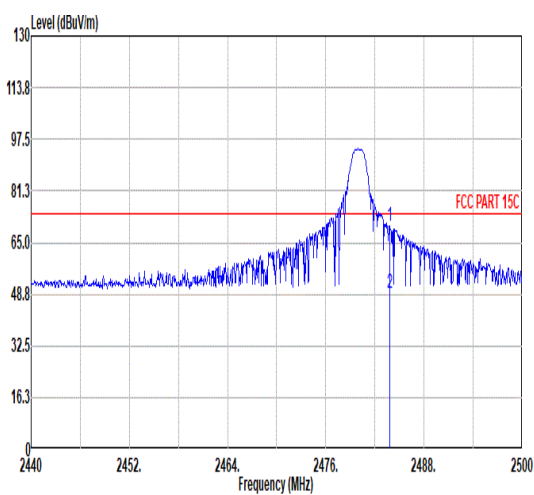
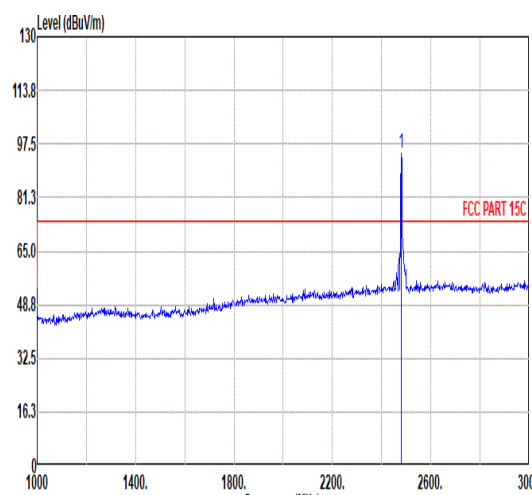
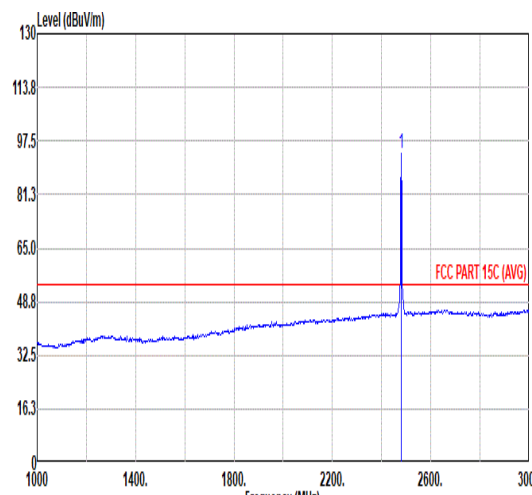


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.00</td><td>70.37</td><td>74.00</td><td>-3.63</td><td>55.64</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>367</td><td>83 PEAK</td></tr><tr><td>2</td><td>2483.00</td><td>49.10</td><td>54.00</td><td>-4.90</td><td>34.37</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>367</td><td>83 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.00	70.37	74.00	-3.63	55.64	32.34	9.23	32.84	6.00	367	83 PEAK	2	2483.00	49.10	54.00	-4.90	34.37	32.34	9.23	32.84	6.00	367	83 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.69</td><td>-----</td><td>-----</td><td>80.00</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>367</td><td>83 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.69	-----	-----	80.00	32.32	9.23	32.86	6.00	367	83 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.00	70.37	74.00	-3.63	55.64	32.34	9.23	32.84	6.00	367	83 PEAK																																																																																									
2	2483.00	49.10	54.00	-4.90	34.37	32.34	9.23	32.84	6.00	367	83 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	94.69	-----	-----	80.00	32.32	9.23	32.86	6.00	367	83 PEAK																																																																																									
Avg	Blank	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.78</td><td>-----</td><td>-----</td><td>79.09</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>367</td><td>83 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.78	-----	-----	79.09	32.32	9.23	32.86	6.00	367	83 AVERAGE																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	93.78	-----	-----	79.09	32.32	9.23	32.86	6.00	367	83 AVERAGE																																																																																									


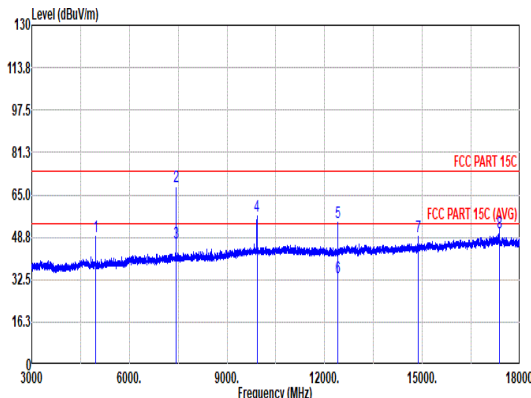
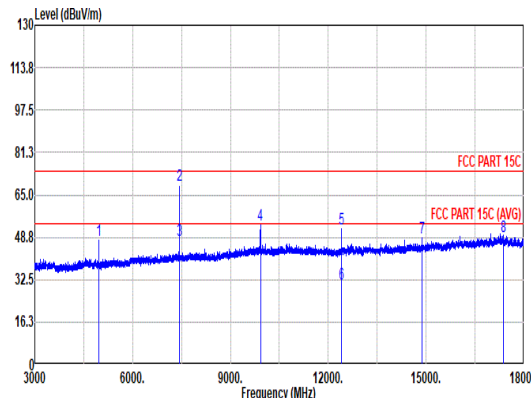


Mode	3																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal																																																																																																																							
Peak Avg																																																																																																																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	48.86	74.00	-25.14	67.09	34.38	11.72	64.33	0.00	-- -- PEAK	2	7440.00	67.99	74.00	-6.01	81.37	35.62	14.32	63.32	0.00	136 50 PEAK	3	7440.00	46.73	54.00	-7.27	60.11	35.62	14.32	63.32	0.00	136 50 AVERAGE	4	9919.00	56.90	71.21	-14.31	64.36	37.26	16.60	61.32	0.00	-- -- PEAK	5	12400.00	54.56	74.00	-19.44	58.11	39.00	18.56	61.11	0.00	101 360 PEAK	6	12400.00	33.29	54.00	-20.71	36.84	39.00	18.56	61.11	0.00	101 360 Average	7	14880.00	49.02	71.21	-22.19	51.22	39.78	20.48	62.46	0.00	-- -- Peak	8	17360.00	50.63	71.21	-20.58	49.59	41.54	22.25	62.75	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	4960.00	48.86	74.00	-25.14	67.09	34.38	11.72	64.33	0.00	-- -- PEAK																																																																																																														
2	7440.00	67.99	74.00	-6.01	81.37	35.62	14.32	63.32	0.00	136 50 PEAK																																																																																																														
3	7440.00	46.73	54.00	-7.27	60.11	35.62	14.32	63.32	0.00	136 50 AVERAGE																																																																																																														
4	9919.00	56.90	71.21	-14.31	64.36	37.26	16.60	61.32	0.00	-- -- PEAK																																																																																																														
5	12400.00	54.56	74.00	-19.44	58.11	39.00	18.56	61.11	0.00	101 360 PEAK																																																																																																														
6	12400.00	33.29	54.00	-20.71	36.84	39.00	18.56	61.11	0.00	101 360 Average																																																																																																														
7	14880.00	49.02	71.21	-22.19	51.22	39.78	20.48	62.46	0.00	-- -- Peak																																																																																																														
8	17360.00	50.63	71.21	-20.58	49.59	41.54	22.25	62.75	0.00	-- -- Peak																																																																																																														
Peak Avg																																																																																																																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4959.00	47.41	74.00	-26.59	65.63	34.38	11.72	64.32	0.00	-- -- PEAK	2	7440.00	68.62	74.00	-5.38	82.00	35.62	14.32	63.32	0.00	261 19 PEAK	3	7440.00	47.36	54.00	-6.64	60.74	35.62	14.32	63.32	0.00	261 19 AVERAGE	4	9919.00	53.56	71.41	-17.85	61.02	37.26	16.60	61.32	0.00	-- -- PEAK	5	12399.00	52.04	74.00	-21.96	55.59	39.00	18.56	61.11	0.00	100 106 Peak	6	12399.00	30.77	54.00	-23.23	34.32	39.00	18.56	61.11	0.00	100 106 Average	7	14880.00	48.67	71.41	-22.74	50.87	39.78	20.48	62.46	0.00	-- -- Peak	8	17360.00	49.04	71.41	-22.37	48.00	41.54	22.25	62.75	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	4959.00	47.41	74.00	-26.59	65.63	34.38	11.72	64.32	0.00	-- -- PEAK																																																																																																														
2	7440.00	68.62	74.00	-5.38	82.00	35.62	14.32	63.32	0.00	261 19 PEAK																																																																																																														
3	7440.00	47.36	54.00	-6.64	60.74	35.62	14.32	63.32	0.00	261 19 AVERAGE																																																																																																														
4	9919.00	53.56	71.41	-17.85	61.02	37.26	16.60	61.32	0.00	-- -- PEAK																																																																																																														
5	12399.00	52.04	74.00	-21.96	55.59	39.00	18.56	61.11	0.00	100 106 Peak																																																																																																														
6	12399.00	30.77	54.00	-23.23	34.32	39.00	18.56	61.11	0.00	100 106 Average																																																																																																														
7	14880.00	48.67	71.41	-22.74	50.87	39.78	20.48	62.46	0.00	-- -- Peak																																																																																																														
8	17360.00	49.04	71.41	-22.37	48.00	41.54	22.25	62.75	0.00	-- -- Peak																																																																																																														

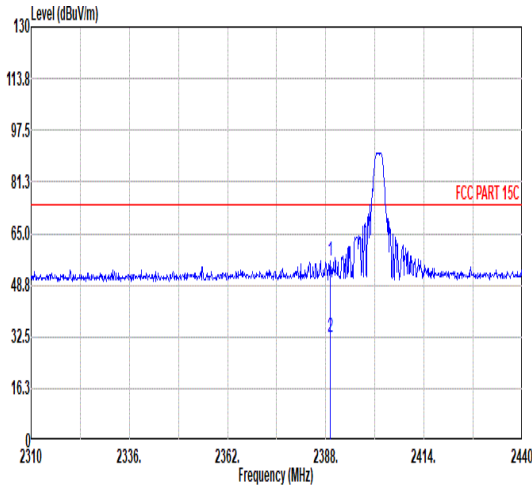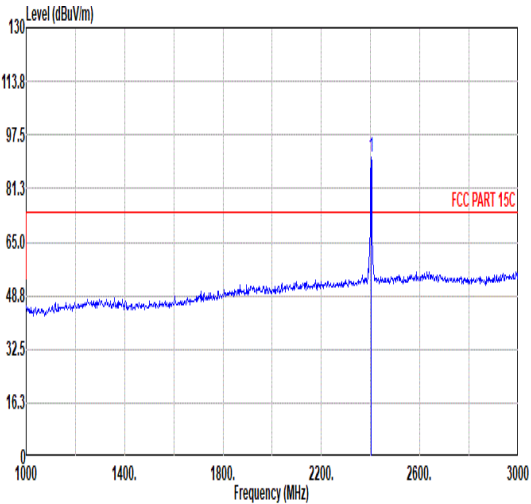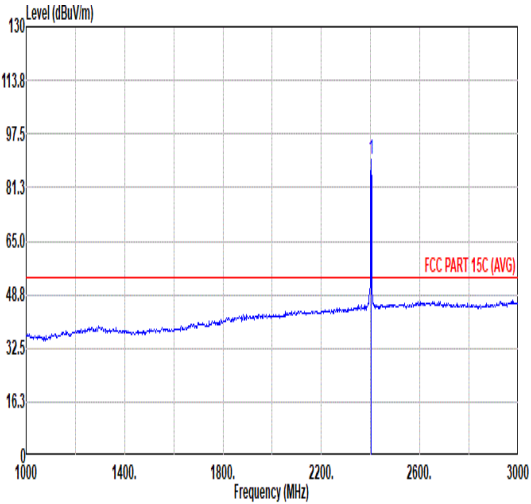

Mode	4																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																													
ANT	SISO																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																							
Peak																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.17</td><td>56.49</td><td>74.00</td><td>-17.51</td><td>41.99</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>346</td><td>319 PEAK</td></tr><tr><td>2</td><td>2389.17</td><td>32.18</td><td>54.00</td><td>-21.82</td><td>17.68</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>346</td><td>319 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	56.49	74.00	-17.51	41.99	32.48	9.12	33.10	6.00	346	319 PEAK	2	2389.17	32.18	54.00	-21.82	17.68	32.48	9.12	33.10	6.00	346	319 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>90.57</td><td>-----</td><td>-----</td><td>76.01</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>346</td><td>319 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.57	-----	-----	76.01	32.49	9.15	33.08	6.00	346	319 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2389.17	56.49	74.00	-17.51	41.99	32.48	9.12	33.10	6.00	346	319 PEAK																																																																																																			
2	2389.17	32.18	54.00	-21.82	17.68	32.48	9.12	33.10	6.00	346	319 AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2402.00	90.57	-----	-----	76.01	32.49	9.15	33.08	6.00	346	319 PEAK																																																																																																			
Avg	Blank																																																																																																													
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>89.88</td><td>-----</td><td>-----</td><td>75.32</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>346</td><td>319 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	89.88	-----	-----	75.32	32.49	9.15	33.08	6.00	346	319 AVERAGE																																																							
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2402.00	89.88	-----	-----	75.32	32.49	9.15	33.08	6.00	346	319 AVERAGE																																																																																																			

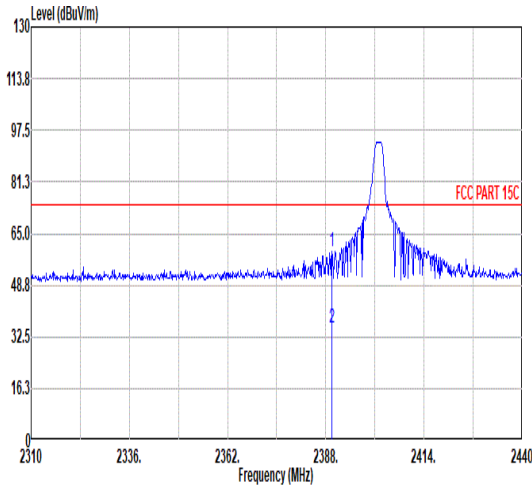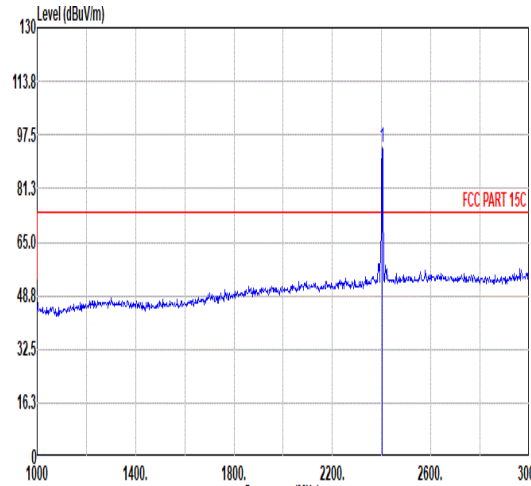
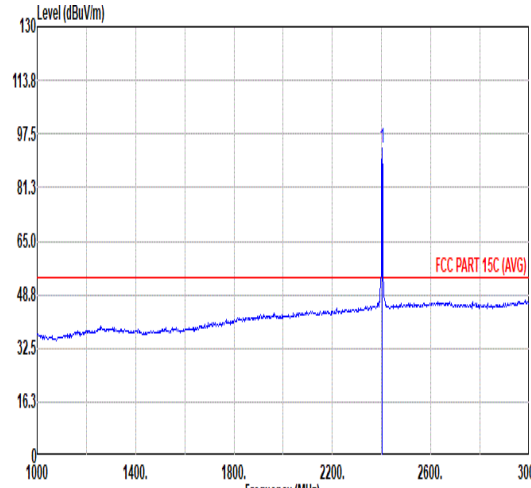


Mode	4																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																
ANT	SISO																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>59.46</td><td>74.00</td><td>-14.54</td><td>44.96</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>381</td><td>241</td><td>PEAK</td></tr><tr><td>2</td><td>2389.69</td><td>35.15</td><td>54.00</td><td>-18.85</td><td>20.65</td><td>32.48</td><td>9.12</td><td>33.10</td><td>6.00</td><td>381</td><td>241</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	59.46	74.00	-14.54	44.96	32.48	9.12	33.10	6.00	381	241	PEAK	2	2389.69	35.15	54.00	-18.85	20.65	32.48	9.12	33.10	6.00	381	241	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.87</td><td>-----</td><td>-----</td><td>79.31</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>381</td><td>241</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.87	-----	-----	79.31	32.49	9.15	33.08	6.00	381	241	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2389.69	59.46	74.00	-14.54	44.96	32.48	9.12	33.10	6.00	381	241	PEAK																																																																																																					
2	2389.69	35.15	54.00	-18.85	20.65	32.48	9.12	33.10	6.00	381	241	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2402.00	93.87	-----	-----	79.31	32.49	9.15	33.08	6.00	381	241	PEAK																																																																																																					
Avg	Blank																																																																																																																
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.00</td><td>-----</td><td>-----</td><td>78.44</td><td>32.49</td><td>9.15</td><td>33.08</td><td>6.00</td><td>381</td><td>241</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.00	-----	-----	78.44	32.49	9.15	33.08	6.00	381	241	AVERAGE																																																									
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2402.00	93.00	-----	-----	78.44	32.49	9.15	33.08	6.00	381	241	AVERAGE																																																																																																					









Mode	4																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH0_2402MHz																																																																																																																					
ANT	SISO																																																																																																																					
Pol.	Horizontal																																																																																																																					
Peak Avg																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4884.00</td><td>43.56</td><td>74.00</td><td>-30.44</td><td>62.21</td><td>34.40</td><td>11.39</td><td>64.44</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2 7206.00</td><td>63.96</td><td>68.25</td><td>-4.29</td><td>77.59</td><td>35.81</td><td>14.06</td><td>63.50</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>3 9607.00</td><td>52.25</td><td>68.25</td><td>-16.00</td><td>60.36</td><td>36.81</td><td>16.38</td><td>61.30</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>4 12010.00</td><td>50.41</td><td>74.00</td><td>-23.59</td><td>54.44</td><td>38.80</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>21 PEAK</td></tr><tr><td>5 12010.00</td><td>26.10</td><td>54.00</td><td>-27.90</td><td>30.13</td><td>38.80</td><td>18.29</td><td>61.12</td><td>0.00</td><td>100</td><td>21 Average</td></tr><tr><td>6 14409.00</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>52.02</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>137</td><td>0 Peak</td></tr><tr><td>7 14409.00</td><td>24.93</td><td>54.00</td><td>-29.07</td><td>27.70</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>137</td><td>0 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4884.00	43.56	74.00	-30.44	62.21	34.40	11.39	64.44	0.00	--	-- PEAK	2 7206.00	63.96	68.25	-4.29	77.59	35.81	14.06	63.50	0.00	--	-- PEAK	3 9607.00	52.25	68.25	-16.00	60.36	36.81	16.38	61.30	0.00	--	-- PEAK	4 12010.00	50.41	74.00	-23.59	54.44	38.80	18.29	61.12	0.00	100	21 PEAK	5 12010.00	26.10	54.00	-27.90	30.13	38.80	18.29	61.12	0.00	100	21 Average	6 14409.00	49.25	74.00	-24.75	52.02	39.32	20.11	62.20	0.00	137	0 Peak	7 14409.00	24.93	54.00	-29.07	27.70	39.32	20.11	62.20	0.00	137
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1 4884.00	43.56	74.00	-30.44	62.21	34.40	11.39	64.44	0.00	--	-- PEAK																																																																																																												
2 7206.00	63.96	68.25	-4.29	77.59	35.81	14.06	63.50	0.00	--	-- PEAK																																																																																																												
3 9607.00	52.25	68.25	-16.00	60.36	36.81	16.38	61.30	0.00	--	-- PEAK																																																																																																												
4 12010.00	50.41	74.00	-23.59	54.44	38.80	18.29	61.12	0.00	100	21 PEAK																																																																																																												
5 12010.00	26.10	54.00	-27.90	30.13	38.80	18.29	61.12	0.00	100	21 Average																																																																																																												
6 14409.00	49.25	74.00	-24.75	52.02	39.32	20.11	62.20	0.00	137	0 Peak																																																																																																												
7 14409.00	24.93	54.00	-29.07	27.70	39.32	20.11	62.20	0.00	137	0 Average																																																																																																												
Peak Avg																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4884.00</td><td>46.36</td><td>74.00</td><td>-27.64</td><td>65.01</td><td>34.40</td><td>11.39</td><td>64.44</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>2 7206.00</td><td>64.56</td><td>70.96</td><td>-6.40</td><td>78.19</td><td>35.81</td><td>14.06</td><td>63.50</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr><tr><td>3 9606.00</td><td>49.40</td><td>70.96</td><td>-21.56</td><td>57.51</td><td>36.81</td><td>16.38</td><td>61.30</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>4 12007.00</td><td>51.52</td><td>74.00</td><td>-22.48</td><td>55.56</td><td>38.80</td><td>18.28</td><td>61.12</td><td>0.00</td><td>100</td><td>96 PEAK</td></tr><tr><td>5 12007.00</td><td>27.21</td><td>54.00</td><td>-26.79</td><td>31.25</td><td>38.80</td><td>18.28</td><td>61.12</td><td>0.00</td><td>100</td><td>96 Average</td></tr><tr><td>6 14412.00</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>54.08</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>300</td><td>298 Peak</td></tr><tr><td>7 14412.00</td><td>27.00</td><td>54.00</td><td>-27.00</td><td>29.77</td><td>39.32</td><td>20.11</td><td>62.20</td><td>0.00</td><td>300</td><td>298 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4884.00	46.36	74.00	-27.64	65.01	34.40	11.39	64.44	0.00	--	-- PEAK	2 7206.00	64.56	70.96	-6.40	78.19	35.81	14.06	63.50	0.00	--	-- PEAK	3 9606.00	49.40	70.96	-21.56	57.51	36.81	16.38	61.30	0.00	--	-- Peak	4 12007.00	51.52	74.00	-22.48	55.56	38.80	18.28	61.12	0.00	100	96 PEAK	5 12007.00	27.21	54.00	-26.79	31.25	38.80	18.28	61.12	0.00	100	96 Average	6 14412.00	51.31	74.00	-22.69	54.08	39.32	20.11	62.20	0.00	300	298 Peak	7 14412.00	27.00	54.00	-27.00	29.77	39.32	20.11	62.20	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1 4884.00	46.36	74.00	-27.64	65.01	34.40	11.39	64.44	0.00	--	-- PEAK																																																																																																												
2 7206.00	64.56	70.96	-6.40	78.19	35.81	14.06	63.50	0.00	--	-- PEAK																																																																																																												
3 9606.00	49.40	70.96	-21.56	57.51	36.81	16.38	61.30	0.00	--	-- Peak																																																																																																												
4 12007.00	51.52	74.00	-22.48	55.56	38.80	18.28	61.12	0.00	100	96 PEAK																																																																																																												
5 12007.00	27.21	54.00	-26.79	31.25	38.80	18.28	61.12	0.00	100	96 Average																																																																																																												
6 14412.00	51.31	74.00	-22.69	54.08	39.32	20.11	62.20	0.00	300	298 Peak																																																																																																												
7 14412.00	27.00	54.00	-27.00	29.77	39.32	20.11	62.20	0.00	300	298 Average																																																																																																												


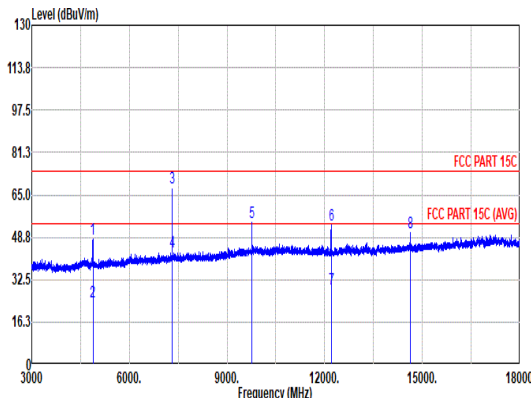
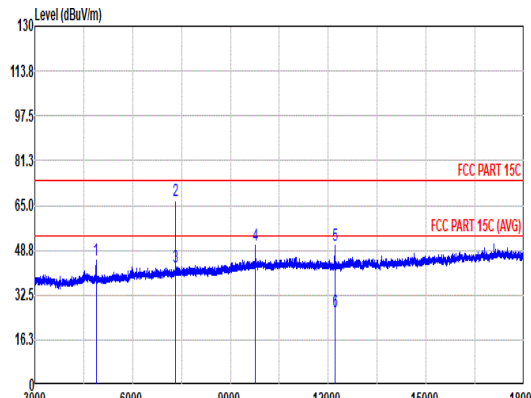


Mode	5																																																																																																																																																			
	Harmonic																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																			
ANT	SISO																																																																																																																																																			
Pol.	Horizontal																																																																																																																																																			
Peak Avg																																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4879.00</td><td>48.14</td><td>74.00</td><td>-25.86</td><td>66.47</td><td>34.40</td><td>11.55</td><td>64.28</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>2</td><td>4879.00</td><td>23.83</td><td>54.00</td><td>-30.17</td><td>42.16</td><td>34.40</td><td>11.55</td><td>64.28</td><td>0.00</td><td>100</td><td>216</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>67.54</td><td>74.00</td><td>-6.46</td><td>80.92</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>136</td><td>344</td><td>PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>56.61</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>136</td><td>344</td><td>AVERAGE</td></tr><tr><td>5</td><td>9760.00</td><td>54.35</td><td>71.88</td><td>-17.53</td><td>62.13</td><td>37.02</td><td>16.51</td><td>61.31</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>6</td><td>12198.00</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>57.15</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>115</td><td>360</td><td>PEAK</td></tr><tr><td>7</td><td>12198.00</td><td>29.04</td><td>54.00</td><td>-24.96</td><td>32.84</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>115</td><td>360</td><td>Average</td></tr><tr><td>8</td><td>14640.00</td><td>50.74</td><td>71.88</td><td>-21.14</td><td>53.12</td><td>39.64</td><td>20.29</td><td>62.31</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4879.00	48.14	74.00	-25.86	66.47	34.40	11.55	64.28	0.00	100	216	PEAK	2	4879.00	23.83	54.00	-30.17	42.16	34.40	11.55	64.28	0.00	100	216	Average	3	7320.00	67.54	74.00	-6.46	80.92	35.84	14.19	63.41	0.00	136	344	PEAK	4	7320.00	43.23	54.00	-10.77	56.61	35.84	14.19	63.41	0.00	136	344	AVERAGE	5	9760.00	54.35	71.88	-17.53	62.13	37.02	16.51	61.31	0.00	--	--	PEAK	6	12198.00	53.35	74.00	-20.65	57.15	38.90	18.42	61.12	0.00	115	360	PEAK	7	12198.00	29.04	54.00	-24.96	32.84	38.90	18.42	61.12	0.00	115	360	Average	8	14640.00	50.74	71.88	-21.14	53.12	39.64	20.29	62.31	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
	1	4879.00	48.14	74.00	-25.86	66.47	34.40	11.55	64.28	0.00	100	216	PEAK																																																																																																																																							
	2	4879.00	23.83	54.00	-30.17	42.16	34.40	11.55	64.28	0.00	100	216	Average																																																																																																																																							
	3	7320.00	67.54	74.00	-6.46	80.92	35.84	14.19	63.41	0.00	136	344	PEAK																																																																																																																																							
	4	7320.00	43.23	54.00	-10.77	56.61	35.84	14.19	63.41	0.00	136	344	AVERAGE																																																																																																																																							
	5	9760.00	54.35	71.88	-17.53	62.13	37.02	16.51	61.31	0.00	--	--	PEAK																																																																																																																																							
6	12198.00	53.35	74.00	-20.65	57.15	38.90	18.42	61.12	0.00	115	360	PEAK																																																																																																																																								
7	12198.00	29.04	54.00	-24.96	32.84	38.90	18.42	61.12	0.00	115	360	Average																																																																																																																																								
8	14640.00	50.74	71.88	-21.14	53.12	39.64	20.29	62.31	0.00	--	--	Peak																																																																																																																																								
Vertical																																																																																																																																																				
																																																																																																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4879.00</td><td>44.89</td><td>74.00</td><td>-29.11</td><td>63.22</td><td>34.40</td><td>11.55</td><td>64.28</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>66.92</td><td>74.00</td><td>-7.08</td><td>80.30</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>313</td><td>19</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>55.99</td><td>35.84</td><td>14.19</td><td>63.41</td><td>0.00</td><td>313</td><td>19</td><td>AVERAGE</td></tr><tr><td>4</td><td>9760.00</td><td>50.46</td><td>71.82</td><td>-21.36</td><td>58.24</td><td>37.02</td><td>16.51</td><td>61.31</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>12199.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>54.52</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>300</td><td>94</td><td>Peak</td></tr><tr><td>6</td><td>12199.00</td><td>26.41</td><td>54.00</td><td>-27.59</td><td>30.21</td><td>38.90</td><td>18.42</td><td>61.12</td><td>0.00</td><td>300</td><td>94</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4879.00	44.89	74.00	-29.11	63.22	34.40	11.55	64.28	0.00	--	--	PEAK	2	7320.00	66.92	74.00	-7.08	80.30	35.84	14.19	63.41	0.00	313	19	PEAK	3	7320.00	42.61	54.00	-11.39	55.99	35.84	14.19	63.41	0.00	313	19	AVERAGE	4	9760.00	50.46	71.82	-21.36	58.24	37.02	16.51	61.31	0.00	--	--	Peak	5	12199.00	50.72	74.00	-23.28	54.52	38.90	18.42	61.12	0.00	300	94	Peak	6	12199.00	26.41	54.00	-27.59	30.21	38.90	18.42	61.12	0.00	300	94	Average																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																										
1	4879.00	44.89	74.00	-29.11	63.22	34.40	11.55	64.28	0.00	--	--	PEAK																																																																																																																																								
2	7320.00	66.92	74.00	-7.08	80.30	35.84	14.19	63.41	0.00	313	19	PEAK																																																																																																																																								
3	7320.00	42.61	54.00	-11.39	55.99	35.84	14.19	63.41	0.00	313	19	AVERAGE																																																																																																																																								
4	9760.00	50.46	71.82	-21.36	58.24	37.02	16.51	61.31	0.00	--	--	Peak																																																																																																																																								
5	12199.00	50.72	74.00	-23.28	54.52	38.90	18.42	61.12	0.00	300	94	Peak																																																																																																																																								
6	12199.00	26.41	54.00	-27.59	30.21	38.90	18.42	61.12	0.00	300	94	Average																																																																																																																																								

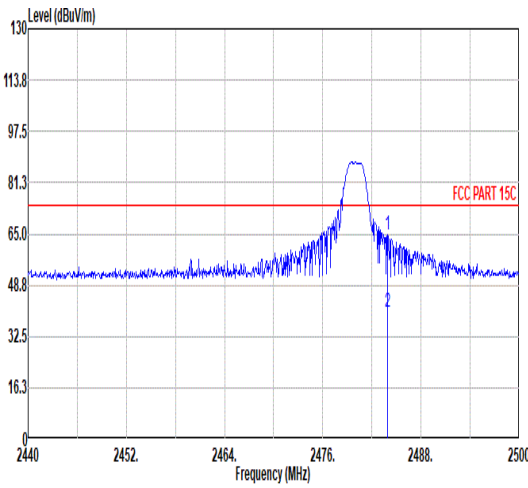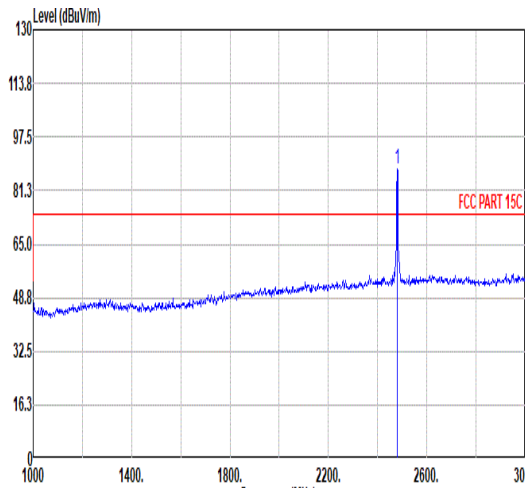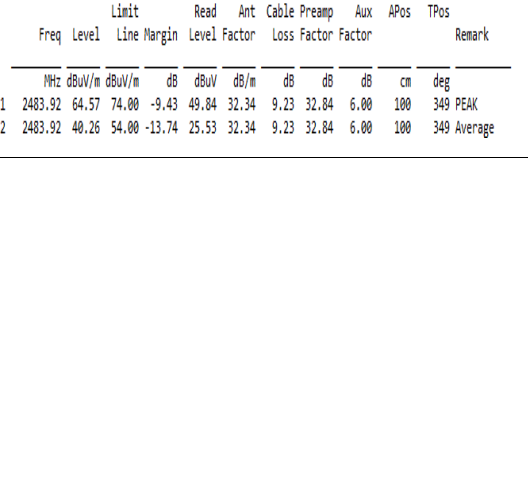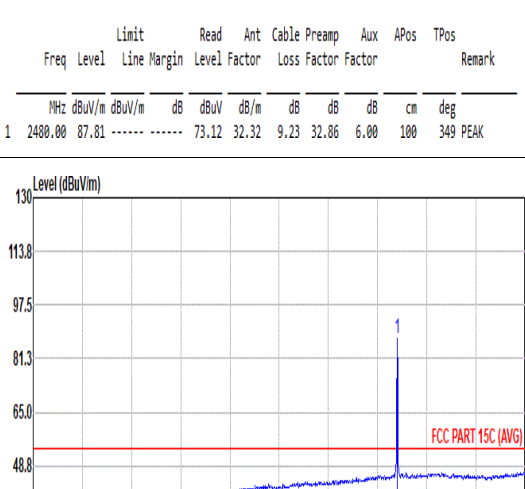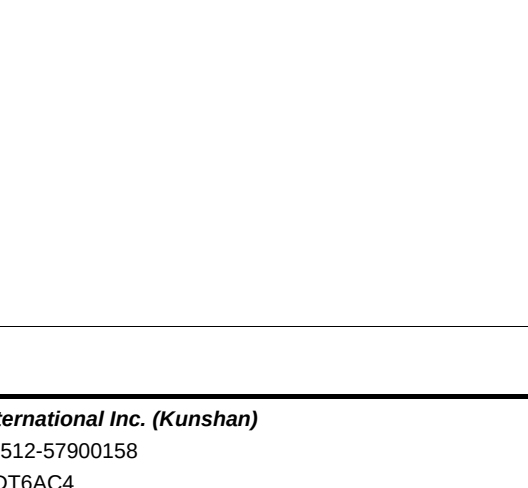
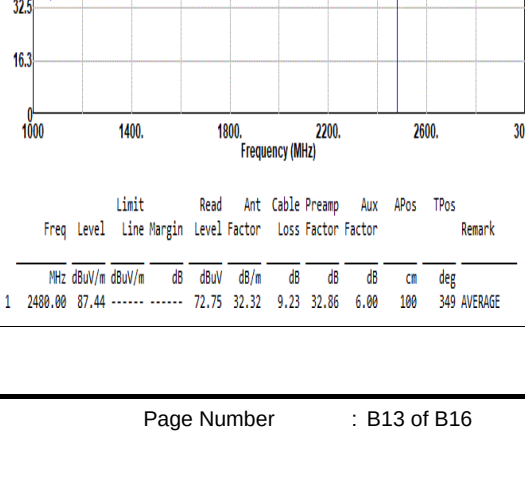



Mode	6																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																
ANT	SISO																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>64.57</td><td>74.00</td><td>-9.43</td><td>49.84</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr><tr><td>2</td><td>2483.92</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>25.53</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK	2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>87.81</td><td>-----</td><td>-----</td><td>73.12</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK																																																																																																					
2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>64.57</td><td>74.00</td><td>-9.43</td><td>49.84</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr><tr><td>2</td><td>2483.92</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>25.53</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK	2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>87.81</td><td>-----</td><td>-----</td><td>73.12</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK																																																																																																					
2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>64.57</td><td>74.00</td><td>-9.43</td><td>49.84</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr><tr><td>2</td><td>2483.92</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>25.53</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK	2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>87.81</td><td>-----</td><td>-----</td><td>73.12</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK																																																																																																					
2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK																																																																																																					
Avg																																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>64.57</td><td>74.00</td><td>-9.43</td><td>49.84</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr><tr><td>2</td><td>2483.92</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>25.53</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>100</td><td>349</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK	2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>87.81</td><td>-----</td><td>-----</td><td>73.12</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>100</td><td>349</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.92	64.57	74.00	-9.43	49.84	32.34	9.23	32.84	6.00	100	349	PEAK																																																																																																					
2	2483.92	40.26	54.00	-13.74	25.53	32.34	9.23	32.84	6.00	100	349	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	87.81	-----	-----	73.12	32.32	9.23	32.86	6.00	100	349	PEAK																																																																																																					

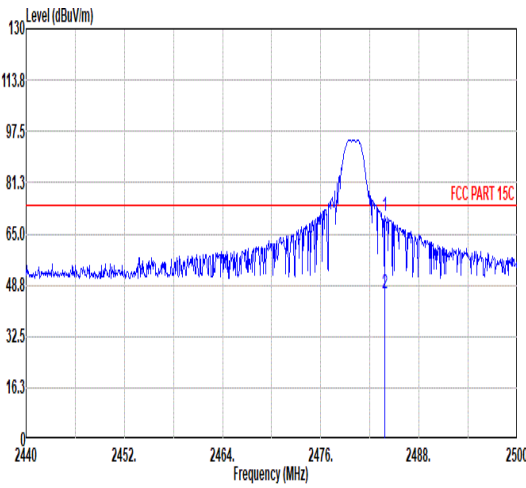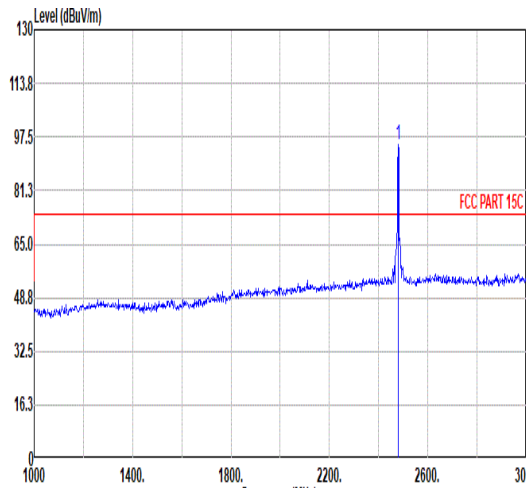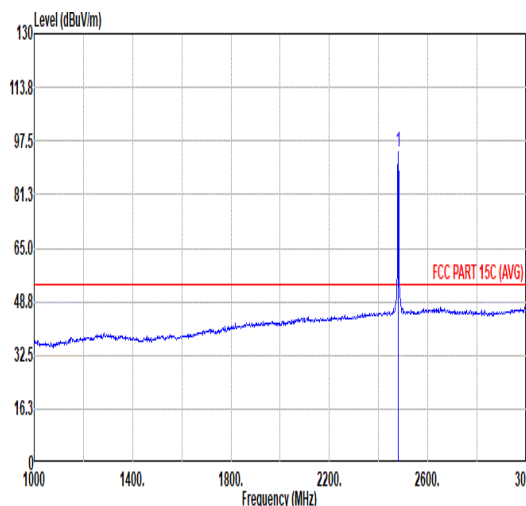

Mode	6																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																
ANT	SISO																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.80</td><td>70.48</td><td>74.00</td><td>-3.52</td><td>55.75</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>343</td><td>305</td><td>PEAK</td></tr><tr><td>2</td><td>2483.80</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>31.44</td><td>32.34</td><td>9.23</td><td>32.84</td><td>6.00</td><td>343</td><td>305</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.80	70.48	74.00	-3.52	55.75	32.34	9.23	32.84	6.00	343	305	PEAK	2	2483.80	46.17	54.00	-7.83	31.44	32.34	9.23	32.84	6.00	343	305	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.95</td><td>-----</td><td>-----</td><td>80.26</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>343</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.95	-----	-----	80.26	32.32	9.23	32.86	6.00	343	305	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2483.80	70.48	74.00	-3.52	55.75	32.34	9.23	32.84	6.00	343	305	PEAK																																																																																																					
2	2483.80	46.17	54.00	-7.83	31.44	32.34	9.23	32.84	6.00	343	305	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	94.95	-----	-----	80.26	32.32	9.23	32.86	6.00	343	305	PEAK																																																																																																					
Avg	Blank																																																																																																																
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.12</td><td>-----</td><td>-----</td><td>79.43</td><td>32.32</td><td>9.23</td><td>32.86</td><td>6.00</td><td>343</td><td>305</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.12	-----	-----	79.43	32.32	9.23	32.86	6.00	343	305	AVERAGE																																																									
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	94.12	-----	-----	79.43	32.32	9.23	32.86	6.00	343	305	AVERAGE																																																																																																					

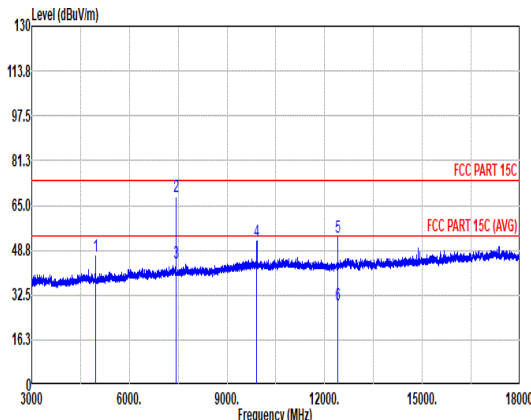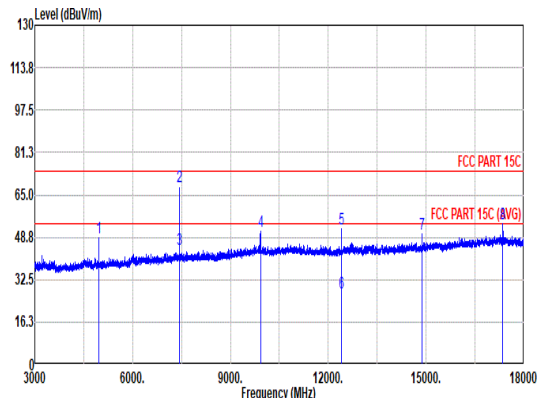


		6																																																																																																																																																																																																																																																								
Mode		Harmonic																																																																																																																																																																																																																																																								
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																																																								
ANT		SISO																																																																																																																																																																																																																																																								
Pol.		Horizontal					Vertical																																																																																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																																																																																										
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4959.00</td><td>46.38</td><td>74.00</td><td>-27.62</td><td>64.60</td><td>34.38</td><td>11.72</td><td>64.32</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>68.43</td><td>74.00</td><td>-5.57</td><td>81.81</td><td>35.62</td><td>14.32</td><td>63.32</td><td>0.00</td><td>284</td><td>54 PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>44.12</td><td>54.00</td><td>-9.88</td><td>57.50</td><td>35.62</td><td>14.32</td><td>63.32</td><td>0.00</td><td>284</td><td>54 AVERAGE</td></tr><tr><td>4</td><td>9918.00</td><td>52.04</td><td>71.01</td><td>-18.97</td><td>59.50</td><td>37.26</td><td>16.60</td><td>61.32</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>12397.00</td><td>53.30</td><td>74.00</td><td>-20.70</td><td>56.06</td><td>39.00</td><td>18.55</td><td>61.11</td><td>0.00</td><td>129</td><td>360 PEAK</td></tr><tr><td>6</td><td>12397.00</td><td>28.99</td><td>54.00</td><td>-25.01</td><td>32.55</td><td>39.00</td><td>18.55</td><td>61.11</td><td>0.00</td><td>129</td><td>360 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4959.00	46.38	74.00	-27.62	64.60	34.38	11.72	64.32	0.00	--	PEAK	2	7440.00	68.43	74.00	-5.57	81.81	35.62	14.32	63.32	0.00	284	54 PEAK	3	7440.00	44.12	54.00	-9.88	57.50	35.62	14.32	63.32	0.00	284	54 AVERAGE	4	9918.00	52.04	71.01	-18.97	59.50	37.26	16.60	61.32	0.00	--	PEAK	5	12397.00	53.30	74.00	-20.70	56.06	39.00	18.55	61.11	0.00	129	360 PEAK	6	12397.00	28.99	54.00	-25.01	32.55	39.00	18.55	61.11	0.00	129	360 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>66.67</td><td>34.38</td><td>11.72</td><td>64.33</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>68.33</td><td>74.00</td><td>-5.67</td><td>81.71</td><td>35.62</td><td>14.32</td><td>63.32</td><td>0.00</td><td>267</td><td>16 PEAK</td></tr><tr><td>3</td><td>7440.00</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>57.40</td><td>35.62</td><td>14.32</td><td>63.32</td><td>0.00</td><td>267</td><td>16 AVERAGE</td></tr><tr><td>4</td><td>9922.00</td><td>51.22</td><td>72.19</td><td>-20.97</td><td>58.68</td><td>37.26</td><td>16.60</td><td>61.32</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>5</td><td>12402.00</td><td>51.87</td><td>74.00</td><td>-22.13</td><td>55.42</td><td>39.00</td><td>18.56</td><td>61.11</td><td>0.00</td><td>100</td><td>337 Peak</td></tr><tr><td>6</td><td>12402.00</td><td>27.56</td><td>54.00</td><td>-26.44</td><td>31.11</td><td>39.00</td><td>18.56</td><td>61.11</td><td>0.00</td><td>100</td><td>337 Average</td></tr><tr><td>7</td><td>14880.00</td><td>50.20</td><td>72.19</td><td>-21.99</td><td>52.40</td><td>39.78</td><td>20.48</td><td>62.46</td><td>0.00</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>17356.00</td><td>53.83</td><td>72.19</td><td>-18.36</td><td>52.80</td><td>41.54</td><td>22.24</td><td>62.75</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	48.44	74.00	-25.56	66.67	34.38	11.72	64.33	0.00	--	PEAK	2	7440.00	68.33	74.00	-5.67	81.71	35.62	14.32	63.32	0.00	267	16 PEAK	3	7440.00	44.02	54.00	-9.98	57.40	35.62	14.32	63.32	0.00	267	16 AVERAGE	4	9922.00	51.22	72.19	-20.97	58.68	37.26	16.60	61.32	0.00	--	PEAK	5	12402.00	51.87	74.00	-22.13	55.42	39.00	18.56	61.11	0.00	100	337 Peak	6	12402.00	27.56	54.00	-26.44	31.11	39.00	18.56	61.11	0.00	100	337 Average	7	14880.00	50.20	72.19	-21.99	52.40	39.78	20.48	62.46	0.00	--	Peak	8	17356.00	53.83	72.19	-18.36	52.80	41.54	22.24	62.75	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																
1	4959.00	46.38	74.00	-27.62	64.60	34.38	11.72	64.32	0.00	--	PEAK																																																																																																																																																																																																																																															
2	7440.00	68.43	74.00	-5.57	81.81	35.62	14.32	63.32	0.00	284	54 PEAK																																																																																																																																																																																																																																															
3	7440.00	44.12	54.00	-9.88	57.50	35.62	14.32	63.32	0.00	284	54 AVERAGE																																																																																																																																																																																																																																															
4	9918.00	52.04	71.01	-18.97	59.50	37.26	16.60	61.32	0.00	--	PEAK																																																																																																																																																																																																																																															
5	12397.00	53.30	74.00	-20.70	56.06	39.00	18.55	61.11	0.00	129	360 PEAK																																																																																																																																																																																																																																															
6	12397.00	28.99	54.00	-25.01	32.55	39.00	18.55	61.11	0.00	129	360 Average																																																																																																																																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																
1	4960.00	48.44	74.00	-25.56	66.67	34.38	11.72	64.33	0.00	--	PEAK																																																																																																																																																																																																																																															
2	7440.00	68.33	74.00	-5.67	81.71	35.62	14.32	63.32	0.00	267	16 PEAK																																																																																																																																																																																																																																															
3	7440.00	44.02	54.00	-9.98	57.40	35.62	14.32	63.32	0.00	267	16 AVERAGE																																																																																																																																																																																																																																															
4	9922.00	51.22	72.19	-20.97	58.68	37.26	16.60	61.32	0.00	--	PEAK																																																																																																																																																																																																																																															
5	12402.00	51.87	74.00	-22.13	55.42	39.00	18.56	61.11	0.00	100	337 Peak																																																																																																																																																																																																																																															
6	12402.00	27.56	54.00	-26.44	31.11	39.00	18.56	61.11	0.00	100	337 Average																																																																																																																																																																																																																																															
7	14880.00	50.20	72.19	-21.99	52.40	39.78	20.48	62.46	0.00	--	Peak																																																																																																																																																																																																																																															
8	17356.00	53.83	72.19	-18.36	52.80	41.54	22.24	62.75	0.00	--	PEAK																																																																																																																																																																																																																																															

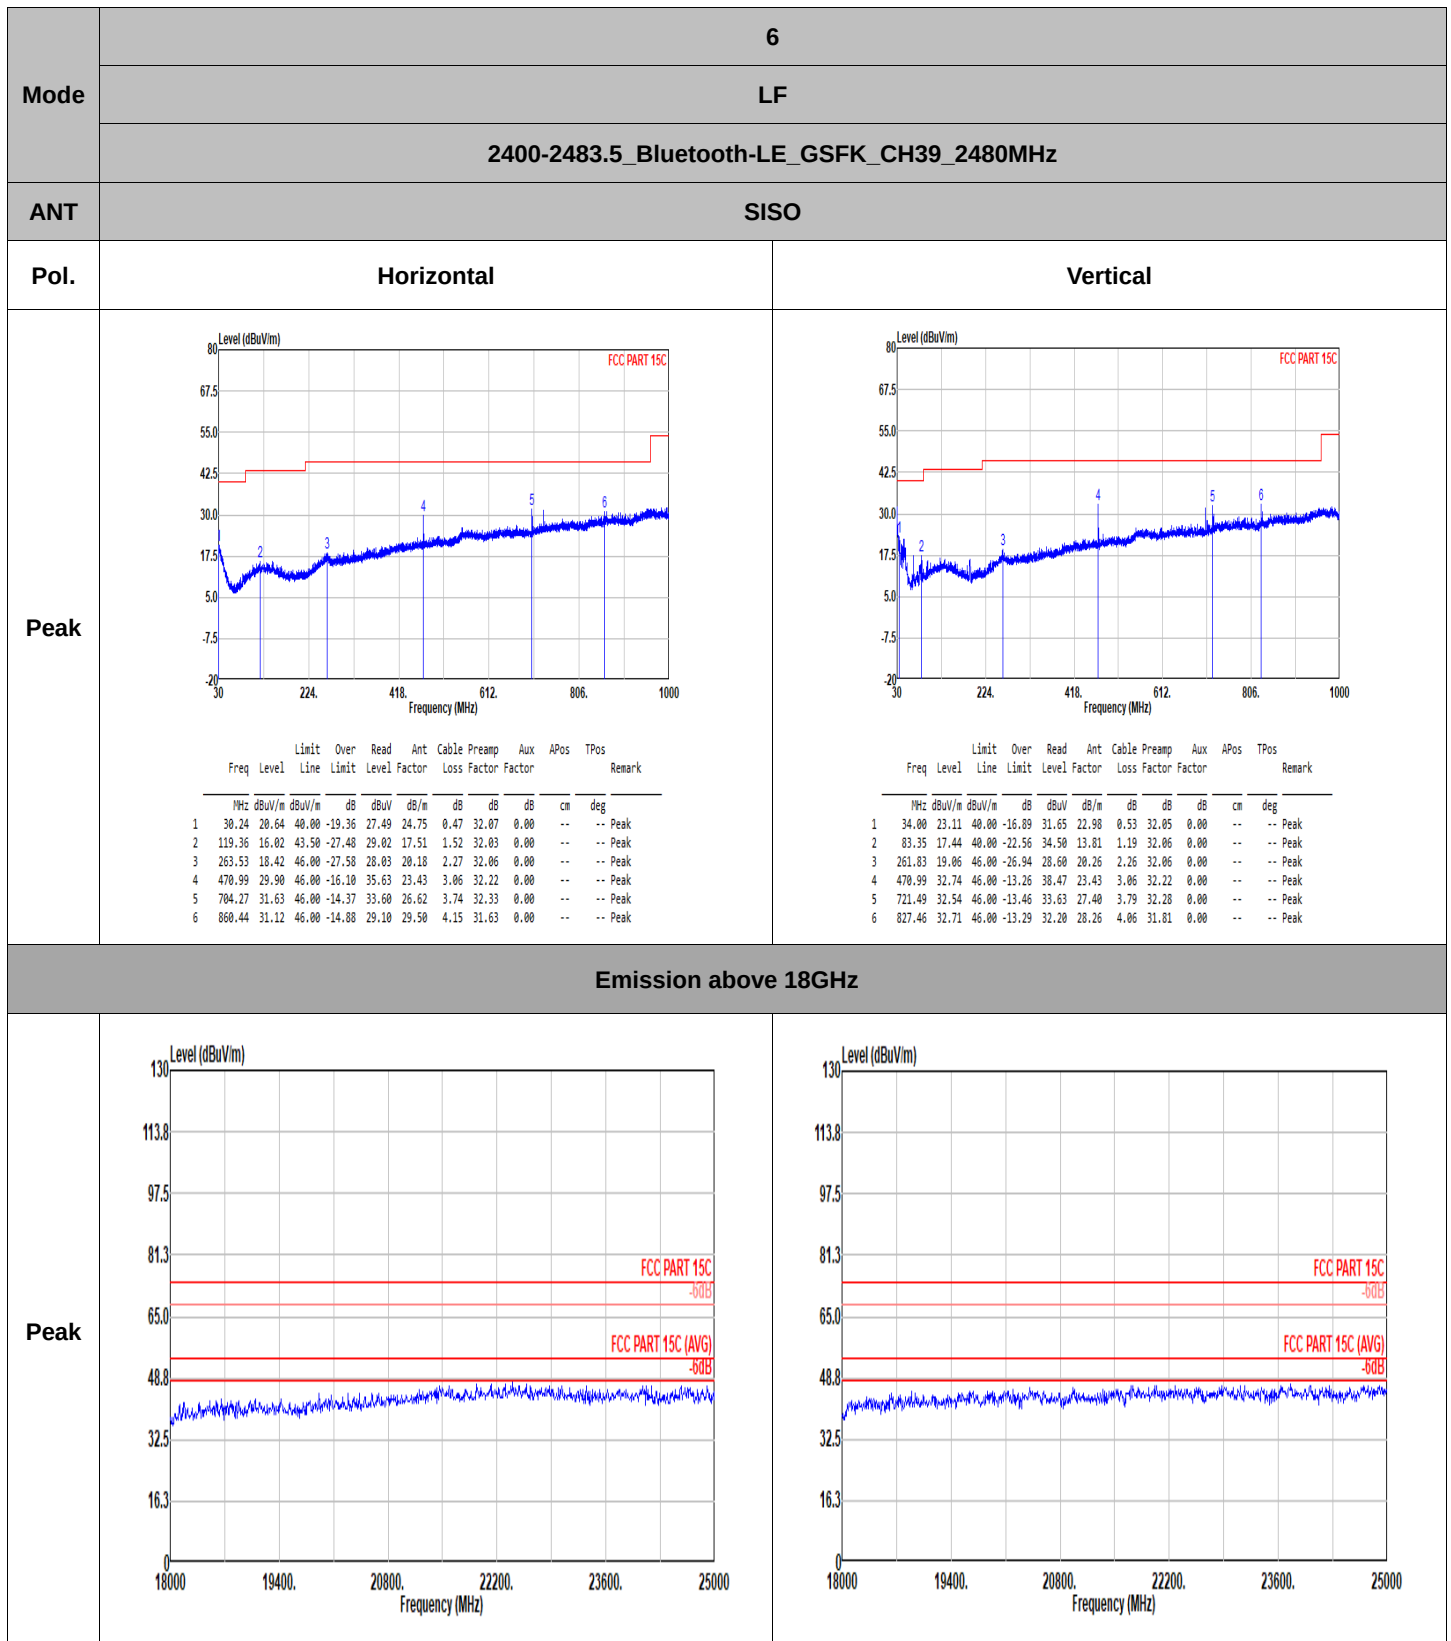

Appendix C. Duty Cycle Plots


Bluetooth – LE 1Mbps

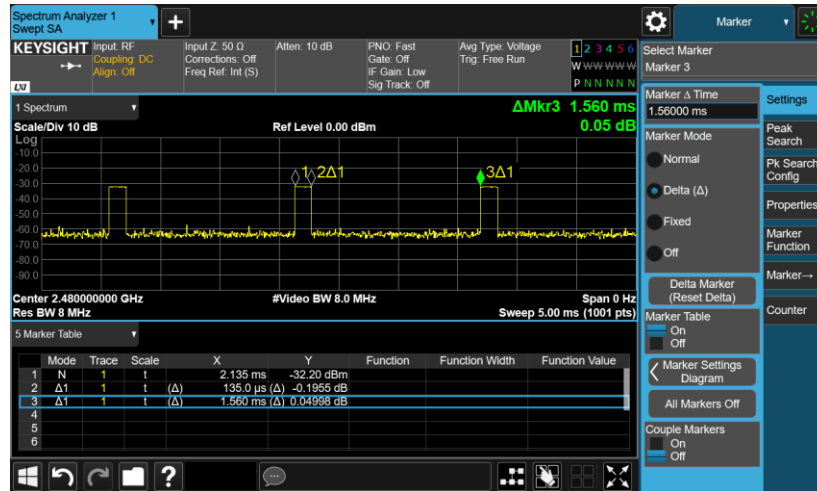

Note:

1. Duty cycle = 8.65 %
2. Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = -21.26 \text{ dB}$

Bluetooth – LE 2Mbps

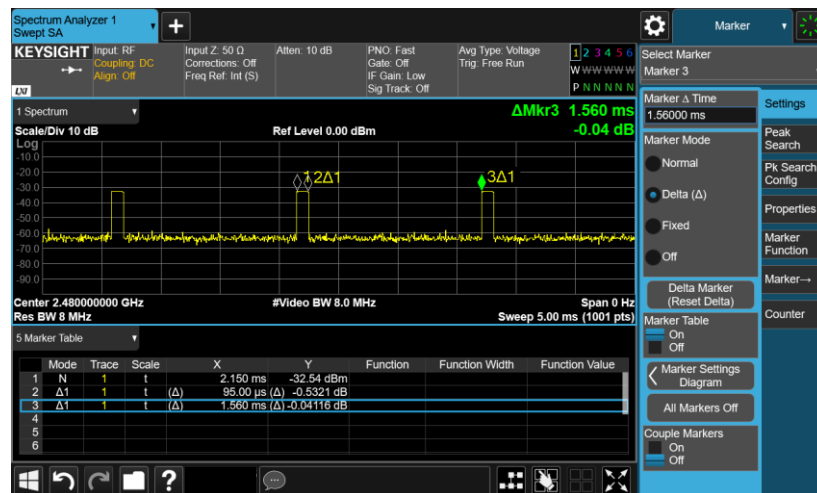

Note:

1. Duty cycle = 6.09 %
2. Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = -24.31 \text{ dB}$