

DASY8 Module WPT Measurement Report

Device under test

Info:
01_Front_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 88.40 mm, y: 45.79 mm, z: 18.39 mm

Dimensions:
x: 168.6 mm, y: 256.2 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/15

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 108.73 mA/m
x: 21.47 mA/m, y: 49.17 mA/m, z: 94.57 mA/m

Maximum H-field location relative to DUT:
x: 33.00 mm, y: -11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 129.61 V/m
x: 6.86 V/m, y: 6.24 V/m, z: 129.28 V/m

Maximum E-field location relative to DUT:
x: -36.67 mm, y: 58.67 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
105.00 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

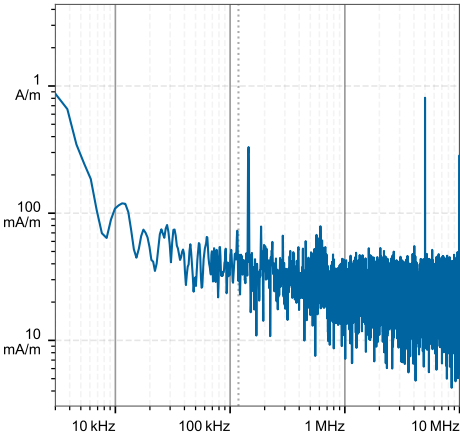

H-field magnitude [RMS] at lowest plane

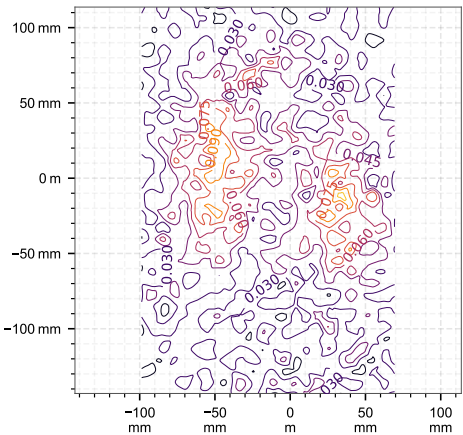

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	0.225	130	4.87e-3	4.99e-3	5.00e-3	3.16e-3	1.07e-5	6.64e-6	113

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]
0.00	0.225	130	0.0448	1.36e-4	0.225	130	0.013	1.36e-4	0.225	130	0.0302	1.36e-4	0.225	130	N/A	1.4e-4	0.225	130	0.0589	1.4e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [6.49]$, $w_{E_{ind, local}} = [9.17]$, $w_{E_{ind, line avg.}} = [3.43]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR
0.00	0.01	0.02	>999	>999	0.24	0.76	0.11	>999	12.0	0.76	<0.01	<0.01	185.0	>999	0.15	0.76	0.14	313.0	N/A	0.95

Coverage factors: $w_{E_{ind, cube avg.}} = [6.49]$, $w_{E_{ind, local}} = [9.17]$, $w_{E_{ind, line avg.}} = [3.43]$

DASY8 Module WPT Measurement Report

Device under test

Info:
02_Back_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 42.55 mm, y: -2.39 mm, z: 18.05 mm

Dimensions:
x: 168.5 mm, y: 256.0 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/15

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 1.44 A/m
x: 489.95 mA/m, y: 232.02 mA/m, z: 1.33 A/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 25.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 43.19 V/m
x: 767.96 mV/m, y: 704.56 mV/m, z: 43.18 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: 58.67 mm, z: 0.00 m


Distance to -20.0 dB boundary:
46.38 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

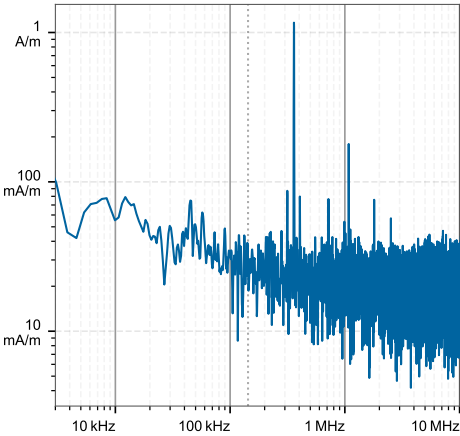

H-field magnitude [RMS] at lowest plane

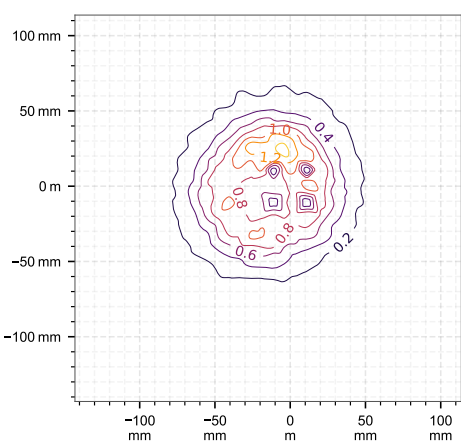

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	3.03	43.2	0.0674	0.0692	0.0692	0.0433	1.89e-3	1.05e-3	60.7

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020					ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]		BR [RMS]			RL [RMS]		BR [RMS]		ERL [RMS]		DRL [RMS]		MPE [RMS]		BR [RMS]		RL [RMS]		BR [RMS]	
	PH _{inc}	PE _{inc}	PE _{ind}	psSAR		PH _{inc}	PE _{inc}	PJ _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
	[A/m]	[V/m]	[V/m]	[mW/kg]		[A/m]	[V/m]	[A/m ²]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]
0.00	3.03	43.2	0.39	1.07e-3	3.03	43.2	0.0466	1.07e-3	3.03	43.2	0.218	1.07e-3	3.03	43.2	N/A	1.91e-3	3.03	43.2	0.562	1.91e-3	

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.71]$, $w_{E_{ind}, local} = [8.07]$, $w_{E_{ind}, line\ avg.} = [3.09]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020						ICNIRP 1998				IEEE 2019				FCC				HC Code 6											
	RL				BR		RL		BR		ERL				DRL		MPE		BR		RL				BR					
	pH _{inc}		pE _{inc}		pE _{ind} psSAR		pH _{inc}		pE _{inc}		pJ _{ind} psSAR		pH _{inc}		pE _{inc}		pE _{ind} psSAR		pH _{inc}		pE _{inc}		pE _{ind} psSAR		pH _{inc}		pE _{inc}		pE _{ind} psSA	
	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH	NS	TH
0.00	0.14	0.22	>999	>999	0.24	0.34	1.49	>999	11.8	0.34	0.02	0.03	182.0	>999	0.15	0.34	1.86	383.0	N/A	0.42	0.03	1.49	>999	N/A	0.24	0.42				

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.71]$, $w_{E_{ind}, local} = [8.07]$, $w_{E_{ind}, line\ avg.} = [3.09]$

DASY8 Module WPT Measurement Report

Device under test

Info:
03_Front_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 65.37 mm, y: -18.24 mm, z: 17.94 mm

Dimensions:
x: 168.6 mm, y: 256.4 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/16

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 182.01 mA/m
x: 47.42 mA/m, y: 61.58 mA/m, z: 164.58 mA/m

Maximum H-field location relative to DUT:
x: -40.33 mm, y: -25.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 225.32 V/m
x: 12.46 V/m, y: 11.43 V/m, z: 224.69 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: -73.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
39.49 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

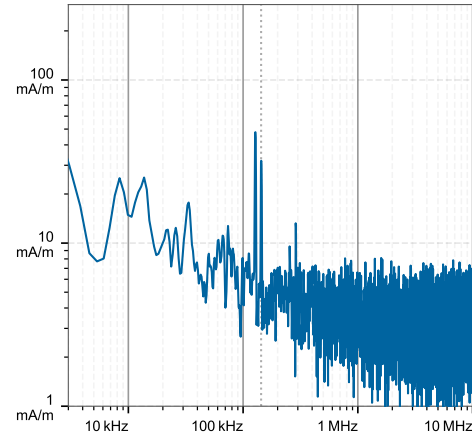

H-field magnitude [RMS] at lowest plane

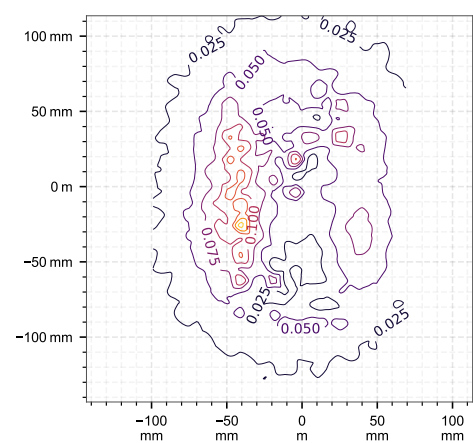

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	0.248	225	2.88e-3	2.93e-3	2.94e-3	1.94e-3	3.89e-6	2.29e-6	107

Compliance evaluation (Field values at the peak frequency)

	ICNIRP 2010/2020					ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL $[RMS]$		BR $[RMS]$			RL $[RMS]$		BR $[RMS]$		ERL $[RMS]$		DRL $[RMS]$		MPE $[RMS]$		BR $[RMS]$		RL $[RMS]$		BR $[RMS]$	
Distance	pH_{inc}	pE_{inc}	pE_{ind}	psSAR	pH_{inc}	pE_{inc}	pJ_{ind}	psSAR	pH_{inc}	pE_{inc}	pE_{ind}	psSAR	pH_{inc}	pE_{inc}	pE_{ind}	psSAR	pH_{inc}	pE_{inc}	pE_{ind}	psSAR	
[mm]	[A/m]	[V/m]	[V/m]	[mW/kg]	[A/m]	[V/m]	[A/m ²]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]	[A/m]	[V/m]	[V/m]	[mW/kg]	
0.00	0.248	225	0.0265	5.16e-5	0.248	225	8.01e-3	5.16e-5	0.248	225	0.0180	5.16e-5	0.248	225	N/A	5.32e-5	0.248	225	0.0346	5.32e-5	

Coverage factors: $w_{E_{ind, cube avg.}} = [6.40]$, $w_{E_{ind, local}} = [9.04]$, $w_{E_{ind, line avg.}} = [3.38]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020						ICNIRP 1998				IEEE 2019				FCC				HC Code 6							
	RL			BR			RL		BR		ERL		DRL		MPE		BR		RL		BR					
	P _H inc		P _E inc	P _E ind	psSAR	P _H inc	P _E inc	P _J ind	psSAR	P _H inc	P _E inc	P _E ind	psSAR	P _H inc	P _E inc	P _E ind	psSAR	P _H inc	P _E inc	P _E ind	psSAR					
	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH				
0.00	0.01	<0.01	352.0	>999	0.06	<0.01	0.05	>999	3.09	<0.01	<0.01	<0.01	147.6	211.0	0.04	<0.01	10.15	106.0	N/A	<0.01	<0.01	0.04	352.0	N/A	0.06	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [6.40]$, $w_{E_{ind, local}} = [9.04]$, $w_{E_{ind, line avg.}} = [3.38]$

DASY8 Module WPT Measurement Report

Device under test

Info:
04_Back_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 65.29 mm, y: -18.27 mm, z: 17.98 mm

Dimensions:
x: 168.7 mm, y: 256.4 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/16

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 1.36 A/m
x: 183.67 mA/m, y: 556.77 mA/m, z: 1.23 A/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 40.34 V/m
x: 1.48 V/m, y: 852.49 mV/m, z: 40.30 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: 58.67 mm, z: 0.00 m


Distance to -20.0 dB boundary:
51.33 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

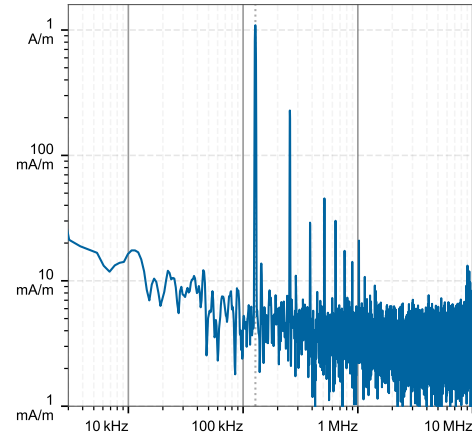

H-field magnitude [RMS] at lowest plane

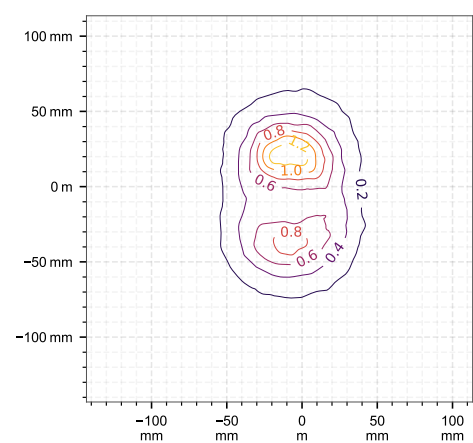

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	2.77	40.3	0.0174	0.0177	0.0177	0.0117	1.47e-4	9.18e-5	58.0

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	2.77	40.3	0.100	9.34e-5	2.77	40.3	0.0128	9.34e-5	2.77	40.3	0.056	9.34e-5	2.77	40.3	N/A	1.49e-4	2.77	40.3	0.143	1.49e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [5.67]$, $w_{E_{ind, local}} = [8.01]$, $w_{E_{ind, line avg.}} = [3.07]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.13	0.07	50.6	195.0	0.01	<0.01	0.55	88.6	0.49	<0.01	0.10	<0.01	0.63	21.9	<0.01	<0.01	11.7	12.1	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.67]$, $w_{E_{ind, local}} = [8.01]$, $w_{E_{ind, line avg.}} = [3.07]$

DASY8 Module WPT Measurement Report

Device under test

Info:
05_Front_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 91.56 mm, y: -27.01 mm, z: 16.93 mm

Dimensions:
x: 256.4 mm, y: 256.7 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 2.15 A/m
x: 346.01 mA/m, y: 382.56 mA/m, z: 2.08 A/m

Maximum H-field location relative to DUT:
x: 33.00 mm, y: -11.00 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 544.08 V/m
x: 10.58 V/m, y: 36.34 V/m, z: 542.76 V/m

Maximum E-field location relative to DUT:
x: 0.00 m, y: -73.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
36.67 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

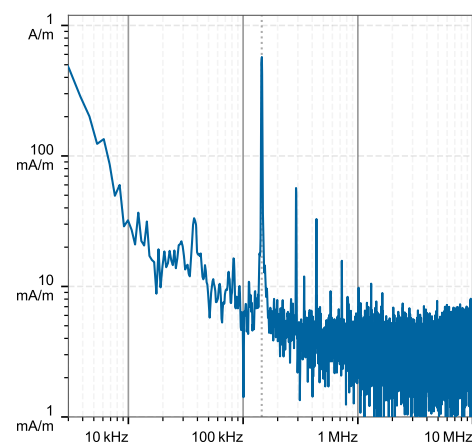

H-field magnitude [RMS] at lowest plane

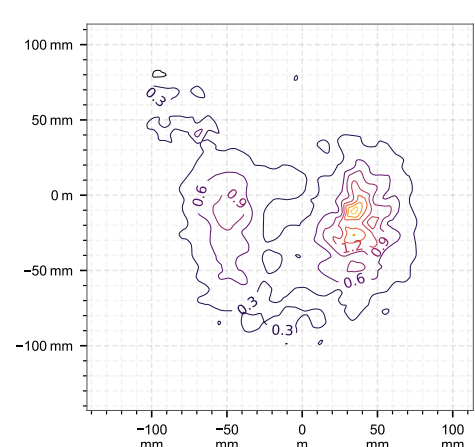

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	2.98	544	0.0206	0.021	0.0210	0.0138	2.06e-4	1.3e-4	84.0

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]
0.00	2.98	544	0.147	4.97e-4	2.98	544	0.0304	4.97e-4	2.98	544	0.0902	4.97e-4	2.98	544	N/A	5.73e-4	2.98	544	0.202	5.73e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [6.06]$, $w_{E_{ind, local}} = [8.56]$, $w_{E_{ind, line avg.}} = [3.24]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR
0.00	0.14	0.09	40.4	5.14	0.01	<0.01	10.60	14.9	0.40	<0.01	10.02	0.01	5.45	1.08	<0.01	<0.01	11.83	9.42	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [6.06]$, $w_{E_{ind, local}} = [8.56]$, $w_{E_{ind, line avg.}} = [3.24]$

DASY8 Module WPT Measurement Report

Device under test

Info:
06_Right_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 117.40 mm, y: 14.84 mm, z: 80.11 mm

Dimensions:
x: 168.6 mm, y: 213.2 mm, z: 36.4 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 3.33 A/m
x: 1.33 A/m, y: 484.06 mA/m, z: 3.01 A/m

Maximum H-field location relative to DUT:
x: -3.67 mm, y: 3.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 195.76 V/m
x: 3.88 V/m, y: 350.66 mV/m, z: 195.72 V/m

Maximum E-field location relative to DUT:
x: 0.00 m, y: -36.67 mm, z: 0.00 m


Distance to -20.0 dB boundary:
37.39 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

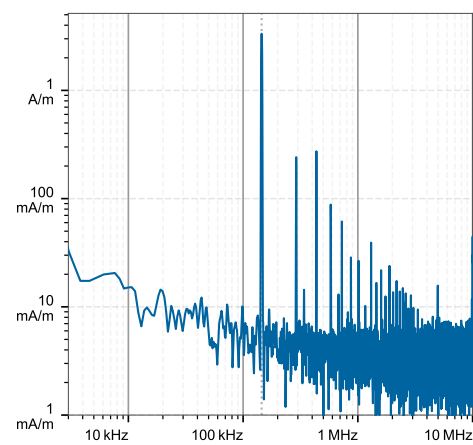

H-field magnitude [RMS] at lowest plane

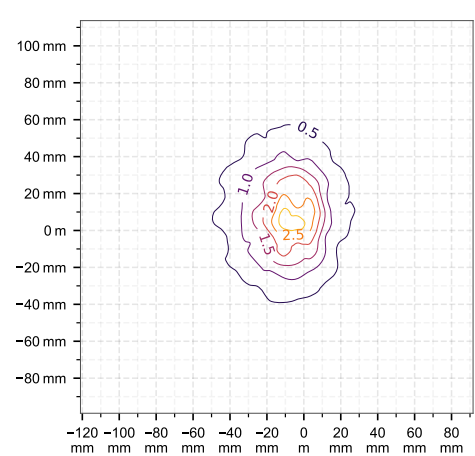

Incident fields and induced fields in the homogenous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	6.57	196	0.0346	0.0354	0.0355	0.0221	4.79e-4	2.44e-4	41.3

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	6.57	196	0.195	2.92e-4	6.57	196	0.0281	2.92e-4	6.57	196	0.113	2.92e-4	6.57	196	N/A	5.27e-4	6.57	196	0.279	5.27e-4

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.42]$, $w_{E_{ind}, local} = [7.66]$, $w_{E_{ind}, line\ avg.} = [2.97]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.31	0.19	9.98	0.91	0.01	<0.01	1.31	8.83	0.16	<0.01	10.04	0.03	1.35	0.25	<0.01	<0.01	14.03	2.11	N/A	<0.01

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.42]$, $w_{E_{ind}, local} = [7.66]$, $w_{E_{ind}, line\ avg.} = [2.97]$

DASY8 Module WPT Measurement Report

Device under test

Info:
07_Back_0mm

Tool info

DASY software version:
DASY8 Module WPT 2.8.0.5184

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
2.8.8, backend: 2.2.36

Scan info

Center location:
x: 98.39 mm, y: -26.93 mm, z: 17.07 mm

Dimensions:
x: 168.6 mm, y: 256.7 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/07/17

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 2.71 A/m
x: 559.20 mA/m, y: 105.42 mA/m, z: 2.65 A/m

Maximum H-field location relative to DUT:
x: 3.67 mm, y: -40.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 60.63 V/m
x: 3.08 V/m, y: 1.72 V/m, z: 60.53 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: 51.33 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
39.49 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

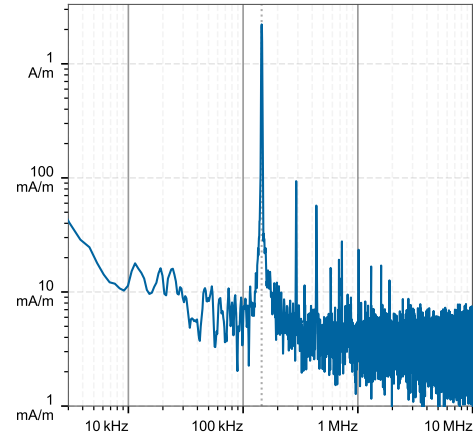

H-field magnitude [RMS] at lowest plane

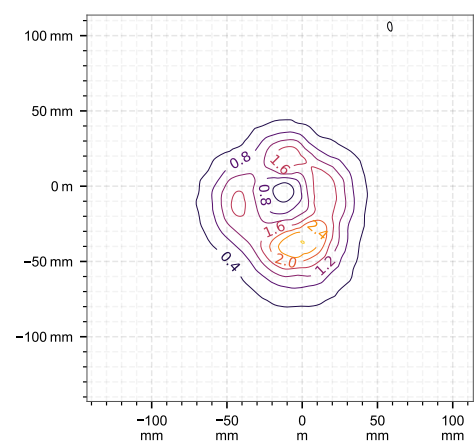

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	5.67	60.6	0.0411	0.0421	0.0420	0.0263	6.65e-4	3.09e-4	57.1

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]
0.00	5.67	60.6	0.235	3.13e-4	5.67	60.6	0.0282	3.13e-4	5.67	60.6	0.131	3.13e-4	5.67	60.6	N/A	6.69e-4	5.67	60.6	0.339	6.69e-4

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.66]$, $w_{E_{ind}, local} = [7.99]$, $w_{E_{ind}, line\ avg.} = [3.07]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	ERL	DRL	MPE	BR
0.00	0.27	0.17	118.0	685.0	0.03	<0.01	1.13	231.0	1.13	<0.01	0.03	0.02	16.0	84.7	0.02	<0.01	13.48	30.8	N/A	<0.01

Coverage factors: $w_{E_{ind}, cube\ avg.} = [5.66]$, $w_{E_{ind}, local} = [7.99]$, $w_{E_{ind}, line\ avg.} = [3.07]$

DASY8 Module WPT Measurement Report

Device under test

Info:
08_Back_0mm

Tool info

DASY software version:
DASY8 Module WPT 3.4.0.6944

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
3.4.0, backend: 3.2.21

Hardware version:
FPGA: 100, FW: N/A

Scan info

Center location:
x: 152.34 mm, y: -13.56 mm, z: 17.17 mm

Dimensions:
x: 168.7 mm, y: 257.0 mm, z: 36.6 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/08/26

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 6.96 A/m
x: 2.58 A/m, y: 1.15 A/m, z: 6.36 A/m

Maximum H-field location relative to DUT:
x: -11.00 mm, y: -47.67 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 141.08 V/m
x: 1.49 V/m, y: 778.05 mV/m, z: 141.07 V/m

Maximum E-field location relative to DUT:
x: -29.33 mm, y: 44.00 mm, z: 0.00 mm


Distance to -20.0 dB boundary:
46.38 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

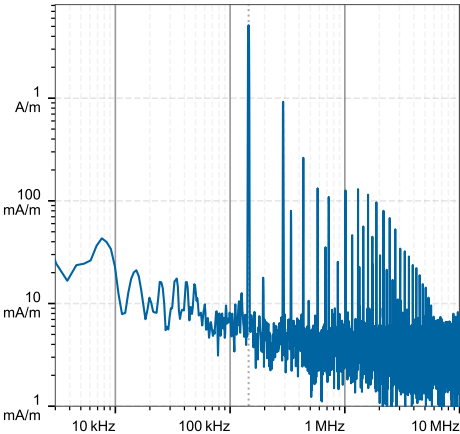

H-field magnitude [RMS] at lowest plane

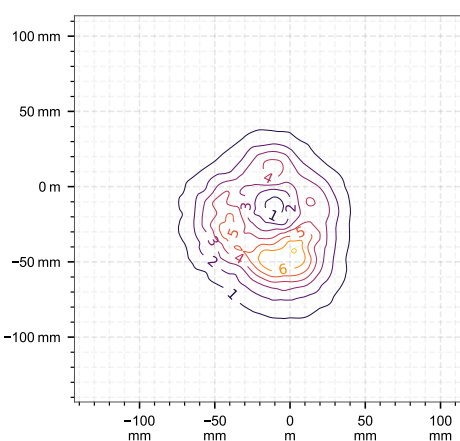

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	14.8	141	0.114	0.116	0.116	0.0740	5.38e-3	2.62e-3	57.7

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]	PH _{inc} [A/m]	PE _{inc} [V/m]	PE _{ind} [V/m]	psSAR [mW/kg]
0.00	14.8	141	0.65	2.64e-3	14.8	141	0.0783	2.64e-3	14.8	141	0.363	2.64e-3	14.8	141	N/A	5.40e-3	14.8	141	0.936	5.40e-3

Coverage factors: $w_{E_{ind, cube avg.}} = [5.66]$, $w_{E_{ind, local}} = [8.00]$, $w_{E_{ind, line avg.}} = [3.07]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL	BR	RL	BR	ERL	DRL	MPE	BR	RL	BR	RL	BR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR	PH _{inc}	PE _{inc}	PE _{ind}	psSAR
0.00	0.70	0.44	168.0	>999	0.06	<0.01	2.96	346.0	1.72	<0.01	10.09	0.06	22.7	247.0	0.03	<0.01	19.07	84.0	N/A	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [5.66]$, $w_{E_{ind, local}} = [8.00]$, $w_{E_{ind, line avg.}} = [3.07]$

DASY8 Module WPT Measurement Report

Device under test

Info:
09_Front_0mm

Tool info

DASY software version:
DASY8 Module WPT 3.4.0.6944

Probe model, serial no. and configuration date:
MAGPy-8H3D+E3Dv2, 3059, 2026/05/27

Software version:
3.4.0, backend: 3.2.21

Hardware version:
FPGA: 100, FW: N/A

Scan info

Center location:
x: 127.90 mm, y: -25.34 mm, z: 16.42 mm

Dimensions:
x: 213.1 mm, y: 256.3 mm, z: 36.7 mm

Resolution:
x: 7.33 mm, y: 7.33 mm, z: 7.33 mm

Completed on:
2026/08/26

Measurement results

Maximum H-field [RMS]:
MAGNITUDE: 992.45 mA/m
x: 151.66 mA/m, y: 102.18 mA/m, z: 975.45 mA/m

Maximum H-field location relative to DUT:
x: 33.00 mm, y: -18.33 mm, z: 8.50 mm


Maximum E-field [RMS]:
MAGNITUDE: 380.80 V/m
x: 2.78 V/m, y: 13.37 V/m, z: 380.56 V/m

Maximum E-field location relative to DUT:
x: 0.00 m, y: 51.33 mm, z: 0.00 m


Distance to -20.0 dB boundary:
66.41 mm

Offset relative to DUT:
x: 0.00 m, y: 0.00 m, z: 1.00 mm

H-field magnitude [RMS] at center location

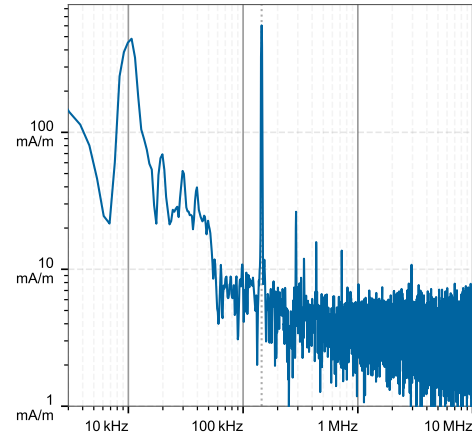

H-field magnitude [RMS] at lowest plane

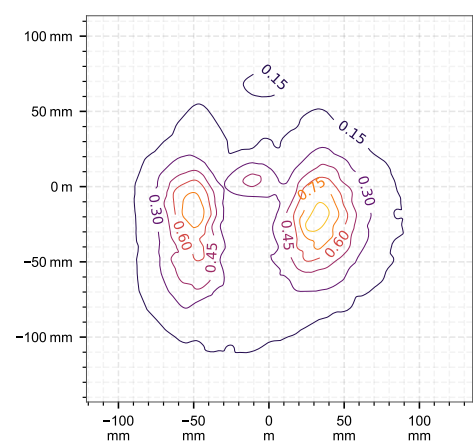

Incident fields and induced fields in the homogeneous phantom at the peak frequency

Distance [mm]	Peak incident fields [RMS]		Peak E _{ind} [V/m, RMS]			Peak J _{ind} [A/m ² , RMS]	psSAR [mW/kg]		H-field extent
	H _{inc} [A/m]	E _{inc} [V/m]	Cube avg.	Local	Line avg.	Surface avg.	1g avg.	10g avg.	-20 dB radius [mm]
0.00	1.91	381	0.0156	0.0159	0.016	0.0103	1.09e-4	5.87e-5	84.4

Compliance evaluation (Field values at the peak frequency)

Distance [mm]	ICNIRP 2010/2020				ICNIRP 1998				IEEE 2019				FCC				HC Code 6			
	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	ERL [RMS]	DRL [RMS]	MPE [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]	RL [RMS]	BR [RMS]
0.00	1.91	381	0.110	2.39e-4	1.91	381	0.022	2.39e-4	1.91	381	0.0672	2.39e-4	1.91	381	N/A	2.9e-4	1.91	381	0.152	2.9e-4

Coverage factors: $w_{E_{ind, cube avg.}} = [6.07]$, $w_{E_{ind, local}} = [8.57]$, $w_{E_{ind, line avg.}} = [3.24]$

Compliance evaluation (Exposure ratios) (with multi-frequency enhancement, total field evaluation, coverage evaluation)

Distance [mm]	ICNIRP 2010/2020								ICNIRP 1998				IEEE 2019				FCC				HC Code 6							
	RL				BR				RL		BR		ERL				DRL		MPE		BR		RL		BR			
	pH _{inc}		pE _{inc}		pE _{ind}		psSAR		pH _{inc}	pE _{inc}	pJ _{ind}	psSAR	pH _{inc}		pE _{inc}		pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR	pH _{inc}	pE _{inc}	pE _{ind}	psSAR		
	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	NS	TH	NS	TH	NS	TH	NS	TH	N/A	N/A	N/A	TH	NS	TH	NS	TH	NS	TH
0.00	0.09	0.06	7.15	0.23	<0.01	<0.01	0.38	4.81	0.10	<0.01	0.10	<0.01	0.01	<0.01	0.97	0.30	<0.01	<0.01	1.17	0.97	N/A	<0.01	0.02	0.38	7.15	N/A	<0.01	<0.01

Coverage factors: $w_{E_{ind, cube avg.}} = [6.07]$, $w_{E_{ind, local}} = [8.57]$, $w_{E_{ind, line avg.}} = [3.24]$