

SC4812T 1X / 1X-EVDO @ 800 MHz CDMA BTS

TEST REPORT EXHIBIT

Index

<u>Section</u>	<u>Description</u>
A	Summary of RF Measurements
B	Modulation Characteristics
C	Spurious & Harmonic Emissions Radiated
D	Spurious & Harmonic Emissions Conducted
E	Occupied Bandwidth
F	Frequency Stability

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Section A

Summary of RF Measurements

M

APPLICANT: MOTOROLA

Global Telecom Solutions Sector

FCC ID: IHET5DS1

Summary of Radiated RF Measurements

Worst Case Radiated RF Spur Level for SC4812T 1X-EVDO @ 800MHz CDMA BTS

Radiated RF Measurements					Spec	Result
Channel	Spurious Frequency (MHz)	Antenna Polarity	Measured Radiated Field Strength (dBuV/m)	Measured Radiated Field Strength (dBm) (Note 1)	FCC Part 22/24 MAX LIMIT (dBm)	(Pass/Fail)
770	1785	H	67.1	-28.128	-13	Pass

Worst Case Radiated RF Spur Level for SC4812T 1X @ 800MHz CDMA BTS

Radiated RF Measurements					Spec	Result
Channel	Spurious Frequency (MHz)	Antenna Polarity	Measured Radiated Field Strength (dBuV/m)	Measured Radiated Field Strength (dBm) (Note 1)	FCC Part 22/24 MAX LIMIT (dBm)	(Pass/Fail)
777	1786	H	64.89	-30.34	-13	Pass

Notes:

1. Converting dBuV/M to dBm at 3 meters:
 $(\text{dBuV/M}) + 9.542 - 104.77 = \text{dBm}$
Converting dBuV/M to dBm at 10 meters:
 $(\text{dBuV/M}) + 20 - 104.77 = \text{dBm}$
- 2.



10.29.03

Signature

Date

Terry Schwenk

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Summary of Conducted RF Measurements

SC4812T 1X-EVDO @ 800MHz CDMA BTS
FCC Part 22

CHANNEL	FREQUENCY (MHz)	SPUR LEVEL MEASURED (dBmV)	SPUR LEVEL MEASURED (dBm)	FCC MAX LIMIT (dBm)	PASS / FAIL
770	6912.382	85.45	-21.55	-13	Pass

SC4812T 1X @ 800MHz CDMA BTS

CHANNEL	FREQUENCY (MHz)	SPUR LEVEL MEASURED (dBmV)	SPUR LEVEL MEASURED (dBm)	FCC MAX LIMIT (dBm)	PASS / FAIL
1013	8697	66.85	-39.15	-13	Pass



10.29.03

Signature

Date

Francisco Avalos

Section B

Summary of Modulation Characteristics

SC4812T 1X-EVDO @ 800MHz CDMA BTS

CHANNEL	TUNE FREQUENCY (MHz)	RHO Measured	RHO Specifications	PASS / FAIL
770	893.10	.99668	> 0.912	Pass
1020	869.91	.99685	> 0.912	Pass

SC4812T 1X @ 800MHz CDMA BTS

CHANNEL	TUNE FREQUENCY (MHz)	RHO Measured	RHO Specifications	PASS / FAIL
777	893.31	.9868	> 0.912	Pass
1013	869.7	.9856	> 0.912	Pass

The BTS was configured for maximum power out of 47.78 dBm and minimum power out of 36.5 dBm respectively. The output power was set respectively to 60.0 Watts or 4.5 Watts using an HP437B power meter



10.29.03


Signature

Date


Francisco Avalos

SC4812T 1X-EVDO – Modulation Characteristics

High Power – 47.78 dBm – 8PSK

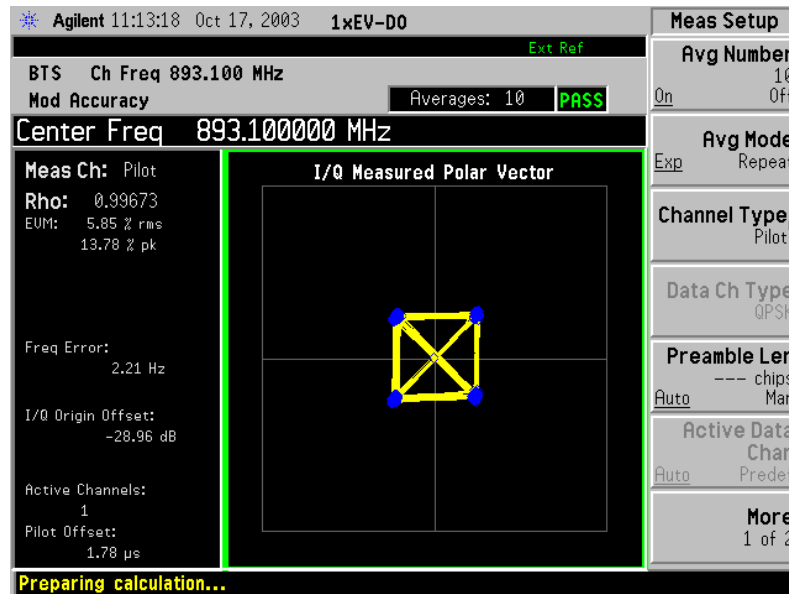


Channel 770 – 893.1 MHz

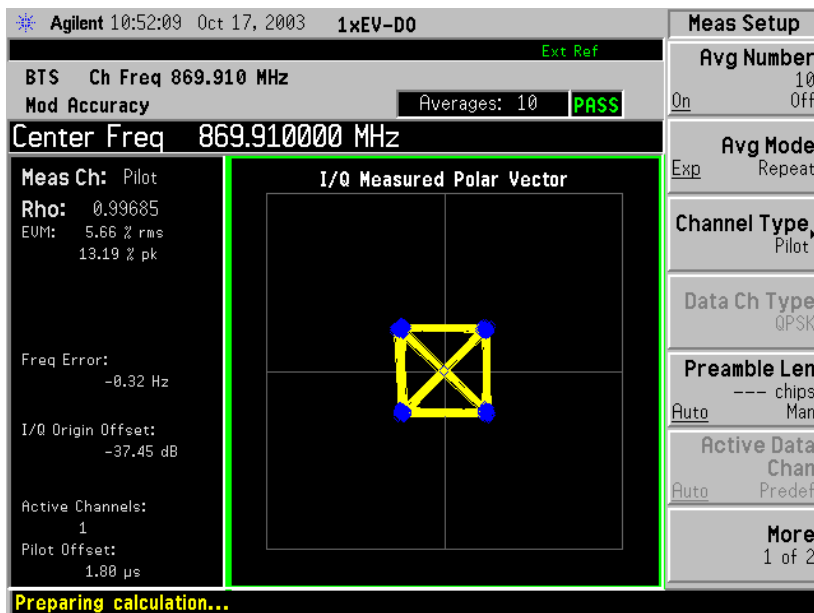


Channel 1020 – 869.91 MHz

SC4812T 1X-EVDO – Modulation Characteristics

High Power – 47.78 dBm – 16QAM

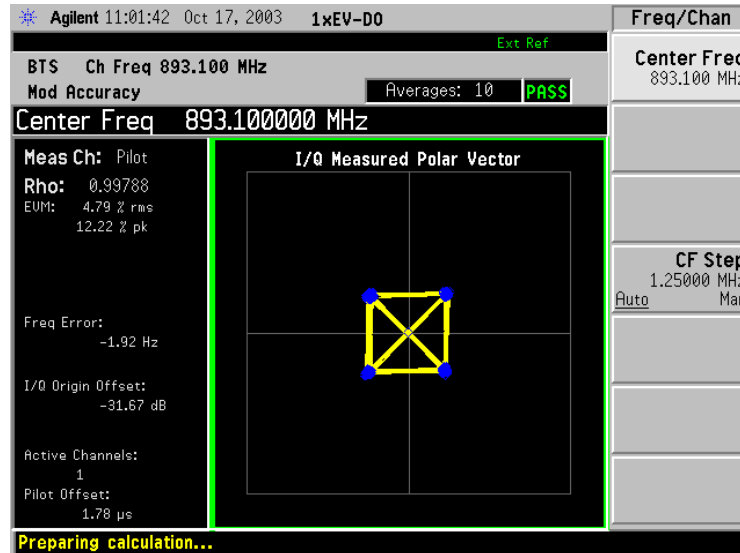


Channel 770 – 893.1 MHz

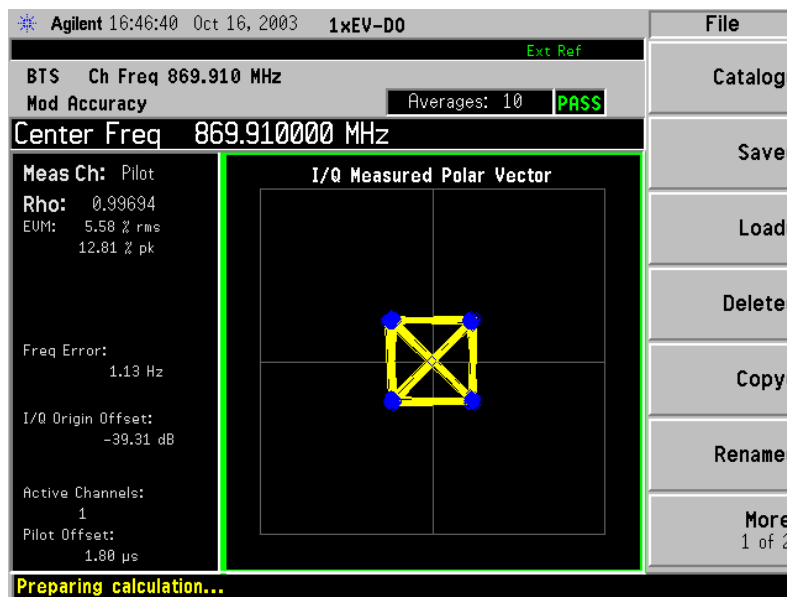


Channel 1020 – 869.91 MHz

SC4812T 1X-EVDO – Modulation Characteristics

Low Power – 36.5 dBm – 8PSK

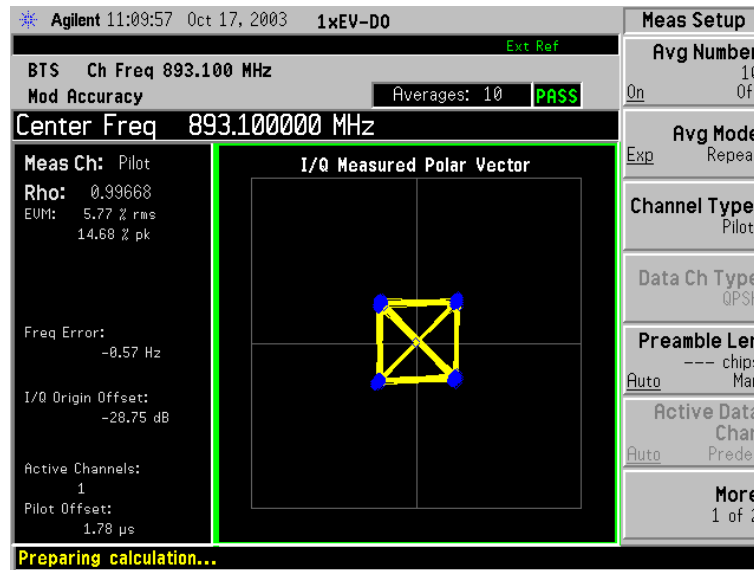


Channel 770 – 893.1 MHz

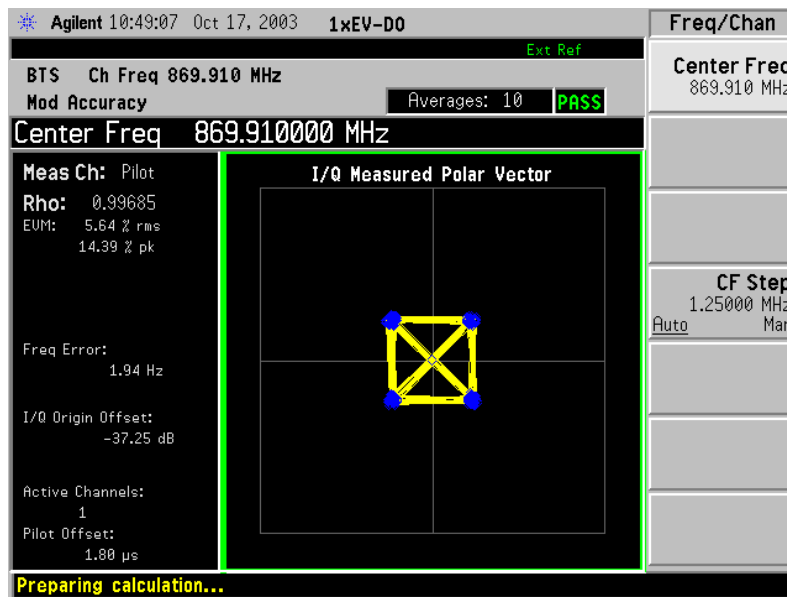


Channel 1020 – 869.91 MHz

SC4812T 1X-EVDO – Modulation Characteristics

Low Power – 36.5 dBm – 16QAM

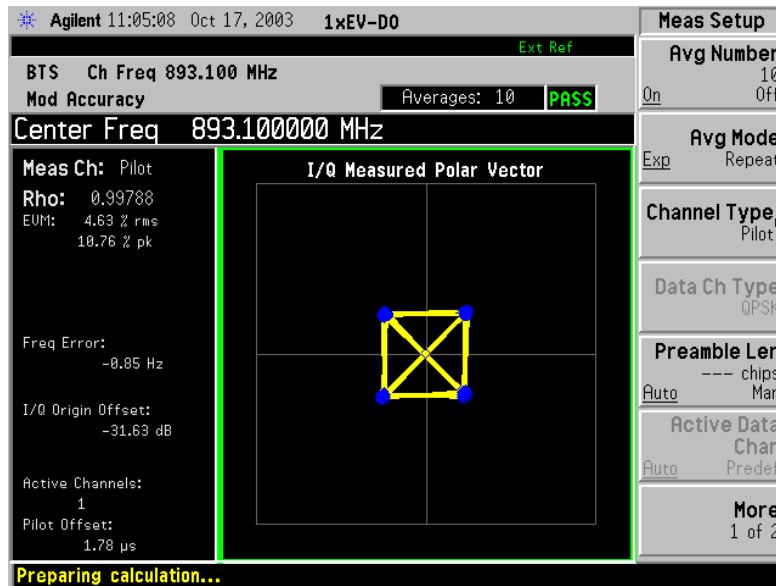

Channel 770 – 893.1 MHz

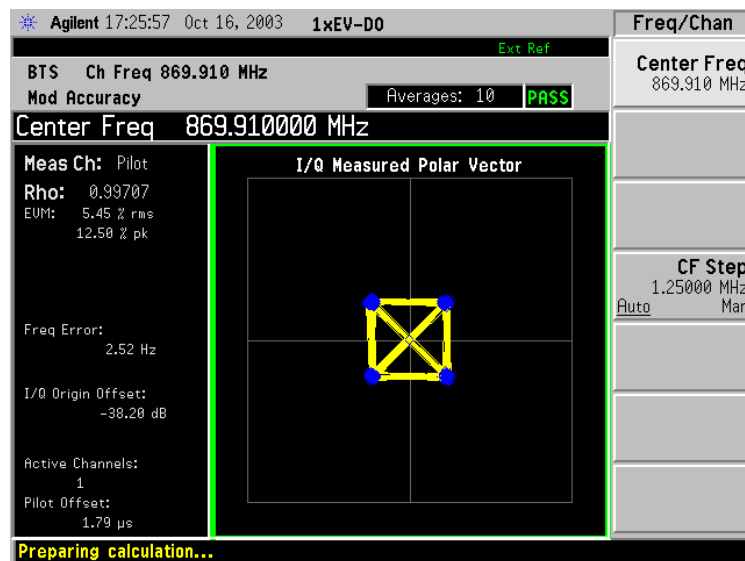

Channel 1020 – 869.91 MHz

SC4812T 1X – Modulation Characteristics

High Power – 47.78 dBm




Channel 777 – 893.31 MHz




Channel 1013 – 869.7 MHz

SC4812T 1X – Modulation Characteristics

Low Power – 26.0 dBm

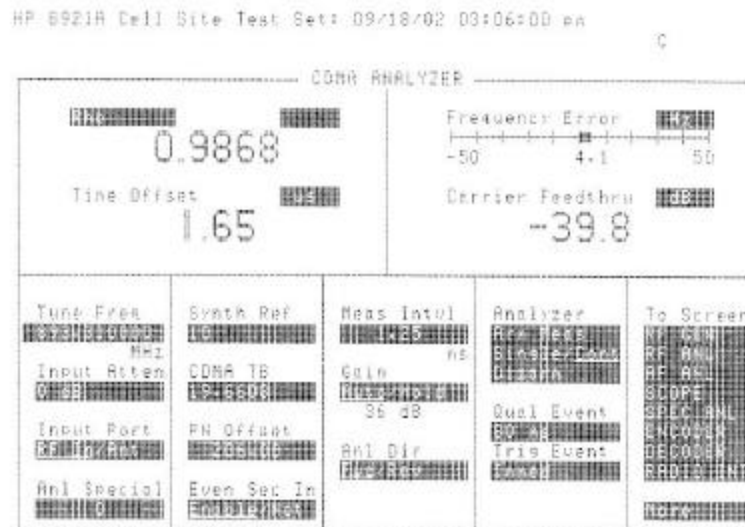

Channel 777 – 893.31 MHz

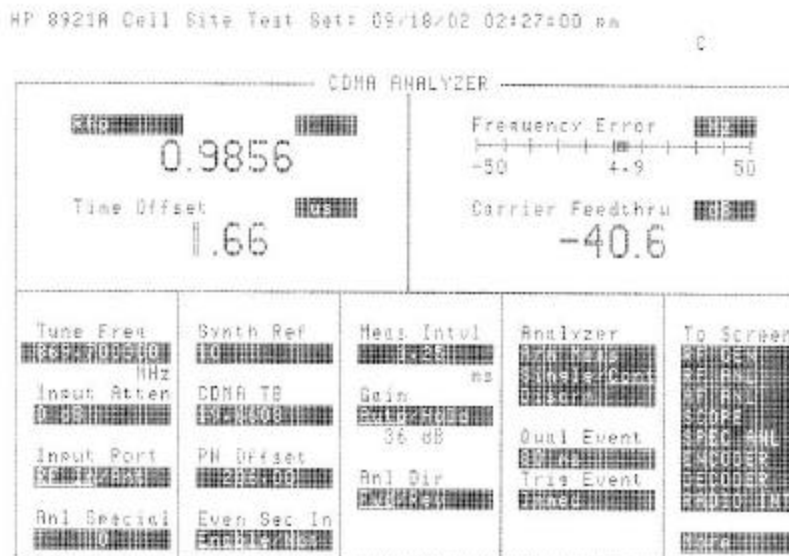

Channel 1013 – 869.7 MHz

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Section C

Spurious and Harmonic Emissions Radiated

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Radiated RF Measurements

Worst Case Radiated RF Spur Levels for SC4812T 1X-EVDO @ 800MHz CDMA BTS

Radiated RF Measurements					Spec	Result
Channel	Spurious Frequency (MHz)	Antenna Polarity	Measured Radiated Field Strength (dBuV/m)	Measured Radiated Field Strength (dBm) (Note 1)	FCC Part 22/24 MAX LIMIT (dBm)	(Pass/Fail)
770	1785	H	67.1	-28.128	-13	Pass
1020	1785	V	65.4	-29.828	-13	Pass

Worst Case Radiated RF Spur Levels for SC4812T 1X @ 800MHz CDMA BTS

Radiated RF Measurements					Spec	Result
Channel	Spurious Frequency (MHz)	Antenna Polarity	Measured Radiated Field Strength (dBuV/m)	Measured Radiated Field Strength (dBm) (Note 1)	FCC Part 22/24 MAX LIMIT (dBm)	(Pass/Fail)
777	1786	H	64.89	-30.34	-13	Pass
1013	1739	V	63.513	-31.72	-13	Pass

Notes:

1. Converting dBuV/M to dBm at 3 meters:
(dBuV/M) + 9.542 – 104.77 = dBm
Converting dBuV/M to dBm at 10 meters:
(dBuV/M) + 20 – 104.77 = dBm



10.29.03

Signature

Date

Terry Schwenk

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Section C

Spurious and Harmonic Emissions Conducted

M

Global Telecom Solutions Sector

APPLICANT: MOTOROLA

FCC ID: IHET5DS1

Conducted RF Measurements

SC4812T 1X-EVDO @ 800MHz CDMA BTS FCC Part 22

CHANNEL	FREQUENCY (MHz)	SPUR LEVEL MEASURED (dBmV)	SPUR LEVEL MEASURED (dBm)	FCC MAX LIMIT (dBm)	PASS / FAIL
770	6912.382	85.45	-21.55	-13	Pass
1020	6960.992	85.26	-21.74	-13	Pass

SC4812T 1X @ 800MHz CDMA BTS FCC Part 22

CHANNEL	FREQUENCY (MHz)	SPUR LEVEL MEASURED (dBmV)	SPUR LEVEL MEASURED (dBm)	FCC MAX LIMIT (dBm)	PASS / FAIL
1013	8697	66.85	-39.15	-13	Pass

FCC Maximum Limit Per 47 CFR:

- " = Transmitted Power ($10 \log_{10}(P_{\text{watt}})$) - ($43 + 10 \log_{10}(P_{\text{watt}})$) dBW
- " = $10 \log_{10}(P_{\text{watt}})$ - ($43 + 10 \log_{10}(P_{\text{watt}})$) dBW
- " = -43 dBW
- " = -13 dBm



10.29.03



Signature

Date

Francisco Avalos



Spurious and Harmonic Emissions Conducted

CDMA Channel 770 – 47.78 dBm – 8PSK

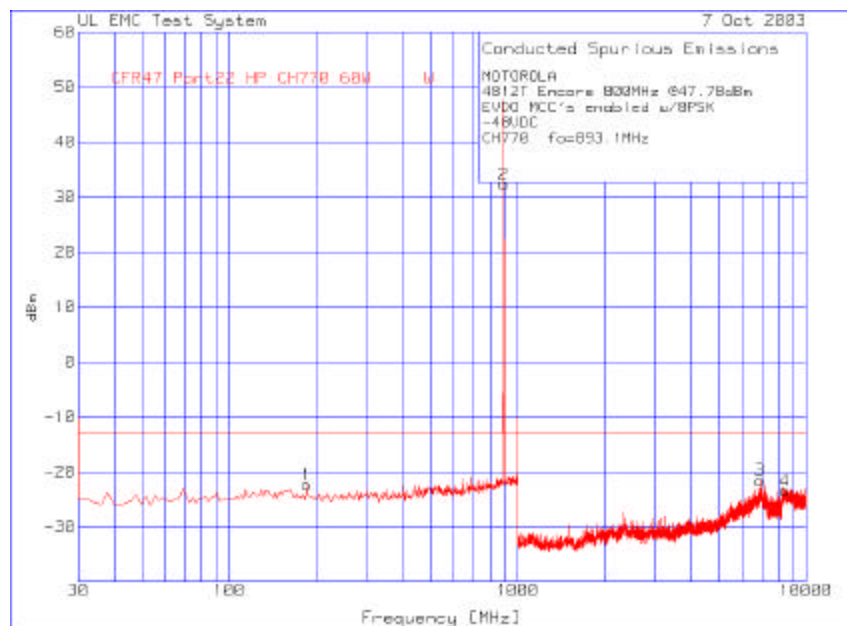
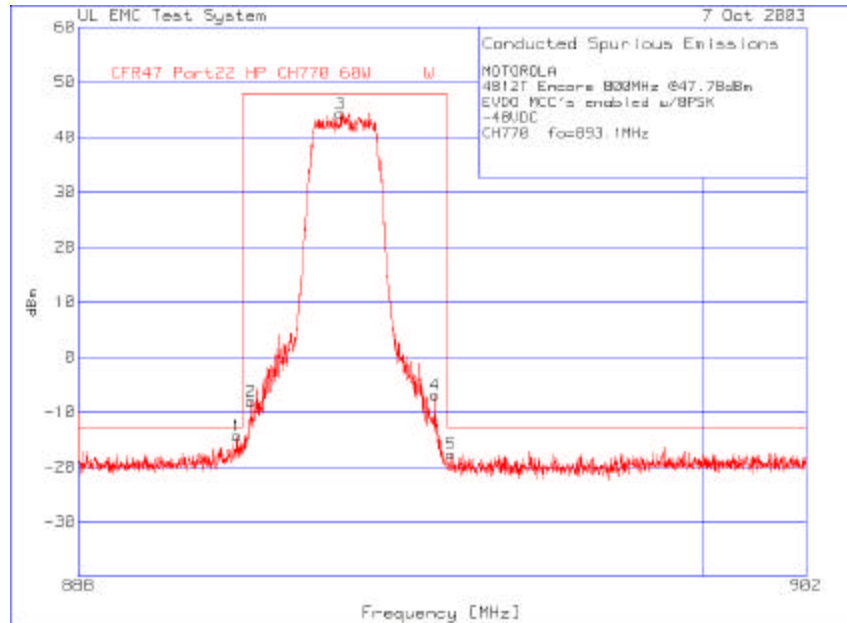


Spurious and Harmonic Emissions Conducted



CDMA Channel 770 – 47.78 dBm – 16QAM

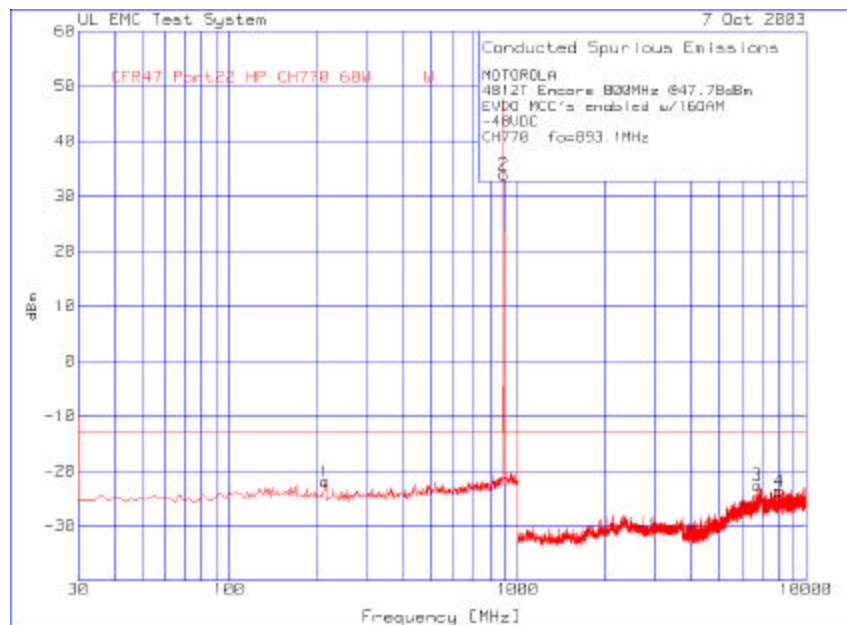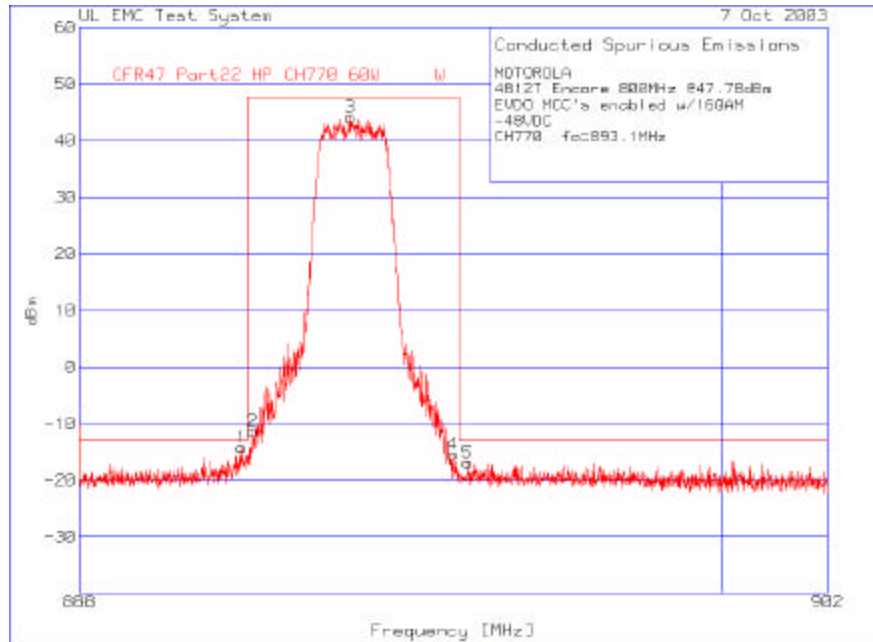



Spurious and Harmonic Emissions Conducted CDMA Channel 770 – 36.5 dBm – 8PSK

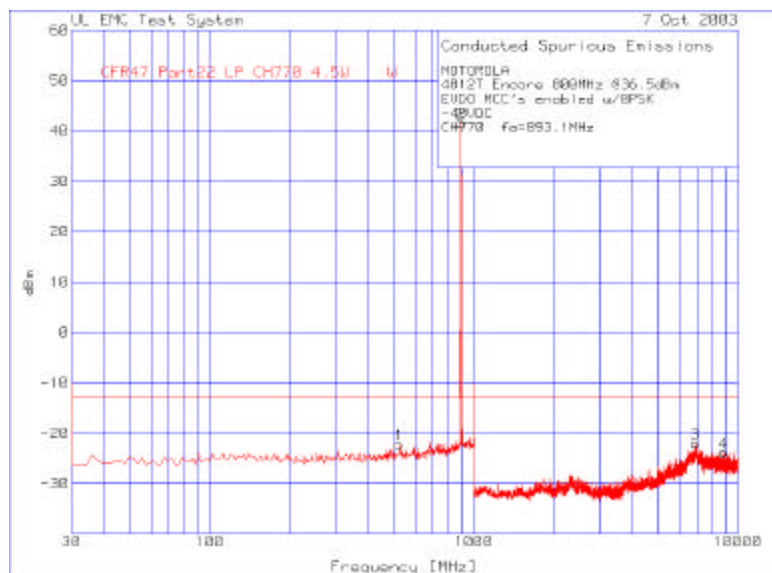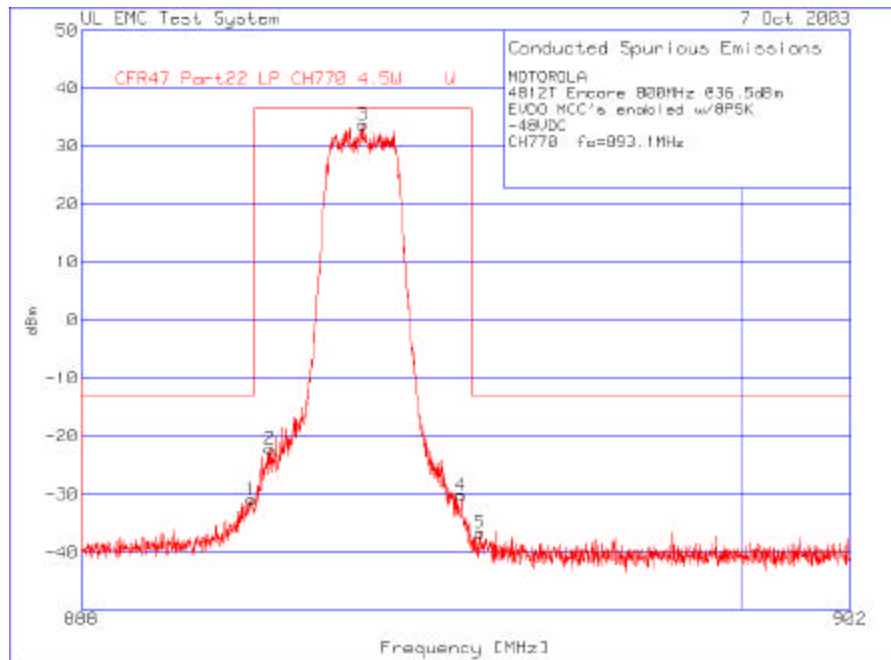



Spurious and Harmonic Emissions Conducted CDMA Channel 770 – 36.5 dBm – 16QAM

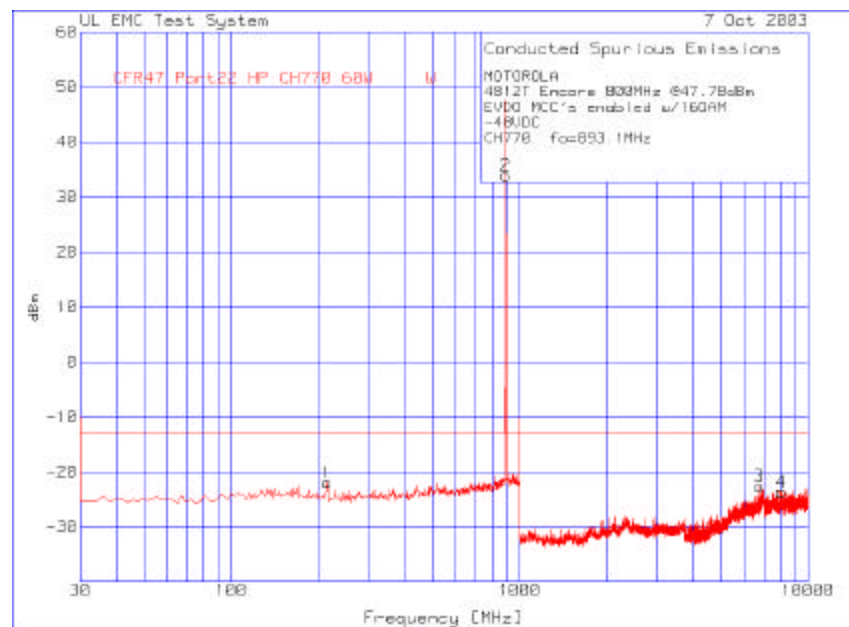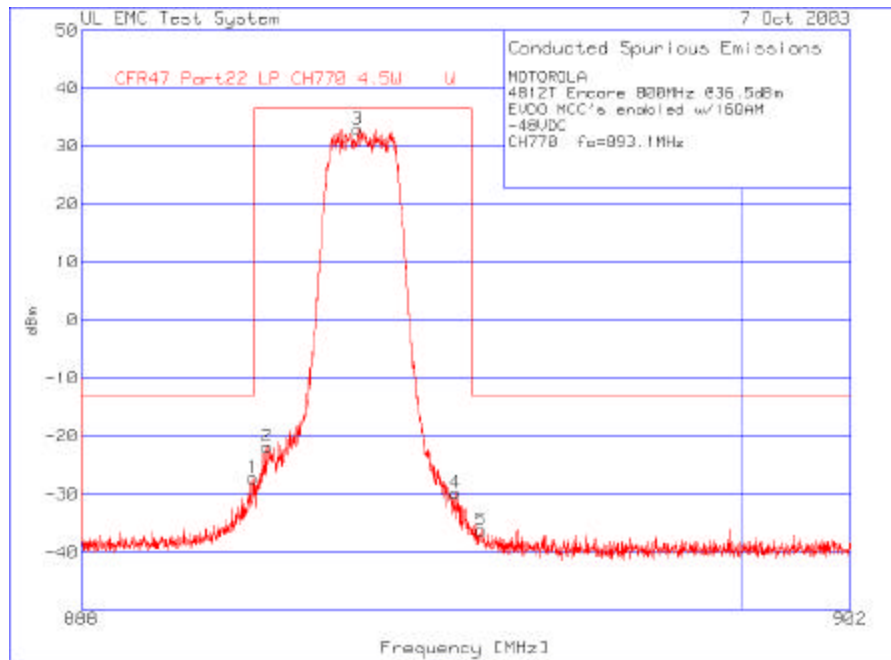



Spurious and Harmonic Emissions Conducted CDMA Channel 1020 – 47.78 dBm – 8PSK

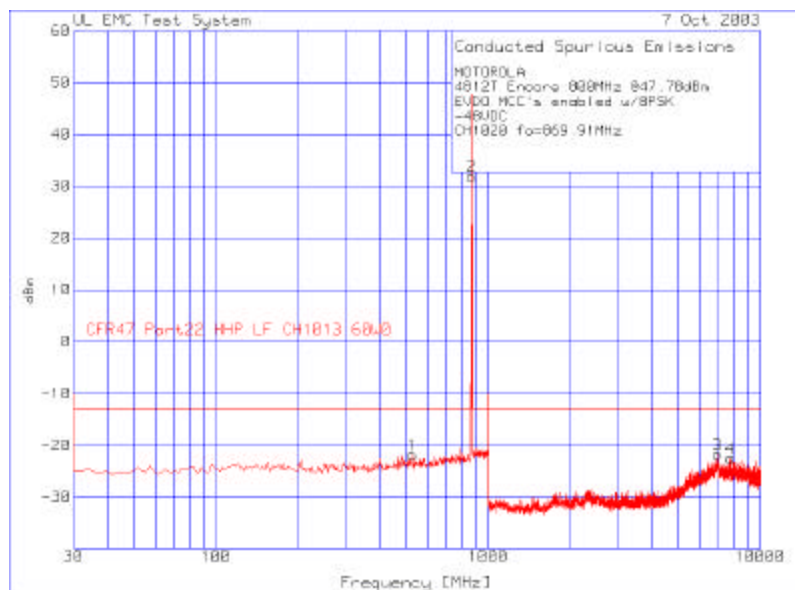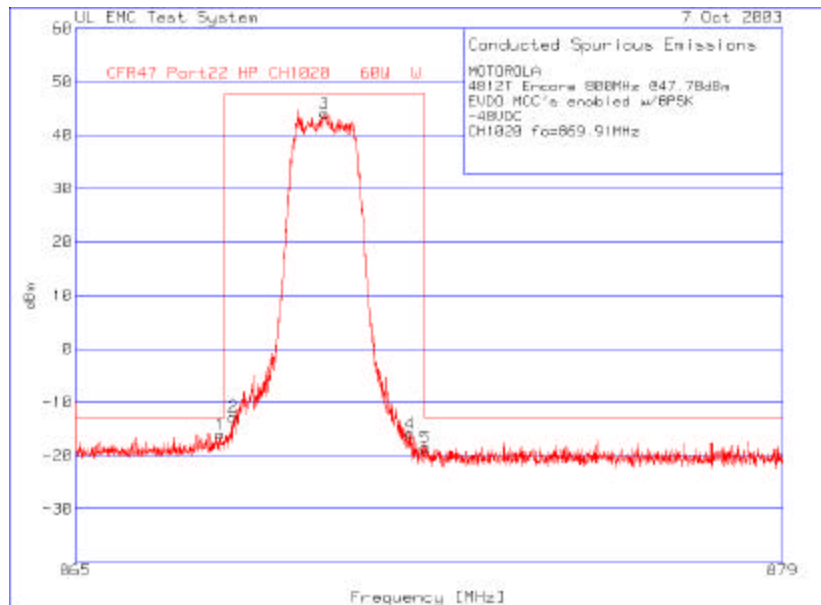



Spurious and Harmonic Emissions Conducted CDMA Channel 1020 – 47.78 dBm – 16QAM

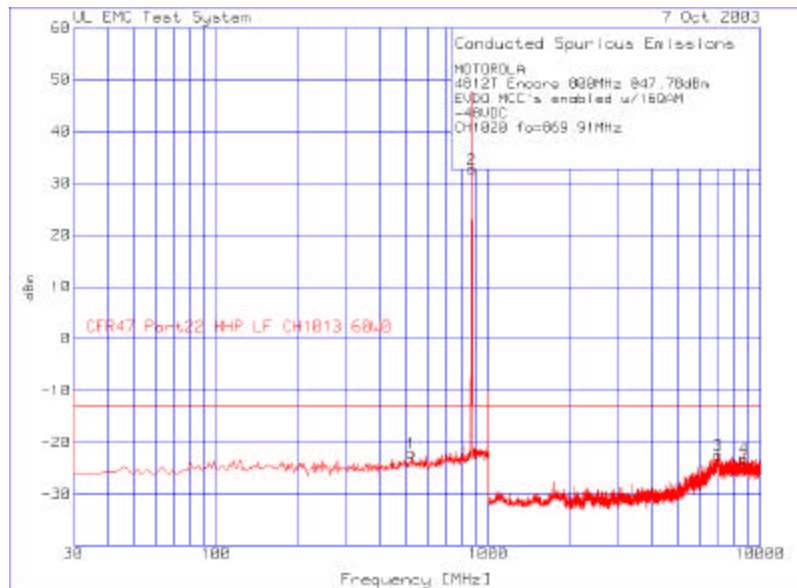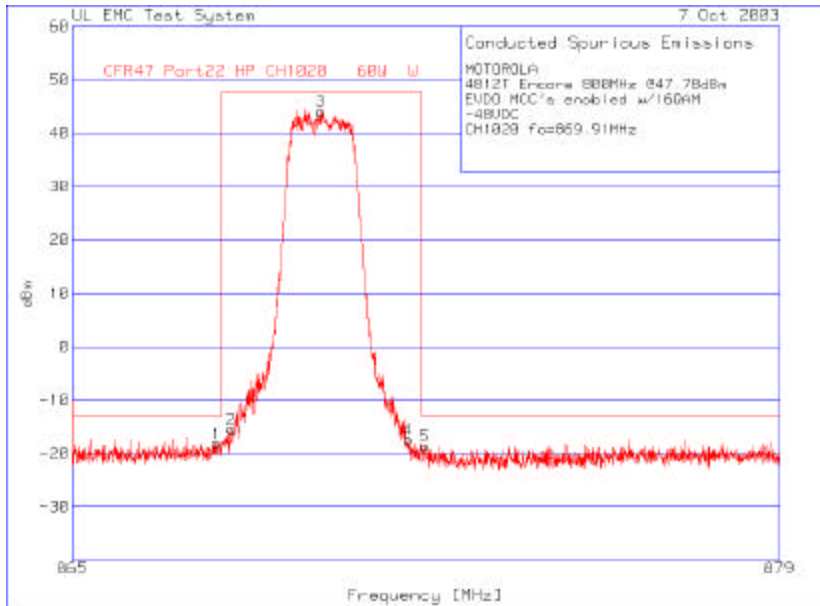

Spurious and Harmonic Emissions Conducted CDMA Channel 1020 – 36.5 dBm – 8PSK

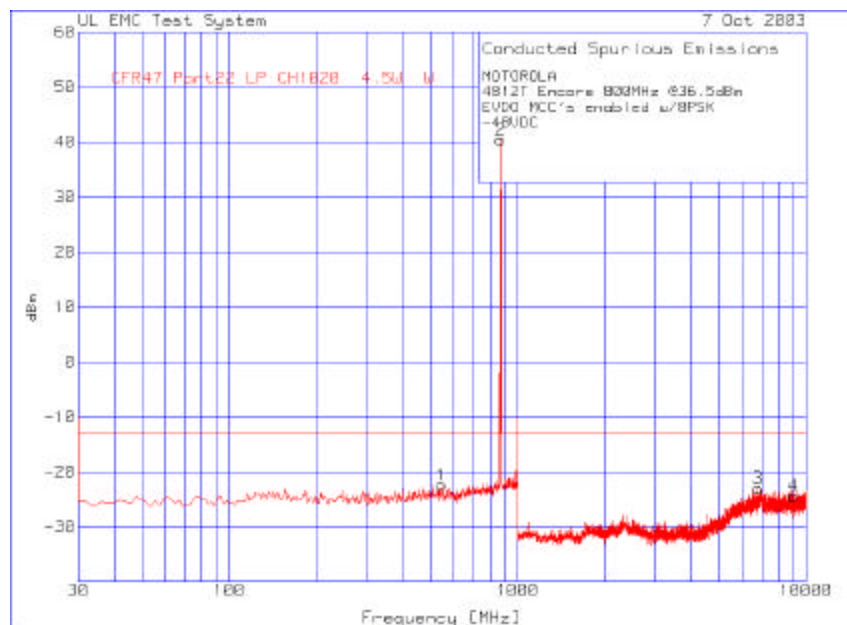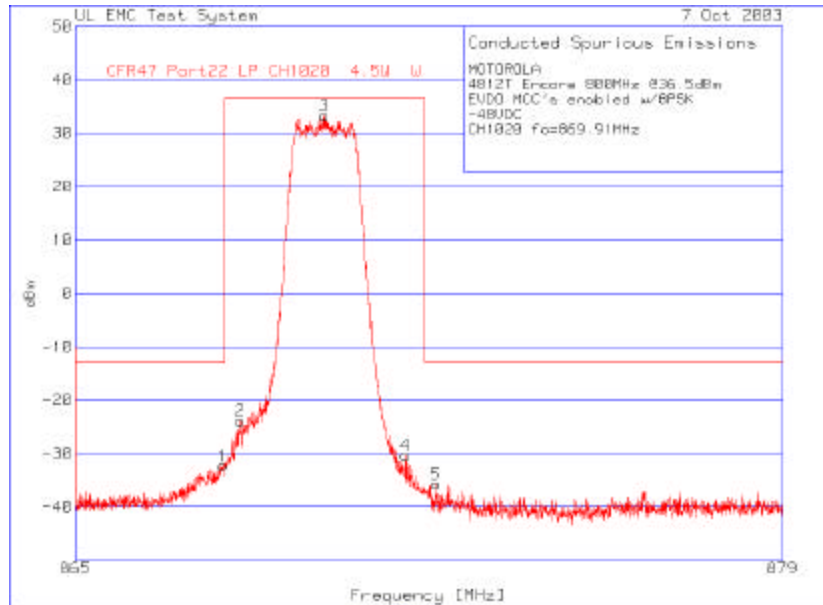

Spurious and Harmonic Emissions Conducted CDMA Channel 1020 – 36.5 dBm – 16QAM

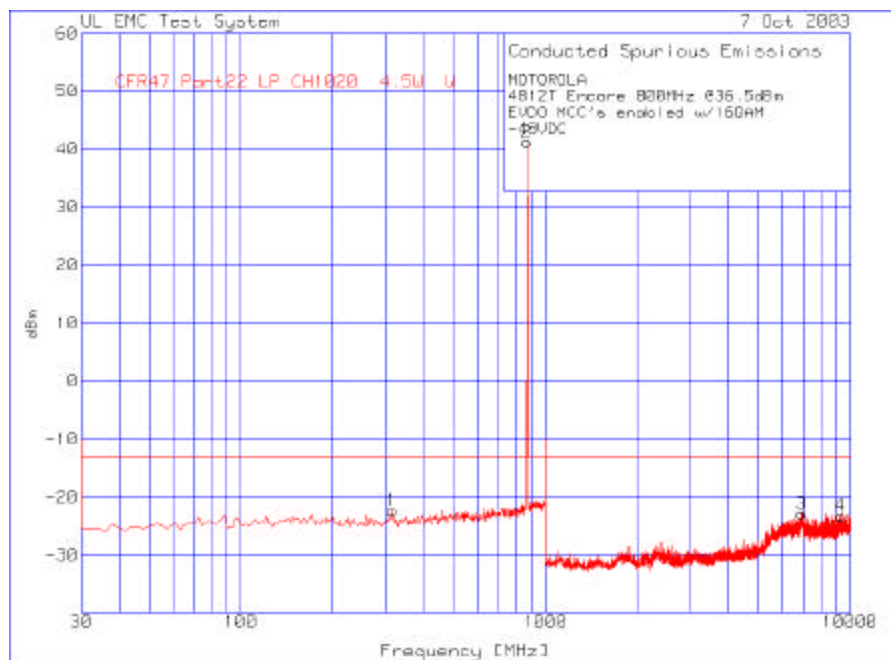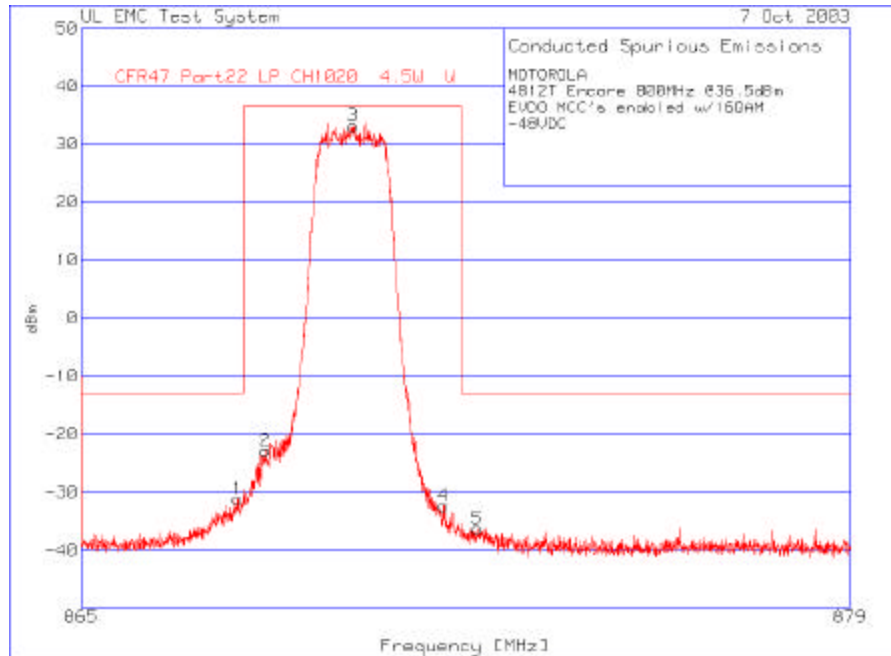

SECTION E

OCCUPIED BANDWIDTH

NOTE: The BTS was configured for maximum power out of 47.78 dBm and minimum power out of 36.5 dBm respectively. The max and min output power was set to 60.0 Watts or 4.5 Watts respectively using an HP437B power meter.

The following formula is used to obtain the correct power reference point from which the OBW of the CDMA signal is obtained. See example calculation below:

Power (measured in 30 kHz bandwidth) + 10 log (1.30 MHz / 30 kHz)

Example: 23.88 dBm + 16.37 dB = 40.25 dBm

The occupied bandwidth is measured in a 30 kHz resolution bandwidth. The summary is listed below.

SC4812T 1X-EVDO @ 800MHz WORST CASE OCCUPIED BANDWIDTH

CHANNEL	Power Level (dBm)	FREQUENCY (MHz)	MEASURED (MHz)	FCC LIMIT (MHz)	Pass / Fail
770	47.78	893.1	1.2741	1.30	Pass
1020	47.78	869.91	1.2724	1.30	Pass

SC4812T 1X @ 800 MHz WORST CASE OCCUPIED BANDWIDTH

CHANNEL	Power Level (dBm)	FREQUENCY (MHz)	MEASURED (MHz)	FCC LIMIT (MHz)	Pass / Fail
777	47.78	893.31	1.277	1.30	Pass
1013	26.0	869.7	1.277	1.30	Pass




10.29.03


Signature

Date


Francisco Avalos

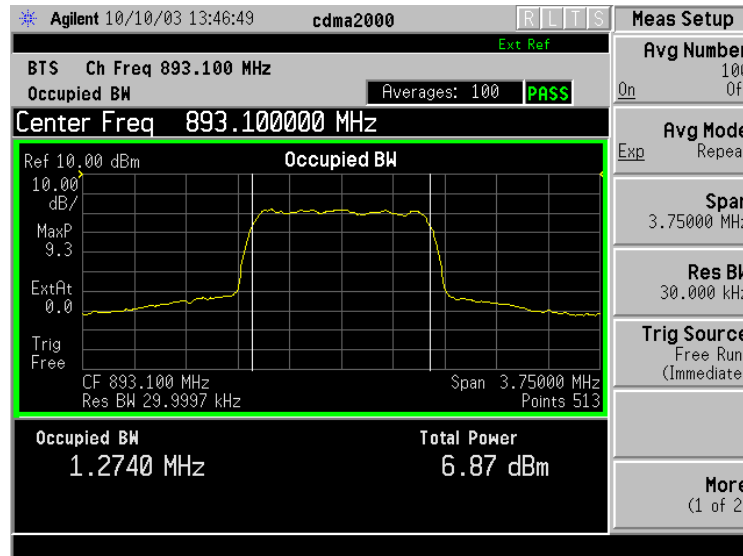SC4812T 1X-EVDO – Occupied Bandwidth – 47.78 dBm – 8PSK


Channel 770 – 893.1 MHz

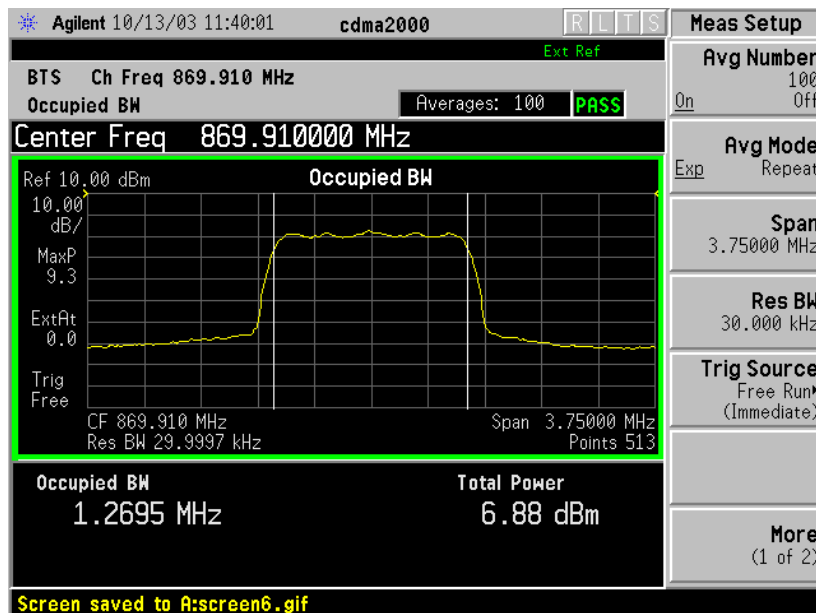


Channel 1020 – 869.91 MHz

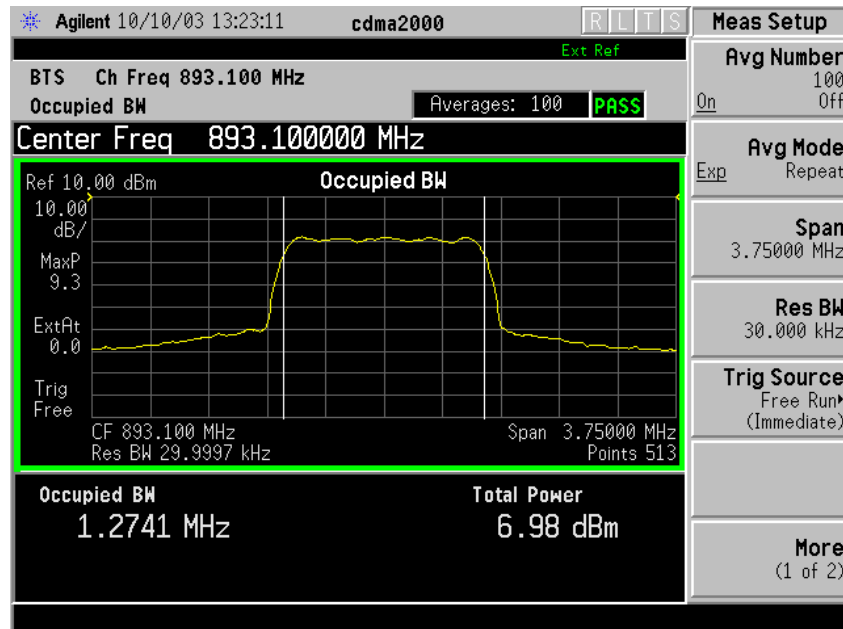SC4812T 1X-EVDO – Occupied Bandwidth – 47.78 dBm – 16QAM


Channel 770 – 893.1 MHz

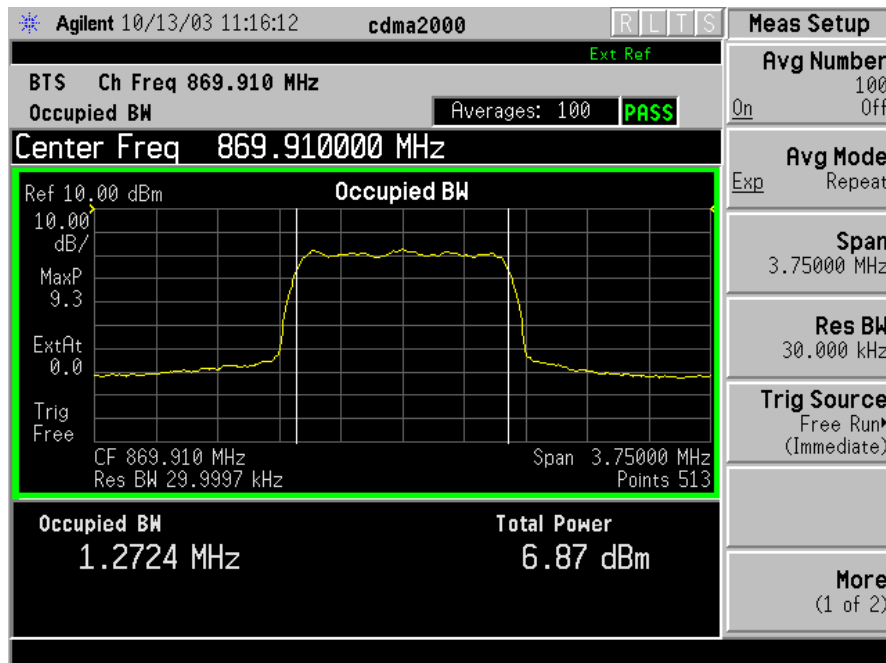


Channel 1020 – 869.91 MHz

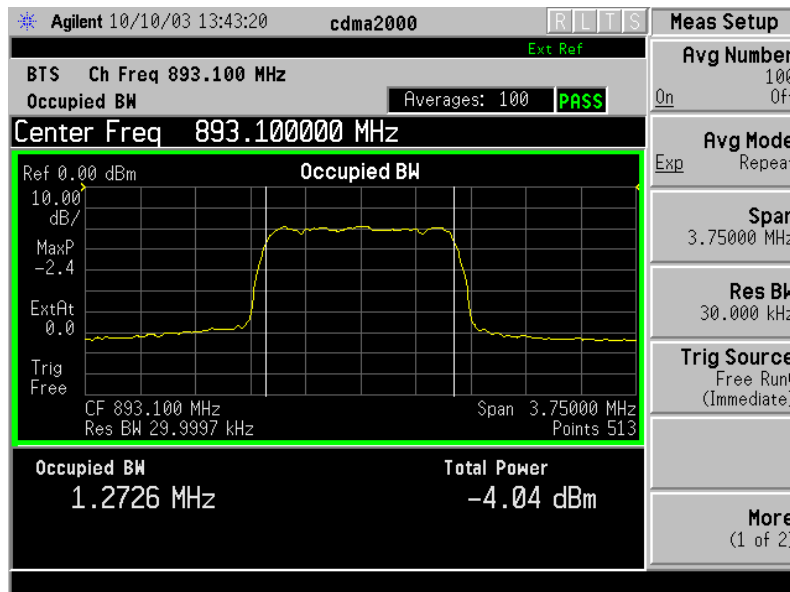SC4812T 1X-EVDO – Occupied Bandwidth – 36.5 dBm – 8PSK


Channel 770 – 893.1 MHz

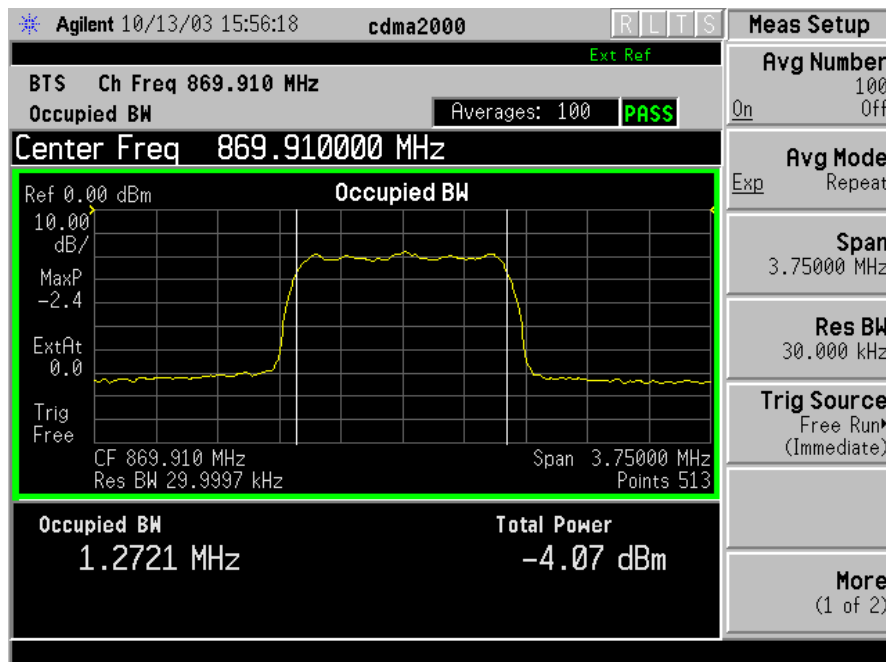


Channel 1020 – 869.91 MHz

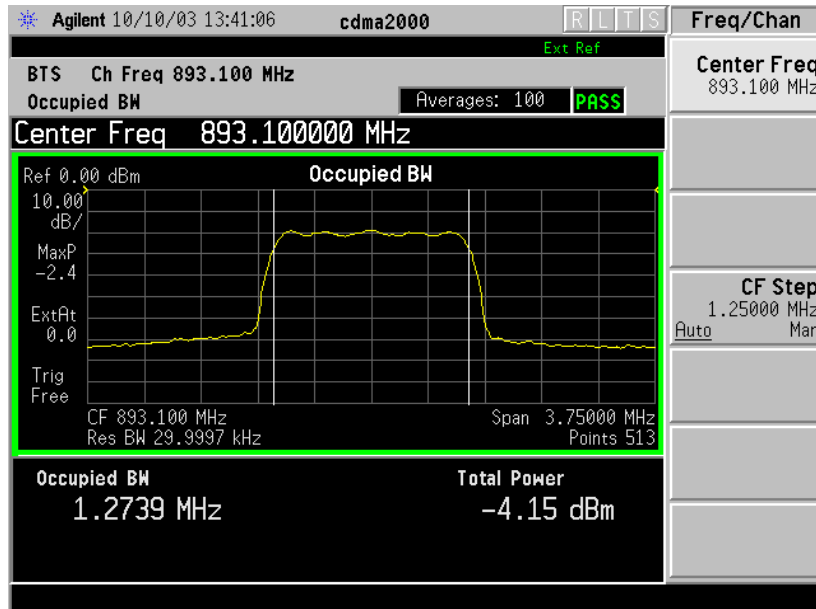SC4812T 1X-EVDO – Occupied Bandwidth – 36.5 dBm – 16QAM


Channel 770 – 893.1 MHz

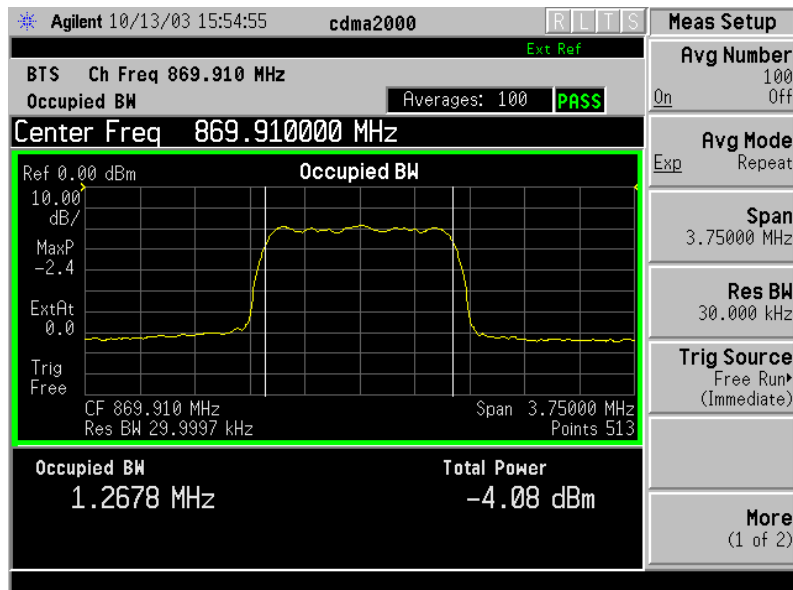


Channel 1020 – 869.91 MHz

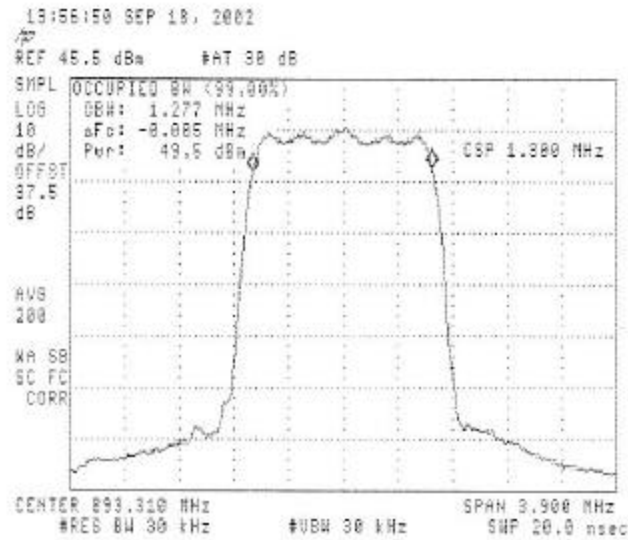SC4812T 1X – Occupied Bandwidth – 47.78 dBm


Channel 777 – 893.31 MHz

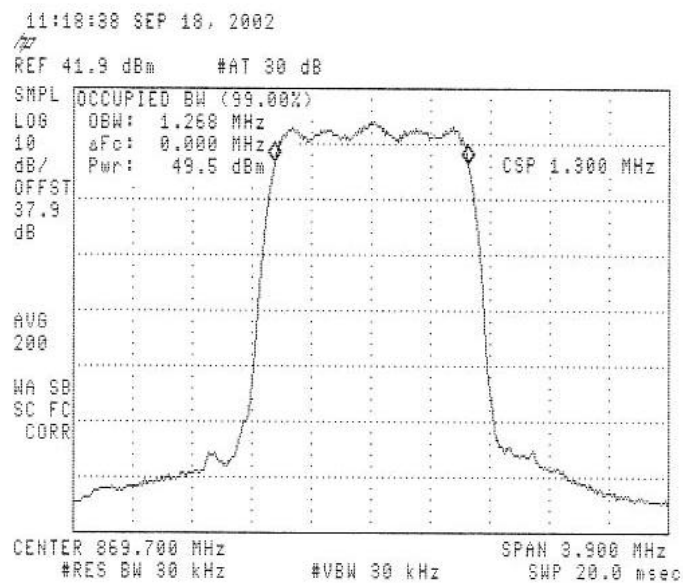

Channel 1013 – 869.7 MHz

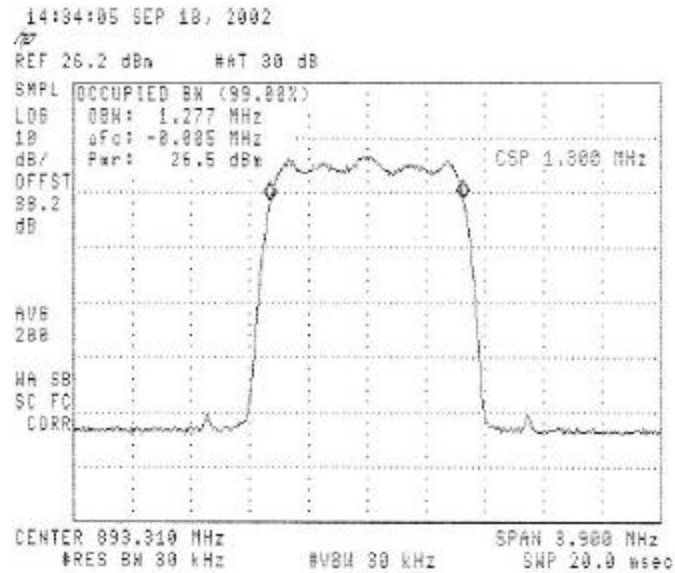SC4812T 1X – Occupied Bandwidth – 26.0 dBm

Channel 777 – 893.31 MHz

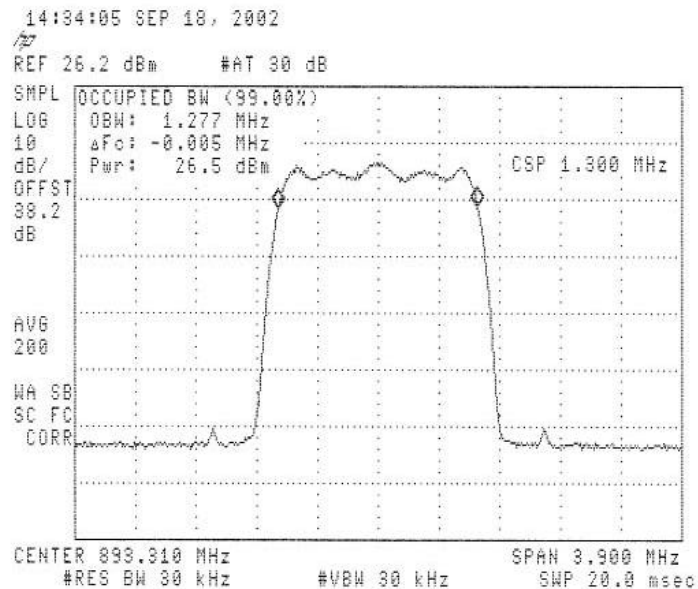

Channel 1013 – 869.7 MHz

M

APPLICANT: MOTOROLA

Global Telecom Solutions Sector

FCC ID: IHET5DS1

SECTION F

FREQUENCY STABILITY

MODE	27V POWER	WORST CASE ? PPM	FCC REQUIREMENT	Pass / Fail
CSM1	85-115%	<0.02	+/- 1.5 PPM MAX	Pass
CSM2	85-115%	<0.02	+/- 1.5 PPM MAX	Pass

MODE	TEMPERATURE	WORST CASE ? PPM	FCC REQUIREMENT	Pass / Fail
CSM1	-30° to +50° C	<0.2	+/- 1.5 PPM MAX	Pass
CSM2	-30° to +50° C	<0.2	+/- 1.5 PPM MAX	Pass




10.29.03

Signature

Date

Terry Schwenk

Frequency Stability Over Temperature - CSM1

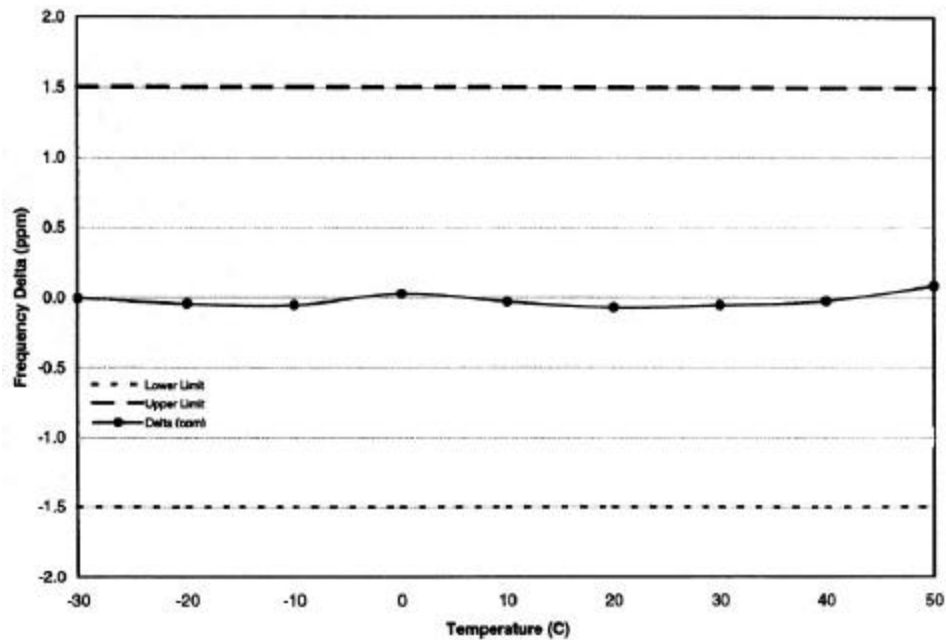

Frequency Stability with Varying Supply Voltage - CSM1

