



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

FCC ID: IMK-HRFBRIDGE

SYMPHONY-HOME RF CORDLESS GATEWAY

REPORT NO: 00U0131-2

TEST DATE: APRIL 05, 2000

Prepared for
PROXIM, INC.
510 DEGUIGUE DRIVE
SUNNYVALE, CA 94086, U.S.A.

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a
COMPLIANCE CERTIFICATION SERVICES
1366 BORDEAUX DRIVE
SUNNYVALE, CA 94089, U.S.A.
TEL: (408) 752-8166
FAX: (408) 752-8168

NVLAP[®]
LAB CODE:200065-0

TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE.....	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT).....	4
3. ANTENNA CONNECTION (SECTION 15.203)	5
4. PSEUDORANDOM HOPPING SEQUENCE NUMBERS	5
5. CHANNEL USAGE.....	5
6. THEORY OF OPERATION	5
7. THE COORDINATION OF FREQUENCY HOPPING SYSTEM.....	5
8. RECEIVER TECHNICAL INFORMATION (SECTION 15.247 (A)(1))	5
9. TEST LOCATION	5
10. SUPPORT EQUIPMENT	6
11. TEST EQUIPMENT.....	6
12. TEST PROCEDURES AND TEST RESULTS	7
Radiated Emissions (General Requirements).....	7
Test Requirement: 15.205, 15.209.....	7
Unintentional Radiated Emissions.....	12
Test Requirement: 15.109.....	12
AC Line Conducted Emissions.....	14
Test Requirement: 15.207.....	14
Conducted Emission.....	16
Test Requirement: 15.247(c); "Out of Band Measurements"	16
Minimum 20dB Bandwidth for FHSS	17
Test Requirement: 15.247(a)1(ii).....	17
RF Power Output	18
Test Requirement: 15.247(b)(1)	18
Minimum Number of Hopping Channel.....	19
Test Requirement: 15.247(a)1(ii).....	19
Hop Channel Separation.....	20
Test Requirement : 15.247(a)(1)	20
Average Time of Channel Occupancy.....	21
Test Requirment: 15.247(a)1(ii).....	21
13. RF EXPOSURE REQUIREMENT.....	22
SECTION 15.247(B)(4)	22
14. TEST SETUP PHOTOS:	23
ATTACHMENT# 1: EUT PHOTOGRAPHS.....	28
ATTACHMENT# 2: PROPOSED FCC ID LABEL FORMAT	35

ATTACHMENT# 3: AGENT AUTHORIZATION LETTER.....	36
ATTACHMENT# 4: SYMPHONY-HOME RF CORDLESS GATEWAY TECHNICAL DESCRIPTION....	37
ATTACHMENT# 5: USER'S GUIDE.....	40
ATTACHMENT# 6: CONFIDENTIALITY REQUEST LETTER	41

CONFIDENTIALITY PACKAGE CONTAINS:

SYMPHONY- HRF Cordless Gateway, "Schematic"

SYMPHONY- HRF Cordless Gateway, "Block Diagram"

SYMPHONY- Home RF Frequency Hopping "Theory of Operation"

Maximum Duty Cycle Analysis for Symphony-HRF Cordless Gateway

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : PROXIM
510 DEGUIGUE DRIVE
SUNNYVALE, CA 94086

CONTACT PERSON : KEITH GLOVER / CFO

TELEPHONE NO : (408) 731-2657

EUT DESCRIPTION : FREQUENCY HOPPING SPREAD SPECTRUM WLAN
ADAPTER

MODEL NAME : SYMPHONY-HOME RF CORDLESS GATEWAY

DATE TESTED : APRIL 05, 2000

LIMITS APPLY TO: FCC PART 15 SECTION 15.247			
TECHNICAL LIMITS	TEST RESULT		
Radiated Emission/15.205 & 15.209	Complies		
Radiated Emission/15.109	Complies		
AC Line Conducted Emission	Complies		
Minimum 20dB Bandwidth	Complies		
RF Power Output	Complies		
Minimum Number of Hopping Channels	Complies		
Channel Separation	Complies		
Average Time of Channel Occupancy	Complies		
The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47 PART 15, SUBPART C. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.			
<table><tr><td>_____ THOMAS N. COKENIAS/ EMC DIRECTOR COMPLIANCE CERTIFICATION SERVICES, INC.</td><td>_____ DATE</td></tr></table>		_____ THOMAS N. COKENIAS/ EMC DIRECTOR COMPLIANCE CERTIFICATION SERVICES, INC.	_____ DATE
_____ THOMAS N. COKENIAS/ EMC DIRECTOR COMPLIANCE CERTIFICATION SERVICES, INC.	_____ DATE		
Warning : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.			

2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)

The product is a FHSS WLAN adapter operating in the 2.4-2.4835GHz band with a nominal TX output power of 100mW. It is a small desktop box with associated wall plug mounted 5V switching DC power supply, integral antenna inside the plastic enclosure and 10 base T port for connection to standard wired LAN. The integral antenna is permanently attached to the PCB. It has nominal gain of 0 dBi. This device can either stand alone connected to a RJ-45 LAN hub port, or be connected to the RJ-45 port of a computing device.

HRF BRIDGE WLAN	
Actual Frequency Range	2402 - 2480 MHz
Transmit Power	100mW
Modulation Technique	FSK
Radio Technique	Frequency Hopping Spread Spectrum
Channel Bandwidth	870kHz
Number of Channel	75 channels
Antenna Gain, dBi	0 dBi
Air Data Rate	1.6 Mbps
DC voltage	5V
AC Power Supply Accessory	Proxim (P/N: 4000.0025)
Network Cable Accessory	Proxim P/N: 6001.0124 unshielded twisted pair RJ-45 cable assembly

PC INTERFACE TYPE	RJ-45
ANTENNA CONNECTOR	None, integral antenna.
ANTENNA TYPE	OMNIDIRECTIONAL =0.0dBi

3. ANTENNA CONNECTION (Section 15.203)

The SYMPHONY-HOME RF CORDLESS GATEWAY is equipped with a permanently attached integral antenna. Please refer to **ATTACHMENT#4: EUT TECHICAL DESCRIPTION**. Also, refer to **ATTACHMENT# 1: EUT PHOTOS**, which contains a picture of the antenna and its location (Photo# 5).

4. PSEUDORANDOM HOPPING SEQUENCE NUMBERS

Please refer to **ATTACHMENT#6: CONFIDENTIALITY REQUEST LETTER " Symphony-Home RF Frequency Hopping Theory of Operation "** confidentiality package.

5. CHANNEL USAGE

Please refer to **ATTACHMENT#6: CONFIDENTIALITY REQUEST LETTER " Symphony-Home RF Frequency Hopping Theory of Operation "** confidentiality package.

6. THEORY OF OPERATION

Please refer to **ATTACHMENT#6: CONFIDENTIALITY REQUEST LETTER ""** confidentiality package.

7. THE COORDINATION OF FREQUENCY HOPPING SYSTEM

Please refer to **ATTACHMENT#6: CONFIDENTIALITY REQUEST LETTER " Symphony-Home RF Frequency Hopping Theory of Operation "** confidentiality package.

8. RECEIVER TECHNICAL INFORMATION (Section 15.247 (a)(1))

Please refer to **ATTACHMENT#4: SYMPHONY-HOME RF CORDLESS GATEWAY TECHICAL DESCRIPTION**.

9. TEST LOCATION

All emissions tests were performed at:

Compliance Consulting Services
561F Monterey Road
Morgan Hill, CA 95087

CCS has site descriptions on file with the FCC for 10 and 3 meter site configurations. CCS is a NVLAP accredited facility.

Radiated emissions from the digital portion of the EUT were performed on site C, one of the 10 meter sites.

10. SUPPORT EQUIPMENT

DEVICE TYPE	MANUFACTURER	MODEL NAME	SERIAL NO	FCC ID
HOST PC	Dell Computer	MMS	8028F	E2KHANNIBAD
MONITOR	Dell Computer	D1728D-LS	04036A8M60-27	A3LCMG737
KEYBOARD	Del Computer	SK-1000REW	N/A	GYUR26SK
MOUSE	Dell Computer	M-S34	LZA706006595	DZL210472

11. TEST EQUIPMENT

EQUIPMENT TYPE	MODEL NAME	SERIAL NO	CAL DUE:
SPECTRUM ANALYZER	HP8593EM	3710A00205	5/28/00
SPECTRUM ANALYZER	HP8568B	2732A03661	12/17/00
SPECTRUM ANALYZER	HP8566B	2140A01296	12/17/00
PRE-AMP	HP8447D (P5)	2944A06550	8/10/00
MITEQ PRE-AMP	NSP2600-44	646456	1/3/01
EMOC HORN ANTENNA	3115	9001-3245	1/05/01
BICONICAL ANTENNA	EATON 94455-1	1214	8/12/00
LOG PERIODIC ANTENNA	EMCO 3146	9107-3163	8/12/00

12. TEST PROCEDURES AND TEST RESULTS

Radiated Emissions (General Requirements)

Test Requirement: 15.205, 15.209

Measurement Equipment Used:

HP 8593EM Spectrum Analyzer


MITEQ NSP2600-44 Preamplifier, 1-26 GHz

EMCO 3115 Horn Antenna, 1-18 GHz

ARA MWH1826/B Antenna, 18-26 GHz

FLEXCO Cables, 18ft (loss: 0.85 dB/ft@ 26 GHz)

FYS Microwave: High Pass Filter 4.305 GHz

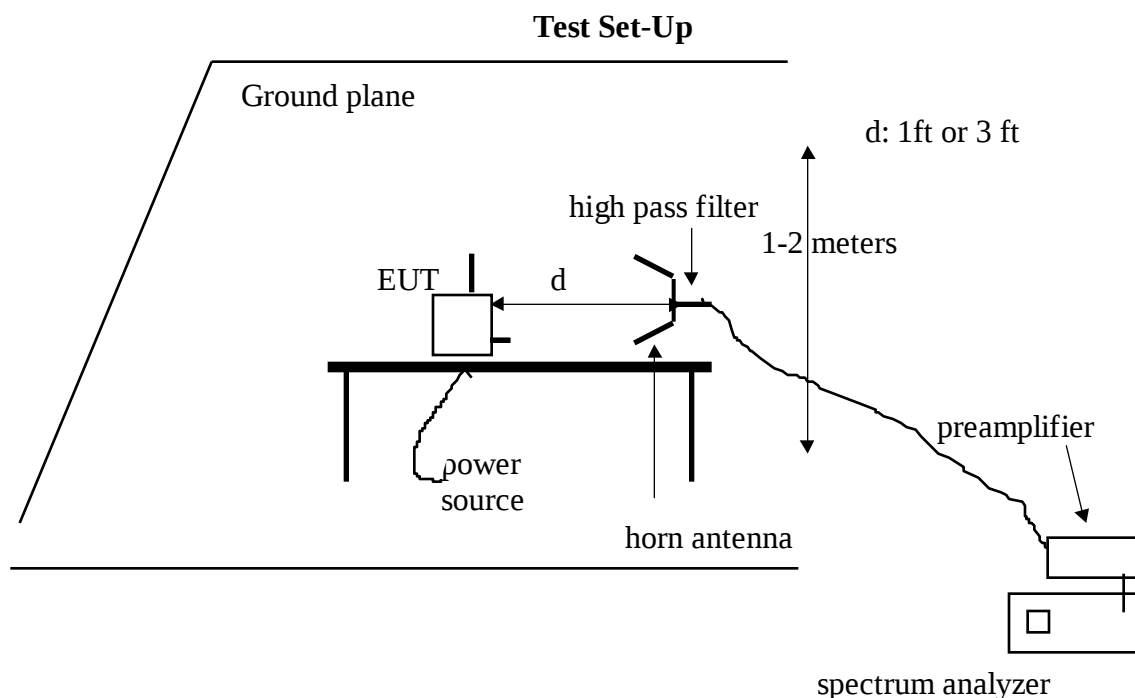

Test Procedures

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 ft and 1 ft from the EUT. Measurement distance is chosen so that the noise floor of the measurement system is at least 6dB below the specification limits. The EUT frequency hopping sequence disabled and set the EUT to transmit at its lowest channel first.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205.

3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

4. Steps 1 to 3 were repeated for the middle and high channel

Test Results:

Refer to attached spreadsheets.

COMPLIANCE CERTIFICATION SERVICES, INC.

Radiated Emissions
15.205

04/06/00
Kerwin Corpuz
C-site (1.0 Meter)

PROXIM

2402 - 2480MHz HSSS HRF BRIDGE (M/N: 4930); FCC ID: IMK-HRFBRIDGE

f_0 = 2402 MHz (LOW)

F(MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	Total (dBuV/m)		Limit (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4804V	55.85	53.08	32.5	5.4	-42	-9.5	1	43.25	40.48	74	54	-30.8	-13.5
4804H	57.8	54.1	32.5	5.4	-42	-9.5	1	45.2	41.5	74	54	-28.8	-12.5
7206V	51.65	44.59	36.1	6.6	-41.43	-9.5	1	44.42	37.36	74	54	-29.6	-16.6
7206H	50.11	41.11	36.1	6.6	-41.43	-9.5	1	42.88	33.88	74	54	-31.1	-20.1
9607*	47.6	36.2	37.1	8.3	-39.4	-9.5	1	45.1	33.7	74	54	-28.9	-20.3
12009*	48.14	37.82	39	9	-40.82	-9.5	1	46.82	36.5	74	54	-27.2	-17.5
14411*	51.1	39.6	40.3	10.1	-42.3	-9.5	1	50.7	39.2	74	54	-23.3	-14.8
16813*	50.5	40.1	40.7	11.34	-44.03	-9.5	1	50.01	39.61	74	54	-24	-14.4
19215*	51	40.1	32	12.6	-44.29	-9.5	1	42.81	31.91	74	54	-31.2	-22.1
21617*	52.1	41.8	32.5	14.22	-43	-9.5	1	47.32	37.02	74	54	-26.7	-17
24019*	52.8	42	32.1	15.12	-43.95	-9.5	1	47.57	36.77	74	54	-26.4	-17.2

* Measured noise floor (worse case vertical)

NOTE: MEASURED HORIZONTAL (H) AND VERTICAL (V)

DIST: Correction to extrapolate reading to 3m specification distance
1M measurement distance: **-9.5dB**

AF: Antenna Factor

PEAK(Pk):

AVERAGE(Avg):

ANALYZER SETTINGS

Res bw

Avg. bw

1MHz

1MHz

10Hz

ANTENNA: EMCO, 3115, S/N:9001-3245 & ARA, MWH-1826/B, S/N:1013

AMP: Pre-amp gain

PRE-AMP: MITEQ, NSP2600-44, S/N:646456

CL: Cable loss (18ft)

HPF: High pass filter insertion loss (4.6GHz)

FSY (S/N: 001)

COMPLIANCE CERTIFICATION SERVICES, INC.

Radiated Emissions
15.205

04/06/00
Kerwin Corpuz
C-site (1.0 Meter)

PROXIM

2402 - 2480MHz HSSS HRF BRIDGE (M/N: 4930); FCC ID: IMK-HRFBRIDGE

 $f_0 = 2439$ MHz (MID)

F(MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF	Total (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4878V	54.58	51.2	32.5	5.4	-42	-9.5	1	41.98	38.6	74	54	-32	-15.4
4878H	53.39	49.54	32.5	5.4	-42	-9.5	1	40.79	36.94	74	54	-33.2	-17.1
7318V	50.1	41.5	36.1	6.6	-41.43	-9.5	1	42.87	34.27	74	54	-31.1	-19.7
7318H	50.6	38	36.1	6.6	-41.43	-9.5	1	43.37	30.77	74	54	-30.6	-23.2
9607*	47.6	36.2	37.1	8.3	-39.4	-9.5	1	45.1	33.7	74	54	-28.9	-20.3
12009*	48.14	37.82	39	9	-40.82	-9.5	1	46.82	36.5	74	54	-27.2	-17.5
14411*	51.1	39.6	40.3	10.1	-42.3	-9.5	1	50.7	39.2	74	54	-23.3	-14.8
16813*	50.5	40.1	40.7	11.34	-44.03	-9.5	1	50.01	39.61	74	54	-24	-14.4
19215*	51	40.1	32	12.6	-44.29	-9.5	1	42.81	31.91	74	54	-31.2	-22.1
21617*	52.1	41.8	32.5	14.22	-43	-9.5	1	47.32	37.02	74	54	-26.7	-17
24019*	52.8	42	32.1	15.12	-43.95	-9.5	1	47.57	36.77	74	54	-26.4	-17.2

* Measured noise floor (worse case vertical)

NOTE: MEASURED HORIZONTAL (H) AND VERTICAL (V)

DIST: Correction to extrapolate reading to 3m specification distance
1M measurement distance: **-9.5dB**

AF: Antenna Factor

ANTENNA: EMCO, 3115, S/N:9001-3245 & ARA, MWH-1826/B, S/N:1013

AMP: Pre-amp gain

PRE-AMP: MITEQ, NSP2600-44, S/N:646456

CL: Cable loss (18ft)

HPF: High pass filter insertion loss (4.6GHz)

FSY (S/N: 001)

ANALYZER SETTINGS

Res bw	Avg. bw
1MHz	1MHz
1MHz	10Hz

PEAK(Pk):

AVERAGE(Avg):

COMPLIANCE CERTIFICATION SERVICES, INC.

Radiated Emissions
15.205

04/06/00
Kerwin Corpuz
C-site (1.0 Meter)

PROXIM

2402 - 2480MHz HSSS HRF BRIDGE (M/N: 4930); FCC ID: IMK-HRFBRIDGE

f_0 = 2480 MHz (HIGH)

F(MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	Total (dBuV/m)		LIMIT (dBuV/m)	MARGIN (dB)	
	Pk	Avg						Pk	Avg		Pk	Avg
4959V	53	49.7	32.9	5.58	-41.76	-9.5	1	41.22	37.92	74	54	-32.8
4959H	51	45.7	32.9	5.58	-41.76	-9.5	1	39.22	33.92	74	54	-34.8
7439V	50.2	41.4	37	6.6	-41.43	-9.5	1	43.87	35.07	74	54	-30.1
7439H	48.37	37.8	37	6.6	-41.43	-9.5	1	42.04	31.47	74	54	-32
9607*	47.6	36.2	37.1	8.3	-39.4	-9.5	1	45.1	33.7	74	54	-28.9
12009*	48.14	37.82	39	9	-40.82	-9.5	1	46.82	36.5	74	54	-27.2
14411*	51.1	39.6	40.3	10.1	-42.3	-9.5	1	50.7	39.2	74	54	-23.3
16813*	50.5	40.1	40.7	11.34	-44.03	-9.5	1	50.01	39.61	74	54	-24
19215*	51	40.1	32	12.6	-44.29	-9.5	1	42.81	31.91	74	54	-31.2
21617*	52.1	41.8	32.5	14.22	-43	-9.5	1	47.32	37.02	74	54	-26.7
24019*	52.8	42	32.1	15.12	-43.95	-9.5	1	47.57	36.77	74	54	-26.4

* Measured noise floor (worse case vertical)

NOTE: MEASURED HORIZONTAL (H) AND VERTICAL (V)

DIST: Correction to extrapolate reading to 3m specification distance
1M measurement distance: **-9.5dB**

AF: Antenna Factor

ANTENNA: EMCO, 3115, S/N:9001-3245 & ARA, MWH-1826/B, S/N:1013

AMP: Pre-amp gain

PRE-AMP: MITEQ, NSP2600-44, S/N:646456

CL: Cable loss (18ft)

HPF: High pass filter insertion loss (4.6GHz)

FSY (S/N: 001)

ANALYZER SETTINGS

Res bw	Avg. bw
1MHz	1MHz
1MHz	10Hz

PEAK(Pk):

AVERAGE(Avg):

Unintentional Radiated Emissions

Test Requirement: 15.109


Measurement Equipment Used:

HP 8568A Spectrum Analyzer

Eaton 94455-1 Biconical Antenna, 30 - 200 MHz

EMCO 3146 Log Periodic Antenna, 200 - 1000 MHz

HP 8447D Amplifier

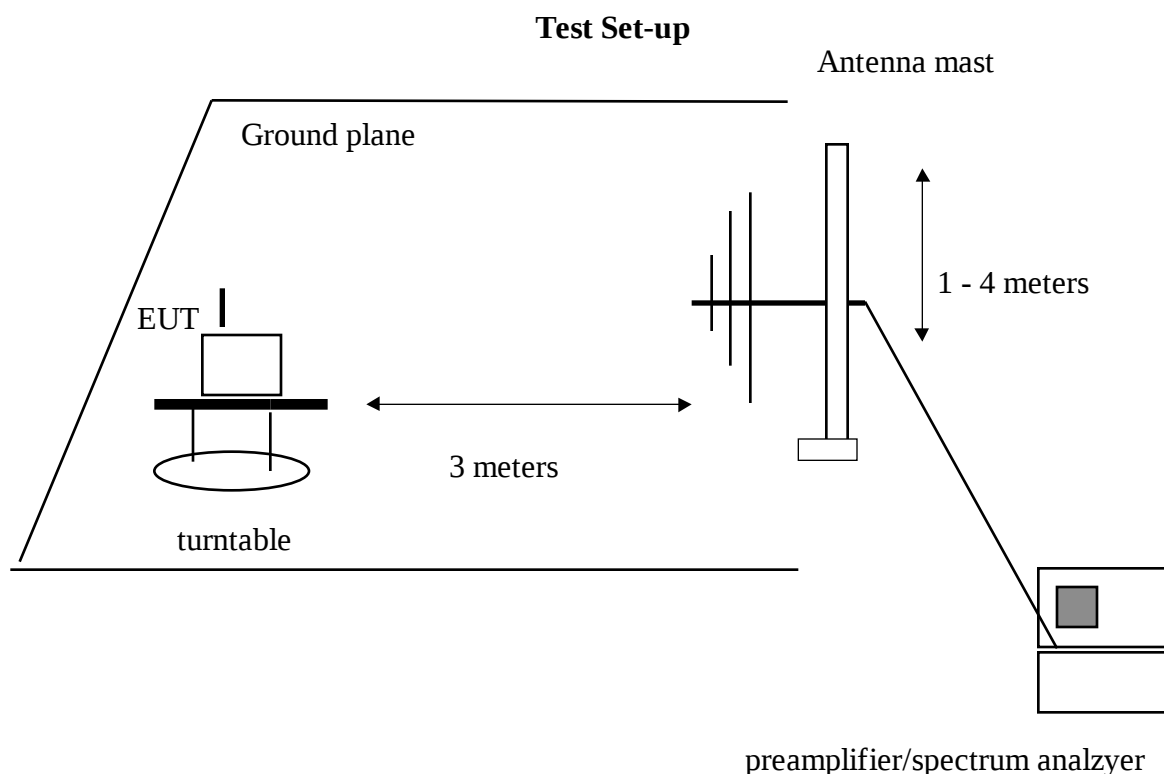

TEST PROCEDURE:

The EUT was placed on a turntable at a distance of 3 meters from a biconical or log periodic search antenna. The EUT was set to transmit. Frequency hopping sequence was enabled. The antenna was raised and lowered, the EUT rotated on the turntable, until the EUT azimuth, antenna elevation, and antenna polarity were found which yielded maximum received emission levels on the spectrum analyzer.

Test Result:

Refer to attached tabular data sheet.

Compliance Engineering Services Inc.

Project No. : 00U0131-2
 Report No. : 000406C1
 Date : 04/06/2000
 Time : 09:17
 Test Engr : KERWIN CORPUZ

>> 3 M RADIATED EMISSION DATA <<

Company : PROXIM
 Equipment Under Test : SYMPHONY-HRF CORDLESS GATEWAY (M/N: 4930)
 Test Configuration : EUT ONLY
 Type of Test : FCC CLASS B
 Mode of Operation : SPREAD SPECTRUM HOPPING

Freq. dBuV PreAmp Ant Cable dBuV/m Limit Margin Pol Hgt(m) Az
 Biconical 1214 & LP 9107-3163 ; Pre-amp = 8447D-P5 2944A06550:

Step size 20.00 MHz:

40.00	43.90	-27.48	11.67	1.07	29.16	40.00	-10.84	V	1.0	45
60.00	50.00	-27.46	6.31	1.34	30.19	40.00	-9.81	V	1.0	270
80.00	48.80	-27.34	8.83	1.46	31.75	40.00	-8.25	V	1.0	45
100.00	46.10	-27.32	11.27	1.58	31.63	43.50	-11.87	V	1.0	45
120.00	50.80	-27.24	10.72	1.74	36.02	43.50	-7.48	V	1.0	0
420.00	38.20	-27.38	15.67	3.18	29.67	46.00	-16.33	V	1.0	180
480.00	38.60	-27.74	16.96	3.41	31.23	46.00	-14.77	V	1.0	225
600.00	39.20	-27.97	18.32	3.84	33.39	46.00	-12.61	V	1.0	225
60.00	45.40	-27.46	7.34	1.34	26.62	40.00	-13.38	H	2.1	180
100.00	46.70	-27.32	11.01	1.58	31.97	43.50	-11.53	H	2.1	100
120.00	48.10	-27.24	10.32	1.74	32.92	43.50	-10.58	H	2.1	270
340.00	40.50	-26.86	15.02	2.85	31.50	46.00	-14.50	H	1.3	120
360.00	42.50	-27.00	15.20	2.93	33.64	46.00	-12.36	H	1.3	100

Step size 24.00 MHz:

48.00	44.80	-27.46	10.58	1.19	29.11	40.00	-10.89	V	1.0	45
72.00	58.20	-27.40	6.09	1.43	38.32	40.00	-1.68	V	1.0	0
QP at 72.00 MHz:										
72.00	56.70	-27.40	6.09	1.43	36.82	40.00	-3.18	V	1.0	0
144.00	45.40	-27.15	16.40	1.86	36.52	43.50	-6.98	V	1.0	0
216.00	37.70	-26.79	11.82	2.27	25.00	43.50	-18.50	V	1.0	0
384.00	41.50	-27.15	15.12	3.04	32.51	46.00	-13.49	V	1.0	225
432.00	43.80	-27.45	15.93	3.23	35.50	46.00	-10.50	V	1.0	135
480.00	38.70	-27.74	16.96	3.41	31.33	46.00	-14.67	V	1.0	250
72.00	52.20	-27.40	6.00	1.43	32.22	40.00	-7.78	H	2.1	225
384.00	44.10	-27.15	15.43	3.04	35.41	46.00	-10.59	H	1.3	100
432.00	43.30	-27.45	16.10	3.23	35.18	46.00	-10.82	H	1.3	90
528.00	38.90	-27.89	17.83	3.58	32.42	46.00	-13.58	H	1.3	225

COMPLETED SCAN 30 - 1000 MHz, VERTICAL AND HORIZONTAL POLARIZATION.

Total # of data 25
 V. c2.2_

AC Line Conducted Emissions


Test Requirement: 15.207

Measurement Equipment Used:

Rhode & Schwarz EMI Receiver ESHS-20

Fischer Custom Communication LISN, FCC-LISN-50/250-25-2

Test Set-up

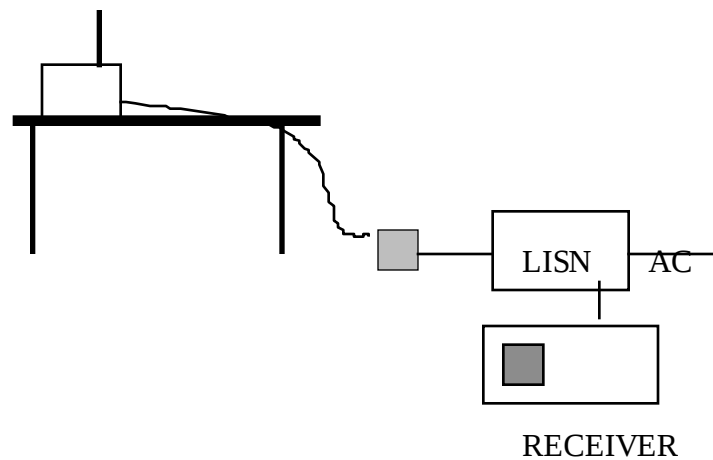


Test Procedure

1. The EUT was placed on a wooden table 40 cm from a vertical ground plane and approximately 80 cm above the horizontal ground plane on the floor. The EUT was set to transmit in a normal hopping mode.
2. Line conducted data was recorded for both NEUTRAL and HOT lines.

Test Results

Refer to attached graph.

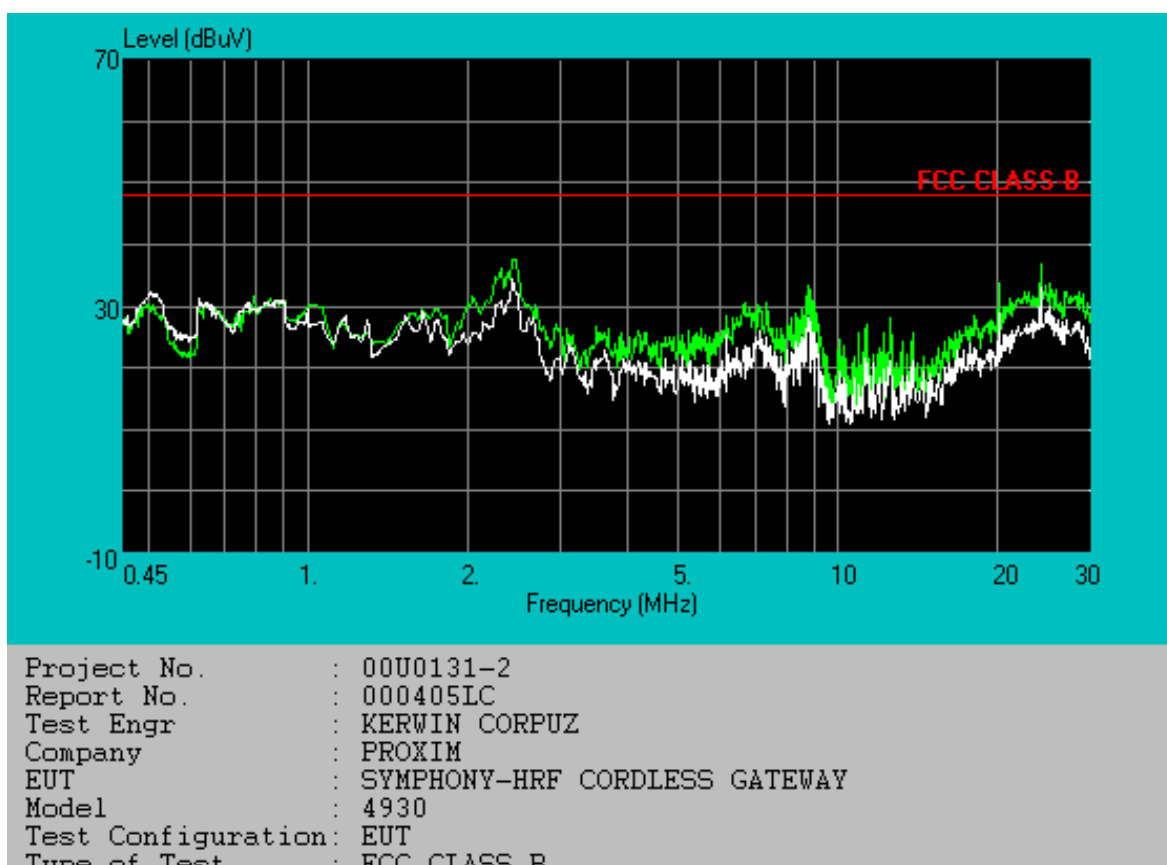

Peak Mode: L1 (Green), L2 (White)

Voltage Used: 115Vac, 60 Hz

Eut mode: Frequency hopping Transmit

Final Conducted Emission Test:

Conducted Room	Plot No. 00u0131-2	Date 4/5/00	Tested By: Kerwin Corupuz
----------------	-----------------------	----------------	------------------------------

Six Highest Conducted Emission Readings


Freq. (MHz)	Meter Reading (dBuV)	C.F, (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reading Type (P/Q/A)	Line (L1/L2)
2.43	37.5	0	37.5	48	-10.5	P	L1
20.05	33.8	0	33.8	48	-14.2	P	L1
24.01	36.82	0	36.82	48	-11.18	P	L1
2.43	34.24	0	34.24	48	-13.76	P	L2
20.05	28.72	0	28.72	48	-19.28	P	L2
24.01	33.08	0	33.08	48	-14.92	P	L2

COMMENTS: 115Vac, 60Hz

Conducted Emission

Test Requirement: 15.247(c); "Out of Band Measurements"

Measurement Equipment Used:
HP 8566B Spectrum Analyzer

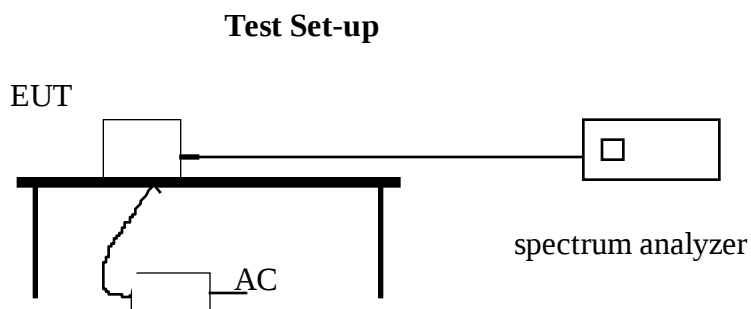

Test Procedure:

To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.

The EUT is configured on a test bench as shown above. The EUT's hopping function is stopped, transmission is continuous at the Low Channel (2.402 GHz). Spectrum analyzer CENTER FREQUENCY set to 2402 MHz. Used a Resolution BW: 100 kHz and Video BW: 100 kHz to measure conducted emissions. Set the spectrum analyzer to START: 30 MHz and STOP: 2.5 GHz for the first scan. The second scan was set to START: 2.5 GHz and STOP: 22 GHz. All emissions were compared to the 20-dB attenuation requirement.

While the transmitter broadcasts a steady stream of digital data, the analyzer MAX HOLD function is used to capture the emissions.

Repeated for Mid Channel (2.440 GHz) and High Channel (2.479 GHz)

Test Result:


Please refer to attach plot# 1, 2, 3, 4, 5, 6

Minimum 20dB Bandwidth for FHSS

Test Requirement: 15.247(a)1(ii)

Measurement Equipment Used:

HP 8566B Spectrum Analyzer

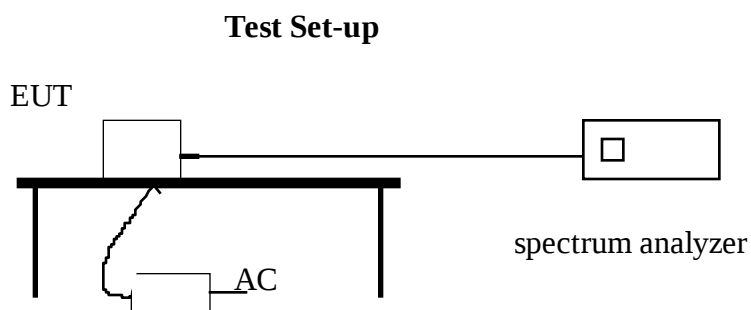**Test Procedure:**

To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.

The EUT is configured on a test bench as shown above. The EUT'S hopping function is stopped, transmission is continuous at the Low Channel (2.402 GHz). Spectrum analyzer CENTER FREQUENCY set to 2402 MHz. SPAN set to 2 MHz. Used a Resolution BW: 30 kHz and Video BW: 30 kHz to measure the 20-dB bandwidth.

While the transmitter broadcasts a steady stream of digital data, the analyzer MAX HOLD function is used to capture the envelope of the transmission occupied bandwidth. Used DISPLAY and DELTA MARKER functions to measure the 20-dB Bandwidth.

Repeated for Mid Channel (2.440 GHz) and High Channel (2.479GHz)

Test Results: Refer to attached spectrum analyzer plot# 7, 8, 9.


Frequency	Measured	Limit	Result
2.40178 GHz	870kHz	<1000kHz	PASSED
2.43985 GHz	844kHz	<1000kHz	PASSED
2.47980 GHz	842kHz	<1000kHz	PASSED

RF Power Output

Test Requirement: 15.247(b)(1)

Measurement Equipment Used:

HP 8566B Spectrum Analyzer

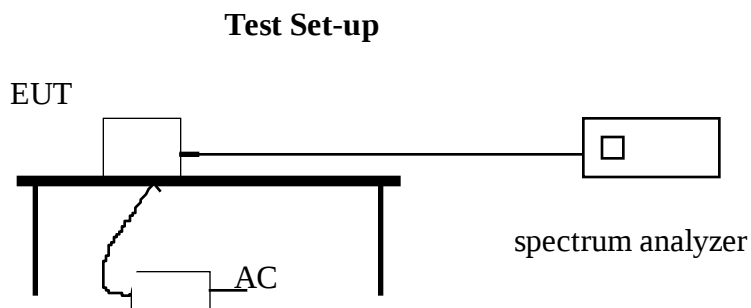

Test Procedure

To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.

The EUT is configured on a test bench as shown above. The EUT's hopping function is stopped, transmission is continuous at the Low Channel (2402MHz). Spectrum analyzer CENTER FREQUENCY set to Low Channel (2402 MHz). SPAN set to 5 MHz. RES BW=3 MHz, VID BW = 3 MHz. Repeated above steps for MID Channel (2440 MHz) and HIGH Channel (2479 MHz).

CHANNEL	Watts	dBm	LIMIT
2402 MHz	.087	19.4	30
2440 MHz	.107	20.3	30
2480 MHz	.109	20.4	30

Test Results:


Refer to attached spectrum plot# 10, 11, 12

Minimum Number of Hopping Channel

Test Requirement: 15.247(a)1(ii)

Measurement Equipment Used:

HP 8566B Spectrum Analyzer

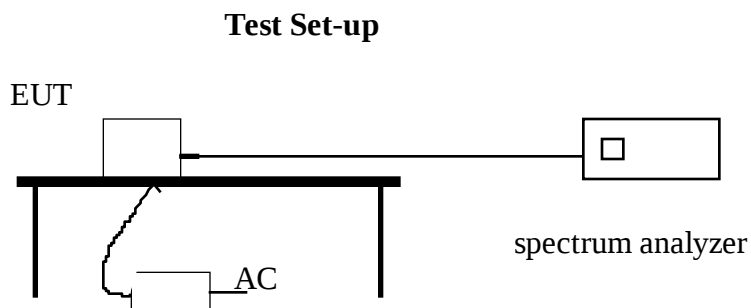

Test Procedure:

1. To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.
2. Turn on the transmitter in normal hopping mode. The emissions will “paint” the spectrum analyzer screen with individual traces from each transmit channel. Allow the transmitter to run for at least 3 minutes or until there are no more changes to the display.
3. Count the number of individual channel traces and compare to the design goal.

Test Results:

Frequency Range	Number of Hopping Channel	Limit
2.40000-2.48350 GHz	75	≥ 75


Please refer to attached spectrum plot# 13.

Hop Channel Separation

Test Requirement : 15.247(a)(1)

Measurement Equipment Used:

HP 8566B Spectrum Analyzer

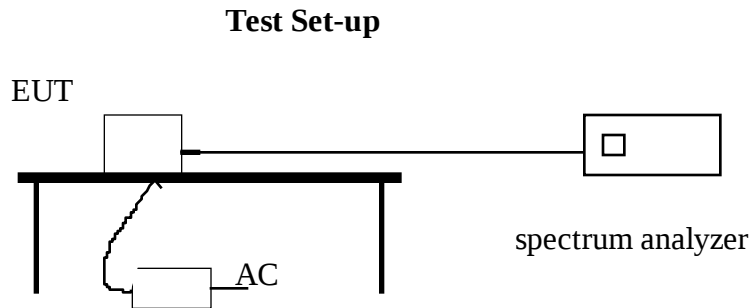

Test Procedure:

To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.

Turn on the transmitter in normal hopping mode. The emissions will “paint” the spectrum analyzer screen with individual traces from each transmit channel. Allow the transmitter to run for at least 3 minutes or until there are no more changes to the display. Move MARKER to the channel, which appears to have widest Channel separation and calculate the DELTA between two markers.

Test Result :


Please refer to attach spectrum plot# 14.

Average Time of Channel Occupancy

Test Requirement: 15.247(a)1(ii)

Measurement Equipment Used:

HP 8566B Spectrum Analyzer

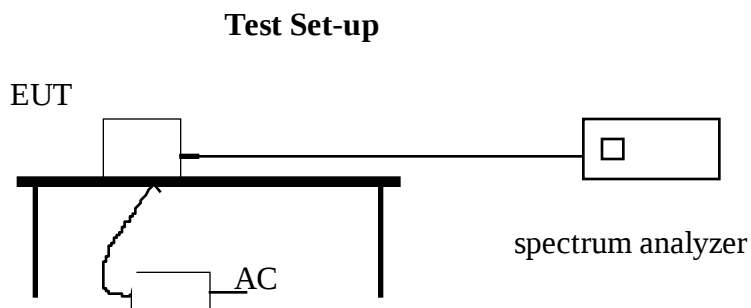

Test Procedure:

To do conducted measurements the connection to the integral antenna was unsoldered and a direct connection was made to a 50 ohm test port where a coax cable was attached.

Set the transmitter to operate in its normal frequency hopping mode.

Set the spectrum analyzer Center Frequency to a hopping channel at 2.45 GHz. Set the Sweep Time to 30 seconds. Set Trace to Max Hold. Set the Amplitude function to Linear.

The maximum number of transmissions detected in any 30-second period determines the maximum time of channel occupancy.

The duration of each transmission was measured with RBW=VBW=100kHz. SPAN set to 0 Hz. SWP set to 50.0msec.

Test Results:

Average time of single channel occupancy: 0.00545 seconds (plot# 16)

Average number of channels within a 30 seconds period: 41 channel (plot# 15)

$41 \times 0.00545 = 0.22345 \text{ second} < 0.4 \text{ second (limit)}$

Please refer to attached spectrum plot# 15, 16

13. RF EXPOSURE REQUIREMENT**SECTION 15.247(B)(4)****§ 1.1310 Radiofrequency radiation exposure**

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

Test result:

TABLE 1 (B) LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE

F(MHz) **(POWER DENSITY (mW/cm²))**

1500 - 100,000 1

Transmitter Output power is **0.1 Watts** and will be used with a **0 dBi** Omni-directional antenna

Computation method:

$$P = E^2 / 3770$$

$$\sqrt{E^2} = \sqrt{1 \text{ mW/cm}^2 * 3770}$$

$$E = 61.4 \text{ V/m}$$

$$E = \frac{\sqrt{30 * P * G}}{D}$$

$$D = \frac{\sqrt{30 * .1 * 1}}{61.4 \text{ V/m}}$$

$$D = 2.82 \text{ cm}$$


$$2.82 / 2.54 = 1.11 \text{ inch}$$

MPE distance requirement is 1.11 inch. A warning statement is place in the manual page 91.

14. TEST SETUP PHOTOS:



15.109 Radiated Setup

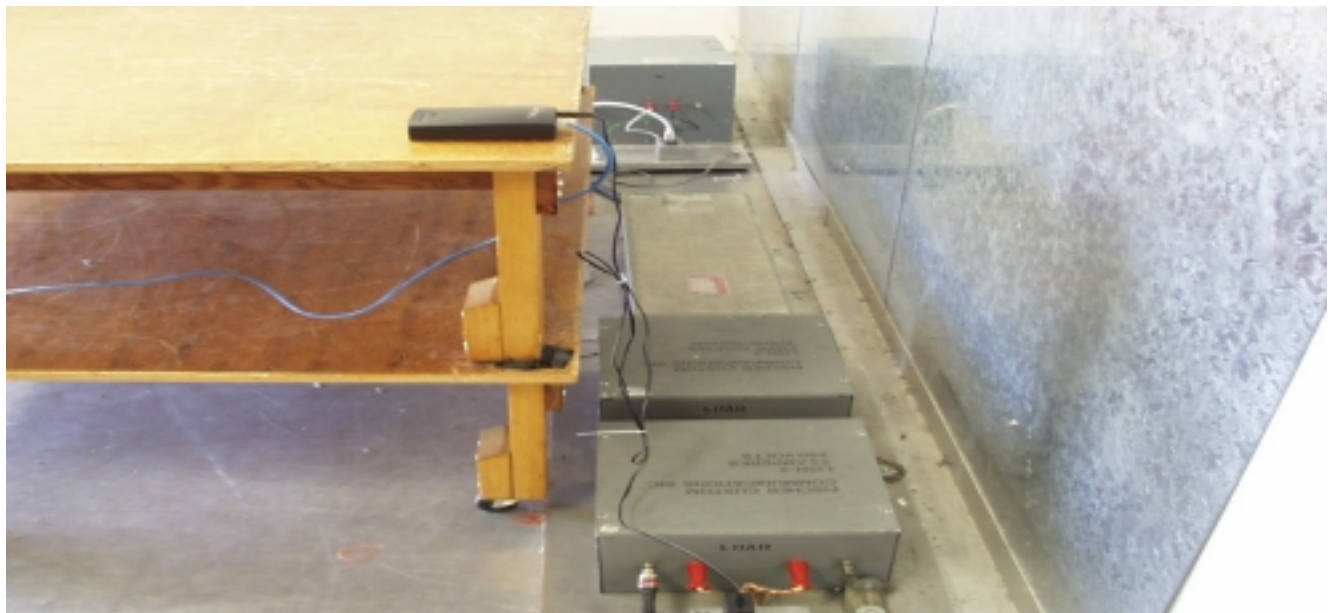

15.207 AC Conducted Emissions (Configuration# 1)



COMPLIANCE CERTIFICATION SERVICES, INC. DOCUMENT NO:CCSUP4025B
1366 BORDEAUX DRIVE, SUNNYVALE, CA 94089 TEL:(408)752-8166 FAX:(408)752-8168
This report shall not be reproduced except in full, without the written approval of CCS.



15.247 Conducted Emissions Test-Setup



15.205 Radiated Emission Above 1GHz test setup

ATTACHMENT# 1: EUT PHOTOGRAPHS



PHOTO# 1




PHOTO# 2



PHOTO# 3





PHOTO# 4

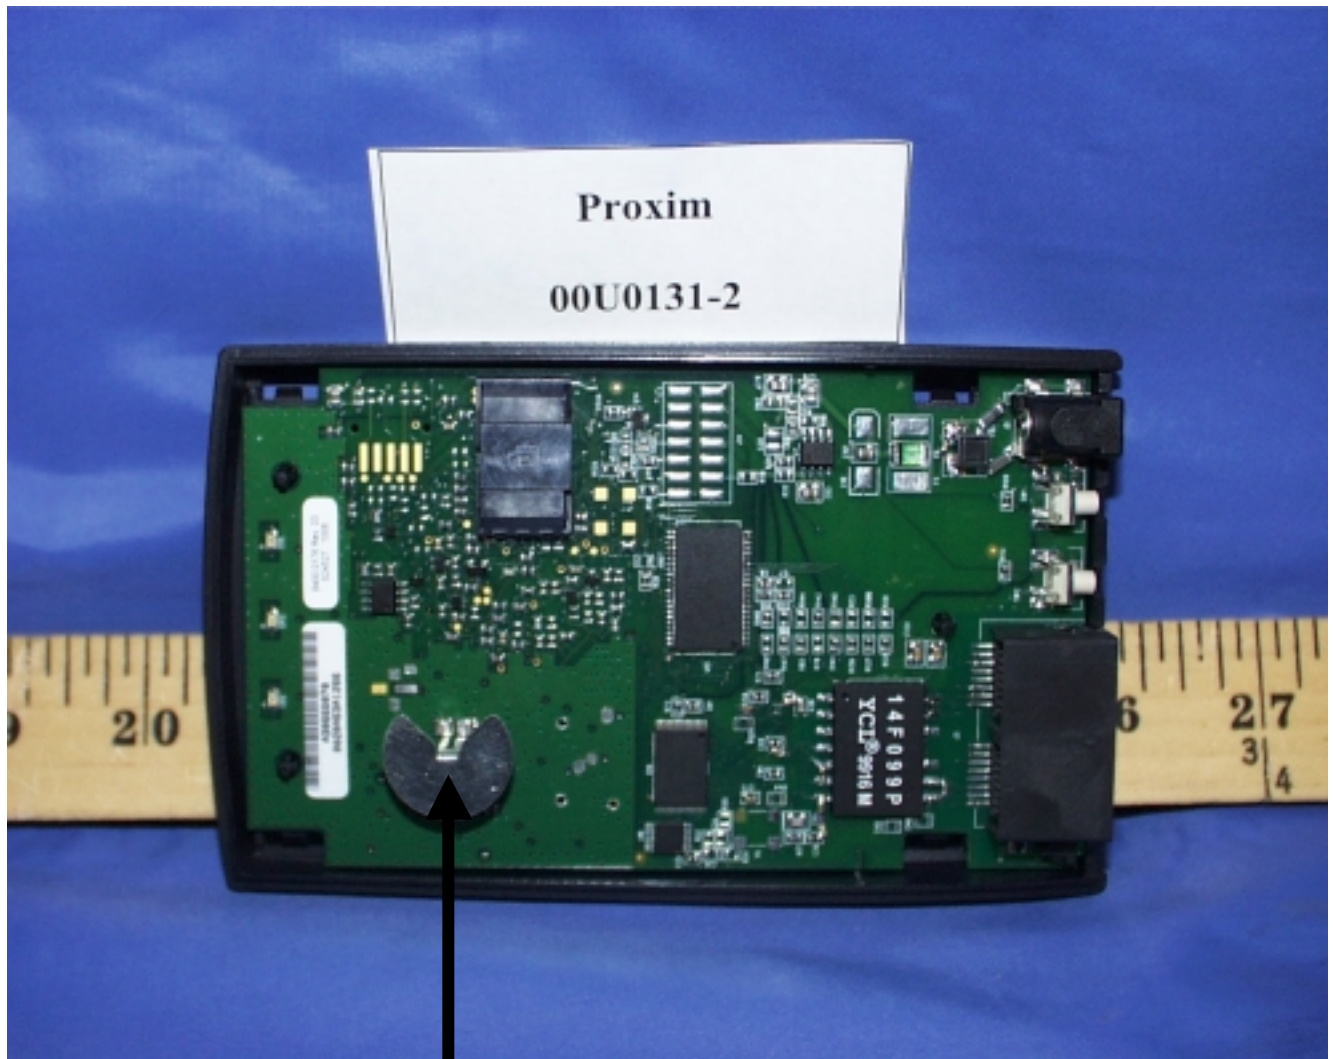

PHOTO# 5

0 dBi permanently attach antenna

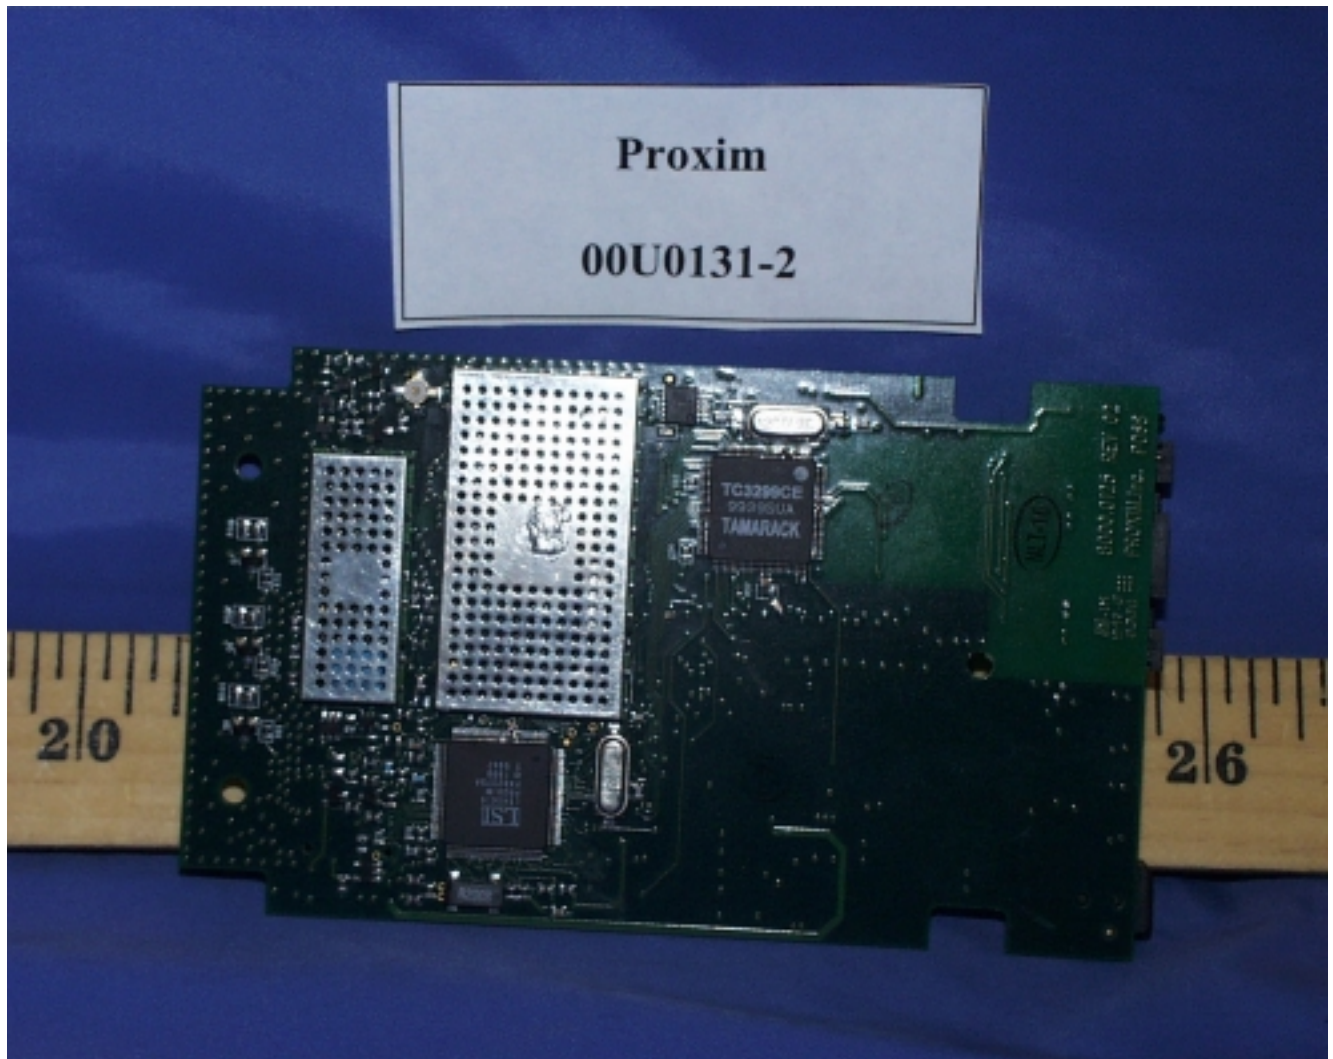

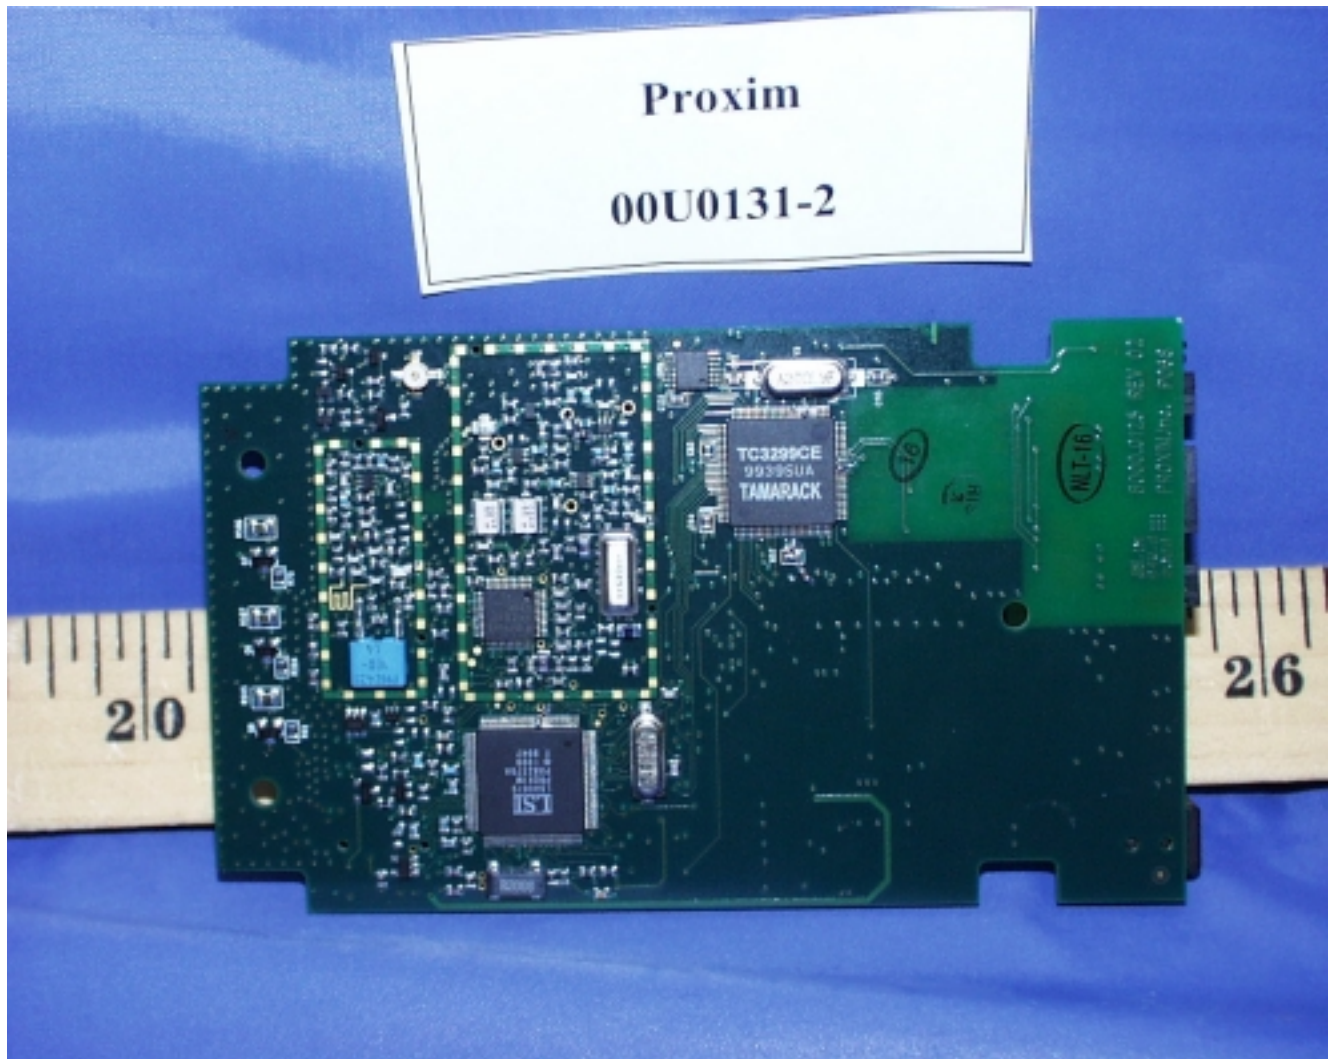

ATTACHMENT# 2: PROPOSED FCC ID LABEL FORMAT

ATTACHMENT# 3: AGENT AUTHORIZATION LETTER

ATTACHMENT# 4: SYMPHONY-HOME RF CORDLESS GATEWAY TECHNICAL DESCRIPTION

PROXIM CONFIDENTIAL**C:\WINDOWS\TEMP\bridgetechdescr.doc 14:07 04/21/00****Symphony-HRF Cordless Gateway Technical Description****PRODUCT:**

The product is a FHSS WLAN adapter operating in the 2.4-2.4835GHz band with a nominal TX output power of 100mW. It is a small desktop box with associated wall plug mounted 5V switching DC power supply, integral antenna inside the plastic enclosure and 10 base T port for connection to standard wired LAN. The nominal gain of the integral antenna is 0dBi. Refer to the manual for MPE statement. This device can either stand alone connected to a RJ-45 LAN hub port, or be connected to the RJ-45 port of a computing device.

USER CONNECTIONS:

There are two RJ-45 connectors supplied for the single 10 baseT port, only one is used at a time. One connection is a straight through connection, the other for configurations requiring a null connection where TX and RX pairs are reversed. The contacts of the two RJ-45 connectors are connected in parallel to the same physical 10 base T port inside the device. The green LED lights to indicate a successful connection to the LAN when the appropriate port is used.

The 5VDC power is connected via a 2.5mm coaxial power connector.

TEST CONNECTION:

There is a -20dB nominal 50 ohm test connection port on the PCA internal to the unit which **is not user accessible**, but which may be used to make conducted measurements on the output of the transmitter for certification purposes. For calibrated amplitude measurements during certification it is recommended that the integral antenna be temporarily disconnected by removing a jumper on the PCA. In order to provide a 50 ohm load without the integral antenna connected it is necessary to temporarily remove the series and shunt resistors which make up the -20dB nominal tap and replace them with a single 0 ohm jumper resistor at the series location intended for the 470 ohm (471) resistor.

ACCESSORIES:

Proxim P/N [4000.0025 Model](#) ADP-5DB wall mounted switching power supply, 100-120V/50-60Hz input, 5V 1A nominal output.

Proxim P/N [6001.0124](#) unshielded twisted pair RJ-45 cable assembly

INTERNAL CLOCK AND RF OSCILLATOR FREQUENCIES:

Ethernet controller	20MHz
processor ASIC	24, 4MHz, 32.768kHz

synthesizer	reference 4MHz
	TX frequency 1201-1240MHz, 500kHz steps
	RX frequency 1145.75-1184.75MHz, 500kHz steps
transmit LO, transmit and receive range	2402-2480MHz, 1MHz steps
receive LO	2291.5-2369.5MHz, 1MHz steps
receive IF	110.5MHz, 1MHz BW

SIGNAL FLOW:

The memory and Ethernet controller communicate with the processor ASIC which also contain the baseband radio functions, A/D and D/A conversions, transceiver control functions and memory interface.

The Ethernet controller and processor ASIC each support their own on board clock oscillators at 20 and 24MHz respectively.

The synthesizer tunes from 1201 to 1240MHz in 500kHz steps in transmit. It uses an external VCO and external loop and modulation filters, but the rest is part of an integrated 2.4GHz transceiver IC. The reference for the synthesizer is a 4 MHz ASIC output derived from the ASIC's 24MHz clock. The VCO is directly FM modulated with a mix of BFSK/QFSK with -20dB BW of <1MHz at a symbol rate of 800kb/s for a data rate of 0.8/1.6Mb/s. The transceiver IC doubles the modulated external VCO and feeds the integral antenna in through a bandpass filter, power amplifier, transmit/receive switch and lowpass filter.

The synthesizer tunes from 1145.75 to 1184.75MHz in 500kHz steps in receive. The RX path is from the antenna through the LPF and transmit /receive switch shared with the transmitter. It is a half duplex system. From the switch the receive signal is amplified in an LNA, and passes through an image reject filter to the transceiver IC where it is mixed down to the IF by the receive LO which is generated inside the transceiver IC by doubling the buffered VCO output. The IF output of the mixer goes off chip for bandpass filtering, back on for additional amplification, off again for more filtering and then back on chip for limiting and FM quadrature demodulation. The demodulated signal is amplified and filtered at baseband before being converted to a bit stream in the ASIC.

The VCO and buffer reside under one shield, the balance of the RF is under the other shield. RF filtering is distributed at each stage with final TX filtering between the transmit/receive switch and the antenna.

ATTACHMENT# 5: USER'S GUIDE

ATTACHMENT# 6: CONFIDENTIALITY REQUEST LETTER

CONFIDENTIALITY PACKAGE CONTAINS:

SYMPHONY- HRF Cordless Gateway, Schematic

SYMPHONY- HRF Cordless Gateway, Block Diagram

SYMPHONY- Home RF Frequency Hopping Theory of Operation

Maximum Duty Cycle Analysis for Symphony-HRF Cordless Gateway