
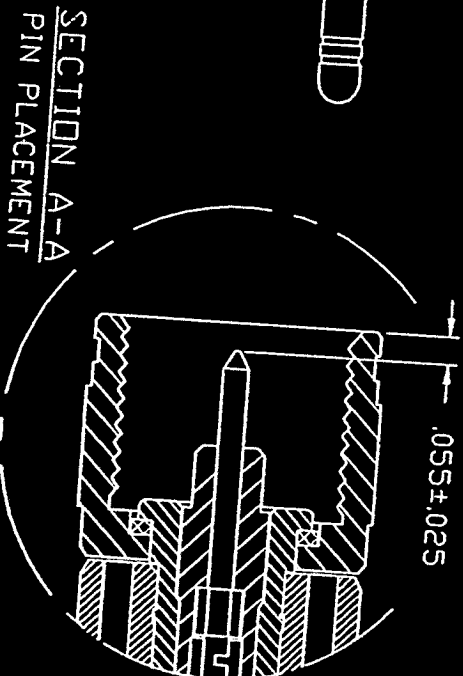
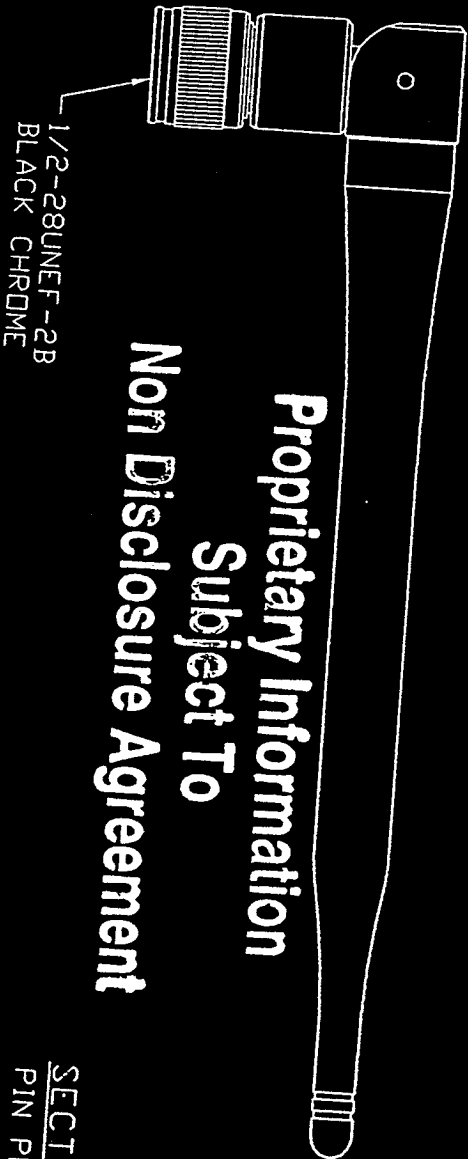


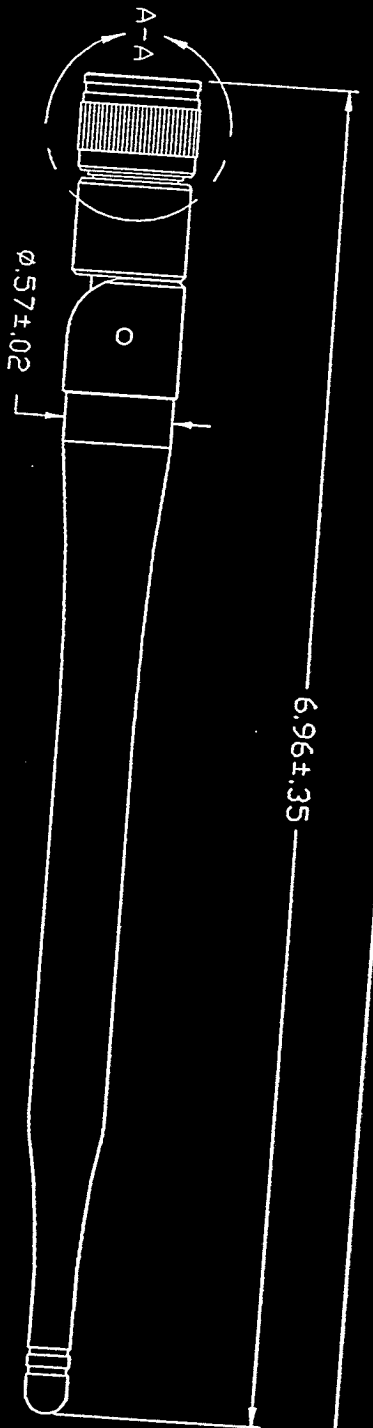

NOTES:

1 SPECIFICATIONS:

GAIN: 1.0 dB;
 OPERATING TEMPERATURE: -40°C TO +85°C
 FLEX TEST: PER QEA0014
 PULL TEST: 20 lbs. LINEAR PULL
 TORQUE TEST: 20 in-lbs.
 POWER RATING: 50 WATTS
 VSWR 1.5:1 MAX. AT RESONANCE

2 CENTURION CUSTOMER FREQUENCY FREQUENCY

PART NO.	MODEL NO.	CODE	RANGE
CAF28771	805-486-001	2.4 GHZ	2.4-2.5GHZ

SECTION A-A PIN PLACEMENT

LET	REVISION	DATE	CK	APP	SCALE:	1:1	TOL. UNLESS NOTED:
X1	PROT6032	10/95			DR: JB	CK:	.XX = ± .010 .XXX = ± .005
A	ECD951263	10/95					ANGULAR ± 30°
B	ECD9653	01/96					
CENTURION INT. INC.							
ANT, CXR-2.4GHZ-TNSP							
MATERIAL: N/A							
DATE: 10/13/95 DWG NO.: CAF28771 PG: REV							
10/13/95 1/6 B							

THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE
 IT MAY NOT BE REPRODUCED OR USED WITHOUT EXPRESS WRITTEN PERMISSION
 CENTURION INTERNATIONAL