



RADIO TEST REPORT

Test Report No. : 14027963S-B-R1

Applicant : JVCKENWOOD Corporation
Type of EUT : Monitor with Receiver
Model Number of EUT : DMX958XR
FCC ID : IOMJ5268
Test regulation : FCC Part 15 Subpart C: 2021
* Bluetooth BR/EDR part
Test item : Antenna Terminal Conducted Tests
Test Result : Complied (Refer to SECTION 3)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.
10. This report is a revised version of 14027963S-B. 14027963S-B is replaced with this report.

Date of test: October 4 to 6, 2021

Representative test engineer:

T. Kawakami

Takahiro Kawakami
Engineer

Approved by:

K. Noda

Kazuya Noda
Leader



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

REVISION HISTORY

Original Test Report No.: 14027963S-B

Revision	Test report No.	Date	Page revised	Contents
- (Original)	14027963S-B	November 10, 2021	-	-
1	14027963S-B-R1	November 24, 2021	P.10	Correction of Software “SoC” From: 0.0.0805.4800 To: 0.0.0805.4600

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Antenna Terminal Conducted Tests.....	13
APPENDIX 1: Test data	14
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	14
Number of Hopping Frequency	18
Dwell time.....	20
Maximum Peak Output Power	23
Average Output Power	24
Conducted Spurious Emission	26
Conducted Emission Band Edge compliance	32
APPENDIX 2: Test instruments	34
APPENDIX 3: Photographs of test setup	35
Antenna Terminal Conducted Tests.....	35

SECTION 1: Customer information

Company Name	:	JVCKENWOOD Corporation
Address	:	2967-3, Ishikawa-machi, Hachioji, Tokyo 192-8525 Japan
Telephone Number	:	+81-42-646-5525
Contact Person	:	Seigo Tsutsumi

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer information
 - SECTION 2: Equipment under test (EUT) other than the Receipt Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type	:	Monitor with Receiver
Model Number	:	DMX958XR
Serial Number	:	Refer to SECTION 4.2
Condition	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date	:	October 4, 2021
Modification	:	No Modification by the test lab

2.2 Product Description

Model: DMX958XR (referred to as the EUT in this report) is a Monitor with Receiver.

There are three variant models DMX908S, DMX9708S, KW-M875BW

These models are identical except for presence of Panel, Dashboard Camera control terminal, HD Radio, HD Camera Ready, Display and these difference do not affect the radio.

General Specification

Rating : DC 12 V

Radio Specification

Type of radio	Bluetooth (BR/EDR)	IEEE802.11b	IEEE802.11g	IEEE802.11a	IEEE802.11n (20 MHz BW)	IEEE802.11n (40 MHz BW)	IEEE802.11ac
Frequency of operation	2402 MHz - 2480 MHz	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	5745 MHz - 5805 MHz	2412 MHz - 2462 MHz 5745 MHz - 5805 MHz	5755 MHz - 5795 MHz	5745 MHz-5805 MHz (20 MHz BW) 5755 MHz-5795 MHz (40 MHz BW) 5775 MHz (80 MHz BW)
Type of modulation	FHSS	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)	OFDM (64QAM, 16QAM, QPSK, BPSK)			OFDM (256QAM, 16QAM, QPSK, BPSK)
Channel spacing	1 MHz	5 MHz		20 MHz	2.4 GHz band 5 MHz 5 GHz band 20 MHz	40 MHz	20 MHz (20 MHz BW) 40 MHz (40 MHz BW) 80 MHz (80 MHz BW)

Antenna type	Internal Antenna (Chip Antenna)
Antenna Gain	Antenna 0 (ANT-0) : -7.7 dBi (2.4 GHz Wireless LAN only), -4.7 dBi (5 GHz) Antenna 1 (ANT-1) : -9.9 dBi (2.4 GHz Bluetooth only), -4.6 dBi (5 GHz)
Power Supply (radio art input)	DC 3.6 V/ 3.3 V/1.8 V
Clock frequency (Maximum)	37.4 MHz
Clock frequency in the system (Maximum)	6.2208 GHz

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	N/A	N/A *1)	-
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied b)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied c)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(a)(b)(1) ISED: RSS-247 5.4 (b)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	See data.	Complied e)	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT does not have AC Mains.

a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

b) Refer to APPENDIX 1 (data of Number of Hopping Frequency)

c) Refer to APPENDIX 1 (data of Dwell time)

d) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

e) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage.

Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	2.0 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.3 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.3 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.3 dB
Spurious emission (Conducted) below 1GHz	0.93 dB
Spurious emission (Conducted) 1 GHz-3 GHz	0.92 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.3 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.3 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.93 deg.C.
Humidity_SCH-01	4.1 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.6 %
Voltage	0.97 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Conducted)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20 dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99 % Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2 Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. * It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification. *EUT has the power settings by the software as follows; Power settings: Fixed Software: SoC: 0.0.0805.4600 Syscom: 1.0.0479.3100 Panel: 1.0.0209.3700 (Date: 2021.10.4, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

4.2 Configuration and peripherals

Antenna Terminal Conducted test

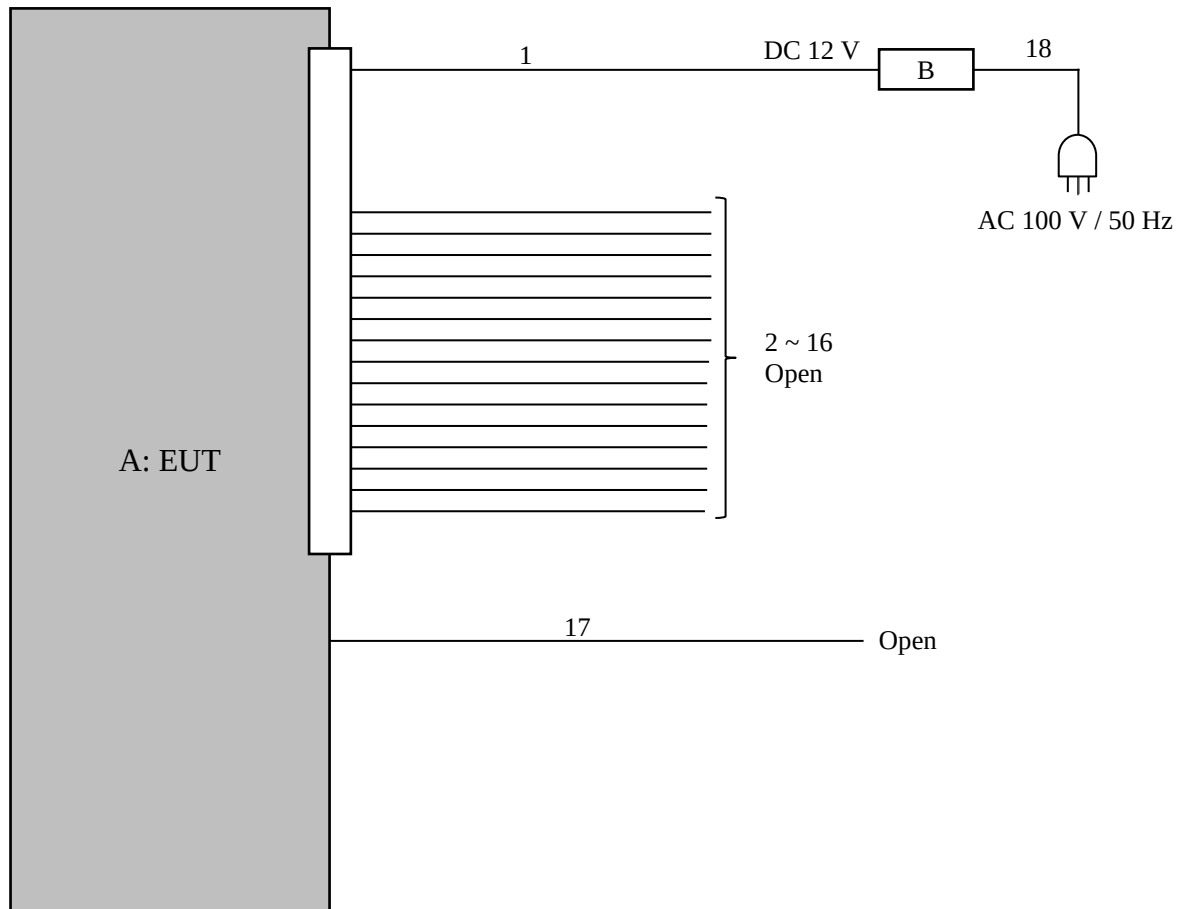

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Monitor with Receiver	DMX958XR	PK-X0006	JVCKENWOOD	EUT
B	DC Power Supply	PW18-2ATP	19056351	TEXIO	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC(ACC,B+,GND)	1.8	Unshielded	Unshielded	-
2	Speaker (Front-L) +	0.1	Unshielded	Unshielded	-
3	Speaker (Front-R) +	0.1	Unshielded	Unshielded	-
4	Speaker (Rear-L) +	0.1	Unshielded	Unshielded	-
5	Speaker (Rear-R) +	0.1	Unshielded	Unshielded	-
6	Speaker (Front-L) -	0.1	Unshielded	Unshielded	-
7	Speaker (Front-R) -	0.1	Unshielded	Unshielded	-
8	Speaker (Rear-L) -	0.1	Unshielded	Unshielded	-
9	Speaker (Rear-R) -	0.1	Unshielded	Unshielded	-
10	P-CONT	0.1	Unshielded	Unshielded	-
11	REMOTE CONT	0.1	Unshielded	Unshielded	-
12	MUTE	0.1	Unshielded	Unshielded	-
13	ANT.CONT	0.1	Unshielded	Unshielded	-
14	ILLUMI	0.1	Unshielded	Unshielded	-
15	REVERSE	0.1	Unshielded	Unshielded	-
16	PRK SW	0.1	Unshielded	Unshielded	-
17	FM/AM ANT	0.1	Shielded	Shielded	-
18	AC	2.0	Unshielded	Unshielded	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 40 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.
 *2) Reference data
 *3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
 Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
 (9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)
 *4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
 The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation


Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.995	887.287	1.000	≥ 0.664
DH5	2441.0	0.993	880.710	1.000	≥ 0.662
DH5	2480.0	0.995	881.546	1.000	≥ 0.663
DH5	Hopping On	-	78618.6	-	-
3DH5	2402.0	1.319	1215.2	1.000	≥ 0.879
3DH5	2441.0	1.321	1209.9	1.000	≥ 0.880
3DH5	2480.0	1.321	1211.4	1.000	≥ 0.881
3DH5	Hopping On	-	78678.1	-	-

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth

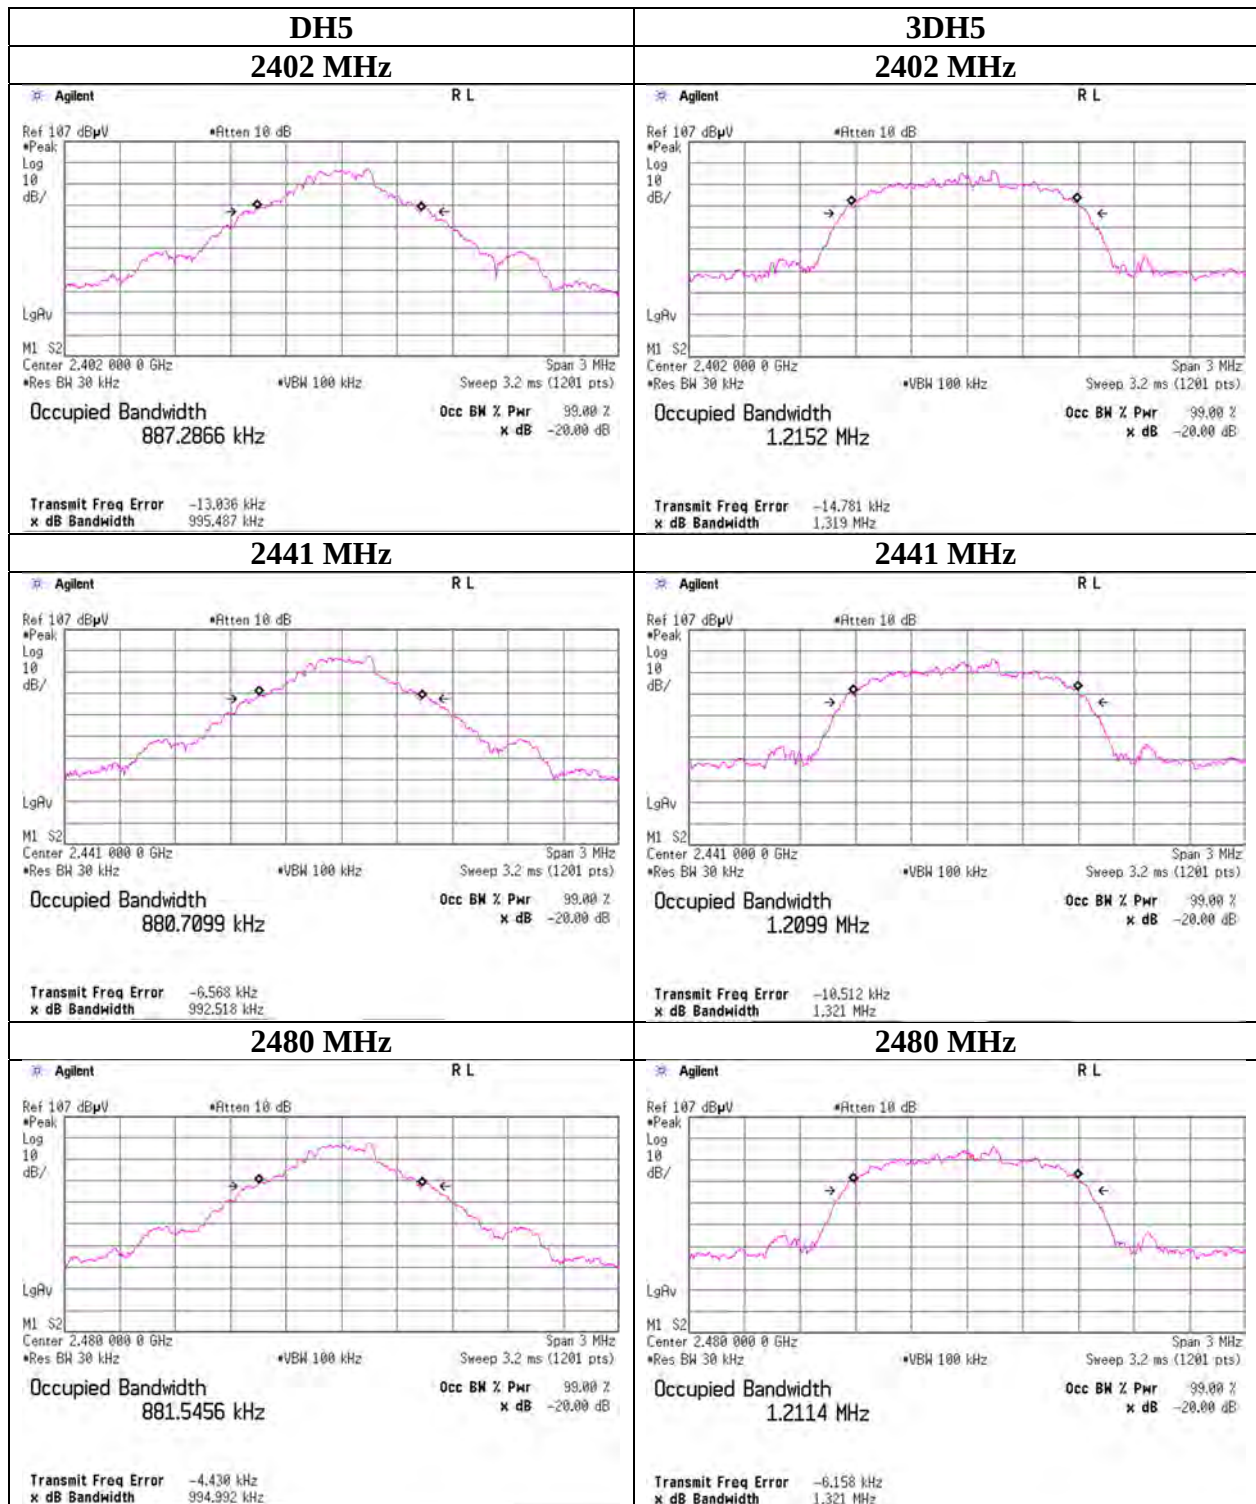

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

20dB Bandwidth and 99% Occupied Bandwidth



Carrier Frequency Separation

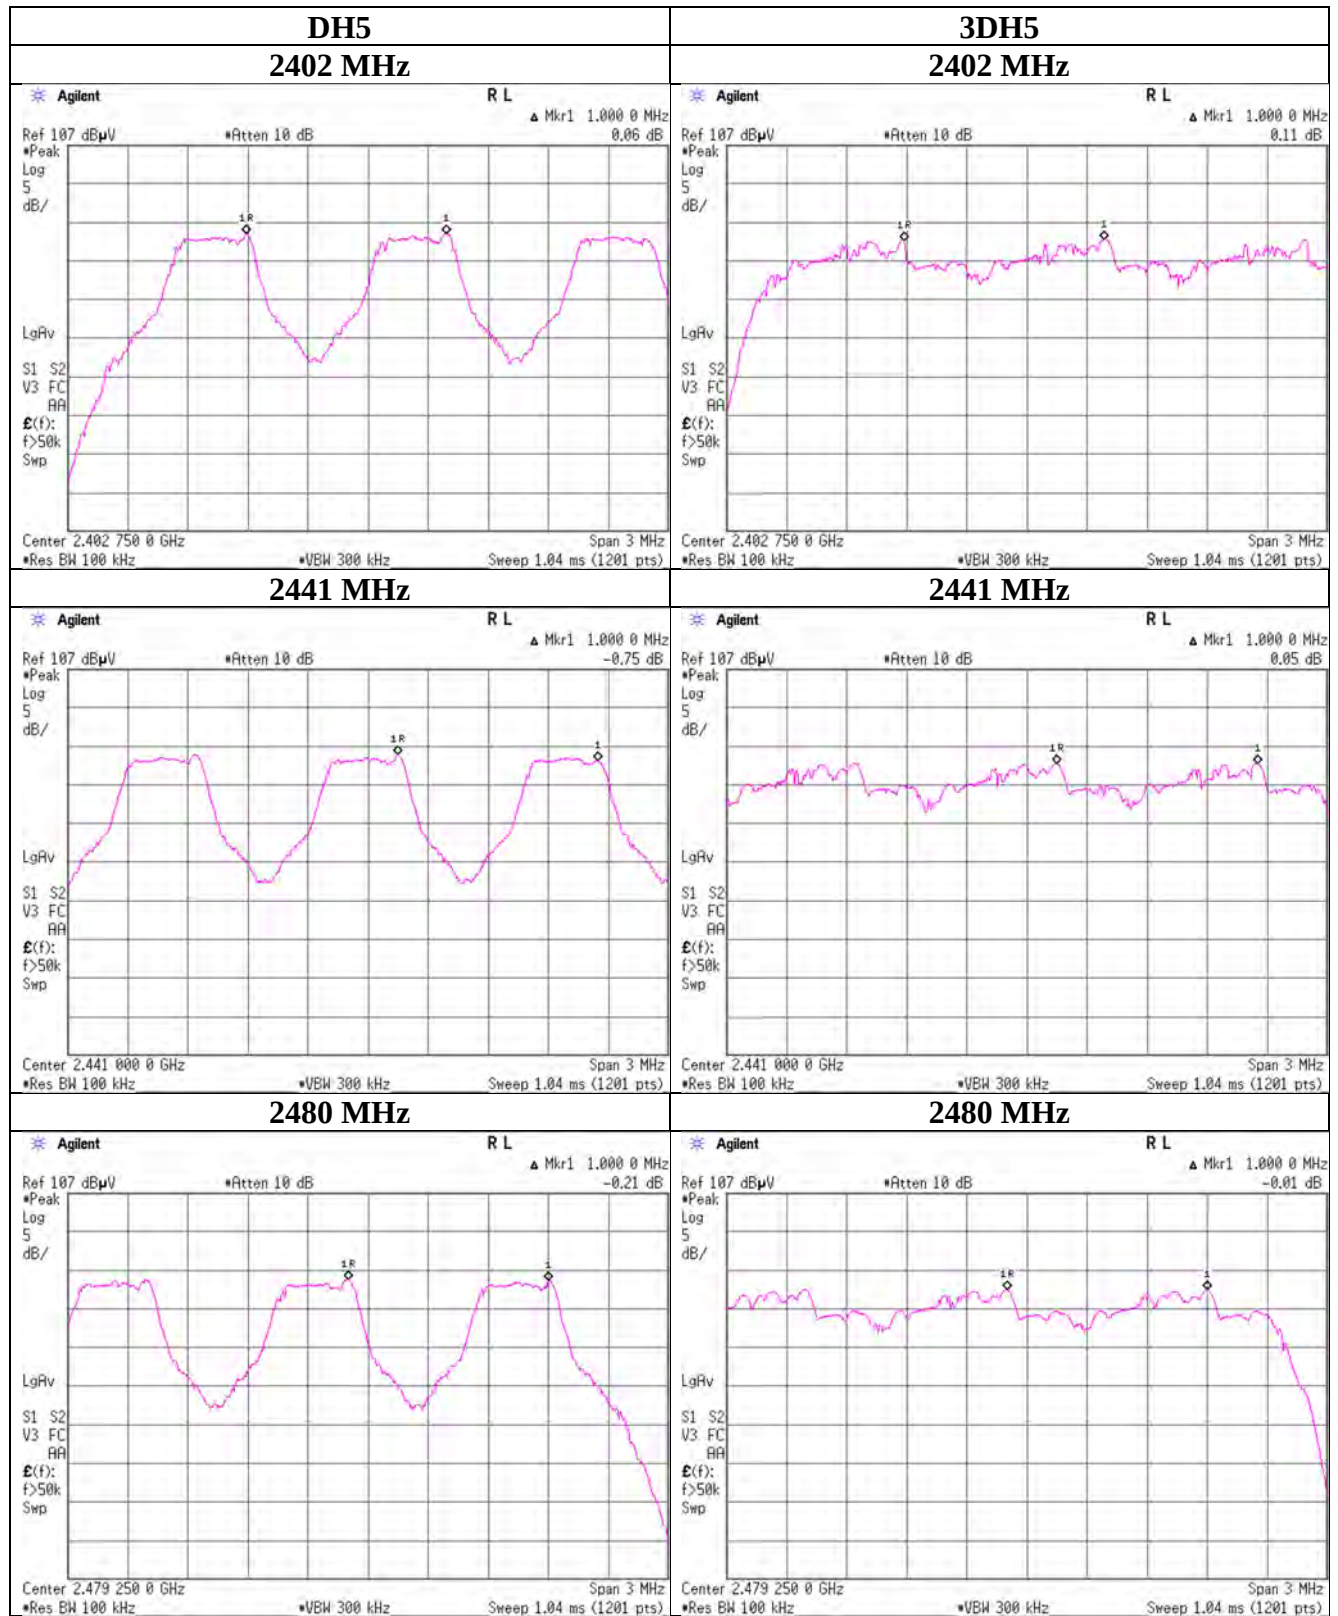

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


Number of Hopping Frequency

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	>= 15
3DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

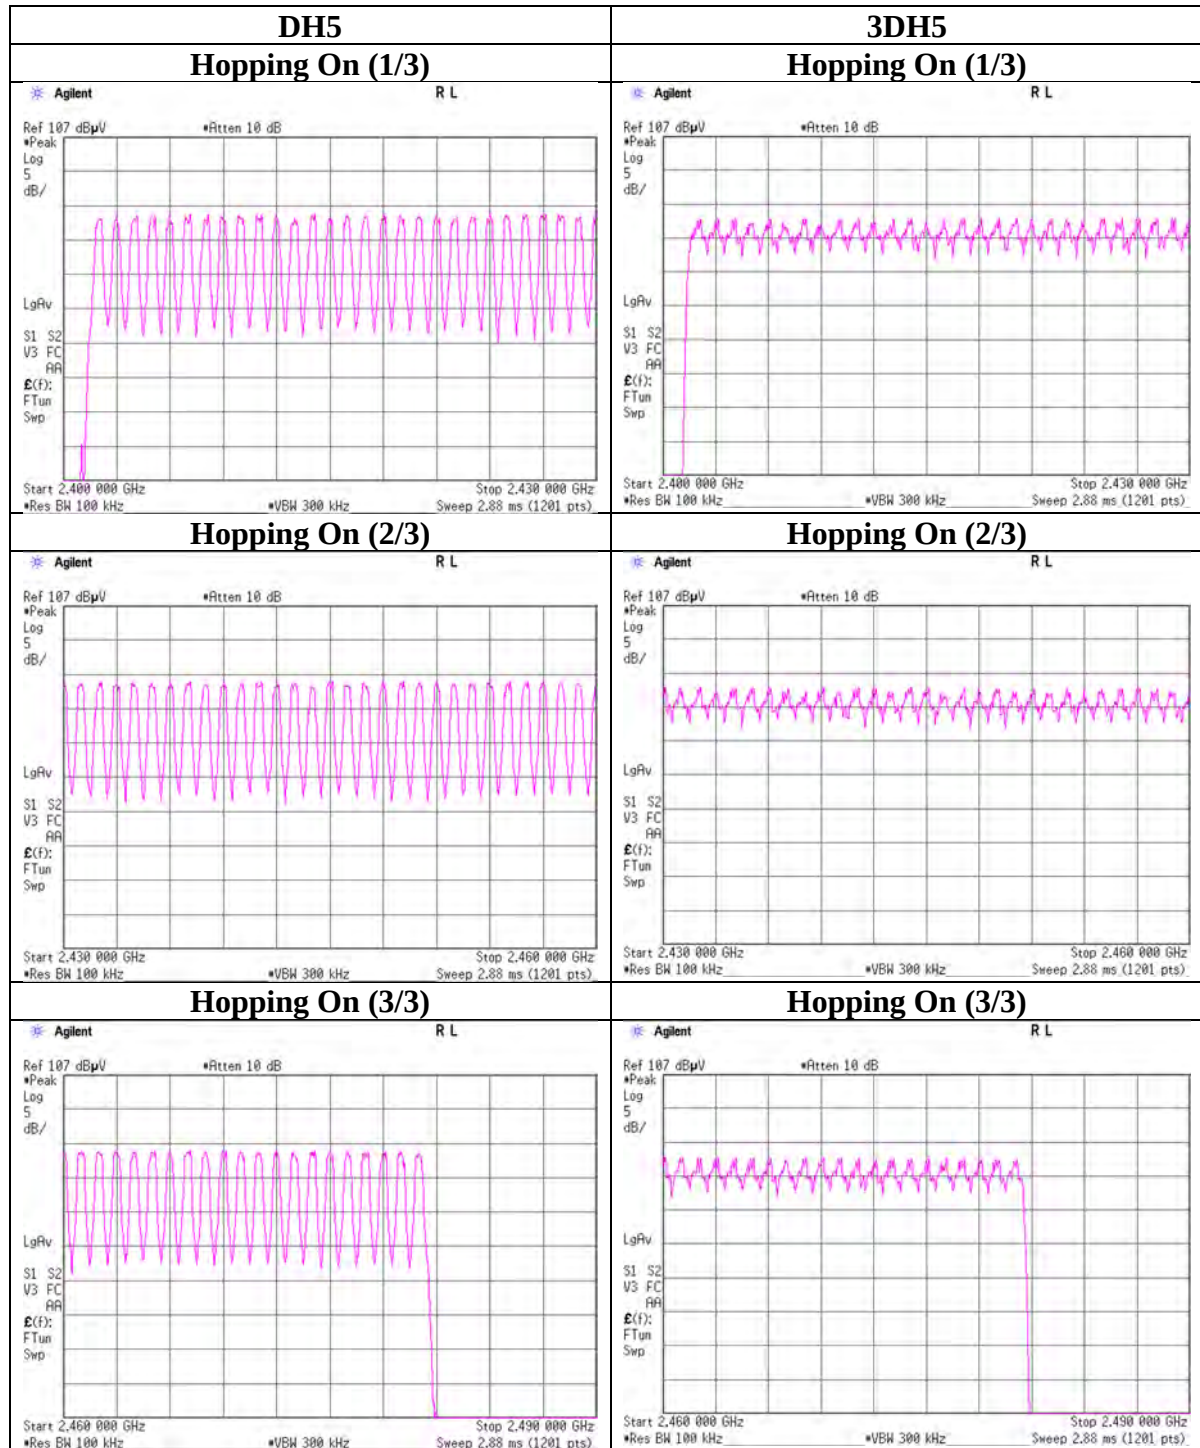

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Dwell time

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping On

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) second period	Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	48.6 times / 5 sec. x 31.6 sec. = 308 times	0.422	130	400
DH3	25.0 times / 5 sec. x 31.6 sec. = 158 times	1.680	265	400
DH5	17.8 times / 5 sec. x 31.6 sec. = 113 times	2.928	331	400
3DH1	47.8 times / 5 sec. x 31.6 sec. = 303 times	0.429	130	400
3DH3	23.8 times / 5 sec. x 31.6 sec. = 151 times	1.680	254	400
3DH5	18.2 times / 5 sec. x 31.6 sec. = 116 times	2.934	340	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	48	48	48	49	50	48.6
DH3	24	24	23	28	26	25
DH5	16	15	20	19	19	17.8
3DH1	46	47	49	49	48	47.8
3DH3	27	25	20	25	22	23.8
3DH5	20	16	16	21	18	18.2

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

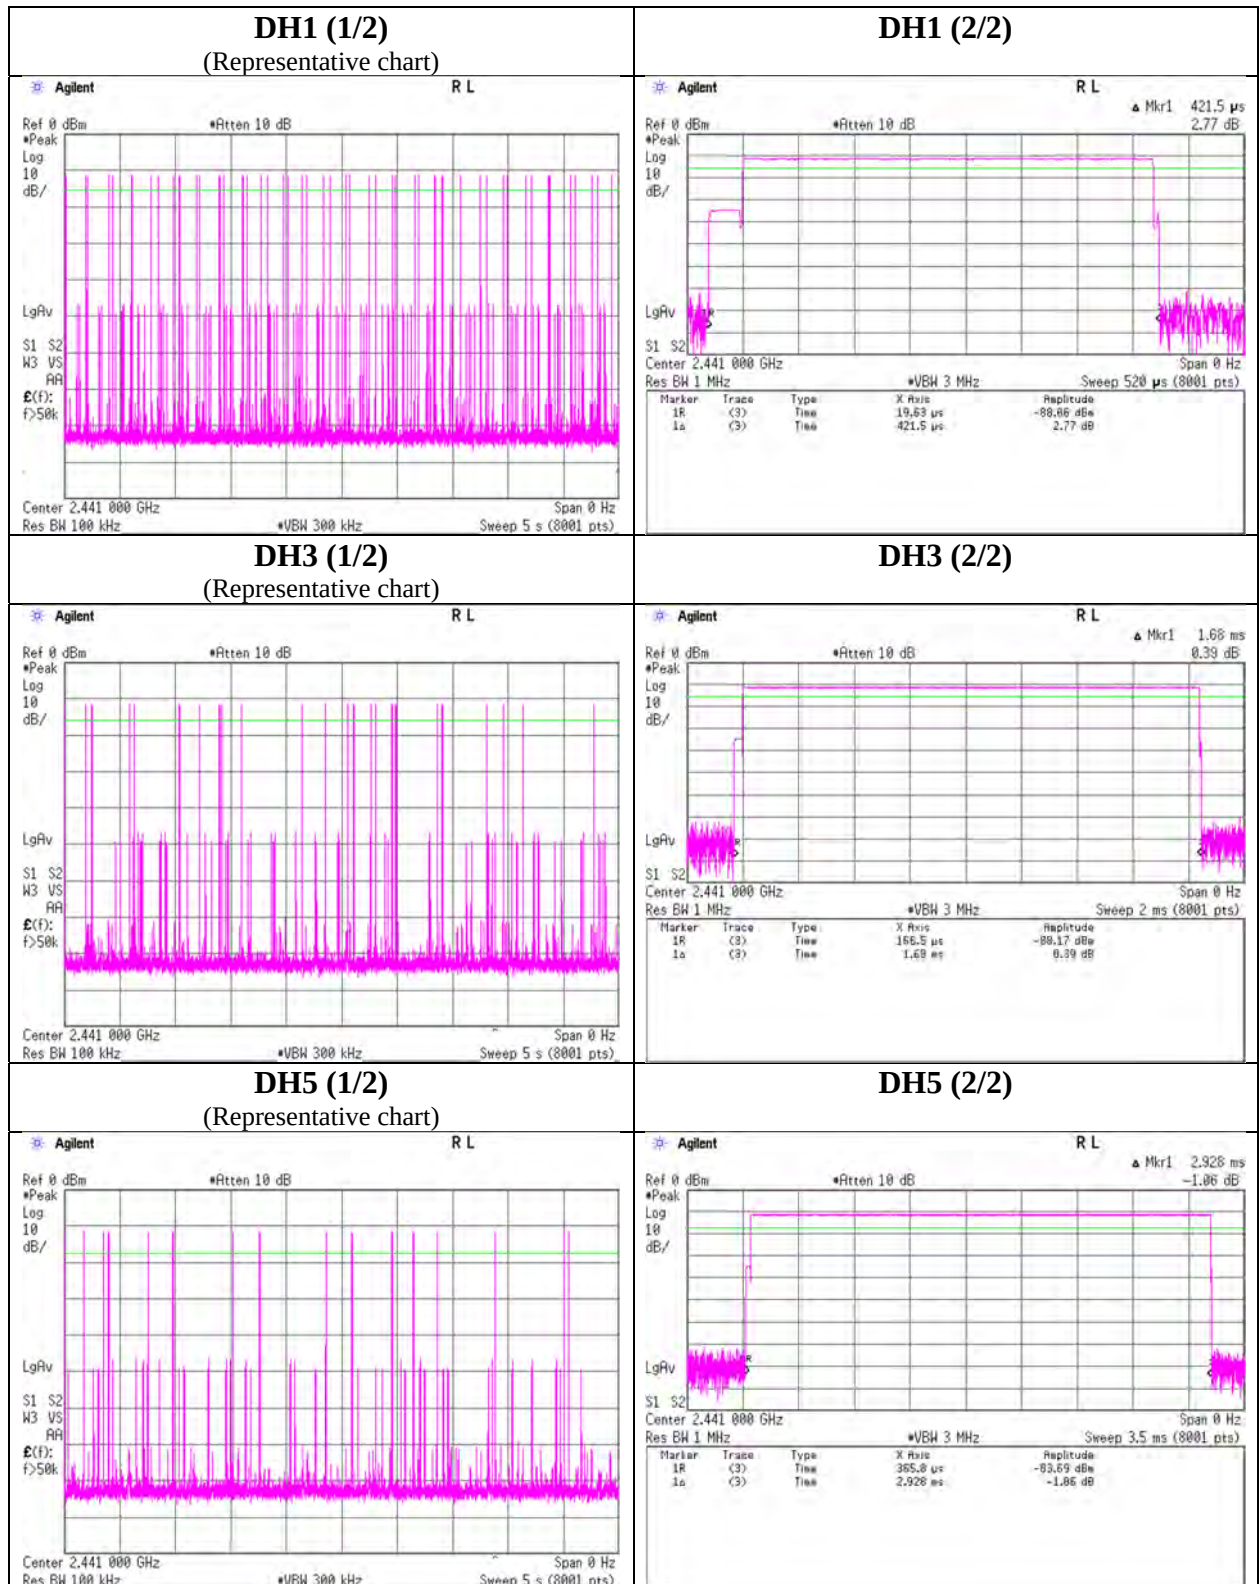

Dwell time

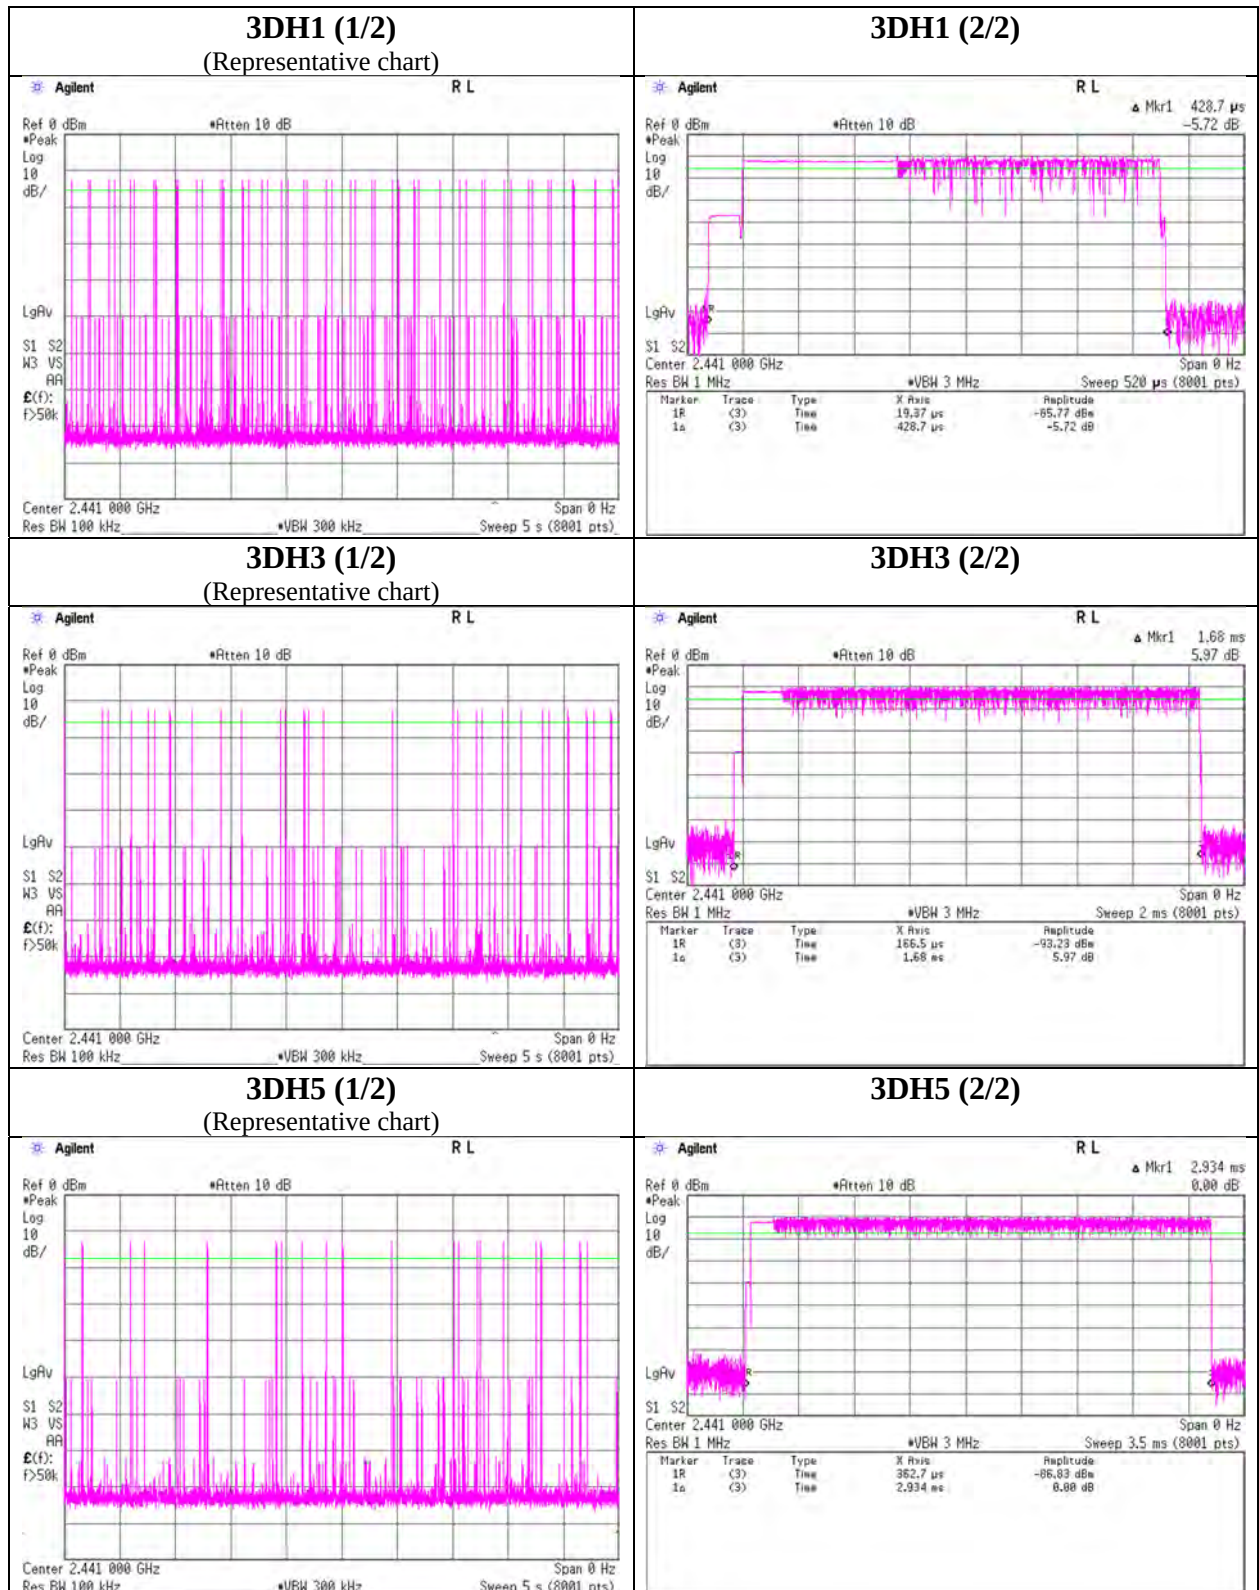

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Maximum Peak Output Power

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date October 4, 2021
Temperature / Humidity 23 deg. C / 55 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247				
					Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit	
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]
DH5	2402.0	-10.83	1.81	10.05	1.03	1.27	20.96	125	19.93	-9.90	-8.87	0.13	36.02	4000
DH5	2441.0	-10.77	1.81	10.05	1.09	1.29	20.96	125	19.87	-9.90	-8.81	0.13	36.02	4000
DH5	2480.0	-10.77	1.82	10.05	1.10	1.29	20.96	125	19.86	-9.90	-8.80	0.13	36.02	4000
2DH5	2402.0	-9.39	1.81	10.05	2.47	1.77	20.96	125	18.49	-9.90	-7.43	0.18	36.02	4000
2DH5	2441.0	-9.43	1.81	10.05	2.43	1.75	20.96	125	18.53	-9.90	-7.47	0.18	36.02	4000
2DH5	2480.0	-9.70	1.82	10.05	2.17	1.65	20.96	125	18.79	-9.90	-7.73	0.17	36.02	4000
3DH5	2402.0	-9.22	1.81	10.05	2.64	1.84	20.96	125	18.32	-9.90	-7.26	0.19	36.02	4000
3DH5	2441.0	-9.07	1.81	10.05	2.79	1.90	20.96	125	18.17	-9.90	-7.11	0.19	36.02	4000
3DH5	2480.0	-9.49	1.82	10.05	2.38	1.73	20.96	125	18.58	-9.90	-7.52	0.18	36.02	4000

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used for the test.

Average Output Power (Reference data for RF Exposure)

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	October 4, 2021
Temperature / Humidity	23 deg. C / 55 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-12.50	1.81	10.05	-0.64	0.86	1.08	0.44	1.11
DH5	2441.0	-12.41	1.81	10.05	-0.55	0.88	1.08	0.53	1.13
DH5	2480.0	-12.45	1.82	10.05	-0.58	0.87	1.08	0.50	1.12
2DH5	2402.0	-13.32	1.81	10.05	-1.46	0.71	1.07	-0.39	0.91
2DH5	2441.0	-13.33	1.81	10.05	-1.47	0.71	1.07	-0.40	0.91
2DH5	2480.0	-13.64	1.82	10.05	-1.77	0.67	1.07	-0.70	0.85
3DH5	2402.0	-13.31	1.81	10.05	-1.45	0.72	1.07	-0.38	0.92
3DH5	2441.0	-13.17	1.81	10.05	-1.31	0.74	1.07	-0.24	0.95
3DH5	2480.0	-13.63	1.82	10.05	-1.76	0.67	1.07	-0.69	0.85

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.5 Shielded Room
Date October 4, 2021
Temperature / Humidity 23 deg. C / 55 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off


DH5

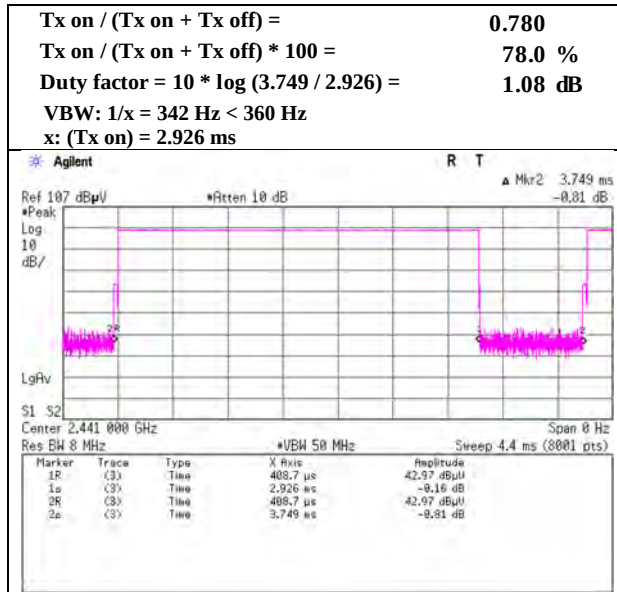

2DH5

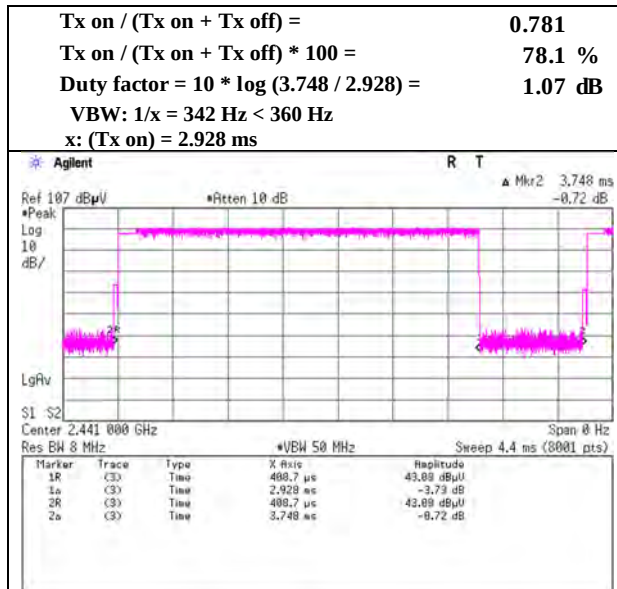


3DH5

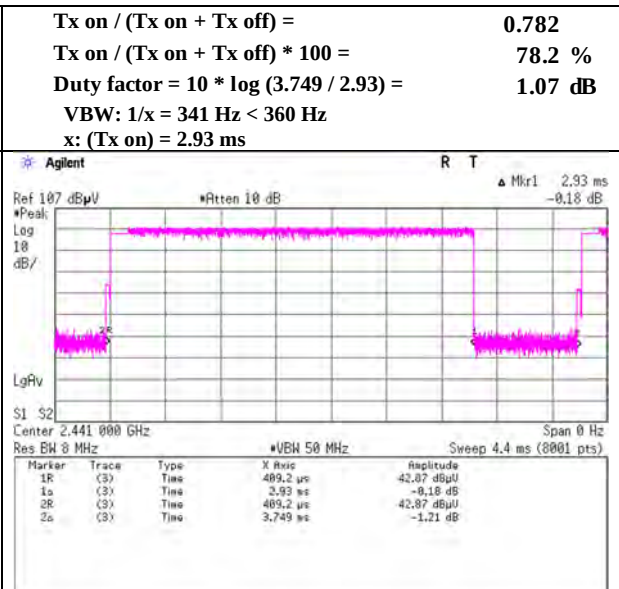

Conducted Spurious Emission

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.1 Measurement Room
Date	October 6, 2021
Temperature / Humidity	25 deg. C / 48 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, DH5

2402 MHz

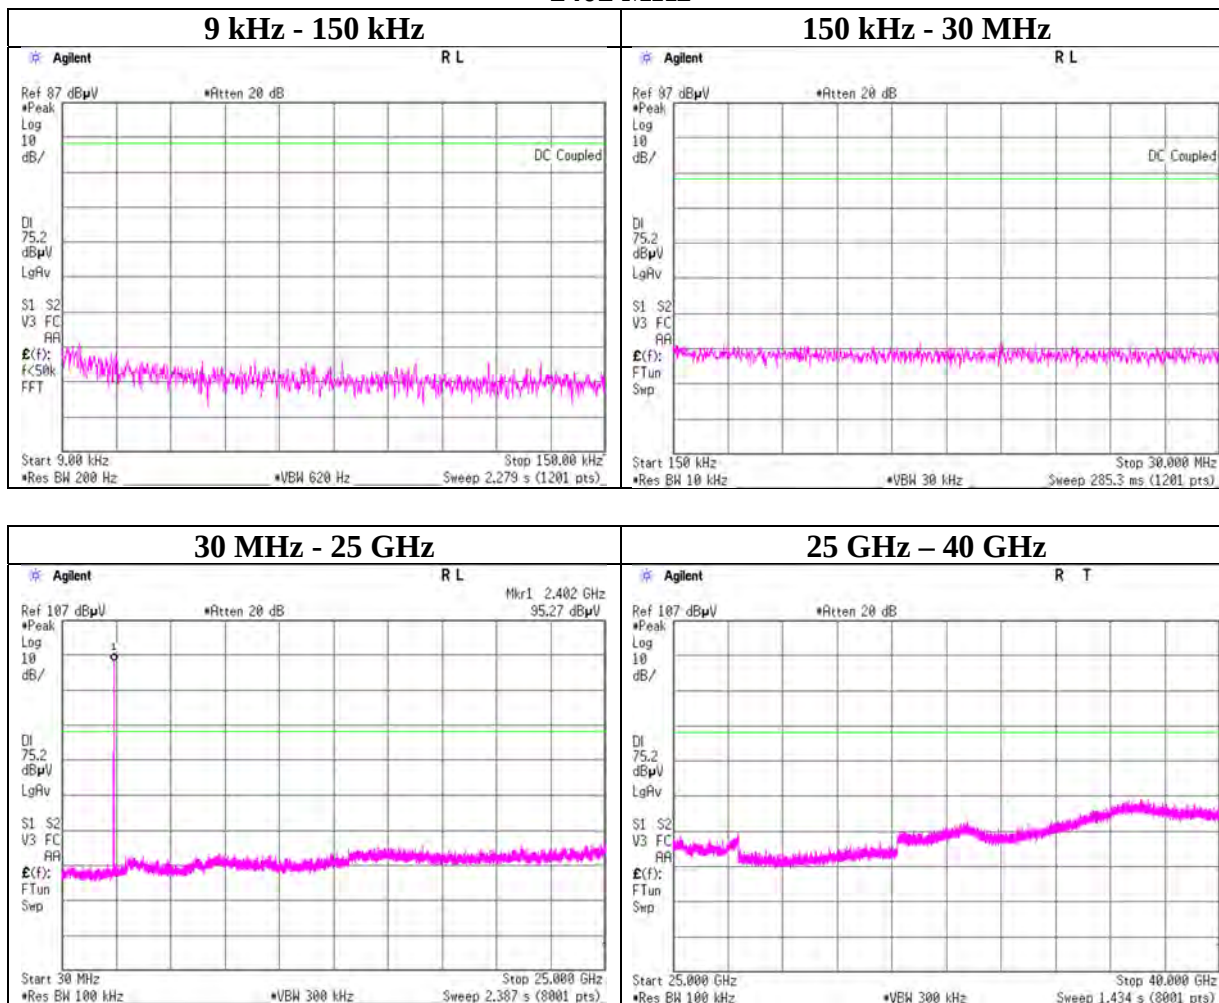

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Conducted Spurious Emission

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.1 Measurement Room
Date	October 6, 2021
Temperature / Humidity	25 deg. C / 48 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, DH5

2441 MHz

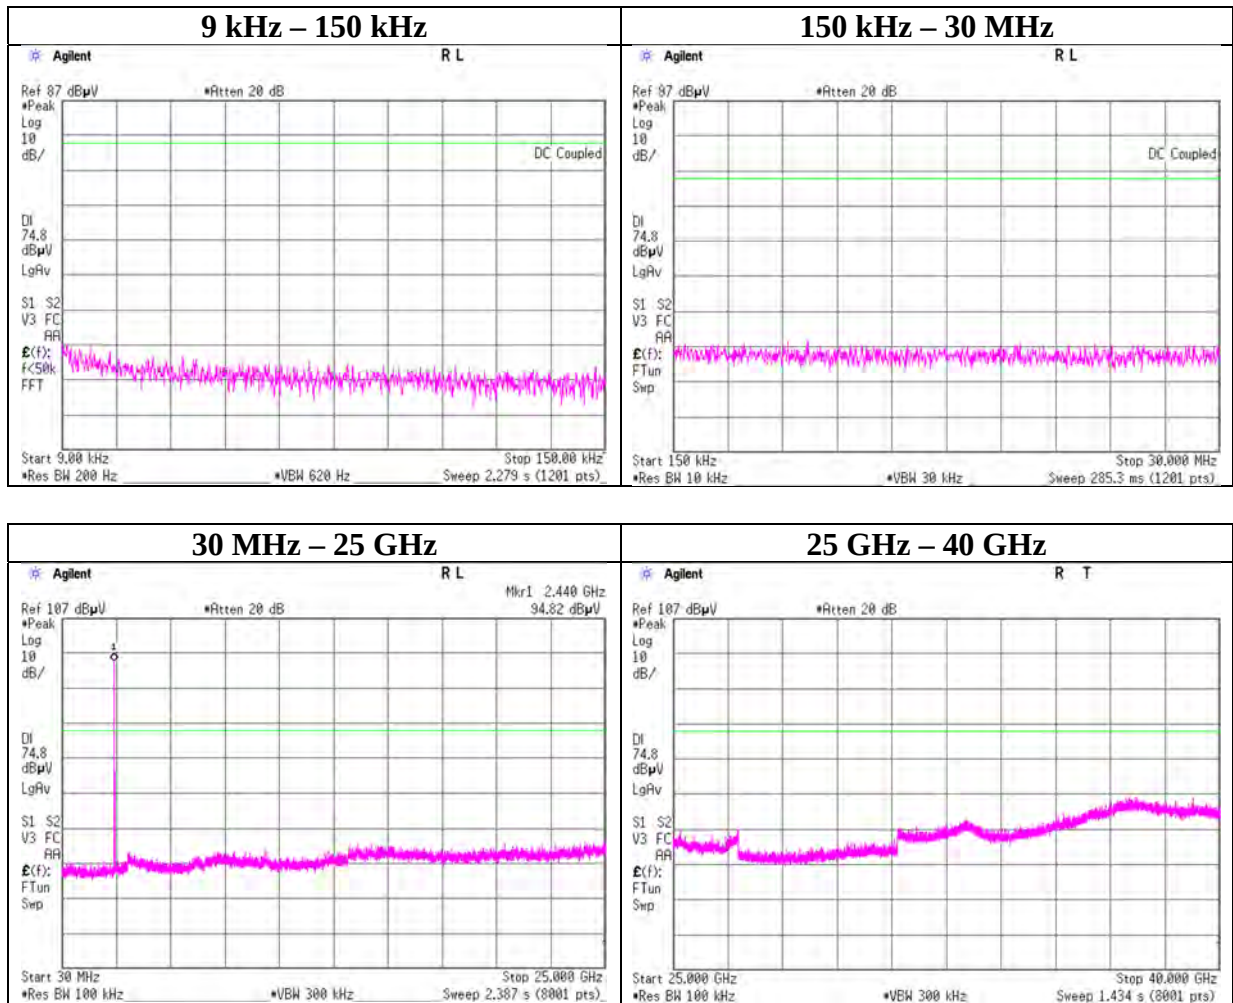

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Conducted Spurious Emission

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off, DH5

2480 MHz

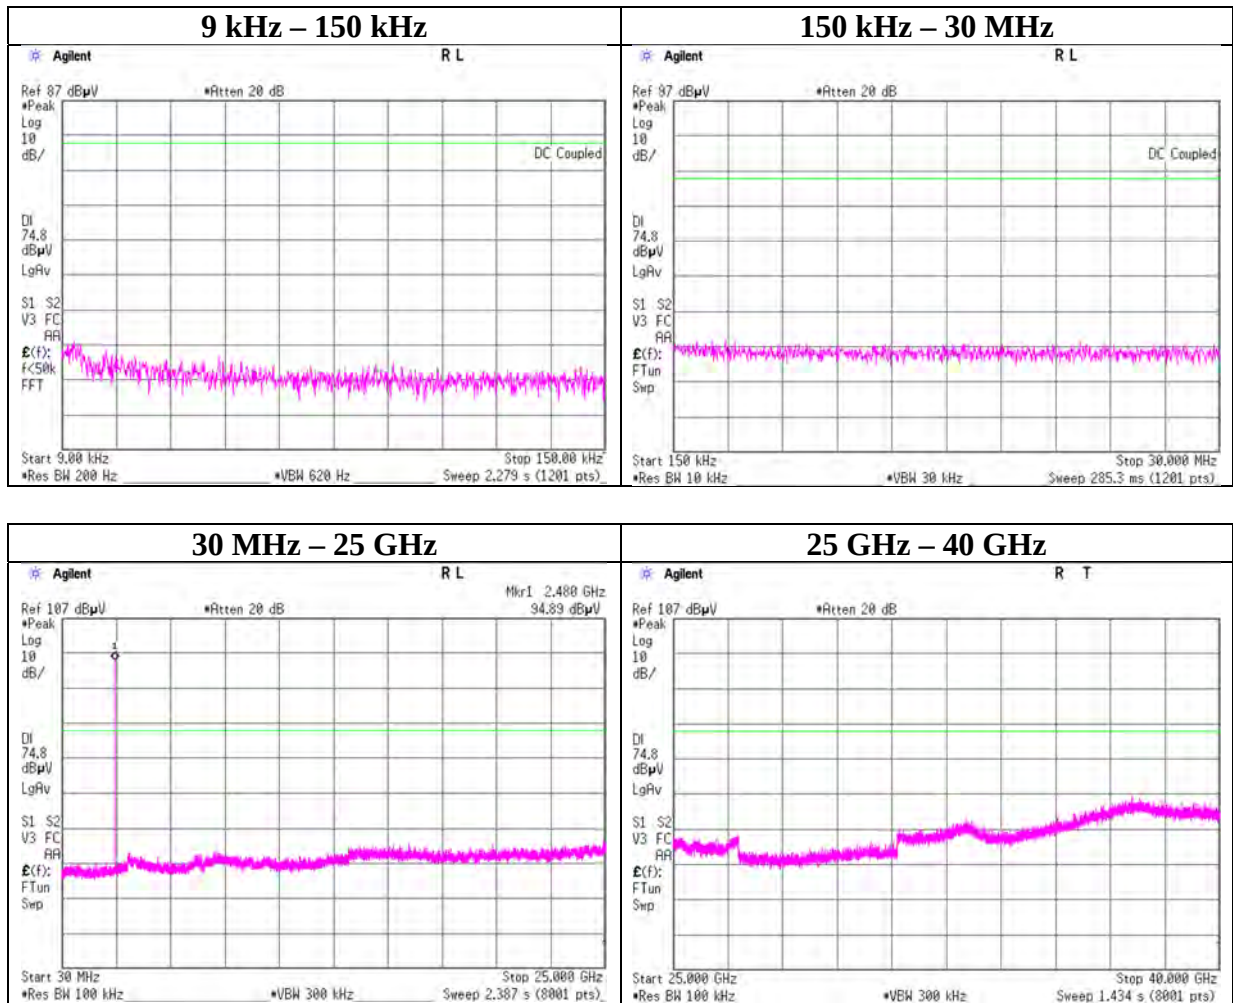

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Conducted Spurious Emission

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.1 Measurement Room
Date	October 6, 2021
Temperature / Humidity	25 deg. C / 48 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5

2402 MHz

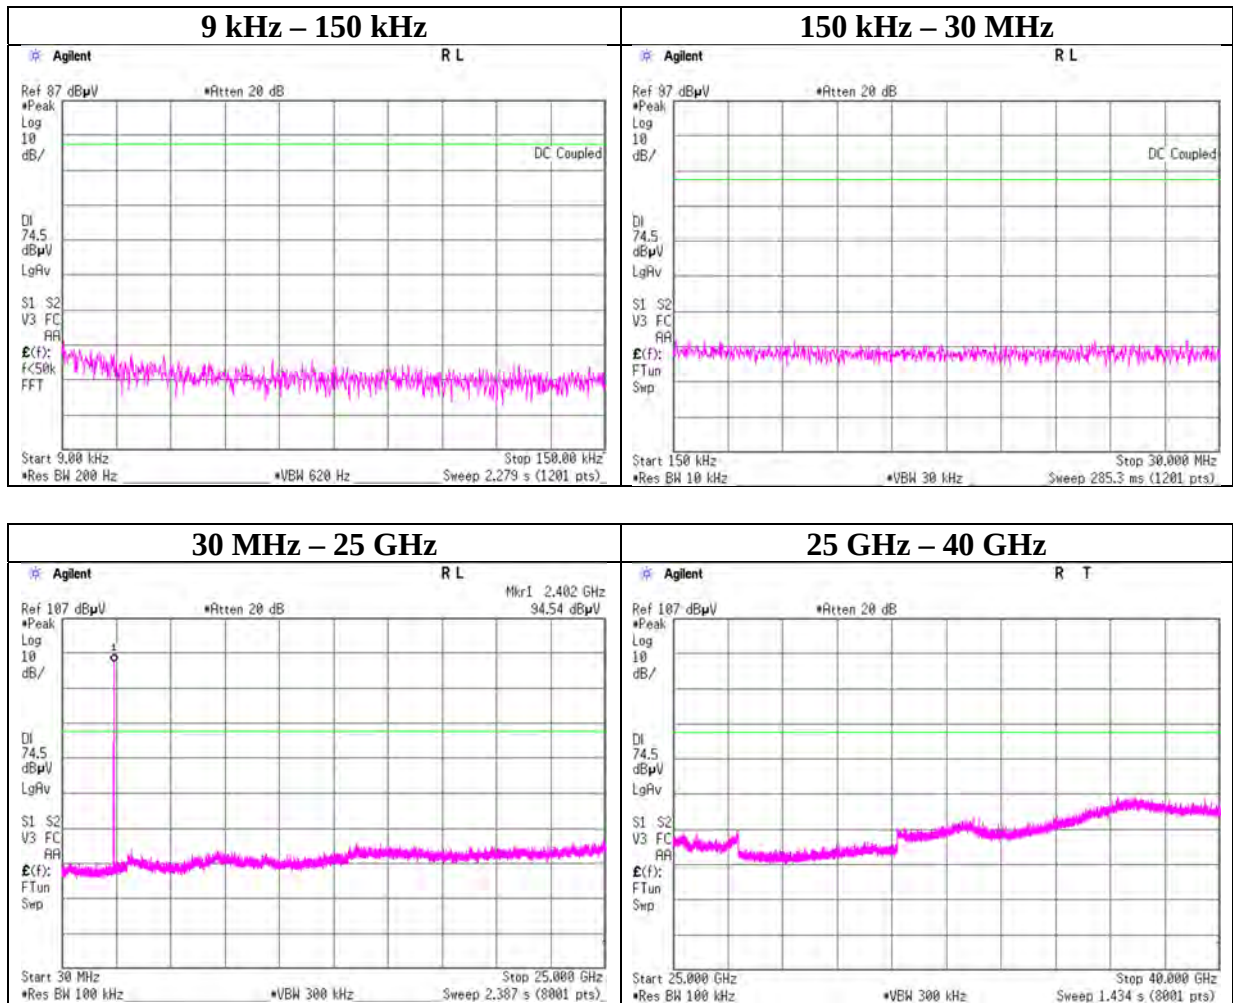

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Conducted Spurious Emission

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.1 Measurement Room
Date	October 6, 2021
Temperature / Humidity	25 deg. C / 48 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5

2441 MHz

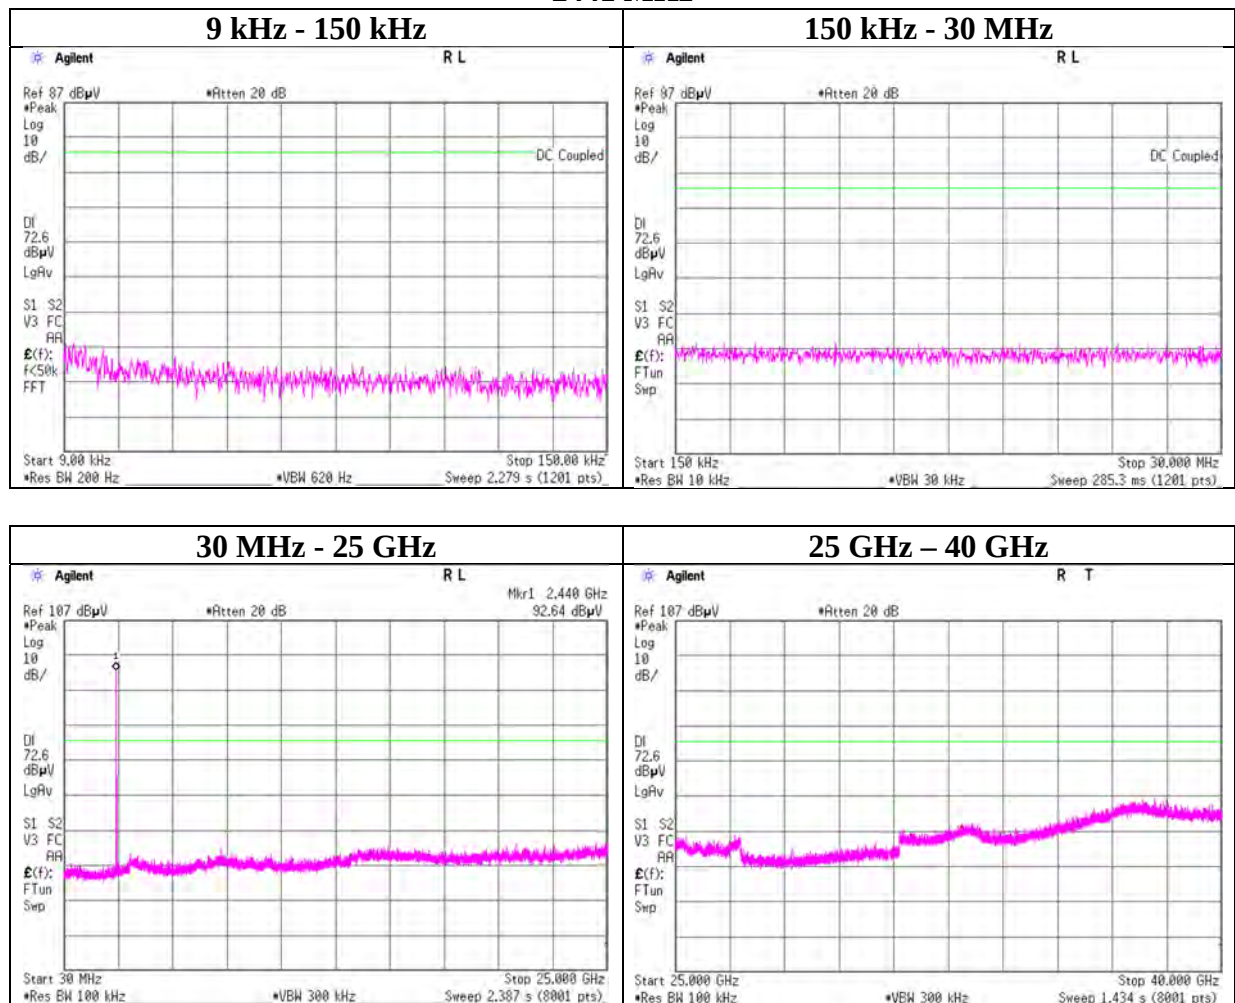

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Conducted Spurious Emission

Report No.	14027963S-B-R1
Test place	Shonan EMC Lab. No.1 Measurement Room
Date	October 6, 2021
Temperature / Humidity	25 deg. C / 48 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5

2480 MHz

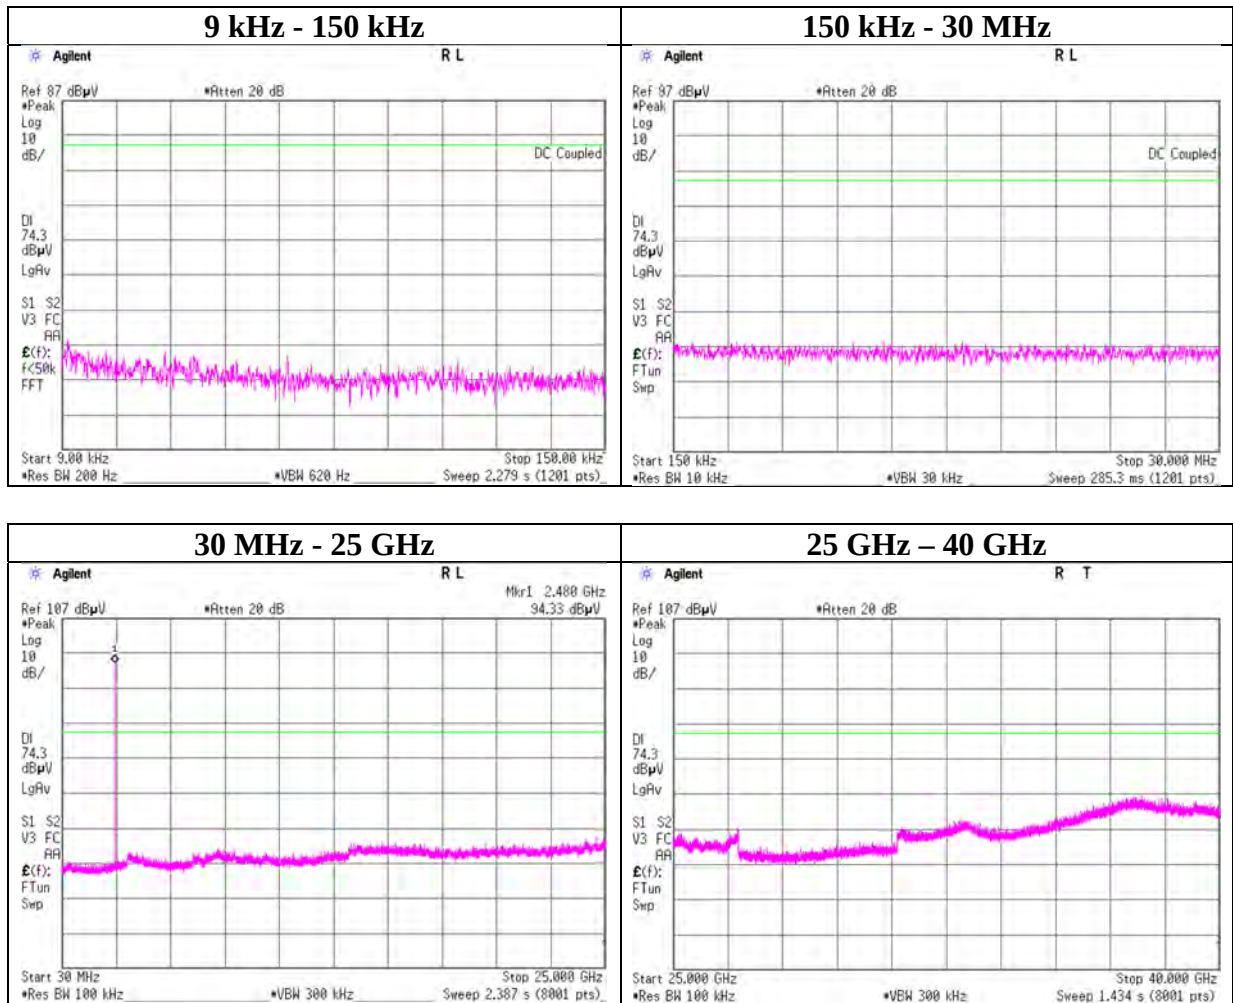

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


Conducted Emission Band Edge compliance

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx DH5

Hopping On

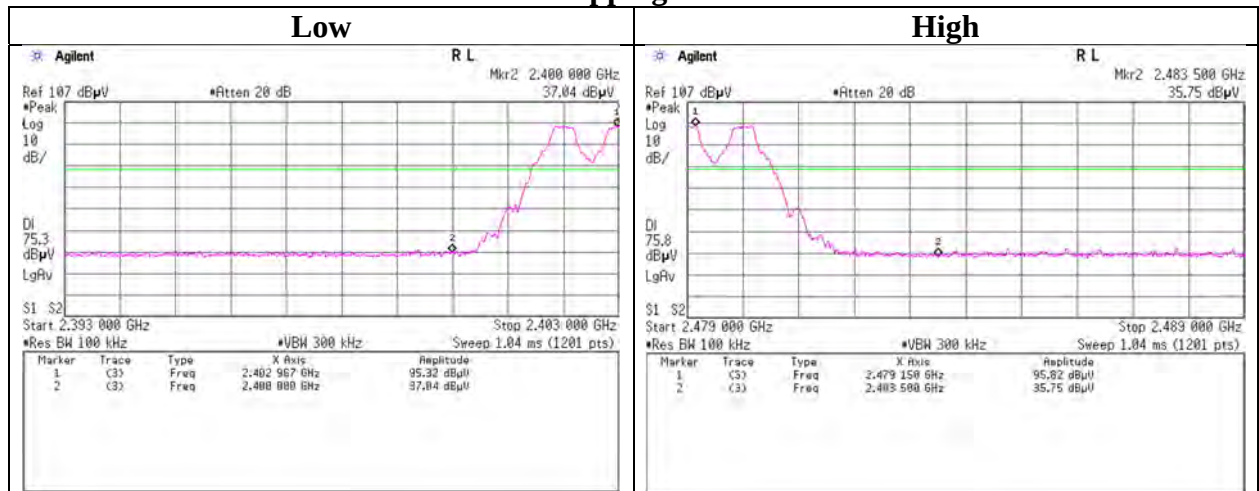


Hopping Off

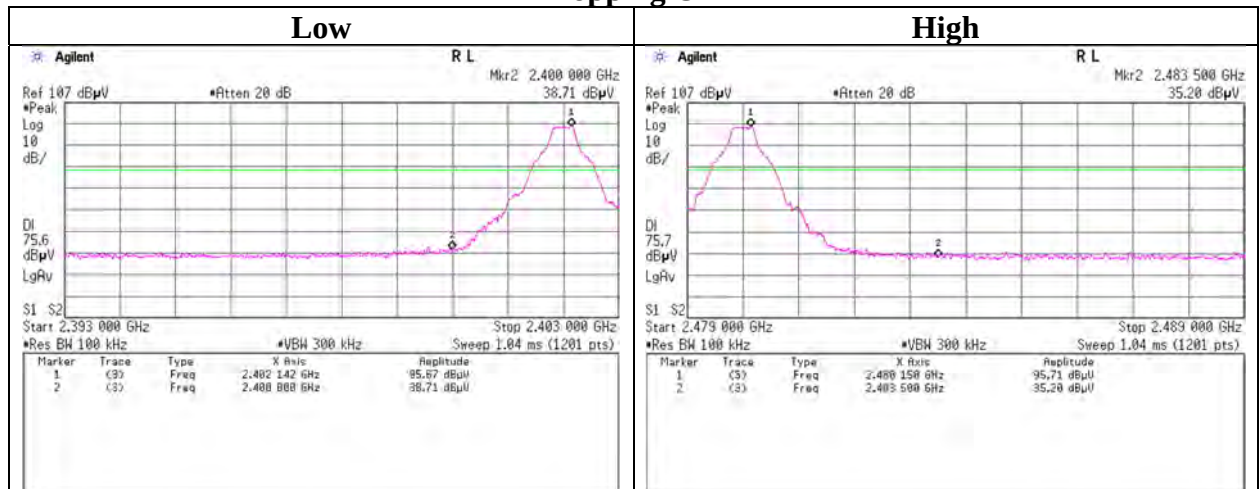


Conducted Emission Band Edge compliance

Report No. 14027963S-B-R1
Test place Shonan EMC Lab. No.1 Measurement Room
Date October 6, 2021
Temperature / Humidity 25 deg. C / 48 % RH
Engineer Takahiro Kawakami
Mode Tx 3DH5

Hopping On

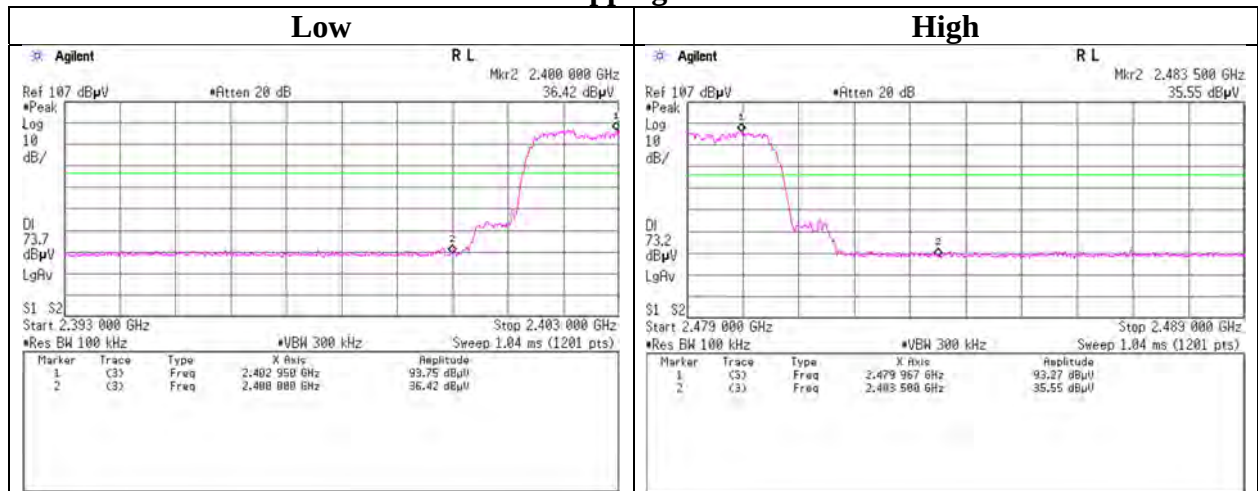

Hopping Off

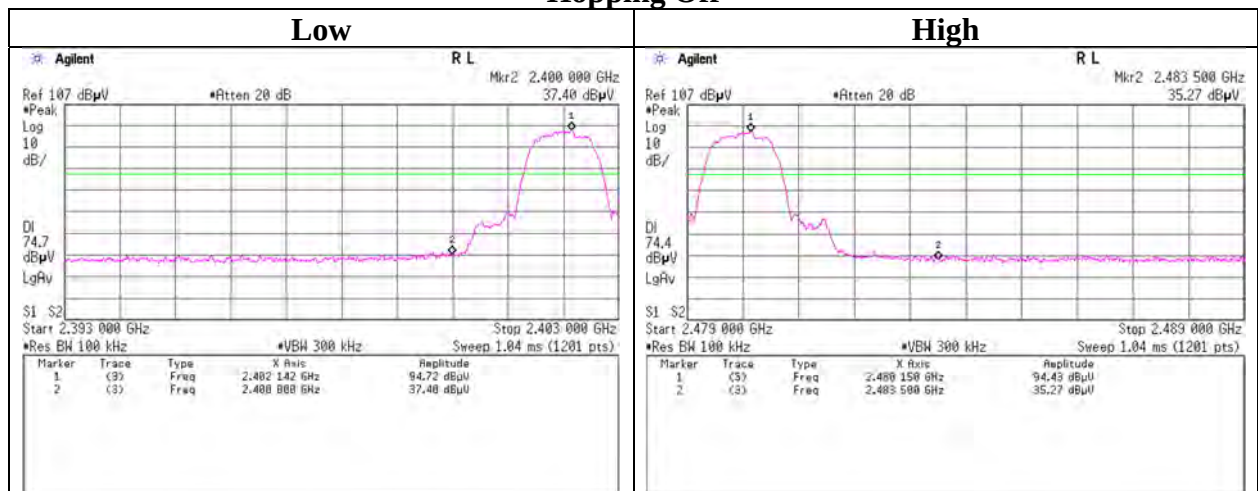

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	KTS-07	145111	Digital Tester	SANWA	PC500	7019232	2021/09/14	12
AT	KTS-08	145095	Digital Tester	SANWA	PC500	7019224	2021/04/26	12
AT	SAT10-22	204926	Attenuator	Weinschel Corp.	54A-10	-	2021/02/09	12
AT	SCC-G12	145040	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	2021/03/04	12
AT	SOS-19	175823	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2020/10/01	12
AT	SOS-28	191846	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
AT	SPM-07	146247	Power Meter	Keysight Technologies Inc	8990B	MY5100272	2021/05/25	12
AT	SPSS-04	146310	Power sensor	Keysight Technologies Inc	N1923A	MY5326009	2021/05/25	12
AT	SRENT-09	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2021/02/22	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2020/11/24	12
AT	SSA-02	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2021/04/13	12
AT	STM-G6	146207	Terminator	JFW	50T-128	-	2020/11/19	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: AT: Antenna Terminal Conducted test