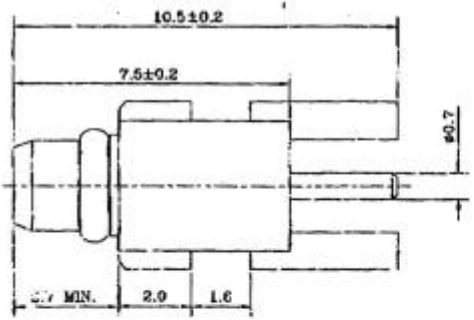





Recommended PCB Layout



Recommended PCB hole

ELECTRICAL PERFORMANCE :
1.Impedance : 50 ohms
2.Frequency Range : 0~6 GHZ
3.Working Voltage : 170 Vrms Maximum
4.Dielectric Withstanding Voltage : 500 Vrms Minimum
5.Insulator Resistance : 1000 Megohms Minimum

"C"-RING	BE.COPPER	GOLD	1
CONTACT	BE.COPPER	GOLD 30u"	1
INSULATOR	TEFLON	NONE	1
BODY	BRASS	GOLD	1
DESCRIPTION	MATERIALS	FINISHED	Q'TY

				REMARKS:	TITLE: RP-MMCX STRAIGHT PLUG OR EDGECARD MOUNT RECEPTACLE
SAMPLE RELEASE	S-0027	ANGELA	06/05'2000		DESIGNED: ANGELA 06/05'2000 / DRAWN: ANGELA 06/05'2000 / SHEET: 1 OF 1 / SCALE: 8:1
DESCRIPTION	ECN	DRAWN	DATE	TOLERANCES: DIM. XX=±0.3 XXX=±0.15 UNIT: mm	CHECKED: / APPROVAL: / DWG. NO.: 000802
REVISIONS					LATEST: SAMPLE / REV. 1 / P/No.: S-000802

INPUT OUTPUT