



Test Report Serial Number:

45461378-R1.2

Test Report Date:

11 May 2017

Project Number:

1365

SAR Test Report - New Certification

Applicant:



Garmin International Inc.
1200 East 151 St.
Olathe, KS, 66062
USA

FCC ID:

IPH-03125

Product Model Number / HVIN

A03125

Maximum Reported 1g SAR

FCC	Head	0.014	W/kg
	Body	0.014	
ISED	Head	0.014	
	Body	0.014	
General Pop. Limit:		1.60	

ISED Registration Number

1792A-03125

Product Name / PMN

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

IC RSS-102 Issue 5

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

Approved By:

Ben Hewson, President

Celltech Labs Inc.

21-364 Lougheed Rd.

Kelowna, BC, V1X 7R8

Canada



Test Lab Certificate: 2470.01

Industry
Canada

IC Registration 3874A-1



FCC Registration: 714830

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	3
2.0 NORMATIVE REFERENCES.....	3
3.0 CLIENT AND DEVICE INFORMATION.....	4
4.0 STATEMENT OF COMPLIANCE	5
5.0 SAR MEASUREMENT SYSTEM.....	6
6.0 RF CONDUCTED POWER MEASUREMENT.....	7
7.0 NUMBER OF TEST CHANNELS (N_C).....	7
8.0 ACCESSORIES EVALUATED.....	7
9.0 SAR MEASUREMENT SUMMARY	8
10.0 SCALING OF MAXIMUM MEASURE SAR.....	9
11.0 SAR EXPOSURE LIMITS	11
12.0 DETAILS OF SAR EVALUATION.....	12
13.0 MEASUREMENT UNCERTAINTIES.....	13
14.0 FLUID DIELECTRIC PARAMETERS	15
15.0 SYSTEM VERIFICATION TEST RESULTS.....	19
16.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	20
17.0 TEST EQUIPMENT LIST.....	22
18.0 FLUID COMPOSITION	23
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	24
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR	28
APPENDIX C - SETUP PHOTOS.....	37
APPENDIX D – DUT AND ACCESSORY PHOTOS	40
APPENDIX E – PROBE CALIBRATION.....	44
APPENDIX F – DIPOLE CALIBRATION	45
APPENDIX G - PHANTOM.....	46

1.0 DOCUMENT CONTROL

Issue Number	Description	By	Issue Date
1.0	Initial Release	Jasmeet Gill	16 March 2017
1.1	SAR Limit	Jasmeet Gill	16 March 2017
1.2	SAR Evaluation details, App. C	Trevor Whillock	11 May 2017

2.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
Health Canada Safety Code 6 (2015)	Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3kHz to 300GHz
Industry Canada Spectrum Management & Telecommunications Policy RSS-102 Issue 5:	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
IEEE International Committee on Electromagnetic Safety IEEE 1528-2013:	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC International Standard IEC 62209-2 2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 2
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Test Guidane for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

3.0 CLIENT AND DEVICE INFORMATION

Client Information					
Applicant Name	Garmin International Inc.				
Applicant Address	1200 East 151 St				
	Olathe, KS, 66062				
	USA				
DUT Information					
Device Identifier(s):	<table border="1"> <tr> <td>FCC ID:</td> <td>IPH-03125</td> </tr> <tr> <td>ISED:</td> <td>1792A-03125</td> </tr> </table>	FCC ID:	IPH-03125	ISED:	1792A-03125
FCC ID:	IPH-03125				
ISED:	1792A-03125				
Type of Equipment:	Portable Wireless WiFi Transceiver				
Device Model(s) / HVIN:	012-03125-00				
Device Marketing Name / PMN:	A03125				
Test Sample Serial No.:	T/A Sample - Identical Prototype				
Transmit Frequency Range:	BLE: 2402-2480 MHz				
	WiFi: 2412-2462 MHz				
Number of Channels:	n/a				
Manuf. Max. Rated Output Power:	BLE: 4dBm, WiFi: 20dBm				
Modulation:	DSSS, OFDM, MCS0-7, CW				
Duty Cycle:	100%				
DUT Power Source:	5V USB, Internal Li-ion battery				
Deviation(s) from standard/procedure:	None				
Modification of DUT:	None				

4.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that the:

Applicant: Garmin International Inc.	Model / HVIN: A03125
--	--------------------------------

complies with the SAR (Specific Absorption Rate) RF exposure requirements and limits specified in the following:

Standard(s): FCC 47 CFR §2.1093 Health Canada's Safety Code 6	Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, FCC KDB 248227 Industry Canada RSS-102 Issue 5 IEEE Standard 1528-2013, IEC 62209-2
---	---

Use Group: ☐ Occupational / Controlled ☒ General Population / Uncontrolled

Reason for Issue: New Certification

A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used during this evaluation, equipment used and the various provisions of the rules are included within this test report.

5.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



DASY 4 SAR System with SAM Phantom



DASY 4 Measurement Controller

6.0 RF CONDUCTED POWER MEASUREMENT

Table 6.0

Conducted Power Measurements						
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dBm)	SAR Test Channel (Y/N)
1	2412.0000	19.08	20.00	0.10	-0.92	Y
6	2437.0000	18.89	20.00	0.10	-1.11	Y
11	2462.0000	18.66	20.00	0.10	-1.34	Y

7.0 NUMBER OF TEST CHANNELS (N_c)

As per FCC KDB 248277, the required 802.11 test channels are Ch1, Ch6 and Ch 11

NOTE: These transmitters are not capable of simultaneous transmission. The 802.15 is rated at 4dBm and is below the threshold for standalone SAR evaluation.

8.0 ACCESSORIES EVALUATED

Table 8.0

Manufacturer's Accessory List						
Test Report ID Number	Manufacturer's Part Number	Description	UDC Group ⁽¹⁾	Type II Group ⁽²⁾	SAR ⁽³⁾ Evaluated	SAR ⁽⁴⁾ Tested
Audio Accessory						
P1	362-00086-01	AC Adapter, 5.0V, 2.0A, USB-A Receptacle	n/a	n/a	N	N
P2	011-04317-10	Action Cradle Adaptor	n/a	n/a	N	N
P3	320-00559-01	USB Cable, Micro B to A, 1m	n/a	n/a	N	N
B1	013-00554-00	Chest Strap	n/a	n/a	Y	Y
B2	011-03125-10	Wrist Strap	n/a	n/a	Y	Y
H1	011-03621-06	Vented Helmet Mount	n/a	n/a	Y	Y

9.0 SAR MEASUREMENT SUMMARY

Table 9.0

2450 Band Wifi- BODY SAR Evaluation Results (FCC/IC)

Date	Model #	Plot #	Freq (MHz)	Accessories		DUT Spacing		Measured SAR 1g (W/kg)	SAR Drift (dB)
						DUT	ANT	PTT Duty Cycle	
				Body	Audio	(mm)	(mm)	100%	
01 Feb 2017	A03125	B1	2412	B2	n/a	17	17	0.011	1.140
01 Feb 2017	A03125	B2	2437	B2	n/a	17	17	0.005	4.100
01 Feb 2017	A03125	B3	2462	B2	n/a	17	17	0.008	0.550
01 Feb 2017	A03125	B4	2412	B1	n/a	17	17	0.004	1.860
SAR LIMIT(S)				Body		Spatial Peak		RF Exposure Category	
FCC 47 CFR 2.1093		Health Canada Safety Code 6		1.6 W/kg		1g average		General Population	

Table 9.1

2450 Band Wifi- Head SAR Evaluation Results (FCC/IC)

Date	Model #	Plot #	Freq (MHz)	Accessories		DUT Spacing		Measured SAR 1g (W/kg)	SAR Drift (dB)
						DUT	ANT	PTT Duty Cycle	
				Body	Audio	(mm)	(mm)	100%	
02 Feb 2017	A03125	H1	2412	H1	n/a	10	10	0.008	1.640
02 Feb 2017	A03125	H2	2437	H1	n/a	10	10	0.011	0.747
02 Feb 2017	A03125	H3	2462	H1	n/a	10	10	0.008	5.860
SAR LIMIT(S)				Body		Spatial Peak		RF Exposure Category	
FCC 47 CFR 2.1093		Health Canada Safety Code 6		1.6 W/kg		1g average		General Population	

10.0 SCALING OF MAXIMUM MEASURE SAR

Table 10.0

Scaling of Maximum Measured SAR ⁽¹⁾								
Plot ID	Configuration	Freq	Measured Fluid Deviation		Measured Conducted Power	Measured Drift	Measured SAR (10g)	
		(MHz)	Permittivity	Conductivity	(dBm)	(dB)	(W/kg)	
H2	Head	2437	1.59%	8.79%	18.9	0.747	0.011	
B1	Body	2412	-3.61%	7.64%	19.1	1.140	0.011	
Step 1								
Fluid Sensitivity Adjustment								
Plot ID	Scale Factor			X	Measured SAR		=	Step 1 Adjusted SAR (10g)
	(%)				(W/kg)			(W/kg)
H2	3.890%			X	0.011		=	0.011
B1	4.540%			X	0.011		=	0.011
Step 2								
Manufacturer's Tune-Up Tolerance								
Plot ID	Measured Conducted Power		Rated Power		Delta	Step 1 Adjusted SAR	=	Step 2 Adjusted SAR (10g)
	(dBm)		(dBm)		(dB)			(W/kg)
H2	18.9		20.0		-1.11	0.011	=	0.014
B1	19.1		20.0		-0.92	0.011	=	0.014
Step 3								
Simultaneous Transmission - Bluetooth and/or WiFi								
Plot ID	Rated Output Power (Pmax)	Freq	Separation Distance		Estimated SAR	Step 2 Adjusted SAR	=	Step 3 Adjusted SAR (10g)
	(mW)	(MHz)	(mm)		(W/kg)			(W/kg)
H2	4	2480	5		0.000	0.014	=	0.014
B1	4	2480	5		0.000	0.014	=	0.014
Step 4								
Drift Adjustment								
Plot ID	Measured Drift			+	Step 3 Adjusted SAR		=	Step 4 Adjusted SAR (10g)
	(dB)				(W/kg)			(W/kg)
H2	0.747			+	0.014		=	0.014
B1	1.140			+	0.014		=	0.014
Step 5								
Reported SAR								
Plot ID	FCC				IC			
	From Steps 1 through 3				From Steps 1 through 4			
	1g SAR (W/kg)				1g SAR (W/kg)			
H2	0.014				0.014			
B1	0.014				0.014			

NOTES to Table 10.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.

Step 1

Per IEC-62209-1 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.

Step 4

Per IEC 62209-1. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

Step 5

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

Table 10.1

Fluid Sensitivity Calculation (1g)	
Delta SAR = Ce * Delta Er + C(sigma)*Delta Sigma	
Frequency (GHz)	Plot ID
2.37	H2
Ce	-0.2250
Cσ	0.4831
Δ E	1.59%
Δσ	7.79%
ΔSAR	3.89%
Scale Factor Is Positive. Scaling Required	

Table 10.2

Fluid Sensitivity Calculation (1g)	
Delta SAR = Ce * Delta Er + C(sigma)*Delta Sigma	
Frequency (GHz)	Plot ID
2.462	B1
Ce	-0.2251
Cσ	0.4885
Δ E	-3.61%
Δσ	7.64%
ΔSAR	4.54%
Scale Factor Is Positive. Scaling Required	

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Jasmeet Gill
Test Lab Engineer
Celltech Labs Inc.

16 March 2017
Date

11.0 SAR EXPOSURE LIMITS

Table 11.0

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure⁽⁴⁾	Occupational / Controlled Exposure⁽⁵⁾
Spatial Average⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

12.0 DETAILS OF SAR EVALUATION

EVALUATION DETAILS

1	The DUT was evaluated for SAR in accordance with the procedures described in IEEE 1528, FCC KDB 447498, 865664, 248227 and RSS-102. As the antenna is at close proximity to user then the outer surface of the DUT is treated as the radiating surface. The test separation distance was determined by the smallest distance between the outer surface of the device and the user. The DUT was tested, as intended for use, in each of three OEM approved accessories; Chest Strap mount (App.C- B1), Wrist Strap mount (App.C- B2) , and Vented Helmet mount (App.C- H1), with the DUT oriented at its closest proximity to the phantom.
2	The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer. The device was capable of transmitting in Continuous Wave (CW) and was testing in an un-modulated continuous transmit mode at 100% duty cycle.
3	Each SAR Evaluations were performed with a fully charged battery.
4	The fluid temperature remained within $\pm 2^{\circ}\text{C}$ from the time of the fluid dielectric parameter measurement to the completion of the SAR evaluation.
5	The fluid temperature remained within $\pm 0.5^{\circ}\text{C}$ throughout the test day.

SCAN PROCEDURE

Maximum distance from the closest measurement point to phantom surface.	$4 \pm 1\text{mm}$
Maximum probe angle normal to phantom surface.	$5^{\circ} \pm 1^{\circ}$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5mm
Zoom Scan Spatial Resolution ΔZ	5mm
Zoom Scan Volume X, Y, Z	30mm x 30mm x 30mm
Phantom	ELI
Fluid Depth	150mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1 gram and 10 gram peak spatial-average SAR	

13.0 MEASUREMENT UNCERTAINTIES

Table 13.0

UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEEE 1528-2013 Table 9)

Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration*	E.2.1	6.6	Normal	1	1	1	6.60	6.60	∞
Axial Isotropy*	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy*	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect*	E.2.3	8.3	Rectangular	1.732050808	1	1	4.8	4.8	∞
Linearity*	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits*	E.2.4	1.0	Rectangular	1.732050808	1	1	0.6	0.6	∞
Modulation Response	E.2.5	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
Readout Electronics*	E.2.6	1.0	Normal	1	1	1	1.0	1.0	∞
Response Time*	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time*	E.2.8	1.4	Rectangular	1.732050808	1	1	0.8	0.8	∞
RF Ambient Conditions - Noise	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
RF Ambient Conditions - Reflection	E.6.1	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance*	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell*	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation*	E.5	3.9	Rectangular	1.732050808	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	0.3	Normal	1	1	1	0.3	0.3	5
Device Holder Uncertainty*	E.4.1	3.6	Normal	1	1	1	3.6	3.6	∞
SAR Drift Measurement**	E.2.9	0.0	Rectangular	1.732050808	1	1	0.0	0.0	∞
SAR Scaling***	E.6.5	2.0	Rectangular	1.732050808	1	1	1.2	1.2	∞
Phantom and Tissue Parameters									
Phantom Uncertainty*	E.3.1	4.0	Rectangular	1.732050808	1	1	2.3	2.3	∞
SAR Correction Uncertainty	E.3.2	1.2	Normal	1	1	0.84	1.2	1.0	∞
Liquid Conductivity (measurement)	E.3.3	6.8	Normal	1	0.78	0.71	5.3	4.8	10
Liquid Permittivity (measurement)	E.3.3	5.3	Normal	1	0.23	0.26	1.2	1.4	10
Liquid Conductivity (Temperature)	E.3.2	0.1	Rectangular	1.732050808	0.78	0.71	0.1	0.0	∞
Liquid Permittivity Temperature)	E.3.2	0.0	Rectangular	1.732050808	0.23	0.26	0.0	0.0	∞
Effective Degrees of Freedom⁽¹⁾								$V_{eff} =$	873.2
Combined Standard Uncertainty			RSS				12.59	12.40	
Expanded Uncertainty (95% Confidence Interval)			k=2				25.18	24.80	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

(1) The Effective Degrees of Freedom is > 30 therefore a coverage factor of $k=2$ represents an approximate confidence level of 95%.

* Provided by SPEAG

Table 13.1	
Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1}^m \frac{c_i^4 u_i^4}{v_i}}$

14.0 FLUID DIELECTRIC PARAMETERS

Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Tue 31/Jan/2017 11:26:45
 Freq Frequency(GHz)
 FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eBFCC Limits for Body Epsilon
 FCC_sBFCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
2.3500	52.83	1.85	51.13	1.94
2.3600	52.82	1.86	51.20	1.94
2.3700	52.81	1.87	51.02	1.96
2.3800	52.79	1.88	50.97	2.01
2.3900	52.78	1.89	50.97	2.02
2.4000	52.77	1.90	51.11	2.05
2.4100	52.75	1.91	50.86	2.05
2.4200	52.74	1.92	50.79	2.09
2.4300	52.73	1.93	50.82	2.08
2.4400	52.71	1.94	50.74	2.12
2.4500	52.70	1.95	50.83	2.11
2.4600	52.69	1.96	50.78	2.14
2.4700	52.67	1.98	50.73	2.15
2.4800	52.66	1.99	50.84	2.18
2.4900	52.65	2.01	50.98	2.18
2.5000	52.64	2.02	50.64	2.19
2.5100	52.62	2.04	50.79	2.21
2.5200	52.61	2.05	50.52	2.20
2.5300	52.60	2.06	50.70	2.28
2.5400	52.59	2.08	50.43	2.25
2.5500	52.57	2.09	50.59	2.29

Table 14.0

FLUID DIELECTRIC PARAMETERS							
Date:	31 Jan 2017	Fluid Temp:	20.4	Frequency:	2450MHz	Tissue:	Body
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350.0000		51.1300	1.9400	52.8300	1.85	-3.22%	4.86%
2360.0000		51.2000	1.9400	52.8200	1.86	-3.07%	4.30%
2370.0000		51.0200	1.9600	52.8100	1.87	-3.39%	4.81%
2380.0000		50.9700	2.0100	52.7900	1.88	-3.45%	6.91%
2390.0000		50.9700	2.0200	52.7800	1.89	-3.43%	6.88%
2400.0000		51.1100	2.0500	52.7700	1.90	-3.15%	7.89%
2410.0000		50.8600	2.0500	52.7500	1.91	-3.58%	7.33%
2412.0000	*	50.8460	2.0580	52.7480	1.91	-3.61%	7.64%
2420.0000		50.7900	2.0900	52.7400	1.92	-3.70%	8.85%
2430.0000		50.8200	2.0800	52.7300	1.93	-3.62%	7.77%
2437.0000	*	50.7640	2.1080	52.7160	1.94	-3.70%	8.83%
2440.0000		50.7400	2.1200	52.7100	1.94	-3.74%	9.28%
2450.0000		50.8300	2.1100	52.7000	1.95	-3.55%	8.21%
2460.0000		50.7800	2.1400	52.6900	1.96	-3.62%	9.18%
2462.0000	*	50.7700	2.1420	52.6860	1.96	-3.64%	9.06%
2470.0000		50.7300	2.1500	52.6700	1.98	-3.68%	8.59%
2472.0000	*	50.7520	2.1560	52.6680	1.98	-3.64%	8.78%
2480.0000		50.8400	2.1800	52.6600	1.99	-3.46%	9.55%
2490.0000		50.9800	2.1800	52.6500	2.01	-3.17%	8.46%
2500.0000		50.6400	2.1900	52.6400	2.02	-3.80%	8.42%
2510.0000		50.7900	2.2100	52.6200	2.04	-3.48%	8.33%
2520.0000		50.5200	2.2000	52.6100	2.05	-3.97%	7.32%
2530.0000		50.7000	2.2800	52.6000	2.06	-3.61%	10.68%
2540.0000		50.4300	2.2500	52.5900	2.08	-4.11%	8.17%
2550.0000		50.5900	2.2900	52.5700	2.09	-3.77%	9.57%

*Channel Frequency Tested

Aprel Laboratory
 Test Result for UIM Dielectric Parameter
 Thu 02/Feb/2017 13:01:17
 Freq Frequency(GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
2.3500	39.38	1.71	40.35
2.3600	39.36	1.72	40.37
2.3700	39.34	1.73	40.30
2.3800	39.32	1.74	40.23
2.3900	39.31	1.75	40.21
2.4000	39.29	1.76	40.04
2.4100	39.27	1.76	40.07
2.4200	39.25	1.77	40.01
2.4300	39.24	1.78	39.76
2.4400	39.22	1.79	39.89
2.4500	39.20	1.80	40.00
2.4600	39.19	1.81	40.01
2.4700	39.17	1.82	39.82
2.4800	39.16	1.83	39.92
2.4900	39.15	1.84	39.79
2.5000	39.14	1.85	39.85
2.5100	39.12	1.87	39.63
2.5200	39.11	1.88	39.71
2.5300	39.10	1.89	39.63
2.5400	39.09	1.90	39.62
2.5500	39.07	1.91	39.54

Table 14.1

FLUID DIELECTRIC PARAMETERS							
Date:	2 Feb 2017	Fluid Temp:	23.7	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2350.0000		40.3500	1.8300	39.3800	1.71	2.46%	7.02%
2360.0000		40.3700	1.8400	39.3600	1.72	2.57%	6.98%
2370.0000		40.3000	1.8500	39.3400	1.73	2.44%	6.94%
2380.0000		40.2300	1.8800	39.3200	1.74	2.31%	8.05%
2390.0000		40.2100	1.8800	39.3100	1.75	2.29%	7.43%
2400.0000		40.0400	1.8900	39.2900	1.76	1.91%	7.39%
2410.0000		40.0700	1.8900	39.2700	1.76	2.04%	7.39%
2412.0000	*	40.0580	1.8980	39.2660	1.76	2.02%	7.72%
2420.0000		40.0100	1.9300	39.2500	1.77	1.94%	9.04%
2430.0000		39.7600	1.9300	39.2400	1.78	1.33%	8.43%
2437.0000	*	39.8510	1.9440	39.2260	1.79	1.59%	8.79%
2440.0000		39.8900	1.9500	39.2200	1.79	1.71%	8.94%
2450.0000		40.0000	1.9600	39.2000	1.80	2.04%	8.89%
2460.0000		40.0100	1.9700	39.1900	1.81	2.09%	8.84%
2462.0000	*	39.9720	1.9680	39.1860	1.81	2.01%	8.61%
2470.0000		39.8200	1.9600	39.1700	1.82	1.66%	7.69%
2472.0000	*	39.8400	1.9640	39.1680	1.82	1.72%	7.79%
2480.0000		39.9200	1.9800	39.1600	1.83	1.94%	8.20%
2490.0000		39.7900	1.9900	39.1500	1.84	1.63%	8.15%
2500.0000		39.8500	1.9900	39.1400	1.85	1.81%	7.57%
2510.0000		39.6300	2.0100	39.1200	1.87	1.30%	7.49%
2520.0000		39.7100	2.0300	39.1100	1.88	1.53%	7.98%
2530.0000		39.6300	2.0600	39.1000	1.89	1.36%	8.99%
2540.0000		39.6200	2.0800	39.0900	1.90	1.36%	9.47%
2550.0000		39.5400	2.0900	39.0700	1.91	1.20%	9.42%

*Channel Frequency Tested

15.0 SYSTEM VERIFICATION TEST RESULTS

Table 15.0

System Verification Test Results											
			Frequency (MHz)	Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Dipole Spacing (mm)	Validation	
										Source	
Date										P/N	S/N
31-Jan-17			2450	Body	22	20.4	11%	250	10	D2450V2	825
SAR							Fluid Parameters				
1 gram			10 gram			Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation	Measured	Target	Deviation	Measured	Target	Deviation
13.4	13	3.18%	6	6.05	-0.83%	50.83	52.7	-3.55%	2.11	1.95	8.21%
Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 865664 and IEC 62209-1. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer. The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value											

Table 15.1

System Verification Test Results												
			Frequency (MHz)	Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Dipole Spacing (mm)	Validation		
										Source		
Date										P/N	S/N	
02-Feb-17			2450	Head	23.7	24	10%	250	10	D2450V2		825
SAR						Fluid Parameters						
1 gram			10 gram			Permittivity			Conductivity			
Measured	Target	Deviation	Measured	Target	Deviation	Measured	Target	Deviation	Measured	Target	Deviation	
13	13.1	-0.76%	5.85	6.06	-3.47%	40	39.2	2.04%	1.96	1.8	8.89%	
Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEEE 1528-2013, FCC KDB 865664 and IEC 62209-1. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer. The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value												

16.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 16.0

Measurement System Specification

Specifications

Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional

Data Converter

Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 80
	Postprocessing Software: SEMCAD, V1.8 Build 186
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock

DASY4 Measurement Server

Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model	EX3DV4
Serial No.	3600
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)

Phantom

Type	ELI
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter


Table 16.1

Measurement System Specification (Continued)

Probe Specification

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	EX3DV4 E-Field Probe

Phantom Specification

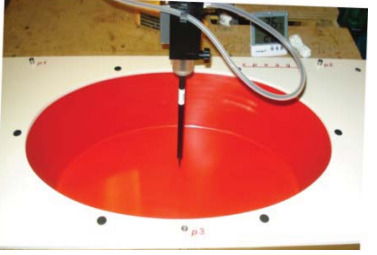The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.	
	ELI Phantom

Device Positioner Specification

The DASY4 device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.	
	Device Positioner

17.0 TEST EQUIPMENT LIST

Table 17.0

Test Equipment List

DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
Schmid & Partner DASY4 System	-	-	-	-
-DASY4 Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	20 April 2016	Annual
-EX3DV6 E-Field Probe	00213	3600	27 April 2016	Annual
-D2450V2 Validation Dipole	00219	825	22 April 2015	Triennial
ELI Phantom	00247	-	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00110	1835801	29 Feb 2016	Triennial
Gigatronics 80701A Power Sensor	00248	1833687	29 Feb 2016	Triennial
HP 8753ET Network Analyzer	00134	US39170292	22 Oct 2014	Triennial
Rohde & Schwarz SMR20 Signal Generator	00006	100104	8 May 2014	Triennial
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR

CNR = Calibration Not Required

18.0 FLUID COMPOSITION

Table 18.0			2450MHz Body	
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
69.98	30.0	0.02	0.0	0.0

(1) Non-Iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 18.1			2450MHz Head	
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Glycol	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
52.00	48.0	0.00	0.0	0.0

(1) Non-Iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

APPENDIX A – SYSTEM VERIFICATION PLOTS

Date/Time: 31/01/2017 11:16:38 AM

Test Laboratory: Celltech Labs

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 825; Calibrated: 25/04/2012
Program Name: 2450MHz Body SPC

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.11$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 5mm (Mechanical Surface Detection) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

2450MHz Body Dipole d=10mm P=250mW TS=[11.7][13.0][14.3]/Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 12.7 mW/g


2450MHz Body Dipole d=10mm P=250mW TS=[11.7][13.0][14.3]/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 92.2 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6 mW/g

Maximum value of SAR (measured) = 17.6 mW/g

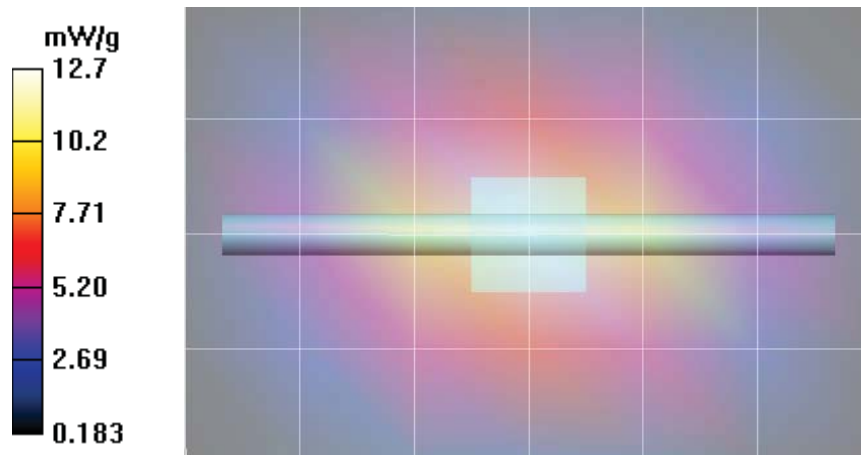

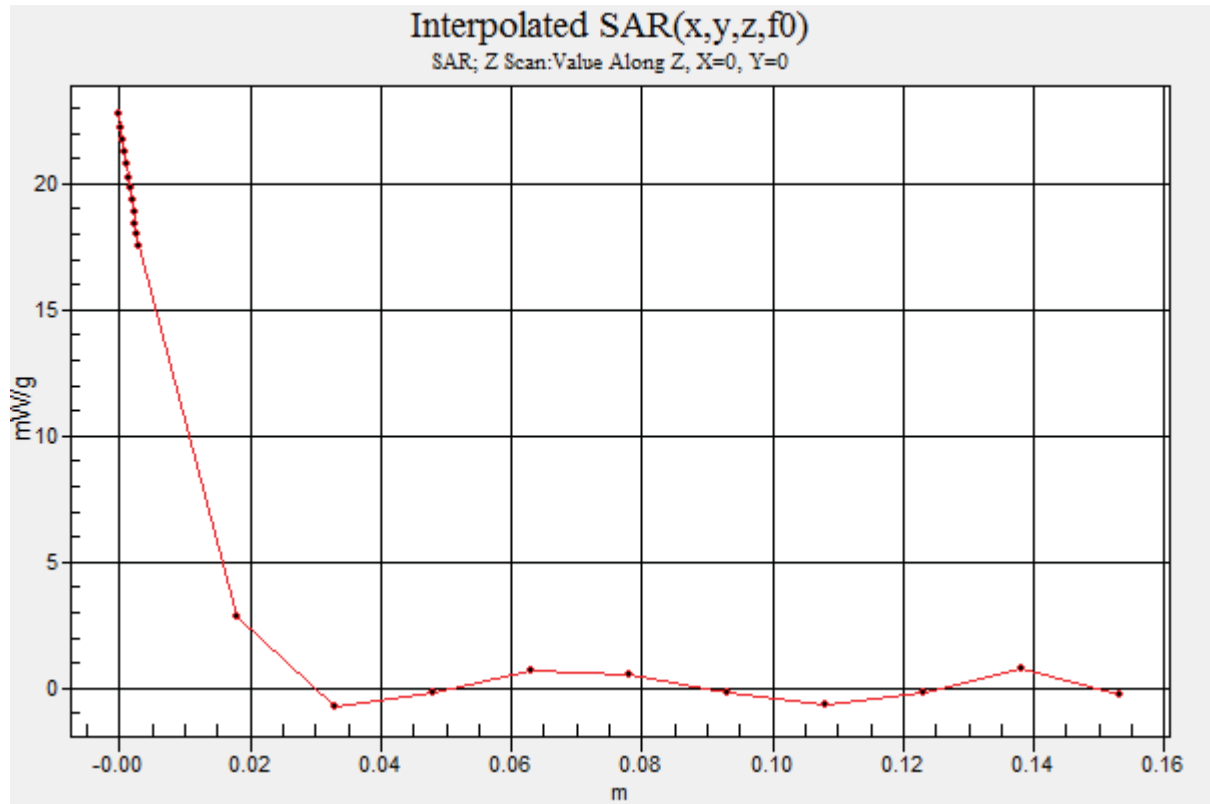

Date/Time: 02/02/2017 12:45:51 PM

Test Laboratory: Celltech Labs

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 825; Calibrated: 25/04/2012
Program Name: 2450MHz Head SPC

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.37, 6.37, 6.37); Calibrated: 27/04/2016
- Sensor-Surface: 5mm (Mechanical Surface Detection) Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

2450 MHz Head Dipole d=10mm P=250mW TS=[11.79][13.1][14.41]/Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 12.3 mW/g


2450 MHz Head Dipole d=10mm P=250mW TS=[11.79][13.1][14.41]/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 106.2 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 5.85 mW/g

Maximum value of SAR (measured) = 17.0 mW/g

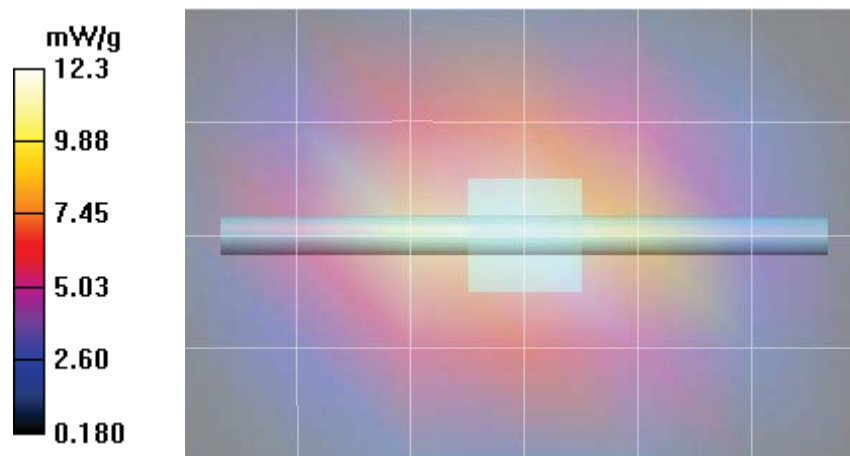

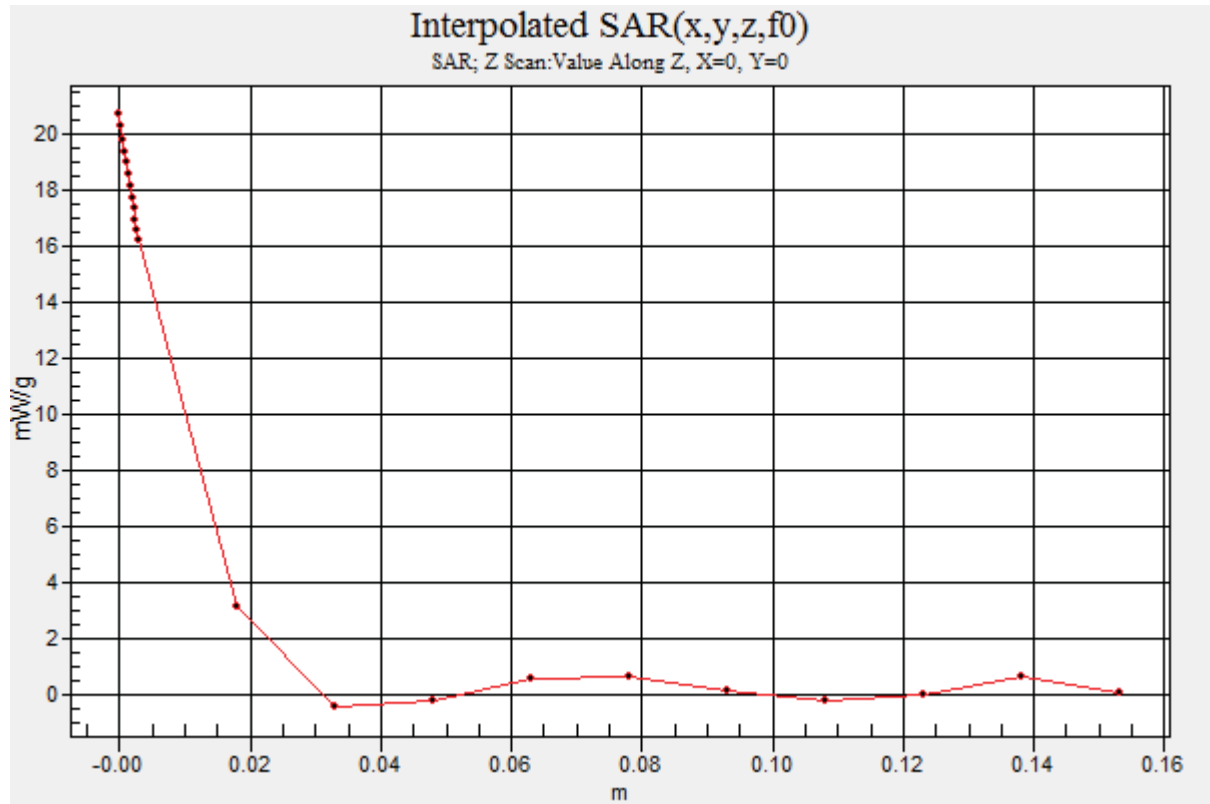

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B1

Date/Time: 01/02/2017 12:32:59 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450B

Communication System: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 2.06$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B1 , 2412 MHz, Wrist/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.015 mW/g

B1 , 2412 MHz, Wrist/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 2.13 V/m; Power Drift = 1.14 dB


Peak SAR (extrapolated) = 0.041 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00535 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.013 mW/g

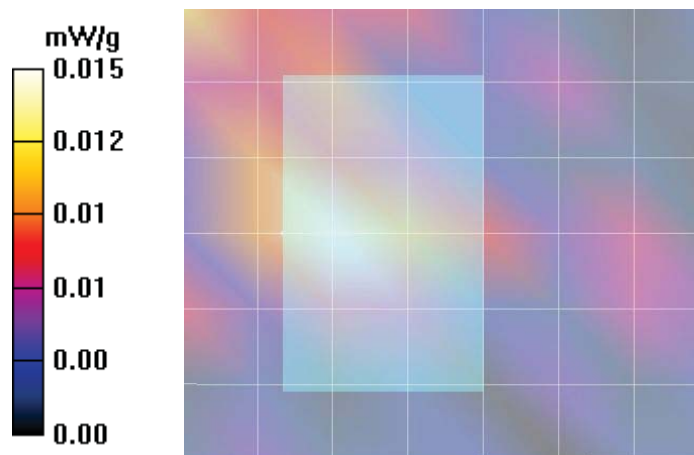

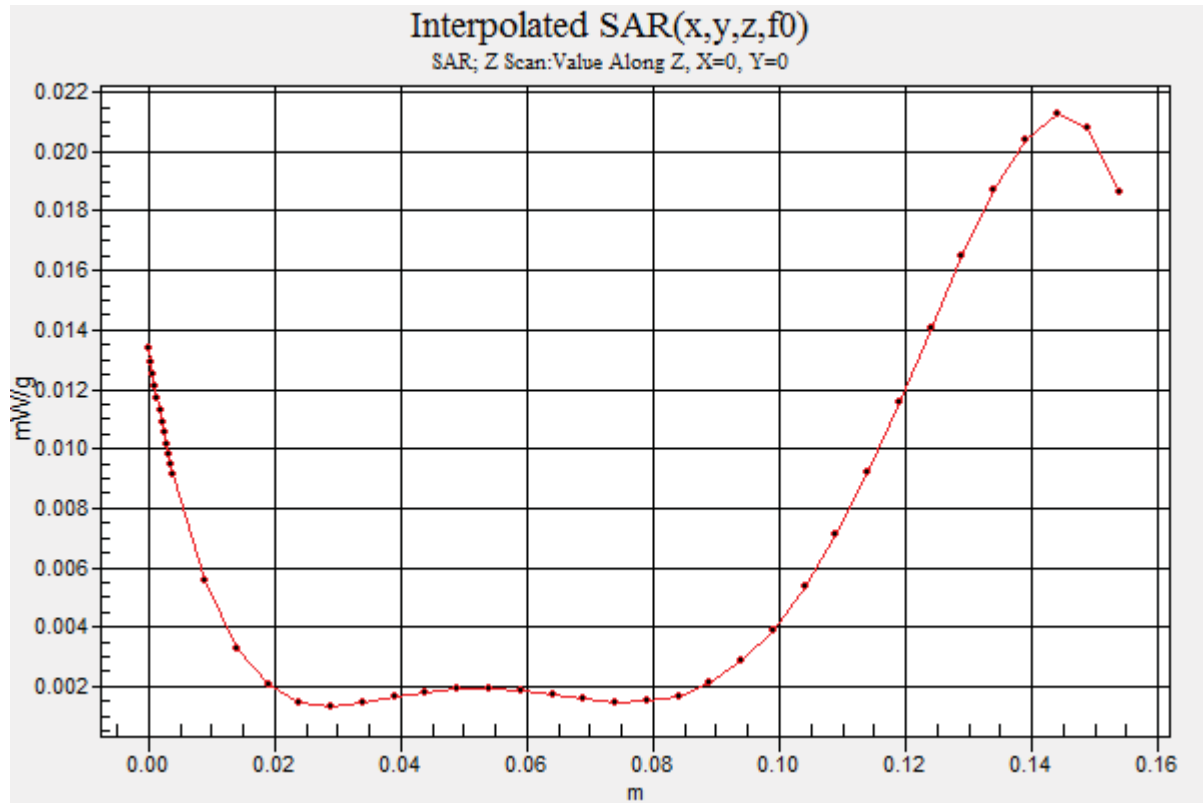

Plot B2

Date/Time: 01/02/2017 1:42:17 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450B

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.11$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B2 , 2437 MHz, Wrist/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.016 mW/g

B2 , 2437 MHz, Wrist/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 1.39 V/m; Power Drift = 4.10 dB

Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00513 mW/g; SAR(10 g) = 0.00203 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.013 mW/g

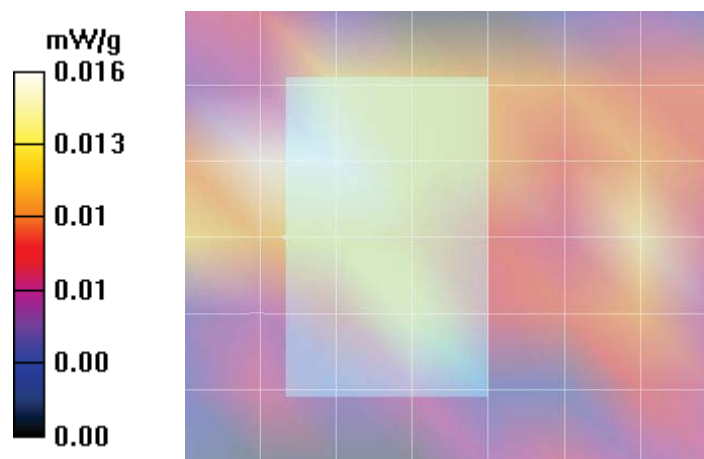

Plot B3

Date/Time: 01/02/2017 3:00:23 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450B

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.14$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B3 , 2462 MHz, Wrist/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.015 mW/g


B3 , 2462 MHz, Wrist/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.88 V/m; Power Drift = 0.550 dB

Peak SAR (extrapolated) = 0.050 W/kg

SAR(1 g) = 0.00829 mW/g; SAR(10 g) = 0.00251 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

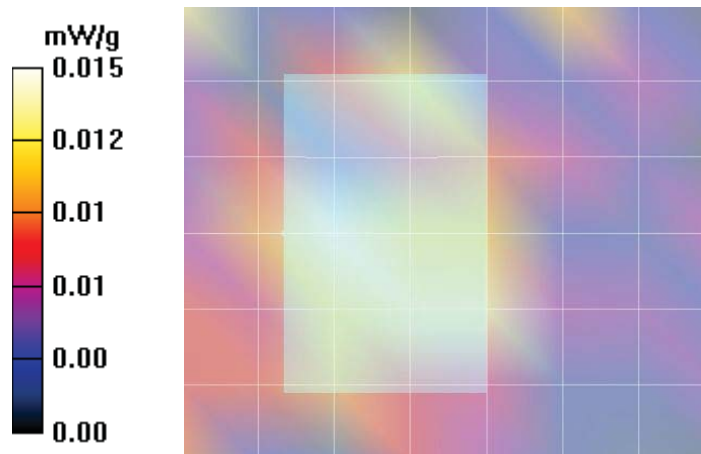

Plot B4

Date/Time: 01/02/2017 3:49:42 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450B

Communication System: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 2.06$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.55, 6.55, 6.55); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

B4 , w/c 2412 MHz, Chest/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.015 mW/g

B4 , w/c 2412 MHz, Chest/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 1.31 V/m; Power Drift = 1.86 dB

Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00429 mW/g; SAR(10 g) = 0.00124 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.016 mW/g

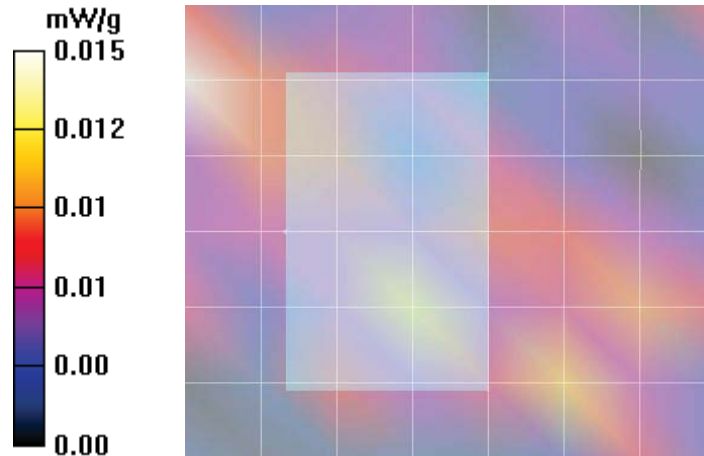

Plot H1

Date/Time: 02/02/2017 1:25:27 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450H

Communication System: WiFi; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.37, 6.37, 6.37); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

H1 , 2412 MHz, Head/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.016 mW/g

H1 , 2412 MHz, Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 1.92 V/m; Power Drift = 1.64 dB

Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.00767 mW/g; SAR(10 g) = 0.00404 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.012 mW/g

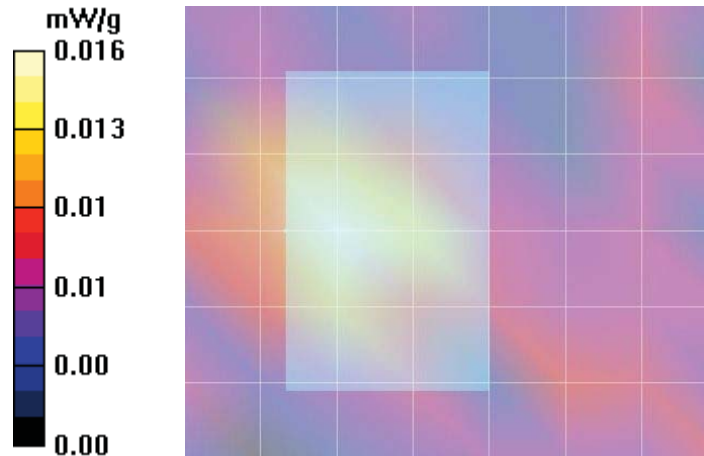

Plot H2

Date/Time: 02/02/2017 2:03:43 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450H

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.37, 6.37, 6.37); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

H2 , 2437 MHz, Head/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.016 mW/g

H2 , 2437 MHz, Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 2.31 V/m; Power Drift = 0.747 dB


Peak SAR (extrapolated) = 0.034 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00661 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.015 mW/g

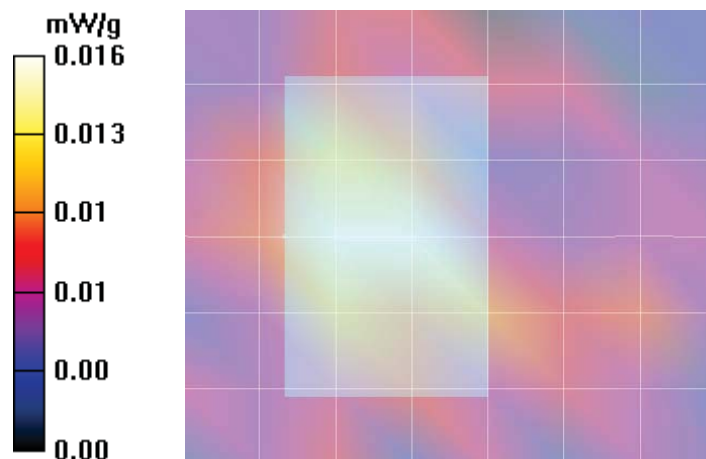

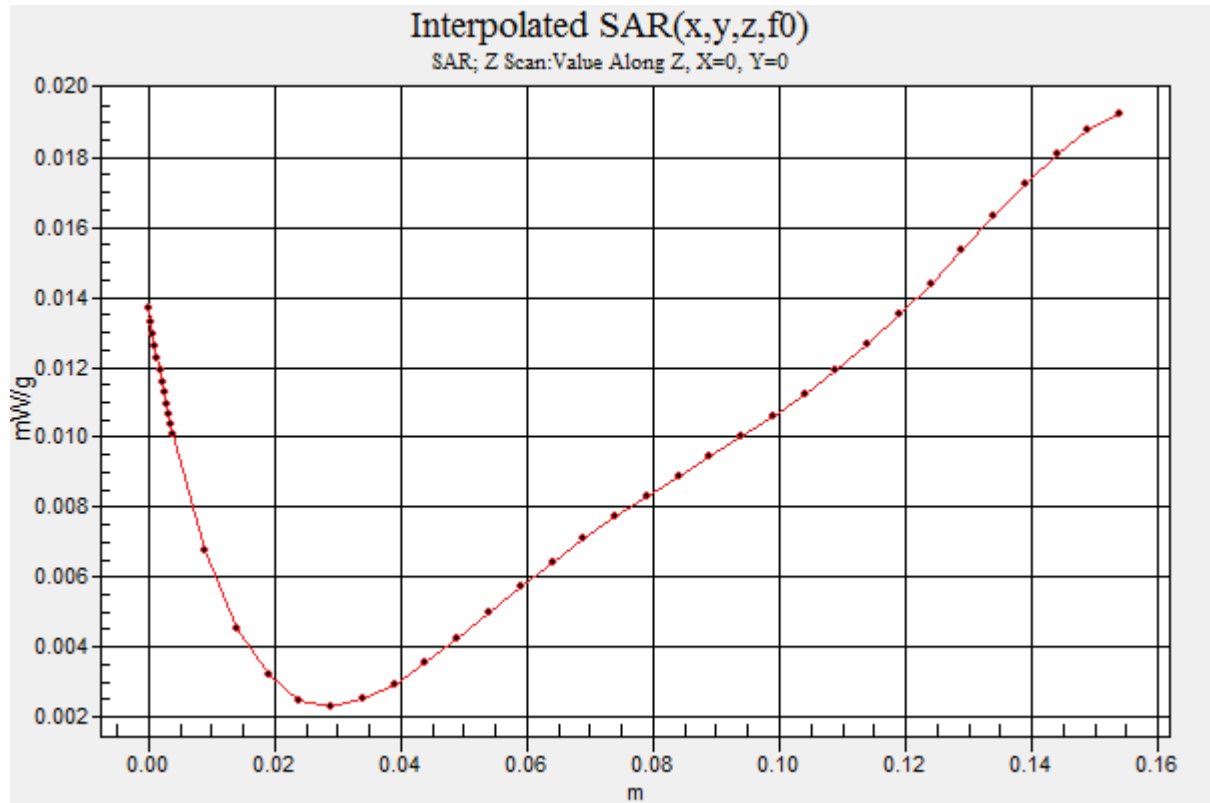

Plot H3

Date/Time: 02/02/2017 2:48:38 PM

Test Laboratory: Celltech Labs

DUT: Garmin ; Type: ; Serial:
Program Name: 2450H

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462 \text{ MHz}$; $\sigma = 1.97 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3600 2016; ConvF(6.37, 6.37, 6.37); Calibrated: 27/04/2016
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353 2016; Calibrated: 20/04/2016
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

H3 , 2462 MHz, Head/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.012 mW/g

H3 , 2462 MHz, Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.34 V/m; Power Drift = 5.86 dB

Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.00805 mW/g; SAR(10 g) = 0.00498 mW/g

[Info: Interpolated medium parameters used for SAR evaluation!](#)

Maximum value of SAR (measured) = 0.011 mW/g

