

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.

Lenexa, KS 66214

Phone / Fax (913) 660-0666

**Class 2 Permissive Change
Test Report for Certification
For**

Model: A03302

1616.0-1626.5 MHz

Mobile Earth Station

FCC ID: IPH-03302 IC: 1792A-03302

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Dan Irish

Lead Compliance Engineer

Test Report Number: 250910

Test Date: September 10, 2025 – September 30, 2025

Authorized Signatory:

Patrick Powell

Rogers Labs, a division of The Compatibility Center LLC

FCC Designation: US5305

ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 1

FCC ID: IPH-03302 IC: 1792A-03302

Test: 250910

Test to: 47CFR 2.1043, (Part 25)

File: AA4998 - A03302 C2PC TstRpt 250910 r1

Garmin International, Inc.

PMN: A03302 Host: AA4998

SN's: 3609390344, 3609390347

Date: October 16, 2025

Page 1 of 21

TABLE OF CONTENTS.....	2
REVISIONS.....	3
EXECUTIVE SUMMARY	4
OPINION / INTERPRETATION OF RESULTS	4
EQUIPMENT TESTED.....	5
ENVIRONMENTAL CONDITIONS.....	5
Equipment Function	6
Equipment Configuration.....	7
APPLICATION FOR CERTIFICATION.....	8
APPLICABLE STANDARDS & TEST PROCEDURES	9
EQUIPMENT TESTING PROCEDURES	9
Radiated Emission Test Procedure.....	9
Diagram 1 Test arrangement for radiated emissions of tabletop equipment.....	10
Diagram 2 Test arrangement for radiated emissions tested in the Semi-Anechoic Chamber (SAC).....	11
TEST SITE LOCATIONS	11
UNITS OF MEASUREMENTS	12
STATEMENT OF MODIFICATIONS AND DEVIATIONS	12
Antenna Requirements	12
General Radiated EMI Testing Procedure	13
Table 1 General Radiated Emissions Data – Worst Case (Horizontal Polarization)	14
Table 2 General Radiated Emissions Data – Worst Case (Vertical Polarization)	14
Summary of Results for General Radiated Emissions	14
Operation in the Band 1616.0-1626.5 MHz.....	15

Table 3 Transmitter Radiated Emissions Data.....	16
Summary of Results for Emissions of Intentional Radiator	16
ANNEX.....	17
Annex A Measurement Uncertainty Calculations.....	18
Annex B Test Equipment.....	19
Annex C Laboratory Certificate of Accreditation.....	21

Revisions

Revision 1 Issued October 16, 2025

Executive Summary

The following information is submitted for consideration in processing Class 2 Permissive Change (C2PC) of authorized equipment. The module model: A03302, (FCC ID: IPH-03302) has been granted module authorization operating under 47CFR part 25 and Industry Canada RSS-170 operations in the 1616.0-1626.5 MHz frequency band. The original Grant restricted use for mobile use and prohibited collocation use with other transceivers. This report presents documentation supporting the use of this module in a portable host (FCC ID: IPH-A4998) model: AA4998 which also houses other transceiver circuitry operating in the 2402-2480 MHz bands.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Module: A03302 FCC I.D.: IPH-03302
 Host FCC ID: IPH- A4998
 Frequency Range: 1616.0-1626.5 MHz
 Operating Power: 1.43 Watts, Occupied Bandwidth 99% 33.1 kHz
 emissions designator 33K1Q7D

Opinion / Interpretation of Results

Test Performed per 47CFR	Minimum Margin (dB)	Results
Radiated Emissions (General Out-of-Band)	-6.0	Complies
Radiated Emissions (harmonics)	-3.0	Complies

Equipment Tested

Model: AA4998

Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Garmin Corporation
 No.68, Zhangshu 2nd Rd.
 Xizhi Dist., New Taipei City 221, Taiwan, R.O.C.

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT #1 Radiated	A04998	3609390344
EUT #2 Antenna Port Conducted	A04998	3609390347
AC/DC Wall mount power supply	AQ27A-59CFA	N/A
USB-C to C Cable, 0.5m	320-01642-00	N/A
Sub-Assy Carabiner Tether, spine 2.0	011-06468-00	N/A
Carabiner, symmetric, four-sided, 60mm gray	013-00717-00	N/A

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design is capable of simultaneously transmitting on the MES (Iridium) and 2.4 GHz ISM ports (either BLE or ANT, one at a time).

Software (FVIN): 0.41 or higher: Antennas: 2.4 GHz PIFA (-0.01 dBi), 1.6 GHz Quad-helical (2.01 dBi)

Environmental Conditions


Ambient Temperature 22.2° C
 Relative Humidity 43.0 %
 Atmospheric Pressure 1012.6 mb

Equipment Function


The EUT is a Satellite short burst data transceiver module with operation capability in the 1616.0-1626.5 MHz frequency band. The assembled product FCC ID: IPH-A4998, (model: AA4998) adds 2.4 GHz wireless communications capabilities as well as incorporating FCC ID: IPH-03302 wireless module. The design provides the ability to send data using the 1616-1626 MHz data link. The portable host design offers a handheld or mobile mounted satellite communications capability with the 1.6 GHz transceivers. The product operates from internal rechargeable battery or external direct current power and provides USB-C interface connection port as documented in this report. Test samples were provided with test software providing the ability to enable transmitter functions on defined channels and operational modes. The EUT was arranged as described by the manufacturer for testing purposes. The EUT offers no other interface connections than those in the configuration options shown below as described by the manufacturer. For testing purposes, the EUT received power from external direct current power and configured to operate in available modes. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration


Config. 1: Battery Powered



Config 2: AC-charging

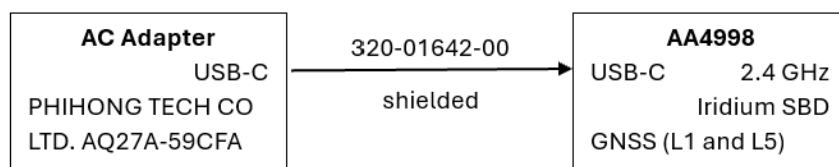

Config 3: Laptop-connected, Media Transfer Protocol (MTP), USB 2

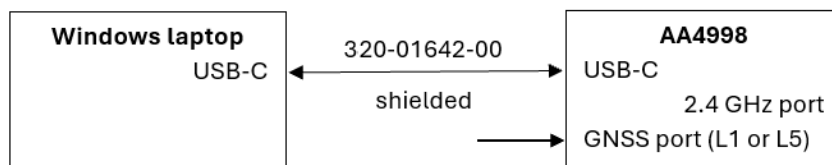

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: Model: A03302
FCC ID: IPH-03302 IC: 1792A-03302
- (3) Instruction Book:
Refer to Original Filing Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Original Filing Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Original Filing Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Original Filing Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from direct current power. The host design provides USB-C interface port for power and communications as presented in this filing. The EUT offers no other connection ports than those presented in this filing.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

In accordance with the 47CFR, dated November 30, 2021, Part 2, Subpart J, Paragraphs 2.932, and 2.1043, and applicable parts of paragraph 25.202 the following information is submitted.


This report documents compliance for the EUT operations as a Digital Transmission System (DTS) and Low Power Transmitter (DXX).

Equipment Testing Procedures

Radiated Emission Test Procedure

Radiated emissions testing was performed as required in 47 CFR 15C, RSS-210 Issue 10, and specified in ANSI C63.10-2020 and ANSI C63.26-2015. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of three meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams one and two showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for radiated emissions of tabletop equipment

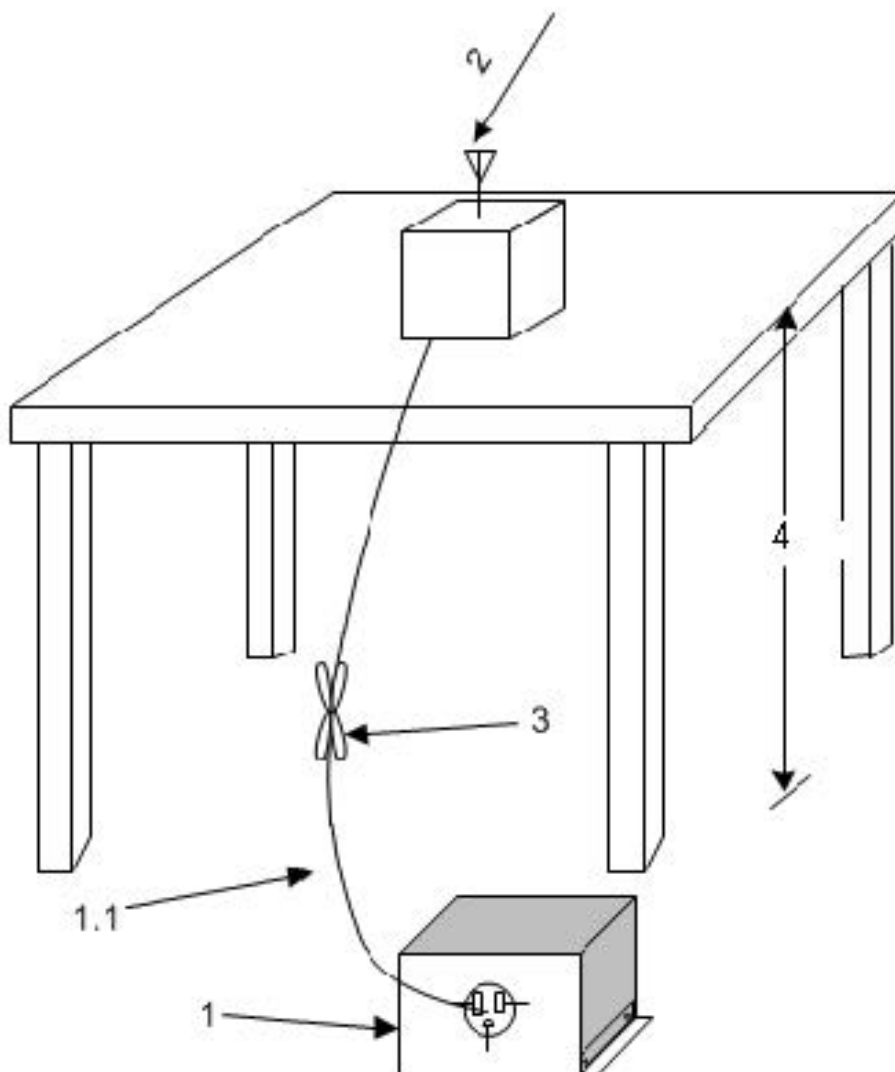

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 2 Test arrangement for radiated emissions tested in the Semi-Anechoic Chamber (SAC).

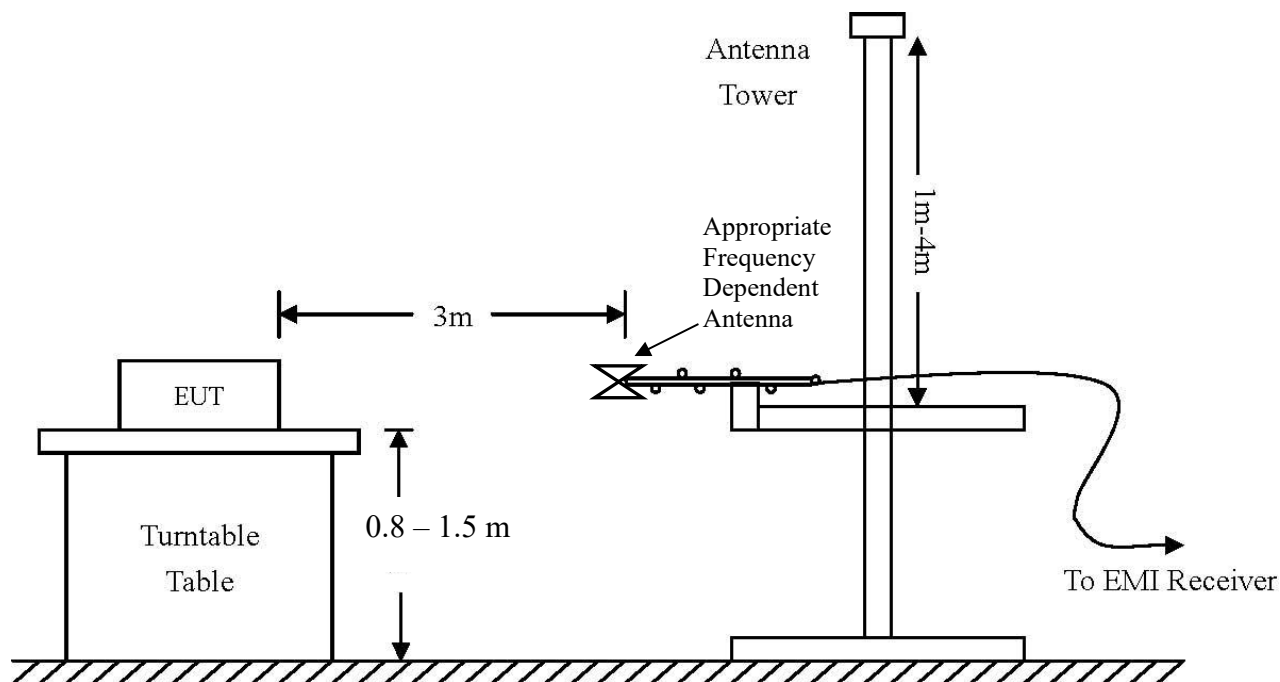

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: Radiated limit may be expressed for measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of three meters. Sample calculation demonstrates corrected field strength reading for Open Area Test Site using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Parts2, 15B and 25, RSS-GEN, and RSS-170 emission requirements. There were no deviations to the specifications.

Antenna Requirements

The EUT incorporates integral non-user accessible systems. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

General Radiated EMI Testing Procedure

Radiated emissions testing was performed as required in 47 CFR 15C, RSS-210 Issue 11, and specified in ANSI C63.10-2020. The EUT was arranged in the test configuration emulating worst-case equipment configuration and operated through available modes. Preliminary testing was performed in a screen room with the EUT positioned one meter from the FSM.

Investigations were performed to identify the frequencies, which produced the highest radiated emissions. Radiated emission investigations were performed from 9 kHz to 25,000 MHz with the EUT oriented in the manufacturer defined orientation. The EUT was placed in a semi-anechoic chamber on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Antennas used were Loop from 0.009 to 30 MHz, Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 1 GHz, and/or Biconilog from 30 MHz to 1000 MHz, and above 1 GHz, Double Ridge or Pyramidal Horns, notch filters and appropriate amplifiers and mixers were utilized. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Table 1 General Radiated Emissions Data – Worst Case (Horizontal Polarization)

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
493.3	45.9	41.0	47	-6.0
513.7	39.1	31.0	47	-16.0
523.1	37.3	29.8	47	-17.2
532.7	36.8	30.8	47	-16.2
543.6	37.5	30.9	47	-16.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 General Radiated Emissions Data – Worst Case (Vertical Polarization)

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
364.8	21.9	22.9	47	-24.1
370.9	25.2	16.9	47	-30.1
499.3	33.3	28.9	47	-18.1
501.8	28.9	32.2	47	-14.8
992.8	32.3	23.9	47	-23.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions. The EUT demonstrated a minimum margin of -6.0 dB below general unintentional radiator equipment radiated emissions requirements. There are no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements.

Operation in the Band 1616.0-1626.5 MHz

The test was applied in accordance with the test method requirements of FCC 47CFR Part 2.1043.

A preliminary profile of the Spurious Radiated Emissions was obtained up to a minimum of the 10th harmonic of the highest internally generated frequency by operating the EUT in a screen room. Measurements of emissions from the EUT were taken with the Measurement Antenna in both Horizontal and Vertical Polarizations at a 3-meter distance in the semi-anechoic chamber (SAC). The profiling produced a list of the worst-case emissions. Using the information from the preliminary testing of the EUT, the list of emissions was then confirmed in the SAC. Emission levels were maximized by adjusting the receive antenna height, antenna polarization and turntable azimuth. The EUT was set to transmit on maximum power in turn on lowest, middle, and highest channels. For any emissions found the EUT was then removed from the OATS and replaced with a substitution antenna. Using a signal generator, the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gains and losses, and cable loss. Radiated emissions measurements were performed at a 3m distance unless otherwise stated. Emission measurements were performed with all transmitters active.

Table 3 Transmitter Radiated Emissions Data

Frequency (MHz)	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
3242.0	52.6	35.7	54.8	36.9	54.0	-18.3	-17.1
4863.0	48.8	35.3	50.0	35.7	54.0	-18.7	-18.3
6484.0	51.7	38.7	52.0	38.7	54.0	-15.3	-15.3
8105.0	55.3	41.4	54.8	41.4	54.0	-12.6	-12.6
9726.0	57.0	43.1	56.7	43.0	54.0	-10.9	-11.0
11347.0	59.8	46.5	60.4	46.4	54.0	-7.5	-7.6
12968.0	59.6	46.4	59.5	46.4	54.0	-7.6	-7.6
14589.0	62.0	48.9	62.1	48.9	54.0	-5.1	-5.1
16210.0	63.8	51.0	64.2	50.9	54.0	-3.0	-3.1

The antenna conducted output power and 20-dB bandwidth were measured while operating in available modes for the lowest, middle, and highest available channels. The data reported above represents the worst-case operational conditions.

Summary of Results for Emissions of Intentional Radiator

The EUT demonstrated a minimum out of band radiated emission margin of at least 20 dB below requirements. The EUT demonstrated a minimum margin of -3.0 dB below general unintentional radiator equipment radiated emissions requirements. The EUT tested was observed in compliance with the radiated emissions requirements of 47CFR Part 25 and Industry Canada RSS-170. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other significantly measurable emissions observed other than those recorded in this report. There were no deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2025	3/20/2026
☐ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/9/2025	9/9/2026
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/2/2025	9/2/2026
☐ Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
☒ Antenna	ARA	BCD-235-B (169)	20-350MHz	9/2/2025	9/2/2026
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/2/2025	9/2/2026
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
☒ Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
☒ Antenna	Com Power	AH-1840 (101046)	18-40 GHz	3/17/2025	3/17/2027
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/9/2025	7/9/2026
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/21/2025	1/21/2026
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☐ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/9/2025	9/9/2026
☐ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/9/2025	9/9/2026
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/9/2025	9/9/2026
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/9/2025	9/9/2026
☒ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/9/2025	9/9/2026
☒ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/19/2025	3/19/2026
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/21/2025	3/21/2026
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
☐ Attenuator	Fairview	SA6NFN100W-40 (1625)	30-18000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/21/2025	3/21/2026
☒ Weather station	Davis	6152 (A70927D44N)		11/4/2024	11/4/2025

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☒ Frequency Counter: Leader		LDC-825 (8060153)		3/19/2025	3/19/2026
☐ ISN	Com-Power	Model ISN T-8 (600111)		3/19/2025	3/19/2026
☒ LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
☐ LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/9/2025	9/9/2026
☒ Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/9/2025	9/9/2026
☒ Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/22/2025	3/22/2026
☒ Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2025	3/20/2026
☐ Antenna:	Solar	9229-1 & 9230-1		2/5/2025	2/5/2026
☐ CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2026
☐ Oscilloscope Scope: Tektronix		MDO 4104		2/5/2025	2/5/2026
☐ EMC Transient Generator HVT		TR 3000		2/5/2025	2/5/2026
☐ AC Power Source (Ametech, California Instruments)				2/5/2025	2/5/2026
☒ Field Intensity Meter: EFM-018				2/5/2025	2/5/2026
☒ ESD Simulator: MZ-15				2/5/2025	2/5/2026
☐ Injection Clamp Luthi Model EM101				not required	
☐ R.F. Power Amp ACS 230-50W				not required	
☐ R.F. Power Amp EIN Model: A301				not required	
☐ R.F. Power Amp A.R. Model: 10W 1010M7				not required	
☐ R.F. Power Amp A.R. Model: 50U1000				not required	
☒ Temperature Chamber				not required	
☒ Shielded Room				not required	

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0

Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-03-11 through 2026-03-31
Effective Dates



[Signature]
For the National Voluntary Laboratory Accreditation Program