

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

47CFR, PART 15C - Intentional Radiators
47CFR Paragraph 15.247

Application For Grant of Certification

HVIN: GMN-03000

2402-2480 and 2412-2462 MHz Digital Transmission System (DTS)

FCC ID: IPH-04286

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062

Test Report Number: 250128

Test Date: January 28, 2025 – April 4, 2025

Authorized Signatory: 

Patrick Powell

Rogers Labs, a division of The Compatibility Center LLC

FCC Designation: US5305

ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS.....	2
REVISIONS.....	6
EXECUTIVE SUMMARY	7
OPINION / INTERPRETATION OF RESULTS	8
EQUIPMENT TESTED.....	10
Equipment Operational Modes.....	11
Equipment Function	12
Equipment Configuration.....	13
APPLICATION FOR CERTIFICATION.....	14
TEST SITE LOCATIONS	15
UNITS OF MEASUREMENTS	16
ENVIRONMENTAL CONDITIONS.....	16
STATEMENT OF MODIFICATIONS AND DEVIATIONS	17
APPLICABLE STANDARDS.....	17
INTENTIONAL RADIATORS.....	18
Antenna Requirements	18
TEST PROCEDURES.....	18
AC Line Conducted Emission Test Procedure	18
Radiated Emission Procedure	18
Antenna Port Conducted Emission Test Procedure.....	19
Diagram 1 Test arrangement for power-line conducted emissions.....	20
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	21
Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)	22

Diagram 4 Test arrangement for Antenna Port Conducted emissions.....	23
RESTRICTED BANDS OF OPERATION	23
Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, Radio 1, BT (2EDR).....	24
Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 3, Radio 1, BT (3EDR).....	25
Table 3 Radiated Emissions in Restricted Frequency Bands Data Mode 4, Radio 1, BT BLE	26
Table 4 Radiated Emissions in Restricted Frequency Bands Data Mode 5, Radio 1, 802.11b	27
Table 5 Radiated Emissions in Restricted Frequency Bands Data Mode 6, Radio 1, 802.11g	28
Table 6 Radiated Emissions in Restricted Frequency Bands Data Mode 7, Radio 1, 802.11n	29
Table 7 Radiated Emissions in Restricted Frequency Bands Data Mode 14, Radio 2, 802.11b	30
Table 8 Radiated Emissions in Restricted Frequency Bands Data Mode 15, Radio 2, 802.11g	31
Table 9 Radiated Emissions in Restricted Frequency Bands Data Mode 16, Radio 2, 802.11n	32
Summary of Results for Radiated Emissions in Restricted Bands	33
AC LINE CONDUCTED EMI PROCEDURE.....	33
GENERAL RADIATED EMISSIONS PROCEDURE.....	34
Table 10 General Radiated Emissions Data – Worst Case (Horizontal Polarization)	34
Figure 1 Plot of General Radiated Emissions – Horizontal Polarization	35
Table 11 General Radiated Emissions Data – Worst Case (Vertical Polarization).....	35
Figure 2 Plot of General Radiated Emissions – Vertical Polarization.....	36
Summary of Results for General Radiated Emissions	36
OPERATION IN THE BAND 2400 – 2483.5 MHZ	37
Figure 3 Plot of Transmitter Operation in 2402-2480 MHz Mode 2, Radio 1, BT (2EDR).....	38
Figure 4 Plot of Transmitter Operation in 2402-2480 MHz Mode 3, Radio 1, BT (3EDR).....	39
Figure 5 Plot of Transmitter Operation in 2402-2480 MHz Mode 4, Radio 1, BT BLE	40
Figure 6 Plot of Transmitter Operation in 2402-2480 MHz Mode 5, Radio 1, 802.11b	41
Figure 7 Plot of Transmitter Operation in 2402-2480 MHz Mode 6, Radio 1, 802.11g	42

Figure 8 Plot of Transmitter Operation in 2402-2480 MHz Mode 7, Radio 1, 802.11n	43
Figure 9 Plot of Transmitter Operation in 2402-2480 MHz Mode 14, Radio 2, 802.11b	44
Figure 10 Plot of Transmitter Operation in 2402-2480 MHz Mode 15, Radio 2, 802.11g	45
Figure 11 Plot of Transmitter Operation in 2402-2480 MHz Mode 16, Radio 2, 802.11n	46
Figure 12 Plot of Emissions Low Band Edge Mode 2, Radio 1, BT (2EDR)	47
Figure 13 Plot of Emissions Low Band Edge Mode 3, Radio 1, BT (3EDR)	48
Figure 14 Plot of Emissions Low Band Edge Mode 4, Radio 1, BT BLE	49
Figure 15 Plot of Emissions Low Band Edge Mode 5, Radio 1, 802.11b	50
Figure 16 Plot of Emissions Low Band Edge Mode 6, Radio 1, 802.11g	51
Figure 17 Plot of Emissions Low Band Edge Mode 7, Radio 1, 802.11n	52
Figure 18 Plot of Emissions Low Band Edge Mode 14, Radio 2, 802.11b	53
Figure 19 Plot of Emissions Low Band Edge Mode 15, Radio 2, 802.11g	54
Figure 20 Plot of Emissions Low Band Edge Mode 16, Radio 2, 802.11n	55
Figure 21 Plot of Transmitter Emissions High Band Edge Mode 2, Radio 1, BT (2EDR)	56
Figure 22 Plot of Transmitter Emissions High Band Edge Mode 3, Radio 1, BT (3EDR)	57
Figure 23 Plot of Transmitter Emissions High Band Edge Mode 4, Radio 1, BT BLE	58
Figure 24 Plot of Transmitter Emissions High Band Edge Mode 5, Radio 1, 802.11b.....	59
Figure 25 Plot of Transmitter Emissions High Band Edge Mode 6, Radio1, 802.11g.....	60
Figure 26 Plot of Transmitter Emissions High Band Edge Mode 7, Radio 1, 802.11n.....	61
Figure 27 Plot of Transmitter Emissions High Band Edge Mode 14, Radio 2, 802.11b.....	62
Figure 28 Plot of Transmitter Emissions High Band Edge Mode 15, Radio 2, 802.11g.....	63
Figure 29 Plot of Transmitter Emissions High Band Edge Mode 16, Radio 2, 802.11n.....	64
Figure 30 Plot of 6-dB Occupied Bandwidth Mode 2, Radio 1, BT (2EDR)	65
Figure 31 Plot of 99% Occupied Bandwidth Mode 2, Radio 1, BT (2EDR)	66
Figure 32 Plot of 6-dB Occupied Bandwidth Mode 3, Radio 1, BT (3EDR)	67

Figure 33 Plot of 99% Occupied Bandwidth Mode 3, Radio 1, BT (3EDR)	68
Figure 34 Plot of 6-dB Occupied Bandwidth Mode 4, Radio 1, BT BLE	69
Figure 35 Plot of 99% Occupied Bandwidth Mode 4, Radio 1, BT BLE	70
Figure 36 Plot of 6-dB Occupied Bandwidth Mode 5, Radio 1, 802.11b	71
Figure 37 Plot of 99% Occupied Bandwidth Mode 5, Radio 1, 802.11b.....	72
Figure 38 Plot of 6-dB Occupied Bandwidth Mode 6, Radio 1, 802.11g.....	73
Figure 39 Plot of 99% Occupied Bandwidth Mode 6, Radio 1, 802.11g.....	74
Figure 40 Plot of 6-dB Occupied Bandwidth Mode 7, Radio 1, 802.11n	75
Figure 41 Plot of 99% Occupied Bandwidth Mode 7, Radio 1, 802.11n.....	76
Figure 42 Plot of 6-dB Occupied Bandwidth Mode 14, Radio 2, 802.11b	77
Figure 43 Plot of 99% Occupied Bandwidth Mode 14, Radio 2, 802.11b.....	78
Figure 44 Plot of 6-dB Occupied Bandwidth Mode 15, Radio 2, 802.11g.....	79
Figure 45 Plot of 99% Occupied Bandwidth Mode 15, Radio 2, 802.11g.....	80
Figure 46 Plot of 6-dB Occupied Bandwidth Mode 16, Radio 2, 802.11n	81
Figure 47 Plot of 99% Occupied Bandwidth Mode 16, Radio 2, 802.11n.....	82
Figure 48 Plot of Transmitter Power Spectral Density Mode 2, Radio 1, BT (2EDR).....	83
Figure 49 Plot of Transmitter Power Spectral Density Mode 3, Radio 1, BT (3EDR).....	84
Figure 50 Plot of Transmitter Power Spectral Density Mode 4, Radio 1, BT BLE.....	85
Figure 51 Plot of Transmitter Power Spectral Density Mode 5, Radio 1, 802.11b.....	86
Figure 52 Plot of Transmitter Power Spectral Density Mode 6, Radio 1, 802.11g	87
Figure 53 Plot of Transmitter Power Spectral Density Mode 7, Radio 1, 802.11n.....	88
Figure 54 Plot of Transmitter Power Spectral Density Mode 14, Radio 2, 802.11b.....	89
Figure 55 Plot of Transmitter Power Spectral Density Mode 15, Radio 2, 802.11g	90
Figure 56 Plot of Transmitter Power Spectral Density Mode 16, Radio 2, 802.11n.....	91
TRANSMITTER EMISSIONS DATA.....	92

Table 12 Transmitter Radiated Emissions Mode 2, Radio 1, BT (2EDR).....	92
Table 13 Transmitter Radiated Emissions Mode 3, Radio 1, BT (3EDR).....	93
Table 14 Transmitter Radiated Emissions Mode 4, Radio 1, BT BLE.....	94
Table 15 Transmitter Radiated Emissions Mode 5, Radio 1, 802.11b.....	95
Table 16 Transmitter Radiated Emissions Mode 6, Radio 1, 802.11g.....	96
Table 17 Transmitter Radiated Emissions Mode 6, Radio 1, 802.11n.....	97
Table 18 Transmitter Radiated Emissions Mode 14, Radio 2, 802.11b.....	98
Table 19 Transmitter Radiated Emissions Mode 15, Radio 2, 802.11g.....	99
Table 20 Transmitter Radiated Emissions Mode 16, Radio 2, 802.11n.....	100
Table 21 Transmitter Antenna Port Conducted Data Radio 1 / modes 2-4	101
Table 22 Transmitter Antenna Port Conducted Data Radio 1 / modes 5-7	102
Table 23 Transmitter Antenna Port Conducted Data Radio 2 / modes 14-16	103
Table 24 Transmitter Antenna Port Conducted Combined Output Power*.....	104
Table 25 Transmitter Antenna Port Conducted Combined PSD*.....	104
Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....	105
ANNEX.....	106
Annex A Measurement Uncertainty Calculations.....	107
Annex B Test Equipment.....	108
Annex C Laboratory Certificate of Accreditation.....	110

Revisions

Revision 1 issued May 20, 2025 – Initial Formal Release
 Revision 2 issued May 24, 2025 – Incorporated review feedback.
 Revision 3 Issued July 9, 2025 – Incorporated external review findings.
 Revision 4 Issued August 4, 2025 – Incorporated TCB review findings.

Executive Summary

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under Code of Federal Regulations Title 47 (47CFR) Part 15C paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5, operation in the 2400 – 2483.5 MHz band.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

HVIN: GMN-03000

FCC ID: IPH-04286

Operating Frequency Range: 2402-2480 MHz

GMN-03000 was chosen for transmitter configuration testing and used for final measurements.

Operational communication modes 2 through 7 and 14 through 16:

Radio #	Mode #	Standard	Power (Watts)	99% OBW (kHz)	6-dB OBW (kHz)
1	2	BT (2EDR $\pi/4$ DQPSK)	0.001	1197.1	1072.1
1	3	BT (3EDR 8DPSK)	0.001	1197.1	1072.1
1	4	BT BLE (GMSK)	0.0004	1048.1	679.5
1	5	2.4G 802.11b	0.009	10852.5	7655.0
1	6	2.4G 802.11g	0.015	17280.0	16399.2
1	7	2.4G 802.11n	0.015	18360.0	17703.1
2	14	2.4G 802.11b	0.008	10822.5	7750.0
2	15	2.4G 802.11g	0.017	17270.0	16407.7
2	16	2.4G 802.11n	0.017	18340.0	17645.6

This report addresses EUT Operations as Digital Transmission System using transmitter modulations in modes 2 through 7 and 14 through 16. Note, the production device utilizes a non-user accessible integral antenna system with 8.0 dBi gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Band Emissions 15.205, RSS-GEN, RSS-247	-3.7	Complies
AC Line Emissions as per 47CFR 15.207, RSS-GEN 8.8	N/A	Complies
Radiated Emissions 47 CFR 15.209, RSS-GEN 8.9	-3.3	Complies
Harmonic Emissions per 47CFR 15.247, RSS-247	-1.8	Complies
Power Spectral Density per 47CFR 15.247, RSS-247	-19.8	Complies

Tests performed include:

47CFR 15.247

(a) (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 8 of 110

restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Issue 3

5.2 Digital transmission systems

DTS's include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz

- a) The minimum 6 dB bandwidth shall be 500 kHz.
- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e., the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements

Devices shall comply with the following requirements, where applicable:

- d) For DTS's employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

5.5 Unwanted emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Equipment Tested

Model: GMN-03000

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Description	Part Number	Serial Number
GMN-03000 (Radiated EUT #1)	011-05799-05	78F000512
GMN-03000 (Conducted EUT #2)	011-05799-05	78F000511
X3 Main Harness	T00-00846-00	N/A
SMA RF 50Ω Load	N/A	N/A
BNC RF 50Ω Load	N/A	N/A
USB-C Drive	N/A	N/A
RS-232 to serial adapter	N/A	N/A
Laptop Computer	Latitude 74870	EFSPSN2

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time on a given radio (#1 or #2) but is capable of simultaneous transmission of one radio #1 transmitter and one radio #2 transmitter.

Software (FVIN): 1.00b; Antennas: Bluetooth & 2.4 GHz WiFi - PIFA (8.0 dBi); 5.2 GHz PIFA (-4.4 dBi)



Equipment Operational Modes

Radio #	Mode #	Standard
1	1	BT BR (GFSK)
1	2	BT (2EDR $\pi/4$ DQPSK)
1	3	BT (3EDR 8DPSK)
1	4	BT BLE (GMSK)
1	5	2.4G 802.11b
1	6	2.4G 802.11g
1	7	2.4G 802.11n
1	8	U-NII-1 802.11a
1	9	U-NII-1 802.11n20
1	10	U-NII-1 802.11n40
1	11	U-NII-1 802.11ac20
1	12	U-NII-1 802.11ac40
1	13	U-NII-1 802.11ac80
2	14	2.4G 802.11b
2	15	2.4G 802.11g
2	16	2.4G 802.11n
2	17	U-NII-1 802.11a
2	18	U-NII-1 802.11n20
2	19	U-NII-1 802.11n40
2	20	U-NII-1 802.11ac20
2	21	U-NII-1 802.11ac40
2	22	U-NII-1 802.11ac80

Equipment Function

The GMN-03000 is an aeronautical display providing 2.4 GHz and 5 GHz wireless communication. The device is marketed as Aircraft Panel Mounted Display Unit. This report documents the performed testing and results for applicable configuration and product operation. The test software provided the ability to operate the transmitter at near 100% duty cycle for testing purposes. The testing mode of operation exceeds typical duty cycle operation of production equipment. As requested by the manufacturer, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

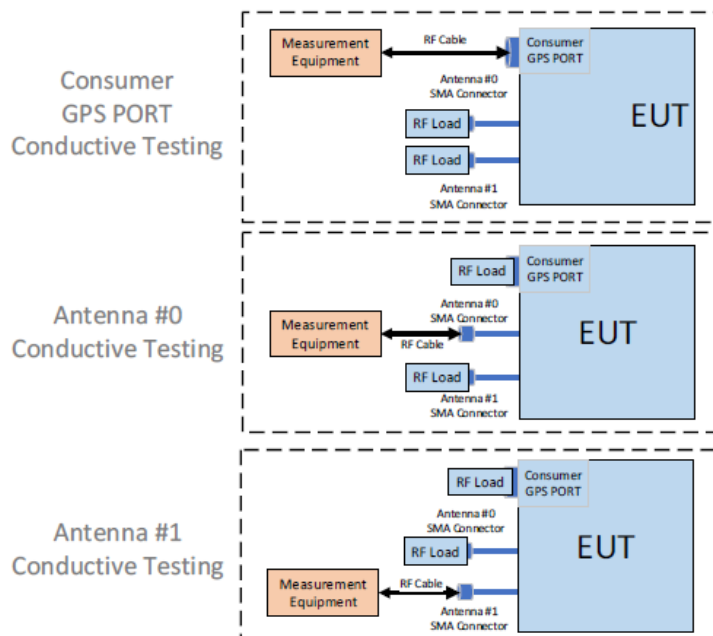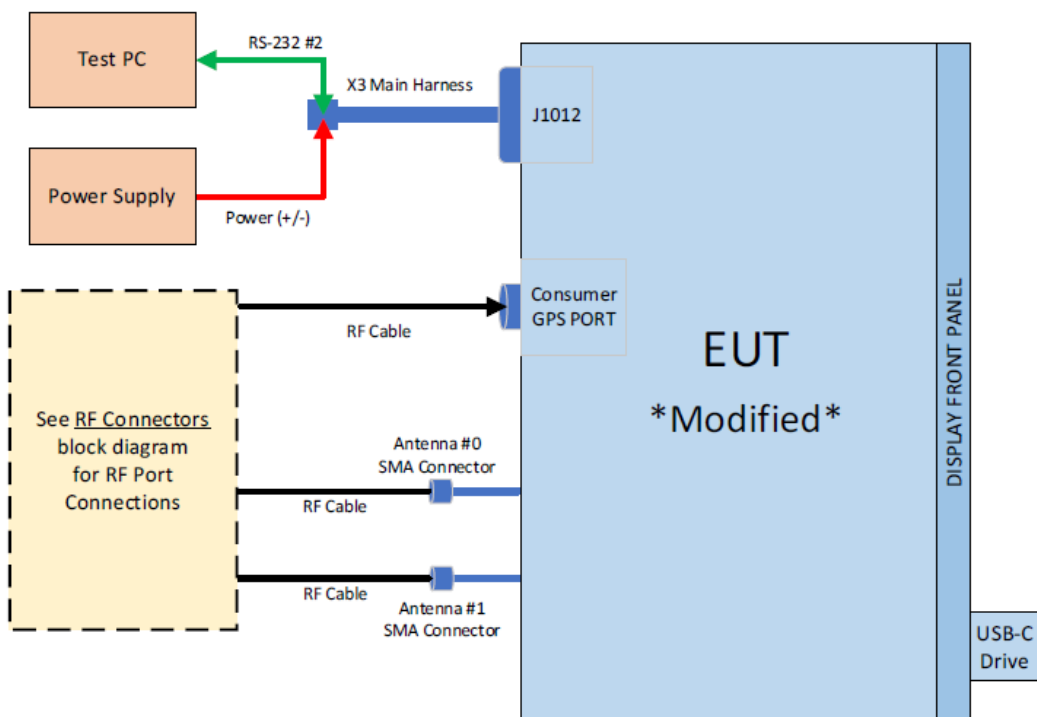

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: GMN-03000
FCC ID: IPH-04286
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power provided from installation vehicle. The EUT provides interface ports for power, loads and communications as presented in this filing.
- (9) Transition Provisions of 47CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to this DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Environmental Conditions

Ambient Temperature 21.9° C

Relative Humidity 23.0 %

Atmospheric Pressure 1011.9 mb

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 16 of 110

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47CFR Part 15C, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Applicable Standards

The following information is submitted in accordance with the eCFR (electronic Title 47 Code of Federal Regulations) (47CFR), dated January 13, 2025: Part 2, Subpart J, Part 15C Paragraph 15.247, RSS-247 Issue 3, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013. This report documents compliance for the EUT operations as Digital Transmission Systems operation.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47CFR, Subpart C, paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5.

Antenna Requirements

The EUT incorporates integral non-user accessible system. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Test Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions were performed as required in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in the test setup exhibit for EUT placement used during testing.

Radiated Emission Procedure


Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 3, RSS-GEN and specified in ANSI C63.10-2020. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at

least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for power-line conducted emissions

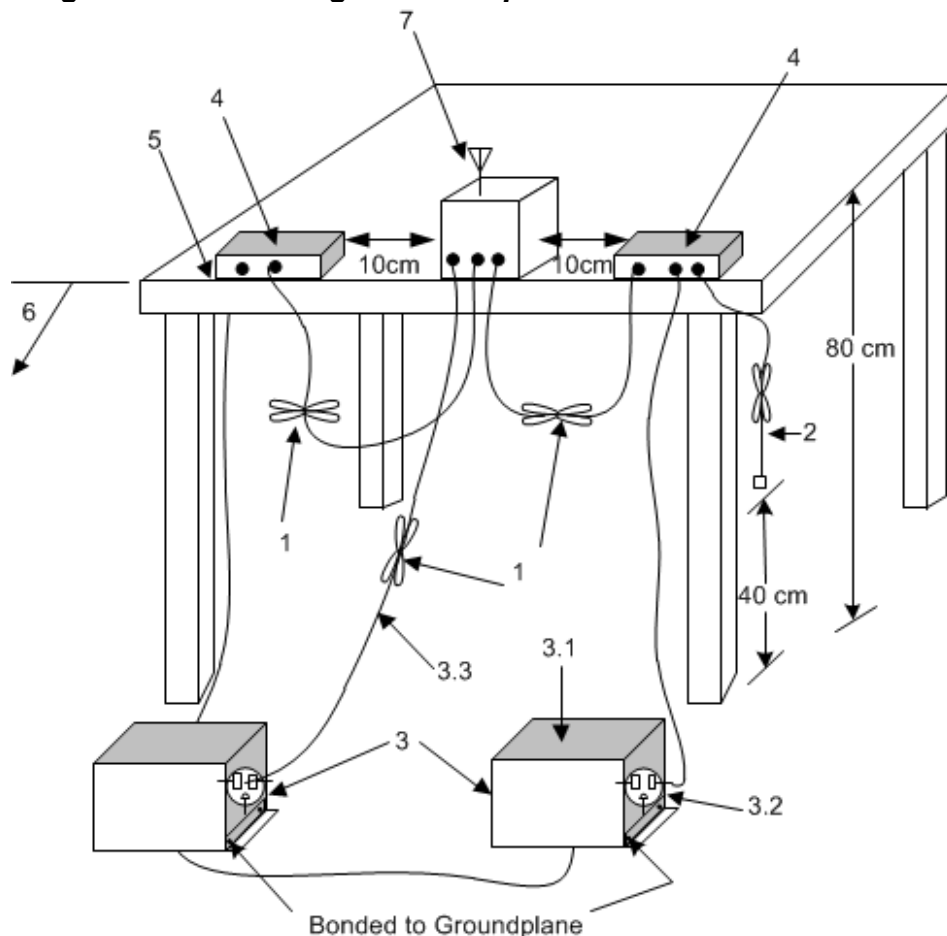

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test


Diagram 2 Test arrangement for radiated emissions of tabletop equipment

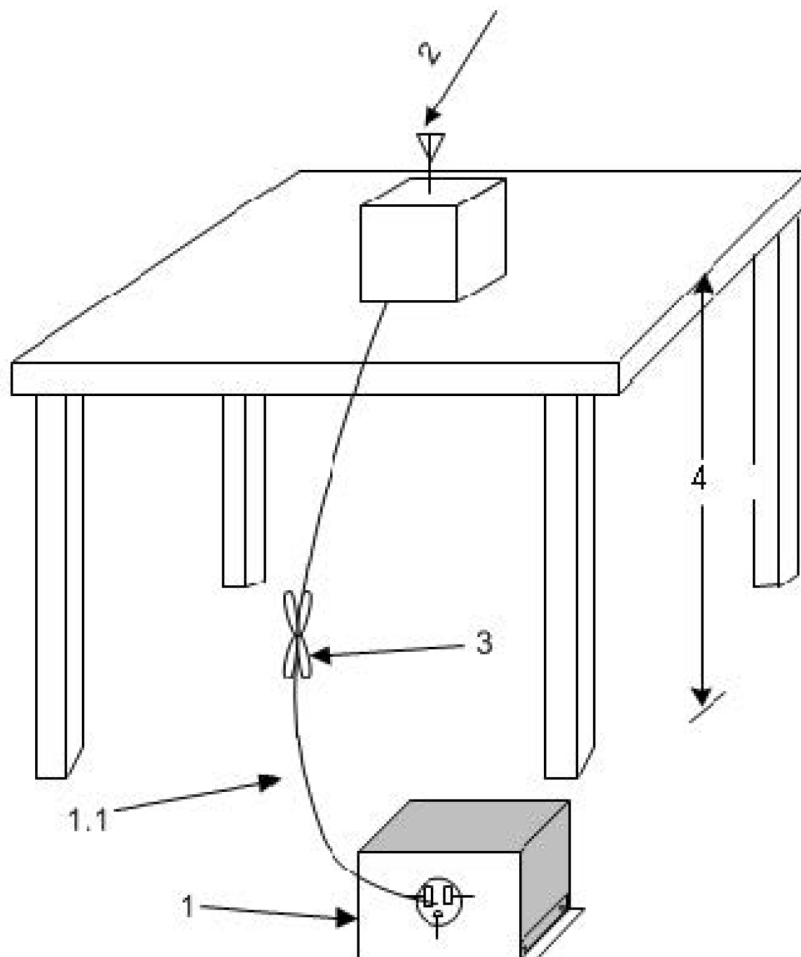

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1. LISN spaced at least 80 cm from the nearest part of the EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

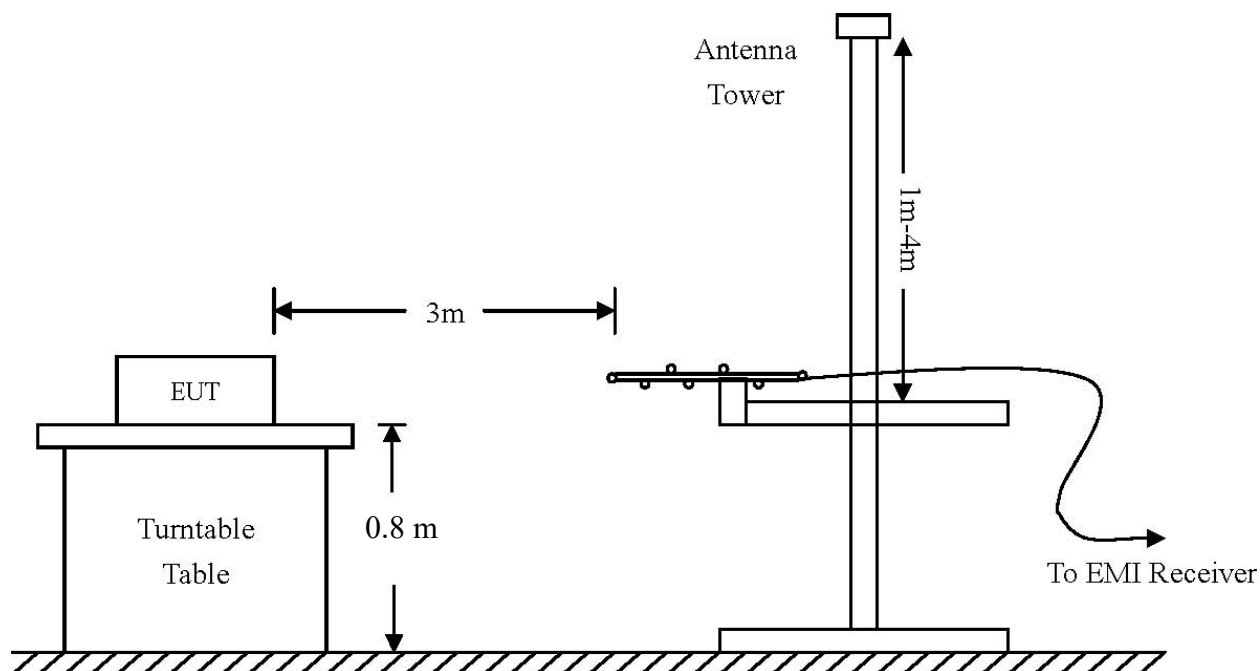

Above 1 GHz:


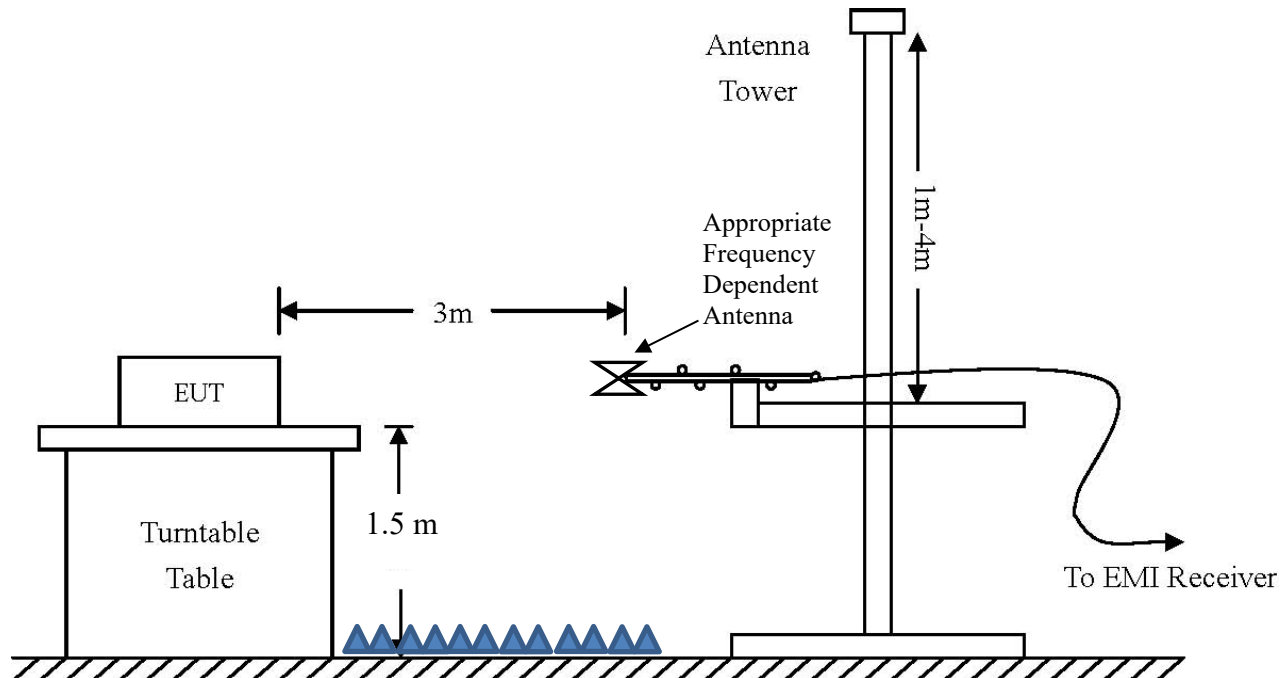


Diagram 4 Test arrangement for Antenna Port Conducted emissions
Spectrum Analyzer

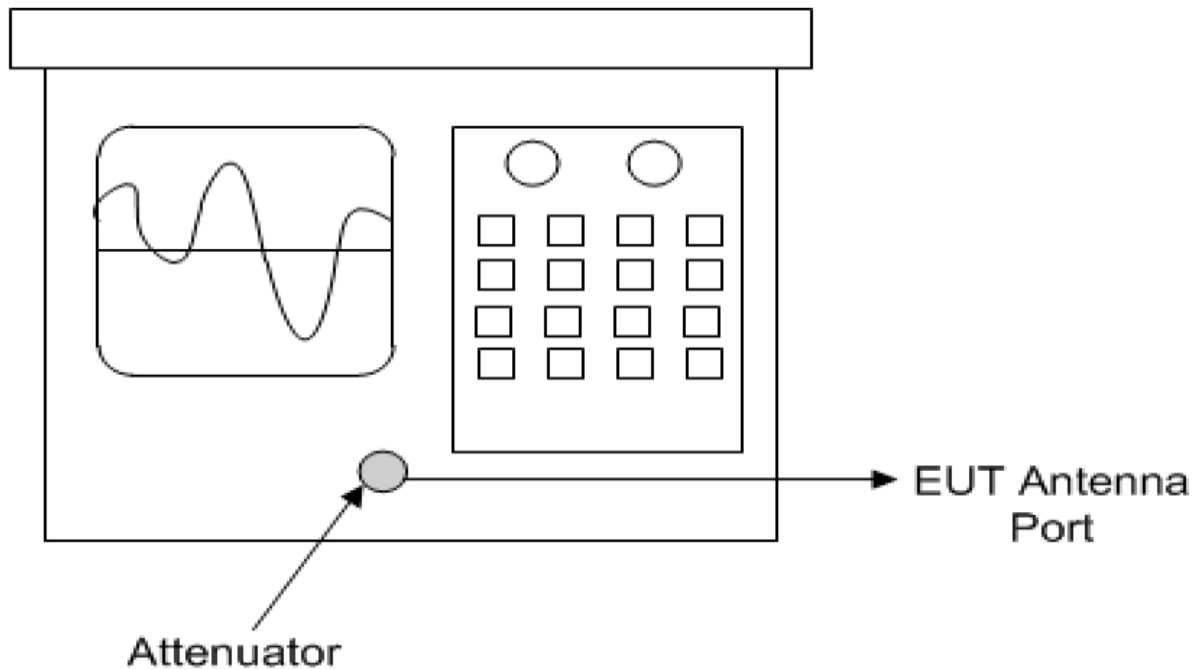

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, Radio 1, BT (2EDR)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	50.2	36.5	50.6	36.4	54.0	-17.5	-17.6
2483.5	51.0	37.3	50.7	37.1	54.0	-16.7	-16.9
4804.0	49.4	36.3	49.3	36.4	54.0	-17.7	-17.6
4884.0	50.1	36.7	50.3	36.7	54.0	-17.3	-17.3
4960.0	49.6	36.5	49.6	36.3	54.0	-17.5	-17.7
7206.0	52.9	40.0	52.9	40.0	54.0	-14.0	-14.0
7326.0	53.2	40.3	53.3	40.3	54.0	-13.7	-13.7
7440.0	52.5	39.9	52.9	39.9	54.0	-14.1	-14.1
12010.0	59.1	46.1	58.7	46.1	54.0	-7.9	-7.9
12210.0	59.9	47.1	59.9	47.1	54.0	-6.9	-6.9
12400.0	59.7	47.0	59.8	46.9	54.0	-7.0	-7.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Radiated Emissions in Restricted Frequency Bands Data Mode 3, Radio 1, BT (3EDR)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	51.2	36.8	50.2	36.7	54.0	-17.2	-17.3
2483.5	51.2	37.3	50.7	37.2	54.0	-16.7	-16.8
4804.0	49.2	36.3	49.5	36.4	54.0	-17.7	-17.6
4882.0	50.2	36.6	50.1	36.5	54.0	-17.4	-17.5
4960.0	49.7	36.5	49.2	36.3	54.0	-17.5	-17.7
7206.0	53.2	40.0	52.8	40.0	54.0	-14.0	-14.0
7323.0	53.2	40.2	52.7	40.2	54.0	-13.8	-13.8
7440.0	52.7	39.8	53.0	39.8	54.0	-14.2	-14.2
12010.0	59.9	46.1	58.8	46.1	54.0	-7.9	-7.9
12205.0	60.2	47.0	60.2	47.0	54.0	-7.0	-7.0
12400.0	59.6	46.9	60.3	46.9	54.0	-7.1	-7.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Radiated Emissions in Restricted Frequency Bands Data Mode 4, Radio 1, BT BLE

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	49.6	36.5	50.7	36.4	54.0	-17.5	-17.6
2483.5	50.9	37.2	51.1	37.1	54.0	-16.8	-16.9
4804.0	49.1	36.2	48.9	36.1	54.0	-17.8	-17.9
4880.0	49.7	36.4	49.7	36.4	54.0	-17.6	-17.6
4960.0	50.7	36.2	49.7	36.2	54.0	-17.8	-17.8
7206.0	52.6	39.9	52.4	39.9	54.0	-14.1	-14.1
7320.0	53.6	40.2	52.9	40.2	54.0	-13.8	-13.8
7440.0	52.8	39.8	52.2	39.8	54.0	-14.2	-14.2
12010.0	58.9	45.9	59.1	45.9	54.0	-8.1	-8.1
12200.0	59.7	47.0	59.9	47.0	54.0	-7.0	-7.0
12400.0	60.0	46.9	60.0	46.8	54.0	-7.1	-7.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Radiated Emissions in Restricted Frequency Bands Data Mode 5, Radio 1, 802.11b

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	52.2	37.9	50.2	36.9	54.0	-16.1	-17.1
2483.5	53.7	39.7	51.2	37.3	54.0	-14.3	-16.7
4824.0	50.7	36.3	50.0	36.5	54.0	-17.7	-17.5
4874.0	51.2	36.8	49.9	36.8	54.0	-17.2	-17.2
4924.0	49.5	36.4	49.2	36.2	54.0	-17.6	-17.8
7236.0	52.5	39.9	53.2	40.1	54.0	-14.1	-13.9
7311.0	53.6	40.1	54.0	41.1	54.0	-13.9	-12.9
7386.0	53.3	40.0	53.3	40.0	54.0	-14.0	-14.0
12060.0	59.5	46.4	59.7	46.4	54.0	-7.6	-7.6
12185.0	60.1	46.9	59.5	46.8	54.0	-7.1	-7.2
12310.0	60.4	47.6	60.8	47.6	54.0	-6.4	-6.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Radiated Emissions in Restricted Frequency Bands Data Mode 6, Radio 1, 802.11g

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	65.4	44.0	59.1	38.5	54.0	-10.0	-15.5
2483.5	71.6	50.3	57.1	39.9	54.0	-3.7	-14.1
4824.0	49.3	36.3	49.7	36.3	54.0	-17.7	-17.7
4874.0	50.4	36.6	49.8	36.6	54.0	-17.4	-17.4
4924.0	49.3	36.3	50.3	36.2	54.0	-17.7	-17.8
7236.0	53.0	40.2	53.3	40.1	54.0	-13.8	-13.9
7311.0	53.7	40.1	52.9	40.1	54.0	-13.9	-13.9
7386.0	53.2	40.1	53.8	40.1	54.0	-13.9	-13.9
12060.0	59.5	46.4	59.4	46.3	54.0	-7.6	-7.7
12185.0	60.0	46.9	59.9	46.8	54.0	-7.1	-7.2
12310.0	61.0	47.7	61.2	47.6	54.0	-6.3	-6.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Radiated Emissions in Restricted Frequency Bands Data Mode 7, Radio 1, 802.11n

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	67.2	46.1	59.2	39.4	54.0	-7.9	-14.6
2483.5	72.0	49.5	57.9	39.6	54.0	-4.5	-14.4
4824.0	49.2	36.2	49.6	36.2	54.0	-17.8	-17.8
4874.0	49.5	36.6	49.7	36.6	54.0	-17.4	-17.4
4924.0	49.6	36.3	50.2	36.2	54.0	-17.7	-17.8
7236.0	53.2	40.1	52.9	39.9	54.0	-13.9	-14.1
7311.0	52.6	40.1	53.3	40.2	54.0	-13.9	-13.8
7386.0	52.8	40.0	53.0	40.0	54.0	-14.0	-14.0
12060.0	59.9	46.4	59.8	46.4	54.0	-7.6	-7.6
12185.0	60.3	46.9	59.4	46.9	54.0	-7.1	-7.1
12310.0	60.6	47.7	60.7	47.6	54.0	-6.3	-6.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Radiated Emissions in Restricted Frequency Bands Data Mode 14, Radio 2, 802.11b

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	51.6	37.8	50.2	36.5	54.0	-16.2	-17.5
2483.5	52.3	38.7	51.0	37.2	54.0	-15.3	-16.8
4824.0	50.0	36.5	49.4	36.3	54.0	-17.5	-17.7
4874.0	51.5	37.3	51.8	38.3	54.0	-16.7	-15.7
4924.0	50.4	37.0	50.5	36.9	54.0	-17.0	-17.1
7236.0	53.7	40.3	53.6	40.7	54.0	-13.7	-13.3
7311.0	53.0	40.3	53.2	40.3	54.0	-13.7	-13.7
7386.0	53.6	40.1	54.2	41.3	54.0	-13.9	-12.7
12060.0	59.5	46.5	59.7	46.4	54.0	-7.5	-7.6
12185.0	59.5	46.8	60.3	47.0	54.0	-7.2	-7.0
12310.0	60.7	47.8	60.5	47.7	54.0	-6.2	-6.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Radiated Emissions in Restricted Frequency Bands Data Mode 15, Radio 2, 802.11g

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	63.9	44.8	51.8	37.2	54.0	-9.2	-16.8
2483.5	68.1	45.2	59.4	38.0	54.0	-8.8	-16.0
4824.0	49.2	46.3	49.3	36.2	54.0	-7.7	-17.8
4874.0	50.4	36.8	50.2	37.1	54.0	-17.2	-16.9
4924.0	49.9	36.4	49.6	36.4	54.0	-17.6	-17.6
7236.0	54.0	40.1	53.4	40.5	54.0	-13.9	-13.5
7311.0	53.0	40.2	53.4	40.2	54.0	-13.8	-13.8
7386.0	53.2	39.9	53.0	40.2	54.0	-14.1	-13.8
12060.0	59.6	46.5	58.8	46.2	54.0	-7.5	-7.8
12185.0	60.1	46.8	59.4	46.7	54.0	-7.2	-7.3
12310.0	60.4	47.5	60.7	47.6	54.0	-6.5	-6.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 9 Radiated Emissions in Restricted Frequency Bands Data Mode 16, Radio 2, 802.11n

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	67.2	47.5	56.6	37.9	54.0	-6.5	-16.1
2483.5	73.4	46.8	59.6	38.2	54.0	-7.2	-15.8
4824.0	49.2	36.3	49.7	36.2	54.0	-17.7	-17.8
4874.0	50.3	36.8	49.9	36.5	54.0	-17.2	-17.5
4924.0	50.9	36.3	50.1	36.5	54.0	-17.7	-17.5
7236.0	53.4	40.2	52.6	39.9	54.0	-13.8	-14.1
7311.0	53.0	40.2	54.0	40.6	54.0	-13.8	-13.4
7386.0	52.7	40.0	53.2	40.1	54.0	-14.0	-13.9
12060.0	59.4	46.5	59.1	46.4	54.0	-7.5	-7.6
12185.0	59.7	46.9	59.4	46.8	54.0	-7.1	-7.2
12310.0	60.4	47.5	60.5	47.6	54.0	-6.5	-6.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-247 Issue 3 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -3.7 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted EMI Procedure

The equipment operates solely from direct current power and offers no provision for connection to utility power systems. Therefore, no AC line conducted emissions testing was required or performed.

General Radiated Emissions Procedure

Testing for the radiated emissions were performed as specified in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. For testing purposes, the EUT was arranged as presented in the applicable configuration diagrams above and operated through all modes as presented.

Exploratory radiated emissions measurements were performed in the SAC chamber or screen room, finding maximized emissions over frequency, EUT orientation, antenna height and polarity. This data is then used to focus the final radiated emissions measurements on these maximized points.

Final radiated emissions data were taken with the EUT located in the OATS or SAC at distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 6,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop, Biconical, Broadband Biconilog, Log Periodic, and Double Ridge or Pyramidal Horns and mixers above 1 GHz.

Table 10 General Radiated Emissions Data – Worst Case (Horizontal Polarization)

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
676.2	38.5	29.7	47	-17.3
707.0	41.1	43.7	47	-3.3
740.4	38.9	31.7	47	-15.3
746.4	41.2	36.1	47	-10.9
766.1	40.1	34.7	47	-12.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 1 Plot of General Radiated Emissions – Horizontal Polarization


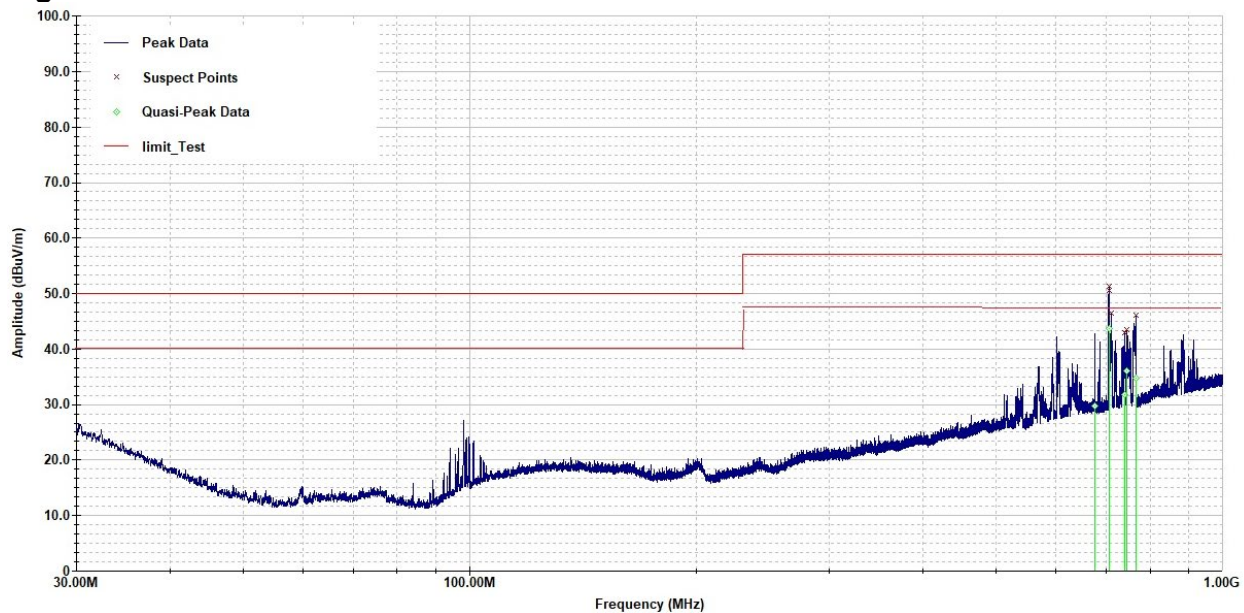


Table 11 General Radiated Emissions Data – Worst Case (Vertical Polarization)

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
707.2	27.6	35.9	47	-11.1
712.1	28.0	22.7	47	-24.3
766.3	41.6	36.7	47	-10.3
796.8	29.5	21.3	47	-25.7
913.6	31.2	23.4	47	-23.6

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 2 Plot of General Radiated Emissions – Vertical Polarization

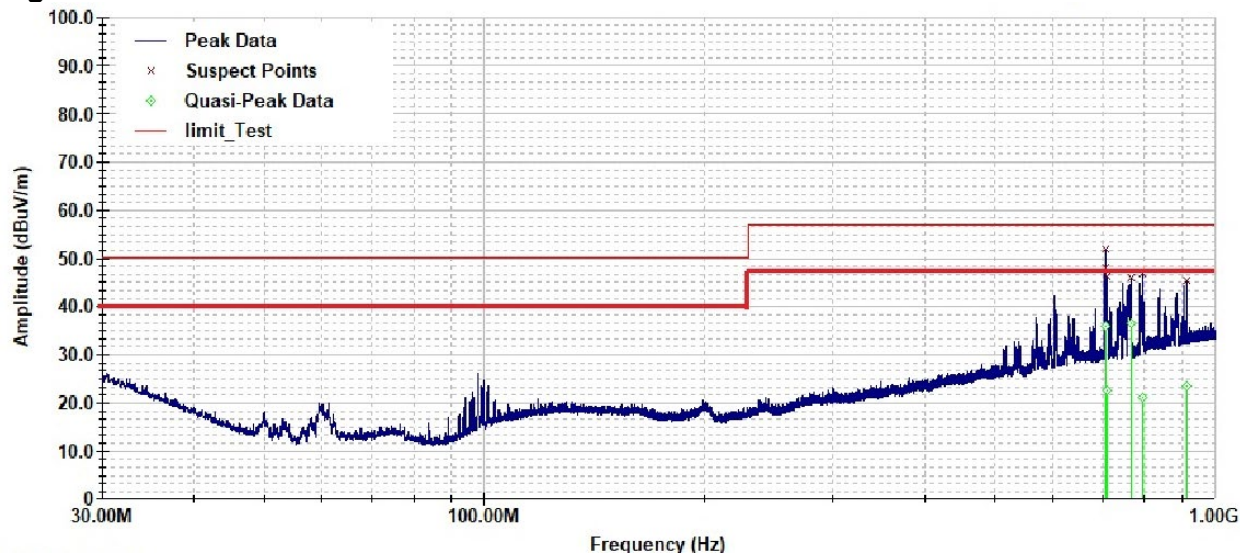

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-247 Issue 3, and RSS-GEN Issue 5 Intentional Radiators. The EUT configuration demonstrated a minimum margin of -3.3 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Test procedures of ANSI C63.10-2013 paragraph 6, and KDB 558074 were used during transmitter testing. Test sample EUT Antenna Port Conducted #2 was provided for testing antenna port conducted emissions. This sample was modified by replacing the internal antenna with a 50-ohm antenna port connector and attenuator for testing purposes. The transmitter peak and average power was measured at the antenna port using a wideband RF power meter as described in KDB 558074 and ANSI C63.10-2013. Average power measured did not include any time intervals during which the transmitter was off or transmitting at a reduced power level. The peak Power Spectral Density (PKPSD) was measured as defined in KDB 558074 and ANSI C63.10-2013. DTS Emission bandwidth was measured as described in KDB 558074 and ANSI C63.10-2013. The amplitude of each harmonic and general radiated emission was measured on the SAC at distance of 3 meters from the FSM antenna (radiated emission testing was performed on EUT Radiated #1 representative of production equipment with integral antenna). The EUT was positioned on supporting turntable elevated as required above the ground plane, at a distance of 3 meters from the FSM antenna. Radiated emission investigations were performed from 9 kHz to 25,000 MHz. Each radiated emission was maximized by varying the FSM antenna height and polarization, and by rotating the turntable. The worst-case amplitude of each emission was then recorded from the analyzer display. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Radiated Emissions were measured in dB μ V/m @ 3 meters. Plots were taken of transmitter performance (using EUT Antenna Port Conducted #2) for reference in this and other documentation. These are shown in the following figures.

Figure 3 Plot of Transmitter Operation in 2402-2480 MHz Mode 2, Radio 1, BT (2EDR)

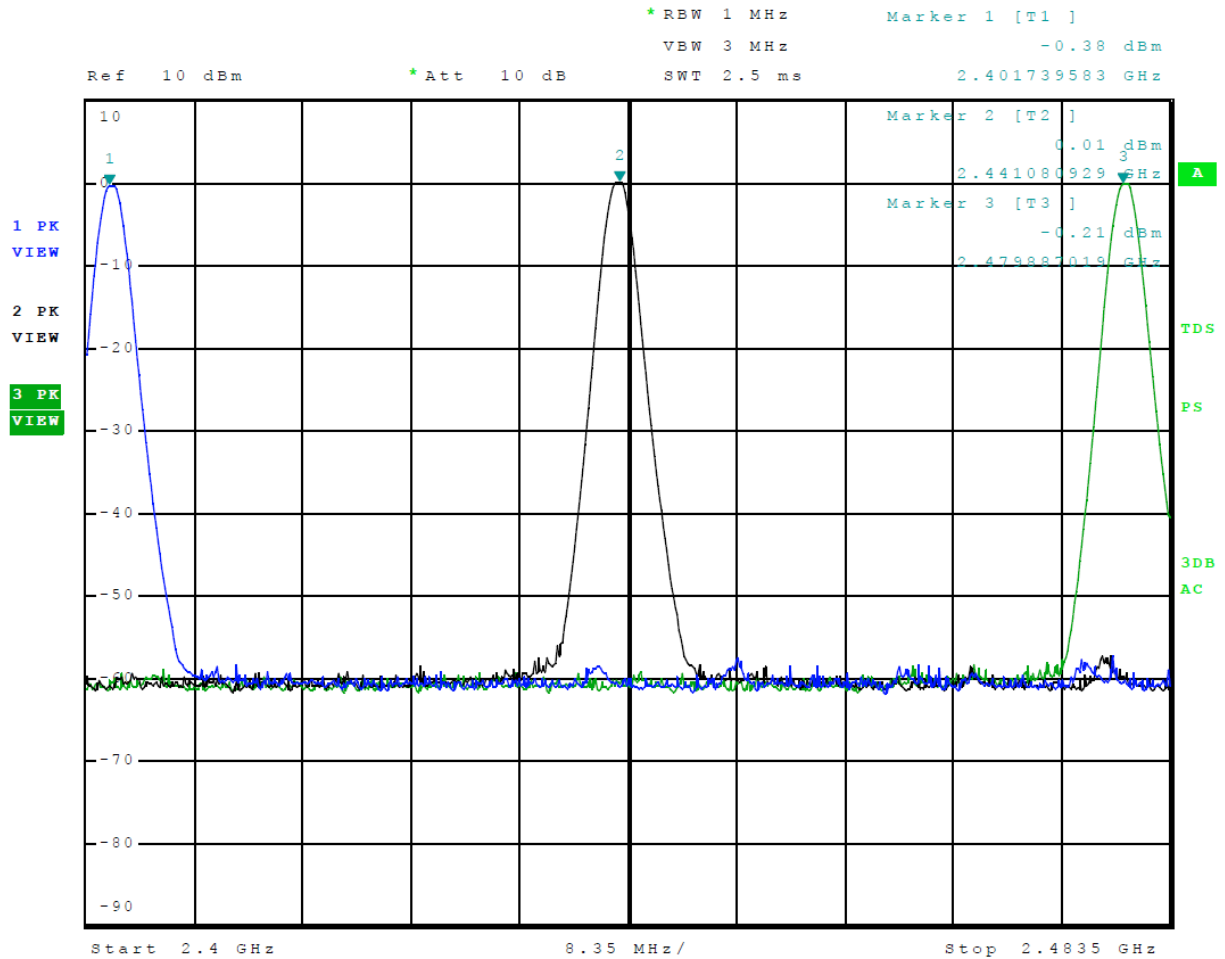


Figure 4 Plot of Transmitter Operation in 2402-2480 MHz Mode 3, Radio 1, BT (3EDR)

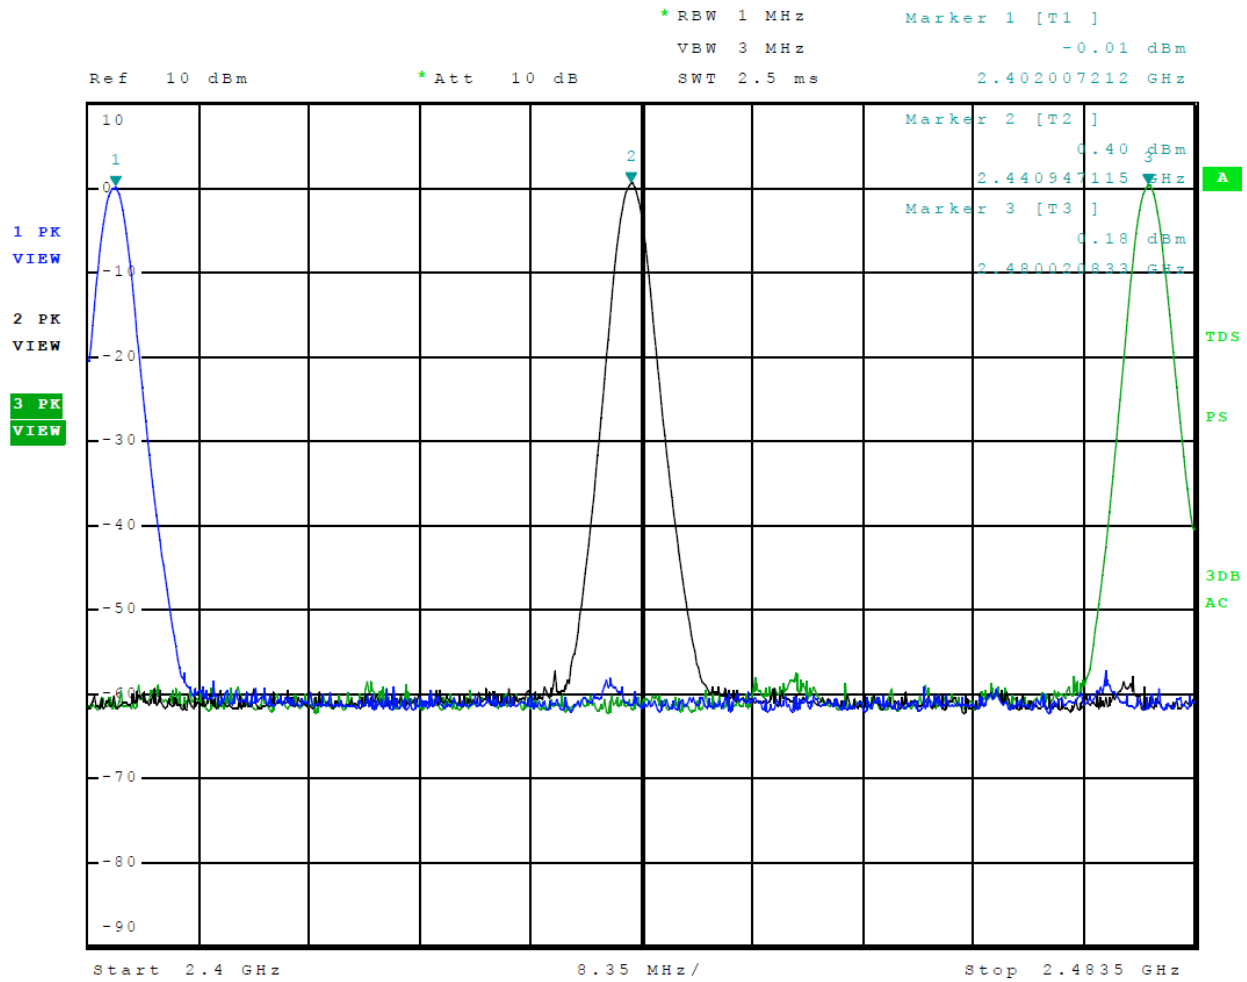


Figure 5 Plot of Transmitter Operation in 2402-2480 MHz Mode 4, Radio 1, BT BLE

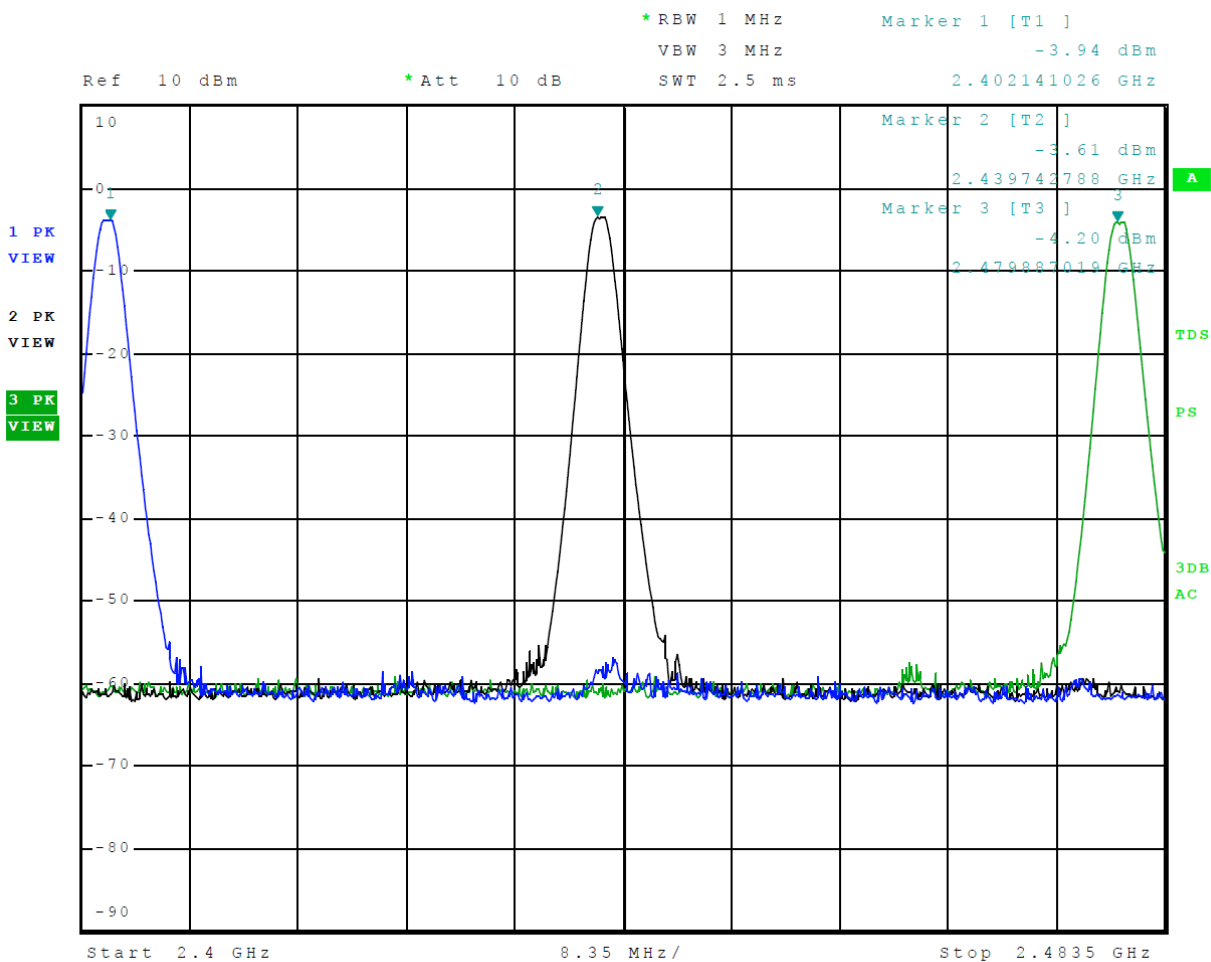


Figure 6 Plot of Transmitter Operation in 2402-2480 MHz Mode 5, Radio 1, 802.11b


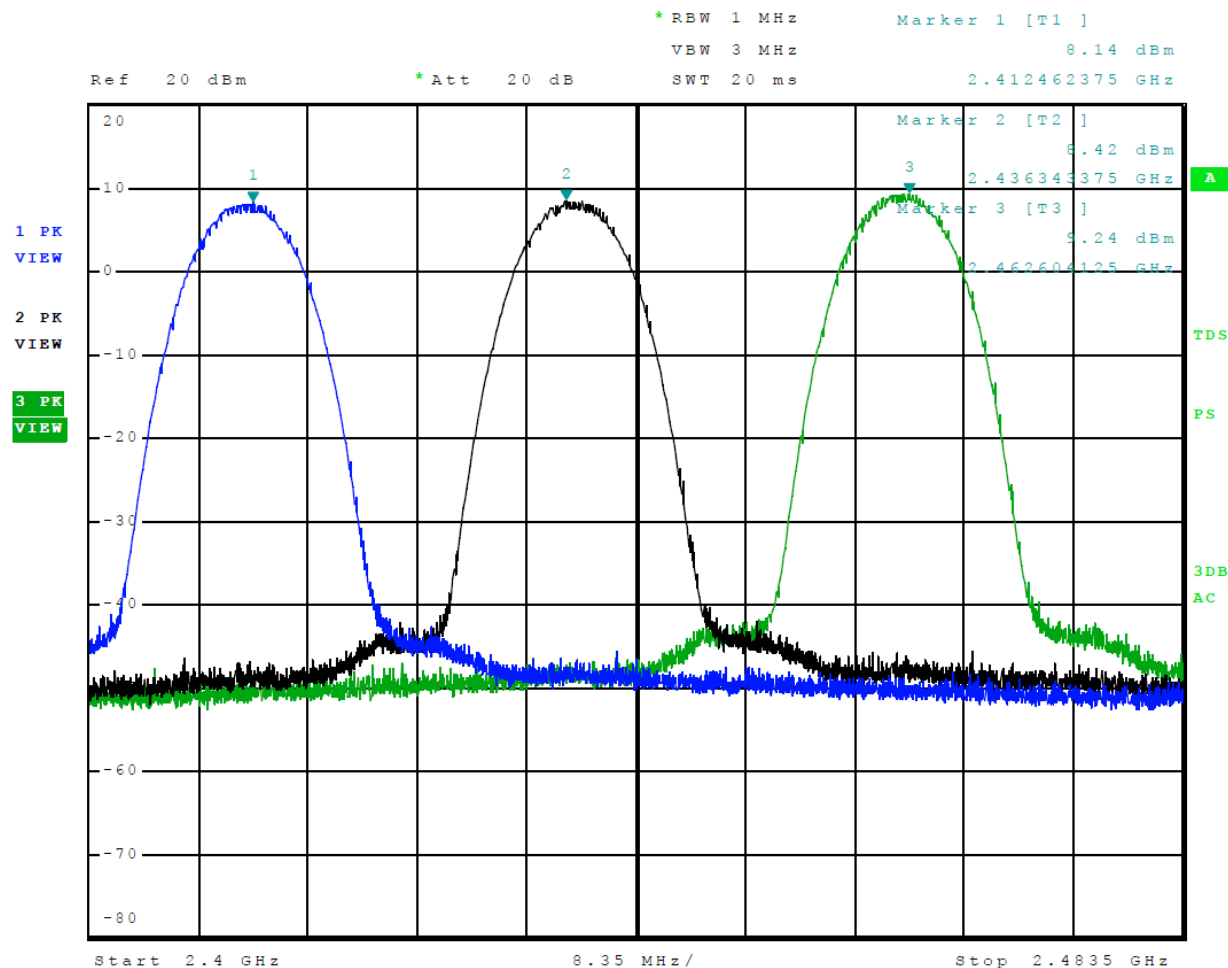


Figure 7 Plot of Transmitter Operation in 2402-2480 MHz Mode 6, Radio 1, 802.11g

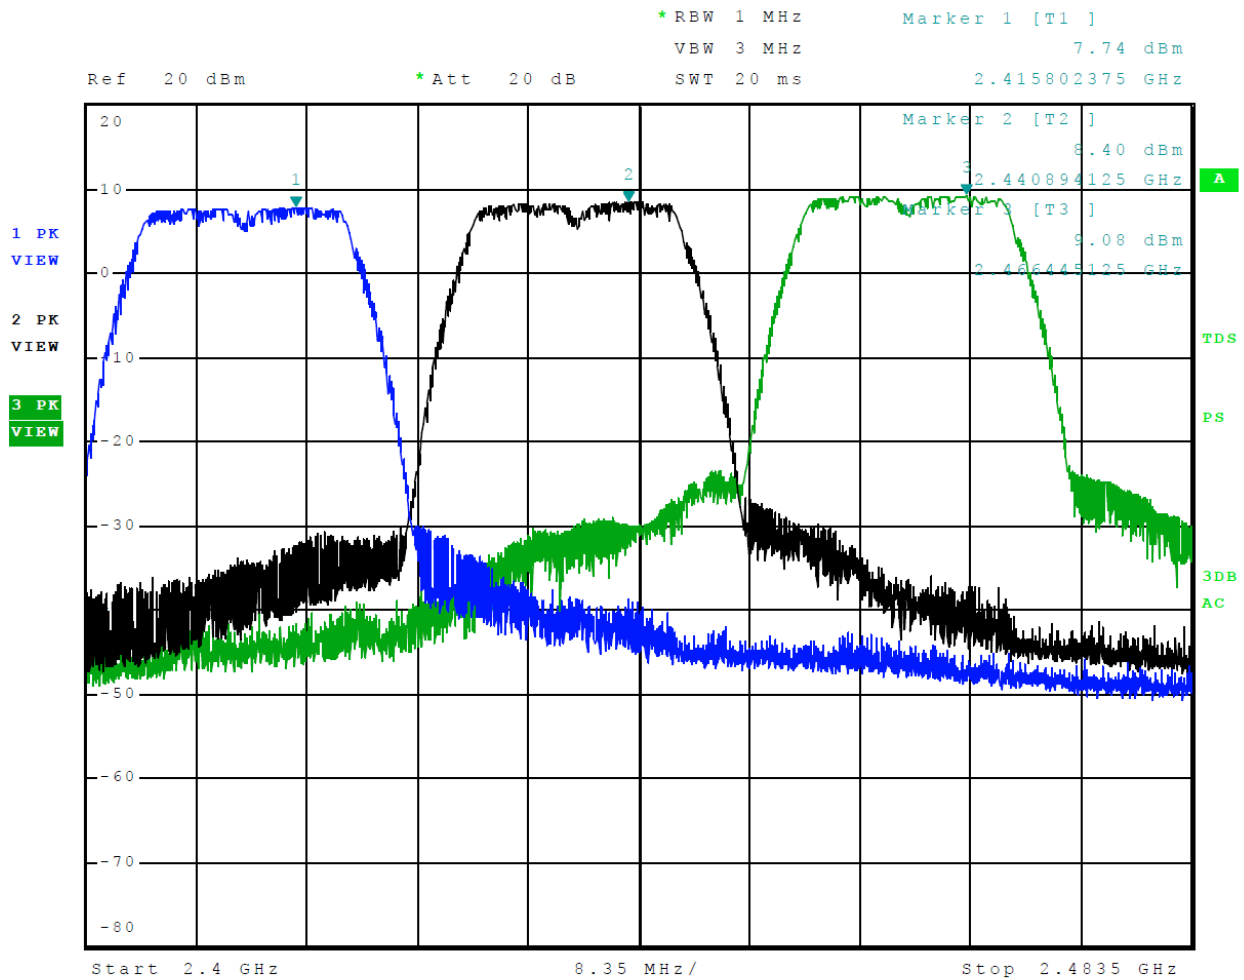

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc


FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 42 of 110

Figure 8 Plot of Transmitter Operation in 2402-2480 MHz Mode 7, Radio 1, 802.11n

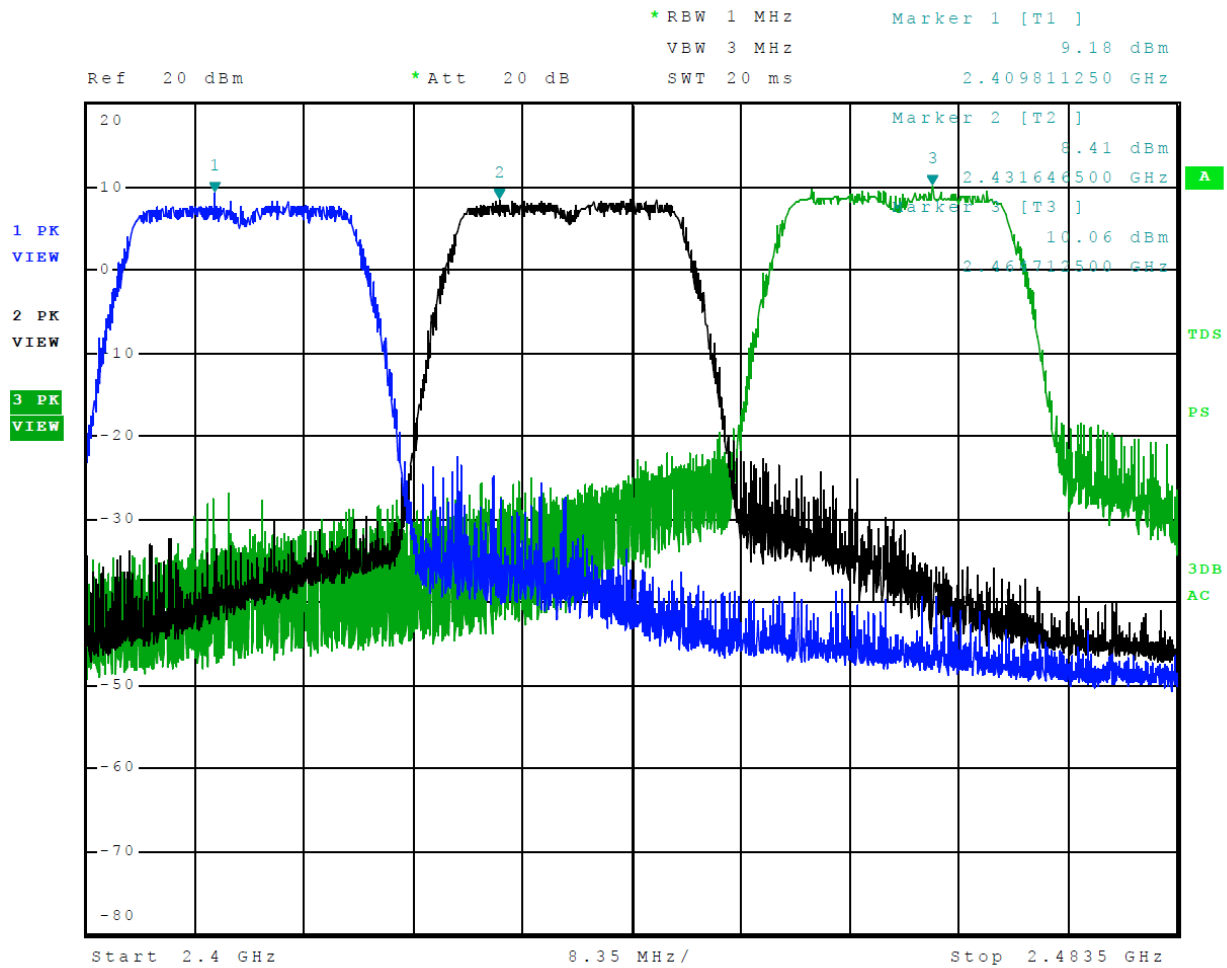

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc


FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 43 of 110

Figure 9 Plot of Transmitter Operation in 2402-2480 MHz Mode 14, Radio 2, 802.11b

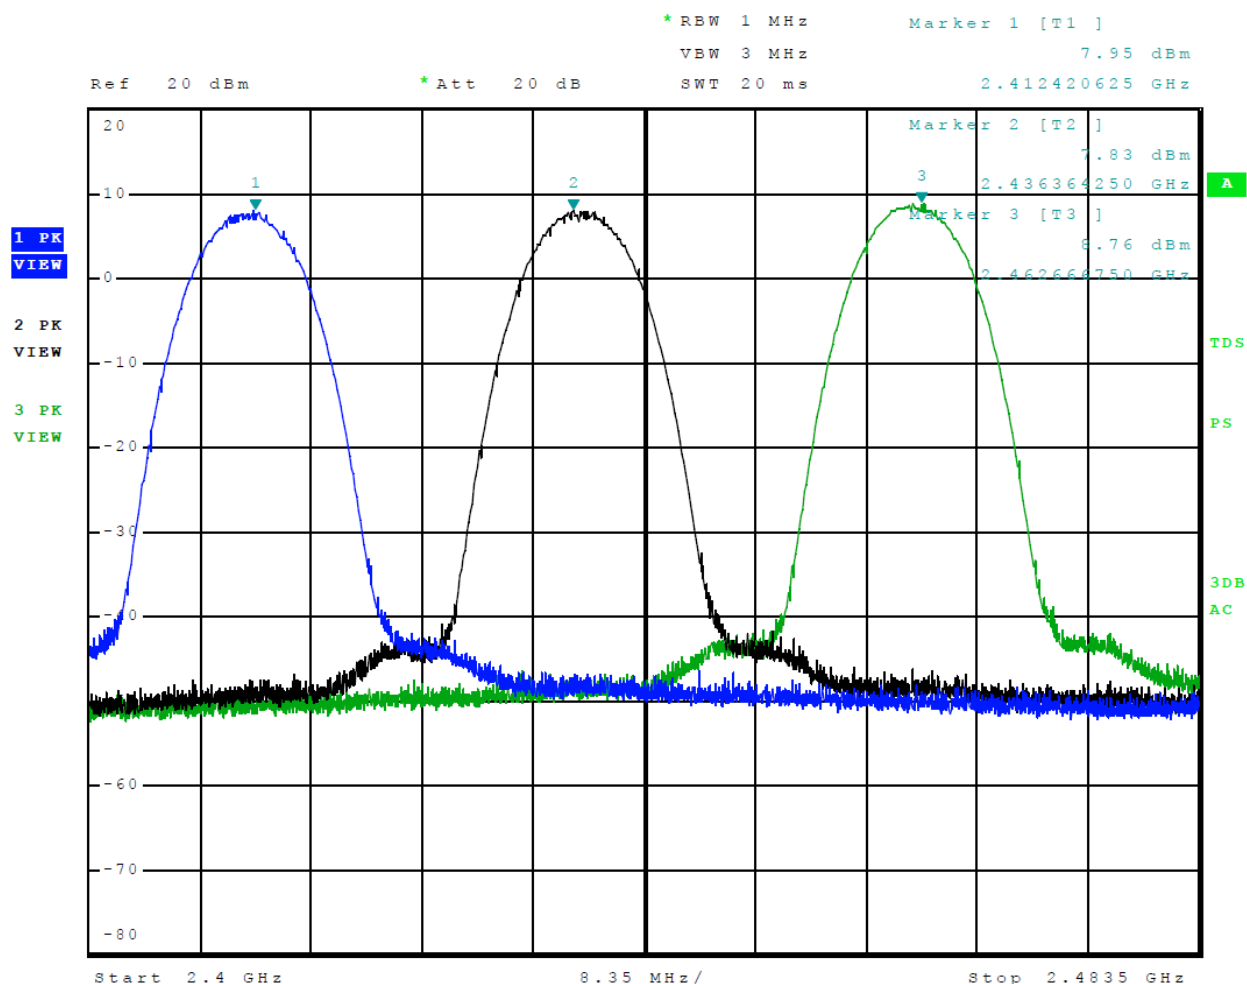

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 44 of 110

Figure 10 Plot of Transmitter Operation in 2402-2480 MHz Mode 15, Radio 2, 802.11g

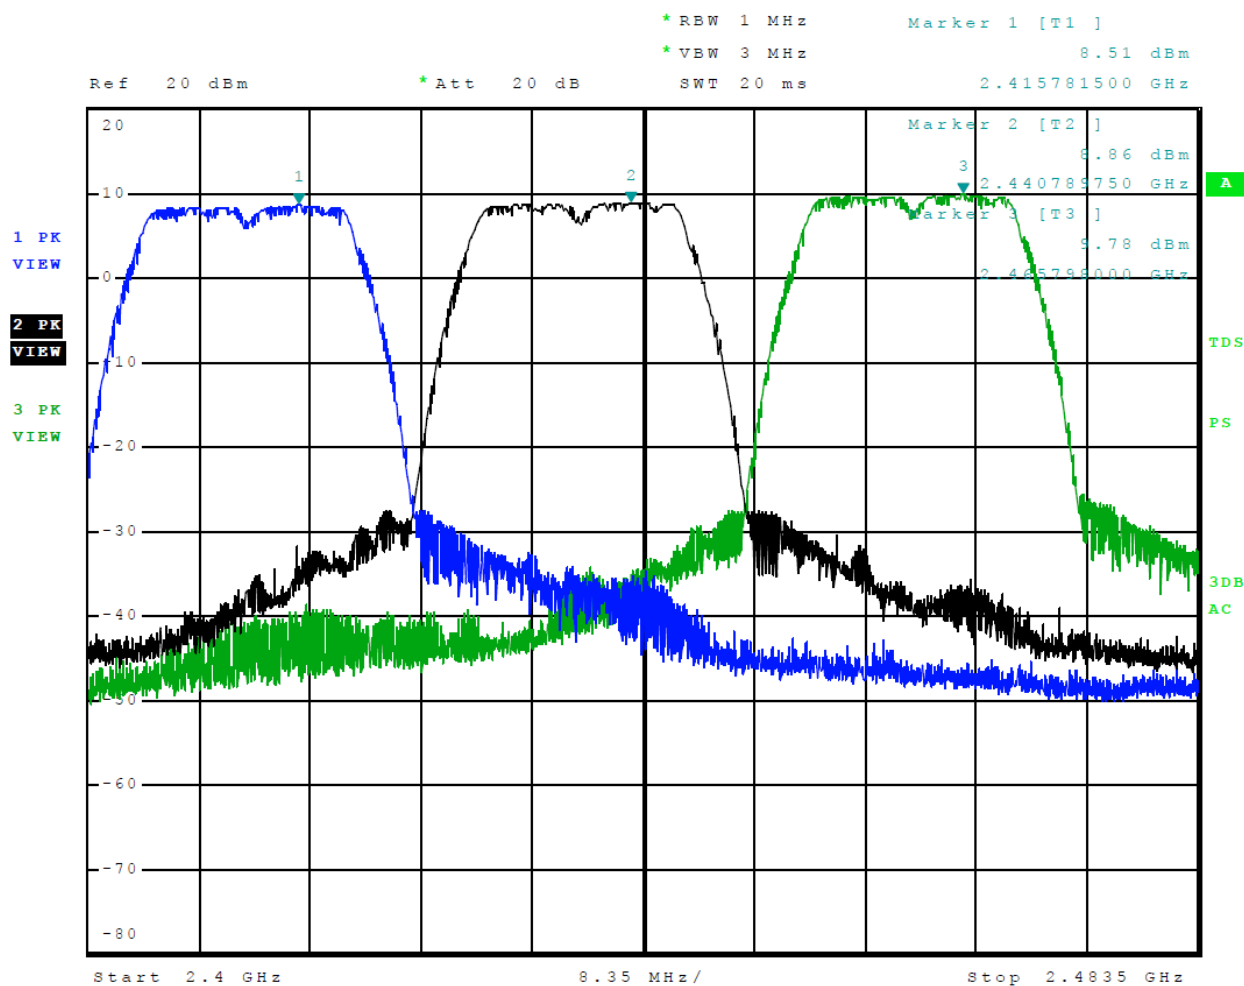


Figure 11 Plot of Transmitter Operation in 2402-2480 MHz Mode 16, Radio 2, 802.11n

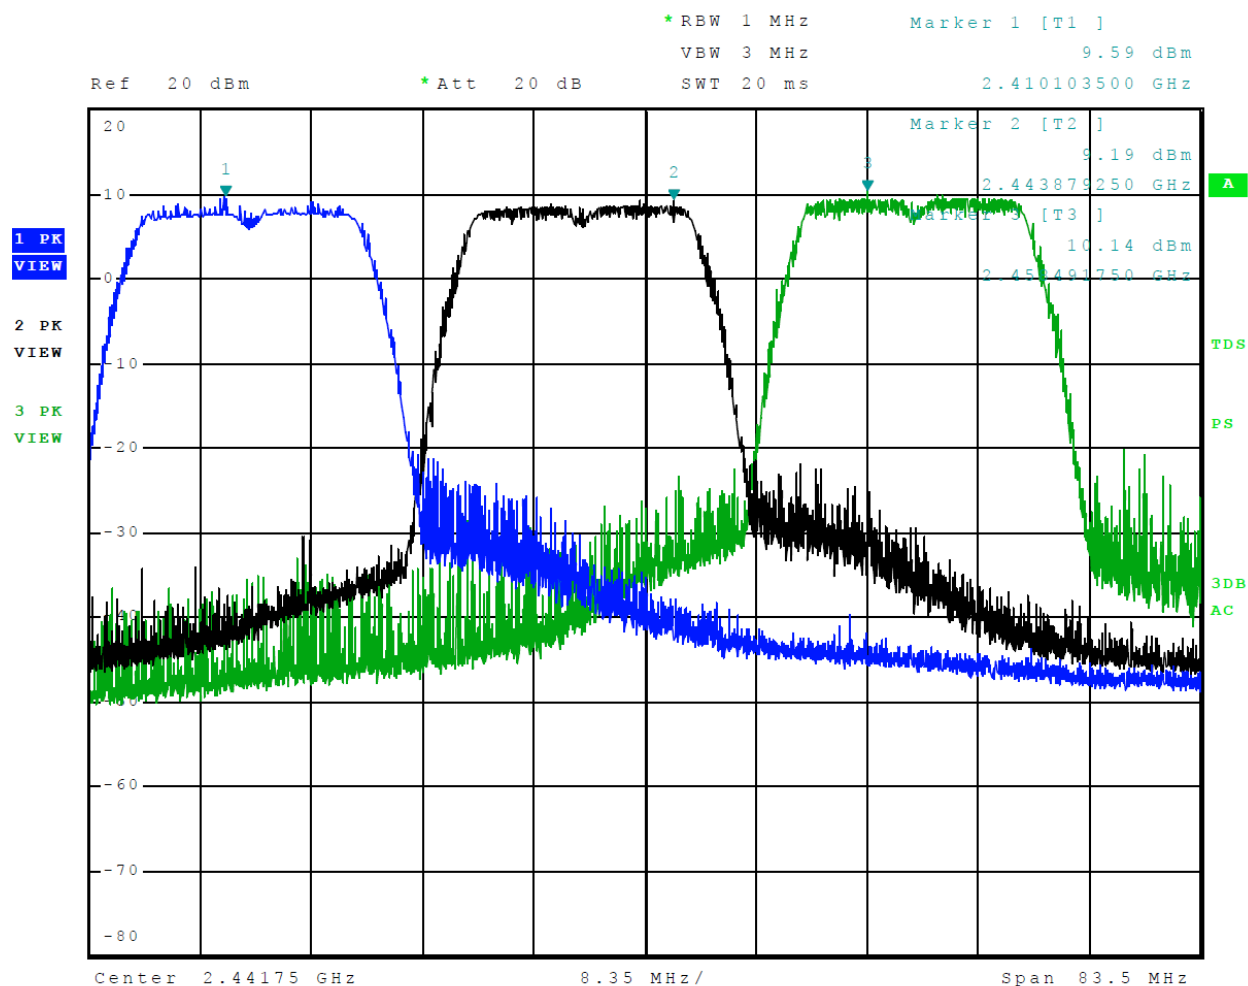


Figure 12 Plot of Emissions Low Band Edge Mode 2, Radio 1, BT (2EDR)

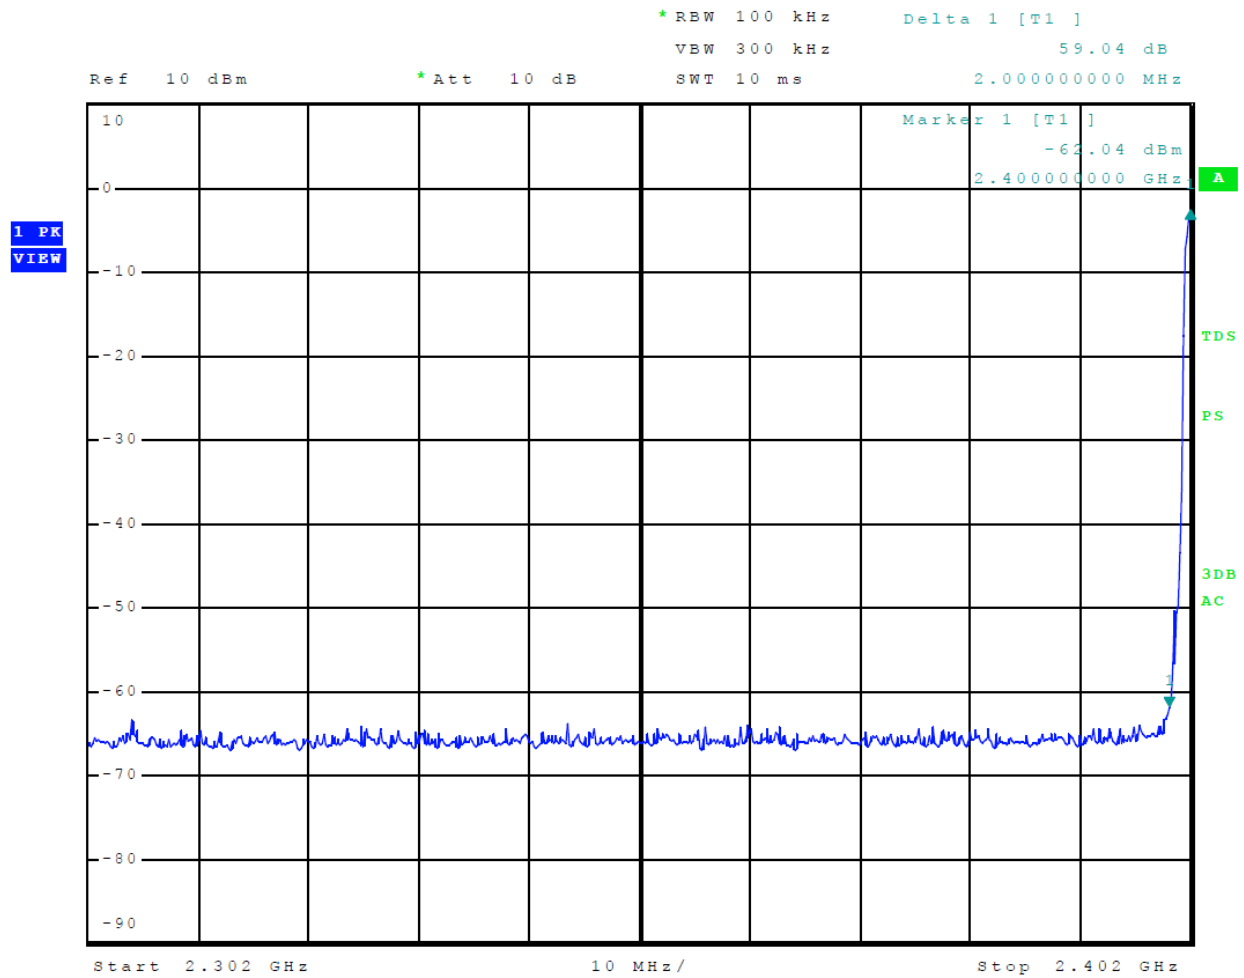


Figure 13 Plot of Emissions Low Band Edge Mode 3, Radio 1, BT (3EDR)

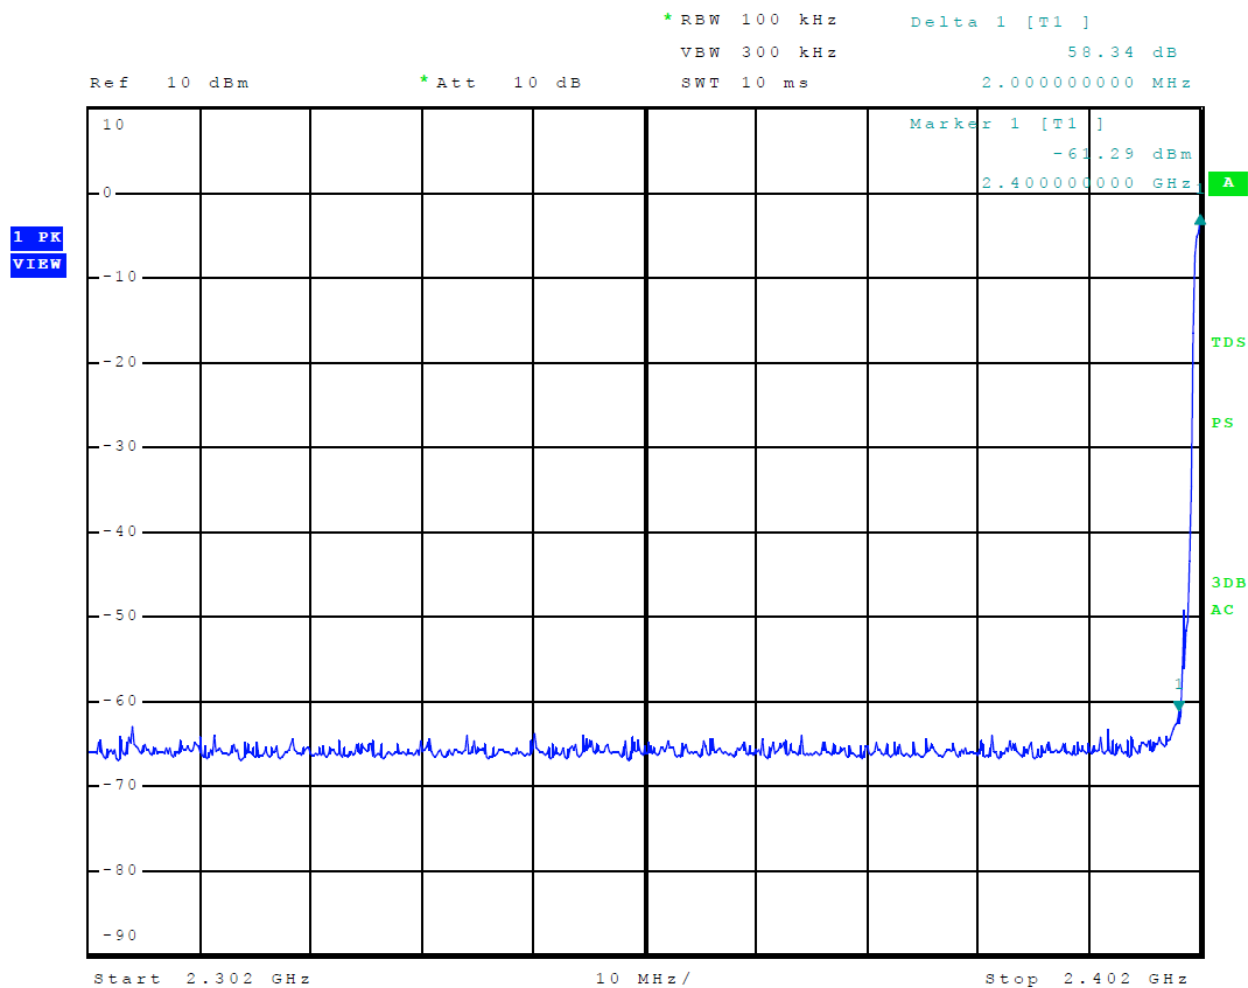


Figure 14 Plot of Emissions Low Band Edge Mode 4, Radio 1, BT BLE

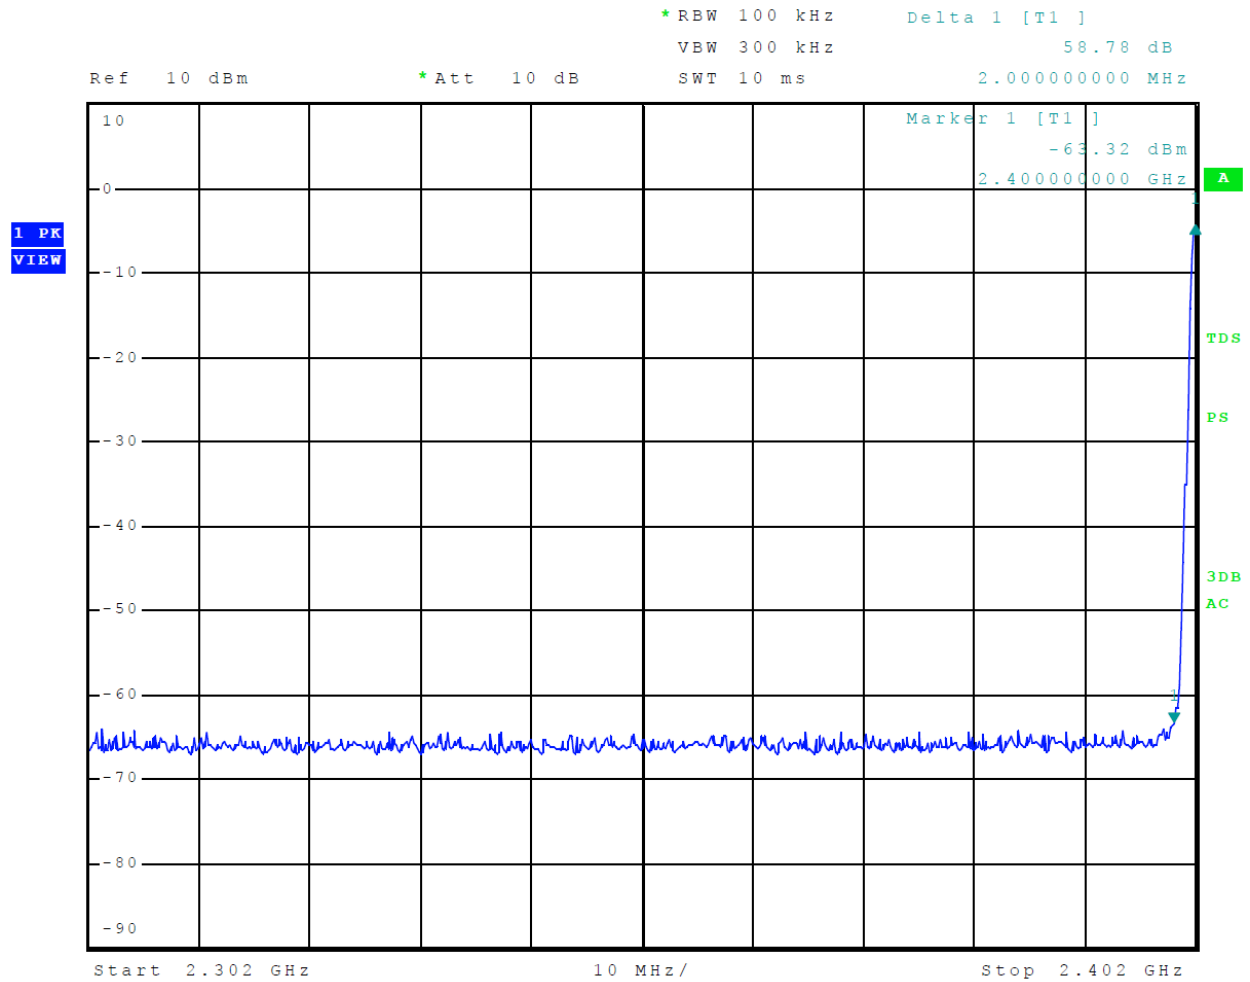


Figure 15 Plot of Emissions Low Band Edge Mode 5, Radio 1, 802.11b

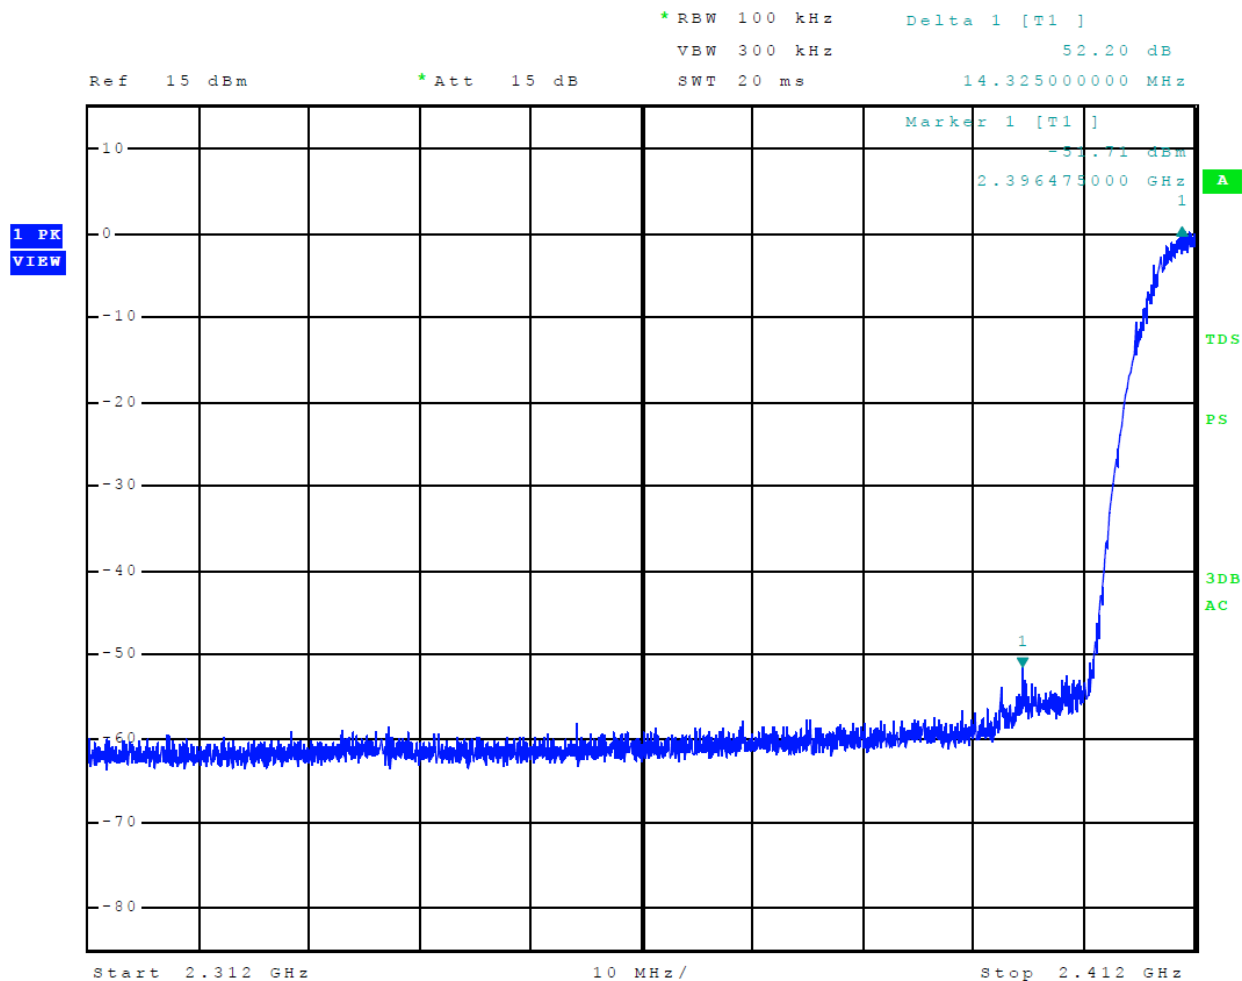


Figure 16 Plot of Emissions Low Band Edge Mode 6, Radio 1, 802.11g

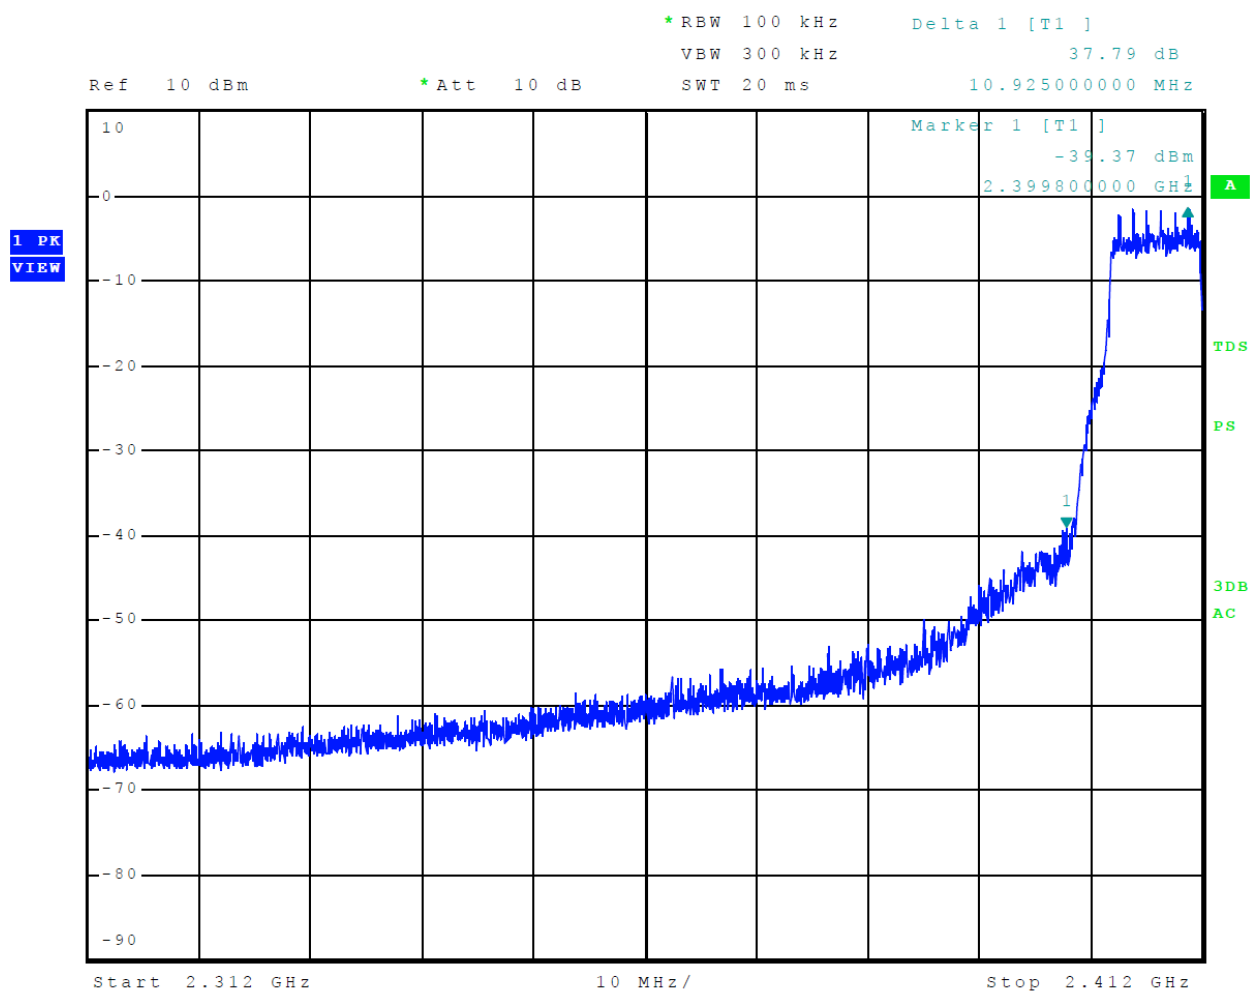


Figure 17 Plot of Emissions Low Band Edge Mode 7, Radio 1, 802.11n

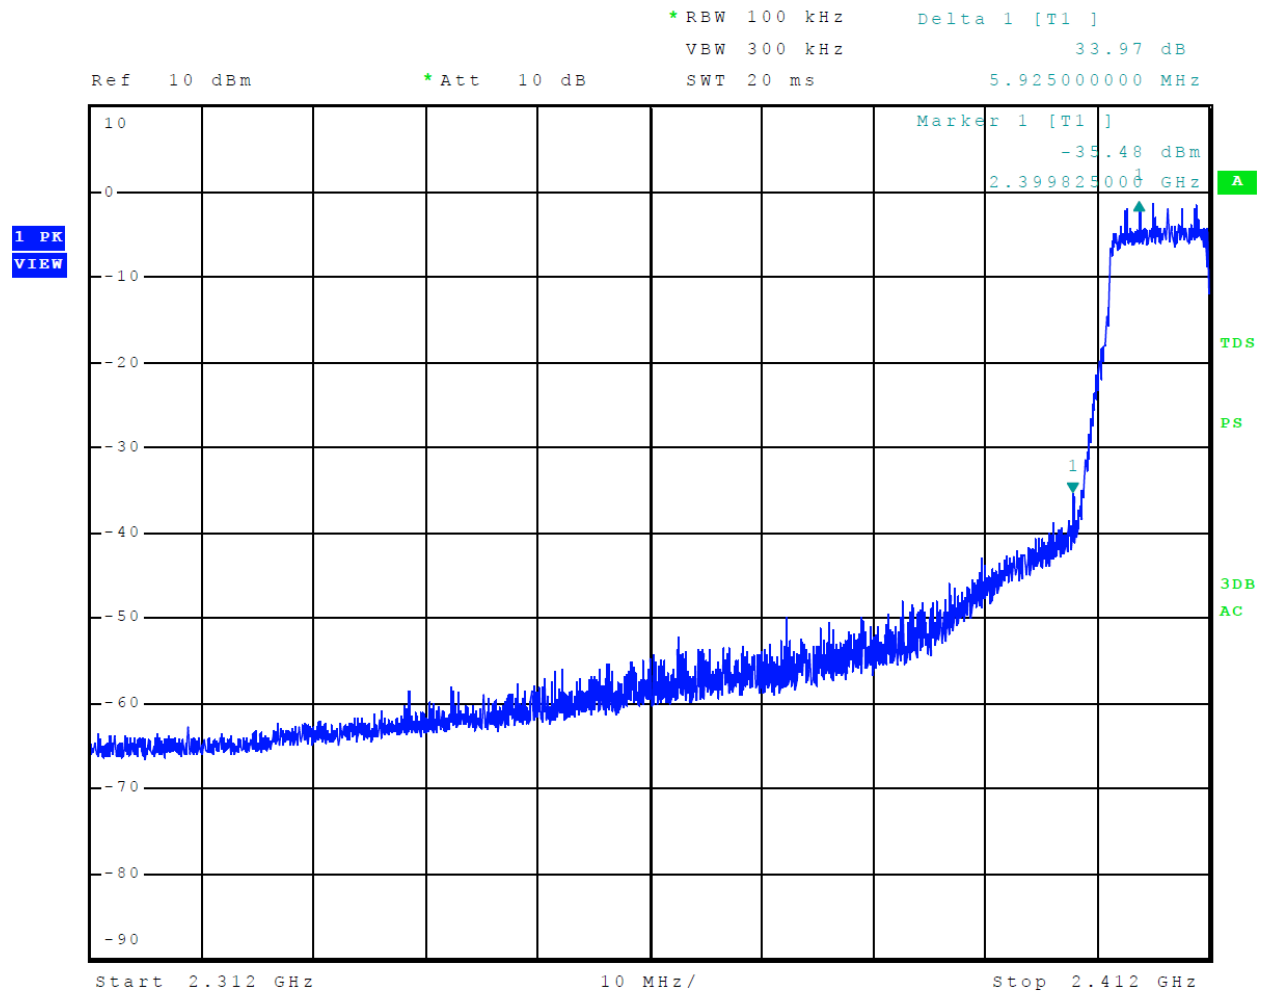


Figure 18 Plot of Emissions Low Band Edge Mode 14, Radio 2, 802.11b

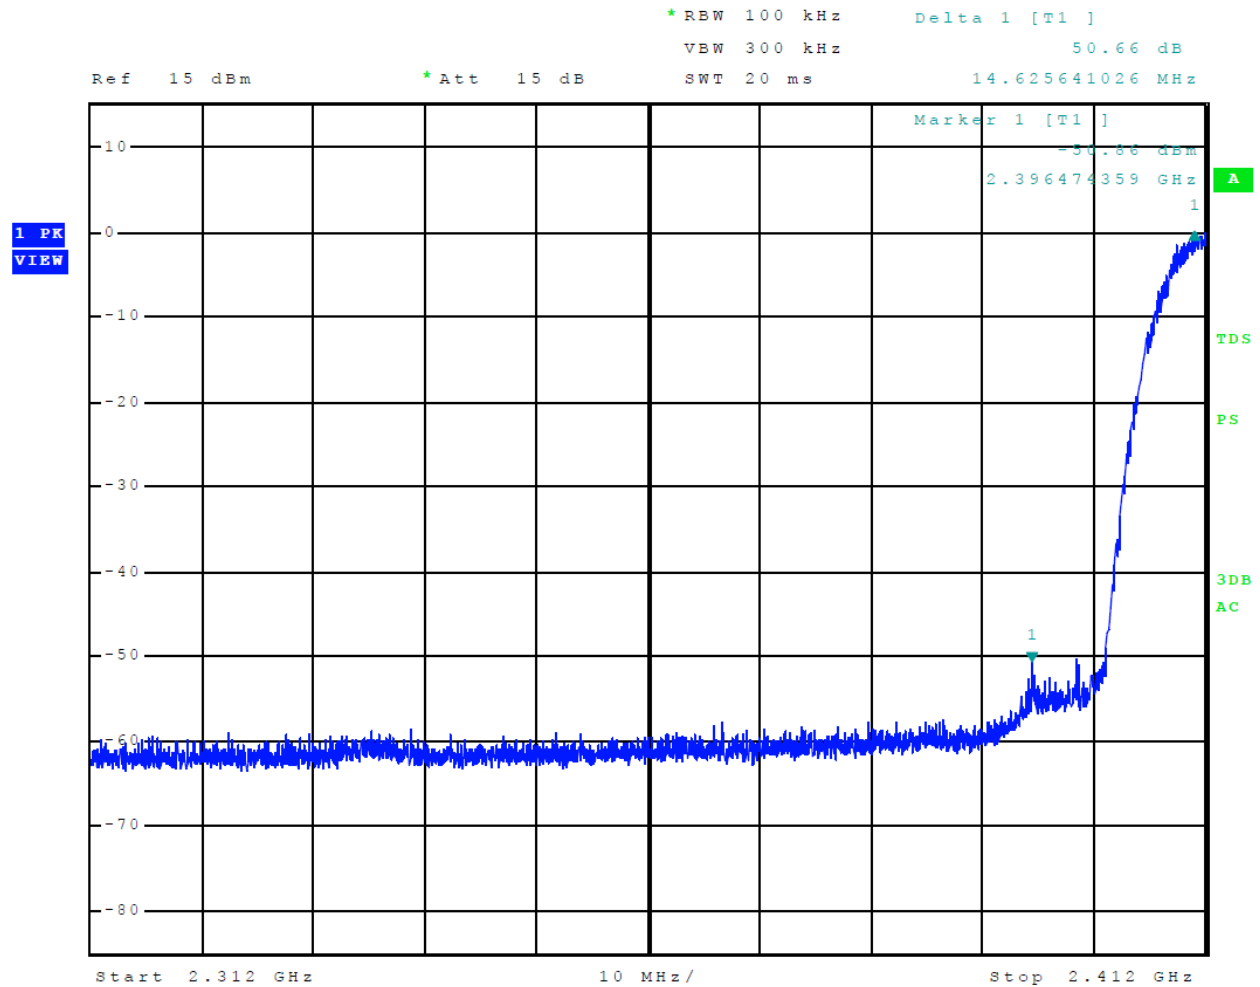


Figure 19 Plot of Emissions Low Band Edge Mode 15, Radio 2, 802.11g

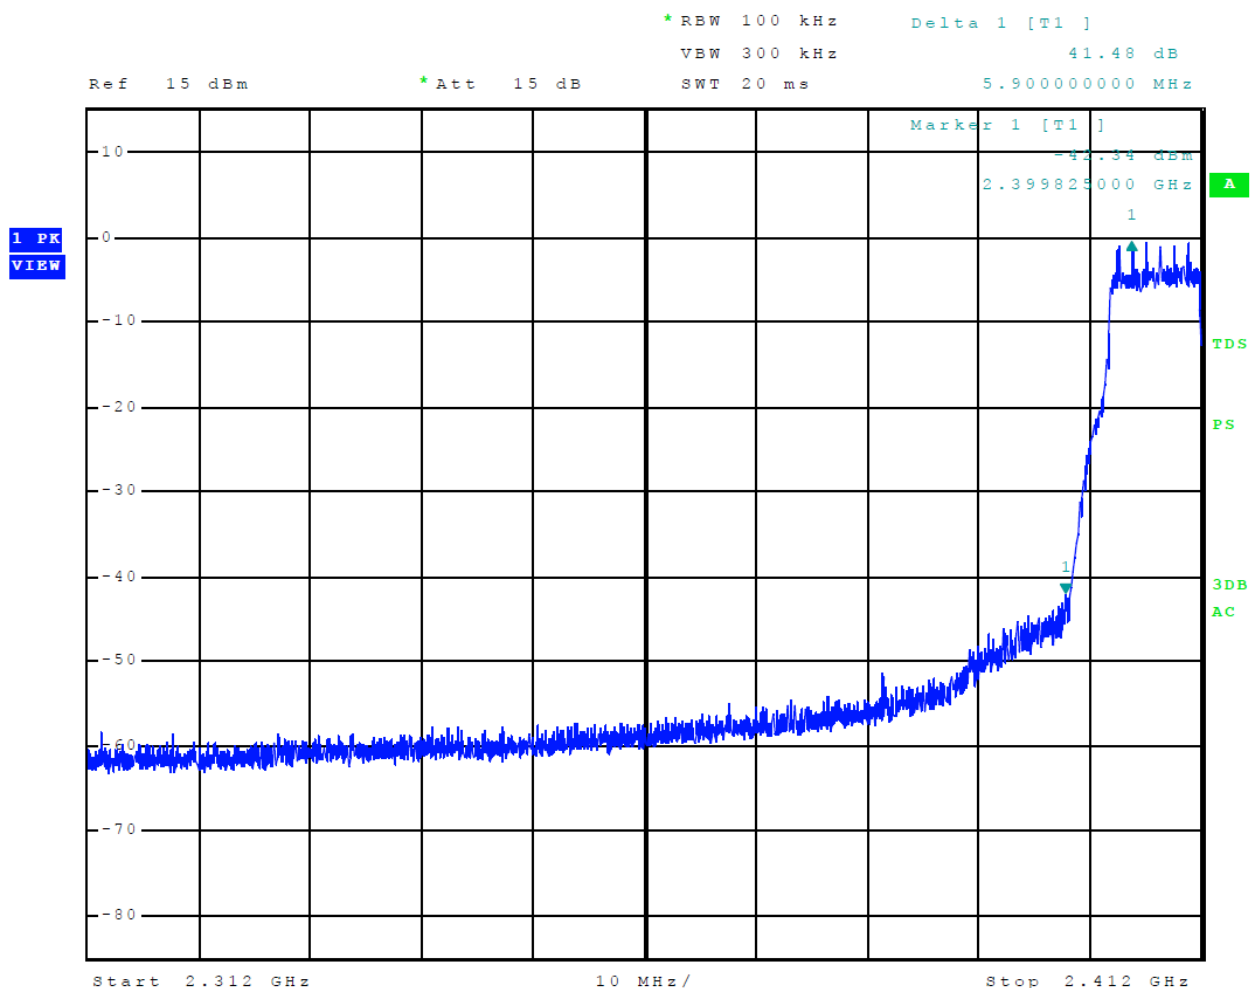


Figure 20 Plot of Emissions Low Band Edge Mode 16, Radio 2, 802.11n

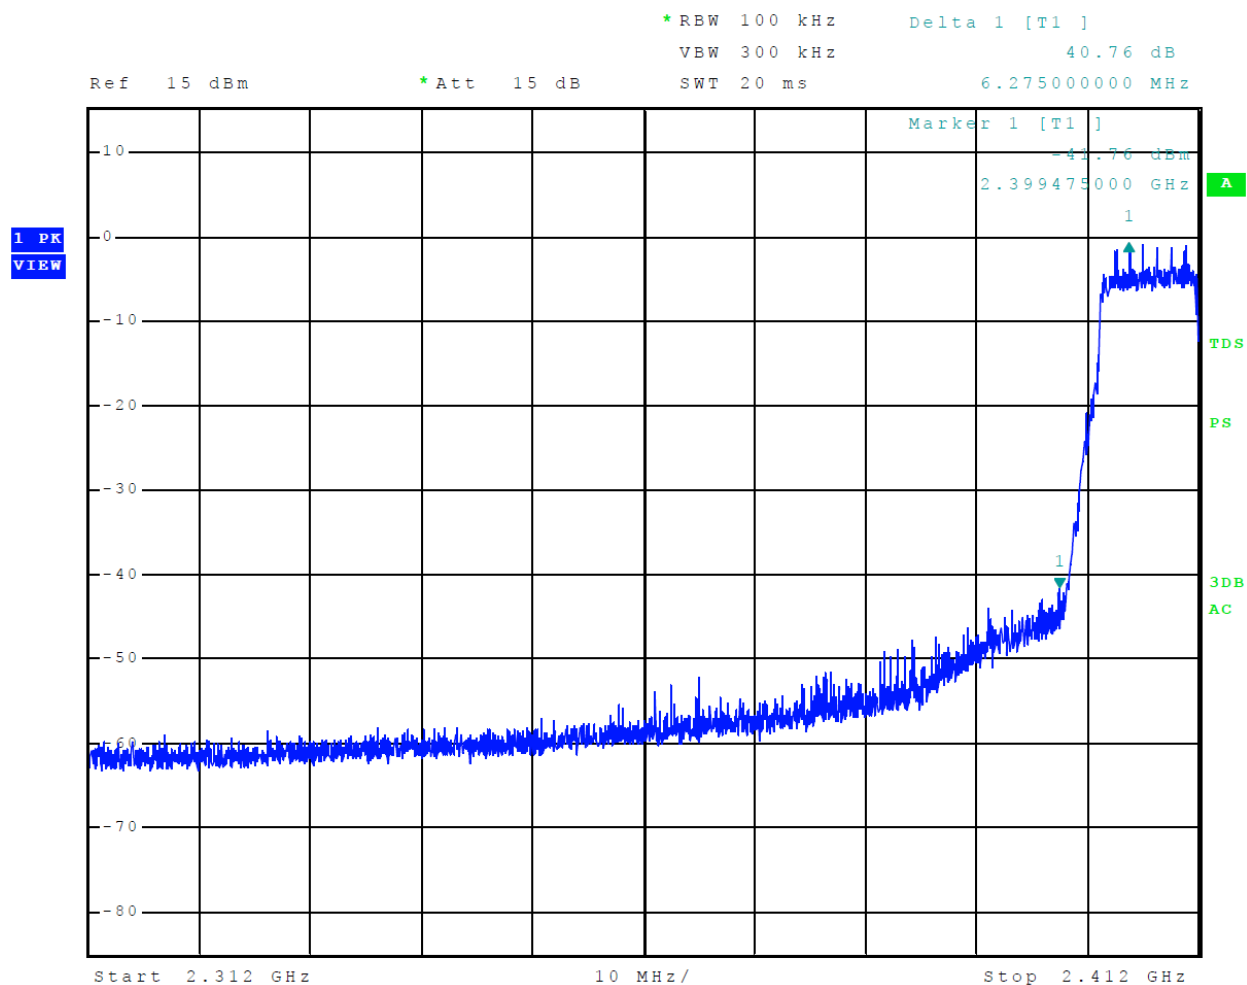


Figure 21 Plot of Transmitter Emissions High Band Edge Mode 2, Radio 1, BT (2EDR)

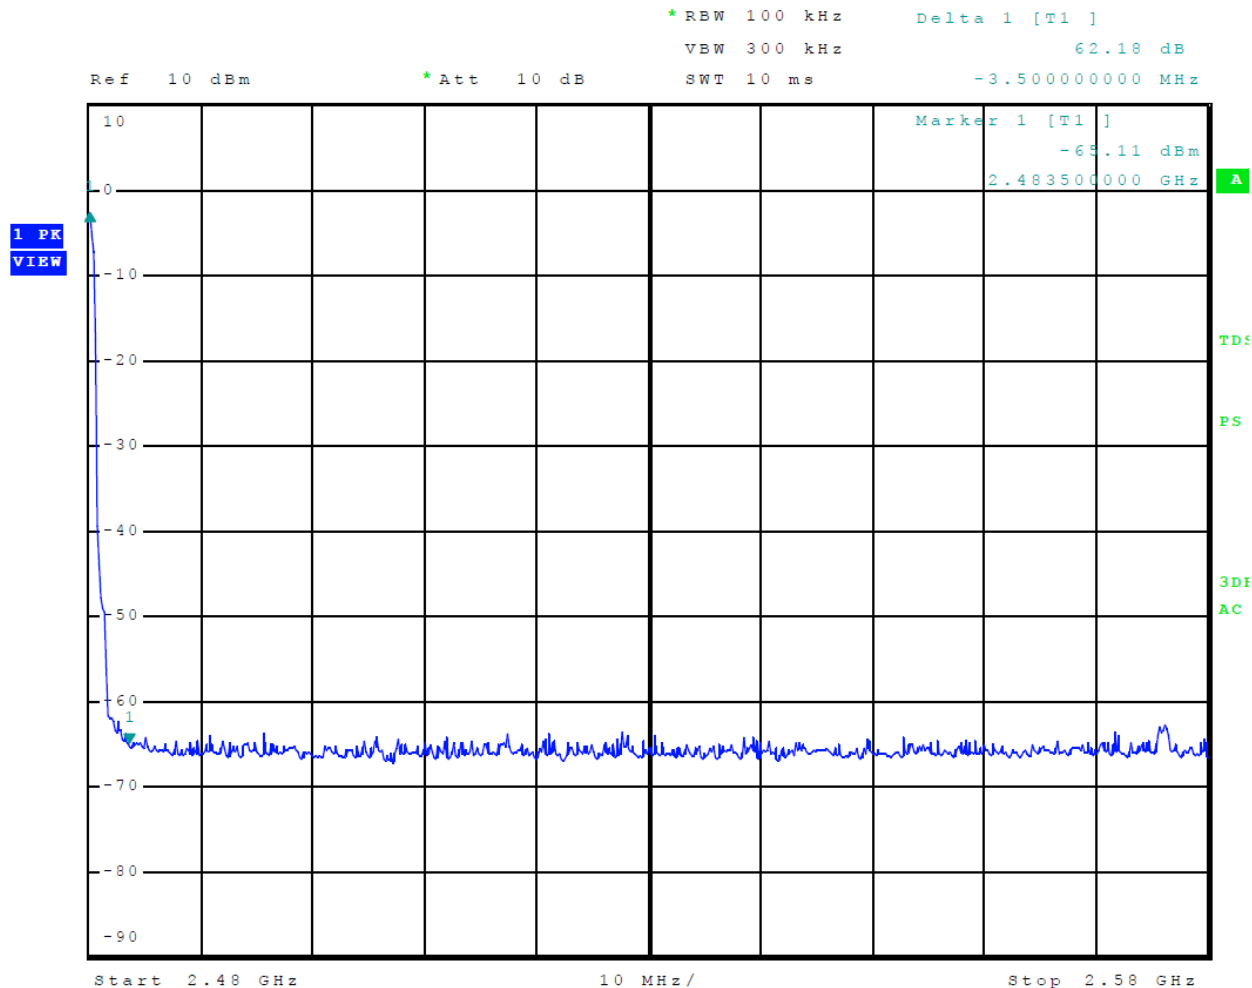


Figure 22 Plot of Transmitter Emissions High Band Edge Mode 3, Radio 1, BT (3EDR)


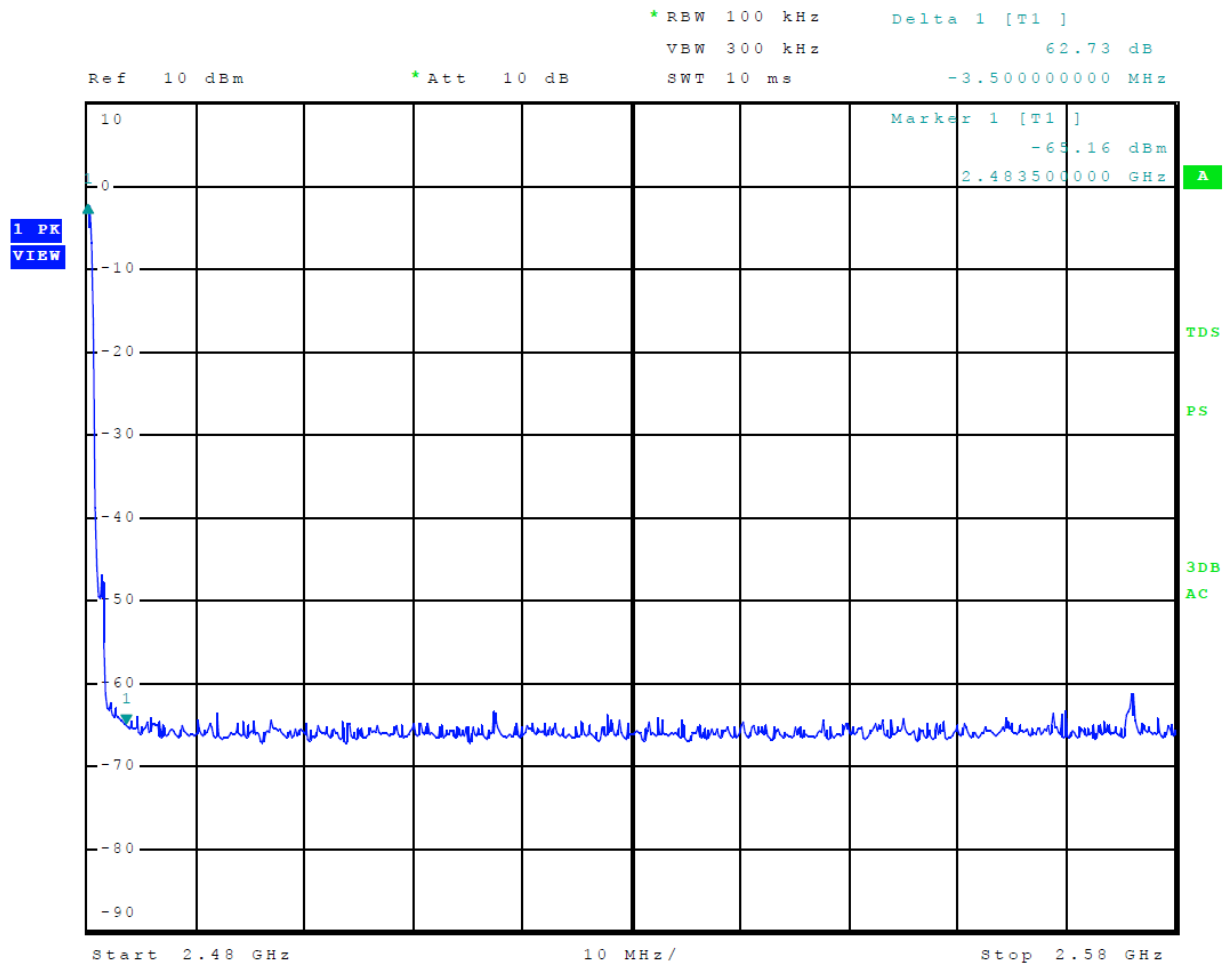


Figure 23 Plot of Transmitter Emissions High Band Edge Mode 4, Radio 1, BT BLE

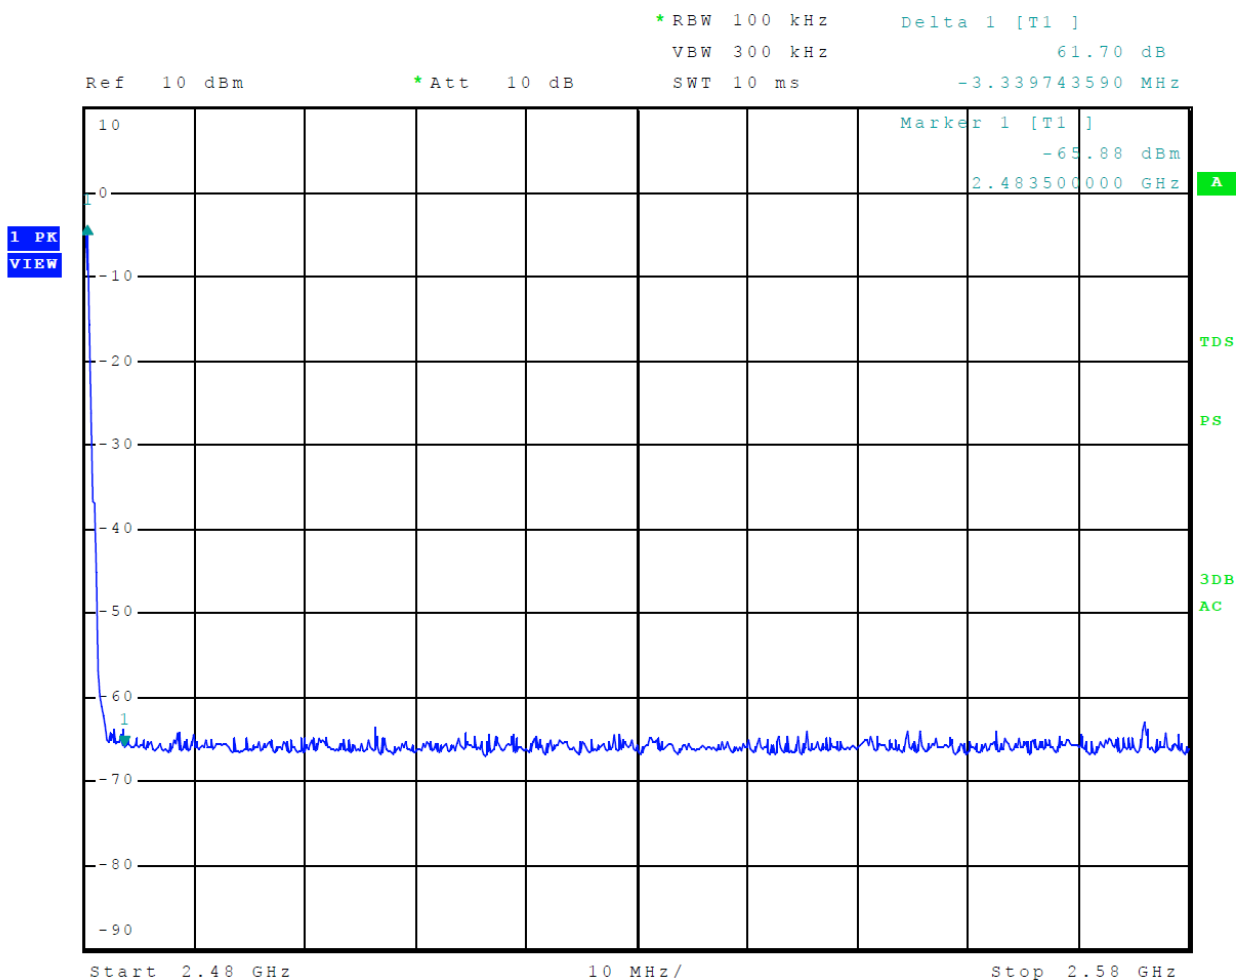

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 58 of 110

Figure 24 Plot of Transmitter Emissions High Band Edge Mode 5, Radio 1, 802.11b

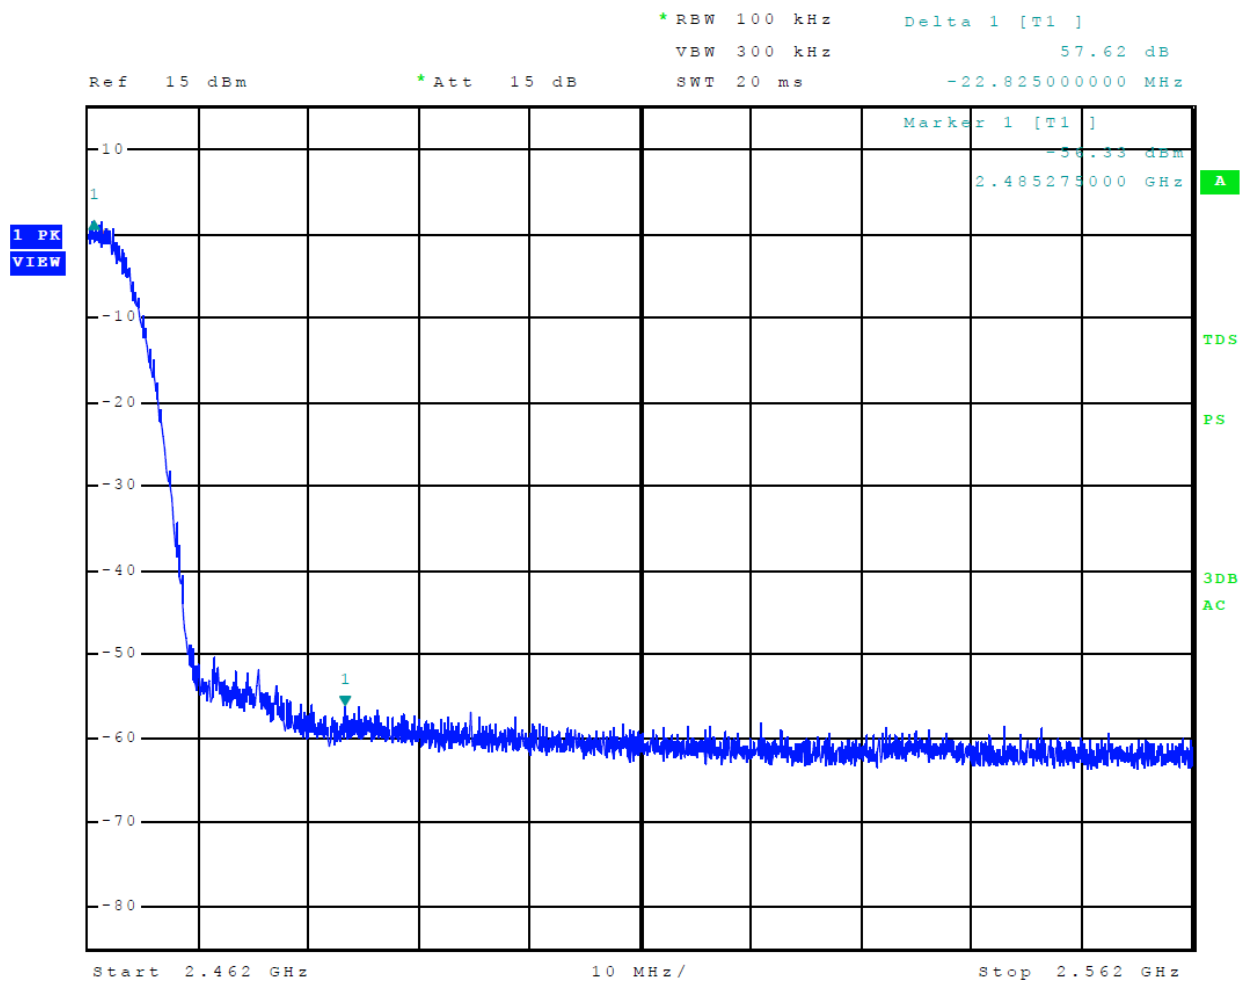


Figure 25 Plot of Transmitter Emissions High Band Edge Mode 6, Radio1, 802.11g

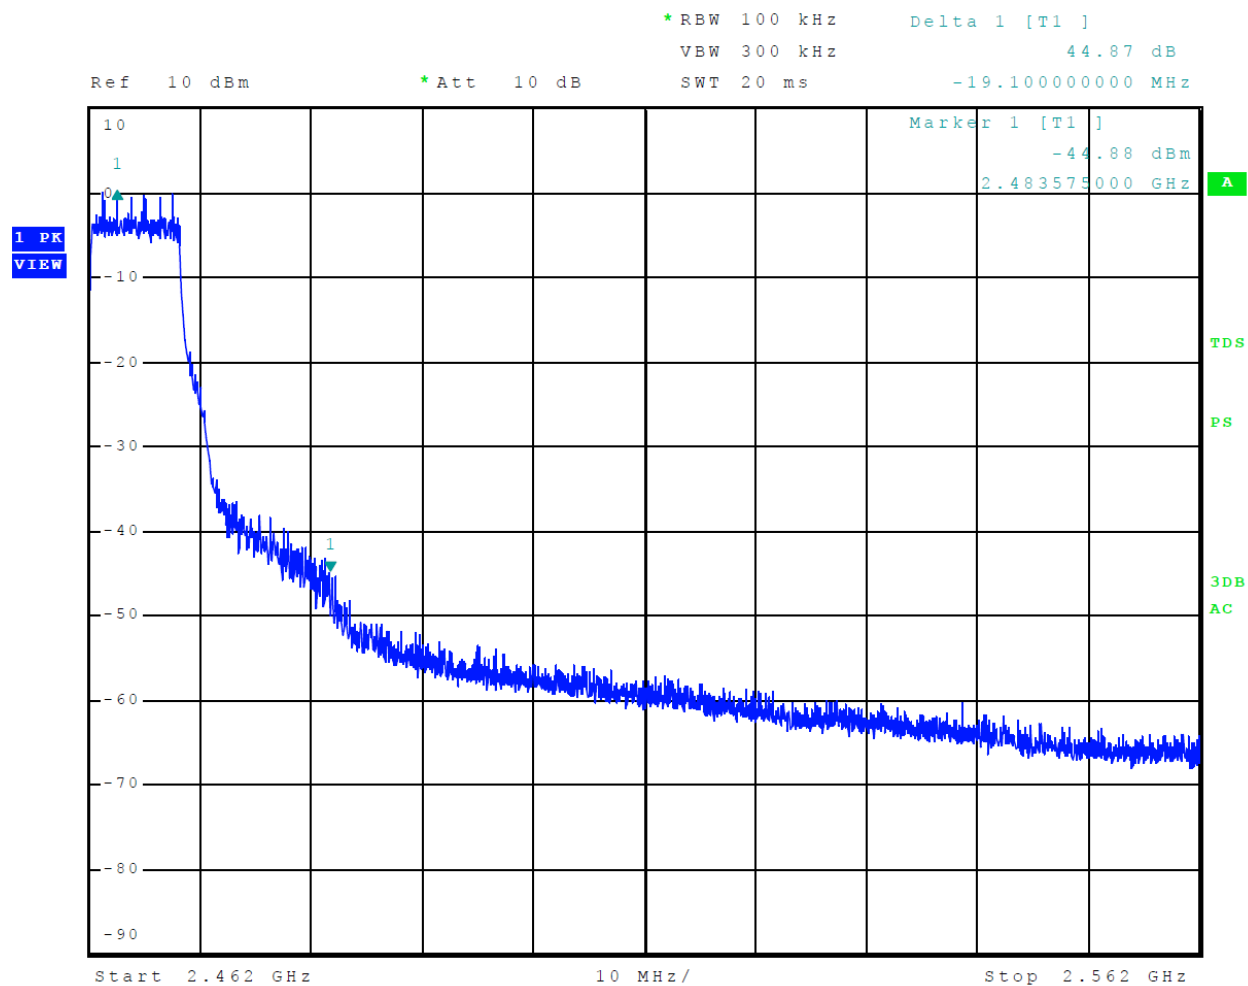


Figure 26 Plot of Transmitter Emissions High Band Edge Mode 7, Radio 1, 802.11n

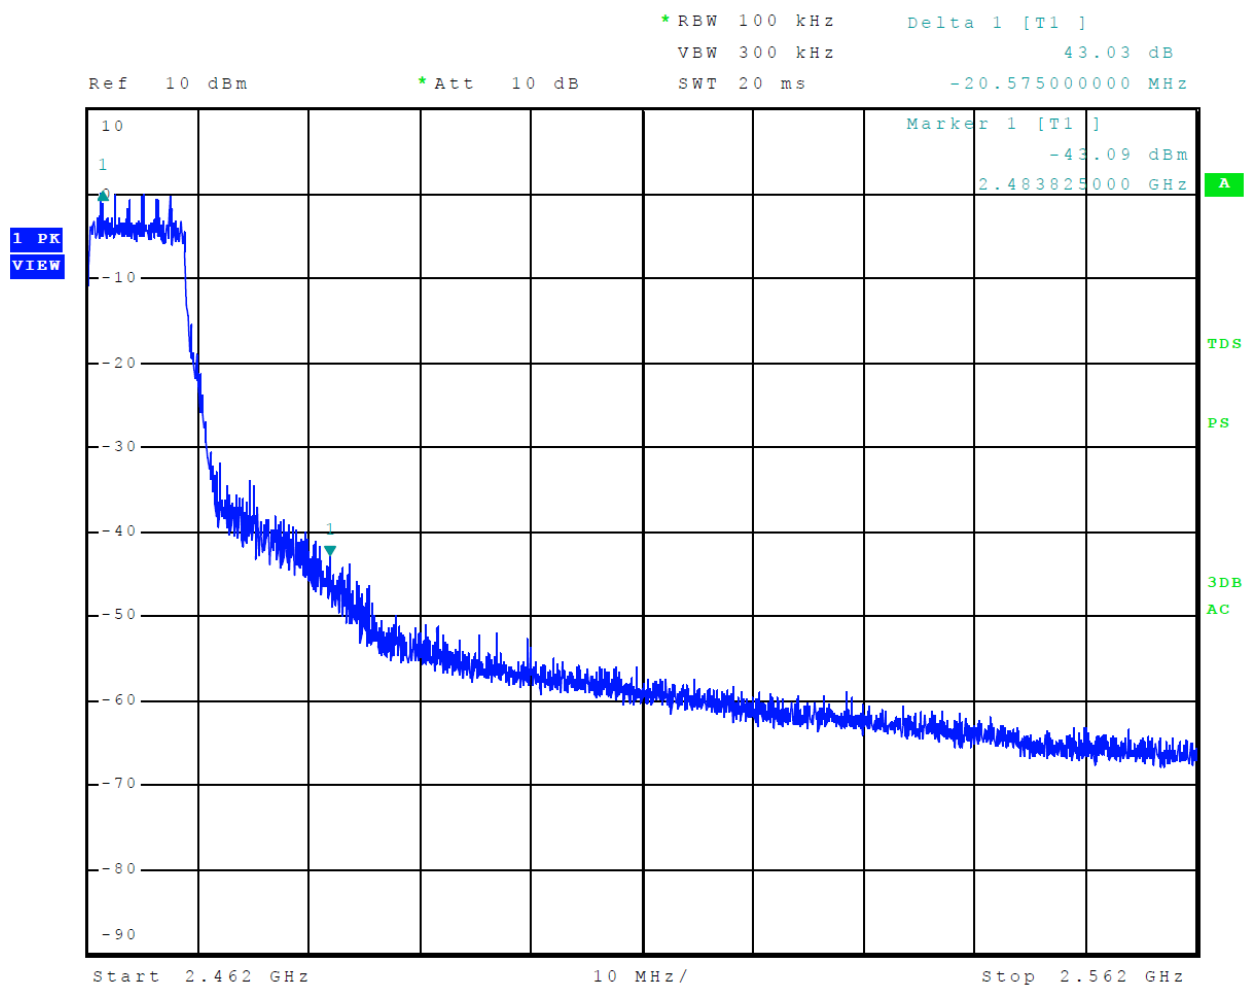


Figure 27 Plot of Transmitter Emissions High Band Edge Mode 14, Radio 2, 802.11b

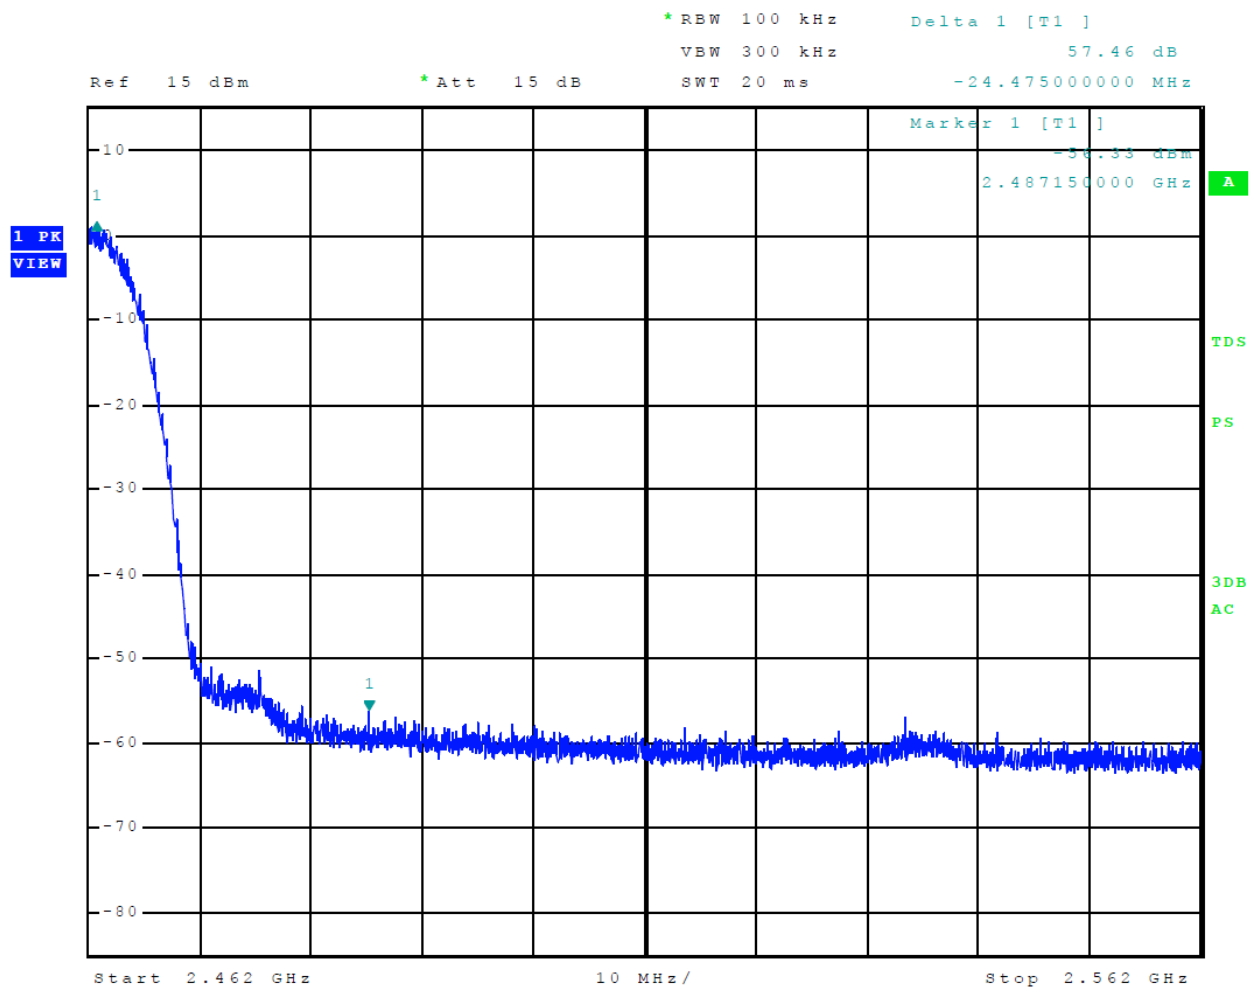


Figure 28 Plot of Transmitter Emissions High Band Edge Mode 15, Radio 2, 802.11g

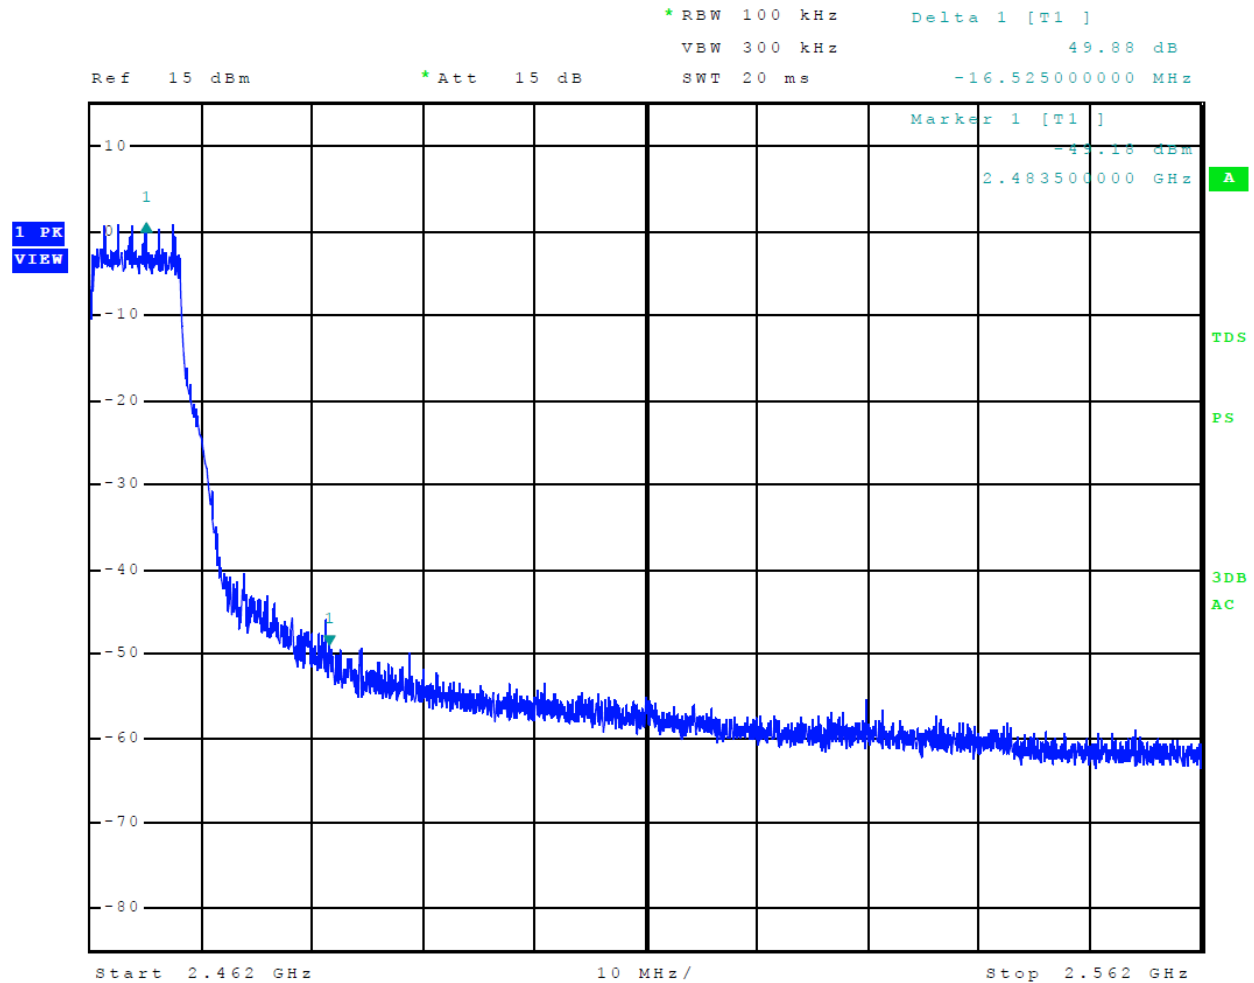


Figure 29 Plot of Transmitter Emissions High Band Edge Mode 16, Radio 2, 802.11n

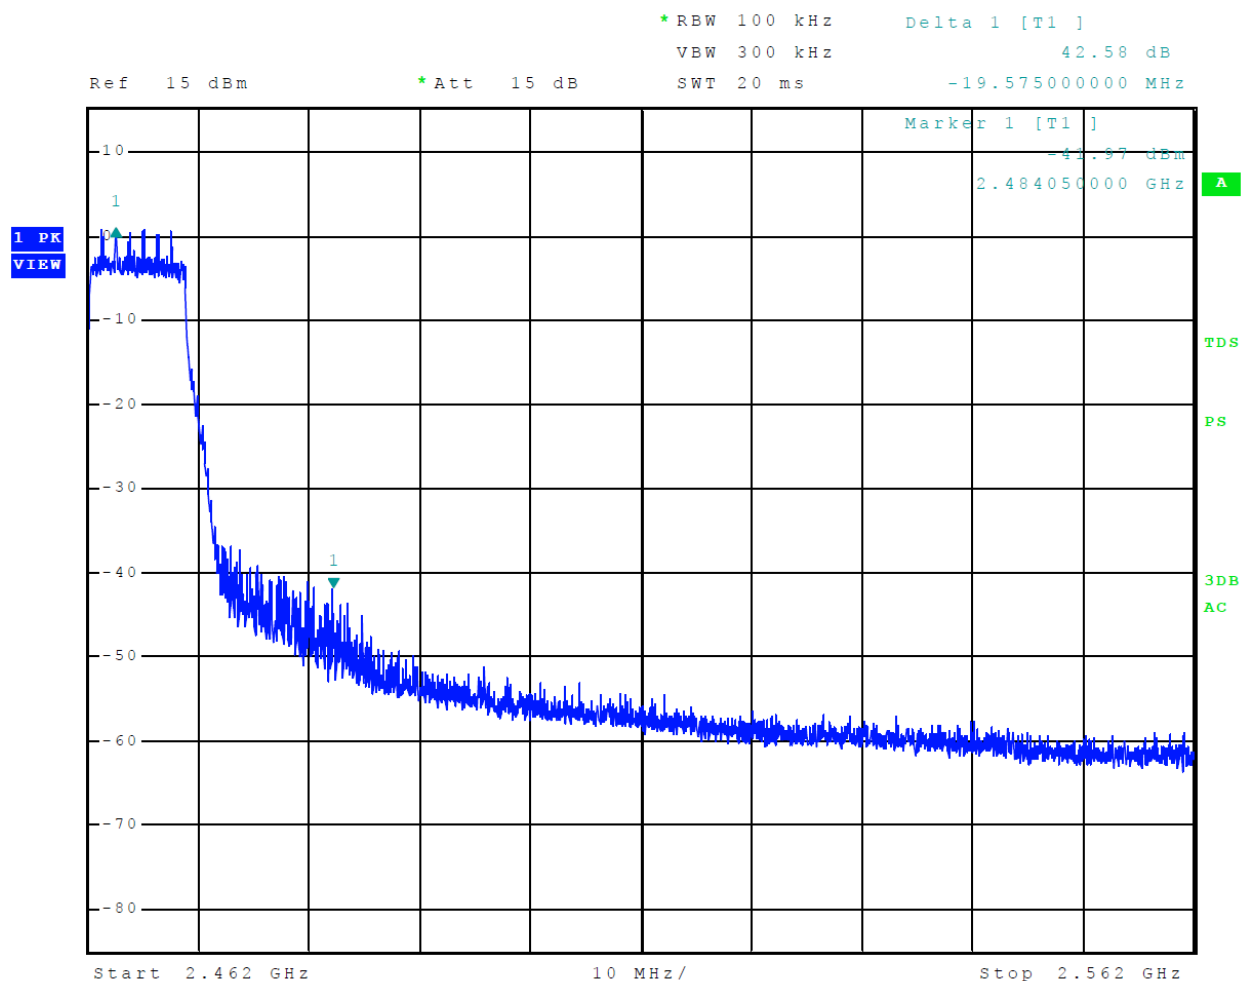


Figure 30 Plot of 6-dB Occupied Bandwidth Mode 2, Radio 1, BT (2EDR)

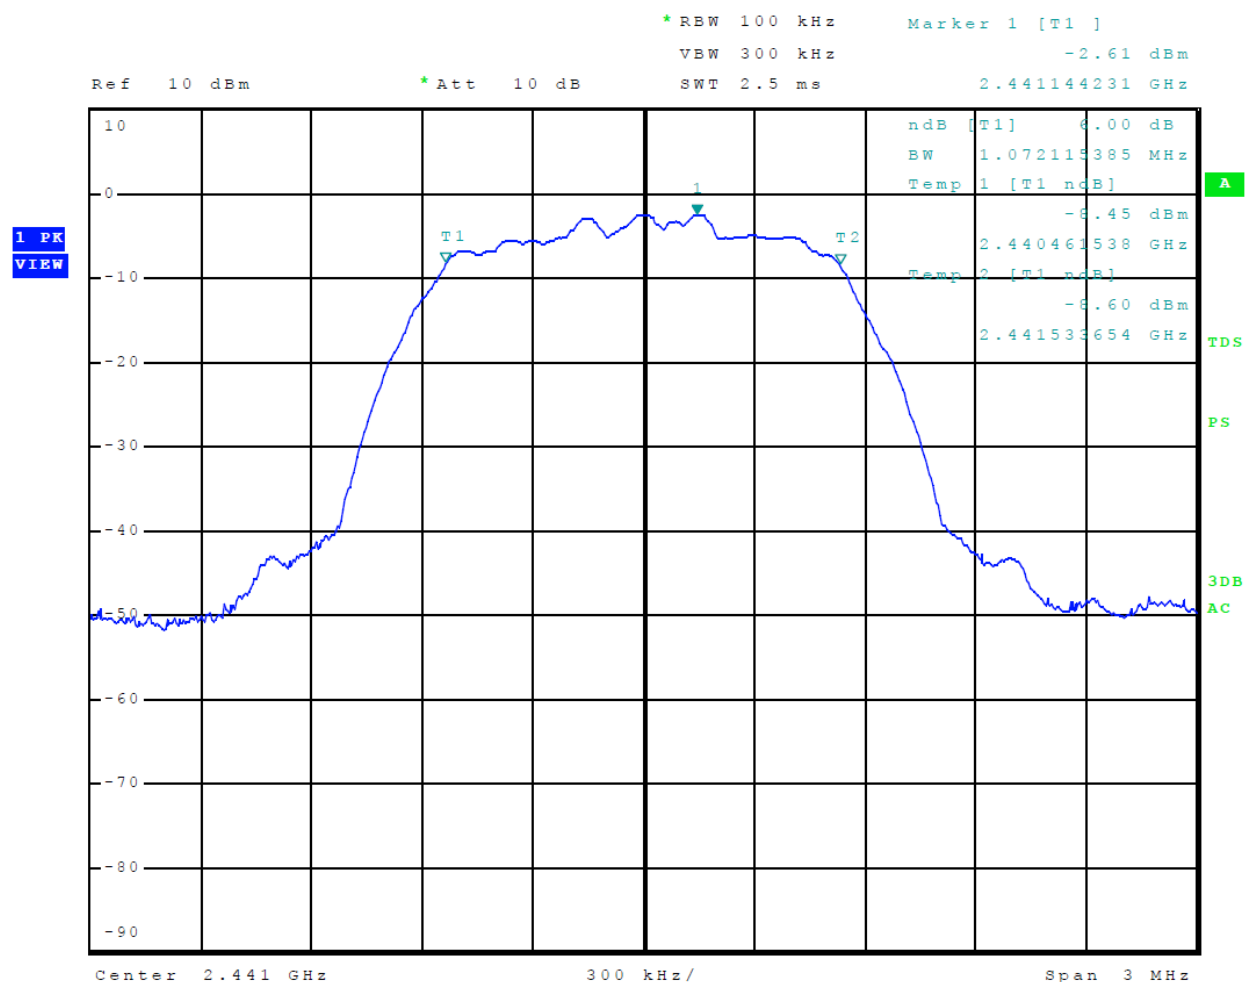


Figure 31 Plot of 99% Occupied Bandwidth Mode 2, Radio 1, BT (2EDR)

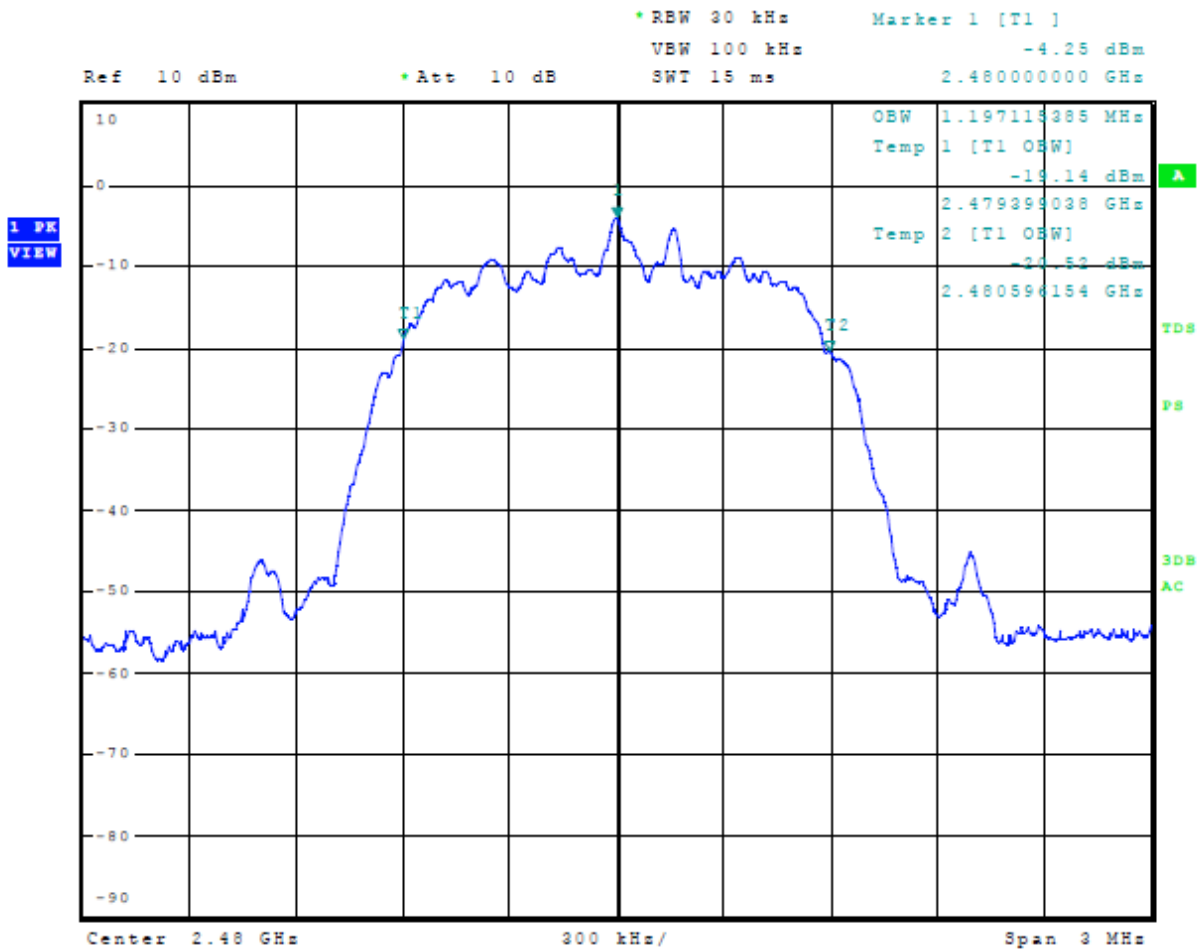


Figure 32 Plot of 6-dB Occupied Bandwidth Mode 3, Radio 1, BT (3EDR)

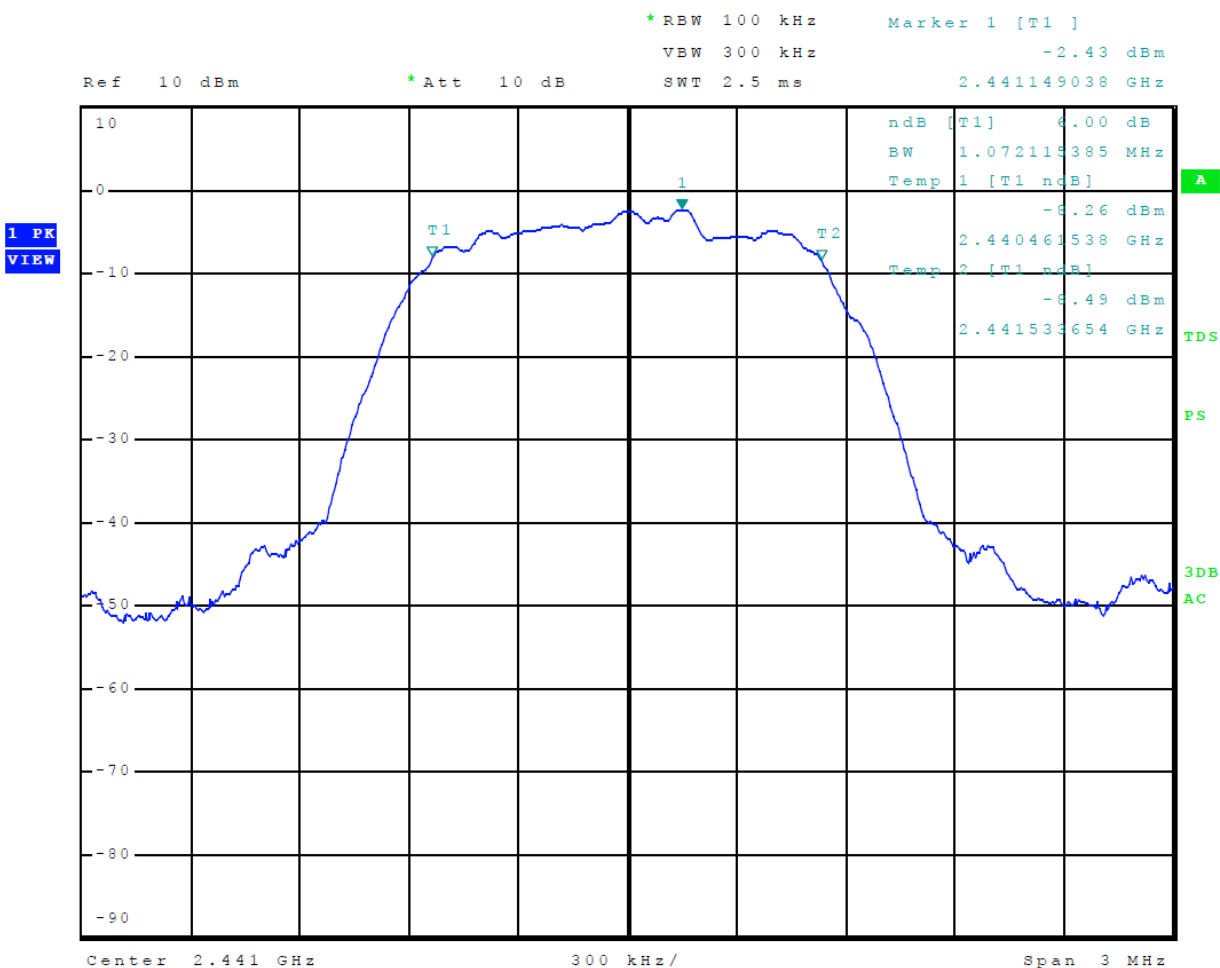


Figure 33 Plot of 99% Occupied Bandwidth Mode 3, Radio 1, BT (3EDR)

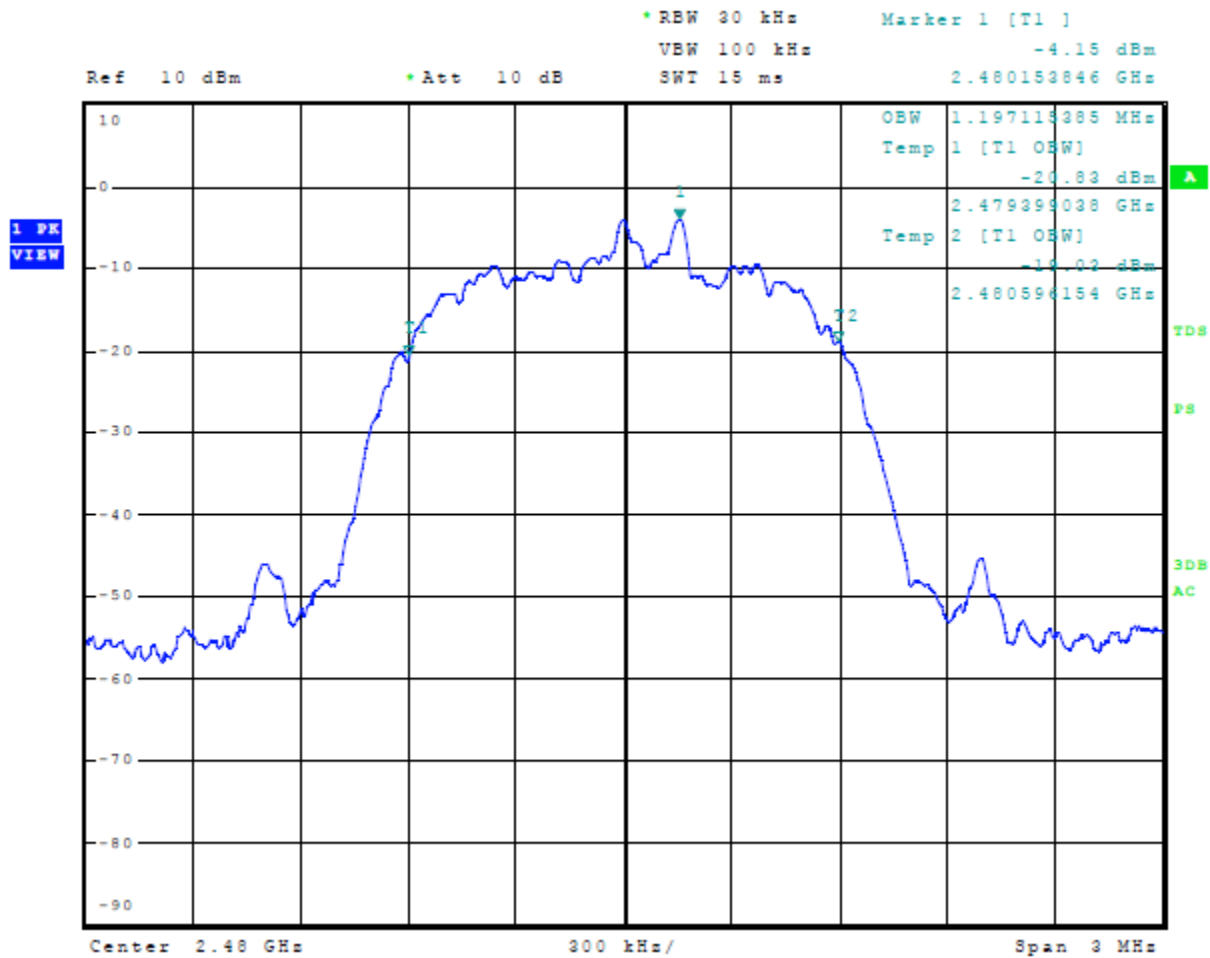


Figure 34 Plot of 6-dB Occupied Bandwidth Mode 4, Radio 1, BT BLE

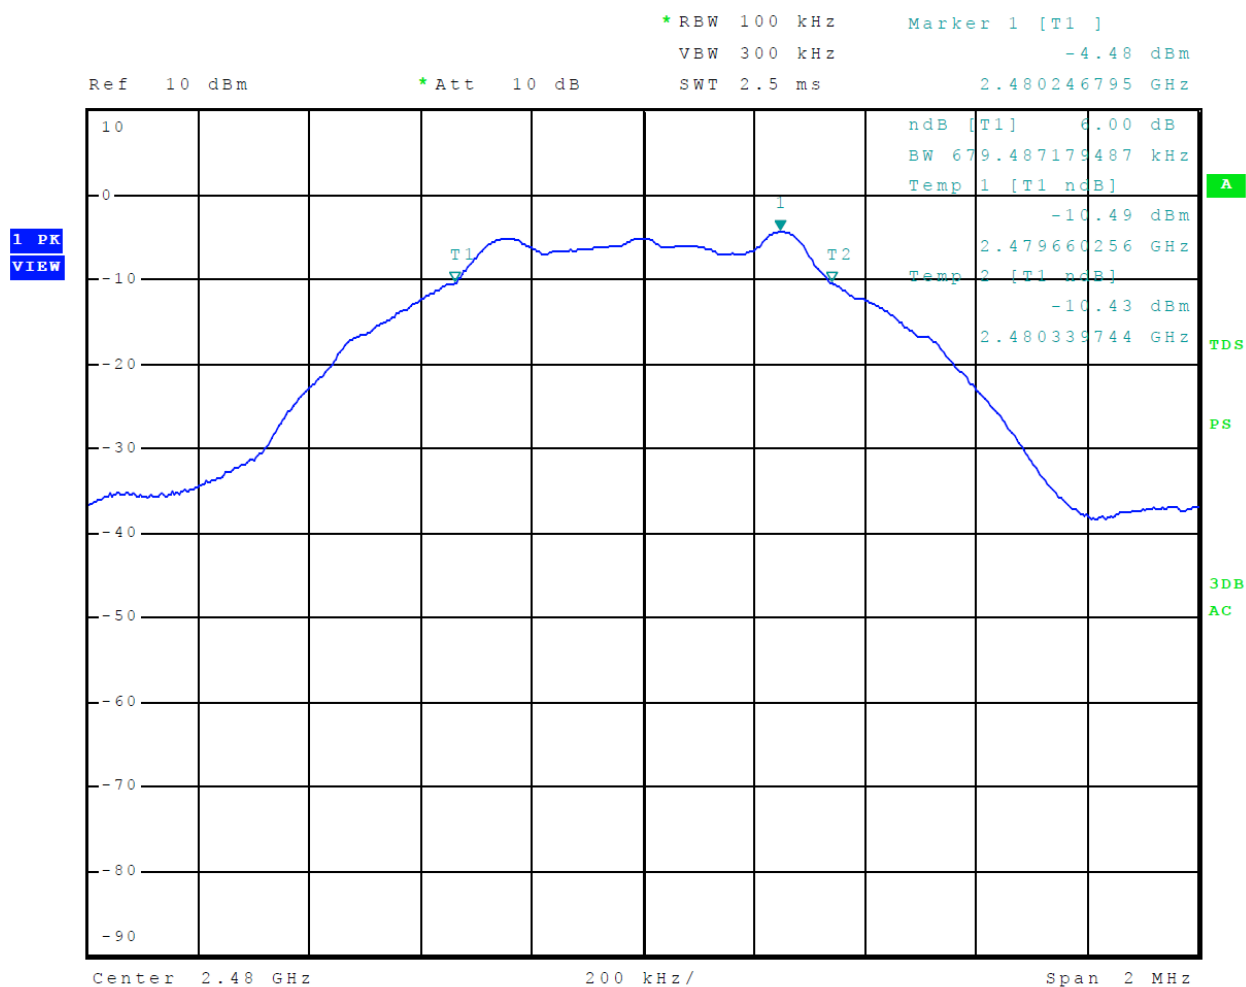


Figure 35 Plot of 99% Occupied Bandwidth Mode 4, Radio 1, BT BLE

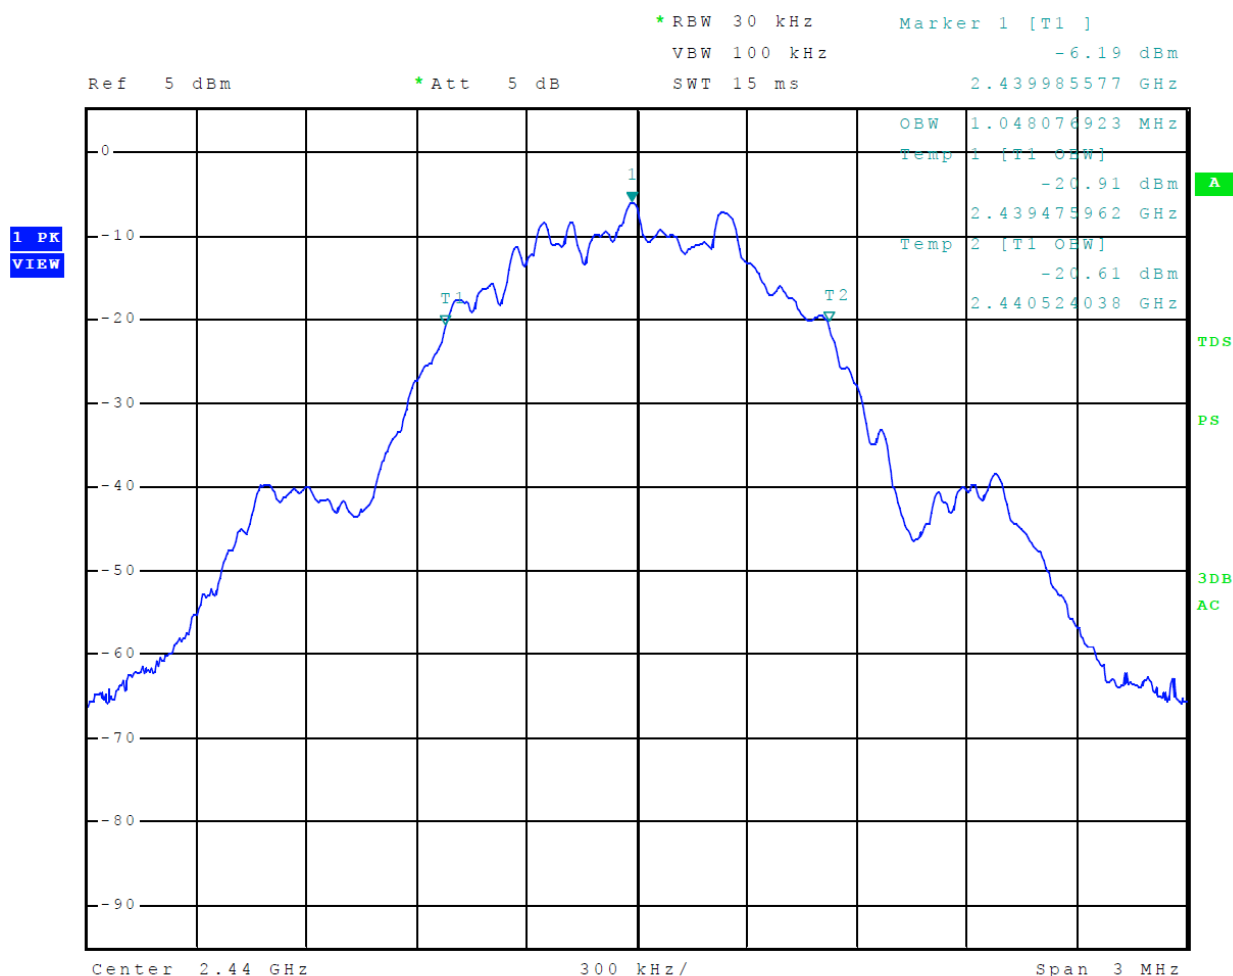


Figure 36 Plot of 6-dB Occupied Bandwidth Mode 5, Radio 1, 802.11b

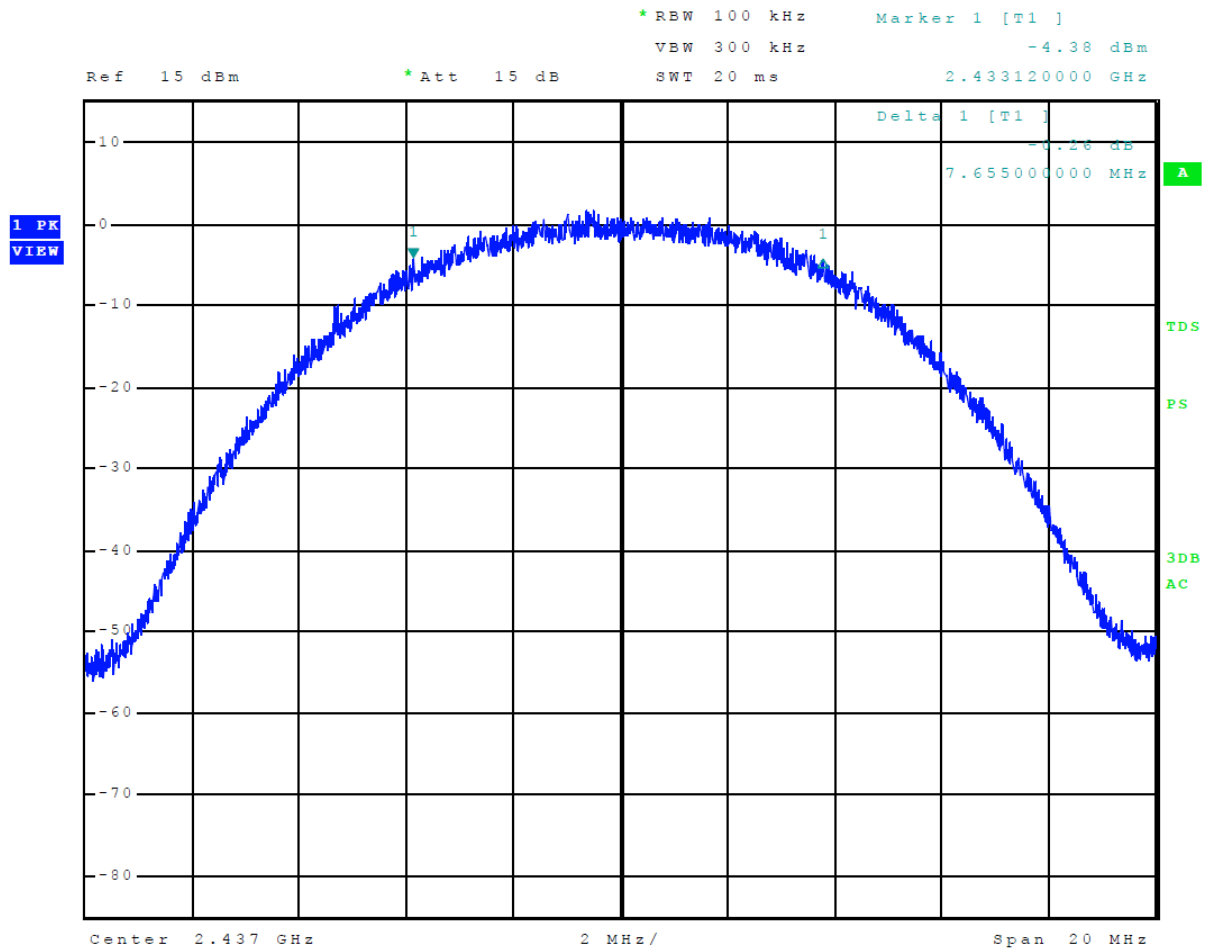


Figure 37 Plot of 99% Occupied Bandwidth Mode 5, Radio 1, 802.11b

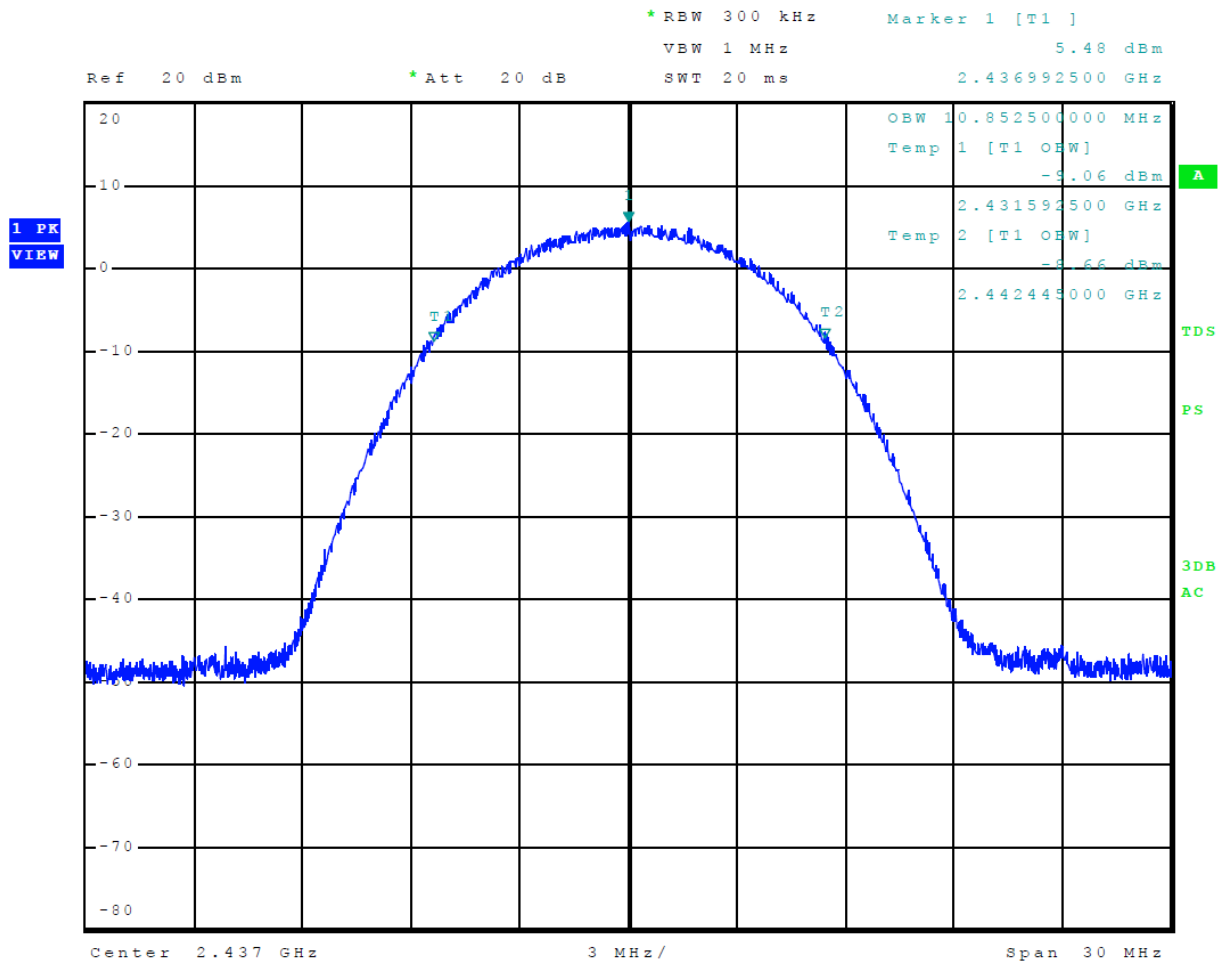


Figure 38 Plot of 6-dB Occupied Bandwidth Mode 6, Radio 1, 802.11g

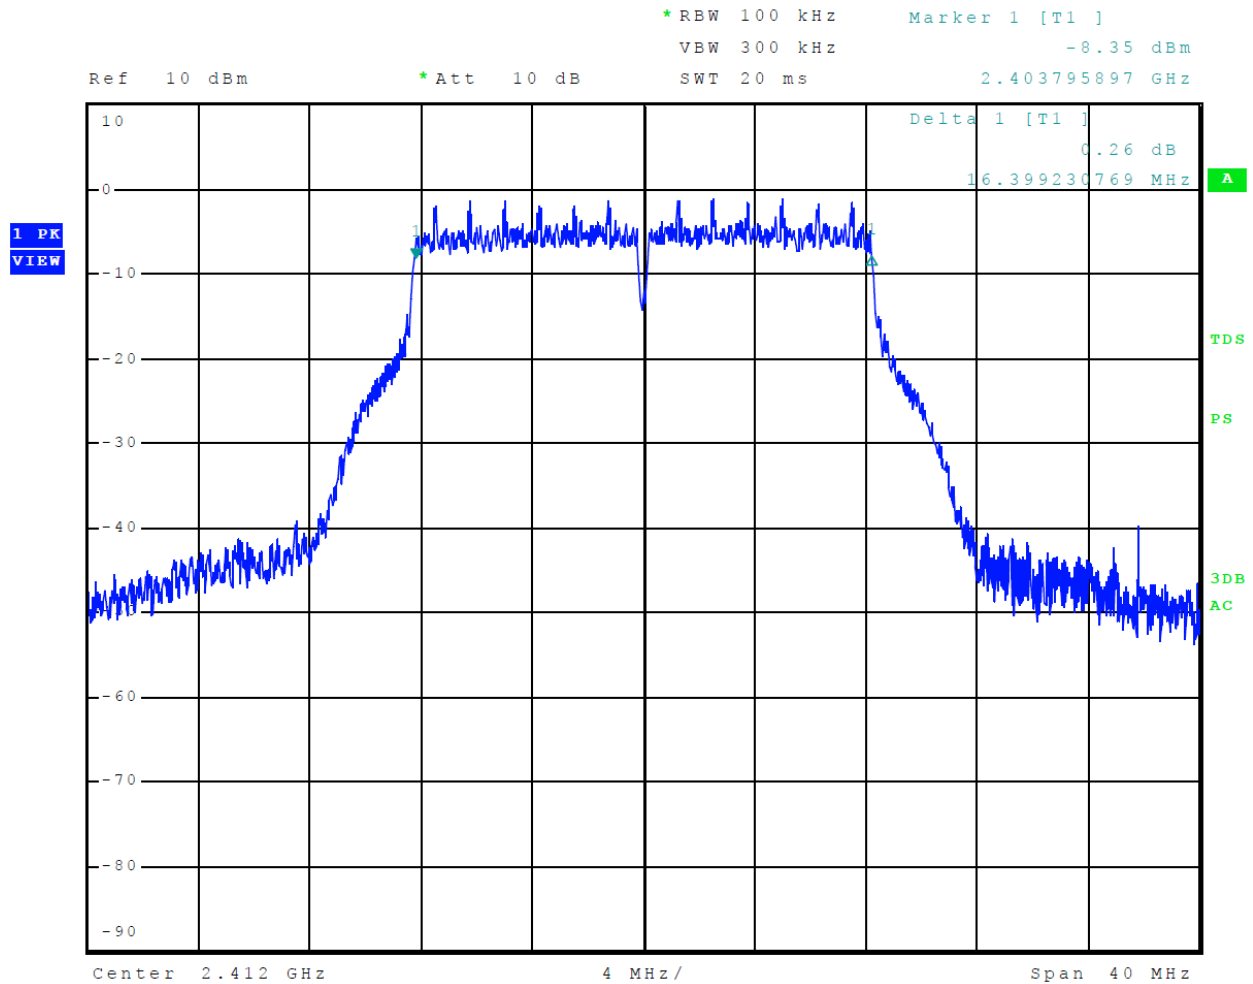


Figure 39 Plot of 99% Occupied Bandwidth Mode 6, Radio 1, 802.11g


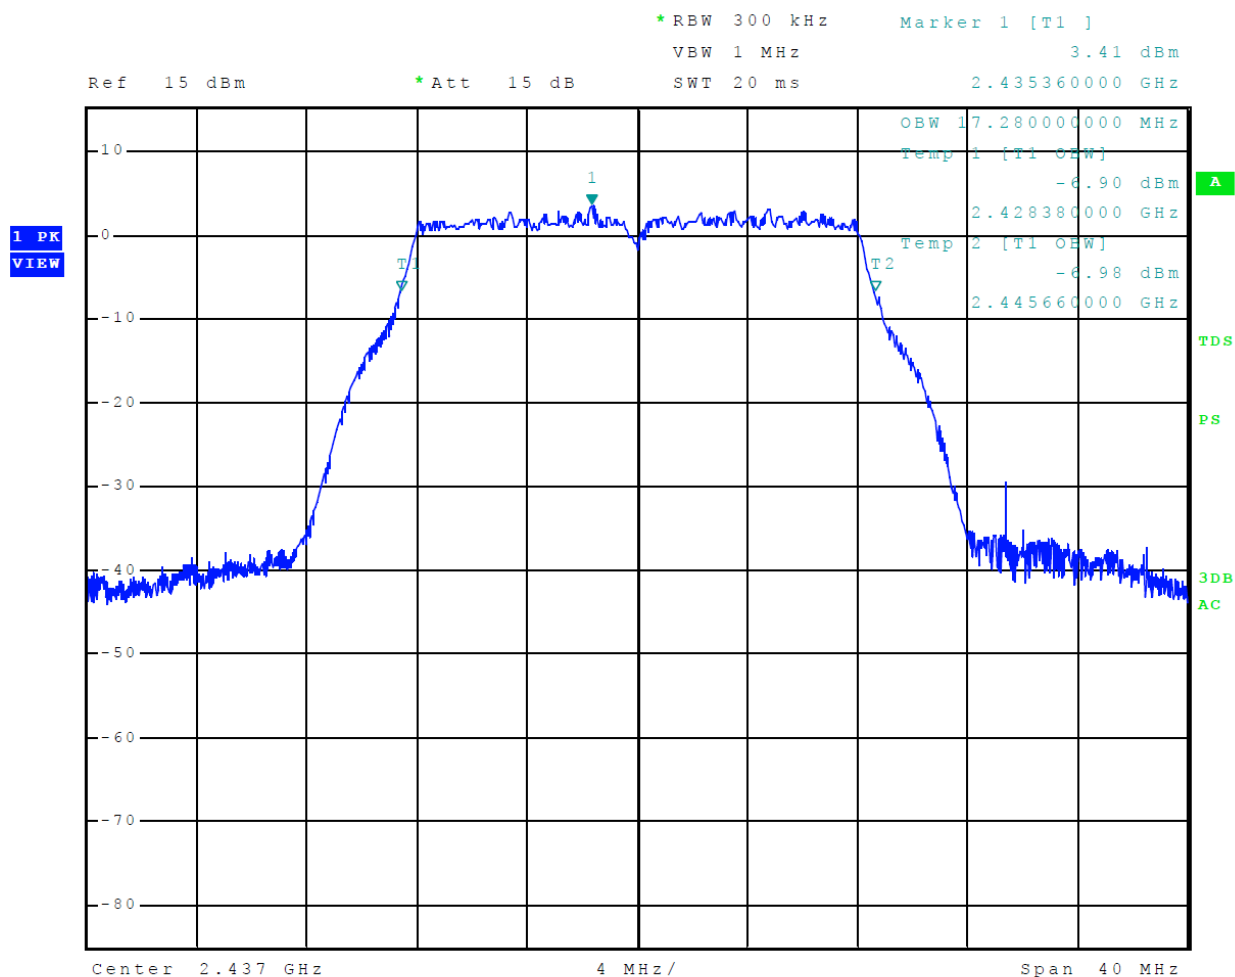


Figure 40 Plot of 6-dB Occupied Bandwidth Mode 7, Radio 1, 802.11n

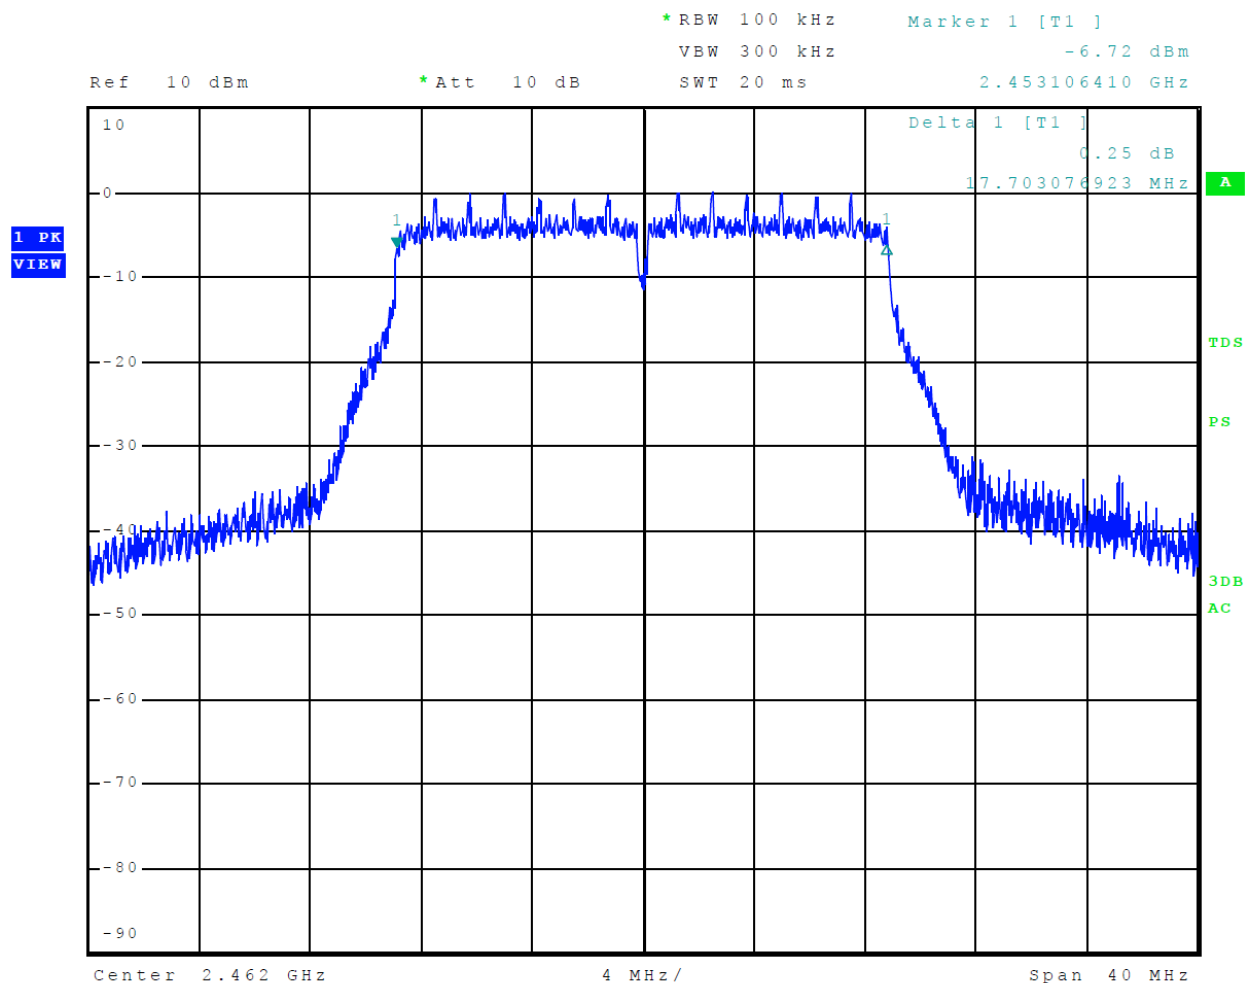

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 75 of 110

Figure 41 Plot of 99% Occupied Bandwidth Mode 7, Radio 1, 802.11n


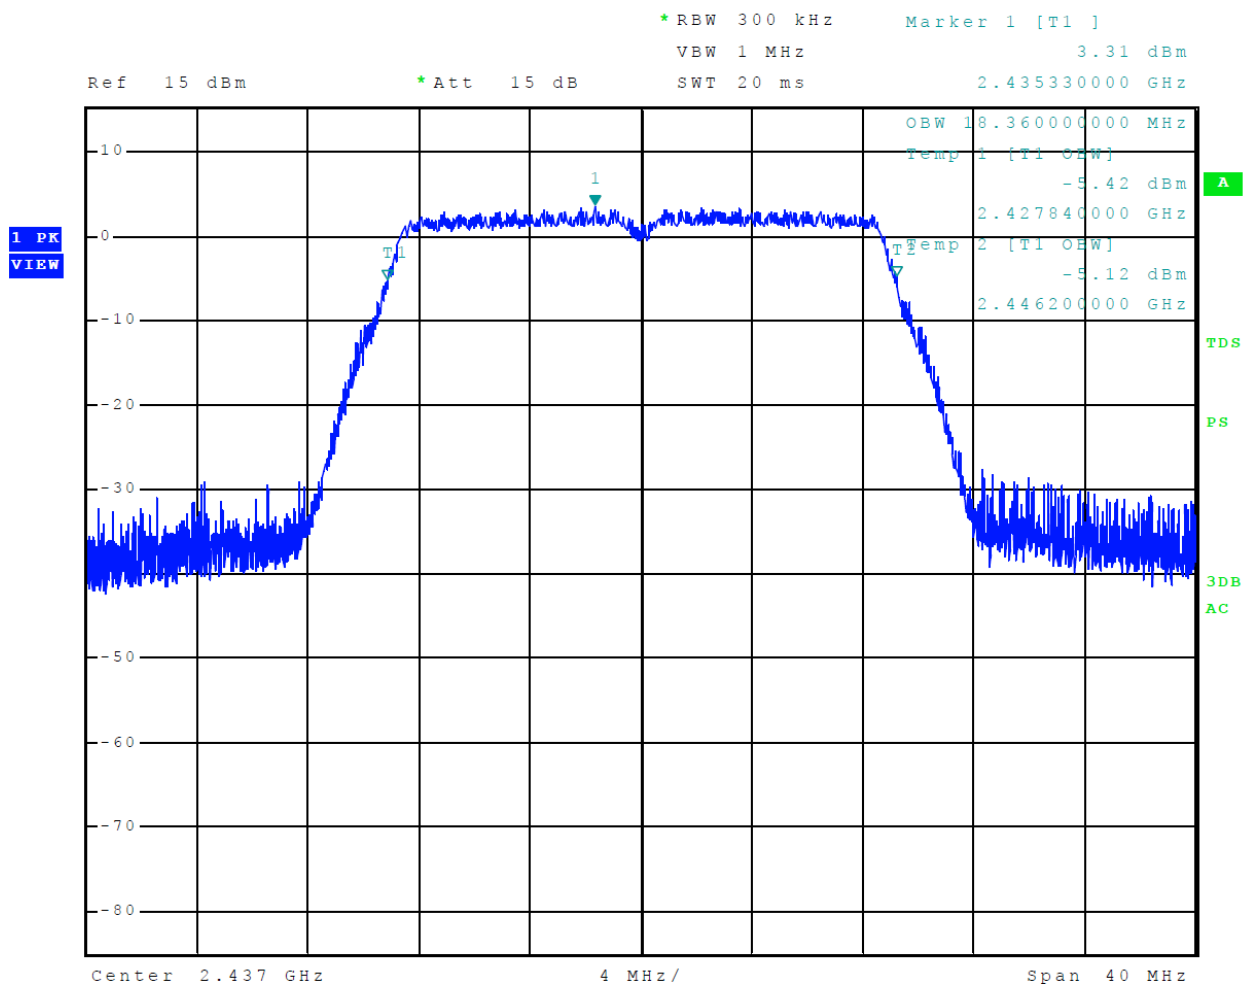


Figure 42 Plot of 6-dB Occupied Bandwidth Mode 14, Radio 2, 802.11b

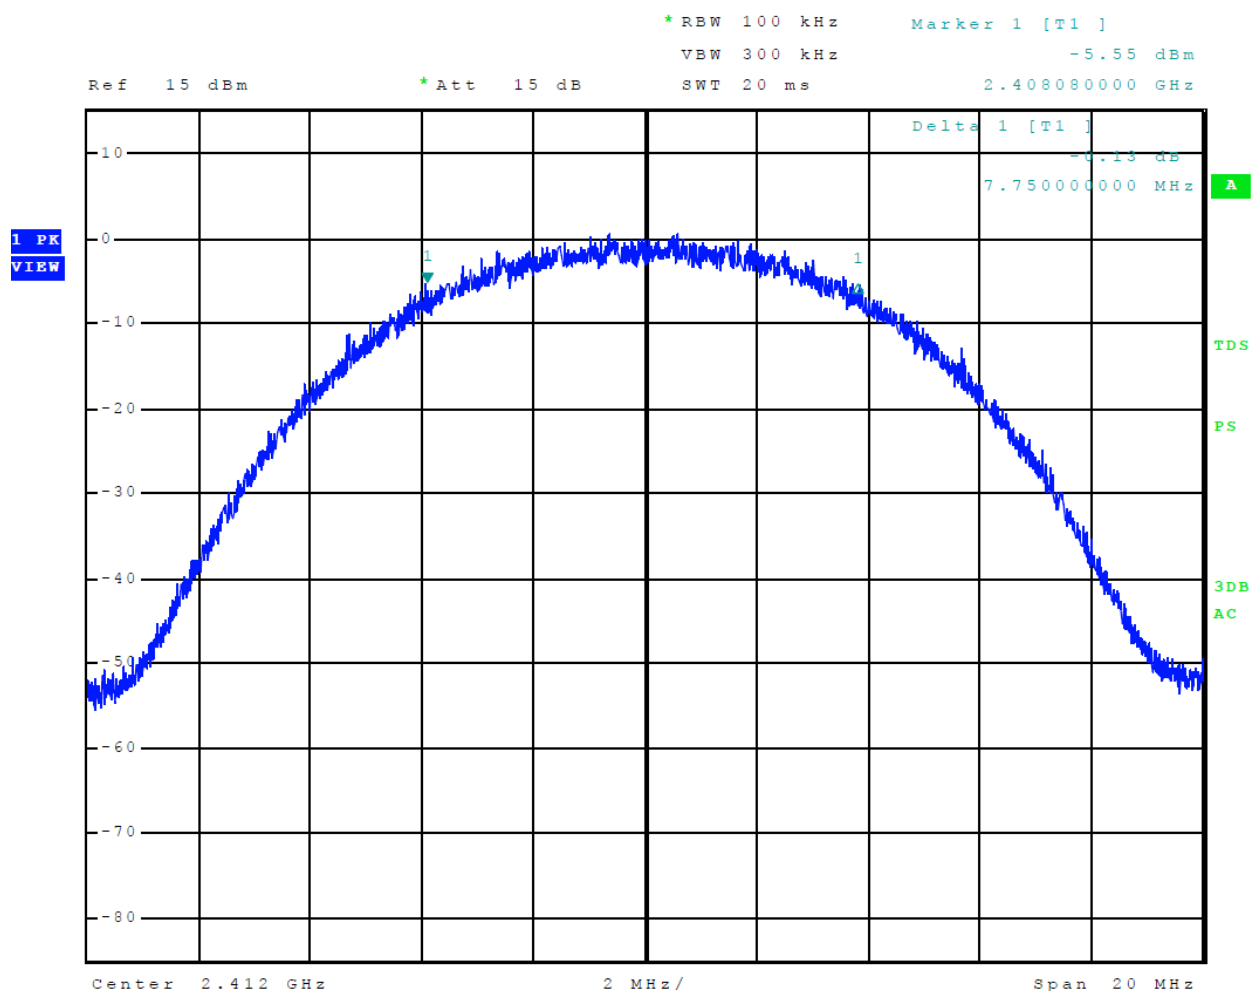

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 77 of 110

Figure 43 Plot of 99% Occupied Bandwidth Mode 14, Radio 2, 802.11b

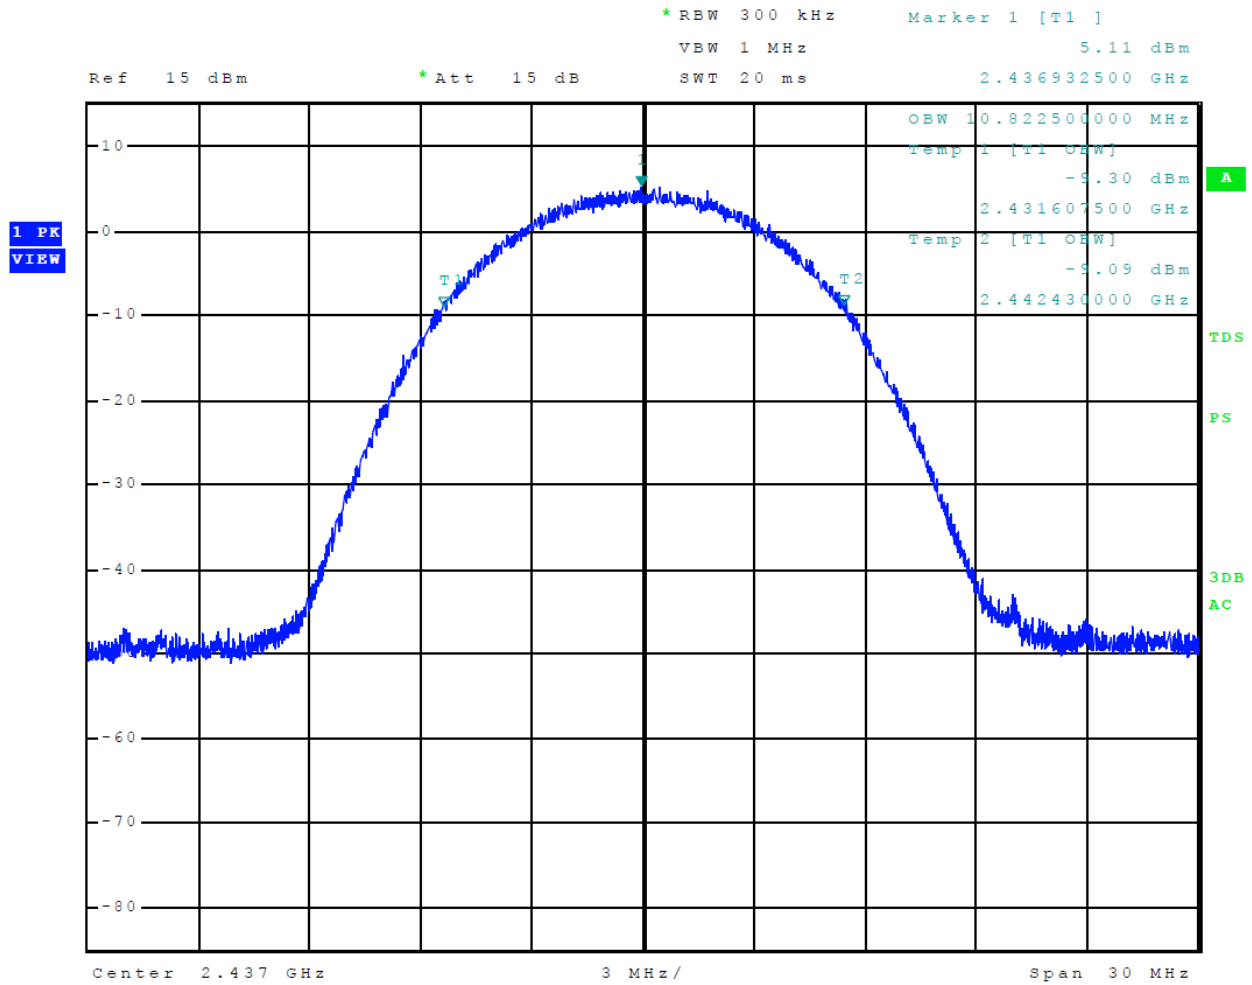


Figure 44 Plot of 6-dB Occupied Bandwidth Mode 15, Radio 2, 802.11g

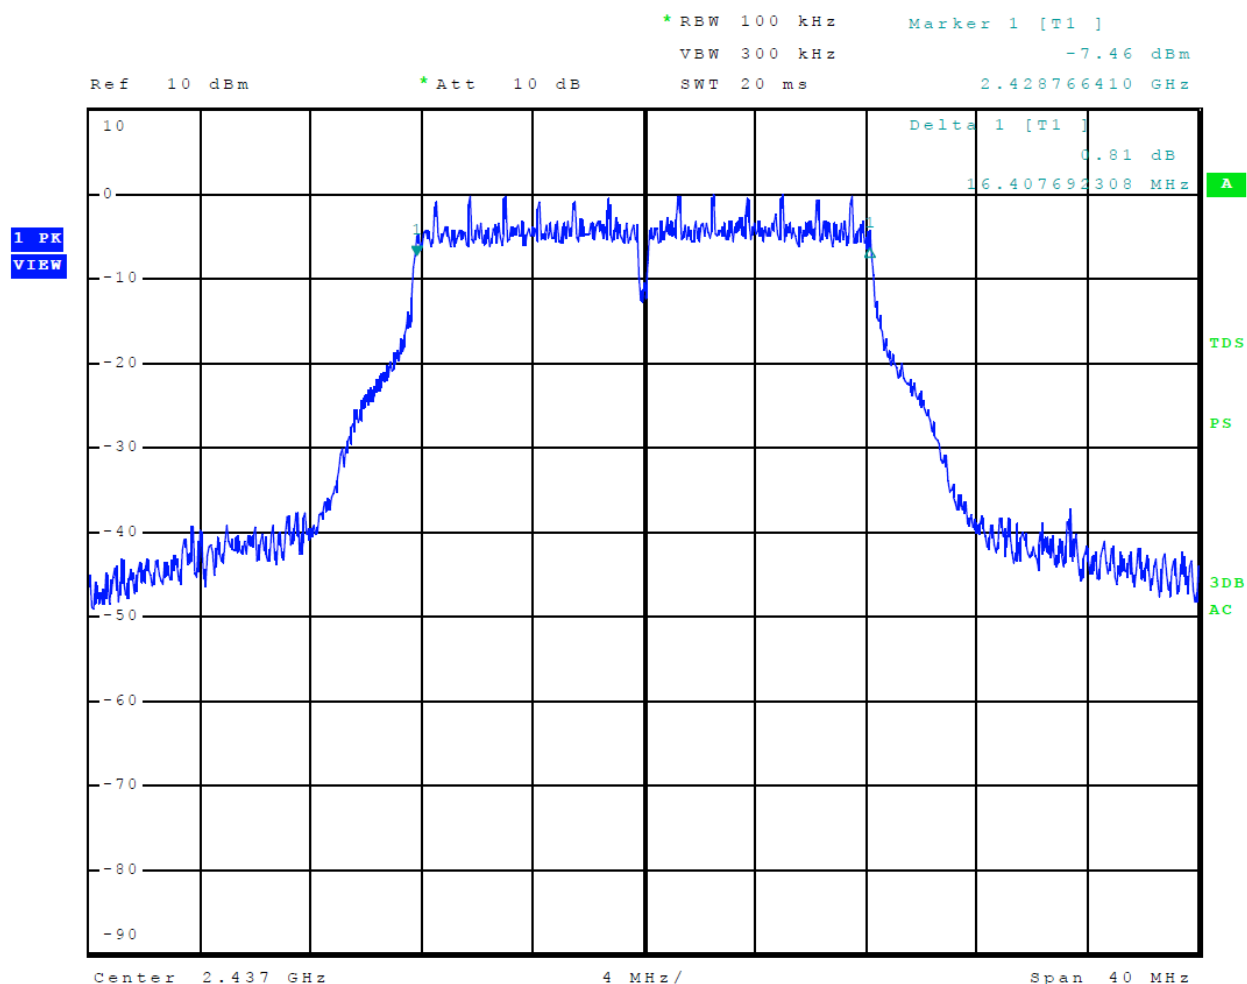


Figure 45 Plot of 99% Occupied Bandwidth Mode 15, Radio 2, 802.11g

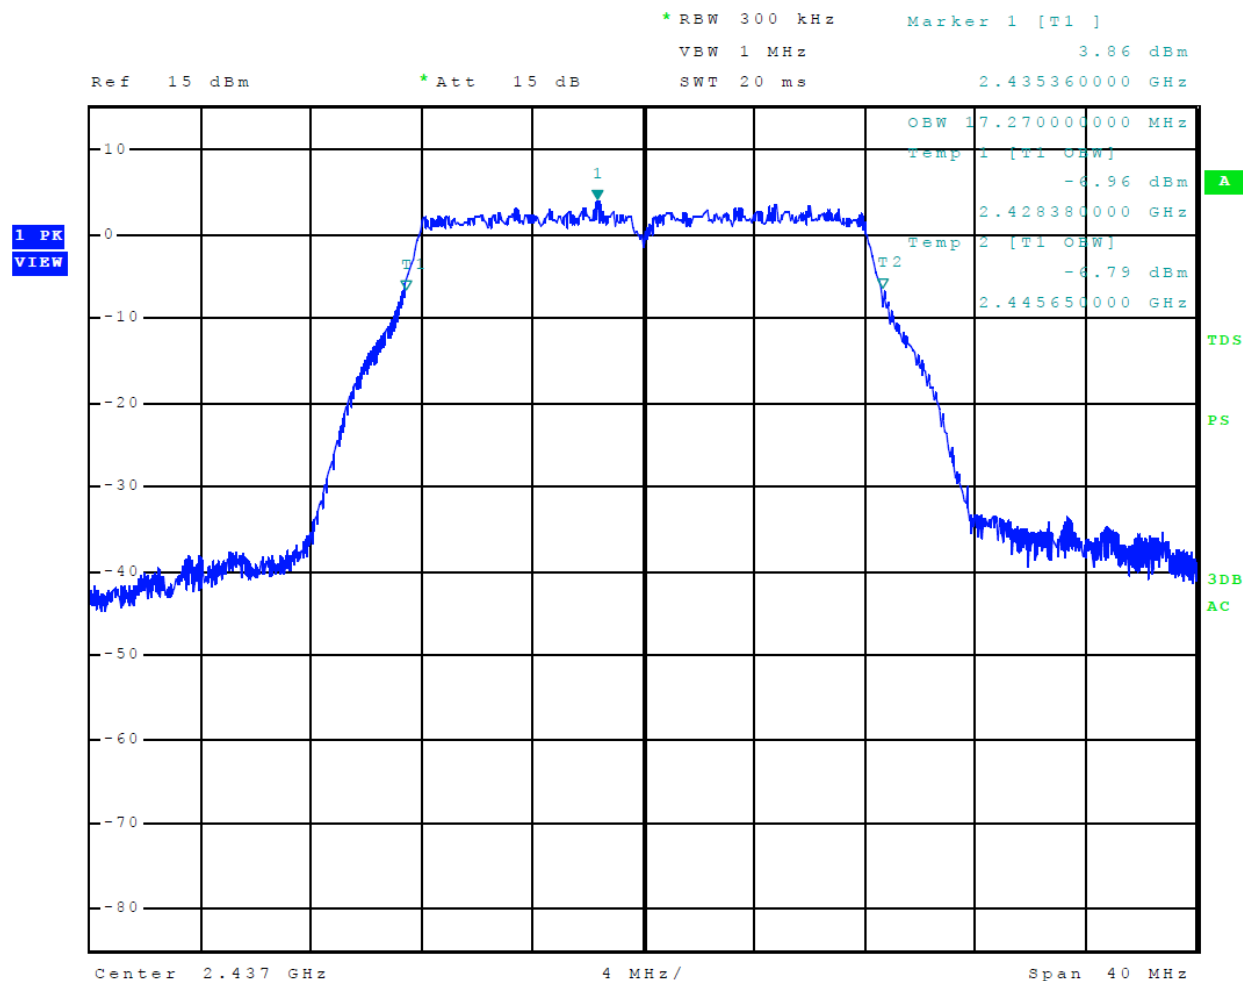


Figure 46 Plot of 6-dB Occupied Bandwidth Mode 16, Radio 2, 802.11n

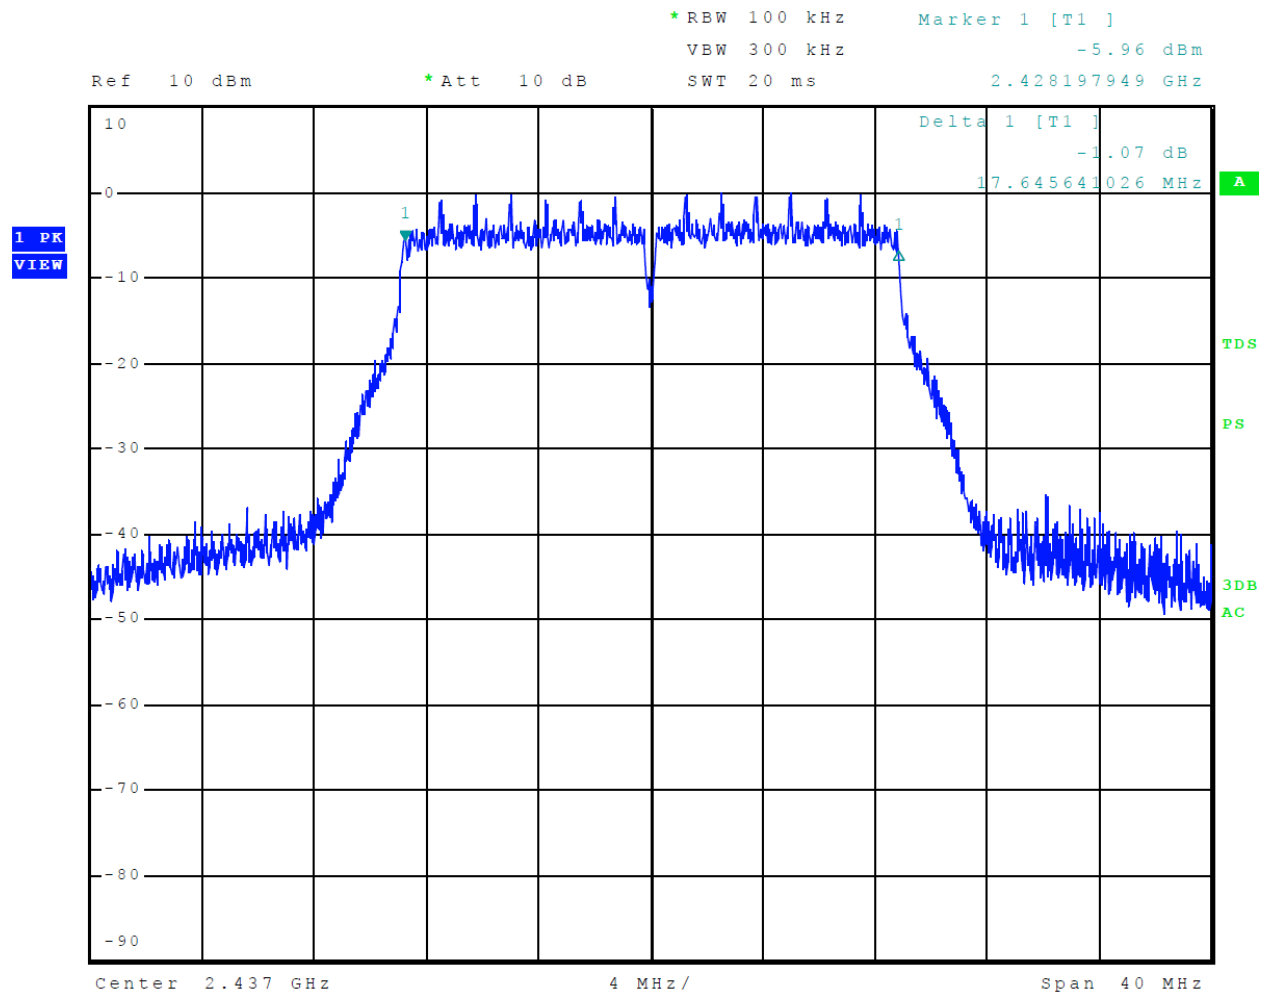


Figure 47 Plot of 99% Occupied Bandwidth Mode 16, Radio 2, 802.11n

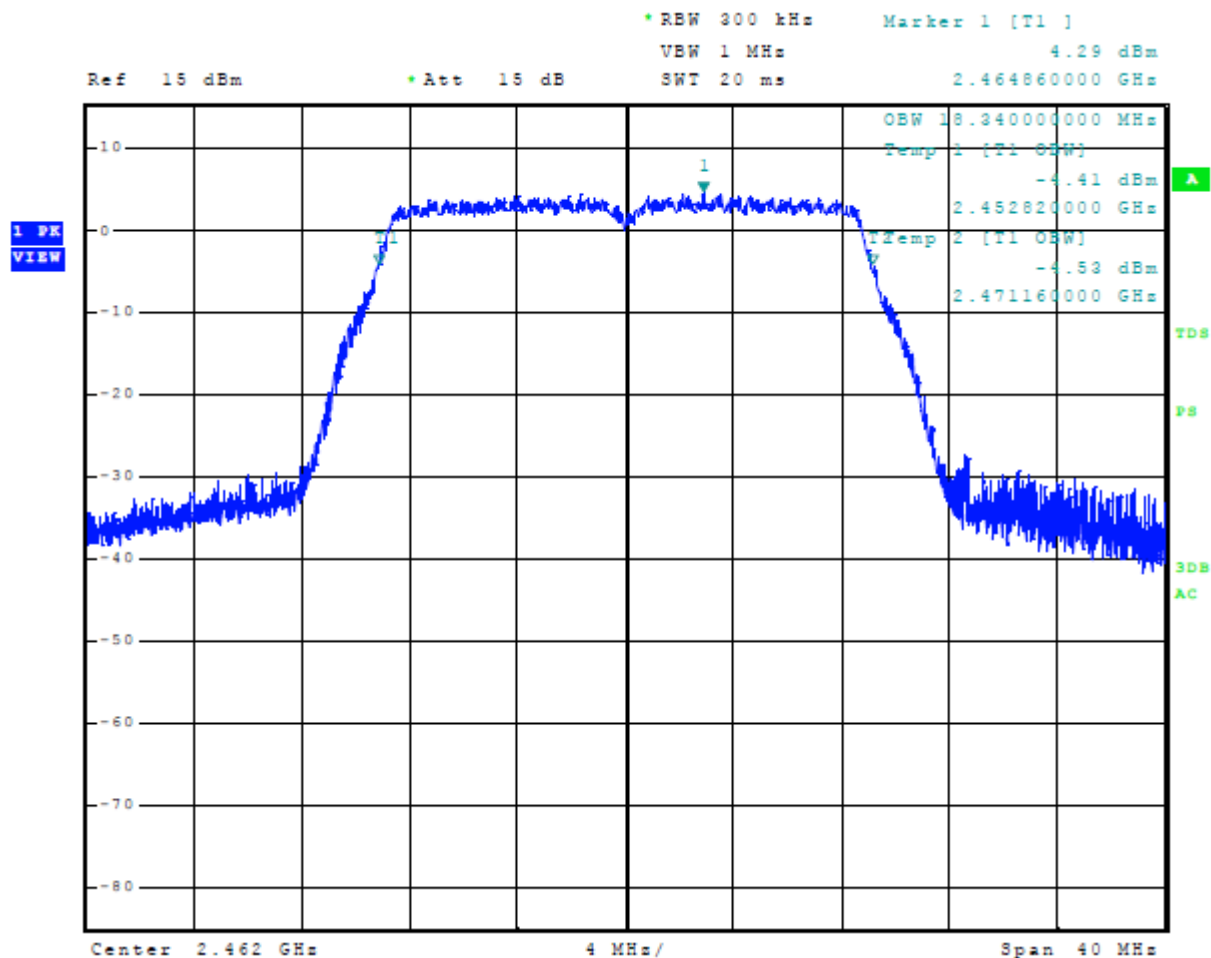


Figure 48 Plot of Transmitter Power Spectral Density Mode 2, Radio 1, BT (2EDR)

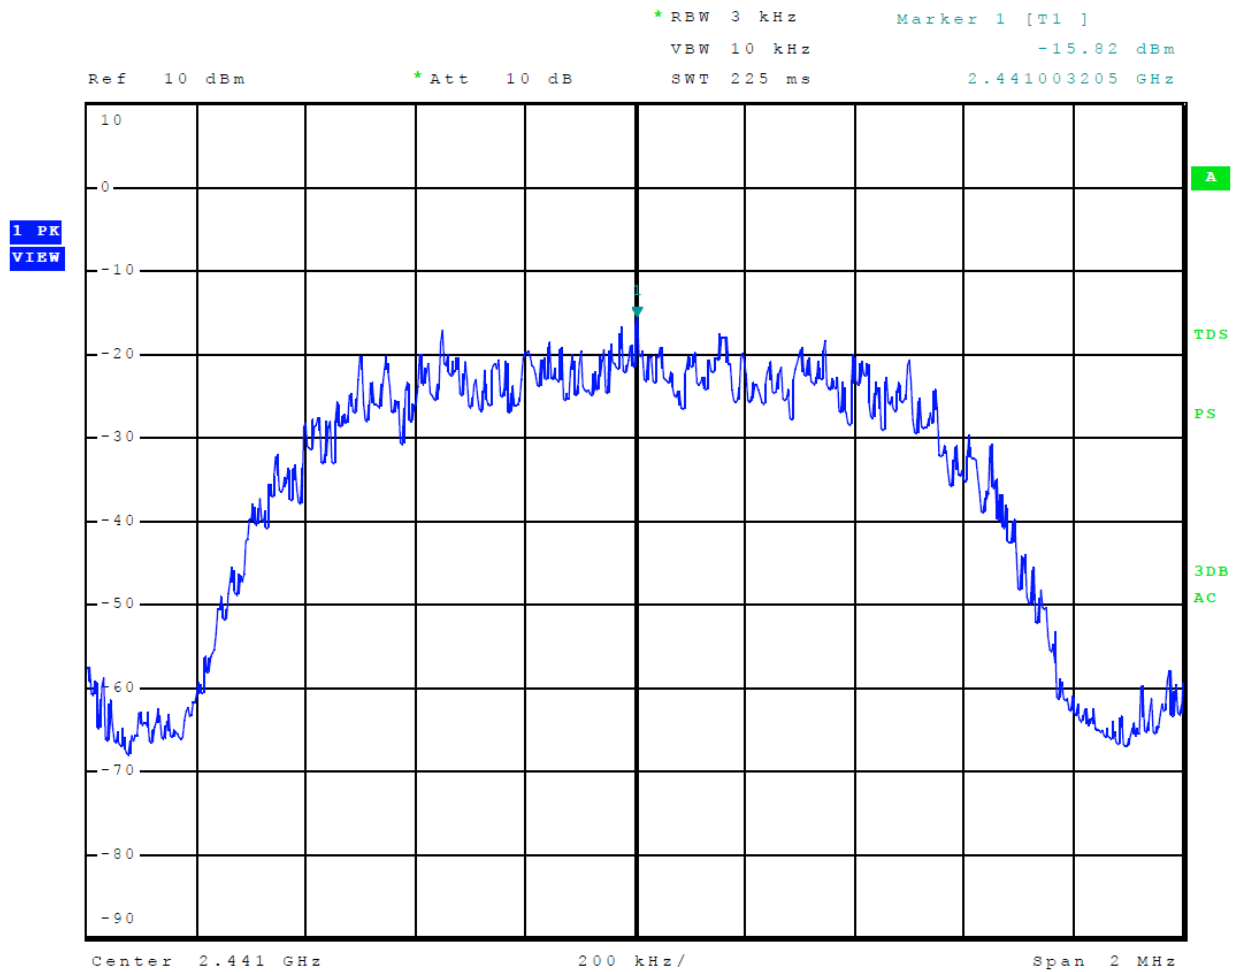


Figure 49 Plot of Transmitter Power Spectral Density Mode 3, Radio 1, BT (3EDR)

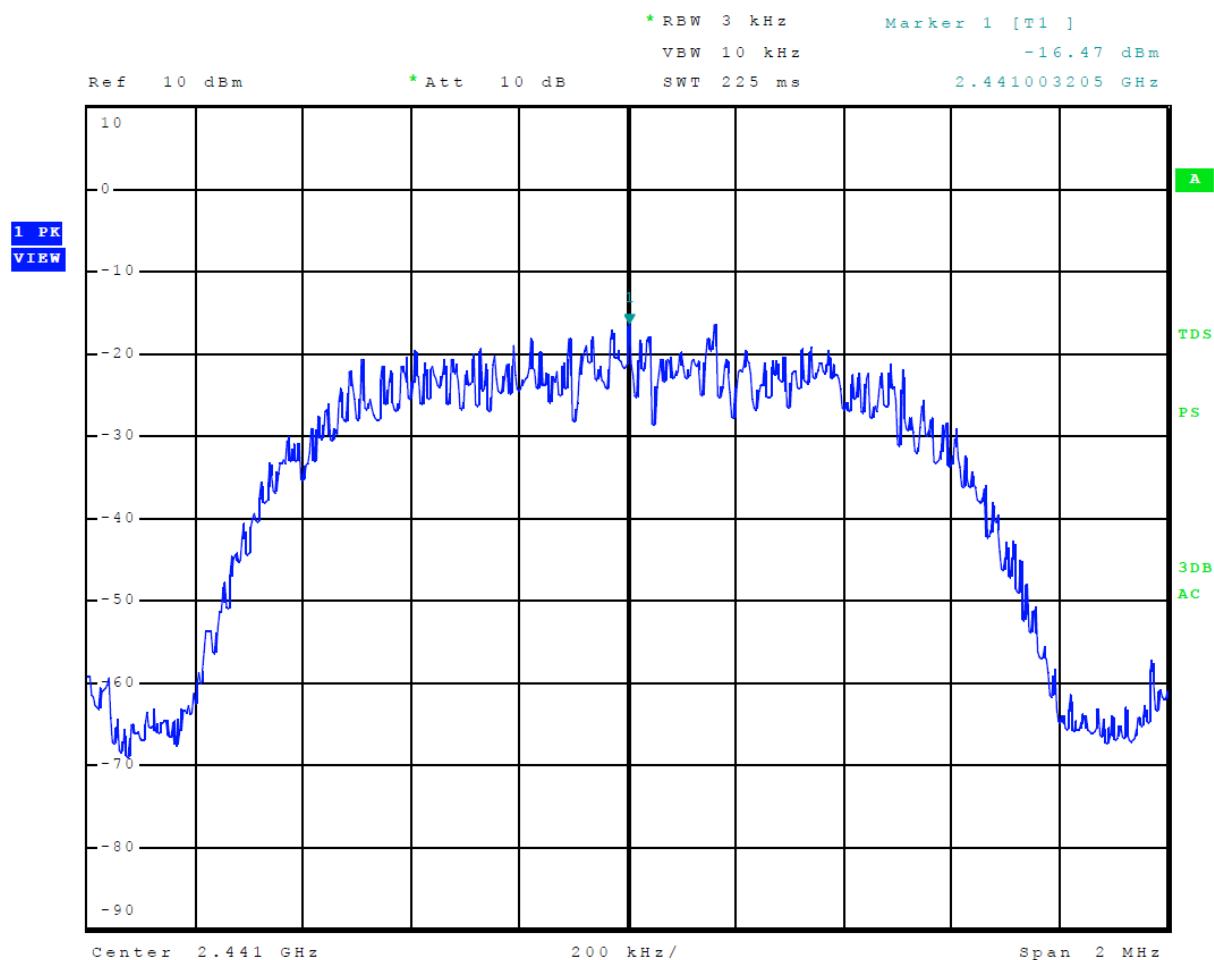


Figure 50 Plot of Transmitter Power Spectral Density Mode 4, Radio 1, BT BLE

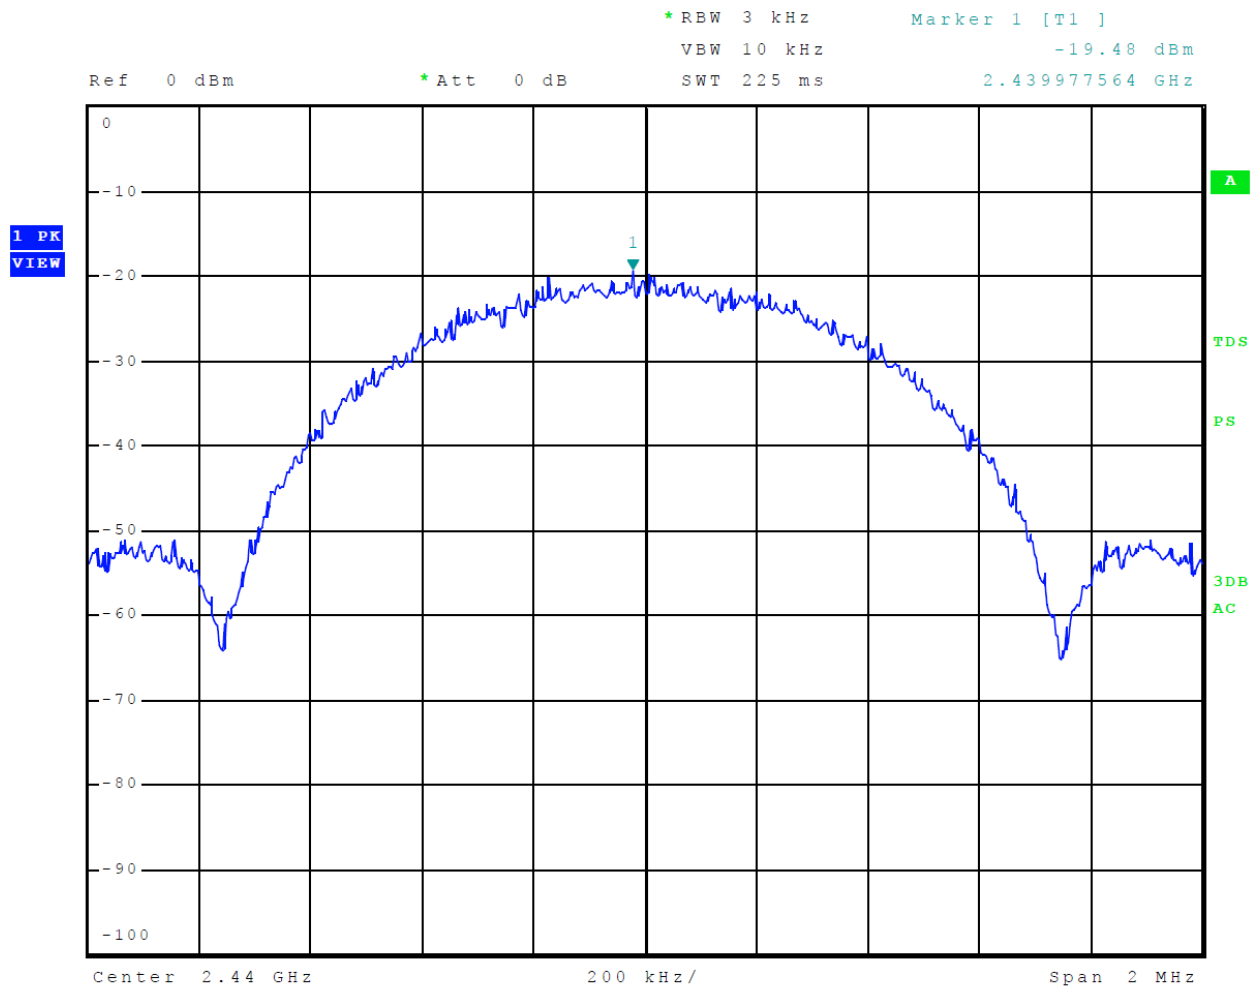


Figure 51 Plot of Transmitter Power Spectral Density Mode 5, Radio 1, 802.11b

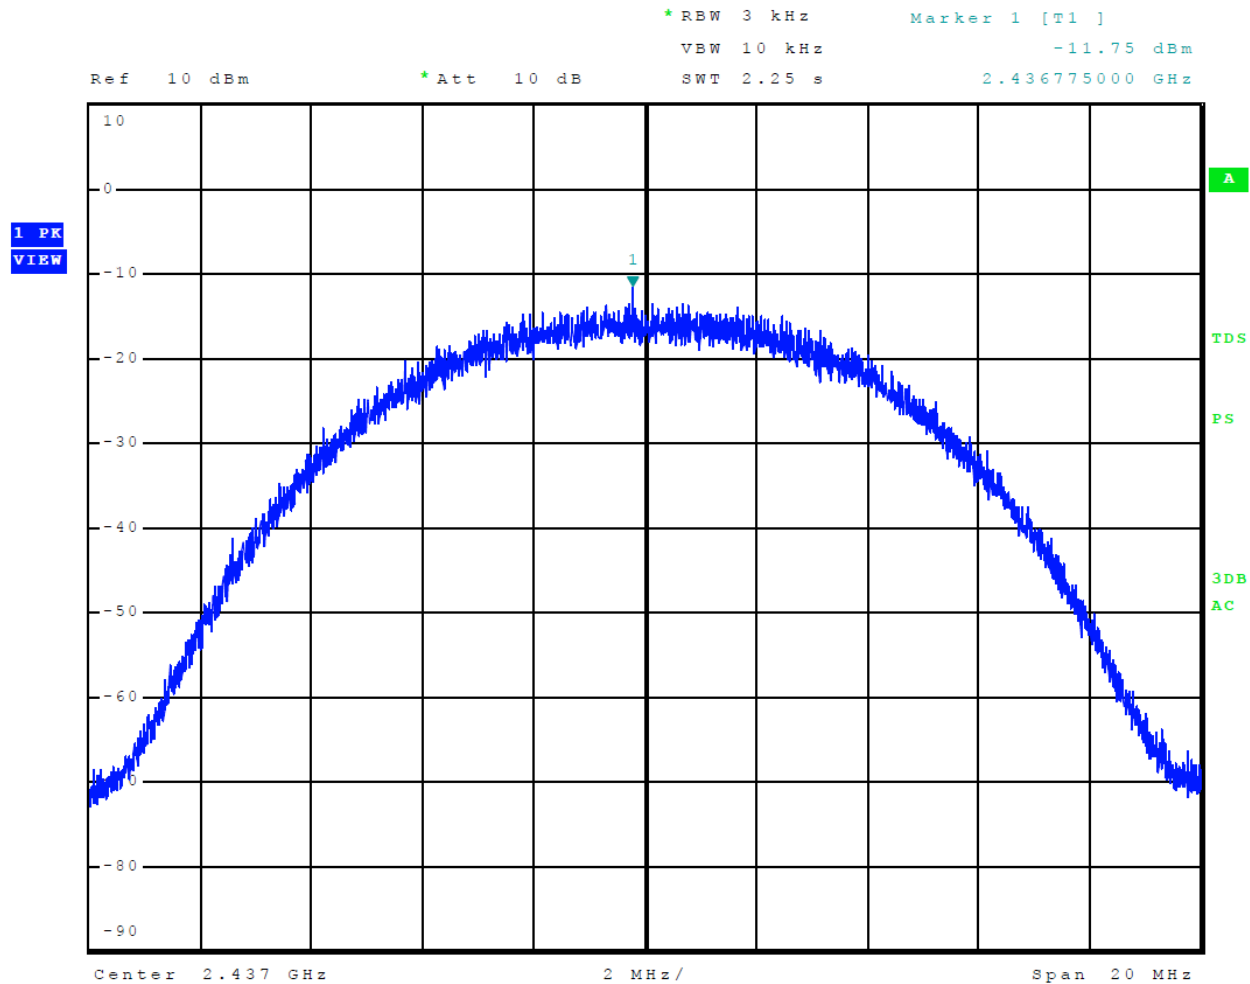


Figure 52 Plot of Transmitter Power Spectral Density Mode 6, Radio 1, 802.11g

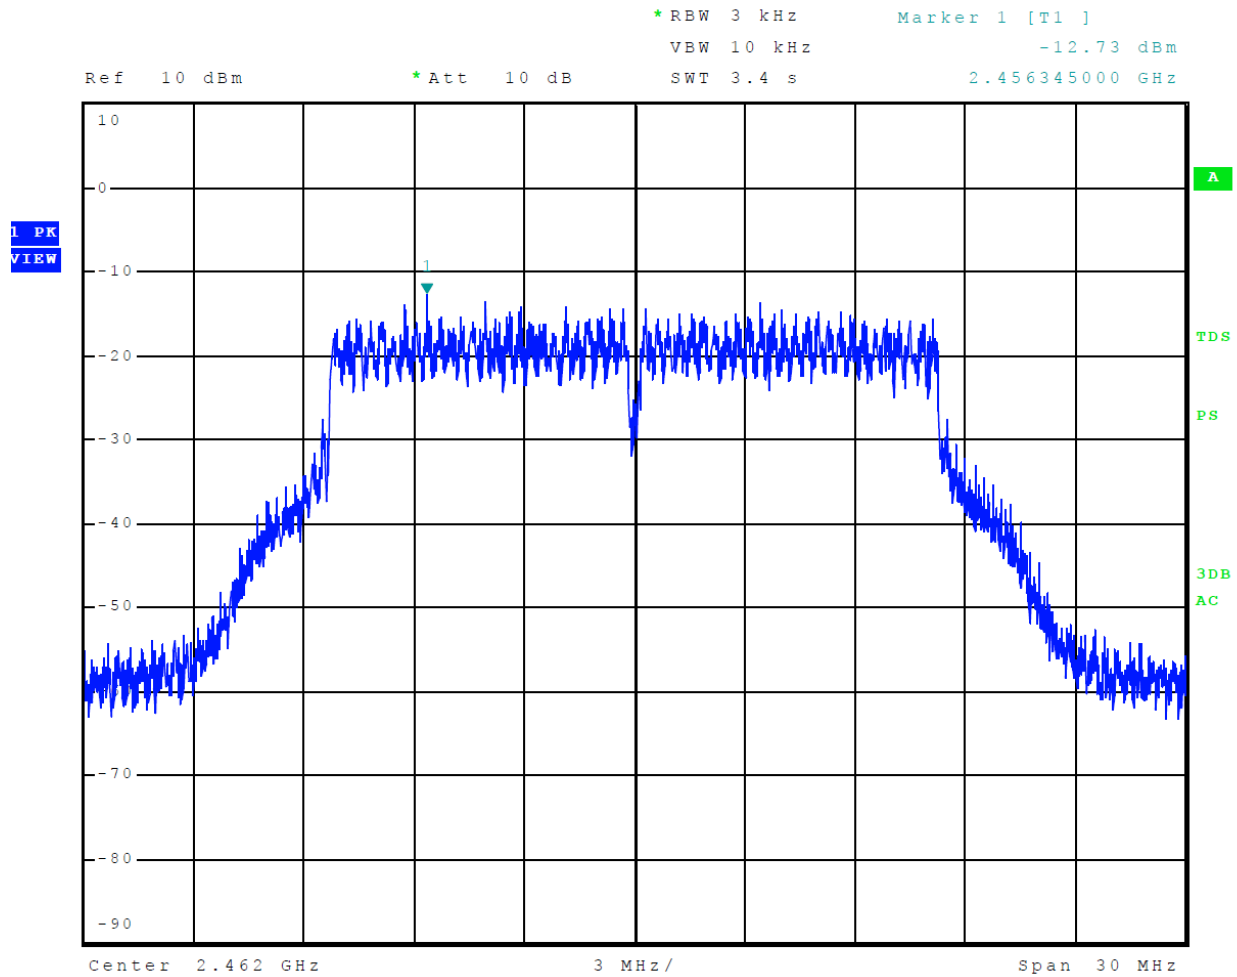


Figure 53 Plot of Transmitter Power Spectral Density Mode 7, Radio 1, 802.11n

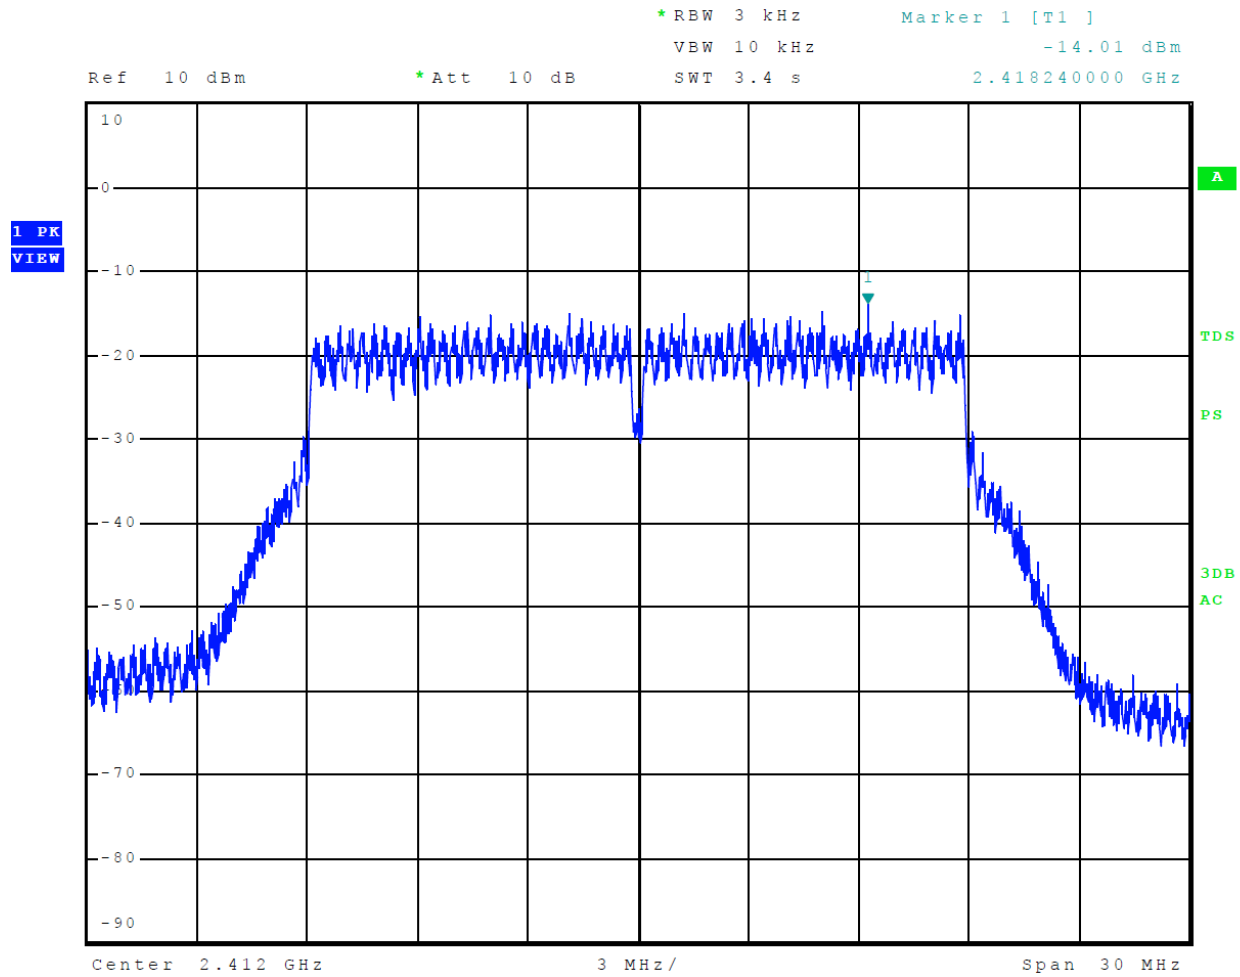


Figure 54 Plot of Transmitter Power Spectral Density Mode 14, Radio 2, 802.11b

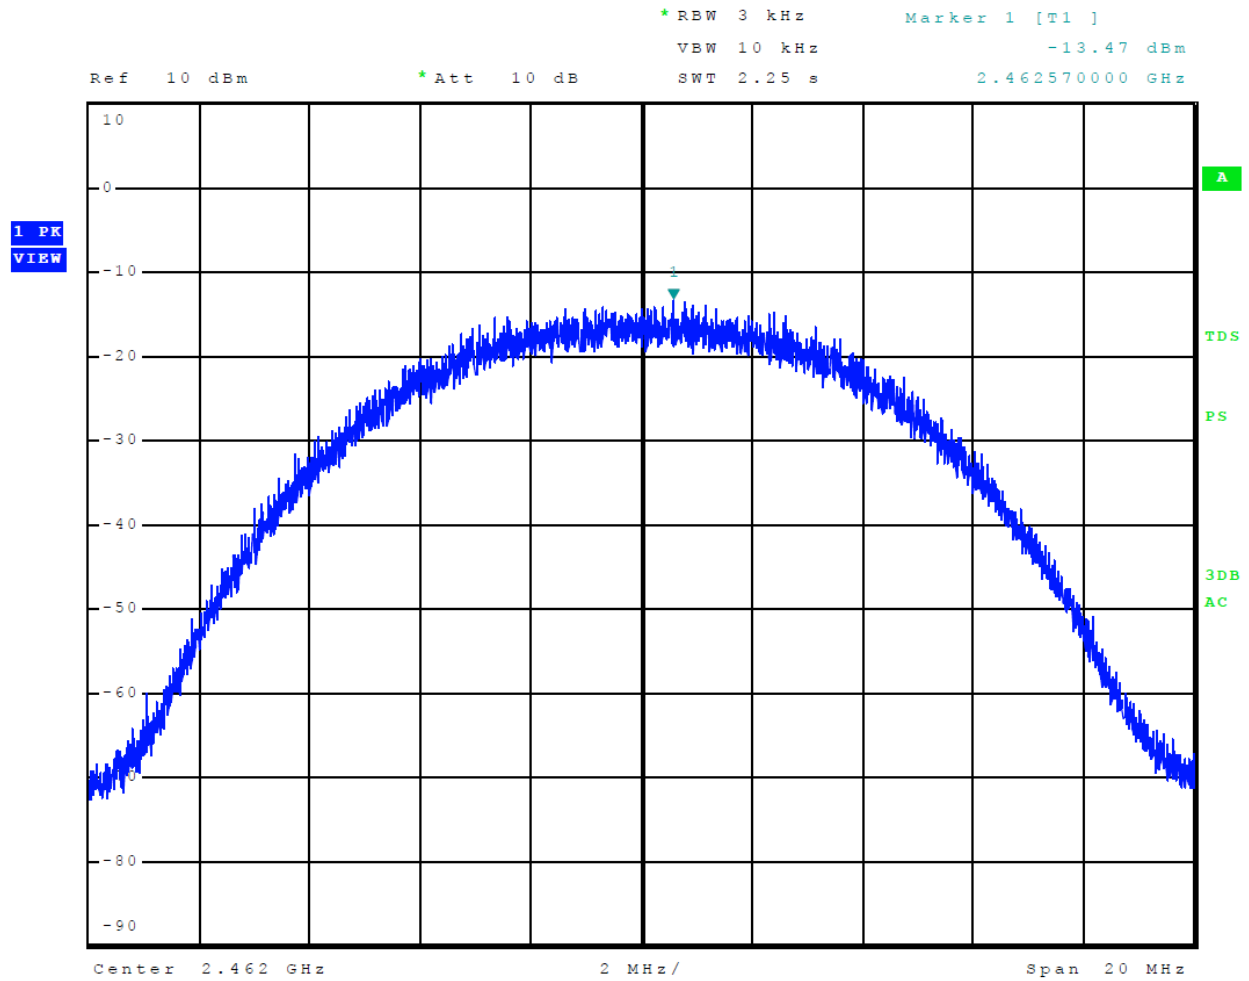


Figure 55 Plot of Transmitter Power Spectral Density Mode 15, Radio 2, 802.11g


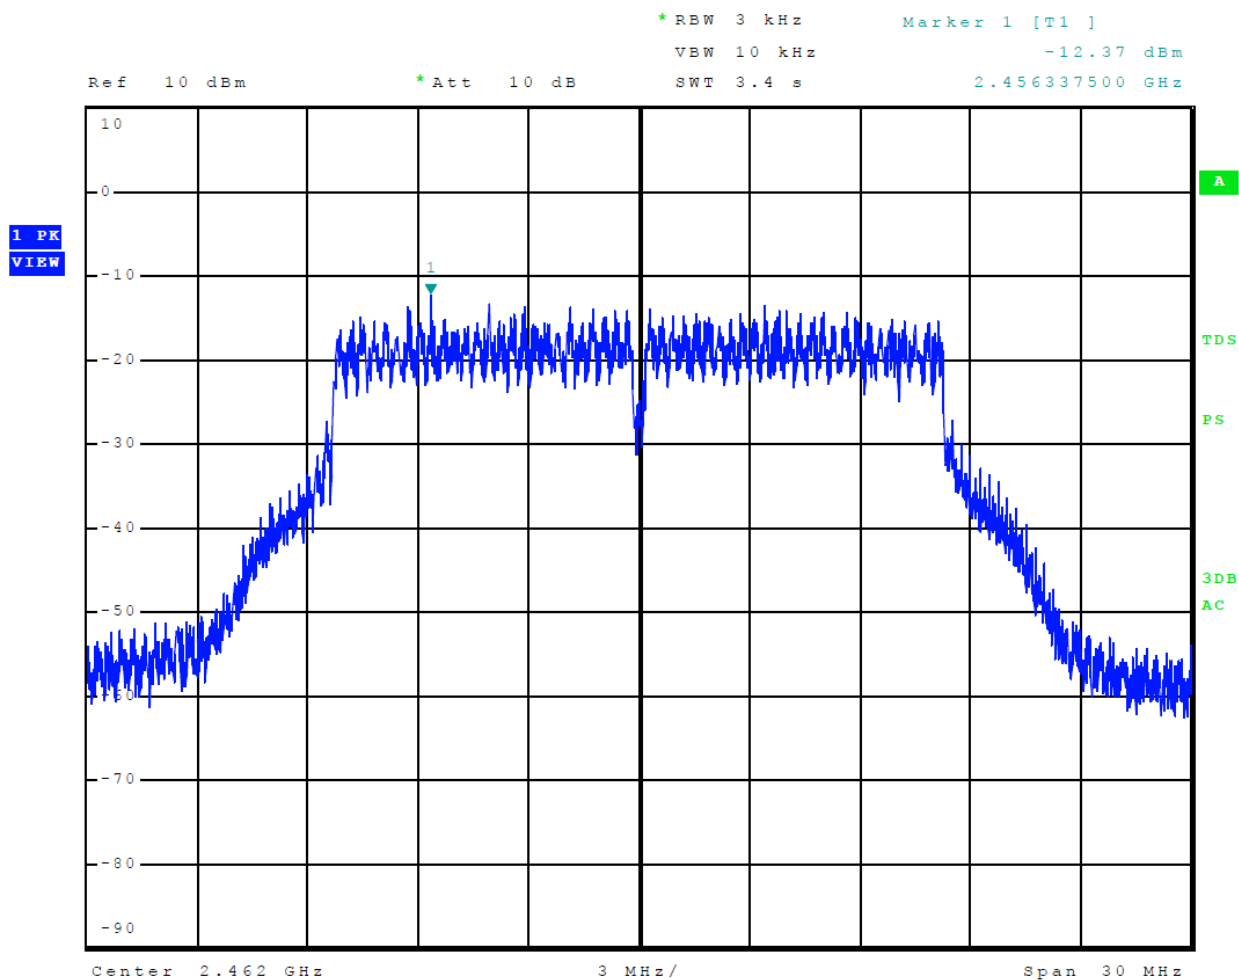


Figure 56 Plot of Transmitter Power Spectral Density Mode 16, Radio 2, 802.11n

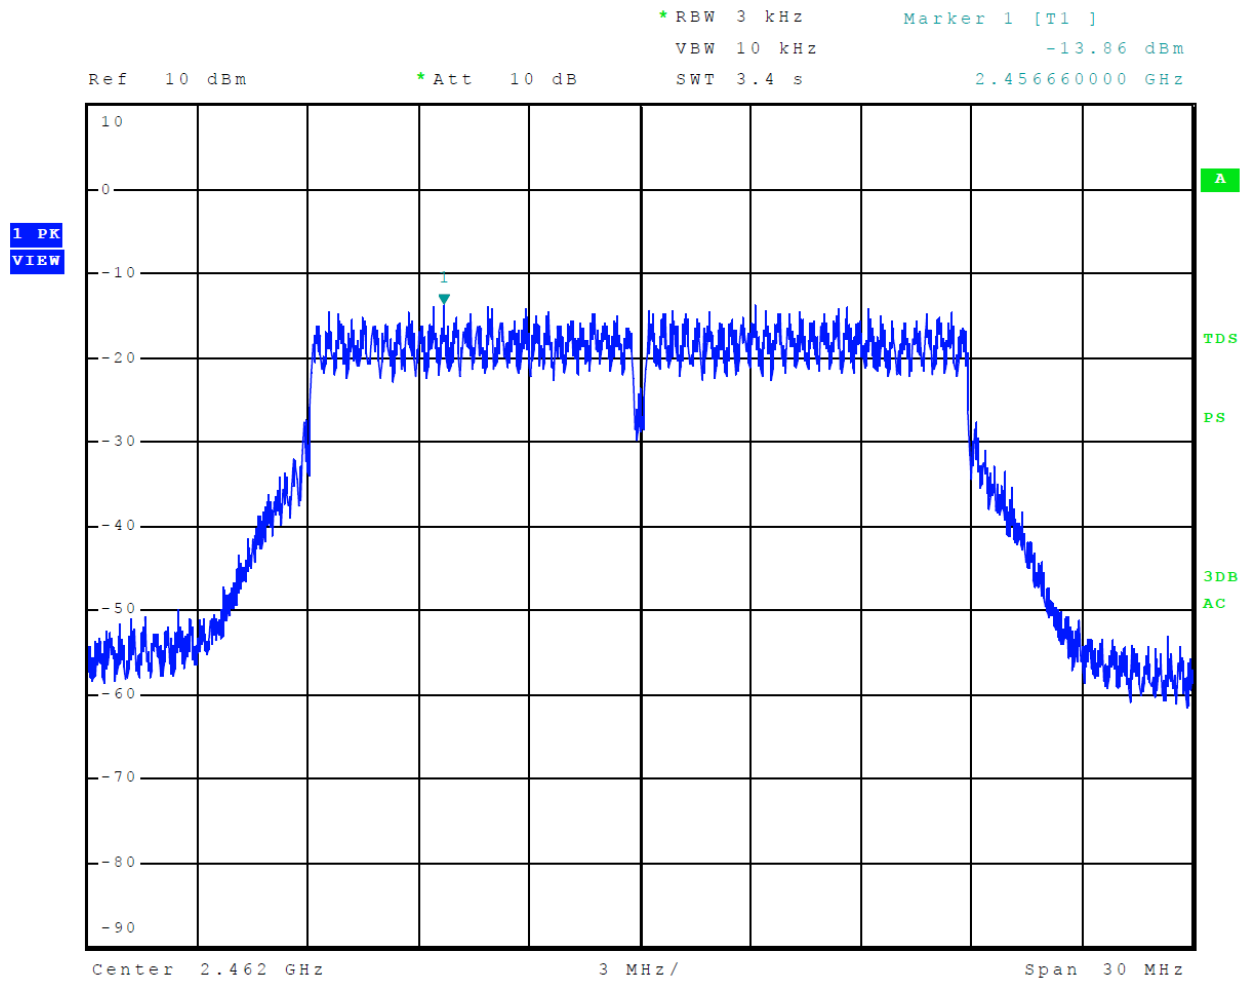

Transmitter Emissions Data

Table 12 Transmitter Radiated Emissions Mode 2, Radio 1, BT (2EDR)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	49.4	36.3	49.3	36.4	54.0	-17.7	-17.6
7206.0	52.9	40.0	52.9	40.0	54.0	-14.0	-14.0
9608.0	56.2	43.4	56.7	43.4	54.0	-10.6	-10.6
12010.0	59.1	46.1	58.7	46.1	54.0	-7.9	-7.9
14412.0	60.2	46.8	60.0	46.9	54.0	-7.2	-7.1
16814.0	64.9	52.1	65.0	52.2	54.0	-1.9	-1.8
2440.0	--	--	--	--	--	--	--
4880.0	50.1	36.7	50.3	36.7	54.0	-17.3	-17.3
7320.0	53.2	40.3	53.3	40.3	54.0	-13.7	-13.7
9760.0	56.3	43.5	56.5	43.5	54.0	-10.5	-10.5
12200.0	59.9	47.1	59.9	47.1	54.0	-6.9	-6.9
14640.0	60.8	47.6	60.0	47.6	54.0	-6.4	-6.4
17080.0	64.6	51.5	64.8	51.5	54.0	-2.5	-2.5
2480.0	--	--	--	--	--	--	--
4960.0	49.6	36.5	49.6	36.3	54.0	-17.5	-17.7
7440.0	52.5	39.9	52.9	39.9	54.0	-14.1	-14.1
9920.0	57.0	44.1	56.9	44.1	54.0	-9.9	-9.9
12400.0	59.7	47.0	59.8	46.9	54.0	-7.0	-7.1
14880.0	60.2	47.7	61.0	47.7	54.0	-6.3	-6.3
17360.0	64.5	51.1	64.1	51.0	54.0	-2.9	-3.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 13 Transmitter Radiated Emissions Mode 3, Radio 1, BT (3EDR)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	49.2	36.3	49.5	36.4	54.0	-17.7	-17.6
7206.0	53.2	40.0	52.8	40.0	54.0	-14.0	-14.0
9608.0	56.4	43.3	56.1	43.4	54.0	-10.7	-10.6
12010.0	59.9	46.1	58.8	46.1	54.0	-7.9	-7.9
14412.0	60.1	46.9	59.8	46.9	54.0	-7.1	-7.1
16814.0	65.1	52.2	64.9	52.2	54.0	-1.8	-1.8
2440.0	--	--	--	--	--	--	--
4880.0	50.2	36.6	50.1	36.5	54.0	-17.4	-17.5
7320.0	53.2	40.2	52.7	40.2	54.0	-13.8	-13.8
9760.0	56.3	43.4	56.3	43.4	54.0	-10.6	-10.6
12200.0	60.2	47.0	60.2	47.0	54.0	-7.0	-7.0
14640.0	60.4	47.4	60.7	47.5	54.0	-6.6	-6.5
17080.0	65.2	51.3	64.3	51.3	54.0	-2.7	-2.7
2480.0	--	--	--	--	--	--	--
4960.0	49.7	36.5	49.2	36.3	54.0	-17.5	-17.7
7440.0	52.7	39.8	53.0	39.8	54.0	-14.2	-14.2
9920.0	56.9	44.1	56.6	44.0	54.0	-9.9	-10.0
12400.0	59.6	46.9	60.3	46.9	54.0	-7.1	-7.1
14880.0	60.2	47.7	60.4	47.6	54.0	-6.3	-6.4
17360.0	64.8	51.0	63.9	50.9	54.0	-3.0	-3.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 14 Transmitter Radiated Emissions Mode 4, Radio 1, BT BLE

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	49.1	36.2	48.9	36.1	54.0	-17.8	-17.9
7206.0	52.6	39.9	52.4	39.9	54.0	-14.1	-14.1
9608.0	56.5	43.3	56.3	43.3	54.0	-10.7	-10.7
12010.0	58.9	45.9	59.1	45.9	54.0	-8.1	-8.1
14412.0	60.2	46.8	59.6	46.7	54.0	-7.2	-7.3
16814.0	64.6	52.0	65.0	51.9	54.0	-2.0	-2.1
2440.0	--	--	--	--	--	--	--
4880.0	49.7	36.4	49.7	36.4	54.0	-17.6	-17.6
7320.0	53.6	40.2	52.9	40.2	54.0	-13.8	-13.8
9760.0	56.6	43.3	56.7	43.4	54.0	-10.7	-10.6
12200.0	59.7	47.0	59.9	47.0	54.0	-7.0	-7.0
14640.0	61.1	47.4	60.1	47.5	54.0	-6.6	-6.5
17080.0	64.5	51.3	64.8	51.4	54.0	-2.7	-2.6
2480.0	--	--	--	--	--	--	--
4960.0	50.7	36.2	49.7	36.2	54.0	-17.8	-17.8
7440.0	52.8	39.8	52.2	39.8	54.0	-14.2	-14.2
9920.0	56.7	44.0	57.4	44.0	54.0	-10.0	-10.0
12400.0	60.0	46.9	60.0	46.8	54.0	-7.1	-7.2
14880.0	60.6	47.6	60.5	47.6	54.0	-6.4	-6.4
17360.0	63.5	50.9	64.1	50.8	54.0	-3.1	-3.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 15 Transmitter Radiated Emissions Mode 5, Radio 1, 802.11b

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	50.7	36.3	50.0	36.5	54.0	-17.7	-17.5
7236.0	52.5	39.9	53.2	40.1	54.0	-14.1	-13.9
9648.0	56.3	43.4	56.9	43.6	54.0	-10.6	-10.4
12060.0	59.5	46.4	59.7	46.4	54.0	-7.6	-7.6
14472.0	59.7	46.7	59.7	46.7	54.0	-7.3	-7.3
16884.0	65.4	52.0	65.0	51.9	54.0	-2.0	-2.1
2437.0	--	--	--	--	--	--	--
4874.0	51.2	36.8	49.9	36.8	54.0	-17.2	-17.2
7311.0	53.6	40.1	54.0	41.1	54.0	-13.9	-12.9
9748.0	56.2	43.4	56.1	43.5	54.0	-10.6	-10.5
12185.0	60.1	46.9	59.5	46.8	54.0	-7.1	-7.2
14622.0	60.6	47.6	60.0	47.6	54.0	-6.4	-6.4
17059.0	65.3	51.4	64.9	51.4	54.0	-2.6	-2.6
2462.0	--	--	--	--	--	--	--
4924.0	49.5	36.4	49.2	36.2	54.0	-17.6	-17.8
7386.0	53.3	40.0	53.3	40.0	54.0	-14.0	-14.0
9848.0	56.9	43.9	56.6	43.9	54.0	-10.1	-10.1
12310.0	60.4	47.6	60.8	47.6	54.0	-6.4	-6.4
14772.0	60.8	47.6	60.9	47.5	54.0	-6.4	-6.5
17234.0	64.2	50.9	64.3	50.9	54.0	-3.1	-3.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 16 Transmitter Radiated Emissions Mode 6, Radio 1, 802.11g

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.3	36.3	49.7	36.3	54.0	-17.7	-17.7
7236.0	53.0	40.2	53.3	40.1	54.0	-13.8	-13.9
9648.0	56.7	43.5	56.8	43.6	54.0	-10.5	-10.4
12060.0	59.5	46.4	59.4	46.3	54.0	-7.6	-7.7
14472.0	59.6	46.6	59.9	46.5	54.0	-7.4	-7.5
16884.0	64.7	51.9	64.6	51.8	54.0	-2.1	-2.2
2437.0	--	--	--	--	--	--	--
4874.0	50.4	36.6	49.8	36.6	54.0	-17.4	-17.4
7311.0	53.7	40.1	52.9	40.1	54.0	-13.9	-13.9
9748.0	56.0	43.5	56.2	43.4	54.0	-10.5	-10.6
12185.0	60.0	46.9	59.9	46.8	54.0	-7.1	-7.2
14622.0	60.9	47.7	60.4	47.5	54.0	-6.3	-6.5
17059.0	64.4	51.5	64.5	51.3	54.0	-2.5	-2.7
2462.0	--	--	--	--	--	--	--
4924.0	49.3	36.3	50.3	36.2	54.0	-17.7	-17.8
7386.0	53.2	40.1	53.8	40.1	54.0	-13.9	-13.9
9848.0	56.9	44.0	56.7	43.9	54.0	-10.0	-10.1
12310.0	61.0	47.7	61.2	47.6	54.0	-6.3	-6.4
14772.0	61.4	47.8	60.7	47.6	54.0	-6.2	-6.4
17234.0	64.4	51.1	64.4	51.0	54.0	-2.9	-3.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 17 Transmitter Radiated Emissions Mode 6, Radio 1, 802.11n

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.2	36.2	49.6	36.2	54.0	-17.8	-17.8
7236.0	53.2	40.1	52.9	39.9	54.0	-13.9	-14.1
9648.0	56.3	43.6	56.1	43.5	54.0	-10.4	-10.5
12060.0	59.9	46.4	59.8	46.4	54.0	-7.6	-7.6
14472.0	60.5	46.7	60.0	46.7	54.0	-7.3	-7.3
16884.0	65.2	52.0	65.2	52.0	54.0	-2.0	-2.0
2437.0	--	--	--	--	--	--	--
4874.0	49.5	36.6	49.7	36.6	54.0	-17.4	-17.4
7311.0	52.6	40.1	53.3	40.2	54.0	-13.9	-13.8
9748.0	56.0	43.5	56.8	43.5	54.0	-10.5	-10.5
12185.0	60.3	46.9	59.4	46.9	54.0	-7.1	-7.1
14622.0	60.8	47.7	60.6	47.7	54.0	-6.3	-6.3
17059.0	65.2	51.5	64.9	51.5	54.0	-2.5	-2.5
2462.0	--	--	--	--	--	--	--
4924.0	49.6	36.3	50.2	36.2	54.0	-17.7	-17.8
7386.0	52.8	40.0	53.0	40.0	54.0	-14.0	-14.0
9848.0	57.0	44.0	56.5	43.9	54.0	-10.0	-10.1
12310.0	60.6	47.7	60.7	47.6	54.0	-6.3	-6.4
14772.0	60.9	47.7	60.5	47.5	54.0	-6.3	-6.5
17234.0	64.5	51.0	64.6	50.7	54.0	-3.0	-3.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 18 Transmitter Radiated Emissions Mode 14, Radio 2, 802.11b

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	50.0	36.5	49.4	36.3	54.0	-17.5	-17.7
7236.0	53.7	40.3	53.6	40.7	54.0	-13.7	-13.3
9648.0	55.9	43.5	56.1	43.4	54.0	-10.5	-10.6
12060.0	59.5	46.5	59.7	46.4	54.0	-7.5	-7.6
14472.0	59.7	46.6	59.5	46.7	54.0	-7.4	-7.3
16884.0	65.2	51.8	65.1	51.7	54.0	-2.2	-2.3
2437.0	--	--	--	--	--	--	--
4874.0	51.5	37.3	51.8	38.3	54.0	-16.7	-15.7
7311.0	53.0	40.3	53.2	40.3	54.0	-13.7	-13.7
9748.0	57.0	43.5	56.2	43.6	54.0	-10.5	-10.4
12185.0	59.5	46.8	60.3	47.0	54.0	-7.2	-7.0
14622.0	60.3	47.5	60.9	47.9	54.0	-6.5	-6.1
17059.0	64.4	51.2	64.6	51.7	54.0	-2.8	-2.3
2462.0	--	--	--	--	--	--	--
4924.0	50.4	37.0	50.5	36.9	54.0	-17.0	-17.1
7386.0	53.6	40.1	54.2	41.3	54.0	-13.9	-12.7
9848.0	56.7	44.0	56.8	43.9	54.0	-10.0	-10.1
12310.0	60.7	47.8	60.5	47.7	54.0	-6.2	-6.3
14772.0	60.5	47.8	60.3	47.5	54.0	-6.2	-6.5
17234.0	65.1	51.2	64.1	50.9	54.0	-2.8	-3.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 19 Transmitter Radiated Emissions Mode 15, Radio 2, 802.11g

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.2	46.3	49.3	36.2	54.0	-7.7	-17.8
7236.0	54.0	40.1	53.4	40.5	54.0	-13.9	-13.5
9648.0	56.7	43.4	56.6	43.4	54.0	-10.6	-10.6
12060.0	59.6	46.5	58.8	46.2	54.0	-7.5	-7.8
14472.0	60.2	46.6	60.6	46.3	54.0	-7.4	-7.7
16884.0	65.1	51.9	64.8	51.6	54.0	-2.1	-2.4
2437.0	--	--	--	--	--	--	--
4874.0	50.4	36.8	50.2	37.1	54.0	-17.2	-16.9
7311.0	53.0	40.2	53.4	40.2	54.0	-13.8	-13.8
9748.0	56.7	43.4	56.6	43.3	54.0	-10.6	-10.7
12185.0	60.1	46.8	59.4	46.7	54.0	-7.2	-7.3
14622.0	61.0	47.4	60.3	47.4	54.0	-6.6	-6.6
17059.0	64.0	51.1	65.0	51.3	54.0	-2.9	-2.7
2462.0	--	--	--	--	--	--	--
4924.0	49.9	36.4	49.6	36.4	54.0	-17.6	-17.6
7386.0	53.2	39.9	53.0	40.2	54.0	-14.1	-13.8
9848.0	57.4	43.9	56.8	44.0	54.0	-10.1	-10.0
12310.0	60.4	47.5	60.7	47.6	54.0	-6.5	-6.4
14772.0	59.9	47.4	60.7	47.5	54.0	-6.6	-6.5
17234.0	64.9	50.6	64.6	50.8	54.0	-3.4	-3.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 20 Transmitter Radiated Emissions Mode 16, Radio 2, 802.11n

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2412.0	--	--	--	--	--	--	--
4824.0	49.2	36.3	49.7	36.2	54.0	-17.7	-17.8
7236.0	53.4	40.2	52.6	39.9	54.0	-13.8	-14.1
9648.0	56.5	43.4	56.7	43.4	54.0	-10.6	-10.6
12060.0	59.4	46.5	59.1	46.4	54.0	-7.5	-7.6
14472.0	59.6	46.7	59.6	46.5	54.0	-7.3	-7.5
16884.0	65.0	52.0	64.6	51.9	54.0	-2.0	-2.1
2437.0	--	--	--	--	--	--	--
4874.0	50.3	36.8	49.9	36.5	54.0	-17.2	-17.5
7311.0	53.0	40.2	54.0	40.6	54.0	-13.8	-13.4
9748.0	56.6	43.6	56.3	43.4	54.0	-10.4	-10.6
12185.0	59.7	46.9	59.4	46.8	54.0	-7.1	-7.2
14622.0	60.7	47.7	60.2	47.4	54.0	-6.3	-6.6
17059.0	65.1	51.4	64.5	51.1	54.0	-2.6	-2.9
2462.0	--	--	--	--	--	--	--
4924.0	50.9	36.3	50.1	36.5	54.0	-17.7	-17.5
7386.0	52.7	40.0	53.2	40.1	54.0	-14.0	-13.9
9848.0	56.9	43.9	56.8	44.0	54.0	-10.1	-10.0
12310.0	60.4	47.5	60.5	47.6	54.0	-6.5	-6.4
14772.0	60.3	47.4	60.6	47.5	54.0	-6.6	-6.5
17234.0	63.5	50.7	63.4	50.9	54.0	-3.3	-3.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 21 Transmitter Antenna Port Conducted Data Radio 1 / modes 2-4

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
Mode 2, BT (2EDR)				
2402	0.0009	1,192.3	1,072.1	-16.3
2441	0.0010	1,192.3	1,072.1	-15.8
2480	0.0010	1,197.1	1,072.1	-16.1
Mode 3, BT (3EDR)				
2402	0.0010	1,192.3	1,072.1	-16.7
2441	0.0011	1,192.3	1,072.1	-16.5
2480	0.0010	1,197.1	1,067.3	-16.7
Mode 4, BT BLE				
2402	0.0004	1,048.1	676.3	-20.0
2441	0.0004	1,048.1	673.1	-19.5
2480	0.0004	1,048.1	679.5	-20.0

Table 22 Transmitter Antenna Port Conducted Data Radio 1 / modes 5-7

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
Mode 5, 802.11b				
2412	0.007	10,807.5	7,280.0	-14.6
2437	0.008	10,852.5	7,655.0	-11.8
2462	0.009	10,815.0	7,565.0	-12.9
Mode 6, 802.11g				
2412	0.011	17,270.0	16,399.2	-14.9
2437	0.012	17,280.0	16,353.6	-13.9
2462	0.015	17,280.0	16,353.6	-12.7
Mode 7, 802.11n				
2412	0.011	18,310.0	17,606.2	-14.0
2437	0.012	18,360.0	17,608.2	-14.6
2462	0.015	18,350.0	17,703.1	-14.0

Table 23 Transmitter Antenna Port Conducted Data Radio 2 / modes 14-16

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm)
Mode 14, 802.11b				
2412	0.006	10,822.5	7,750.0	-14.5
2437	0.007	10,822.5	7,460.0	-14.0
2462	0.008	10,822.5	7,490.0	-13.5
Mode 15, 802.11g				
2412	0.013	17,260.0	16,289.5	-13.9
2437	0.014	17,270.0	16,407.7	-14.4
2462	0.017	17,270.0	16,388.2	-12.4
Mode 16, 802.11n				
2412	0.012	18,300.0	17,581.5	-14.8
2437	0.014	18,330.0	17,645.6	-14.0
2462	0.017	18,340.0	17,620.0	-13.9

Table 24 Transmitter Antenna Port Conducted Combined Output Power*

Frequency MHz	Antenna Port Conducted Output Power (dBm)			Limit (dBm)
	Radio 1	Radio 2	Total	
802.11b				
2412	8.3	8.0	11.1	28
2437	8.8	8.5	11.8	28
2462	9.6	9.2	12.3	28
802.11g				
2412	10.5	11.1	13.8	28
2437	10.8	11.5	14.2	28
2462	11.9	12.2	15.1	28
802.11n				
2412	10.5	10.8	13.6	28
2437	10.9	11.5	14.2	28
2462	11.8	12.3	15.1	28

* See KDB 662911 D01 v02r01

Table 25 Transmitter Antenna Port Conducted Combined PSD*

Frequency MHz	Peak Power Spectral Density (dBm)			Limit (dBm)
	Radio 1	Radio 2	Total	
802.11b				
2412	-14.6	-14.5	-11.5	8
2437	-11.8	-14.0	-9.7	8
2462	-12.9	-13.5	-10.1	8
802.11g				
2412	-14.9	-13.9	-11.4	8
2437	-13.9	-14.4	-11.1	8
2462	-12.7	-12.4	-9.5	8
802.11n				
2412	-14.0	-14.8	-11.4	8
2437	-14.6	-14.0	-11.3	8
2462	-14.0	-13.9	-10.9	8

* See KDB 662911 D01 v02r01

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 104 of 110

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated and conducted emission requirements of 47CFR Subpart 15C Paragraph 15.247, RSS-247 Issue 3 and RSS-GEN Issue 5 emission requirements for Digital Transmission Systems. The highest average output power measured at the antenna port for modes 2 through 4 was 0.001 Watts. The highest average output power measured at the antenna port for modes 5 through 7 was 0.015 Watts. The highest average output power measured at the antenna port for modes 14 through 16 was 0.016 Watts.

The highest peak power spectral density measured at the antenna port for modes 2 through 4 presented a minimum margin of -23.8 dB below the requirements. The highest peak power spectral density measured at the antenna port for modes 5 through 7 presented a minimum margin of -19.8 dB below the requirements. The highest peak power spectral density measured at the antenna port for modes 14 through 16 presented a minimum margin of -20.4 dB below the requirements.

Per KDB 662911 D01 v02r01 regarding emissions testing of transmitters with multiple outputs in the same band, combined output power and PSD numbers were calculated for the appropriate modes. Results are in Tables 24 and 25.

The EUT demonstrated a minimum margin of -1.8 dB below the harmonic emissions requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/20/2025	3/20/2026
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☐ Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
☐ Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
☒ Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/17/2025	3/17/2027
☒ Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
☒ Antenna	Com Power	AH-840 (101046)	18-40 GHz	3/17/2025	3/17/2027
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/21/2025	1/21/2026
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☐ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
☐ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
☒ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
☒ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/19/2025	3/19/2026
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/21/2025	3/21/2026
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/21/2025	3/21/2026
☐ Attenuator	Fairview	SA6NFN100W-40 (1625)	30-18000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/21/2025	3/21/2026
☒ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/21/2025	3/21/2026
☒ Weather station	Davis	6152 (A70927D44N)		7/11/2024	7/11/2025

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 108 of 110

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☐ Frequency Counter: Leader		LDC-825 (8060153)		3/19/2025	3/19/2026
☐ ISN	Com-Power	Model ISN T-8 (600111)		3/19/2025	3/19/2026
☐ LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
☐ LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
☒ LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
☒ Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/22/2025	3/22/2026
☒ Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/20/2025	3/20/2026
☐ Antenna:	Solar	9229-1 & 9230-1		2/5/2025	2/5/2026
☐ CDN:	Com-Power	Model CDN M325E		9/16/2024	9/16/2025
☐ Oscilloscope Scope: Tektronix		MDO 4104		2/5/2025	2/5/2026
☐ EMC Transient Generator HVT		TR 3000		2/5/2025	2/5/2026
☐ AC Power Source (Ametech, California Instruments)				2/5/2025	2/5/2026
☒ Field Intensity Meter: EFM-018				2/5/2025	2/5/2026
☒ ESD Simulator: MZ-15				2/5/2025	2/5/2026
☐ Injection Clamp Luthi Model EM101				not required	
☐ R.F. Power Amp ACS 230-50W				not required	
☐ R.F. Power Amp EIN Model: A301				not required	
☐ R.F. Power Amp A.R. Model: 10W 1010M7				not required	
☐ R.F. Power Amp A.R. Model: 50U1000				not required	
☒ Temperature Chamber				not required	
☒ Shielded Room				not required	
POSSIBLY USE FOR GARMIN GPS TESTING					
☐ GNSS Sig Gen SG80K, SN: GNSS-00952				not required	

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ilac-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2024-03-18 through 2025-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ilac-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-03-11 through 2026-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road

Lenexa, KS 66214

Phone: (913) 660-0666

Revision 4

HVIN: GMN-03000

Test #: 250128

Test to: 47CFR 15.247

File: GMN-03000 FCC DTS TstRpt 250128 r4

Garmin International, Inc

FCC ID: IPH-04286

SN: 78F000511 & 78F000512

Date: September 11, 2025

Page 110 of 110