

FCC/ISED Test Report

Prepared for: Garmin International, Inc.

Address: 1200 E. 151st Street
Olathe, Kansas, 66062, USA

Product: A04378

Test Report No: R230504-20-E2B

Approved by:


Fox Lane,
EMC Test Engineer

DATE: June 9, 2025

Total Pages: 49

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

REVISION PAGE

Rev. No.	Date	Description
0	7 August 2024	Issued by FLane Reviewed by KVepuri Prepared by FLane, ESchmidt
A	30 August 2024	Added statement regarding Band edges – FL
B	9 June 2025	Included statement in section 4.4 – FL

	Report Number:	R230504-20-E2B	Rev	B
	Prepared for:	Garmin International, Inc.		

CONTENTS

Revision Page	2
1.0 Summary of test results.....	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units.....	5
3.0 Laboratory and General Test Description	6
3.1 Laboratory description.....	6
3.2 Test personnel.....	6
3.3 Test equipment.....	7
3.4 General Test Procedure and Setup for Radio Measuremnts.....	8
4.0 Results	10
4.1 Output Power	12
4.2 Bandwidth.....	13
4.3 Duty Cycle	14
4.4 Radiated emissions.....	16
4.5 Conducted Spurious Emissions	21
4.6 Band edges	24
4.7 Power Spectral Density.....	27
4.8 Conducted AC Mains Emissions	28
Appendix A: Sample Calculation	31
Appendix B – Measurement Uncertainty	32
Appendix C – Graphs and Tables	33
REPORT END.....	49

	Report Number:	R230504-20-E2B	Rev	B
	Prepared for:	Garmin International, Inc.		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISSED RSS-Gen, Issue 5
- (3) ISSED RSS-247, Issue 3

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 15.35 RSS Gen, Issue 5, Section 6.10	Duty Cycle	Pass
FCC Part 15.247(b)(3) RSS-247 Issue 3 Section 5.4(d)	Peak output power	Pass
FCC Part 15.247(a)(2) RSS-247 Issue 3 Section 5.2 (a)	Bandwidth	Pass
FCC Part 15.209 RSS-Gen Issue 5, Section 7.3	Receiver Radiated Emissions	Pass
FCC Part 15.209 (restricted bands), 15.247 (unrestricted) RSS-247 Issue 3 Section 5.5, RSS-Gen Issue 5, Section 8.9	Transmitter Radiated Emissions	Pass
FCC Part 15.247(e) RSS-247 Issue 3 Section 5.2 (b)	Power Spectral Density	Pass
FCC Part 15.209, 15.247(d) RSS-247 Issue 3 Section 5.5	Band Edge Measurement	Pass
FCC Part 15.207 RSS-Gen Issue 5, Section 8.8	Conducted Emissions	Pass



Report Number: R230504-20-E2B

Rev

B

Prepared for: Garmin International, Inc.

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Summary and Operating Condition:

EUT	A04378
FCC ID	IPH-04378
IC	1792A-04378
EUT Received	23 October 2023
EUT Tested	23 October 2023- 3 July 2024
Serial No.	3442231329 (Radiated Measurements) 3442134065 (Conducted Measurements)
Operating Band	2400 – 2483.5 MHz
Device Type	☒ GMSK ☐ GFSK ☐ BT BR ☐ BT EDR 2MB ☐ BT EDR 3MB ☐ 802.11x
Power Supply / Voltage	Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: AQ27A-59CFA GPN: 362-00118-00 (Representative Power Supply)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

GMSK 1MB Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

GMSK 2MB Transmissions:

Channel	Frequency
Low	2402 MHz
Mid	2440 MHz
High	2480 MHz

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequencies and designations.

2.3 DESCRIPTION OF SUPPORT UNITS

None

	Report Number:	R230504-20-E2B	Rev	B
	Prepared for:	Garmin International, Inc.		

3.0 LABORATORY AND GENERAL TEST DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521
 A2LA Certificate Number: 1953.01
 FCC Accredited Test Site Designation No: US1060
 Industry Canada Test Site Registration No: 4294A
 NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^\circ$ Celsius



3.2 TEST PERSONNEL

No.	PERSONNEL	TITLE	ROLE
1	Fox Lane	Test Engineer	Testing and Report
2	Blake Winter	Test Engineer	Testing
3	Ethan Schmidt	Test Engineer	Testing and Report
4	Karthik Vepuri	Technical Manager	Review

Notes: All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number: R230504-20-E2B

Rev

B

Prepared for: Garmin International, Inc.

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 17, 2023	July 17, 2025
Keysight EXA Signal Analyzer	N9010A	MY56070862	July 18, 2023	July 17, 2025
SunAR RF Motion	JB1	A091418	July 27, 2023	July 26, 2024
ETS-Lindgren Red Horn Antenna	3115	218576	July 31, 2023	July 30, 2024
Com-Power LISN, Single Phase	LI-220C	20070017	July 17, 2023	July 17, 2025
Agilent Preamp*	87405A	3207A01475	May 2, 2024	May 2, 2026
ETS Red Preamplifier (Orange)*	3115-PA	00218576	January 22, 2024	January 22, 2026
Trilithic High Pass Filter*	6HC330	23042	June 5, 2023	June 5, 2025
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	July 30, 2020	July 30, 2024
NCEE Labs-NSA on 10m Chamber*	10m Semi-anechoic chamber-NSA	NCEE-001	May 22, 2024	May 22, 2026
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	June 5, 2023	June 5, 2025
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3874	June 5, 2023	June 5, 2025
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	June 5, 2023	June 5, 2025
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	June 5, 2023	June 5, 2025
N connector bulkhead (control room)*	PE9128	NCEEBH2	June 5, 2023	June 5, 2025
TDK Emissions Lab Software	V11.25	700307	NA	NA

*Internal Characterization

Notes:

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

Conducted ☒

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

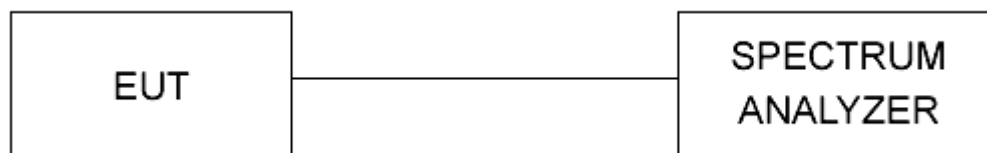


Figure 1 - Bandwidth Measurements Test Setup

Radiated ☒

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

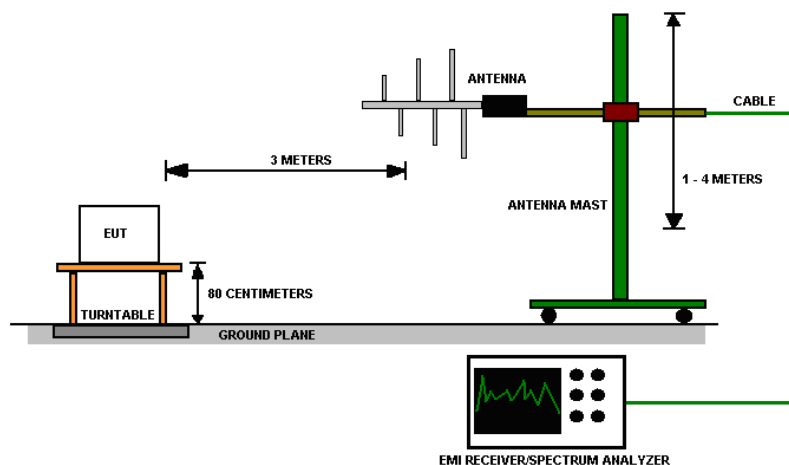


Figure 2 - Radiated Emissions Test Setup

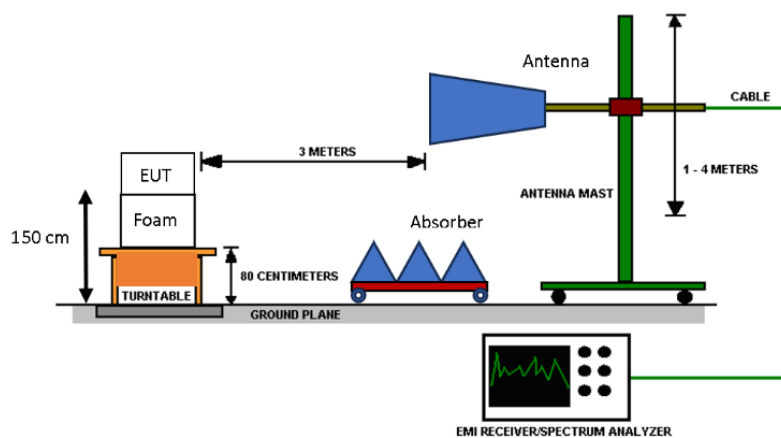


Figure 3 - Radiated Emissions Test Setup, >1GHz

4.0 RESULTS

DTS Radio Measurements					
CHANNEL	Transmitter	Occupied Bandwidth (kHz)	6 dB Bandwidth (kHz)	Peak PSD (dBm)	RESULT
Low	GMSK 1MB	1051.5	707.2	-19.001	PASS
Mid	GMSK 1MB	1050.1	710.6	-16.049	PASS
High	GMSK 1MB	1050.3	712.3	-16.245	PASS
Low	GMSK 2MB	2064.6	1189.0	-21.274	PASS
Mid	GMSK 2MB	2066.8	1187.0	-18.494	PASS
High	GMSK 2MB	2068.6	1188.0	-18.992	PASS
Occupied Bandwidth = N/A; 6 dB Bandwidth Limit >500kHz				PSD Limit = 8dBm	

DTS Power Measurements						
CHANNEL	Transmitter	Raw Avg Output Power (dBm)	DCCF (dB) (for Power)**	Corrected Avg Output Power(dBm)	Corrected Avg Output Power(mW)	RESULT
Low	GMSK 1MB	-4.29	1.03	-3.260	0.472	PASS
Mid	GMSK 1MB	-2.37	1.03	-1.340	0.735	PASS
High	GMSK 1MB	-2.78	1.03	-1.750	0.668	PASS
Low	GMSK 2MB	-5.35	0.97	-4.380	0.365	PASS
Mid	GMSK 2MB	-2.36	0.97	-1.390	0.726	PASS
High	GMSK 2MB	-2.73	0.97	-1.760	0.667	PASS
**See Section 4.3 for more information regarding DCCF						



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

Peak Restricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Highest out of band level (dBuV/m @ 3m)	Detector	Limit (dBuV/m @ 3m)	Margin	Result
Low	GMSK 1MB	2390.00	54.346	Peak	73.98	19.634	PASS
Low	GMSK 2MB	2390.00	49.691	Peak	73.98	24.289	PASS
High	GMSK 1MB	2483.50	55.913	Peak	73.98	18.067	PASS
High	GMSK 2MB	2483.50	54.577	Peak	73.98	19.403	PASS

*Limit shown is the average limit taken from FCC Part 15.209

Average Restricted Band-Edge									
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Average Out of Band Level (dBuV/m @ 3m)	DCCF for Emissions (dB)**	Corrected Out of band level (dBuV/m @ 3m)	Meas. Type	Limit (dBuV/m @ 3m)	Margin	Result
Low	GMSK 1MB	2390.00	42.736	2.07	44.806	Average	53.98	9.174	PASS
Low	GMSK 2MB	2390.00	38.195	1.94	40.135	Average	53.98	13.845	PASS
High	GMSK 1MB	2483.50	42.115	2.07	44.185	Average	53.98	9.795	PASS
High	GMSK 2MB	2483.50	39.688	1.94	41.628	Average	53.98	12.352	PASS

Corrected Out of band level = Average out of band level + DCCF for emissions

*Limit shown is the average limit taken from FCC Part 15.209

**See Section 4.3 for more information regarding DCCF

Entirety of restricted bands were investigated and found to be compliant, worst-case emissions were reported.

Unrestricted Band-Edge							
CHANNEL	Mode	Band edge /Measurement Frequency (MHz)	Relative Highest out of band level (dBm)	Relative Fundamental (dBm)	Delta (dB)	Min Delta (dB)	Result
Low	GMSK 1MB	2400.00	55.607	103.458	47.852	30.00	PASS
Low	GMSK 2MB	2400.00	71.616	103.616	32.00	30.00	PASS
High	GMSK 1MB	2483.50	53.751	106.160	52.409	30.00	PASS
High	GMSK 2MB	2483.50	53.628	106.155	52.527	30.00	PASS



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

4.1 OUTPUT POWER

Test Method:

All measurements were performed using section 11.9.2.2.4 from ANSI C63.10.

Limits of power measurements:**For FCC Part 15.247 Device:**

The maximum allowed output power is 30 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:**Pass****Comments:**

1. All the output power plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

4.2 BANDWIDTH

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of bandwidth measurements:

For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational/documentary purposes only. The 6dB bandwidth of the signal must be greater than 500 kHz.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the bandwidth plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.

4.3 DUTY CYCLE

Test Method:

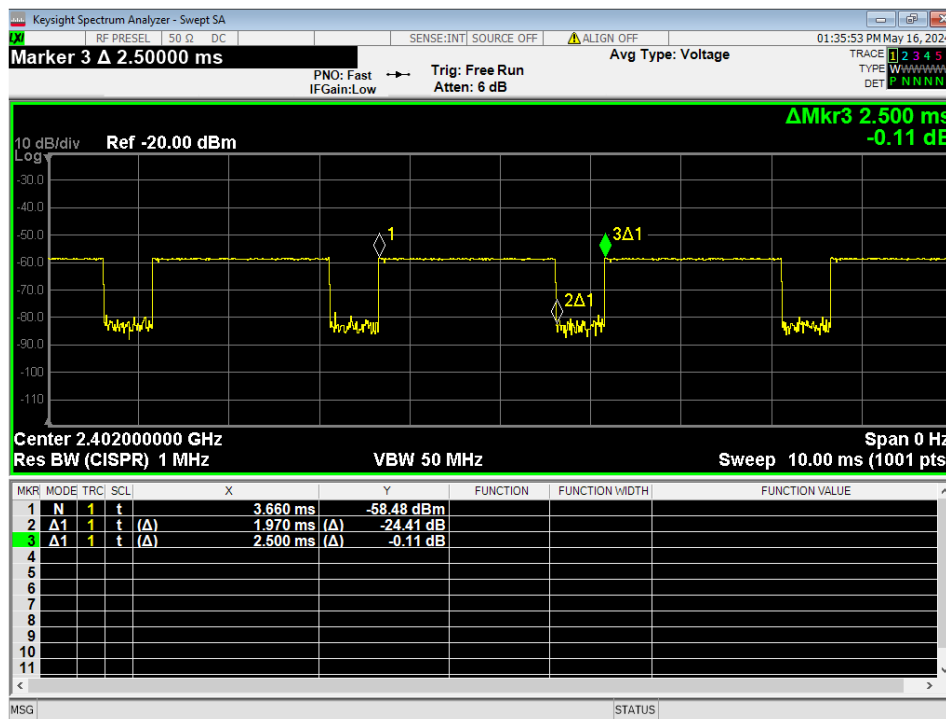


Figure 4 – Duty Cycle, GMSK 1MB

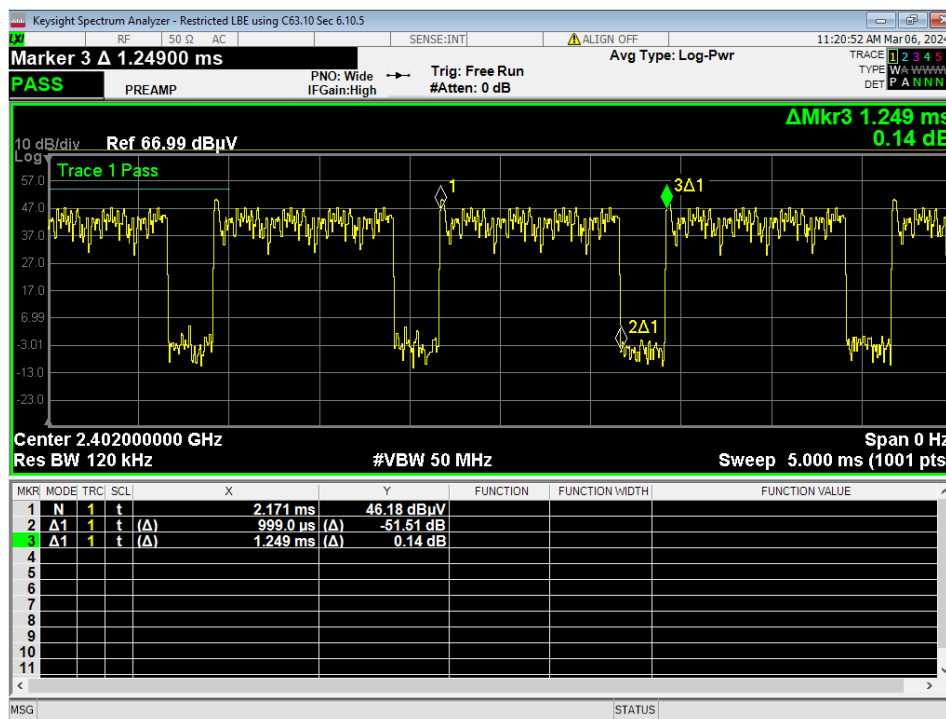


Figure 5 – Duty Cycle, GMSK 2MB



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

Transmitter	DC	DCCF For Emissions	DCCF For Power
GMSK 1MB	0.788	2.07	1.03
GMSK 2MB	0.800	1.94	0.97

DC = ON Time / Period

DCCF For Emissions = $20 \cdot \log(1/DC)$

DCCF For Power = $10 \cdot \log(1/DC)$

GMSK 1MB:

DC = $1.970/2.500 = 0.788$

DCCF For Emissions = $20 \cdot \log(1/0.788) = 2.07\text{dB}$

DCCF For Power = $10 \cdot \log(1/0.788) = 1.03\text{dB}$

GMSK 2MB:

DC = $0.999/1.249 = 0.80$

DCCF For Emissions = $20 \cdot \log(1/0.80) = 1.94\text{dB}$

DCCF For Power = $10 \cdot \log(1/0.230) = 0.97\text{dB}$

4.4 RADIATED EMISSIONS

Test Method:

ANSI C63.10-2020, Section 6.5, 6.6

Limits for radiated emissions measurements:

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

FREQUENCIES (MHz)	FIELD STRENGTH ($\mu\text{V/m}$)	MEASUREMENT DISTANCE (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 * \log * \text{Emission level } (\mu\text{V/m})$.
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worst-case emissions were produced while running off of USB power, so results from this mode are presented.



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

Deviations from test standard:

No deviation.

EUT operating conditions

Details can be found in section 2.1 of this report.

Test results:

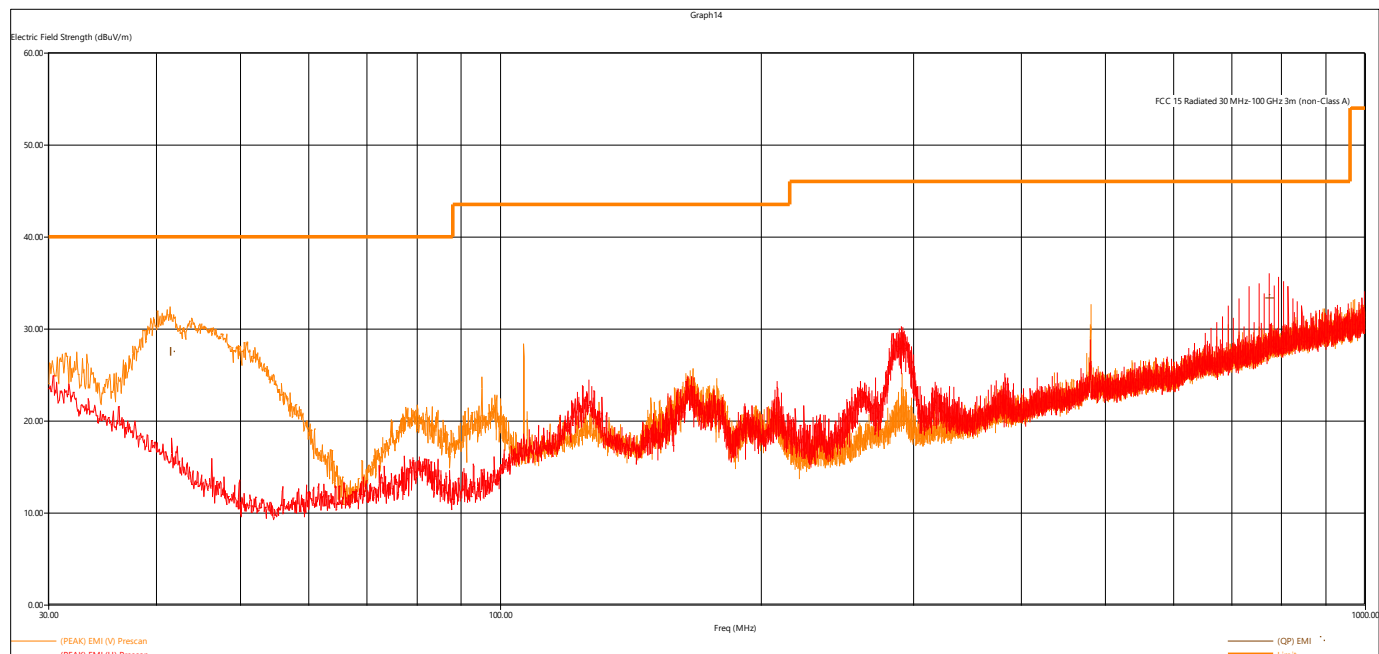


Figure 6 - Radiated Emissions Plot, Receive

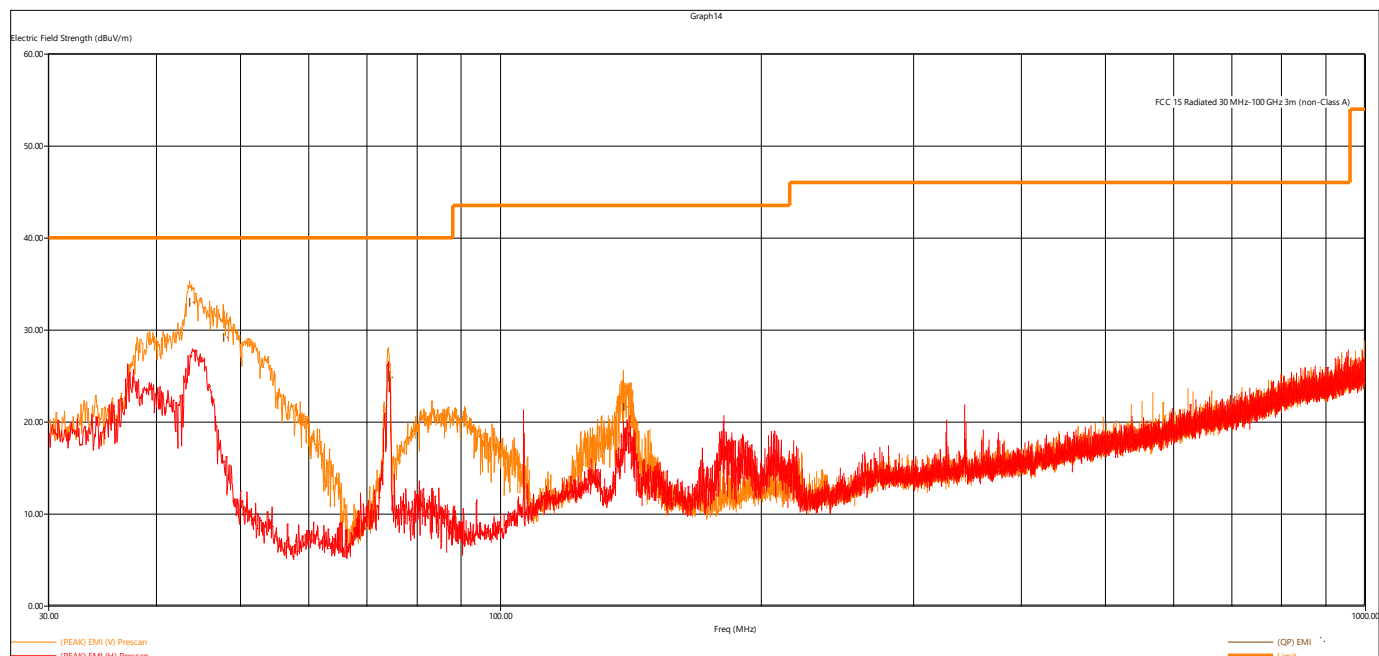


Figure 7 - Radiated Emissions Plot, GMSK 1MB

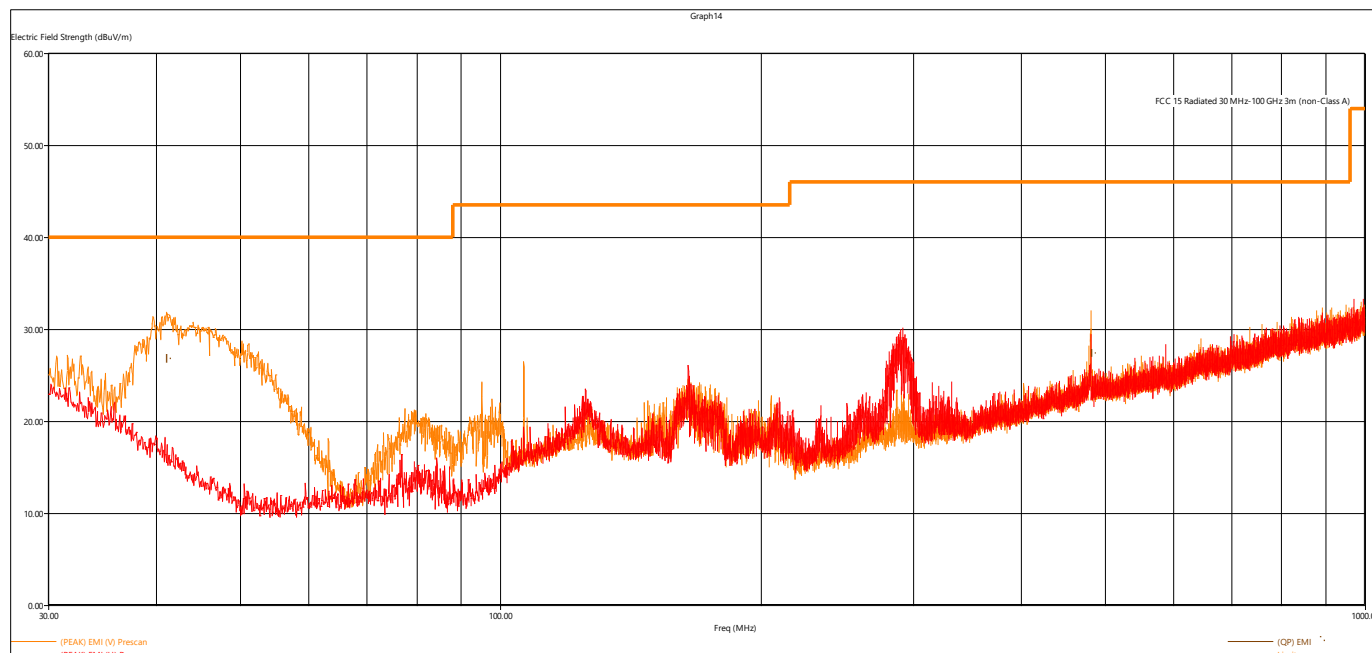


Figure 8 - Radiated Emissions Plot, GMSK 2MB

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level

Quasi-Peak Measurements								
Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBuV/m	dBuV/m	dB	cm.	deg.			
43.870080	32.92	40.00	7.08	109.02	276.75	V	Mid	BLE 1MB
47.901840	29.16	40.00	10.84	111.17	358.25	V	Mid	BLE 1MB
73.999200	24.79	40.00	15.21	171.35	290.00	V	Mid	BLE 1MB
138.645120	21.55	43.52	21.97	108.97	54.50	V	Mid	BLE 1MB
40.973760	26.80	40.00	13.20	112.23	106.50	V	Mid	BLE 2MB
481.218000	27.32	46.02	18.70	107.82	9.00	V	Mid	BLE 2MB
773.878320	33.26	46.02	12.76	113.01	228.50	H	Rx	
41.514480	27.48	40.00	12.52	104.29	117.00	V	Rx	

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above. All other measurements were found to be at least 6 dB below the limit.



Report Number: R230504-20-E2B

Rev

B

Prepared for: Garmin International, Inc.

Peak Measurements, BLE

Frequency	Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dBμV/m	dB	cm.	deg.			
4881.292000	39.71	73.98	34.27	330.76	238.25	H	Mid	BLE 1MB
7319.880000	56.25	73.98	17.73	245.02	54.25	V	Mid	BLE 1MB
4959.646000	44.40	73.98	29.58	322.64	237.00	H	High	BLE 1MB
7440.148000	53.63	73.98	20.35	131.47	52.75	V	High	BLE 1MB
7318.486000	57.80	73.98	16.18	238.08	38.25	V	Mid	BLE 2MB
7321.354000	57.21	73.98	16.77	181.37	38.25	V	Mid	BLE 2MB
7438.484000	54.22	73.98	19.76	128.65	26.50	V	High	BLE 2MB

All other measurements including up to 25GHz were found to be at least 6 dB below the limit.

Average Measurements, BLE

Frequency	Level	DCCF	Corrected Level	Limit	Margin	Height	Angle	Pol	Channel	Modulation
MHz	dBμV/m	dB	dBμV/m	dBμV/m	dB	cm.	deg.			
4881.292000	26.28	2.07	28.35	53.98	27.70	330.76	238.25	H	Mid	BLE 1MB
7319.880000	45.01	2.07	47.08	53.98	8.97	245.02	54.25	V	Mid	BLE 1MB
4959.646000	33.93	2.07	36.00	53.98	20.05	322.64	237.00	H	High	BLE 1MB
7440.148000	42.36	2.07	44.43	53.98	11.62	131.47	52.75	V	High	BLE 1MB
7318.486000	46.23	1.94	48.17	53.98	7.75	238.08	38.25	V	Mid	BLE 2MB
7321.354000	46.83	1.94	48.77	53.98	7.15	181.37	38.25	V	Mid	BLE 2MB
7438.484000	42.14	1.94	44.08	53.98	11.84	128.65	26.50	V	High	BLE 2MB

All other measurements including up to 25GHz were found to be at least 6 dB below the limit.



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

4.5 CONDUCTED SPURIOUS EMISSIONS

Test Method:

ANSI C63.10-2020, Section 6.7

Limits of spurious emissions:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Test procedures:

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report.

Deviations from test standard:

None.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Note that the line shown on the plot(s) is not a limit line. It is a line for reference.

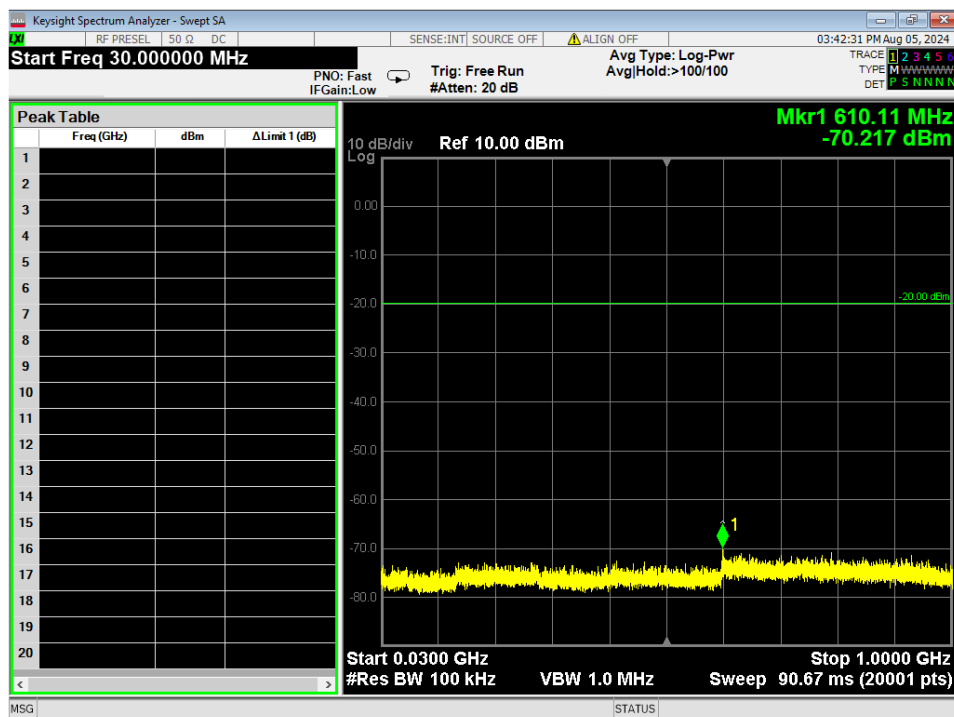


Figure 9 - Conducted Spurious emissions, GMSK 1MB, 30MHz – 1GHz, Mid

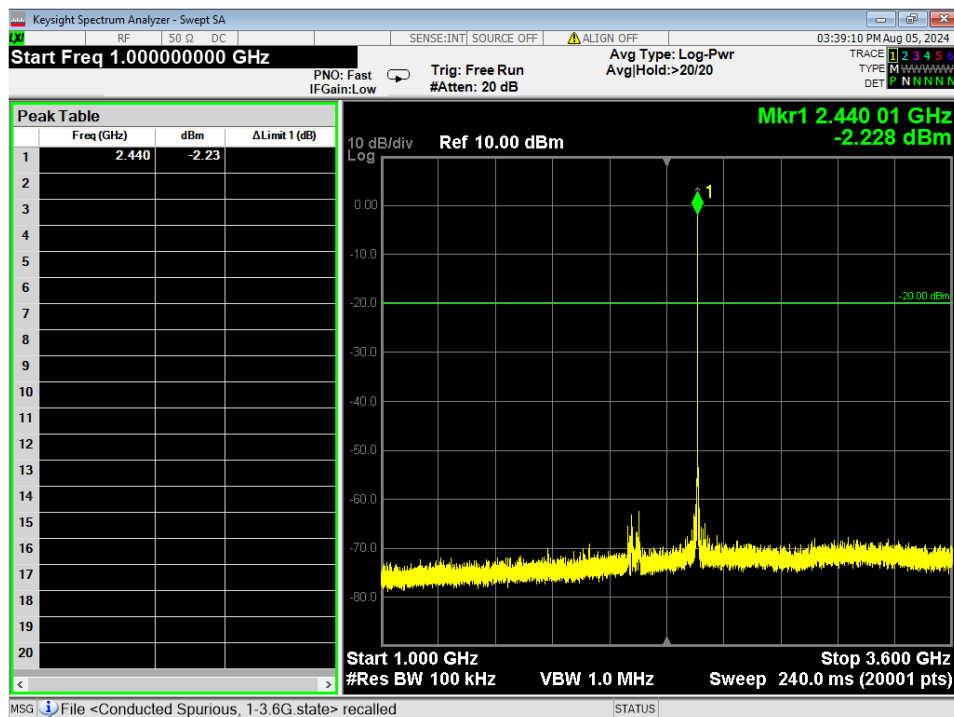


Figure 10 - Conducted Spurious emissions, GMSK 1MB, 1GHz – 3.6GHz, Mid

	Report Number:	R230504-20-E2B	Rev	B
	Prepared for:	Garmin International, Inc.		

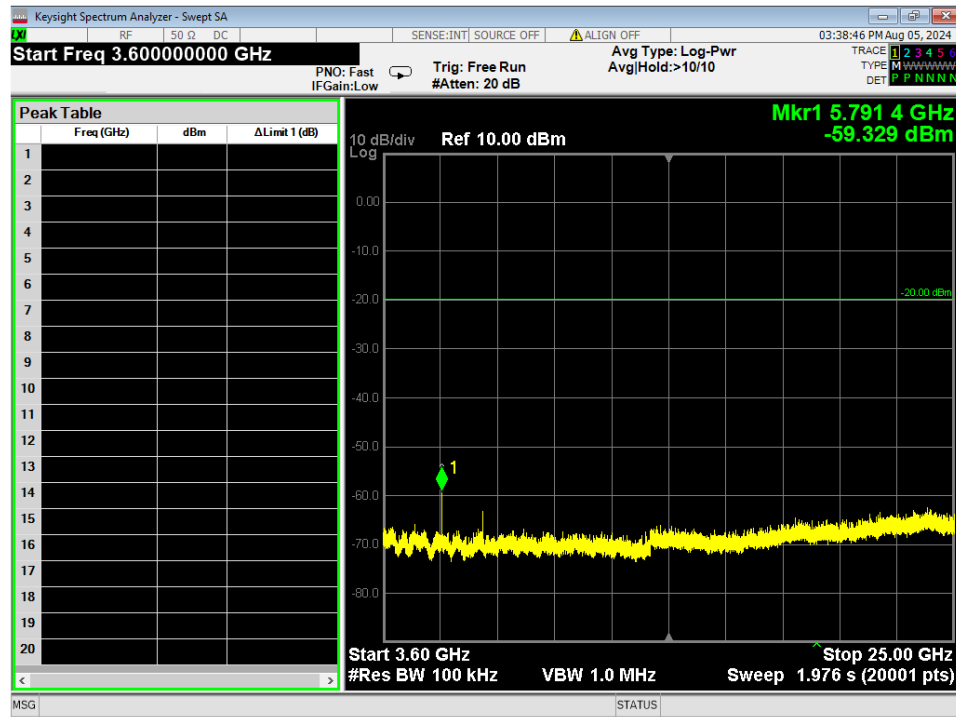


Figure 11 - Conducted Spurious emissions, GMSK 1MB, 3.6GHz – 25GHz, Mid

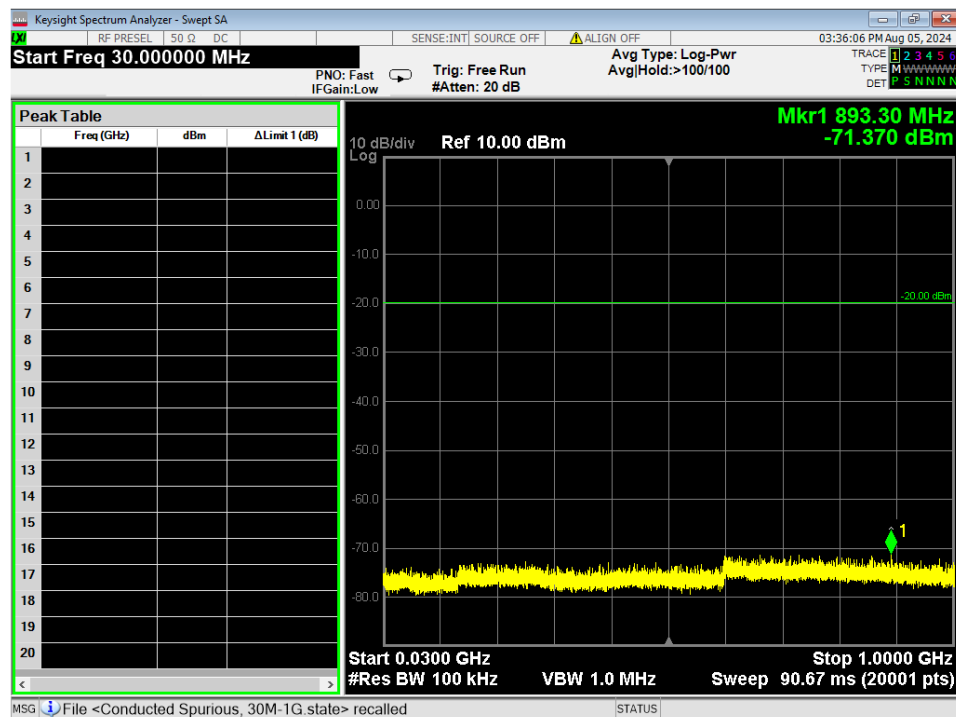


Figure 12 - Conducted Spurious emissions, GMSK 2MB, 30MHz – 1GHz, Mid

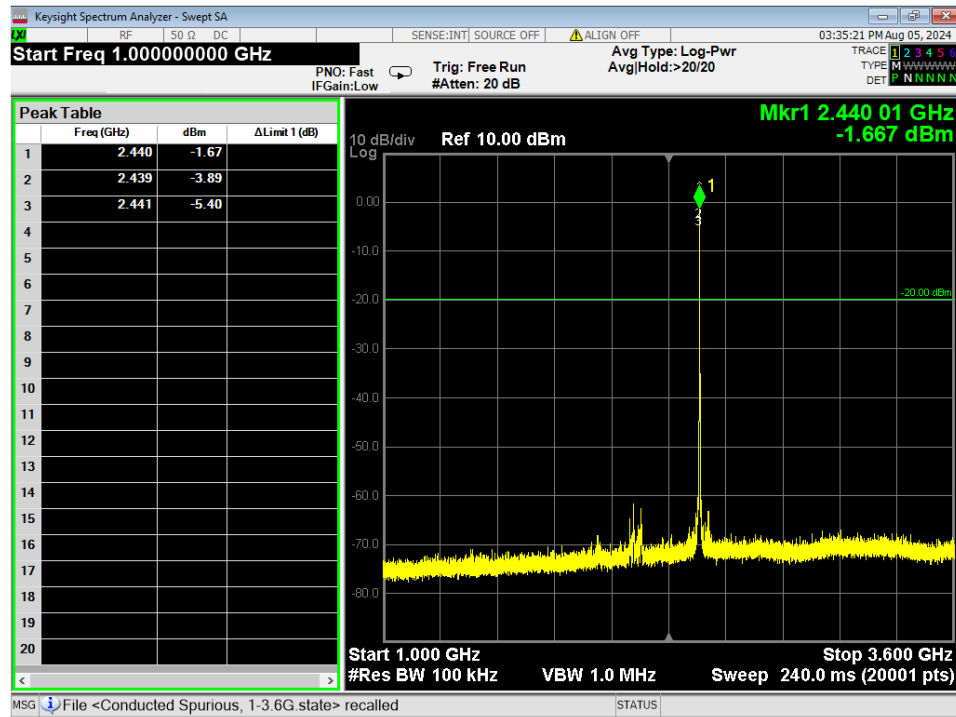


Figure 13 – Conducted Spurious emissions, GMSK 2MB, 1GHz – 3.6GHz, Mid

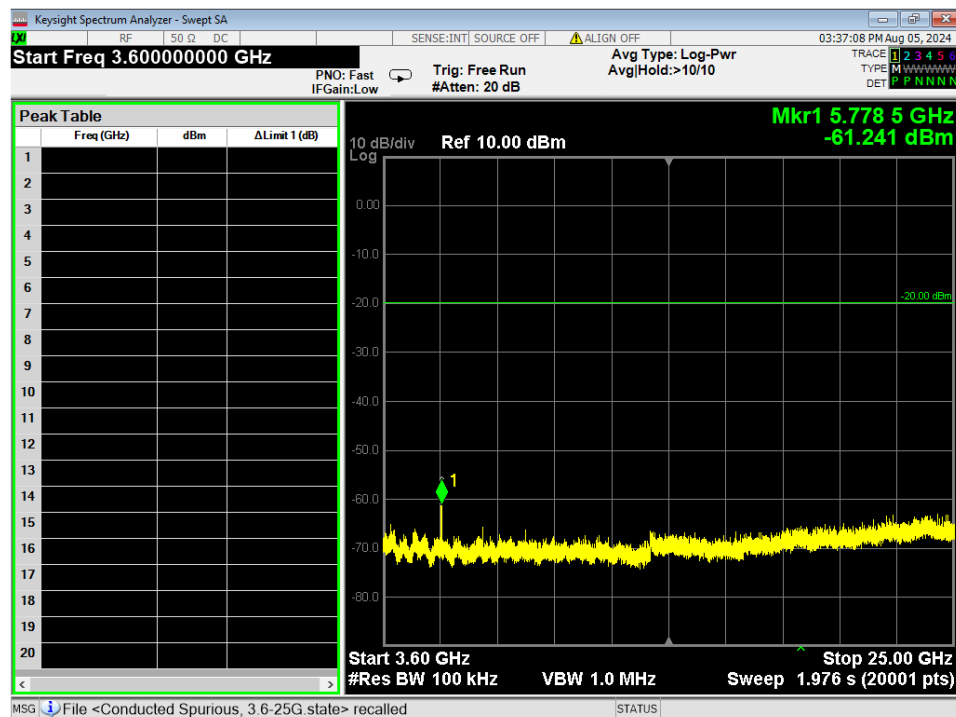


Figure 14 - Conducted Spurious emissions, GMSK 2MB, 3.6GHz – 25GHz, Mid

4.6 BAND EDGES



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of band-edge measurements:**For FCC Part 15.247 Device:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

Test procedures:

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Test setup details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

Test results:

Pass

Comments:

1. All the band edge plots can be found in Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 30 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing it to the general limit defined in Part 15.209.
4. Tabulated data is listed in section 4.0.



Report Number: R230504-20-E2B

Rev

B

Prepared for: Garmin International, Inc.

4.7 POWER SPECTRAL DENSITY

Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

Limits of power measurements:

For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

Test procedures:

Details can be found in section 3.4 of this report.

Deviations from test standard:

No deviation.

Test setup:

Details can be found in section 3.4 of this report.

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test results:

Pass

Comments:

1. All the Power Spectral Density (PSD) plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.

4.8 CONDUCTED AC MAINS EMISSIONS

Test Method:

ANSI C63.10-2020, Section(s) 6.2

Limits for conducted emissions measurements:

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Test Procedures:

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

Deviation from the test standard:

No deviation

EUT operating conditions:

Details can be found in section 2.1 of this report.

Test Results:

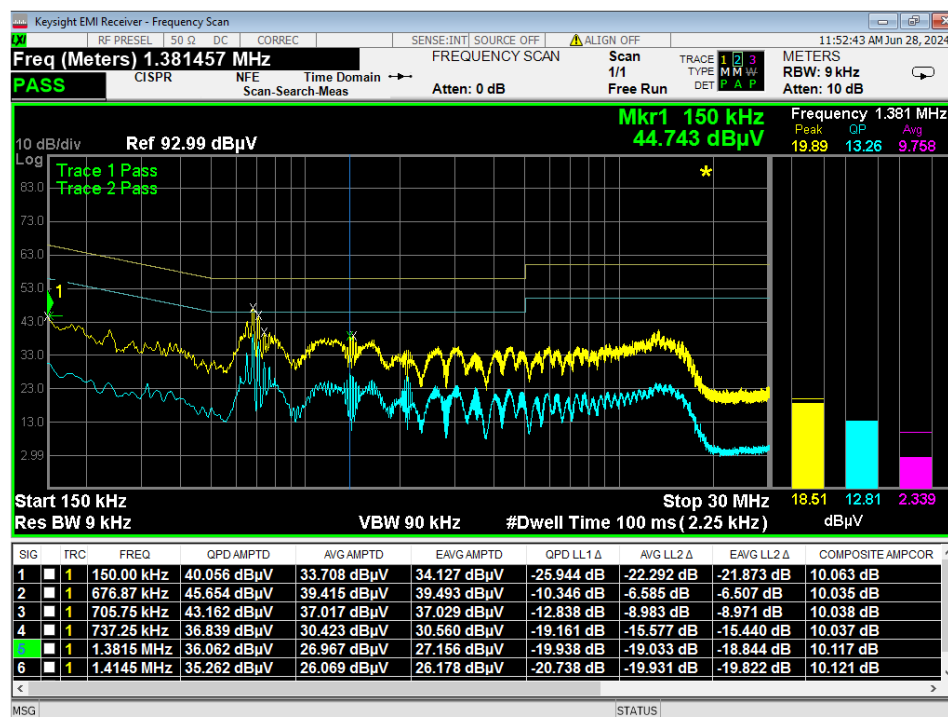


Figure 15 - Conducted Emissions Plot, Line, TX

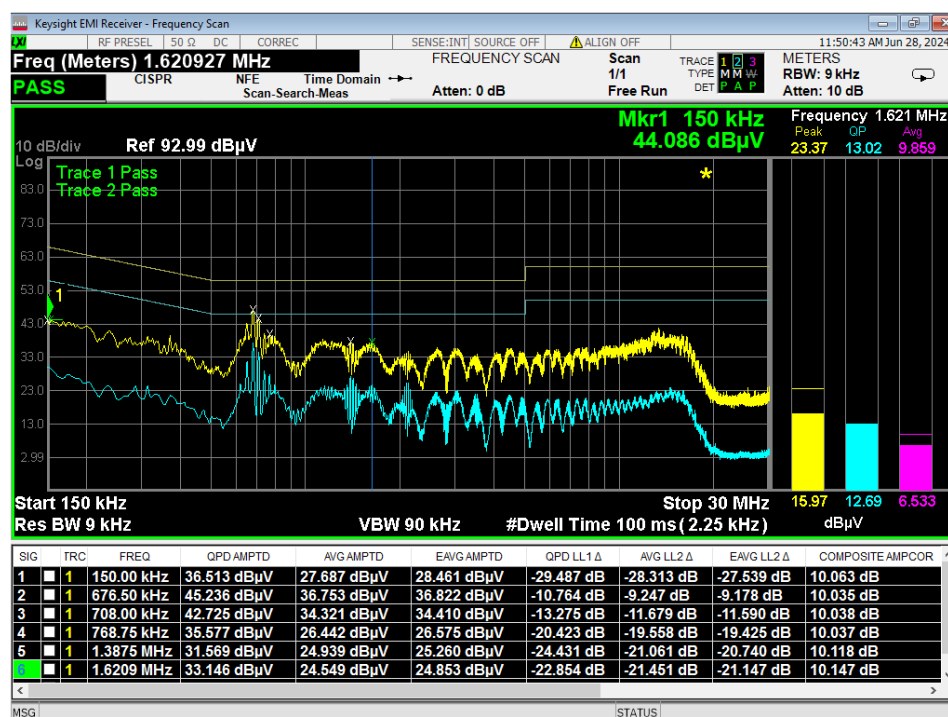


Figure 16 - Conducted Emissions Plot, Neutral, TX

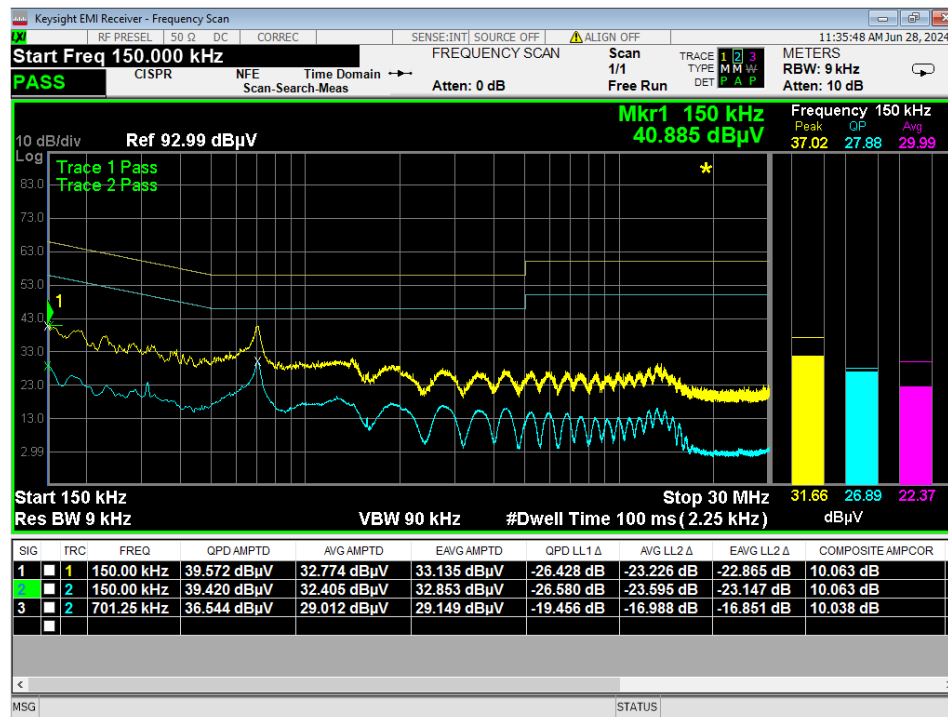


Figure 17 - Conducted Emissions Plot, Line, IDLE

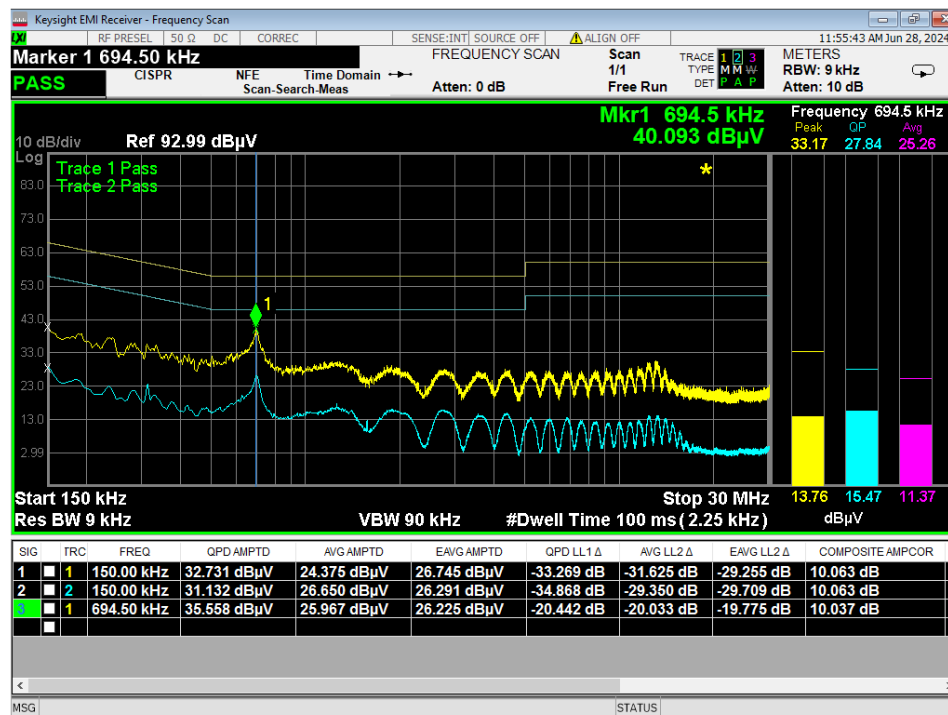


Figure 18 - Conducted Emissions Plot, Neutral, IDLE

	Report Number:	R230504-20-E2B	Rev	B
	Prepared for:	Garmin International, Inc.		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the $20 \cdot \log(T_{\text{on}}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (\text{Watts}) = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}/10]} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

$$\text{Conversion from 3m field strength to EIRP (d=3):}$$

$$EIRP = [FS(\text{V/m}) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = FS(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = FS(\text{dB}\mu\text{V/m}) - 95.23$$

$$10\log(10^9) \text{ is the conversion from micro to milli}$$



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

APPENDIX B – MEASUREMENT UNCERTAINTY


NCEE Labs does not add uncertainty values to levels/measurements.

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08
Emissions limits, conducted	30MHz – 18GHz	±3.03

Expanded uncertainty values are calculated to a confidence level of 95%.


APPENDIX C – GRAPHS AND TABLES

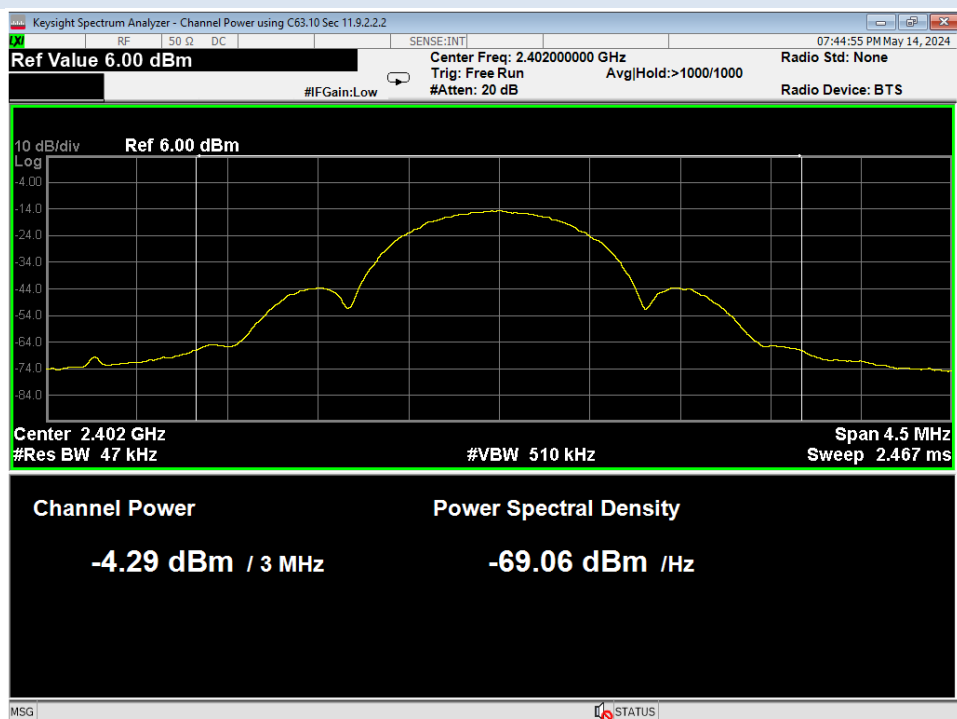


01 Average Power, Low Channel, GMSK 1MB

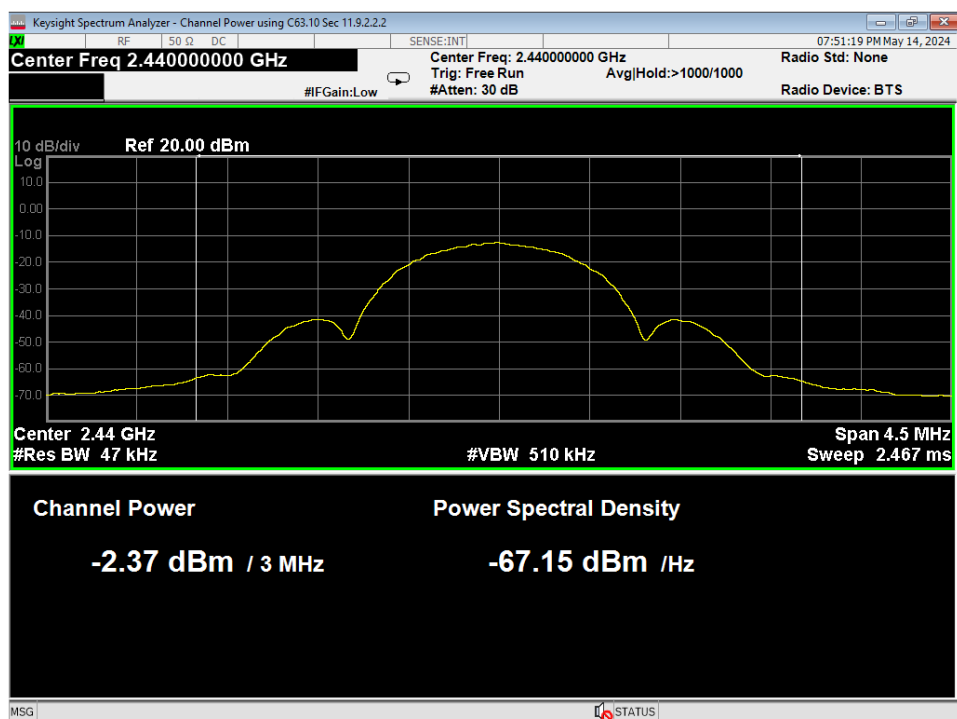


02 Average Power, Mid Channel, GMSK 1MB

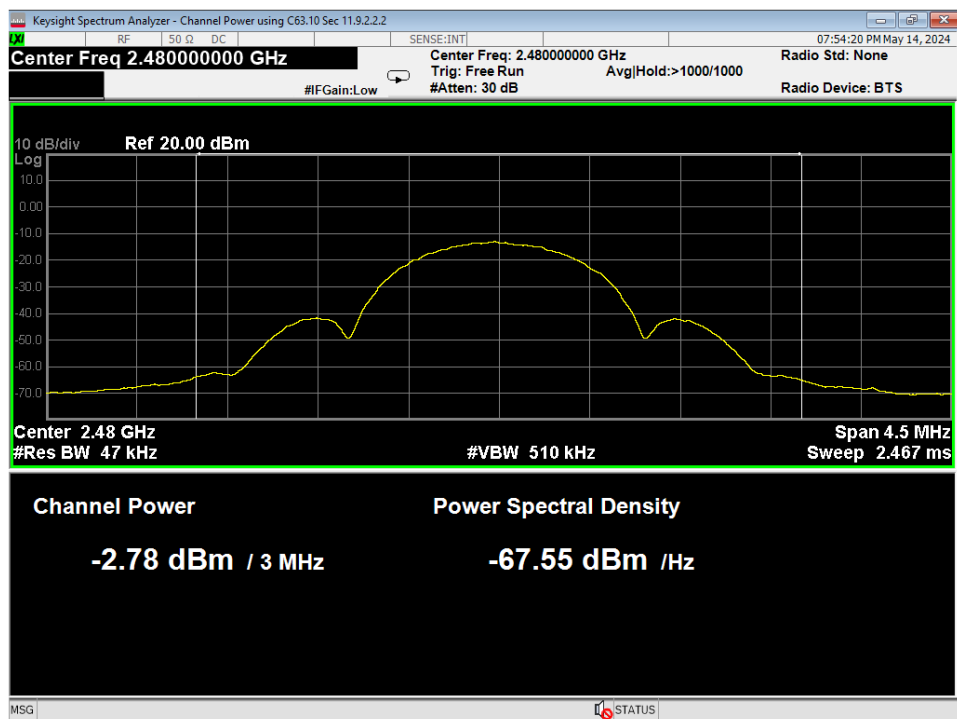


03 Average Power, High Channel, GMSK 1MB

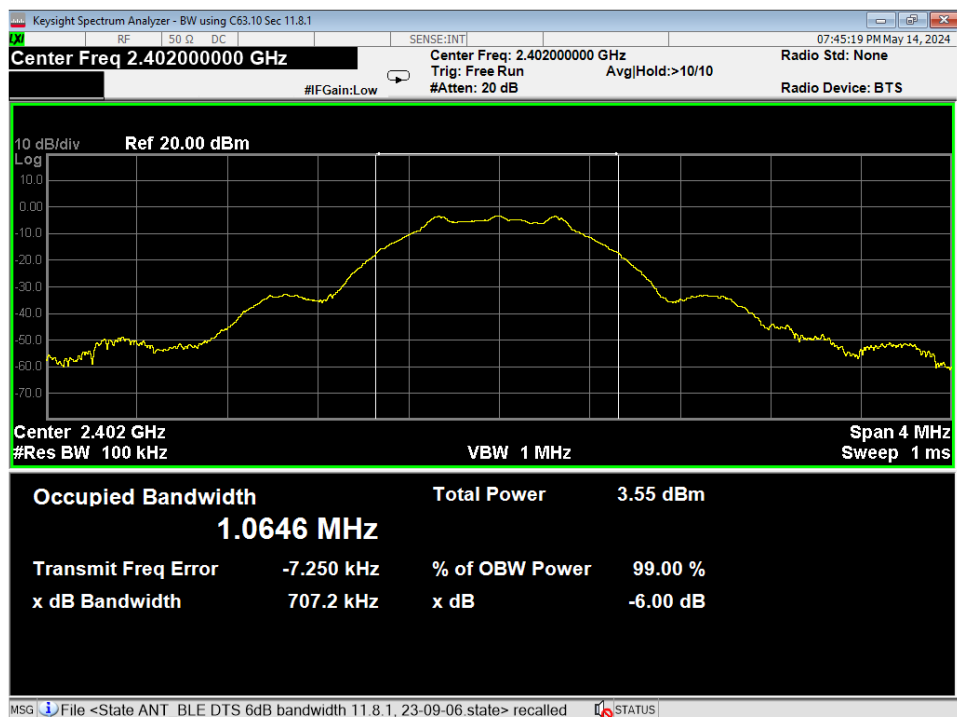

04 6dB Bandwidth, Low Channel, GMSK 1MB

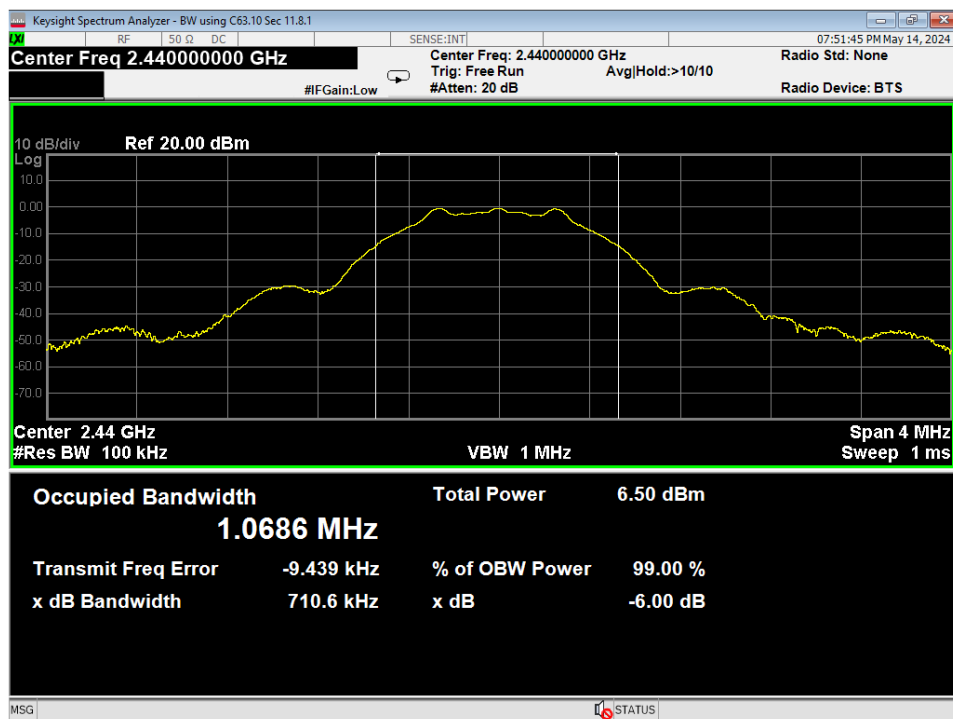


05 6dB Bandwidth, Mid Channel, GMSK 1MB

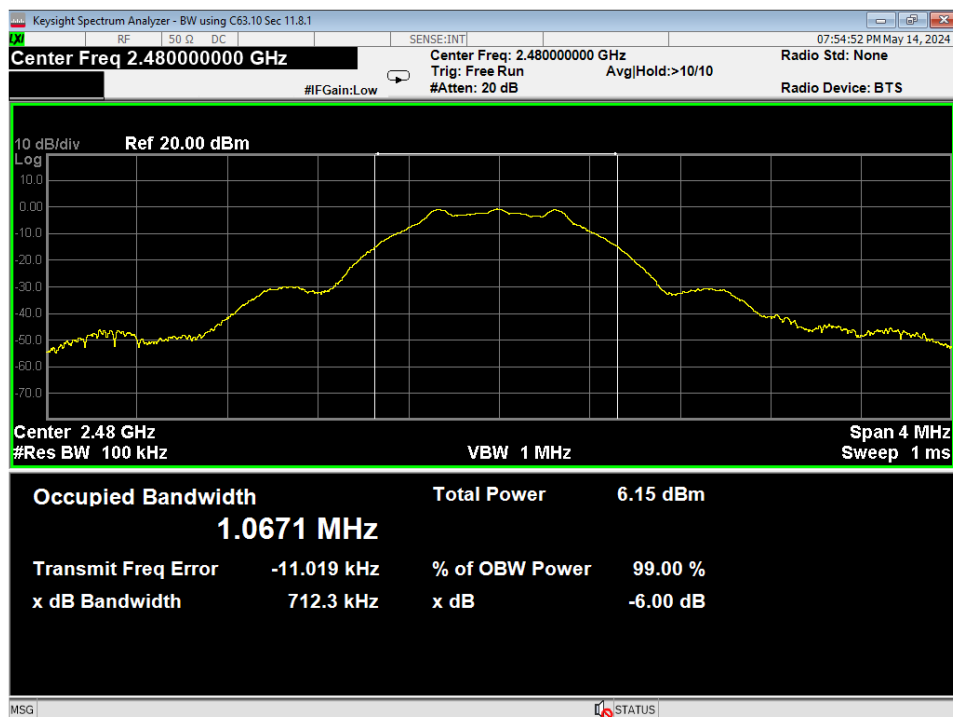


06 6dB Bandwidth, High Channel, GMSK 1MB


Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

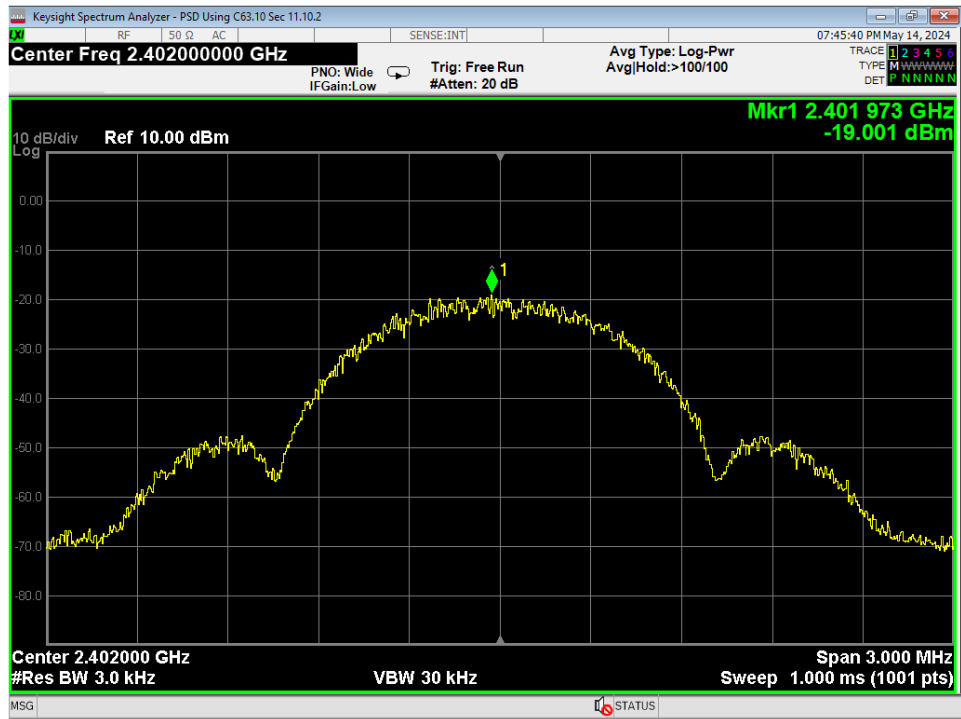


07 PSD, Low Channel, GMSK 1MB

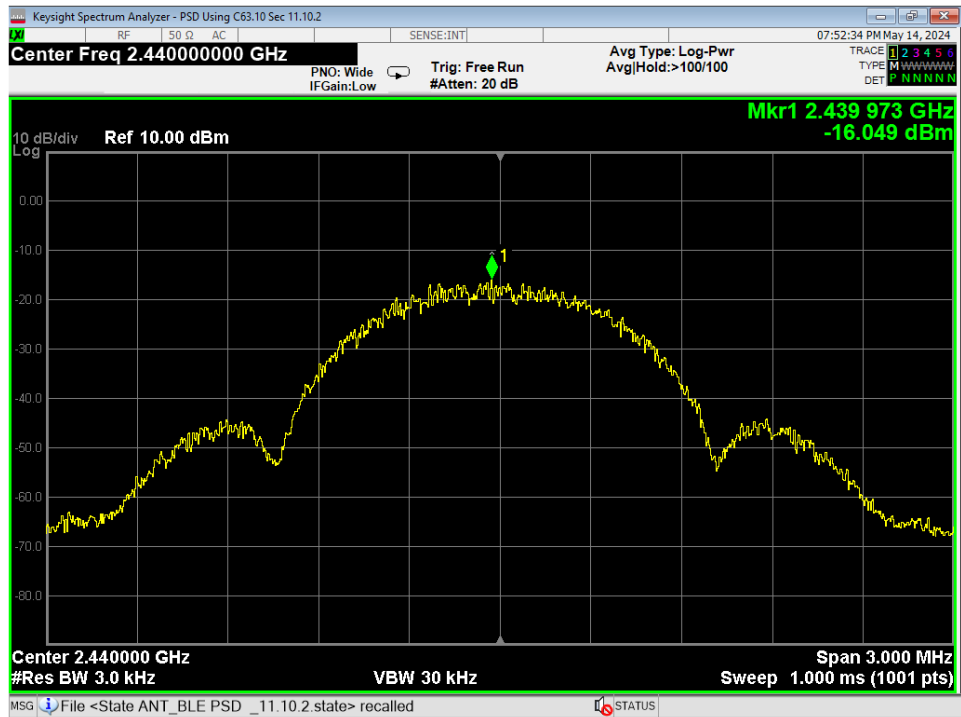


08 PSD, Mid Channel, GMSK 1MB

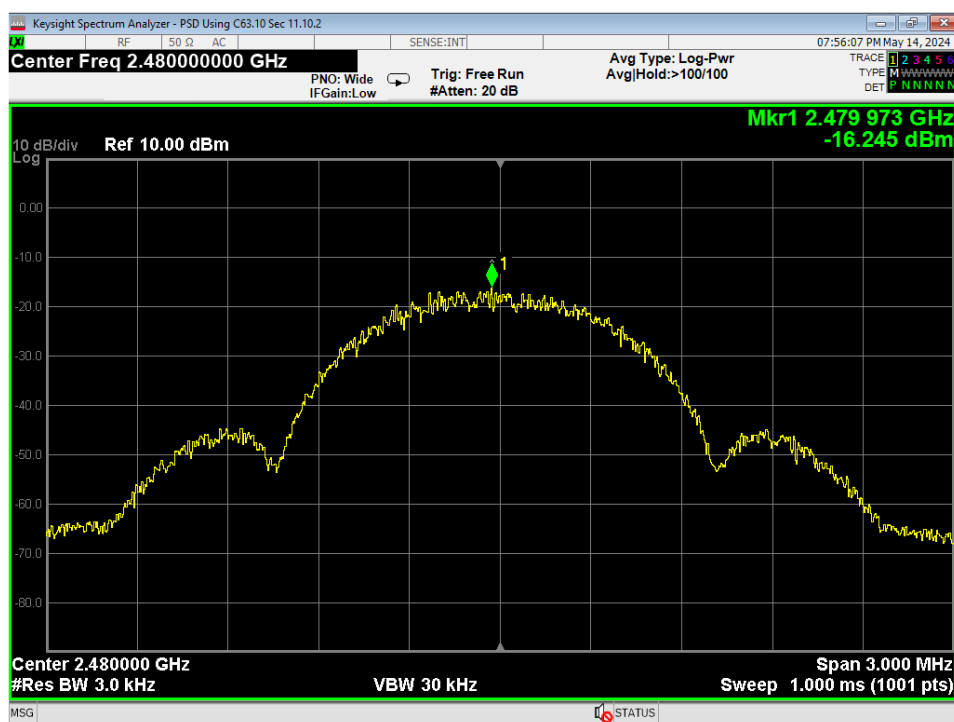


09 PSD, High Channel, GMSK 1MB

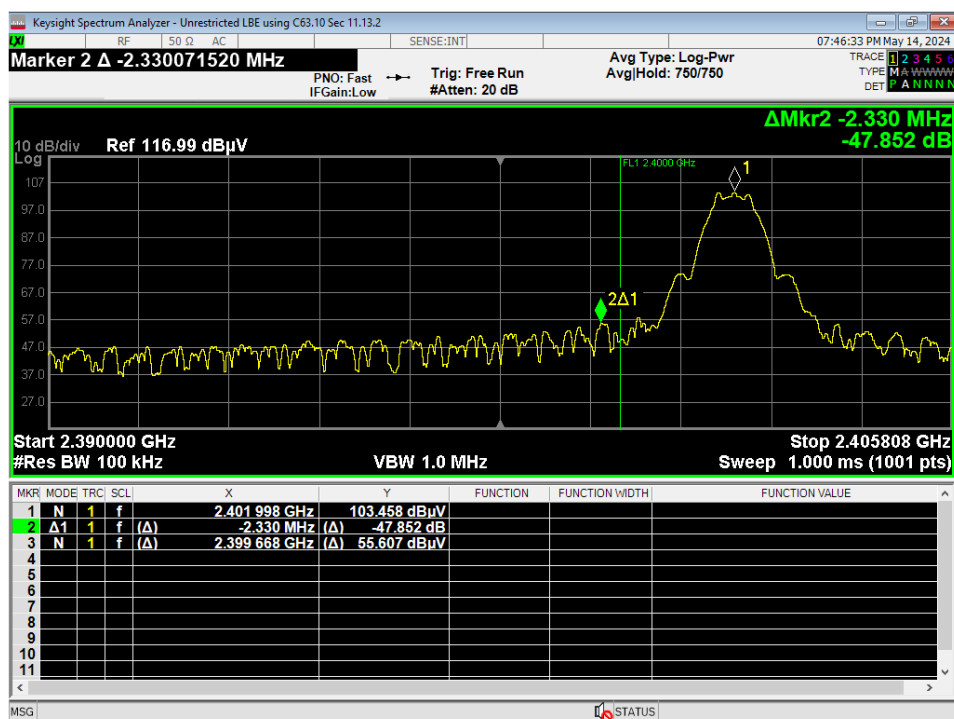

10 Lower Bandedge, Unrestricted, GMSK 1MB

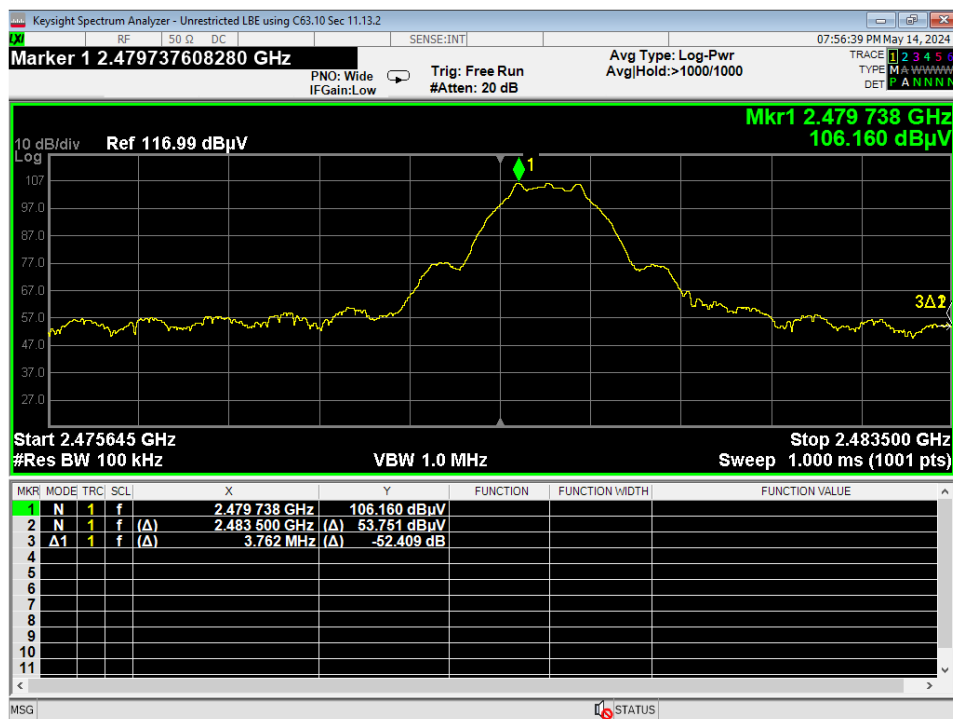


11 Higher Bandedge, Unrestricted, GMSK 1MB

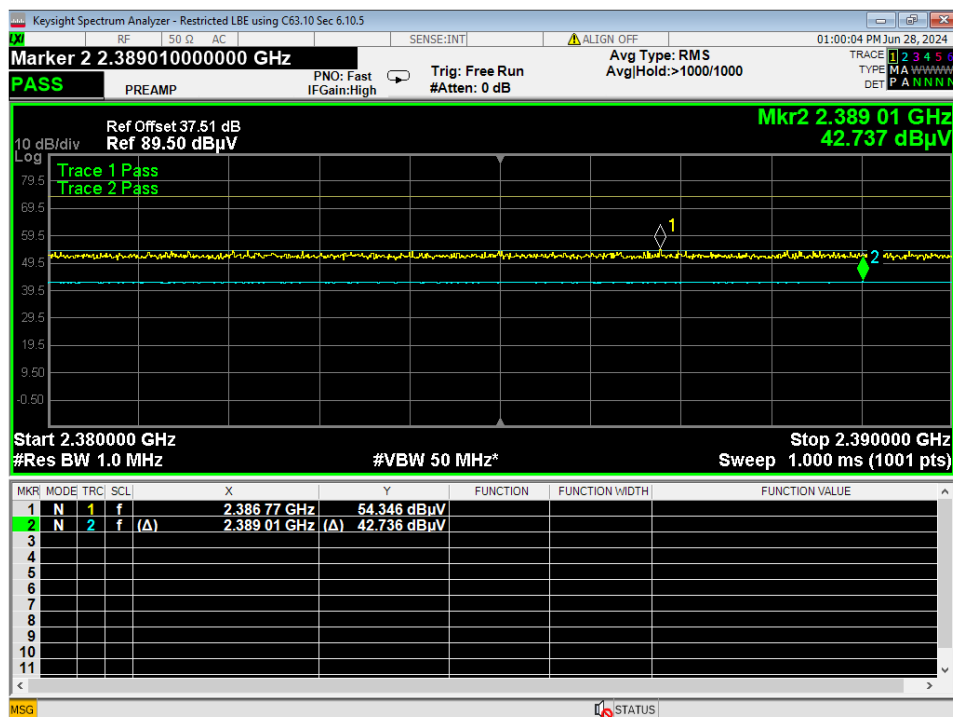


12 Lower Bandedge, Restricted, GMSK 1MB

Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

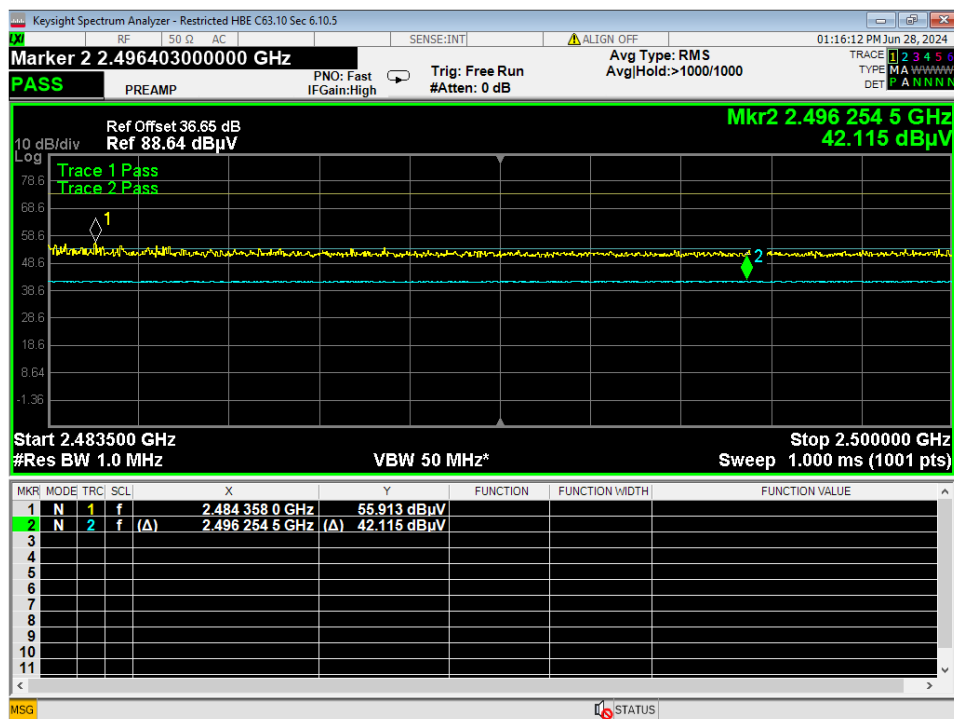


13 Higher Bandedge, Restricted, GMSK 1MB

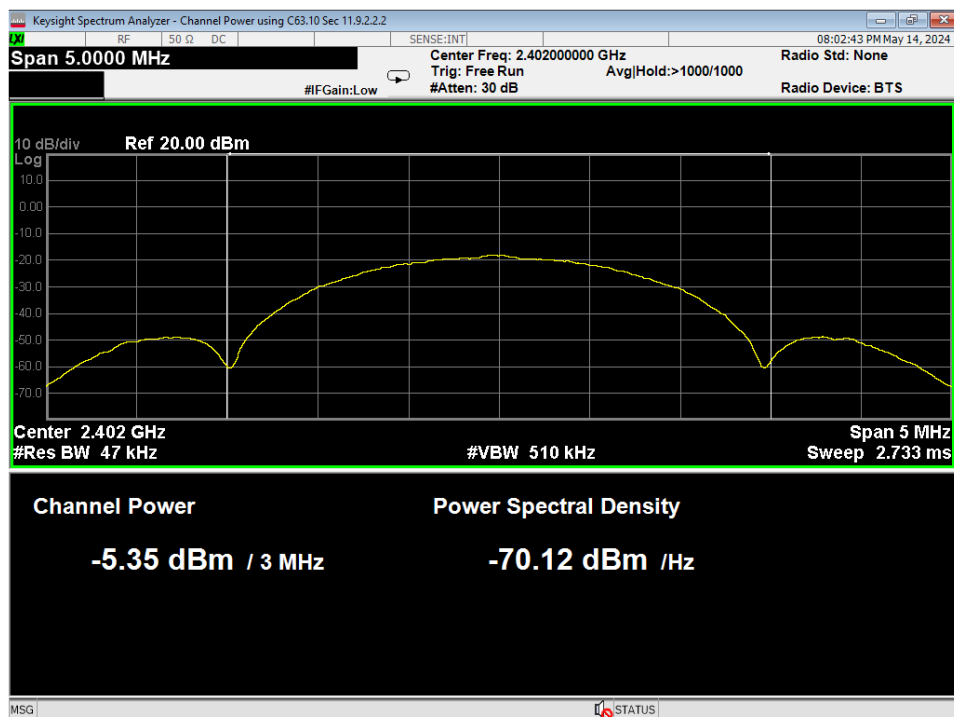


14 Average Power, Low Channel, GMSK 2MB


Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

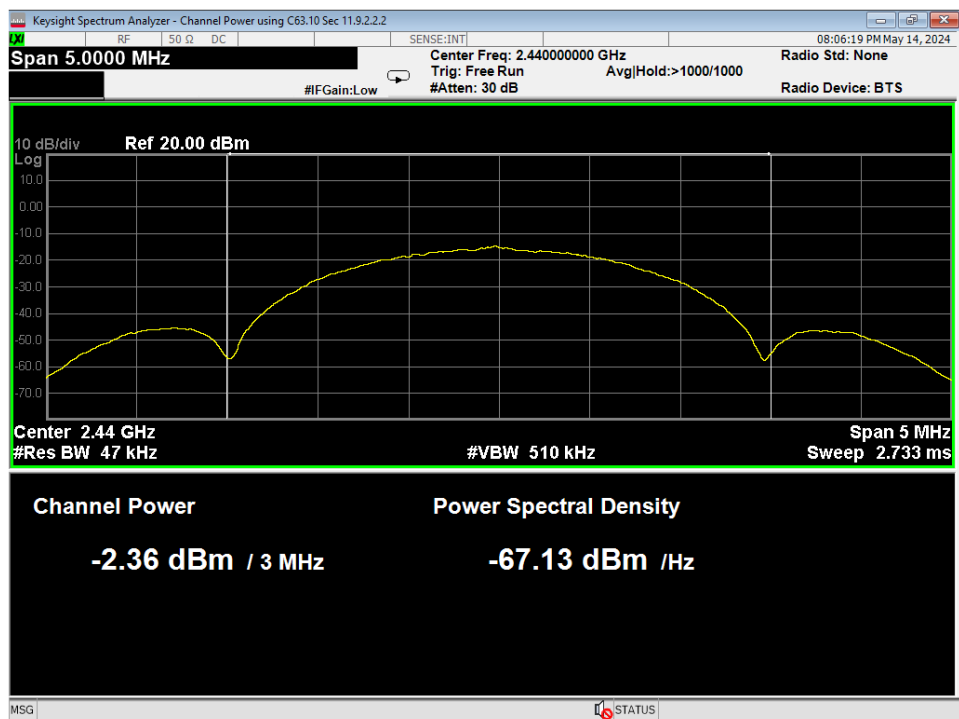


15 Average Power, Mid Channel, GMSK 2MB

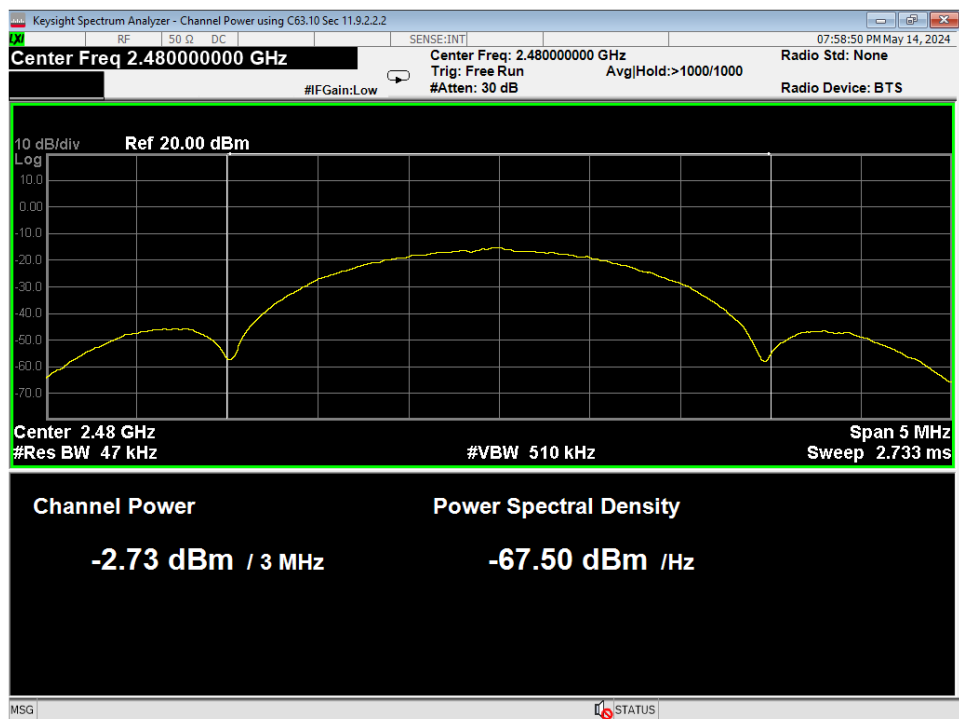


16 Average Power, High Channel, GMSK 2MB

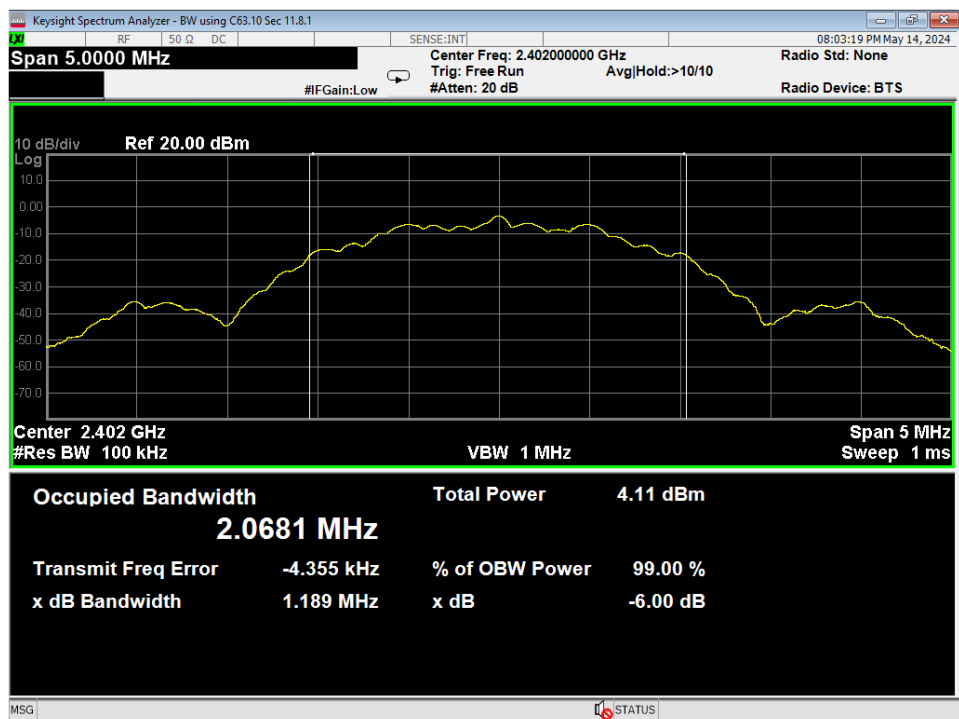


17 6dB Bandwidth, Low Channel, GMSK 2MB

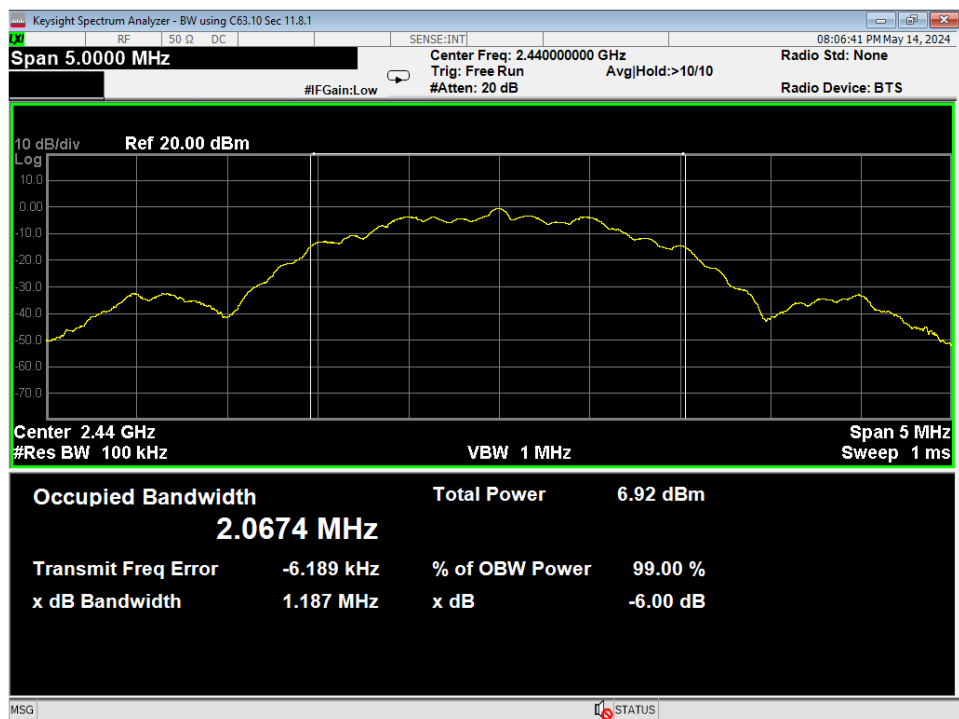


18 6dB Bandwidth, Mid Channel, GMSK 2MB

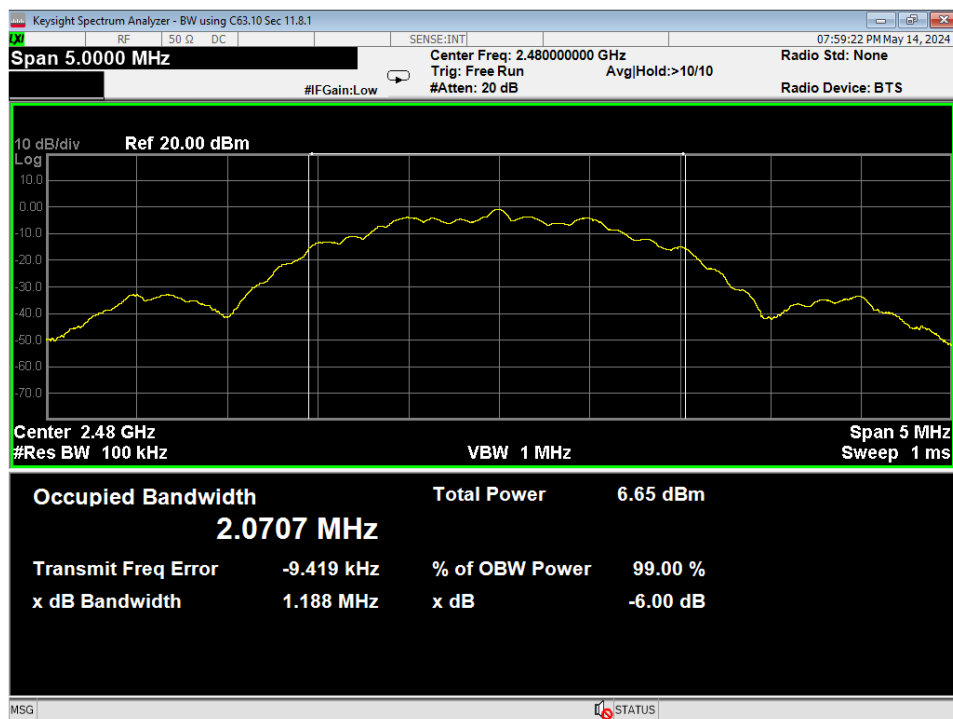


19 6dB Bandwidth, High Channel, GMSK 2MB

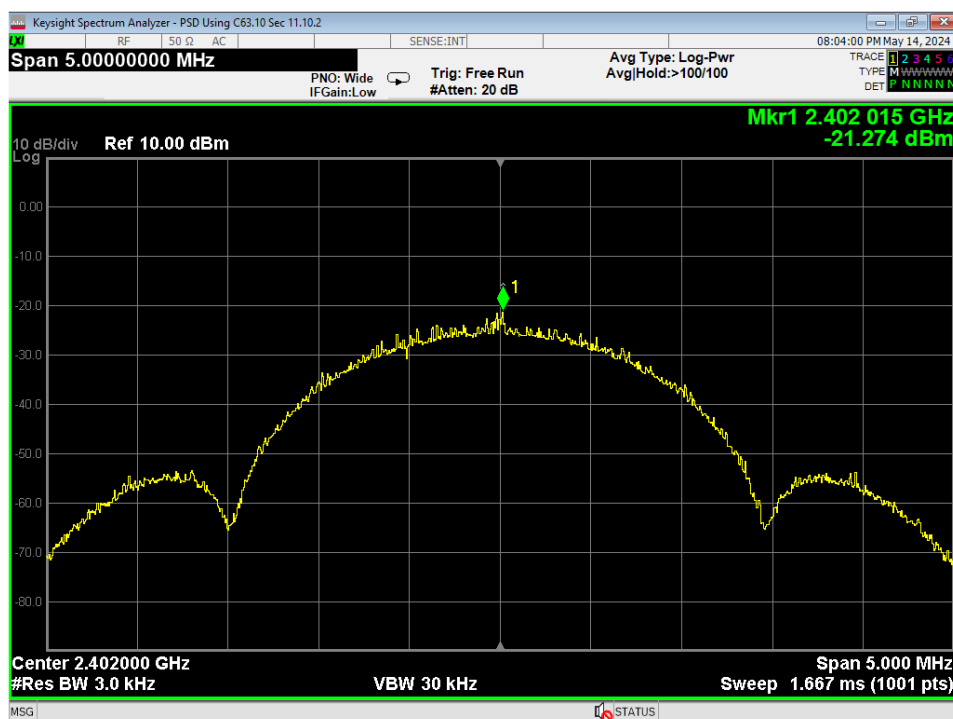


20 PSD, Low Channel, GMSK 2MB

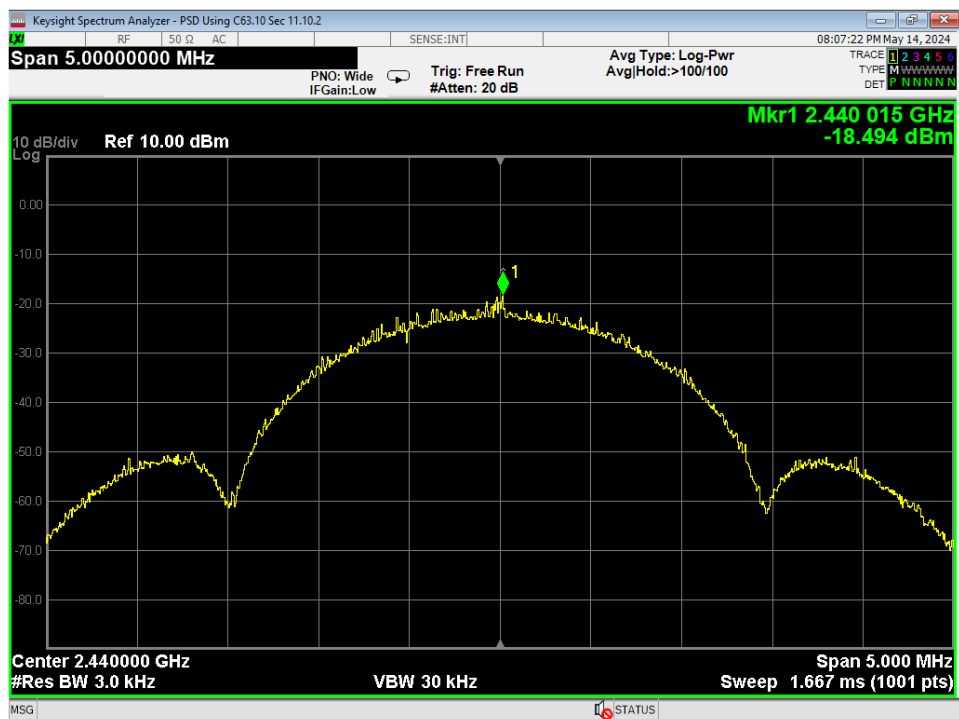


21 PSD, Mid Channel, GMSK 2MB

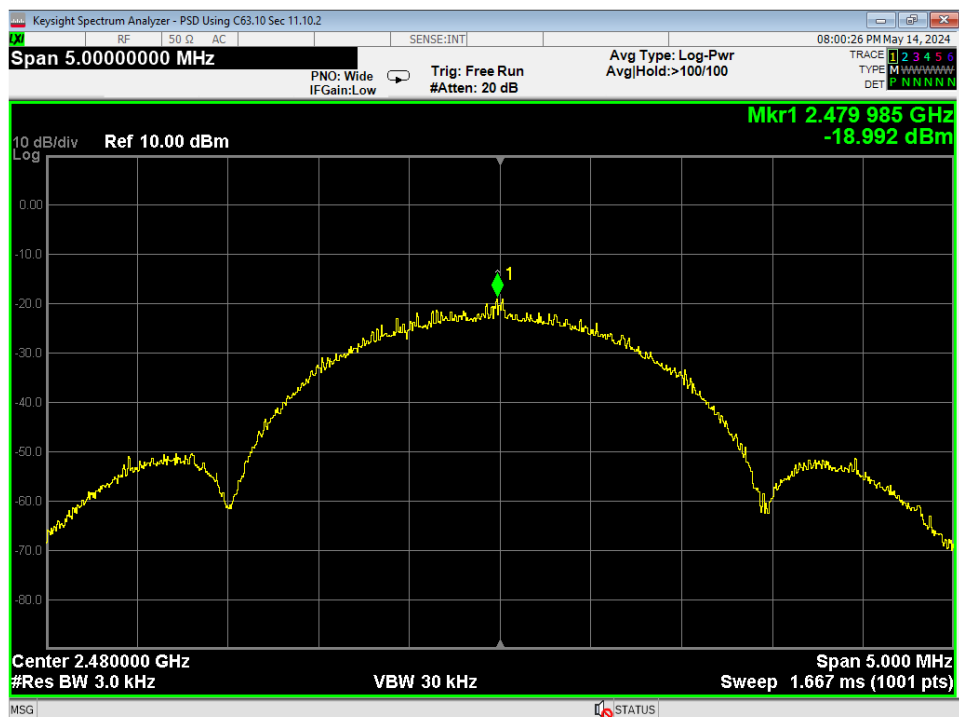

22 PSD, High Channel, GMSK 2MB

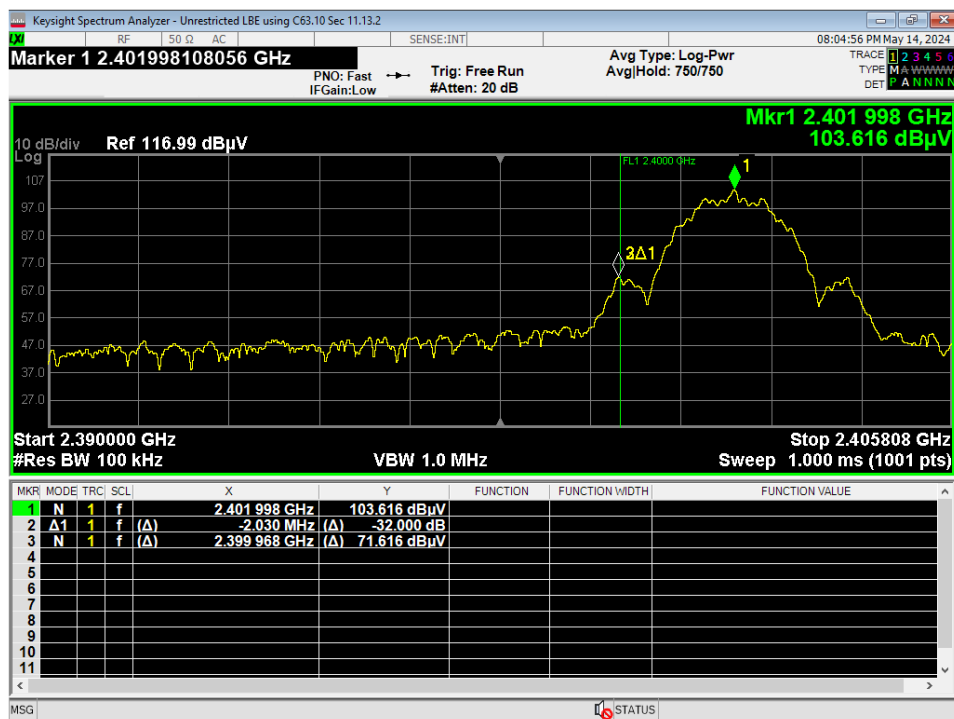


23 Lower Bandedge, Unrestricted, GMSK 2MB

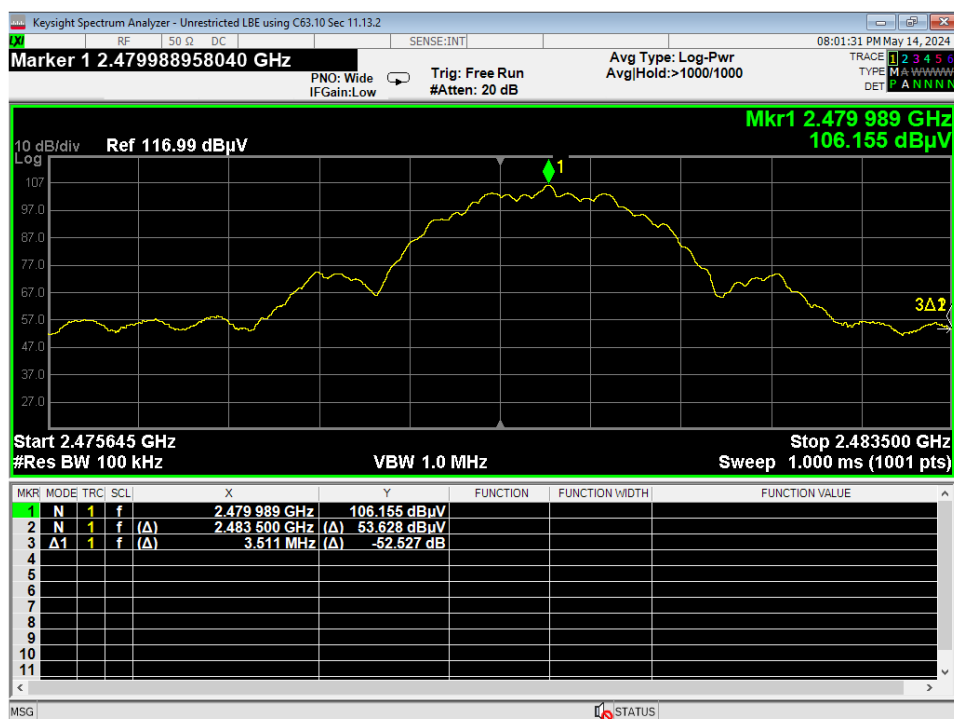


24 Higher Bandedge, Unrestricted, GMSK 2MB

Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

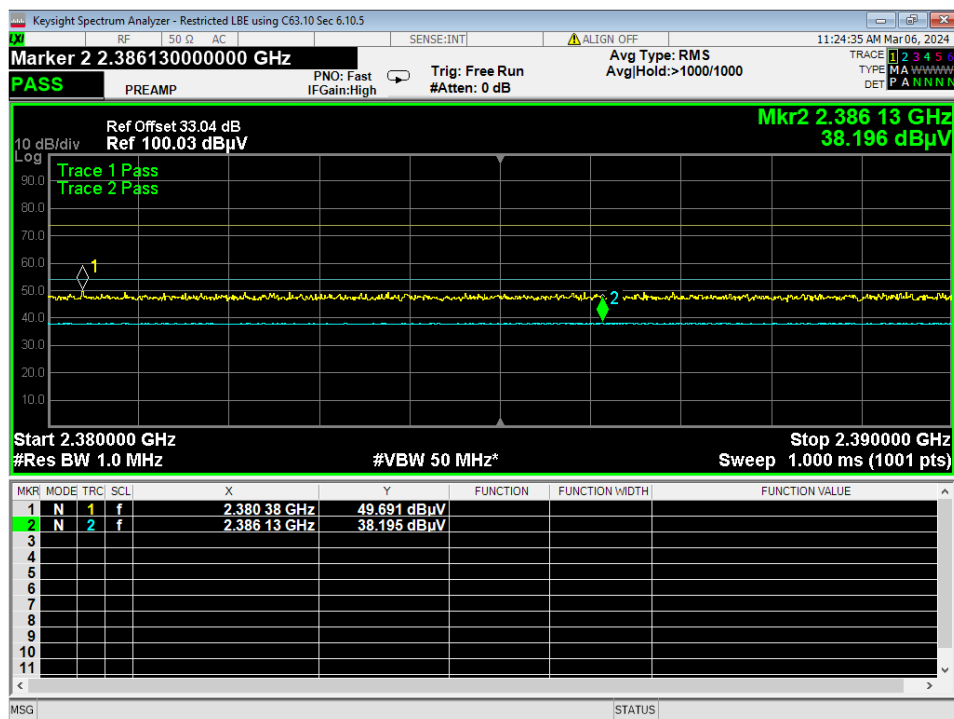


25 Lower Bandedge, Restricted, GMSK 2MB

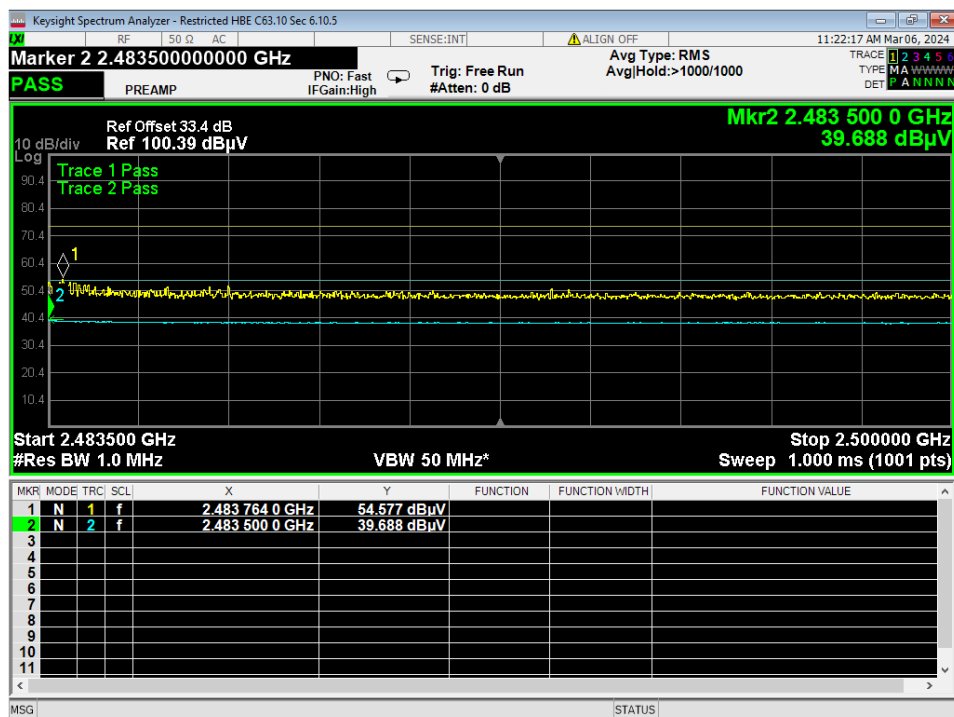


26 Higher Bandedge, Restricted, GMSK 2MB


Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

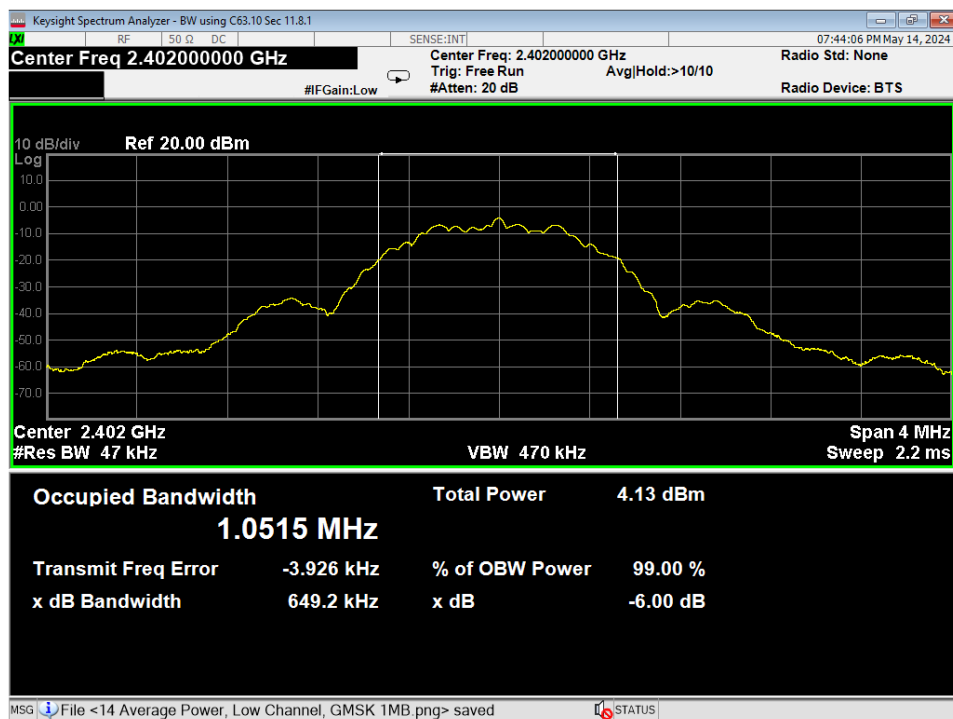


27 Occupied Bandwidth, Low Channel, GMSK 1MB

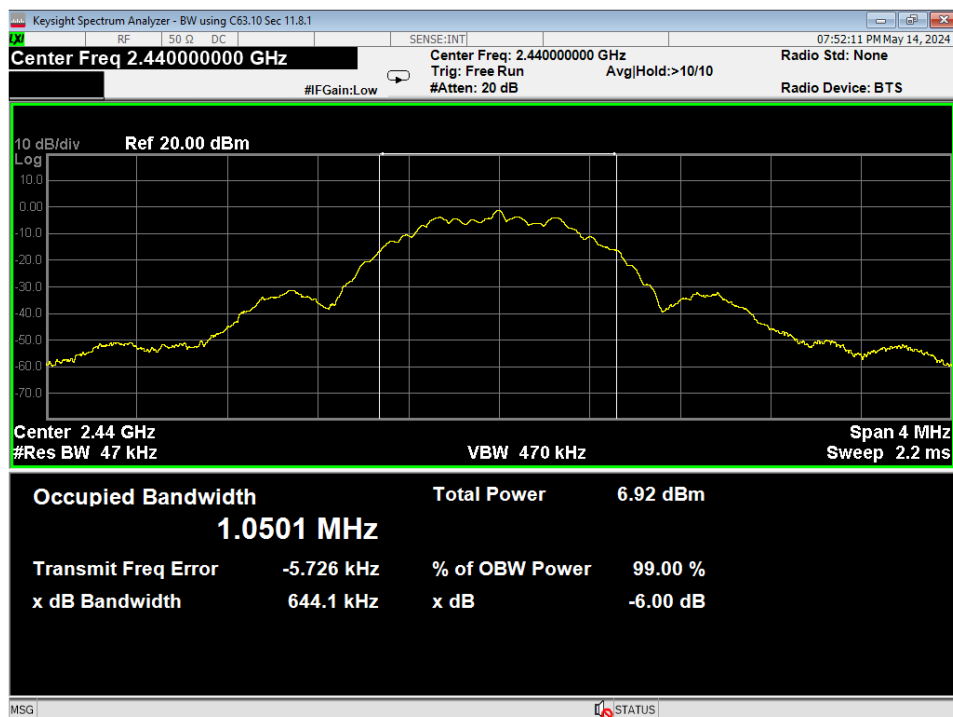

28 Occupied Bandwidth, Mid Channel, GMSK 1MB

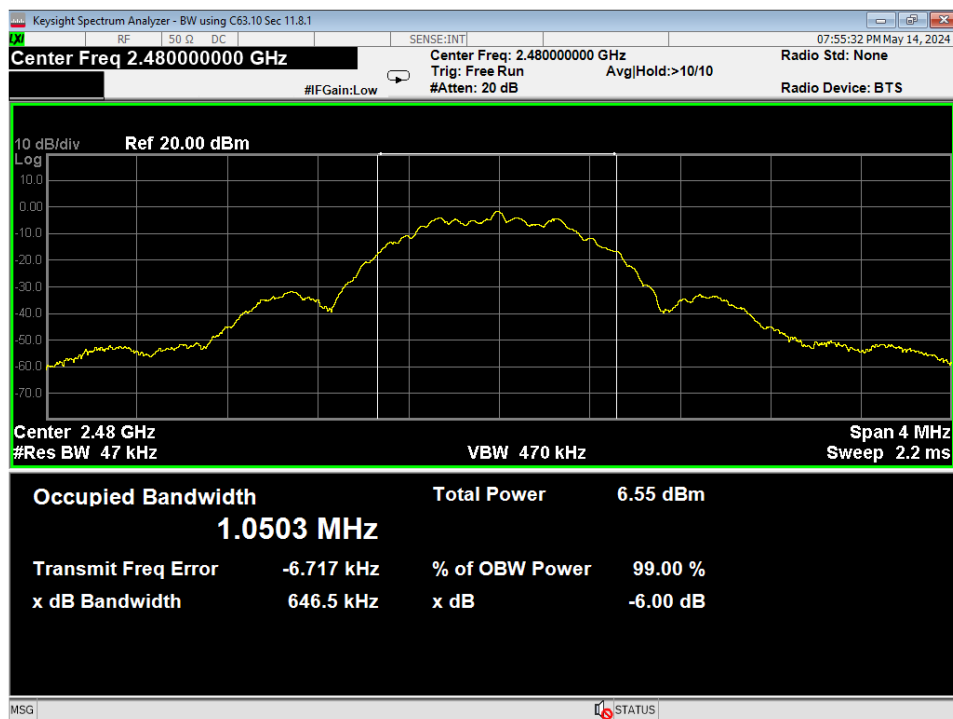


29 Occupied Bandwidth, High Channel, GMSK 1MB

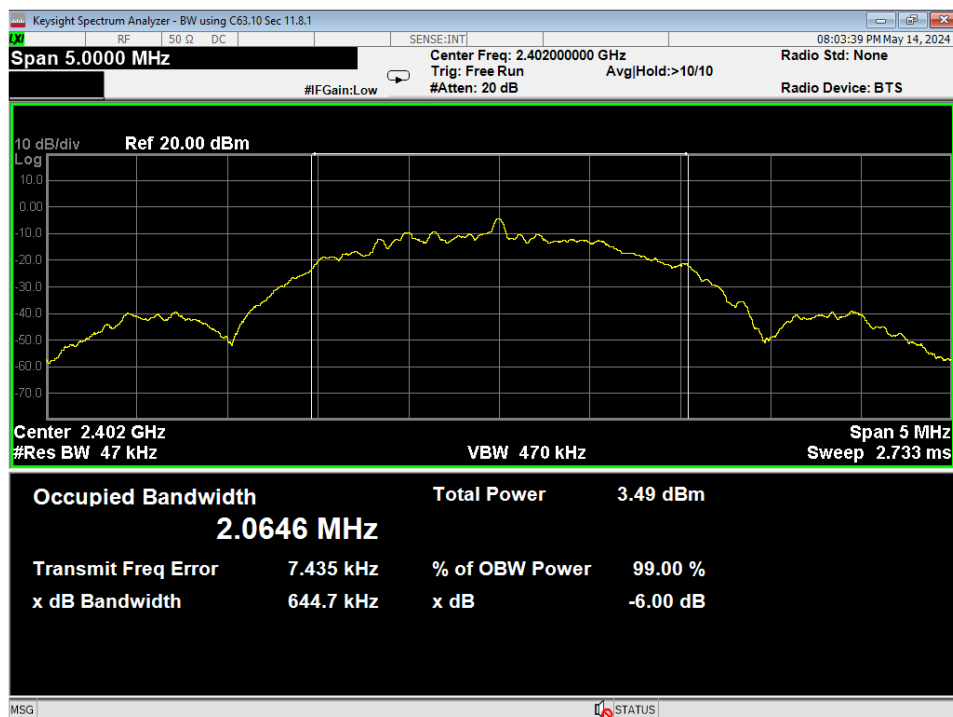


30 Occupied Bandwidth, Low Channel, GMSK 2MB

Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

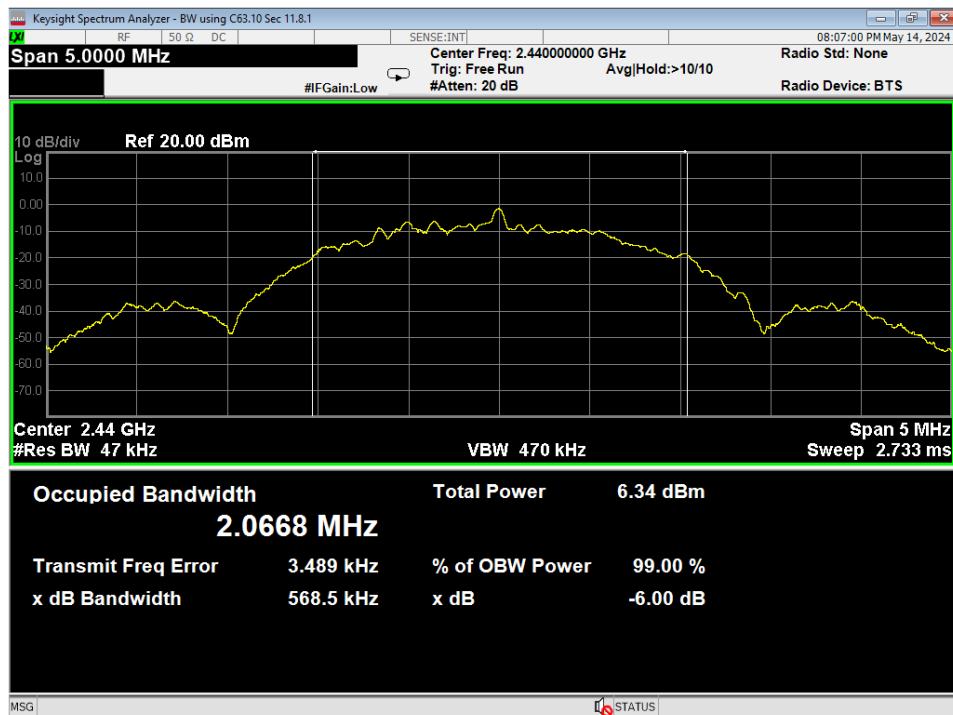

31 Occupied Bandwidth, Mid Channel, GMSK 2MB

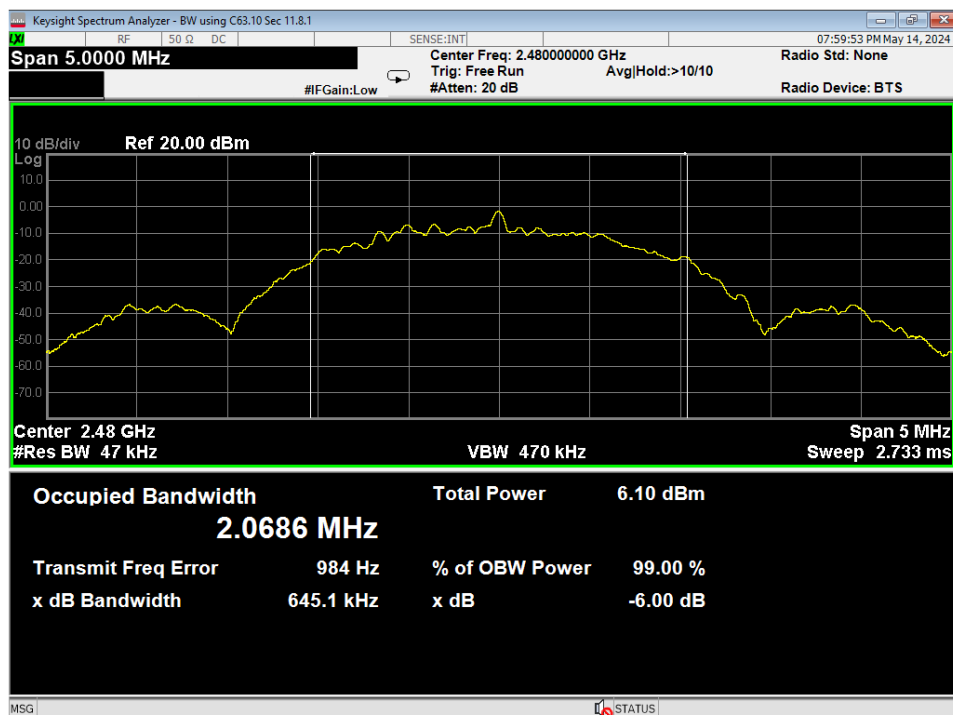

32 Occupied Bandwidth, High Channel, GMSK 2MB



Report Number:	R230504-20-E2B	Rev	B
Prepared for:	Garmin International, Inc.		

REPORT END