

#01_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm


SAR (1g) = 0.294 W/kg; SAR (10g) = 0.150 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.170 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

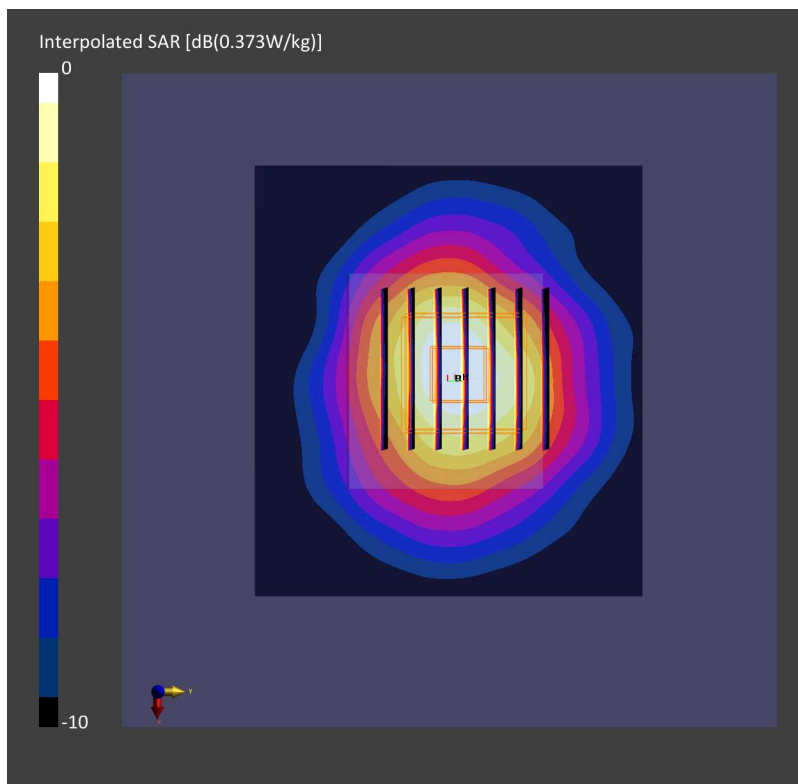

#02_Bluetooth_1Mbps_Front_10mm_Ch39

Communication System: Bluetooth; Frequency: 2441.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10030-CAA
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm


SAR (1g) = 0.092 W/kg; SAR (10g) = 0.047 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.098 W/kg; SAR (10g) = 0.055 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

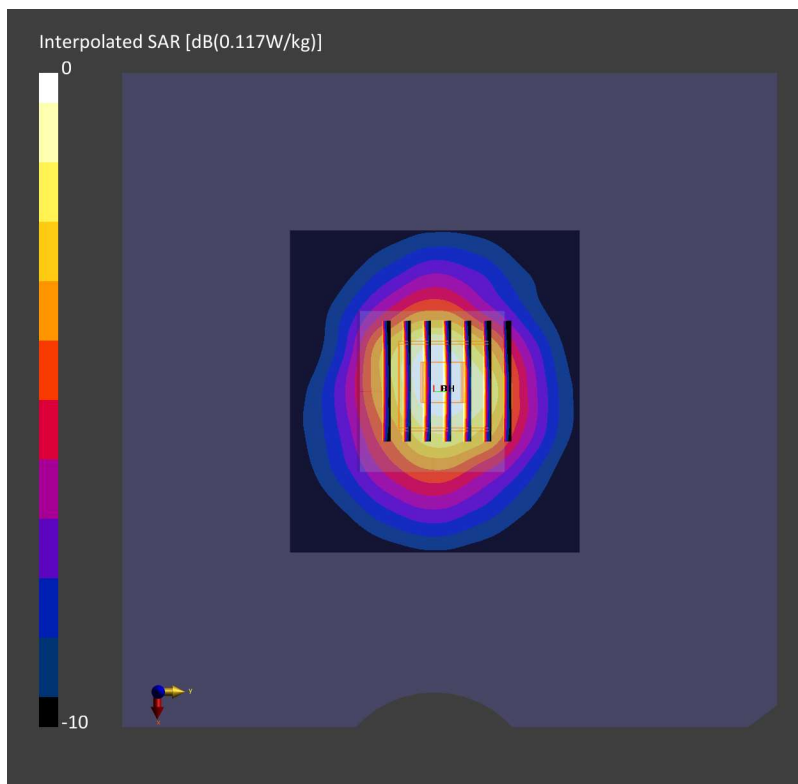

#05_WLAN2.4GHz_802.11b 1Mbps_Front_5mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm


SAR (1g) = 0.783 W/kg; SAR (10g) = 0.397 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.770 W/kg; SAR (10g) = 0.420 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

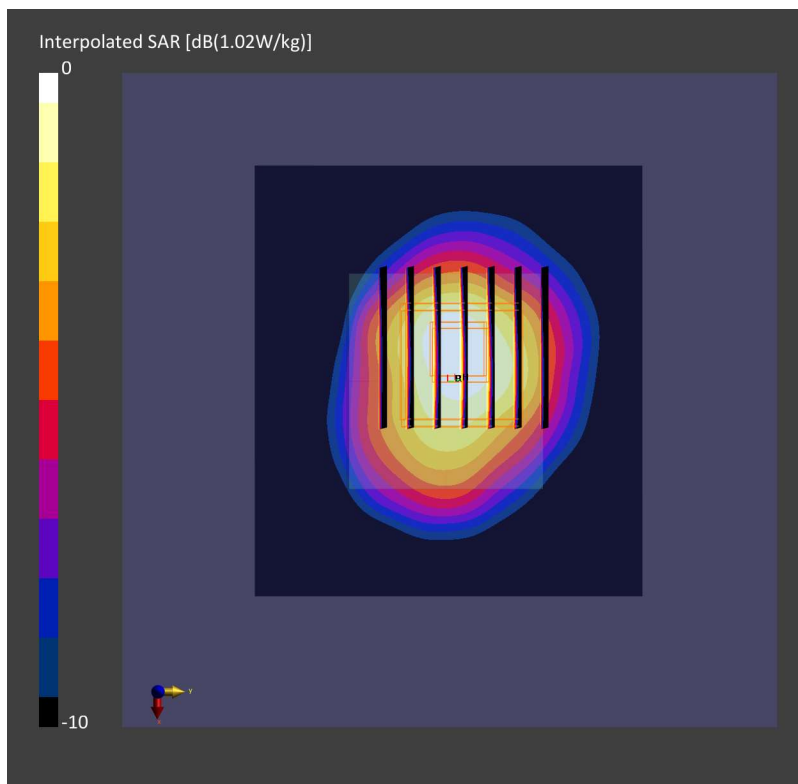

#06_Bluetooth_1Mbps_Front_5mm_Ch39

Communication System: Bluetooth; Frequency: 2441.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10030-CAA
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm


SAR (1g) = 0.208 W/kg; SAR (10g) = 0.101 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.224 W/kg; SAR (10g) = 0.119 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

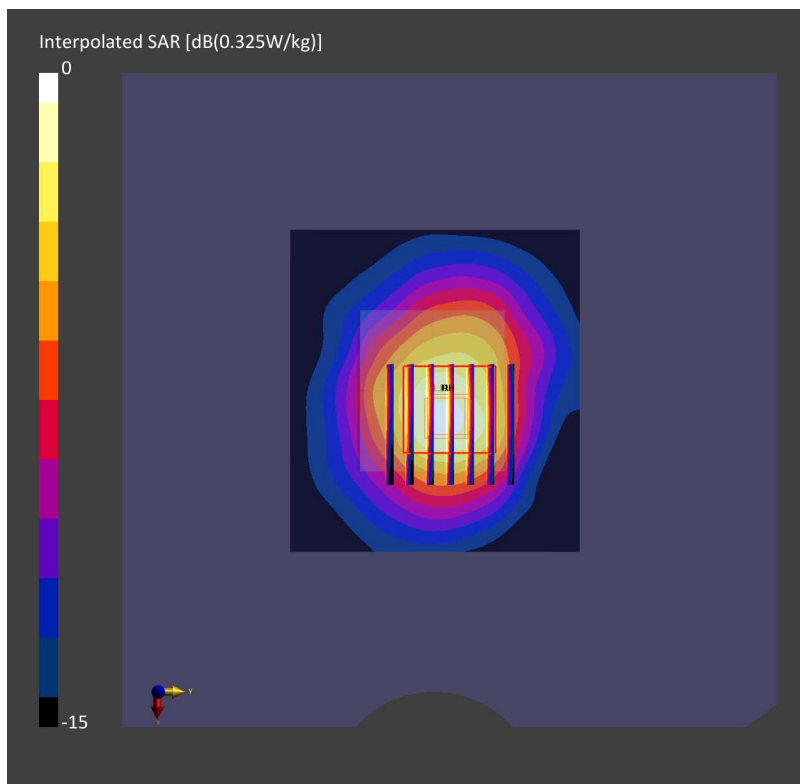

#03_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm


SAR (1g) = 0.894 W/kg; SAR (10g) = 0.449 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.433 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

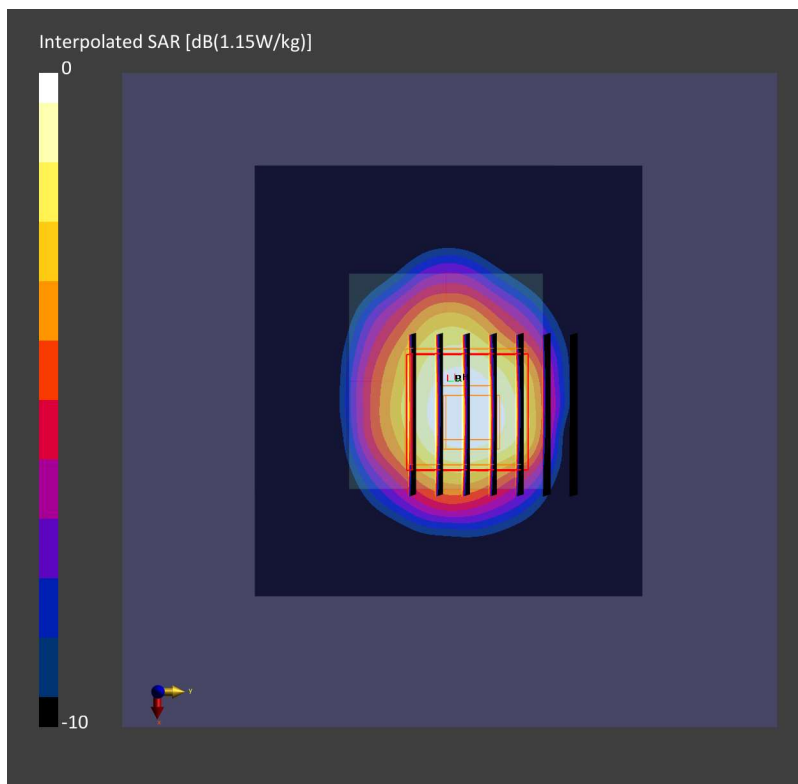

#04_Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: Bluetooth; Frequency: 2441.0

Medium: HSL_2450_220520 Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.24, 8.24, 8.24); Calibrated: 2021-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2021-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: Bluetooth, 10030-CAA
- MAIA: Area Scan: Y; Zoom Scan: N/A

Area Scan (80.0 mm x 72.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.253 W/kg; SAR (10g) = 0.122 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.270 W/kg; SAR (10g) = 0.141 W/kg;

psAPD (1.0cm², sq) = 0 [W/m²]; psAPD (4.0cm², sq) = 0 [W/m²]

