


FCC Test Report

FCC ID : IPH-04457
Equipment : Bicycle Computer
Model No. : A04457, B04457
(Refer to item 1.1.1 for more details)
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.247
Received Date : Feb. 23, 2022
Tested Date : Mar. 28 ~ Apr. 06, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	6dB and Occupied Bandwidth	11
3.2	Conducted Output Power	12
3.3	Power Spectral Density	13
3.4	Emissions in Restricted Frequency Bands.....	14
3.5	Emissions in non-restricted Frequency Bands.....	16
3.6	AC Power Line Conducted Emissions	17
4	TEST LABORATORY INFORMATION	18

APPENDIX A. 6DB AND OCCUPIED BANDWIDTH

APPENDIX B. CONDUCTED OUTPUT POWER

APPENDIX C. POWER SPECTRAL DENSITY

APPENDIX D. EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX E. EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX F. AC POWER LINE CONDUCTED EMISSIONS

Release Record

Report No.	Version	Description	Issued Date
FR211901AE	Rev. 01	Initial issue	Apr. 18, 2022

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 1.865MHz 31.57 (Margin -24.43dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4804.00MHz 50.92 (Margin -3.08dB) - Average	Pass
15.247(b)(3)	Conducted Output Power	Power [dBm]: 2.47	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

Brand Name	Model Name	Product Name	Description
GARMIN	A04457	Bicycle Computer	without pogo pin
	B04457		with pogo pin
✦ The above models, model B04457 was selected as a representative one for the final test and only its data was recorded in this report.			

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0 LE	2402-2480	0-39 [40]	1 Mbps
				2 Mbps
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.3 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Garmin	700-00182-01	inverted F	No	2.81

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.7Vdc from battery
-------------------	---------------------------------------

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand: GARMIN Model: 361-00056-12 Rating: 3.7Vdc, 820mAh
2	USB cable	Brand: GARMIN Model: 320-01483-03 Power line: 0.56m shielded without core

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.7 Test Tool and Duty Cycle

Test Tool	BLE Tests, Version: 1.07		
Duty Cycle and Duty Factor	Modulation Mode	Duty Cycle (%)	Duty Factor (dB)
	BT LE-1Mbps	42.59%	3.71
	BT LE-2Mbps	24.88%	6.04

1.1.8 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT LE-1Mbps	default	default	default
BT LE-2Mbps	default	default	default


1.2 Local Support Equipment List

Support Equipment List (<i>Power mount mode</i>)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Power Mount	GARMIN	A03666	---	Provided by applicant.
2	Adapter	Samsung	ETA-U90JWS	---	---

Support Equipment List (<i>USB charger Mode</i>)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Samsung	ETA-U90JWS	---	---

1.3 Test Setup Chart

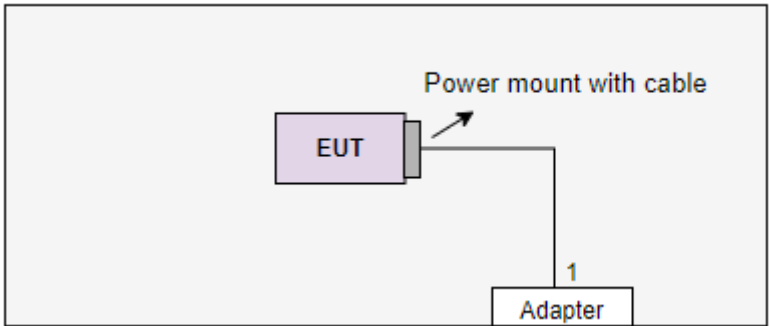Test Setup Diagram (<i>Power mount mode</i>)	
	
No.	Signal cable / Length (m)
1	USB, 0.47m shielded.

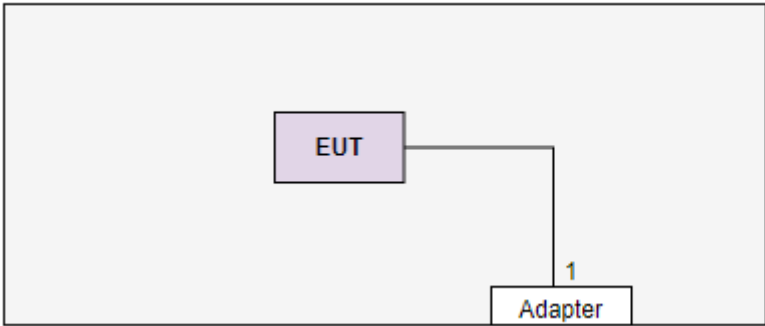Test Setup Diagram (<i>USB charger mode</i>)	
	
No.	Signal cable / Length (m)
1	USB, 0.56m shielded.

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Apr. 06, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023
LISN	R&S	ENV216	101295	Jan. 12, 2022	Jan. 11, 2023
LISN (Support Unit)	SCHWARZBECK	NSLK 8127	8127667	Jan. 07, 2022	Jan. 06, 2023
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 28, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M-8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 28, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions $\leq$ 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402 2402	1, 2
Conducted Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2402, 2440, 2480	2
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Z-plane result was found as the worst case and was shown in this report. 2. The test configurations are listed as follows: Test Configuration 1: Power mount mode Test Configuration 2: USB charger mode			

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	23°C / 68%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	23°C / 68%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix B

3.3 Power Spectral Density


3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	23°C / 68%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix C.

3.4 Emissions in Restricted Frequency Bands

3.4.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

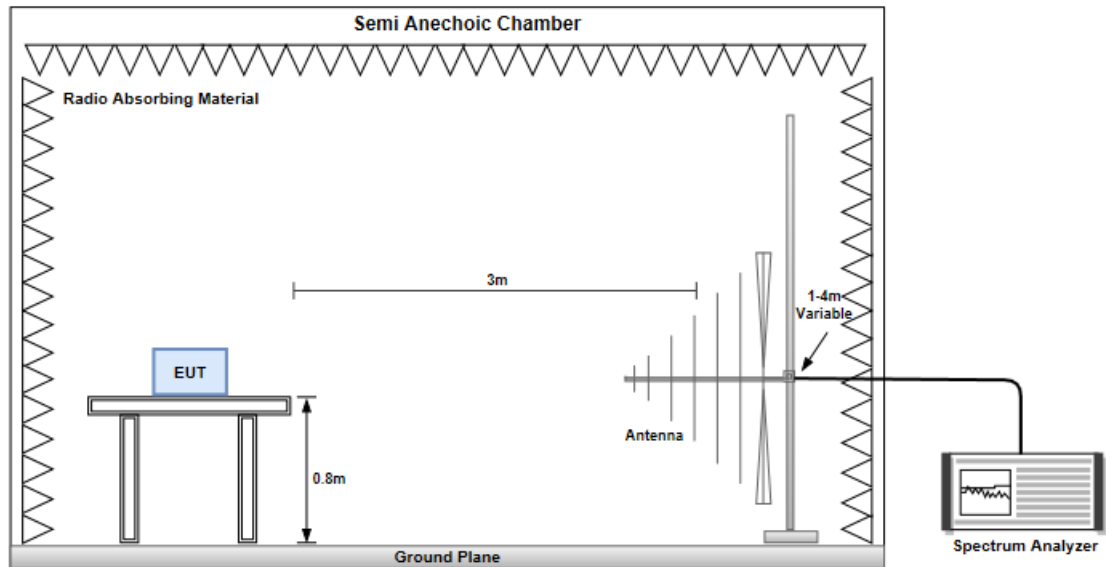

Radiated Emissions above 1 GHz

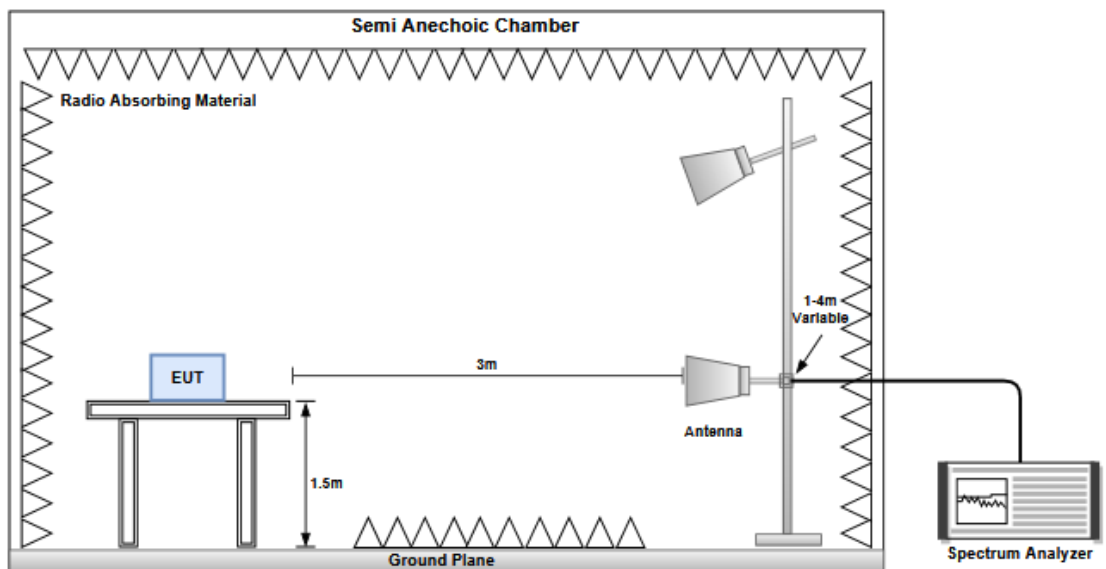

3.4.4 Test Results

Refer to Appendix D.

3.5 Emissions in non-restricted Frequency Bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	23°C / 68%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.6.3 Test Setup

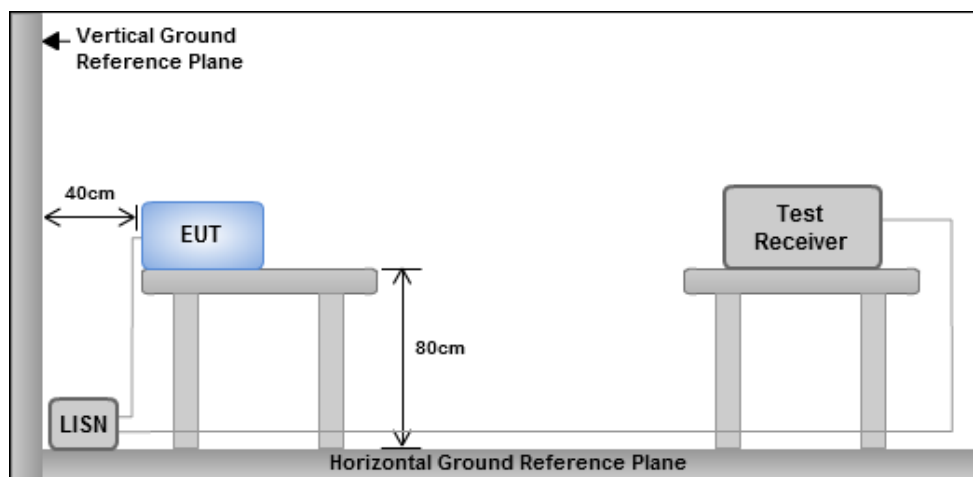

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	721.014k	1.038M	1M04F1D	710.145k	1.031M
BT-LE(2Mbps)	1.159M	2.041M	2M04F1D	1.152M	2.041M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

**Result**



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	721.014k	1.031M
2440MHz	Pass	500k	710.145k	1.035M
2480MHz	Pass	500k	721.014k	1.038M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.152M	2.041M
2440MHz	Pass	500k	1.159M	2.041M
2480MHz	Pass	500k	1.152M	2.041M

Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

BT-LE(1Mbps)



2402MHz

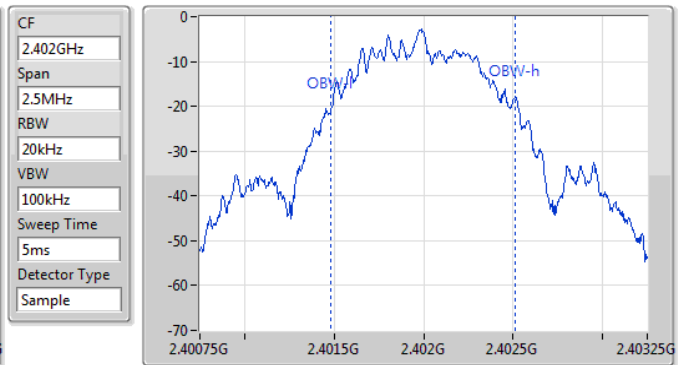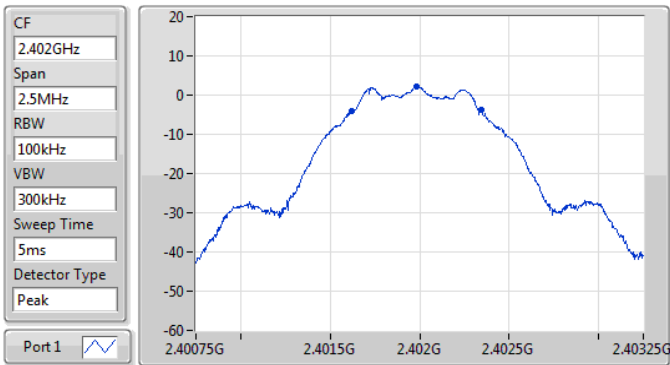

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
721.014k	2.401623G	2.402344G	1.031M	2.401483G	2.402514G	500k	1

BT-LE(1Mbps)

2440MHz

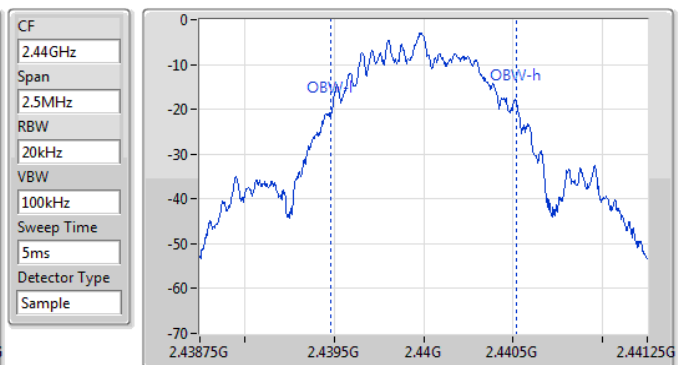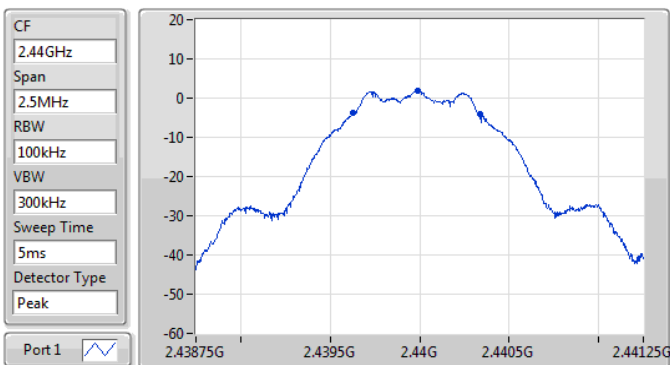


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
710.145k	2.439627G	2.440337G	1.035M	2.439483G	2.440517G	500k	1

BT-LE(1Mbps)

EBW-DTS


2480MHz

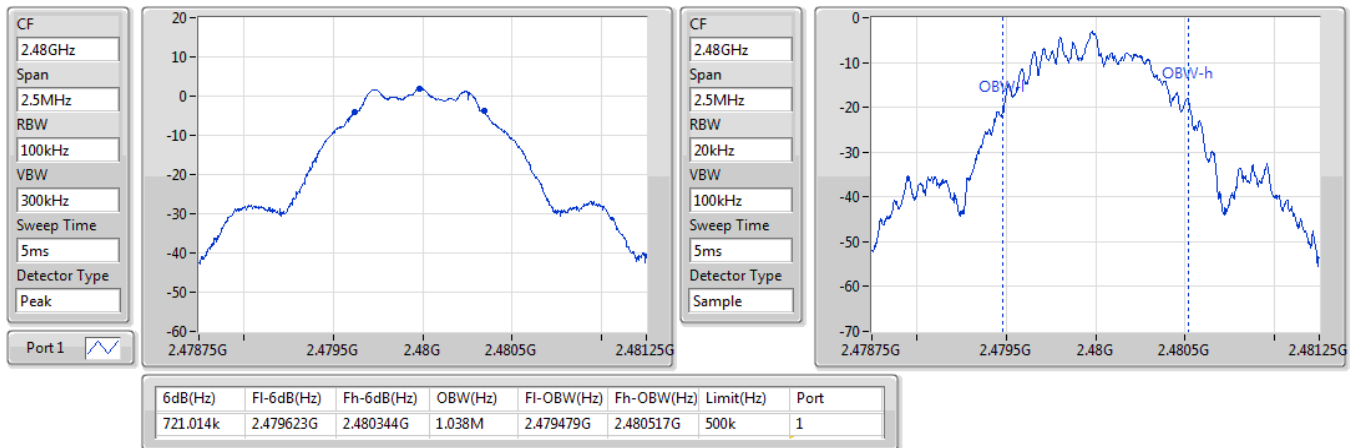

BT-LE(2Mbps)


EBW-DTS

2402MHz

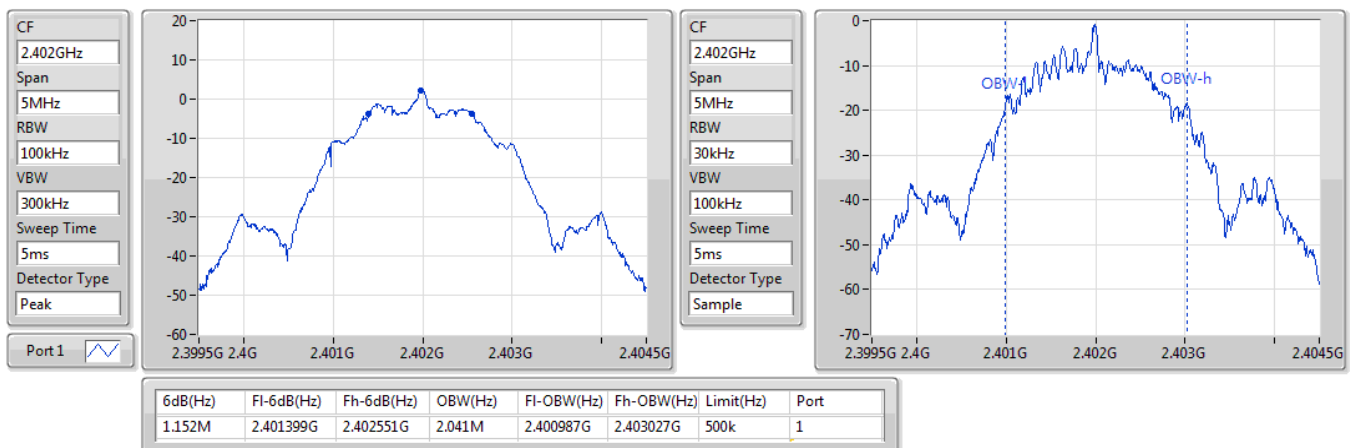


BT-LE(2Mbps)

2440MHz

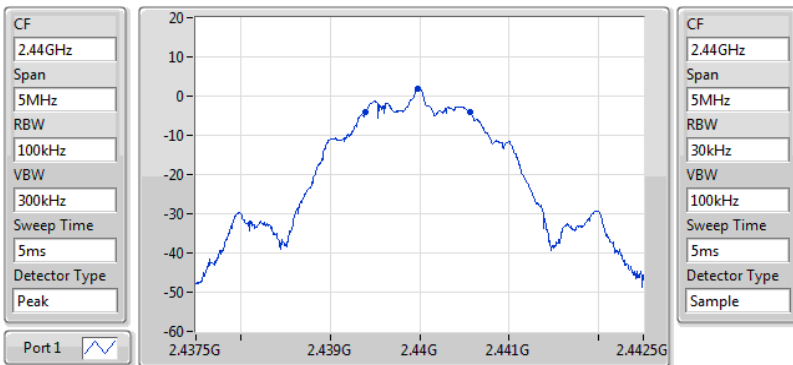


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.159M	2.439399G	2.440558G	2.041M	2.438987G	2.441027G	500k	1

EBW-DTS

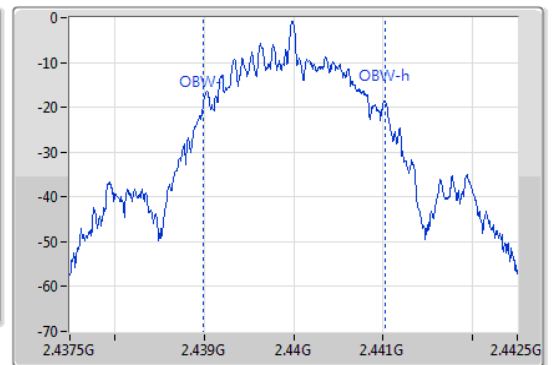


BT-LE(2Mbps)

2480MHz

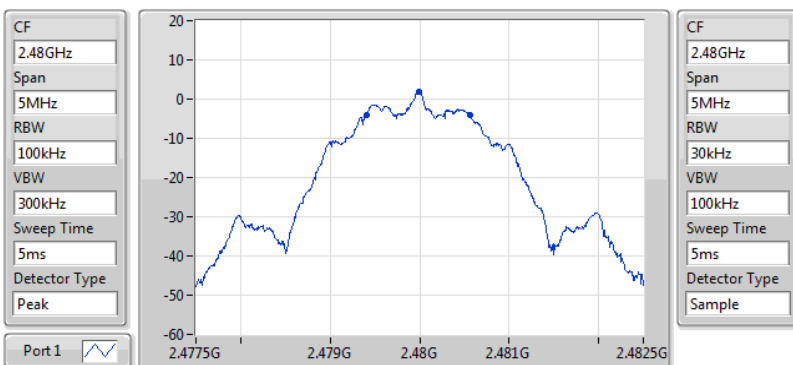

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.152M	2.479406G	2.480558G	2.041M	2.478987G	2.481027G	500k	1

EBW-DTS

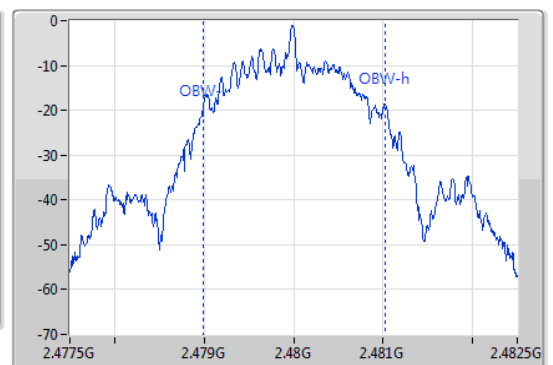

**CONDUCTED OUTPUT POWER(AVERAGE)****Appendix B****Summary**

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.43	0.00175
BT-LE(2Mbps)	2.43	0.00175

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.81	2.43	-
2440MHz	Pass	2.81	2.32	-
2480MHz	Pass	2.81	2.16	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.81	2.43	-
2440MHz	Pass	2.81	2.32	-
2480MHz	Pass	2.81	2.16	-

Note: Average power is for reference only.

**CONDUCTED OUTPUT POWER(PEAK)****Appendix B****Summary**

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	2.47	0.00177
BT-LE(2Mbps)	2.46	0.00176

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.81	2.47	30.00
2440MHz	Pass	2.81	2.36	30.00
2480MHz	Pass	2.81	2.20	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.81	2.46	30.00
2440MHz	Pass	2.81	2.35	30.00
2480MHz	Pass	2.81	2.19	30.00

**Summary**

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-13.87
BT-LE(2Mbps)	-15.70


Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.81	-13.87	8.00
2440MHz	Pass	2.81	-14.15	8.00
2480MHz	Pass	2.81	-14.20	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.81	-15.70	8.00
2440MHz	Pass	2.81	-15.97	8.00
2480MHz	Pass	2.81	-15.97	8.00

BT-LE(1Mbps)

PSD


2402MHz

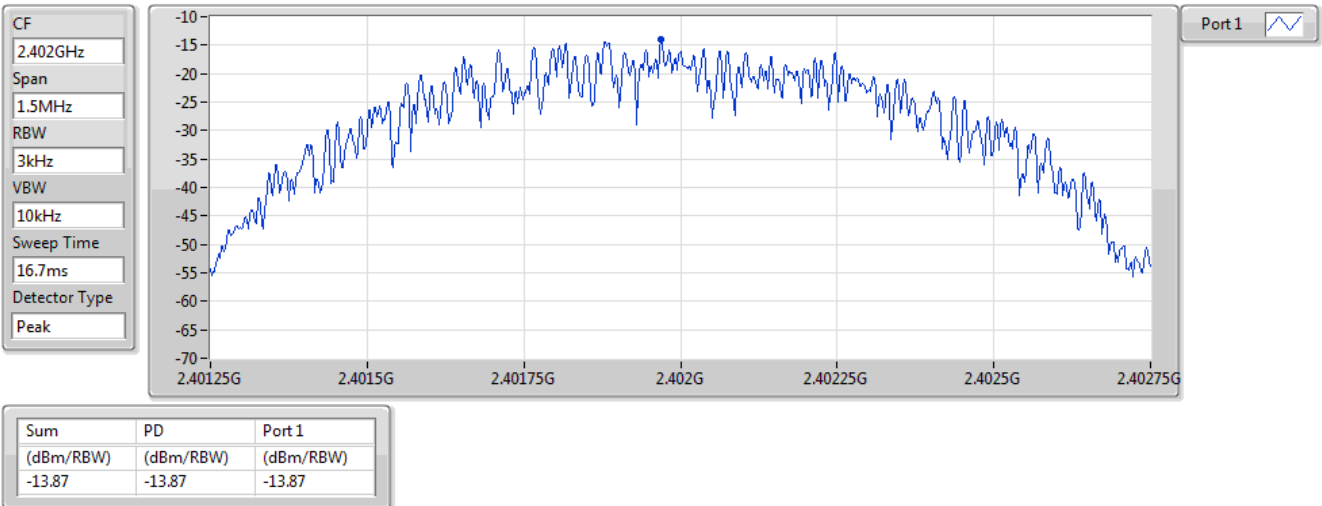

BT-LE(1Mbps)

PSD


2440MHz

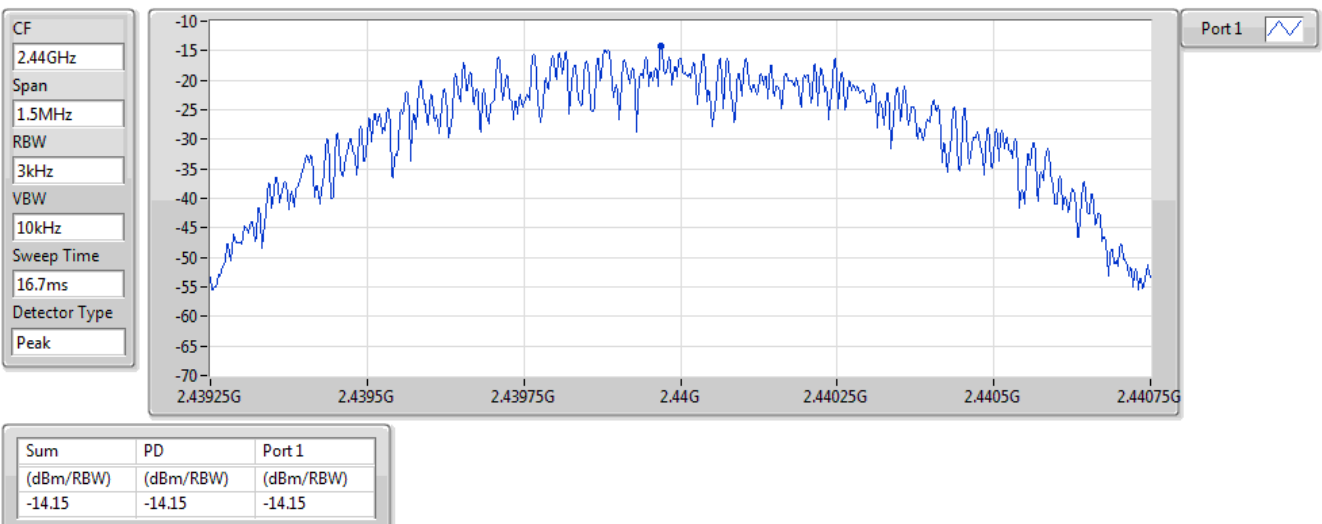

BT-LE(1Mbps)

PSD


2480MHz

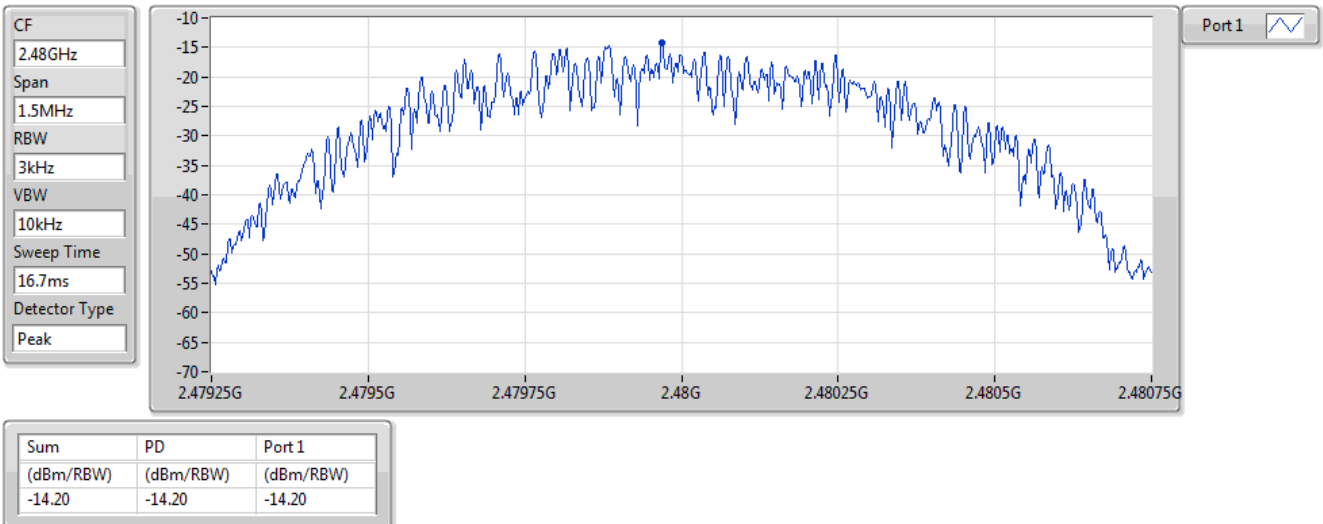

BT-LE(2Mbps)

PSD


2402MHz

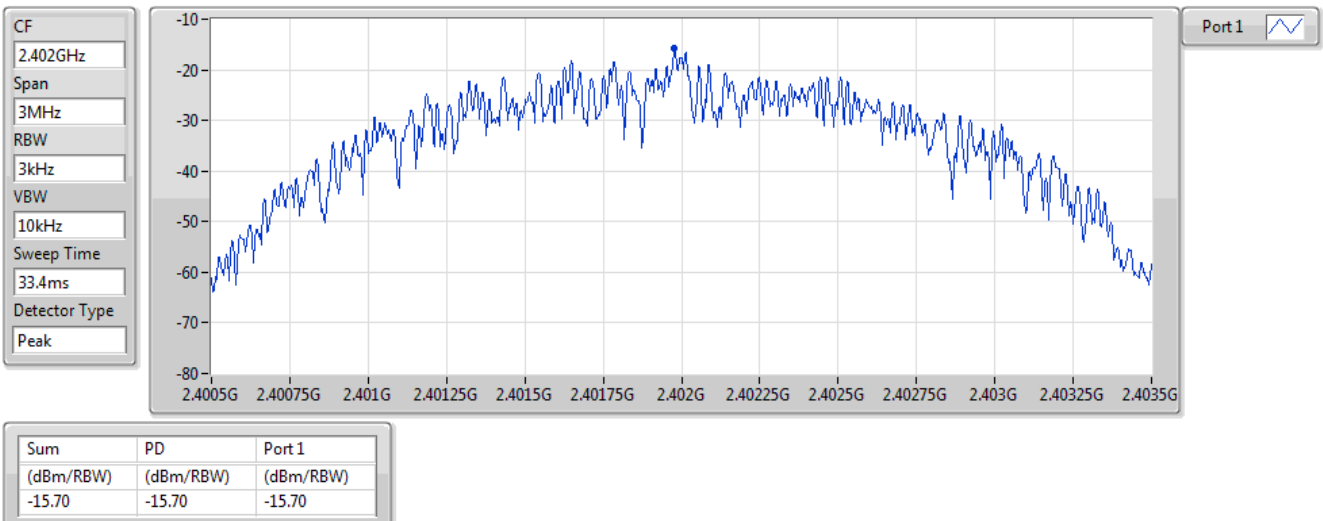

BT-LE(2Mbps)

PSD


2440MHz

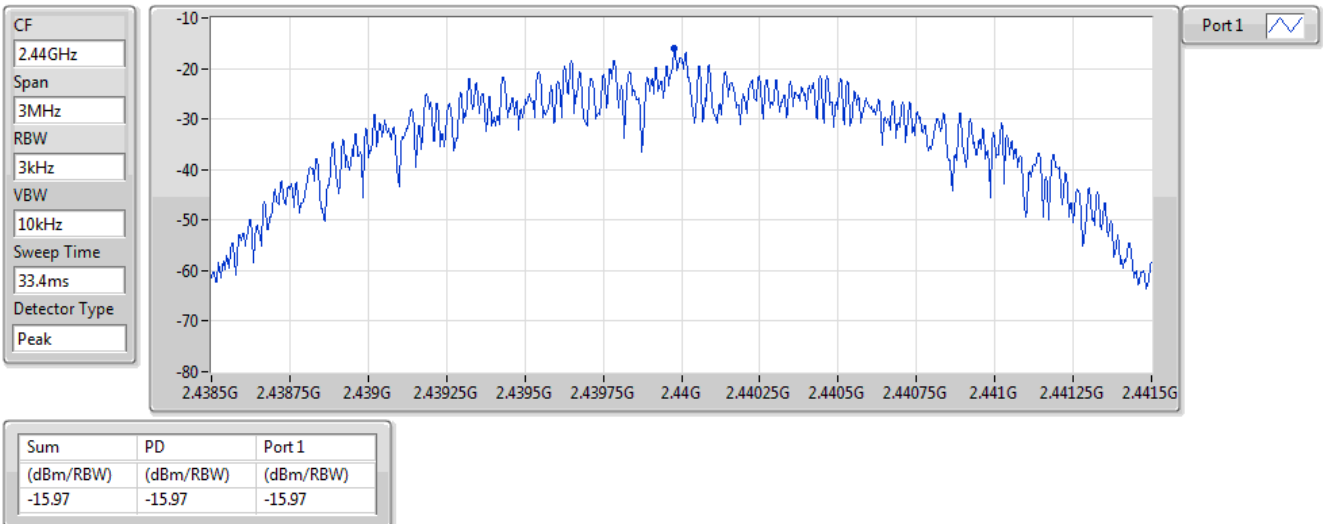

BT-LE(2Mbps)

PSD

2480MHz

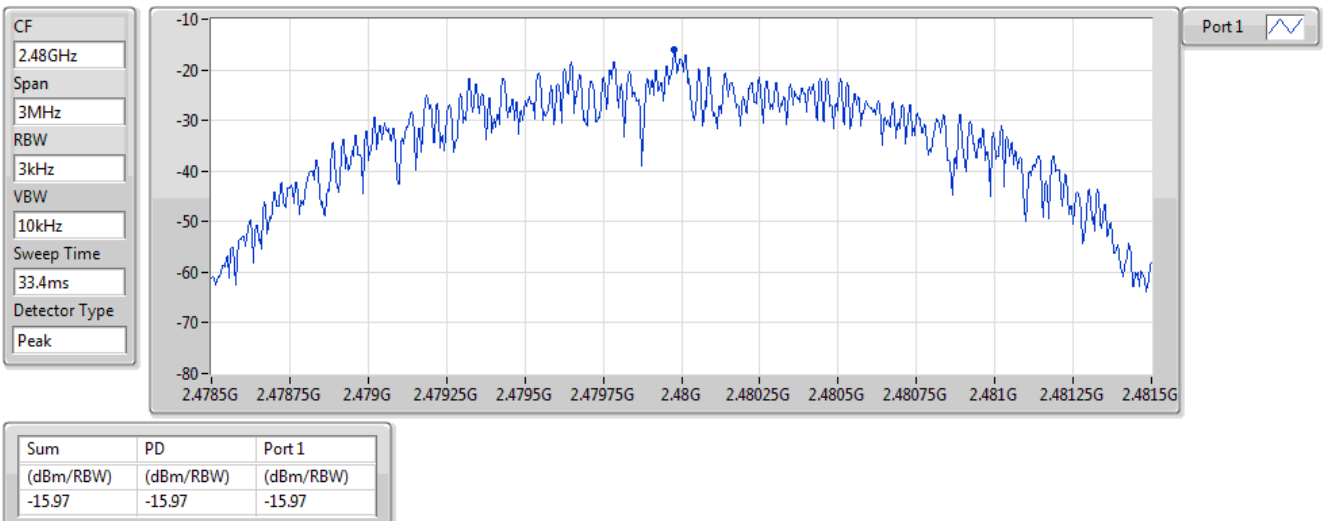



Test Configuration 1: Power mount mode


1.1.1 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu

Temperature(°C):23

Humidity(%):68

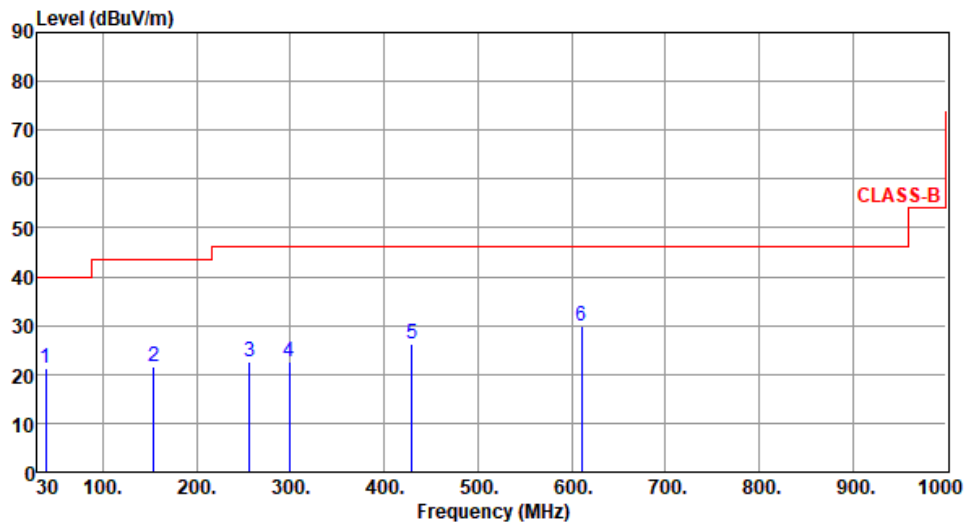

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	38.73	21.09	40.00	-18.91	29.96	-8.87	Peak	---	---
2	154.16	21.56	43.50	-21.94	30.35	-8.79	Peak	---	---
3	256.01	22.54	46.00	-23.46	32.37	-9.83	Peak	---	---
4	298.69	22.62	46.00	-23.38	30.77	-8.15	Peak	---	---
5	429.64	26.19	46.00	-19.81	31.00	-4.81	Peak	---	---
6	611.03	29.88	46.00	-16.12	30.64	-0.76	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):68

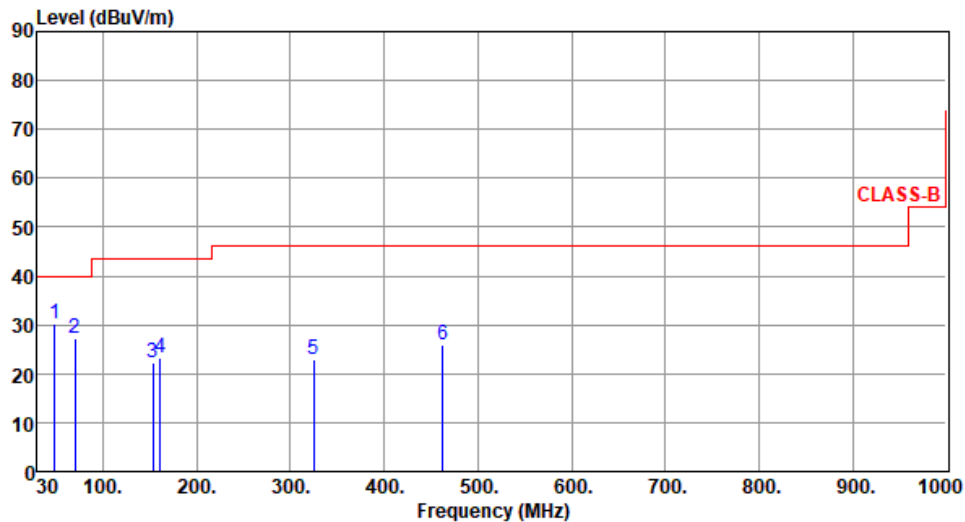

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	48.43	30.24	40.00	-9.76	38.83	-8.59	Peak	---	---
2	69.77	27.19	40.00	-12.81	38.05	-10.86	Peak	---	---
3	153.19	22.14	43.50	-21.36	30.95	-8.81	Peak	---	---
4	160.95	23.29	43.50	-20.21	32.07	-8.78	Peak	---	---
5	324.88	22.90	46.00	-23.10	30.36	-7.46	Peak	---	---
6	462.62	25.87	46.00	-20.13	29.93	-4.06	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Test Configuration 2: USB charger mode

1.1.2 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):23 Humidity(%):68

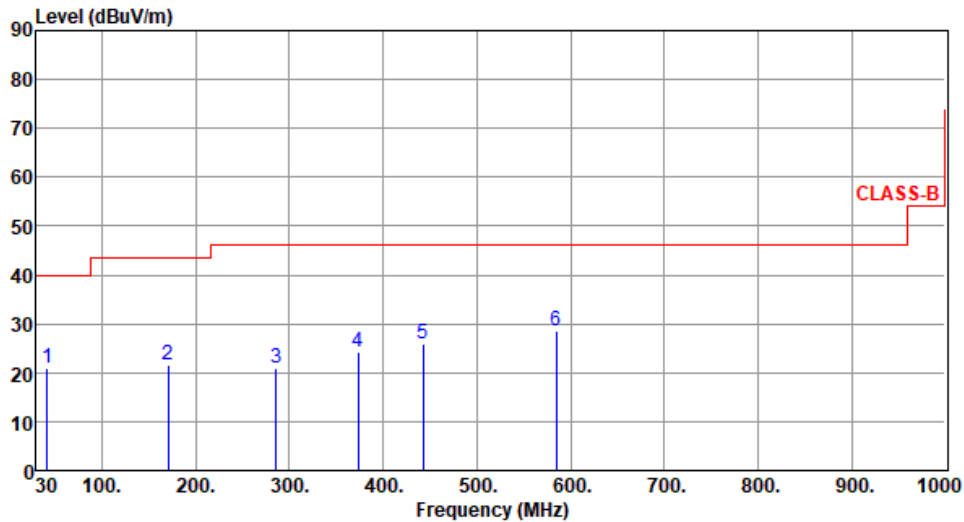

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	41.64	21.06	40.00	-18.94	29.64	-8.58	Peak	---	---
2	170.65	21.64	43.50	-21.86	30.77	-9.13	Peak	---	---
3	286.08	20.85	46.00	-25.15	29.37	-8.52	Peak	---	---
4	373.38	24.08	46.00	-21.92	30.44	-6.36	Peak	---	---
5	442.25	26.00	46.00	-20.00	30.48	-4.48	Peak	---	---
6	584.84	28.50	46.00	-17.50	29.96	-1.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):68

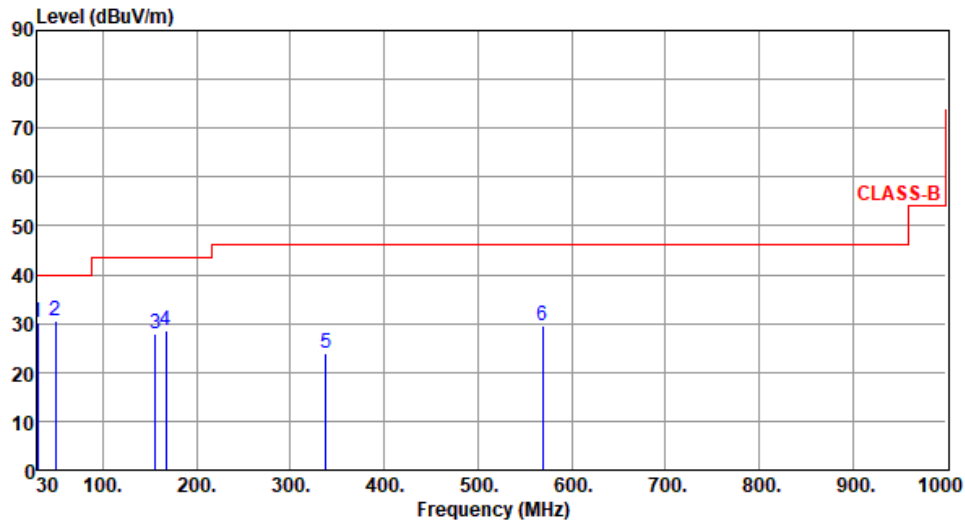

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.00	30.13	40.00	-9.87	40.07	-9.94	Peak	---	---
2	49.40	30.41	40.00	-9.59	38.96	-8.55	Peak	---	---
3	156.10	27.99	43.50	-15.51	36.69	-8.70	Peak	---	---
4	166.77	28.55	43.50	-14.95	37.51	-8.96	Peak	---	---
5	337.49	23.81	46.00	-22.19	31.13	-7.32	Peak	---	---
6	569.32	29.49	46.00	-16.51	31.40	-1.91	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



1.1.3 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

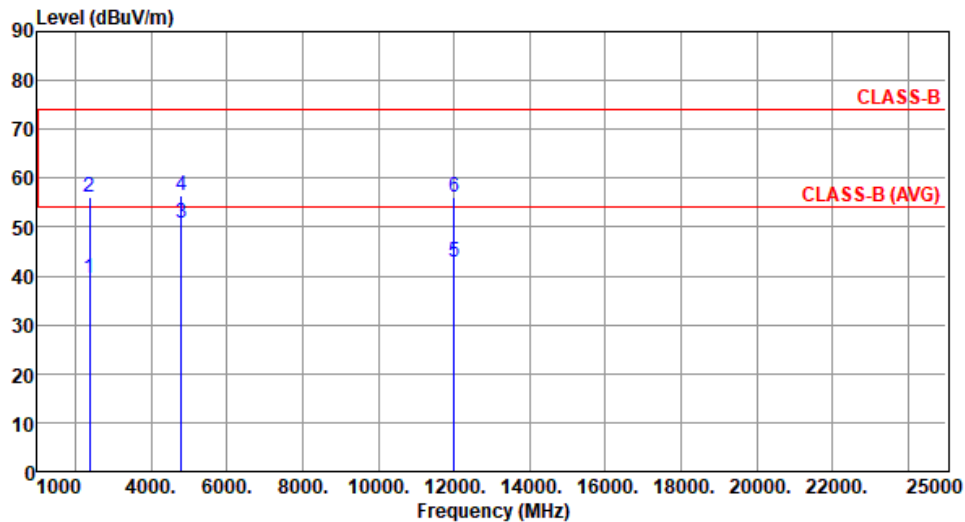

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.61	54.00	-14.39	42.36	-2.75	Average	215	186
2	2390.00	56.14	74.00	-17.86	58.89	-2.75	Peak	215	186
3	4804.00	50.92	54.00	-3.08	46.79	4.13	Average	293	11
4	4804.00	56.45	74.00	-17.55	52.32	4.13	Peak	293	11
5	12010.00	42.81	54.00	-11.19	29.19	13.62	Average	100	15
6	12010.00	56.04	74.00	-17.96	42.42	13.62	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

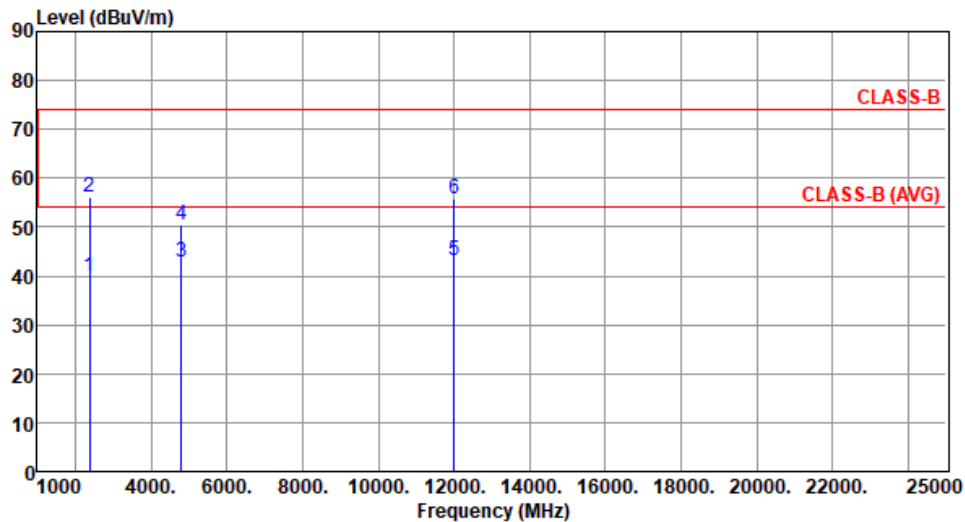

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.74	54.00	-14.26	42.49	-2.75	Average	100	14
2	2390.00	56.27	74.00	-17.73	59.02	-2.75	Peak	100	14
3	4804.00	42.96	54.00	-11.04	38.83	4.13	Average	100	25
4	4804.00	50.41	74.00	-23.59	46.28	4.13	Peak	100	25
5	12010.00	43.04	54.00	-10.96	29.42	13.62	Average	100	31
6	12010.00	55.91	74.00	-18.09	42.29	13.62	Peak	100	31

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

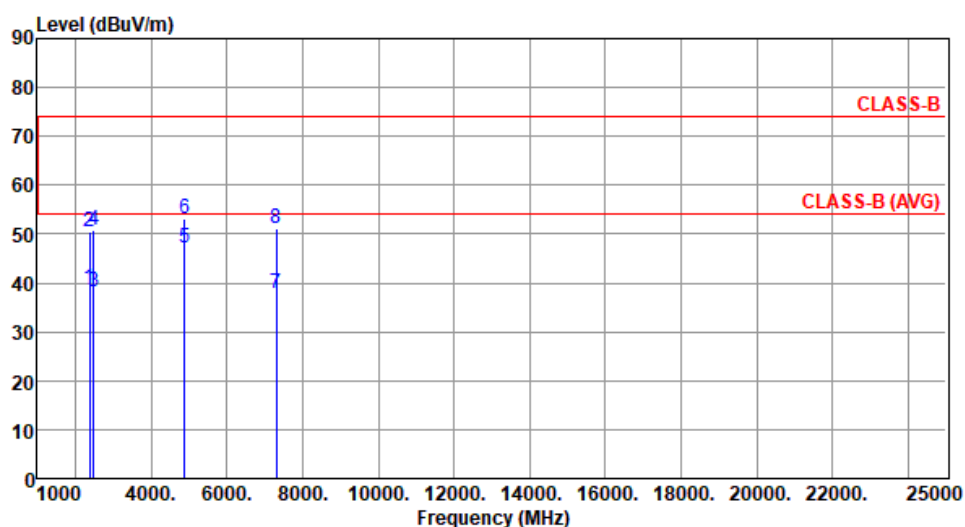

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.91	54.00	-15.09	41.66	-2.75	Average	217	190
2	2390.00	50.46	74.00	-23.54	53.21	-2.75	Peak	217	190
3	2483.50	38.29	54.00	-15.71	40.99	-2.70	Average	217	190
4	2483.50	50.78	74.00	-23.22	53.48	-2.70	Peak	217	190
5	4880.00	47.16	54.00	-6.84	43.04	4.12	Average	319	11
6	4880.00	53.09	74.00	-20.91	48.97	4.12	Peak	319	11
7	7320.00	37.72	54.00	-16.28	28.44	9.28	Average	100	18
8	7320.00	51.04	74.00	-22.96	41.76	9.28	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

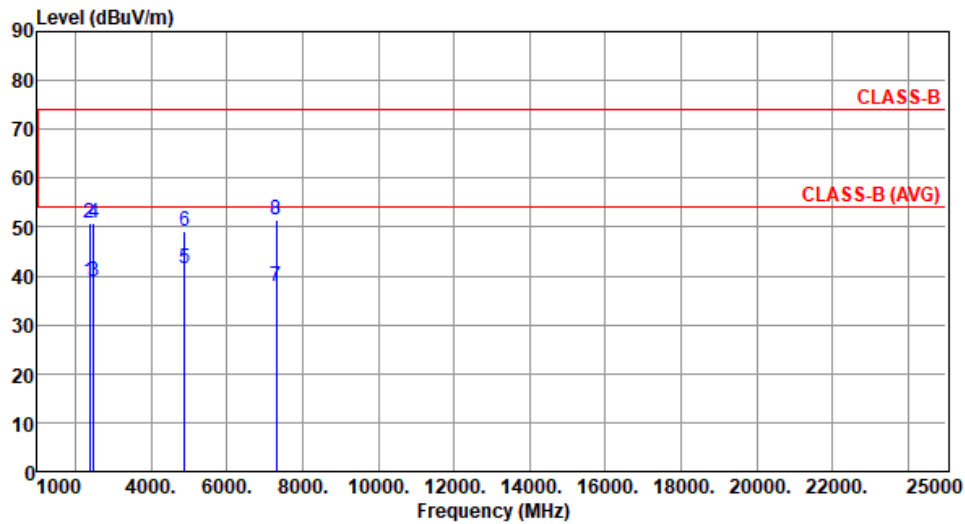

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.90	54.00	-15.10	41.65	-2.75	Average	100	333
2	2390.00	50.71	74.00	-23.29	53.46	-2.75	Peak	100	333
3	2483.50	38.99	54.00	-15.01	41.69	-2.70	Average	100	333
4	2483.50	50.96	74.00	-23.04	53.66	-2.70	Peak	100	333
5	4880.00	41.65	54.00	-12.35	37.53	4.12	Average	100	7
6	4880.00	49.17	74.00	-24.83	45.05	4.12	Peak	100	7
7	7320.00	37.80	54.00	-16.20	28.52	9.28	Average	100	26
8	7320.00	51.42	74.00	-22.58	42.14	9.28	Peak	100	26

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

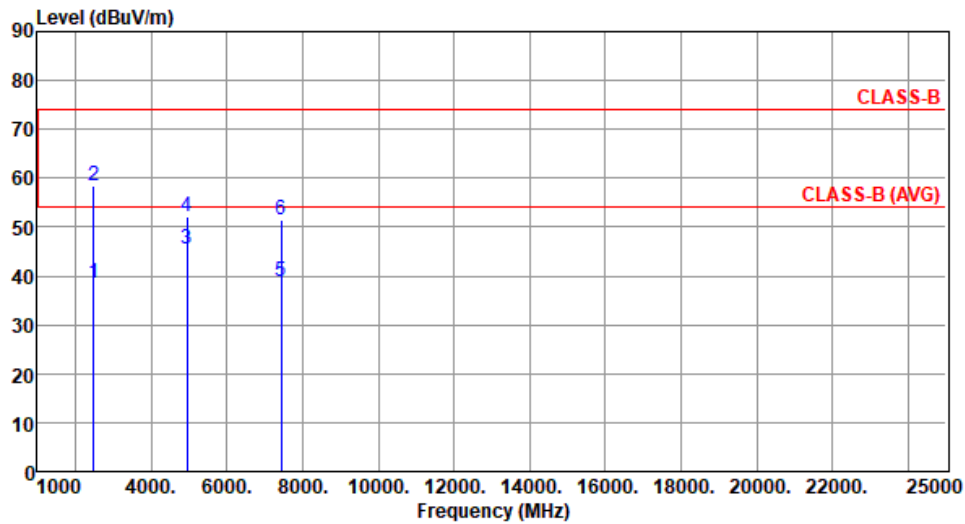

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.68	54.00	-15.32	41.38	-2.70	Average	214	188
2	2483.50	58.42	74.00	-15.58	61.12	-2.70	Peak	214	188
3	4960.00	45.44	54.00	-8.56	41.41	4.03	Average	264	17
4	4960.00	52.29	74.00	-21.71	48.26	4.03	Peak	264	17
5	7440.00	38.80	54.00	-15.20	29.43	9.37	Average	100	22
6	7440.00	51.32	74.00	-22.68	41.95	9.37	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

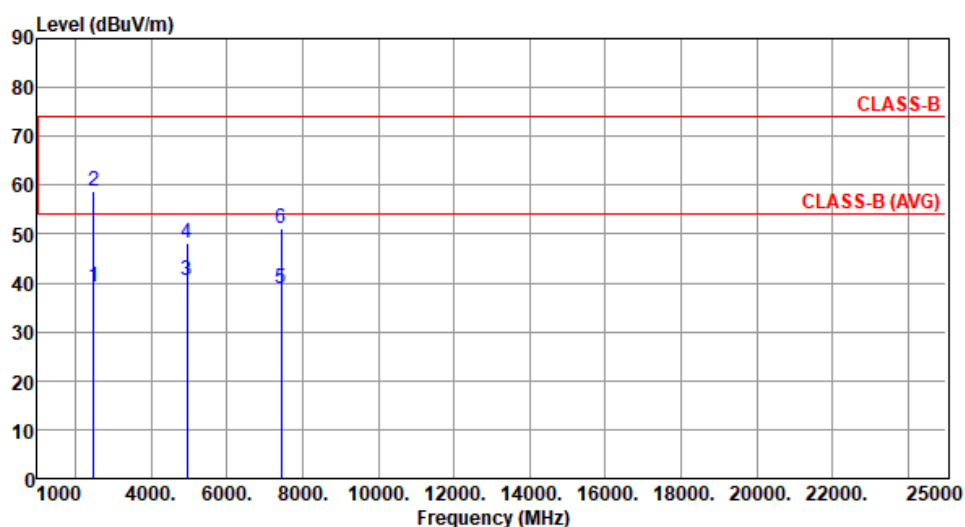

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	39.06	54.00	-14.94	41.76	-2.70	Average	100	23
2	2483.50	58.84	74.00	-15.16	61.54	-2.70	Peak	100	23
3	4960.00	40.51	54.00	-13.49	36.48	4.03	Average	100	12
4	4960.00	48.02	74.00	-25.98	43.99	4.03	Peak	100	12
5	7440.00	38.90	54.00	-15.10	29.53	9.37	Average	100	38
6	7440.00	51.02	74.00	-22.98	41.65	9.37	Peak	100	38

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

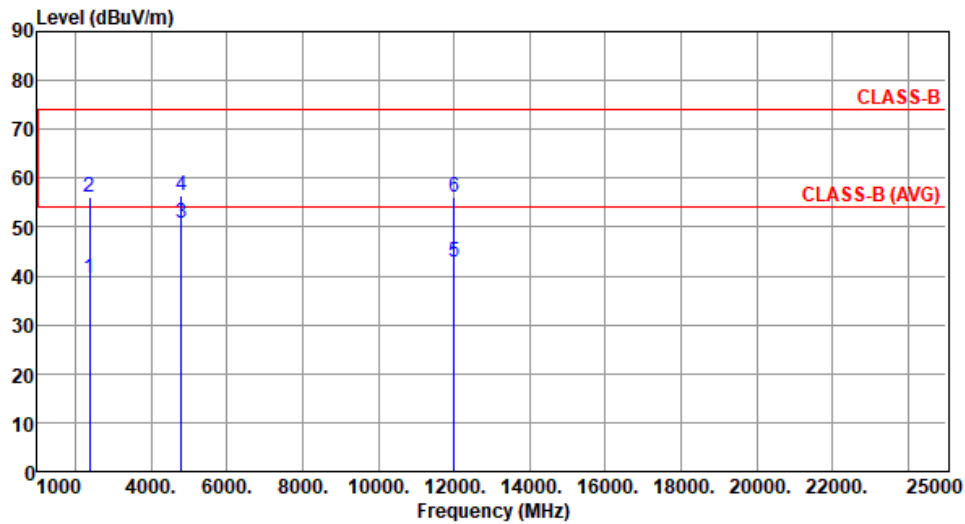

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.68	54.00	-14.32	42.43	-2.75	Average	214	185
2	2390.00	56.25	74.00	-17.75	59.00	-2.75	Peak	214	185
3	4804.00	50.68	54.00	-3.32	46.55	4.13	Average	306	25
4	4804.00	56.32	74.00	-17.68	52.19	4.13	Peak	306	25
5	12010.00	42.86	54.00	-11.14	29.24	13.62	Average	100	21
6	12010.00	56.15	74.00	-17.85	42.53	13.62	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

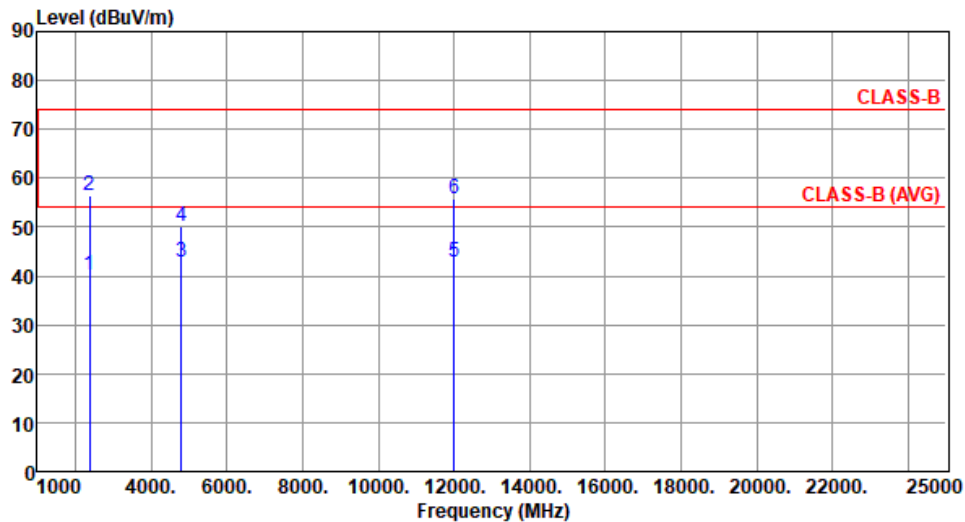

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	40.34	54.00	-13.66	43.09	-2.75	Average	100	15
2	2390.00	56.38	74.00	-17.62	59.13	-2.75	Peak	100	15
3	4804.00	42.81	54.00	-11.19	38.68	4.13	Average	100	29
4	4804.00	50.29	74.00	-23.71	46.16	4.13	Peak	100	29
5	12010.00	42.95	54.00	-11.05	29.33	13.62	Average	100	28
6	12010.00	55.86	74.00	-18.14	42.24	13.62	Peak	100	28

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

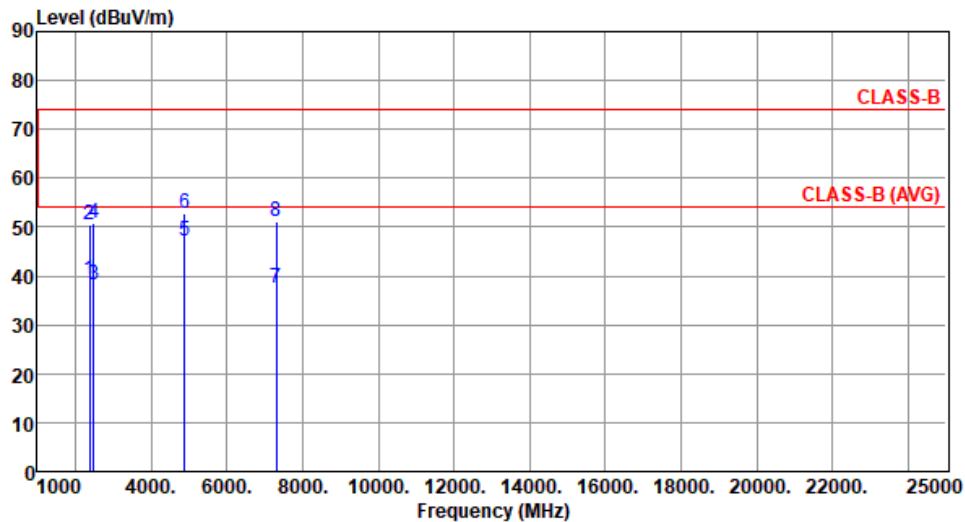

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	39.12	54.00	-14.88	41.87	-2.75	Average	215	188
2	2390.00	50.51	74.00	-23.49	53.26	-2.75	Peak	215	188
3	2483.50	38.31	54.00	-15.69	41.01	-2.70	Average	215	188
4	2483.50	50.82	74.00	-23.18	53.52	-2.70	Peak	215	188
5	4880.00	47.04	54.00	-6.96	42.92	4.12	Average	320	15
6	4880.00	52.93	74.00	-21.07	48.81	4.12	Peak	320	15
7	7320.00	37.66	54.00	-16.34	28.38	9.28	Average	100	21
8	7320.00	50.98	74.00	-23.02	41.70	9.28	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

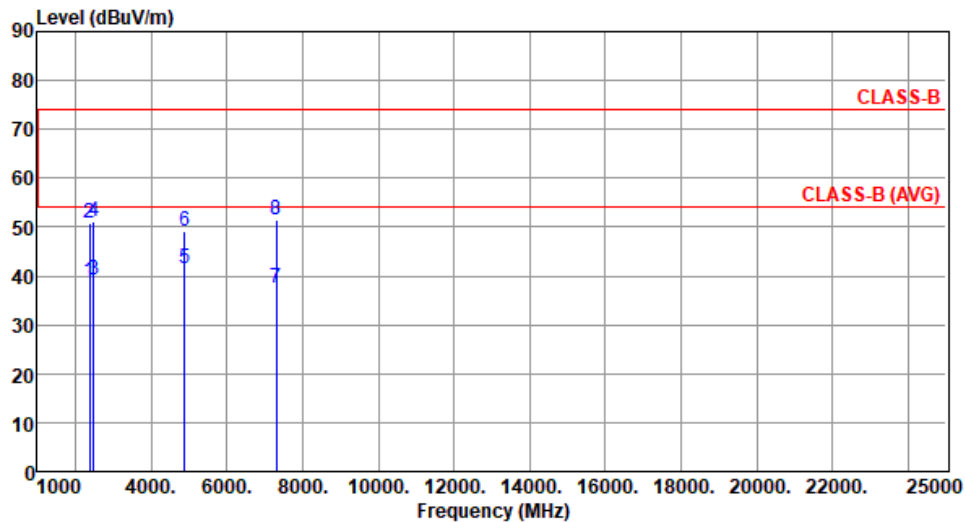

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	38.96	54.00	-15.04	41.71	-2.75	Average	100	335
2	2390.00	50.82	74.00	-23.18	53.57	-2.75	Peak	100	335
3	2483.50	39.06	54.00	-14.94	41.76	-2.70	Average	100	335
4	2483.50	51.04	74.00	-22.96	53.74	-2.70	Peak	100	335
5	4880.00	41.55	54.00	-12.45	37.43	4.12	Average	100	9
6	4880.00	49.06	74.00	-24.94	44.94	4.12	Peak	100	9
7	7320.00	37.68	54.00	-16.32	28.40	9.28	Average	100	22
8	7320.00	51.34	74.00	-22.66	42.06	9.28	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

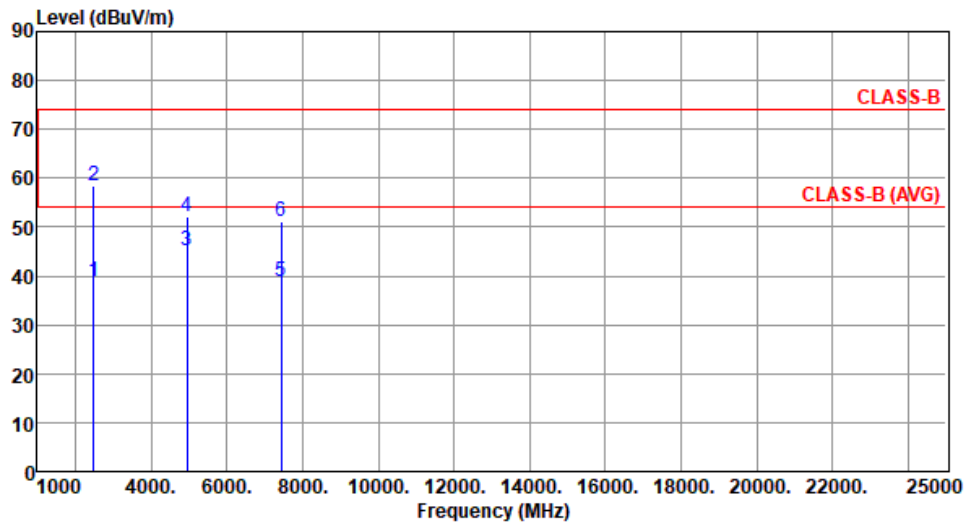

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	38.75	54.00	-15.25	41.45	-2.70	Average	216	185
2	2483.50	58.52	74.00	-15.48	61.22	-2.70	Peak	216	185
3	4960.00	45.26	54.00	-8.74	41.23	4.03	Average	275	14
4	4960.00	52.08	74.00	-21.92	48.05	4.03	Peak	275	14
5	7440.00	38.72	54.00	-15.28	29.35	9.37	Average	100	19
6	7440.00	51.26	74.00	-22.74	41.89	9.37	Peak	100	19

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




EMISSIONS IN RESTRICTED FREQUENCY BANDS

Appendix D

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):68

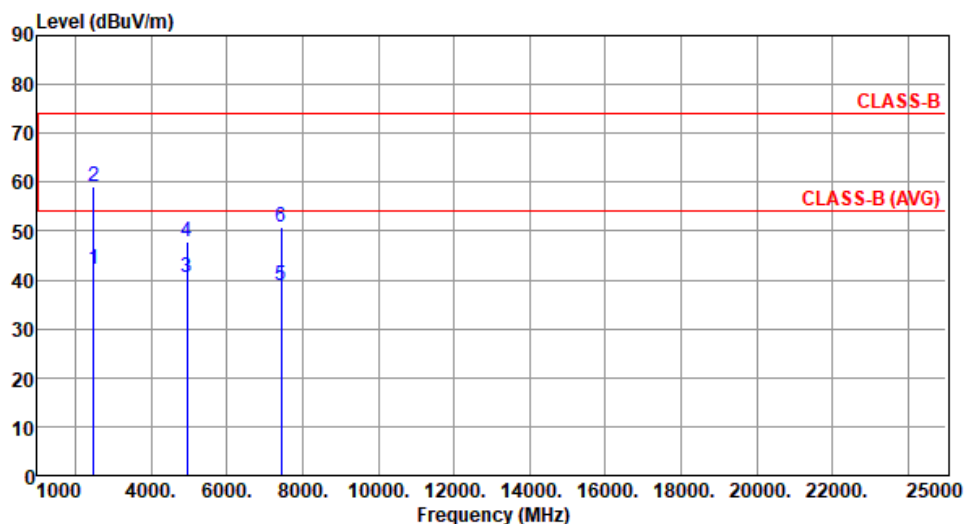

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	42.14	54.00	-11.86	44.84	-2.70	Average	100	19
2	2483.50	59.25	74.00	-14.75	61.95	-2.70	Peak	100	19
3	4960.00	40.42	54.00	-13.58	36.39	4.03	Average	100	14
4	4960.00	47.93	74.00	-26.07	43.90	4.03	Peak	100	14
5	7440.00	38.75	54.00	-15.25	29.38	9.37	Average	100	35
6	7440.00	50.86	74.00	-23.14	41.49	9.37	Peak	100	35

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

BT-LE(1Mbps)

CSENdB-DTS


2402MHz

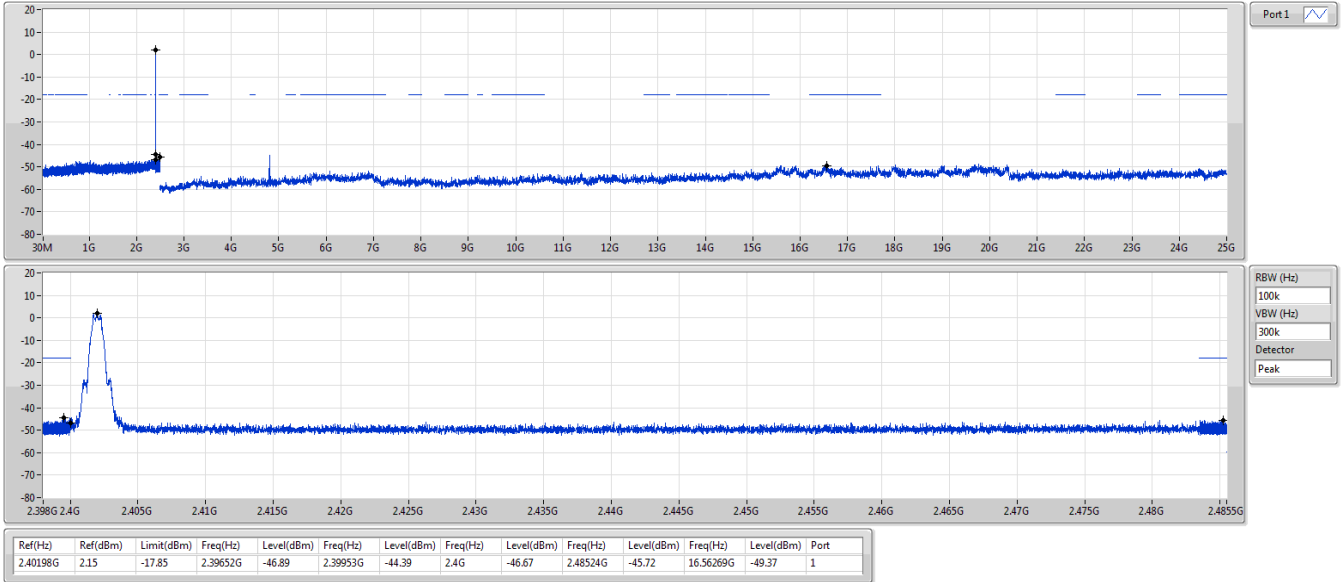

BT-LE(1Mbps)

CSENdB-DTS


2440MHz

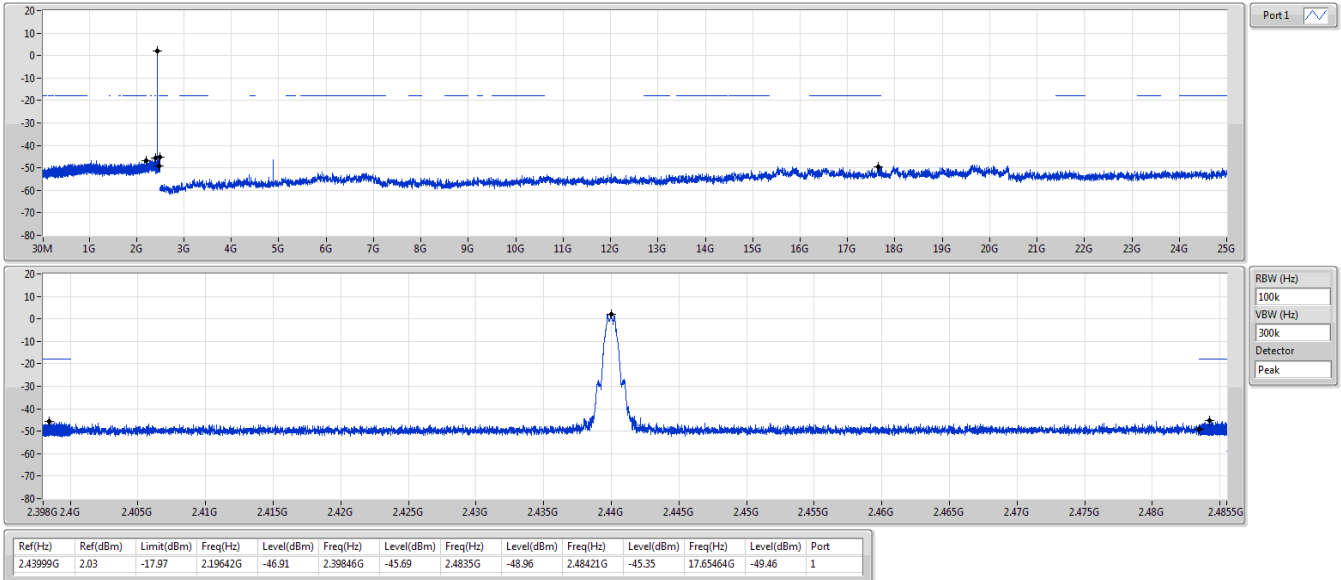

BT-LE(1Mbps)

CSEnB-DTS


2480MHz

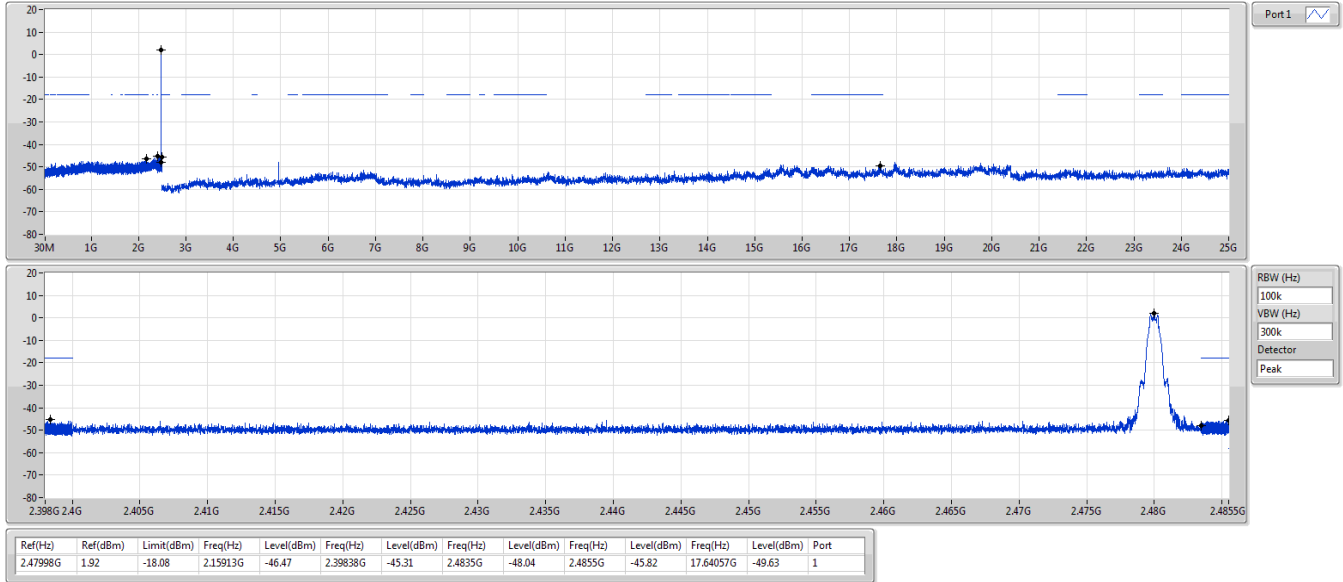

BT-LE(2Mbps)

CSEnB-DTS


2402MHz

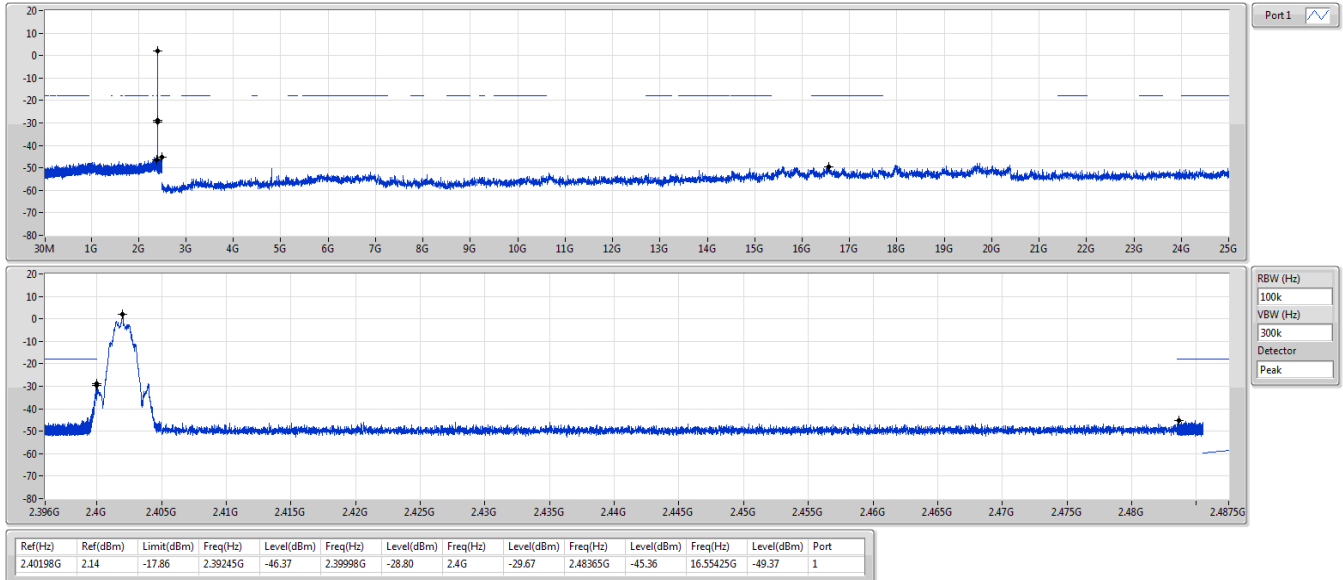

BT-LE(2Mbps)

CSEndB-DTS


2440MHz

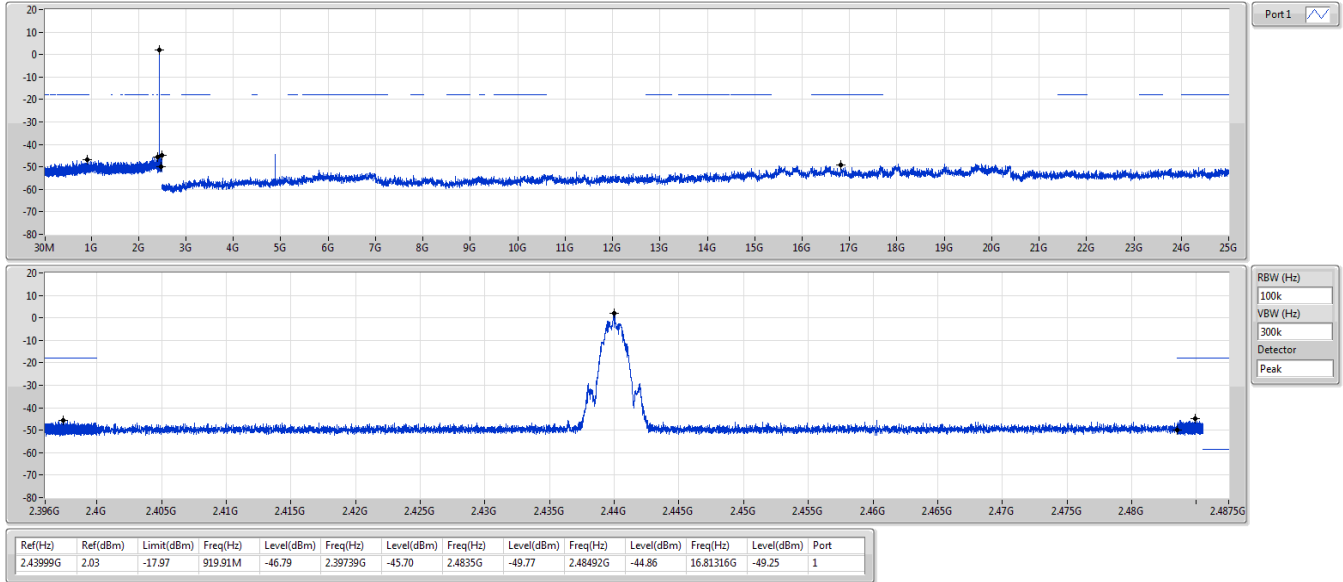

BT-LE(2Mbps)

CSEndB-DTS

2480MHz

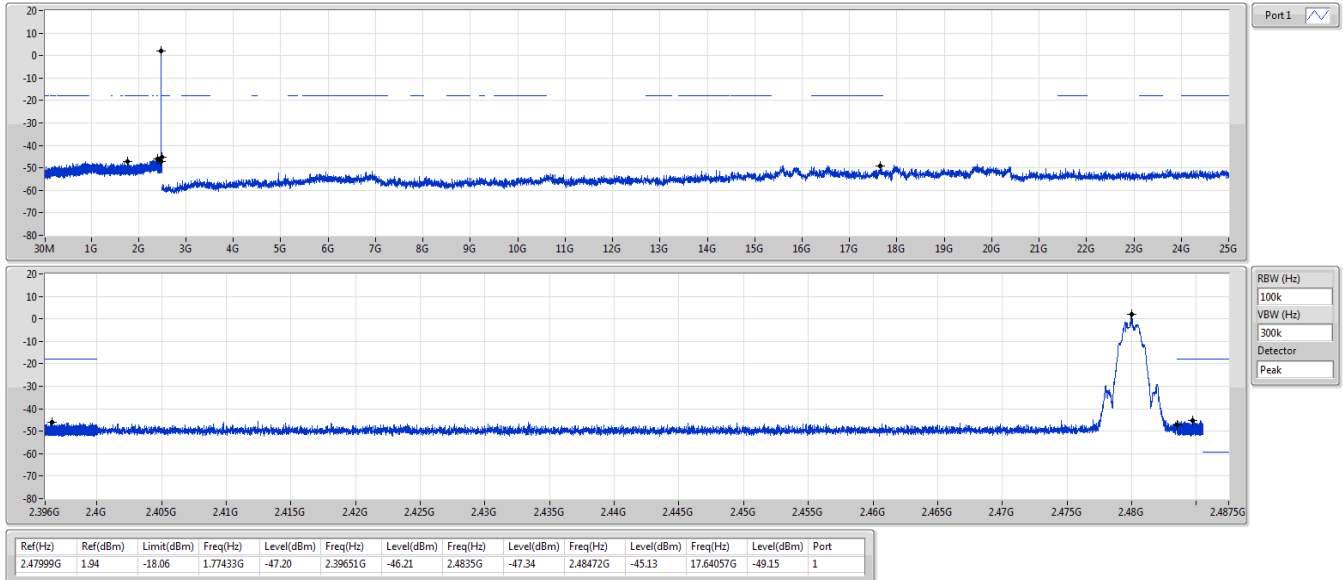




Test Configuration 1: Power mount mode

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 64%

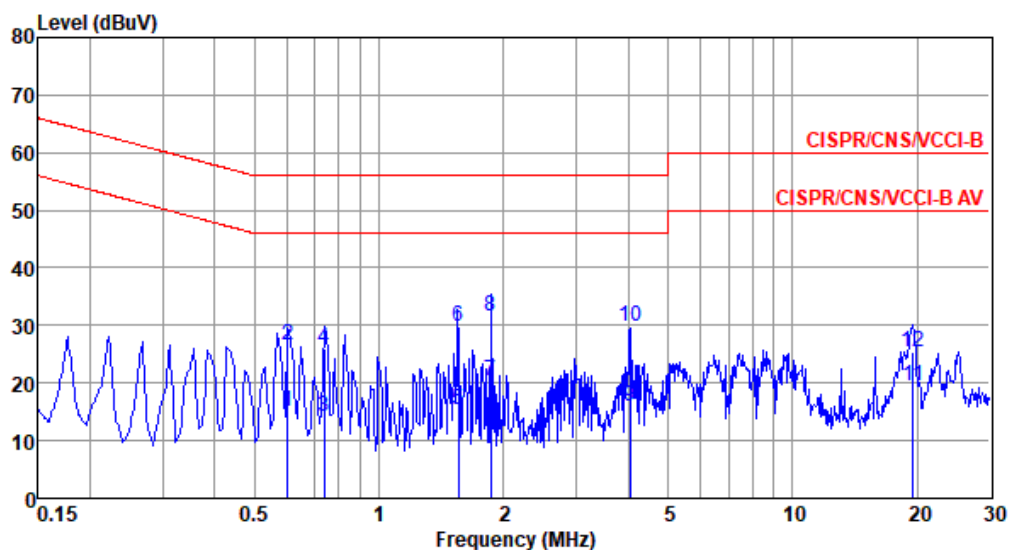

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.601	15.00	46.00	-31.00	4.92	9.60	0.12	0.36	Average
2	0.601	26.62	56.00	-29.38	16.54	9.60	0.12	0.36	QP
3	0.735	14.05	46.00	-31.95	3.94	9.61	0.13	0.37	Average
4	0.735	25.95	56.00	-30.05	15.84	9.61	0.13	0.37	QP
5	1.554	15.24	46.00	-30.76	5.05	9.62	0.19	0.38	Average
6	1.554	29.85	56.00	-26.15	19.66	9.62	0.19	0.38	QP
7	1.865	20.27	46.00	-25.73	10.06	9.62	0.20	0.39	Average
8*	1.865	31.57	56.00	-24.43	21.36	9.62	0.20	0.39	QP
9	4.040	15.81	46.00	-30.19	5.55	9.63	0.21	0.42	Average
10	4.040	29.93	56.00	-26.07	19.67	9.63	0.21	0.42	QP
11	19.532	19.46	50.00	-30.54	8.58	9.59	0.65	0.64	Average
12	19.532	25.31	60.00	-34.69	14.43	9.59	0.65	0.64	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



AC POWER LINE CONDUCTED EMISSIONS


Appendix F

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 64%

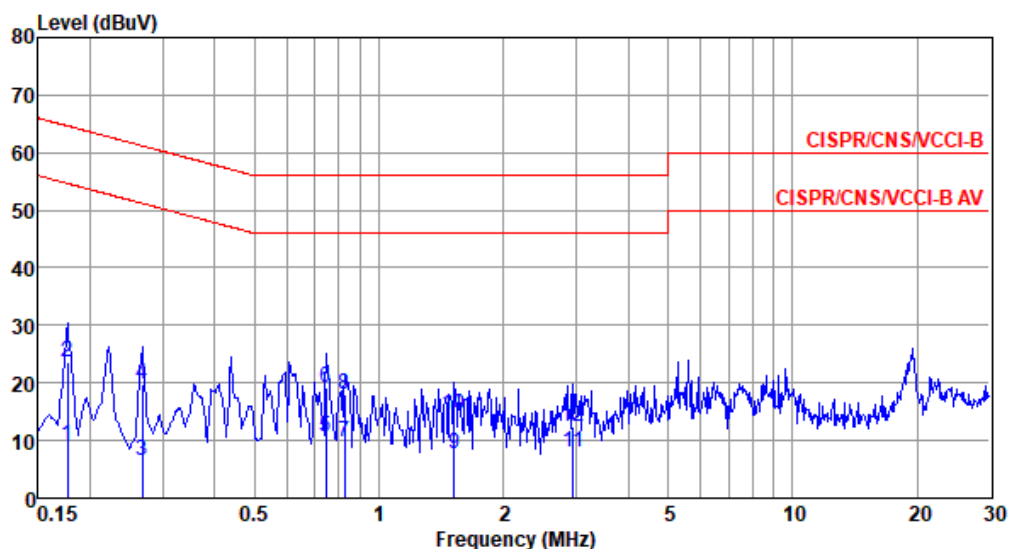

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	9.09	54.64	-45.55	-0.75	9.59	0.08	0.17	Average
2	0.177	23.75	64.64	-40.89	13.91	9.59	0.08	0.17	QP
3	0.267	6.38	51.20	-44.82	-3.47	9.59	0.08	0.18	Average
4	0.267	19.71	61.20	-41.49	9.86	9.59	0.08	0.18	QP
5*	0.743	10.59	46.00	-35.41	0.62	9.59	0.13	0.25	Average
6	0.743	19.18	56.00	-36.82	9.21	9.59	0.13	0.25	QP
7	0.826	9.88	46.00	-36.12	-0.11	9.59	0.14	0.26	Average
8	0.826	18.09	56.00	-37.91	8.10	9.59	0.14	0.26	QP
9	1.519	7.78	46.00	-38.22	-2.29	9.60	0.18	0.29	Average
10	1.519	14.38	56.00	-41.62	4.31	9.60	0.18	0.29	QP
11	2.946	8.01	46.00	-37.99	-2.13	9.61	0.21	0.32	Average
12	2.946	12.54	56.00	-43.46	2.40	9.61	0.21	0.32	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Test Configuration 2: USB charger mode

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 64%

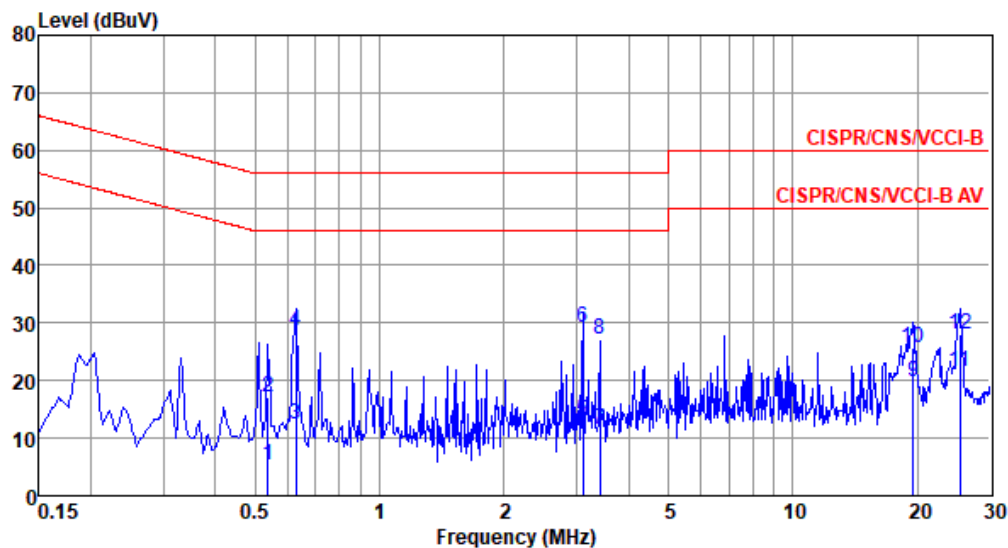

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.538	5.17	46.00	-40.83	-4.90	9.60	0.11	0.36	Average
2	0.538	17.18	56.00	-38.82	7.11	9.60	0.11	0.36	QP
3	0.627	12.28	46.00	-33.72	2.20	9.60	0.12	0.36	Average
4	0.627	28.63	56.00	-27.37	18.55	9.60	0.12	0.36	QP
5	3.107	13.05	46.00	-32.95	2.80	9.63	0.21	0.41	Average
6*	3.107	29.35	56.00	-26.65	19.10	9.63	0.21	0.41	QP
7	3.417	11.66	46.00	-34.34	1.41	9.63	0.21	0.41	Average
8	3.417	27.18	56.00	-28.82	16.93	9.63	0.21	0.41	QP
9	19.532	19.83	50.00	-30.17	8.95	9.59	0.65	0.64	Average
10	19.532	25.56	60.00	-34.44	14.68	9.59	0.65	0.64	QP
11	25.321	21.54	50.00	-28.46	10.65	9.51	0.69	0.69	Average
12	25.321	28.04	60.00	-31.96	17.15	9.51	0.69	0.69	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



AC POWER LINE CONDUCTED EMISSIONS


Appendix F

Modulation	BT-LE(1Mbps)	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 64%

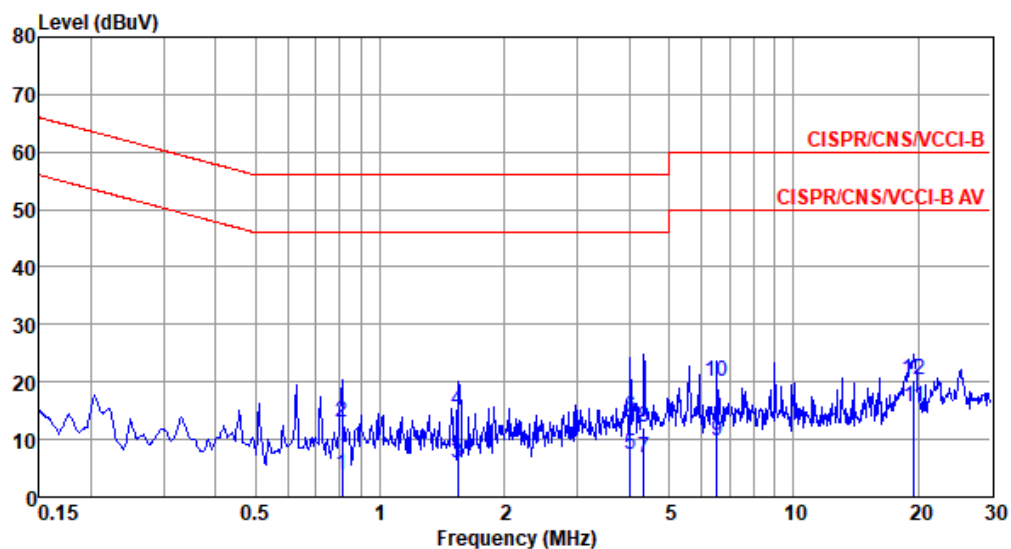

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.809	3.70	46.00	-42.30	-6.29	9.59	0.14	0.26	Average
2	0.809	12.95	56.00	-43.05	2.96	9.59	0.14	0.26	QP
3	1.544	5.93	46.00	-40.07	-4.14	9.60	0.18	0.29	Average
4	1.544	14.91	56.00	-41.09	4.84	9.60	0.18	0.29	QP
5	4.027	7.26	46.00	-38.74	-2.89	9.61	0.21	0.33	Average
6	4.027	13.92	56.00	-42.08	3.77	9.61	0.21	0.33	QP
7	4.338	6.67	46.00	-39.33	-3.50	9.61	0.23	0.33	Average
8	4.338	12.16	56.00	-43.84	1.99	9.61	0.23	0.33	QP
9	6.523	9.80	50.00	-40.20	-0.52	9.63	0.34	0.35	Average
10	6.523	20.12	60.00	-39.88	9.80	9.63	0.34	0.35	QP
11*	19.532	15.68	50.00	-34.32	4.90	9.68	0.65	0.45	Average
12	19.532	20.46	60.00	-39.54	9.68	9.68	0.65	0.45	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).