

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

**Unlicensed National Information Infrastructure (U-NII)
and License-Exempt Local Area Network (LE-LAN)**

Devices, 47CFR, Part 15E (15.407)

Industry Canada RSS-247 Issue 3

Application For Grant of Certification

Model: A04684

Frequency Range: 5180-5240, and 5745-5825 MHz

License-Exempt U-NII, Local Area Network equipment, U-NII-1, and U-NII-3 operation

FCC ID: IPH-04684

IC: 1792A-04684

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Tim Olson

Senior Compliance Engineer

Test Report Number: 230821A

Test Date: August 21, 2023

Authorized Signatory: 

Patrick Powell

Rogers Labs, a division of The Compatibility Center LLC

FCC Designation: US5305

ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04684 IC: 1792A-04684

Lenexa, KS 66214 Test: 230821A SN's: 3444728073, 3448985366, 3459196235, 3459196260

Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 1

File: A04684 NII TstRpt 230821A r1

Garmin International, Inc.

PMN: A04684

Date: June 19, 2024

Page 1 of 97

Table of Contents

TABLE OF CONTENTS.....	2
REVISIONS.....	5
EXECUTIVE SUMMARY	6
OPINION / INTERPRETATION OF RESULTS	7
EQUIPMENT TESTED.....	8
Equipment Operational Modes.....	9
Equipment Function	10
Equipment Configuration.....	11
APPLICANT COMPANY INFORMATION	12
EQUIPMENT INFORMATION.....	12
Product Details	13
Antenna and Bandwidth.....	13
APPLICATION FOR CERTIFICATION.....	14
APPLICABLE STANDARDS & TEST PROCEDURES	15
TESTING PROCEDURES	15
AC Line Conducted Emission Test Procedure	15
Radiated Emission Procedure	15
Antenna Port Conducted Emission Test Procedure.....	16
Diagram 1 Test arrangement for power-line conducted emissions.....	16
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	17
Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)	18
Diagram 4 Test arrangement for Antenna Port Conducted emissions.....	19

TEST SITE LOCATIONS	20
UNITS OF MEASUREMENTS	20
ENVIRONMENTAL CONDITIONS.....	21
STATEMENT OF MODIFICATIONS AND DEVIATIONS	21
INTENTIONAL RADIATORS.....	21
Antenna Requirements	21
Restricted Bands of Operation.....	21
Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 5 U-NII-1 (802.11a).....	22
Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 6 U-NII-1 (802.11n)	23
Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 7 U-NII-1 (802.11n40)	24
Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 U-NII-1 (802.11ac80).....	24
Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 U-NII-3 (802.11a).....	25
Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 U-NII-3 (802.11n)	25
Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 U-NII-3 (802.11n40)	26
Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 U-NII-3 (802.11ac80).....	26
Summary of Results for Radiated Emissions in Restricted Bands	27
AC Line Conducted EMI Procedure	28
Figure 1 AC Line Conducted Emissions Data L1 (#4, EUT – Computer)	29
Figure 2 AC Line Conducted Emissions Data L2 (#4, EUT – Computer)	30
Table 9 AC Line Conducted Emissions Data L1 (#4, EUT – Computer).....	31
Table 10 AC Line Conducted Emissions Data L2 (#4, EUT – Computer).....	31
Summary of Results for AC Line Conducted Emissions.....	31
General Radiated Emissions Procedure.....	32
Table 11 General Radiated Emissions Data.....	33
Summary of Results for General Radiated Emissions.....	33
Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands	34
Figure 3 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)	38
Figure 4 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)	39
Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)	40
Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80).....	41

Figure 7 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	42
Figure 8 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	43
Figure 9 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	44
Figure 10 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	45
Figure 11 Plot of Lower Band Edge Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)	46
Figure 12 Plot of Lower Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)	47
Figure 13 Plot of Lower Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)	48
Figure 14 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)	49
Figure 15 Plot of Lower Band Edge Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	50
Figure 16 Plot of Lower Band Edge Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	51
Figure 17 Plot of Lower Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	52
Figure 18 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	53
Figure 19 Plot of Upper Band Edge Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)	54
Figure 20 Plot of Upper Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)	55
Figure 21 Plot of Upper Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)	56
Figure 22 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)	57
Figure 23 Plot of Upper Band Edge Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	58
Figure 24 Plot of Upper Band Edge Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	59
Figure 25 Plot of Upper Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	60
Figure 26 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	61
Figure 27 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 5 U-NII-1 (802.11a)	62
Figure 28 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11n)	63
Figure 29 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)	64
Figure 30 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)	65
Figure 31 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	66
Figure 32 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	67
Figure 33 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	68
Figure 34 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	69
Figure 35 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 5 U-NII-1 (802.11a)	70
Figure 36 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11n)	71
Figure 37 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)	72
Figure 38 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)	73
Figure 39 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	74
Figure 40 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	75
Figure 41 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	76
Figure 42 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	77
Figure 43 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)	78

Figure 44 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)	79
Figure 45 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)	80
Figure 46 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)	81
Transmitter Emissions Data.....	82
Table 12 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 5 U-NII-1 (802.11a)	82
Table 13 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 6 U-NII-1 (802.11n)	83
Table 14 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 7 U-NII-1 (802.11n40)	84
Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 U-NII-1 (802.11ac80)	85
Table 16 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 9 U-NII-3 (802.11a)	86
Table 17 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 10 U-NII-3 (802.11n)	87
Table 18 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 11 U-NII-3 (802.11n40)	88
Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 U-NII-3 (802.11ac80)	89
Table 21 Transmitter Antenna Port Data Modes 5-8, U-NII-1	90
Table 22 Transmitter Antenna Port Data Modes 9-12, (U-NII-3)	91
Summary of Results for Transmitter Radiated Emissions of Intentional Radiator	91
ANNEX.....	92
Annex A Measurement Uncertainty Calculations	93
Annex B Test Equipment	94
Annex C Qualifications	96
Annex D Laboratory Certificate of Accreditation	97

Revisions

Revision 1 Issued June 19, 2024

Executive Summary

The following information is submitted for consideration in obtaining Equipment Grants of Certification for License Exempt, Unlicensed National Information Infrastructure (U-NII) Intentional Radiator operating under 47 CFR Paragraph 15E (15.407), U-NII-1 and U-NII-3 new rules, 5180-5240, and 5745-5825 MHz bands, and Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 3, LE-LAN transmitter.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

M/N: A04684 HVIN: A04684

FCC ID: IPH-04684 Industry Canada ID: 1792A-04684

Frequency Range: 5180-5240 MHz and 5745-5825 MHz (U-NII-1 and U-NII-3 under new rules 15.407, 802.11a/n/n40/ac80) and limited transmitter operations per regulations for operation in Canada

Mode	Channel width	Average Conducted Power (W)	Average e.i.r.p. Power (W)	99% OBW (kHz)
Mode 5, U-NII-1a	20 MHz mode	0.027	0.051	17,250.0
Mode 6, U-NII-1n	20 MHz mode	0.021	0.039	18,200.0
Mode 7, U-NII-1n40	40 MHz mode	0.018	0.035	37,000.0
Mode 8, U-NII-1ac80	80 MHz mode	0.017	0.033	76,150.0
Mode 9, U-NII-3a	20 MHz mode	0.047	0.090	17,790.0
Mode 10, U-NII-3n	20 MHz mode	0.045	0.087	18,637.5
Mode 11, U-NII-3n40	40 MHz mode	0.045	0.086	39,875.0
Mode 12, U-NII-3ac80	80 MHz mode	0.040	0.076	76,950.0

This report addresses EUT Operations as U-NII transmitter using modulations defined above in modes 5 through 12. Note, the production device utilizes integral antenna systems with the 2.4 GHz PIFA providing 2.2 dBi, and the 5 GHz PIFA providing 4.5 dBi gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-2.6	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	-7.75	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-19.3	Complies
Harmonic Emissions per 15.407, RSS-247	-2.6	Complies

Equipment Tested

Model: A04684

Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT General Emissions #1	A04684	3444728073
EUT Tx Radiated #2	A04684	3459196260
EUT Antenna Port Conducted #1	A04684	3448985366
EUT Antenna Port Conducted #2	A04684	3459196235
8m power cable	320-01325-20	N/A
4m power cable	320-01325-10	N/A
1.5m USB/power cable	320-01325-00	N/A
Dual USB PWR Adaptor	013-00797-01	M1812004b
Quick Power Adaptor	320-01425-10	N/A
Parking mode Cable	320-00845-04	F19000070
DC Power Supply	BK 1745	209C13
Laptop Computer	Latitude 7480	EFSPSN2
USB Printer	Dell 0N5819	5D1SL61

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

Software (FVIN): 1.04 or higher; Antennas: 2.4 GHz PIFA (2.2 dBi), 5 GHz PIFA (4.5 dBi)

Equipment Operational Modes


Mode	Transmitter Operation
1	BT BLE (GMSK)
2	802.11b
3	802.11g
4	802.11n
5	U-NII-1 802.11a
6	U-NII-1 802.11n
7	U-NII-1 802.11n40
8	U-NII-1 802.11ac80
9	U-NII-3 802.11a
10	U-NII-3 802.11n
11	U-NII-3 802.11n40
12	U-NII-3 802.11ac80

Equipment Function


The EUT is a mobile mounted, digital recording device incorporating wireless data transfer. The device incorporates camera sensor and associated circuitry to record images within the lens view angle. The design incorporates transmitter circuitry operating in the 2402-2480, 5150-5250, and 5725-5850 MHz frequency bands. The product operates from internal battery or external direct current power provided over the micro USB interface port. Power is provided through compatible USB interface cable options and power sources. The design provides a Micro SD Card slot and USB-C interface port as presented below and wireless communications with compatible equipment. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in the configuration options as described by the manufacturer and presented below. During testing, the test system was configured to operate in a manufacturer defined mode. As requested by the manufacturer, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration


- 1) Unit connected to (and powered by) CLA through USB cable




- 2) Unit connected to (and powered by) CLA through USB cable




- 3) Unit connected to (and powered by) CLA through USB cable



- 4) Unit connected to (and powered by) Computer through USB cable




- 5) Unit connected to (and powered by) QPA through USB cable



- 6) Unit connected to (and powered by) QPA through USB cable



- 7) Unit connected to (and powered by) QPA through USB cable



- 8) Unit connected to (and powered by) Surveillance Mode Cable



Applicant Company information

Applicants Company	Garmin International, Inc.
Applicants Address	1200 East 151st Street, Olathe, KS 66062
FCC Identifier	IPH-04684
Industry Canada Identifier	1792A-04684
Manufacturer Company	Garmin International, Inc.
Manufacturer Address	1200 East 151st Street, Olathe, KS 66062

Equipment information

Hardware Version Identification Number (HVIN): The HVIN identifies hardware specifications of a product version. The HVIN replaces the ISED Model Number in the legacy E-filing System. An HVIN is required for all products for certification applications.	A04684
Host Marketing Name (HMN) (if applicable): The HMN is the name or model number of a final product, which contains a certified radio module.	A04684
Brand Name	
Model Number	A04684
Test Rule Part(s)	47 CFR 15E, 15.407, RSS-247
Test Frequency Range	5.15-5.25 and 5.725-5.85 GHz
Project Number	230821A
Submission Type	FCC: Certification, IC: Certification

Product Details

Items	Description
Product Type	Single chain 5 GHz U-NII-1, and U-NII-3
Radio Type	Transceiver
Power Type	Internal Rechargeable Battery or External Direct Current
Frequency Range	5150-5250 MHz / 5725-5850 MHz
Channel Number	Channels 36, 38, 40, 42, 44, 46, 48, 149, 151, 153, 155, 157, 159, 161, 165
Carrier Frequencies	Please refer to 802.11 Standard for Carrier Frequencies
Antenna	Integrated 4.5 dBi antenna PIFA
Communication Mode	Device provides 5 GHz, U-NII 1 and U-NII-3 operation
Beamforming Function	Without beamforming
Operating Mode	5150-5250 MHz (U-NII-1) and 5725-5825 MHz (U-NII-3)

Antenna and Bandwidth

Antenna	Number of TX chains		
Bandwidth Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	Single Chain	N/A	N/A
IEEE 802.11n	Single Chain	Single Chain	N/A
IEEE 802.11ac	N/A	N/A	Single Chain

Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: A04684
FCC ID: IPH-04684 IC: 1792A-04684
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from internal battery power or external direct current power provided from authorized sources. The EUT provides USB-C interface port for power and communications as presented in this filing.
- (9) Transition Provisions of 47 CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. The required information has been provided in Operational Description Exhibit filed with the application.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

The following information is submitted in accordance with e-CFR dated August 4, 2023: Part 2, Subpart J, Part 15, Subpart 15E, Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 3. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v02r01, KDB 926956 v02, RSS-247 Issue 2, and RSS-GEN Issue 5.

Testing Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions were performed as required in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in the test setup exhibit for EUT placement used during testing.


Radiated Emission Procedure

Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 2, RSS-GEN and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure

The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for power-line conducted emissions

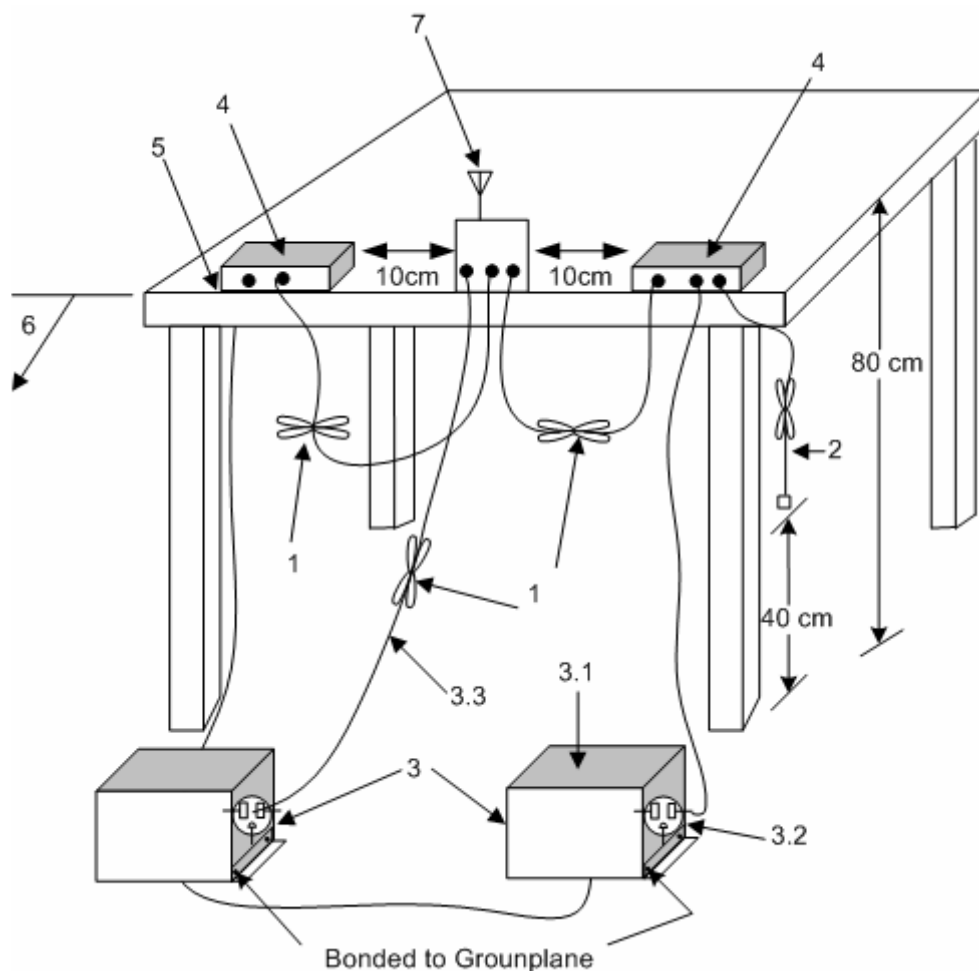

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04684 IC: 1792A-04684

Lenexa, KS 66214 Test: 230821A SN's: 3444728073, 3448985366, 3459196235, 3459196260

Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 1

File: A04684 NII TstRpt 230821A r1

Garmin International, Inc.


PMN: A04684

Date: June 19, 2024

Page 16 of 97

3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

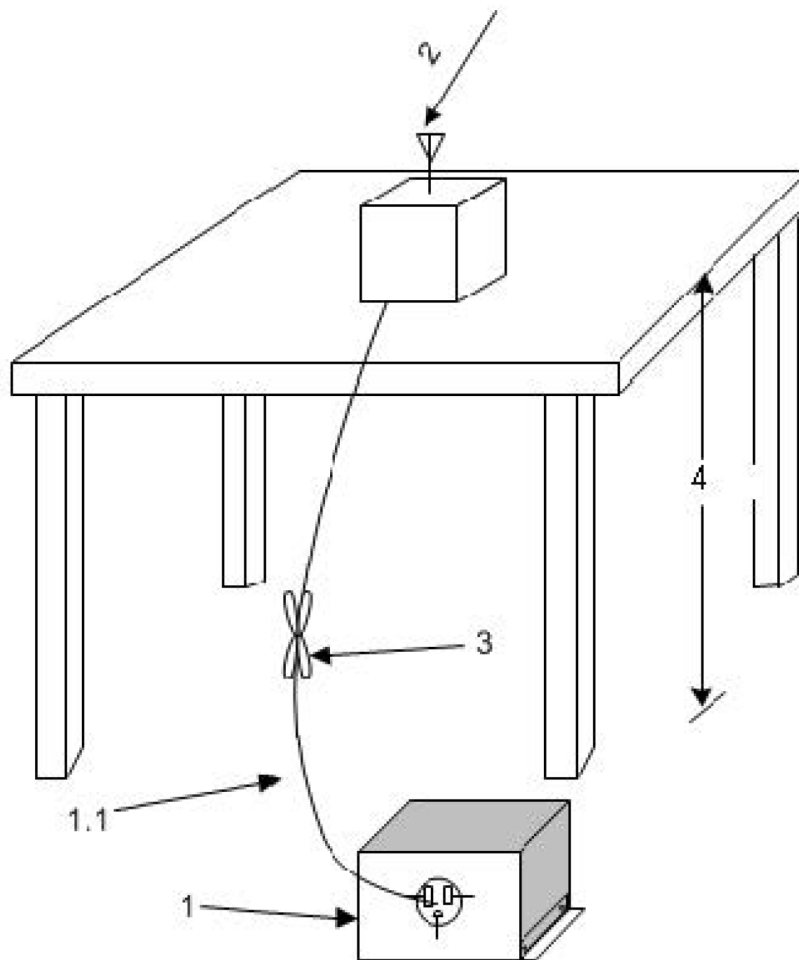

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements

below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN.

Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).

1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center


forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above

1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1)..

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

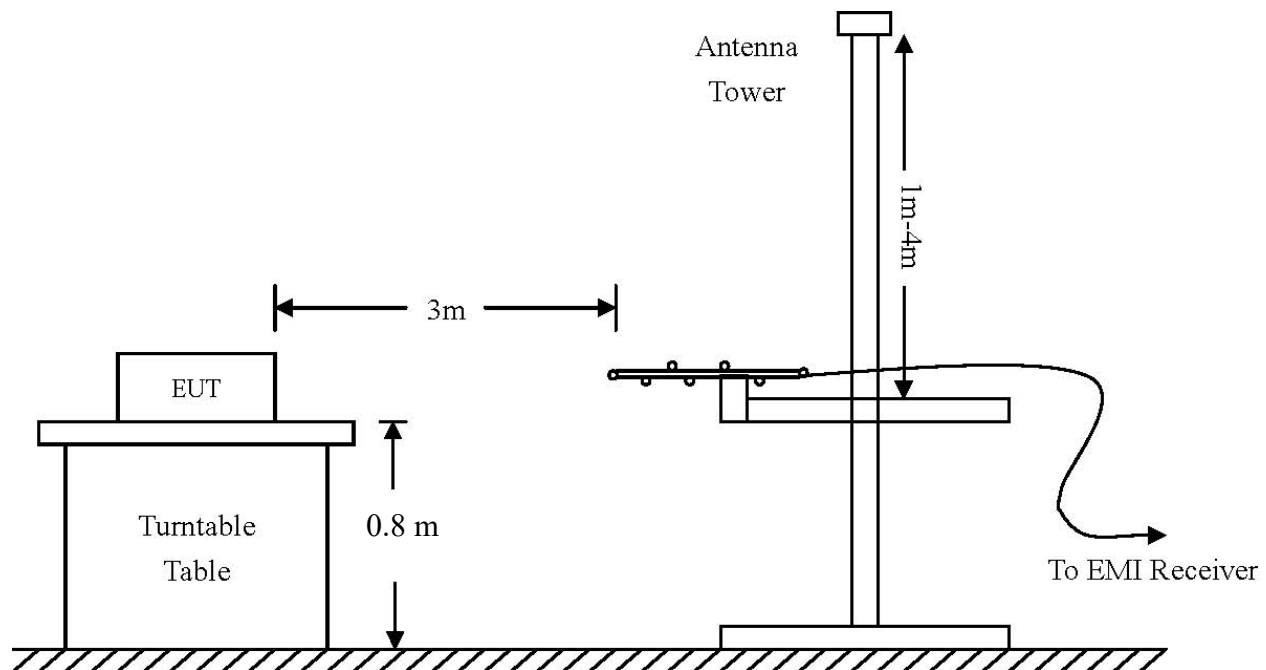

Above 1 GHz:


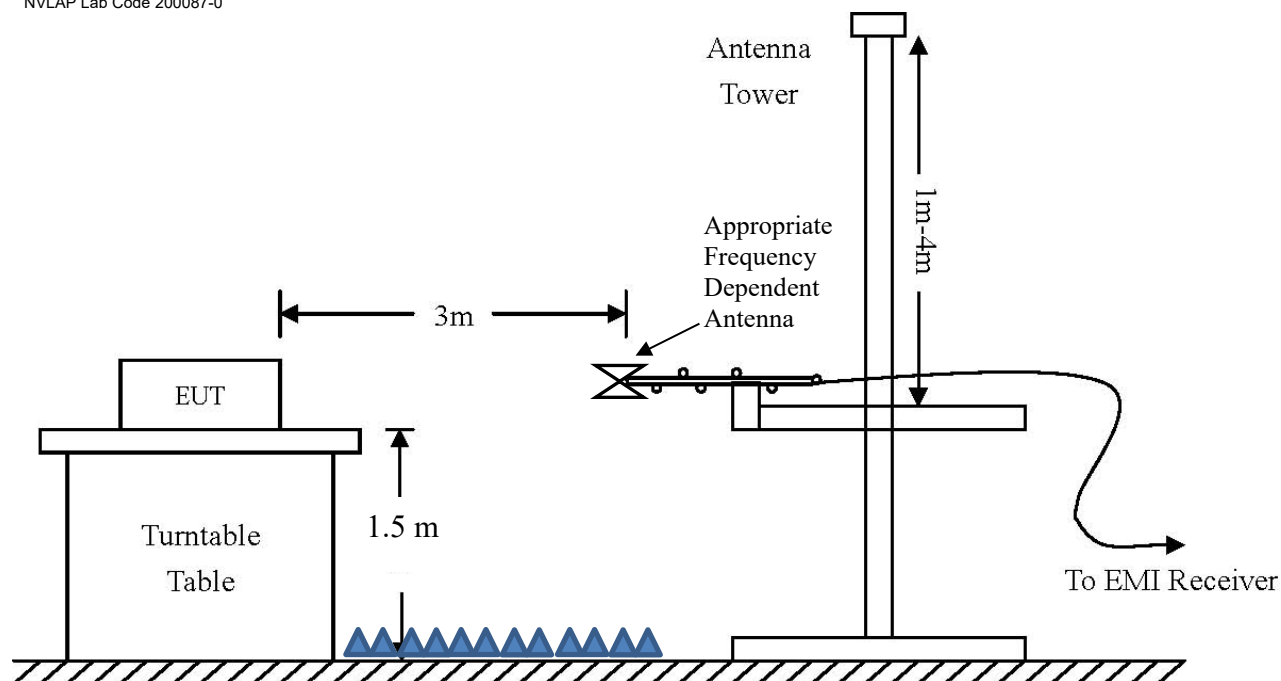


Diagram 4 Test arrangement for Antenna Port Conducted emissions
Spectrum Analyzer

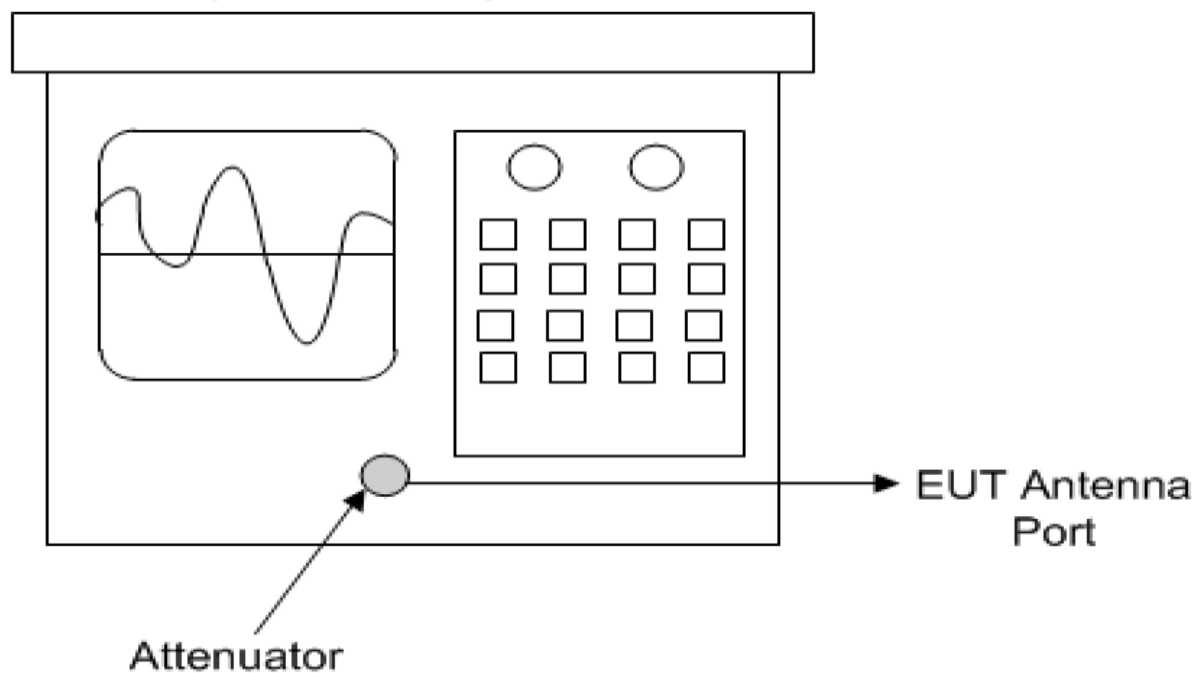

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$$RFS \text{ (dB}\mu\text{V/m @ 3m)} = FSM \text{ (dB}\mu\text{V)} + A.F. \text{ (dB/m)} + \text{Losses (dB)} - \text{Gain (dB)}$$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Environmental Conditions

Ambient Temperature 19.4° C

Relative Humidity 32.0 %

Atmospheric Pressure 1028.1 mb

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47 CFR Part 15C, RSS-Gen, and RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS or SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS or SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average

amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 5 U-NII-1 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 9 U-NII-1 (802.11a)							
5150.0	64.9	50.4	66.4	50.9	54.0	-3.6	-3.1
5350.0	63.8	50.4	63.8	50.4	54.0	-3.6	-3.6
15540.0	63.5	50.0	63.8	50.0	54.0	-4.0	-4.0
15600.0	63.6	50.1	63.5	50.0	54.0	-3.9	-4.0
15720.0	62.5	49.2	62.7	49.2	54.0	-4.8	-4.8
20720.0	57.4	43.6	57.3	43.7	54.0	-10.4	-10.3
20800.0	57.1	43.6	56.9	43.6	54.0	-10.4	-10.4
20960.0	57.8	44.0	57.5	44.0	54.0	-10.0	-10.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 6 U-NII-1 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 10 U-NII-1 (802.11n)							
5150.0	64.0	49.9	67.9	50.5	54.0	-4.1	-3.5
5350.0	64.1	50.4	64.3	50.4	54.0	-3.6	-3.6
15540.0	63.8	50.0	63.5	49.9	54.0	-4.0	-4.1
15600.0	63.7	50.0	63.1	50.1	54.0	-4.0	-3.9
15720.0	62.8	49.2	62.3	49.2	54.0	-4.8	-4.8
20720.0	57.4	43.7	57.2	43.7	54.0	-10.3	-10.3
20800.0	57.2	43.8	57.2	43.8	54.0	-10.2	-10.2
20960.0	58.4	44.1	57.9	44.1	54.0	-9.9	-9.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 7 U-NII-1 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 11 U-NII-1 (802.11n40)							
5150.0	65.9	51.3	66.9	51.4	54.0	-2.7	-2.6
5350.0	64.1	50.4	64.1	50.4	54.0	-3.6	-3.6
15570.0	62.9	49.6	63.4	49.6	54.0	-4.4	-4.4
15690.0	62.9	49.0	62.8	49.0	54.0	-5.0	-5.0
20760.0	58.2	43.7	57.5	43.6	54.0	-10.3	-10.4
20920.0	57.9	43.9	57.6	44.0	54.0	-10.1	-10.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 U-NII-1 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 12 U-NII-1 (802.11ac80)							
5150.0	64.0	50.3	66.0	51.4	54.0	-3.7	-2.6
5350.0	64.2	50.4	64.2	50.5	54.0	-3.6	-3.5
15630.0	63.3	49.8	63.6	49.8	54.0	-4.2	-4.2
20840.0	58.0	43.9	57.9	43.9	54.0	-10.1	-10.1

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 U-NII-3 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 13 U-NII-3 (802.11a)							
11490.0	60.2	46.7	60.3	46.9	54.0	-7.3	-7.1
11570.0	60.8	47.4	61.1	47.4	54.0	-6.6	-6.6
11650.0	62.8	48.8	63.0	49.2	54.0	-5.2	-4.8
22980.0	59.2	45.1	58.6	45.0	54.0	-8.9	-9.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 U-NII-3 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 14 U-NII-3 (802.11n)							
11490.0	60.6	47.0	60.2	47.0	54.0	-7.0	-7.0
11570.0	61.5	47.8	60.6	47.3	54.0	-6.2	-6.7
11650.0	63.2	48.6	61.5	48.5	54.0	-5.4	-5.5
22980.0	59.6	45.6	59.0	45.5	54.0	-8.4	-8.5

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 U-NII-3 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 15 U-NII-3 (802.11n40)							
11510.0	60.1	46.8	59.4	46.3	54.0	-7.2	-7.7
11590.0	61.5	47.5	60.8	47.6	54.0	-6.5	-6.4
23020.0	58.9	45.3	59.2	45.3	54.0	-8.7	-8.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 U-NII-3 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 16 U-NII-3 (802.11ac80)							
11550.0	60.9	46.8	60.1	46.5	54.0	-7.2	-7.5
23100.0	60.0	45.3	59.0	45.3	54.0	-8.7	-8.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands


The EUT demonstrated compliance with the emissions requirements of 47 CFR 15.205, RSS-GEN Issue 5, and RSS-247 Issue 3. The EUT provided a worst-case minimum margin of -2.6 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted EMI Procedure

The EUT was arranged in typical equipment configurations as offered by manufacturer and presented above in equipment configuration. AC Line Conducted emission testing was performed with the EUT placed on a 1 x 1.5-meter bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the AC line-conducted emissions followed the procedures of ANSI C63.10-2013. The EUT was configured as presented in the AC Line conducted configurations as directed by the manufacture and presented above in equipment configuration. The AC adapter for the EUT was connected to the LISN for AC line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the test configuration. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz and data recorded.


Refer to figures one and two for plots of configuration #2, EUT – AC Power Adapter Line conducted emissions. Refer to figures three and four for plots of configuration #3, EUT – USB Computer interface AC Line conducted emissions.

Figure 1 AC Line Conducted Emissions Data L1 (#4, EUT – Computer)

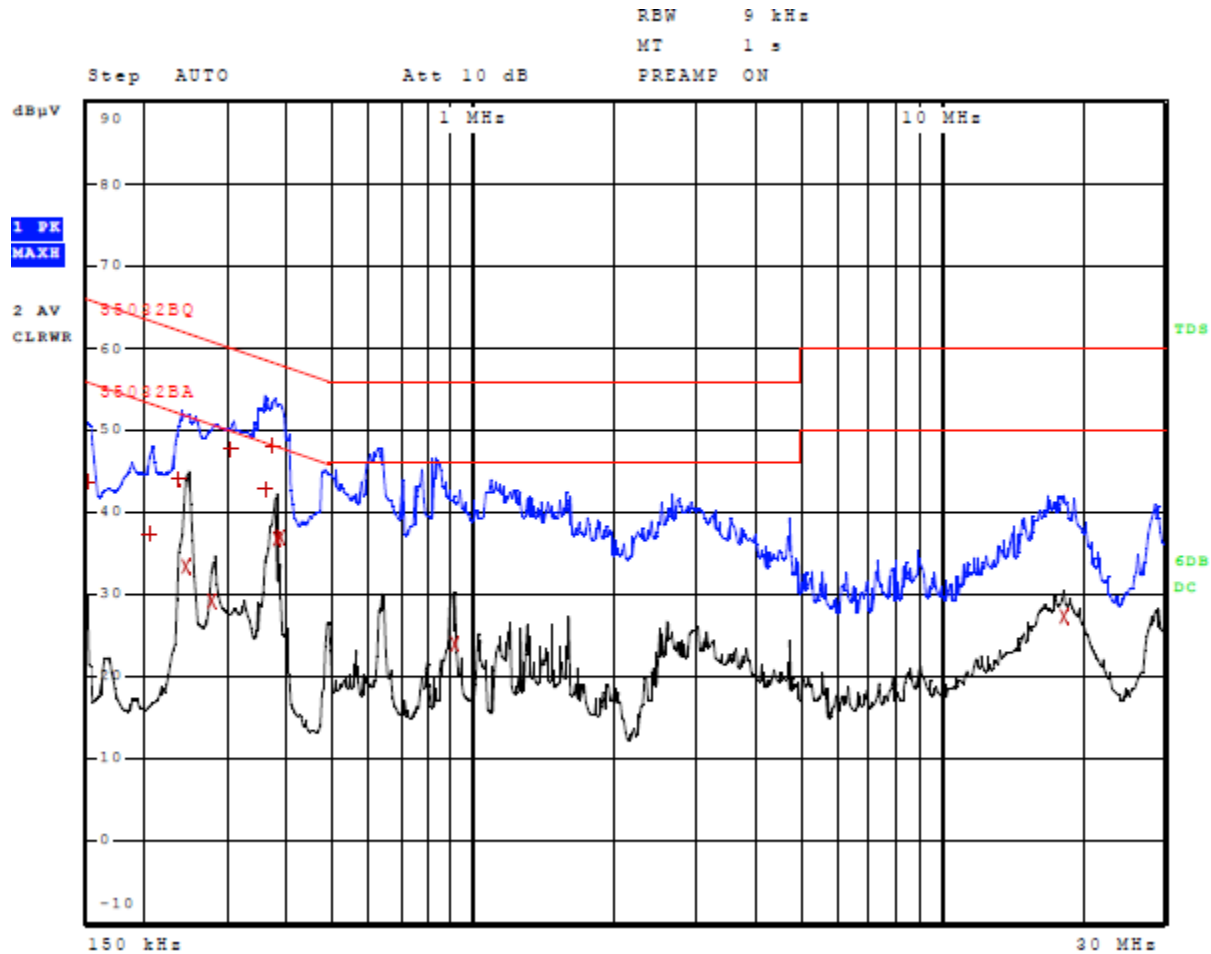

Other emissions present had amplitudes at least 20 dB below the limit.

Figure 2 AC Line Conducted Emissions Data L2 (#4, EUT – Computer)

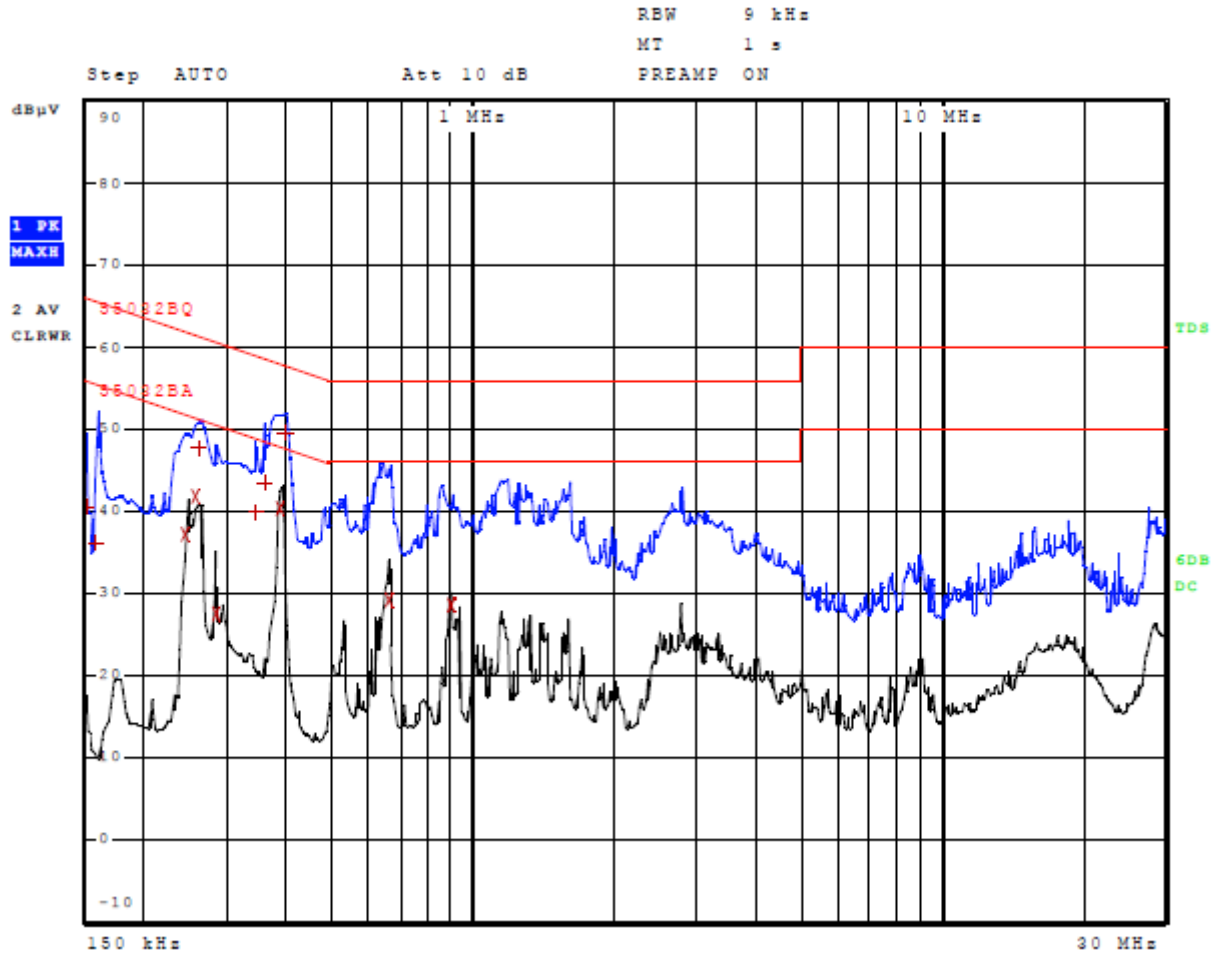

Other emissions present had amplitudes at least 20 dB below the limit.

Table 9 AC Line Conducted Emissions Data L1 (#4, EUT – Computer)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	43.61	Quasi Peak	-22.39
1	206.000000000 kHz	37.31	Quasi Peak	-26.05
1	238.000000000 kHz	44.09	Quasi Peak	-18.08
2	246.000000000 kHz	33.42	Average	-18.47
2	278.000000000 kHz	29.10	Average	-21.77
1	306.000000000 kHz	47.76	Quasi Peak	-12.31
1	358.000000000 kHz	42.82	Quasi Peak	-15.96
1	374.000000000 kHz	48.12	Quasi Peak	-10.29
2	378.000000000 kHz	36.73	Average	-11.59
2	386.000000000 kHz	37.03	Average	-11.12
2	910.000000000 kHz	23.86	Average	-22.14
2	18.399900000 MHz	27.28	Average	-22.72

Other emissions present had amplitudes at least 20 dB below the limit.

Table 10 AC Line Conducted Emissions Data L2 (#4, EUT – Computer)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	40.62	Quasi Peak	-25.38
1	158.000000000 kHz	36.17	Quasi Peak	-29.39
2	246.000000000 kHz	37.07	Average	-14.82
2	258.000000000 kHz	41.85	Average	-9.65
1	262.000000000 kHz	47.74	Quasi Peak	-13.63
2	282.000000000 kHz	27.58	Average	-23.18
1	342.000000000 kHz	39.81	Quasi Peak	-19.34
1	358.000000000 kHz	43.41	Quasi Peak	-15.36
2	390.000000000 kHz	40.31	Average	-7.75
1	394.000000000 kHz	49.50	Quasi Peak	-8.48
2	658.000000000 kHz	29.27	Average	-16.73
2	898.000000000 kHz	28.51	Average	-17.49

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47CFR Part 15C and other applicable emissions requirements. The EUT configuration #4 demonstrated a minimum margin of -7.75 dB below the requirement. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available mode during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS or SAC location before final radiated measurements were performed. Final data was taken with the EUT located on the OATS or SAC at 3 meters distance between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

Table 11 General Radiated Emissions Data

Frequency (MHz)	Horizontal Peak (dB μ V/m)	Horizontal Quasi-Peak (dB μ V/m)	Vertical Peak (dB μ V/m)	Vertical Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Horizontal Margin (dB)	Vertical Margin (dB)
167.0	20.2	14.4	21.0	15.8	40.0	-25.6	-24.2
160.5	32.4	16.3	21.3	14.9	40.0	-23.7	-25.1
82.6	26.5	16.2	26.5	20.7	40.0	-23.8	-19.3
84.4	23.0	17.2	26.6	21.3	40.0	-29.8	-25.7
217.1	19.7	13.6	19.5	13.5	40.0	-33.4	-33.5
192.0	20.9	15.1	21.1	15.4	47.0	-31.9	-31.6
167.0	20.2	14.4	21.0	15.8	40.0	-25.6	-24.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR part 15 and Industry Canada RSS-247 Issue 3 Intentional Radiators. The EUT demonstrated a minimum margin of -19.3 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands

Testing followed FCC 789033 D02 General U-NII Test Procedures New Rules v02r01.

The manufacturer provided a second test sample which provided direct connection to the antenna port. A power meter was used to measure fundamental transmitter output power. A spectrum analyzer / receiver was used to produce plots and make other antenna port conducted measurements for compliance testing. Test software was provided to operate the transmitter. This software provided the ability to set test channel, operational mode, and modulation scheme. The antenna port was connected to coaxial cable with 50-ohm attenuator and receiver, spectrum analyzer, or power meter during testing. The design was also tested for radiated emissions using sample EUT Tx Radiated #2 representative of production equipment. Radiated emissions testing was performed on the Open Area Test Site (OATS) or Semi Anechoic Chamber (SAC) with the transmitter operating. The test sample was placed on a turntable elevated as required above the ground plane as required at a 3 meters distance from the FSM antenna located on the OATS or SAC for testing radiated emissions. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference and demonstration of compliance. In addition, all Manufacturers of U-NII devices are responsible for ensuring frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The manufacturer has attested the equipment operates within the required frequency spectrum under normal operational conditions. This report documents emissions governed under the U-NII-1 and U-NII-3 bands operating in the 5180-5240 and 5745-5825 MHz frequency bands.

47CFR 15.407 General Technical Requirements

(a) power limitations

(1) For the Band 5.15-5.25 GHz

- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1-megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

- (11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

- (12) Power spectral density measurement. The maximum power spectral density is measured as either a conducted emission by direct connection of a calibrated test instrument to the equipment under test or a radiated measurement. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (7) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (9) The provisions of §15.205 apply to intentional radiators operating under this section.
- (10) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information, or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.
- (e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
- (f) Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement

confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.

- (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

RSS-247 Issue 3

6. Technical requirements for license-exempt local area network devices and digital transmission systems operating in the 5 GHz band

This section provides standards for License-Exempt Local Area Network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz, and 5725-5850 MHz and for DTS's operating in the band 5725-5850 MHz that employ digital modulation technology but are not designed for LE-LAN operation.

Devices with occupied bandwidths which overlap different bands shall comply with all operational requirements for each band.

6.2.1 Frequency band 5150-5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150-5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles-by-vehicles manufacturers, are permitted.

Figure 3 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)

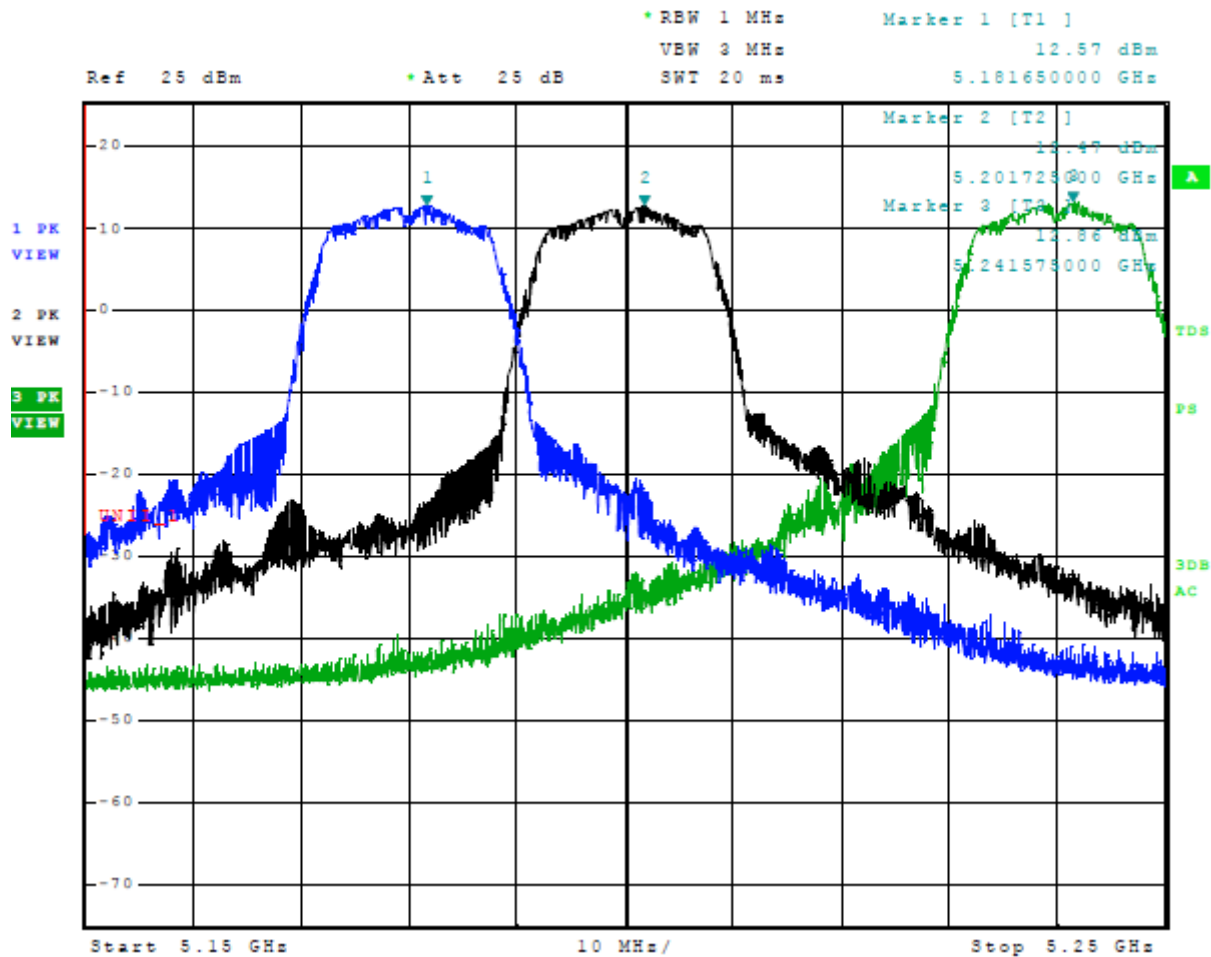


Figure 4 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)

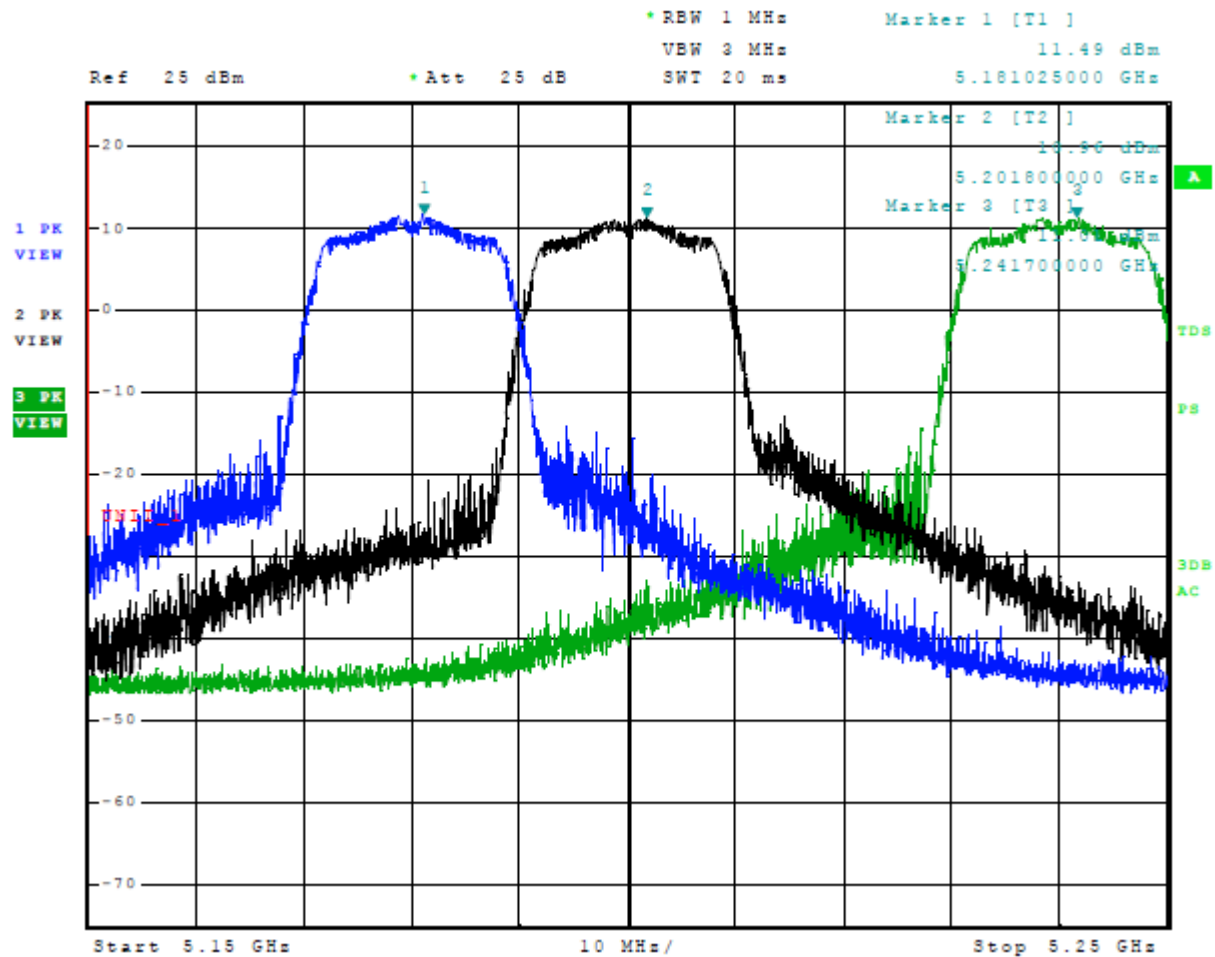


Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)

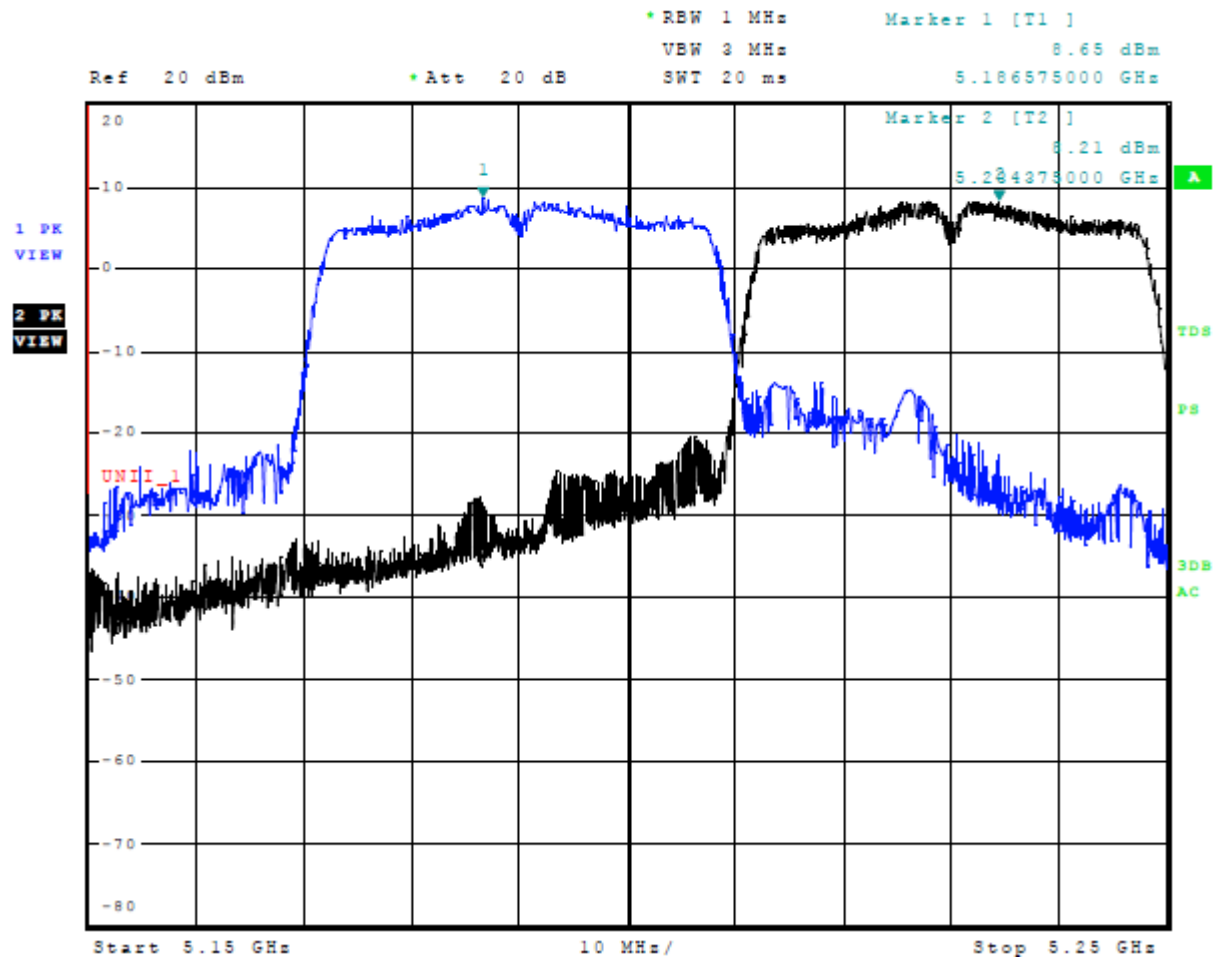


Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)

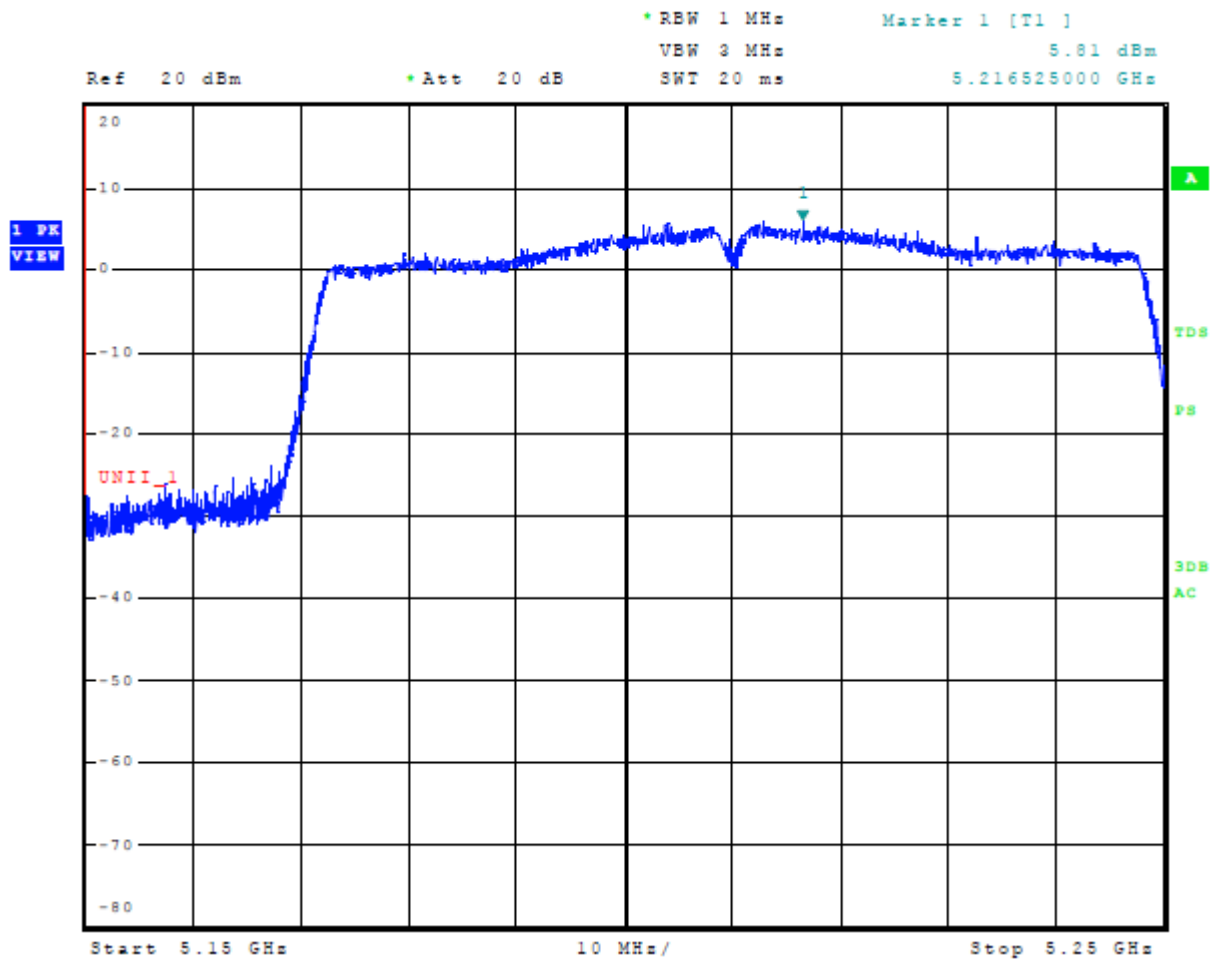


Figure 7 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

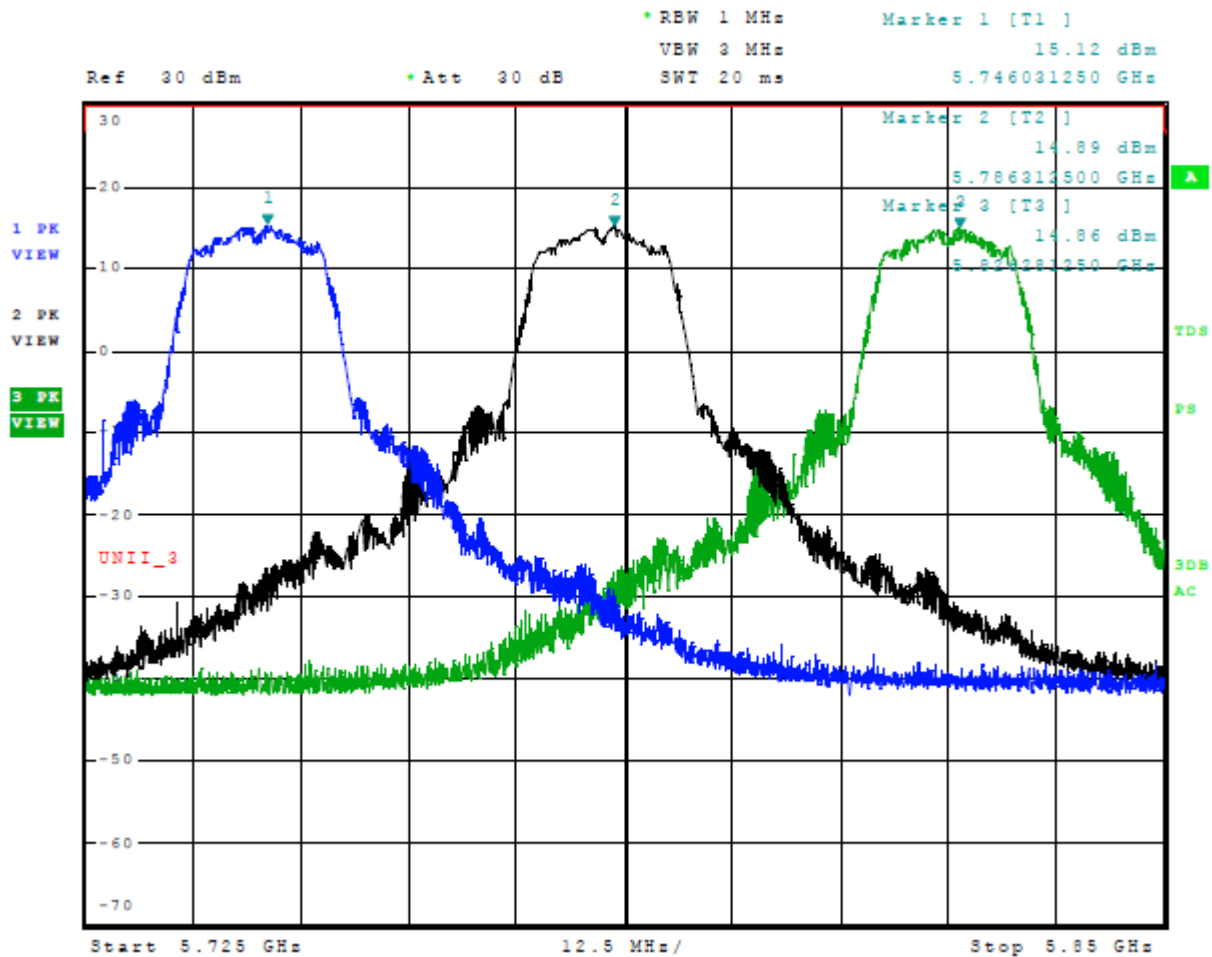


Figure 8 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

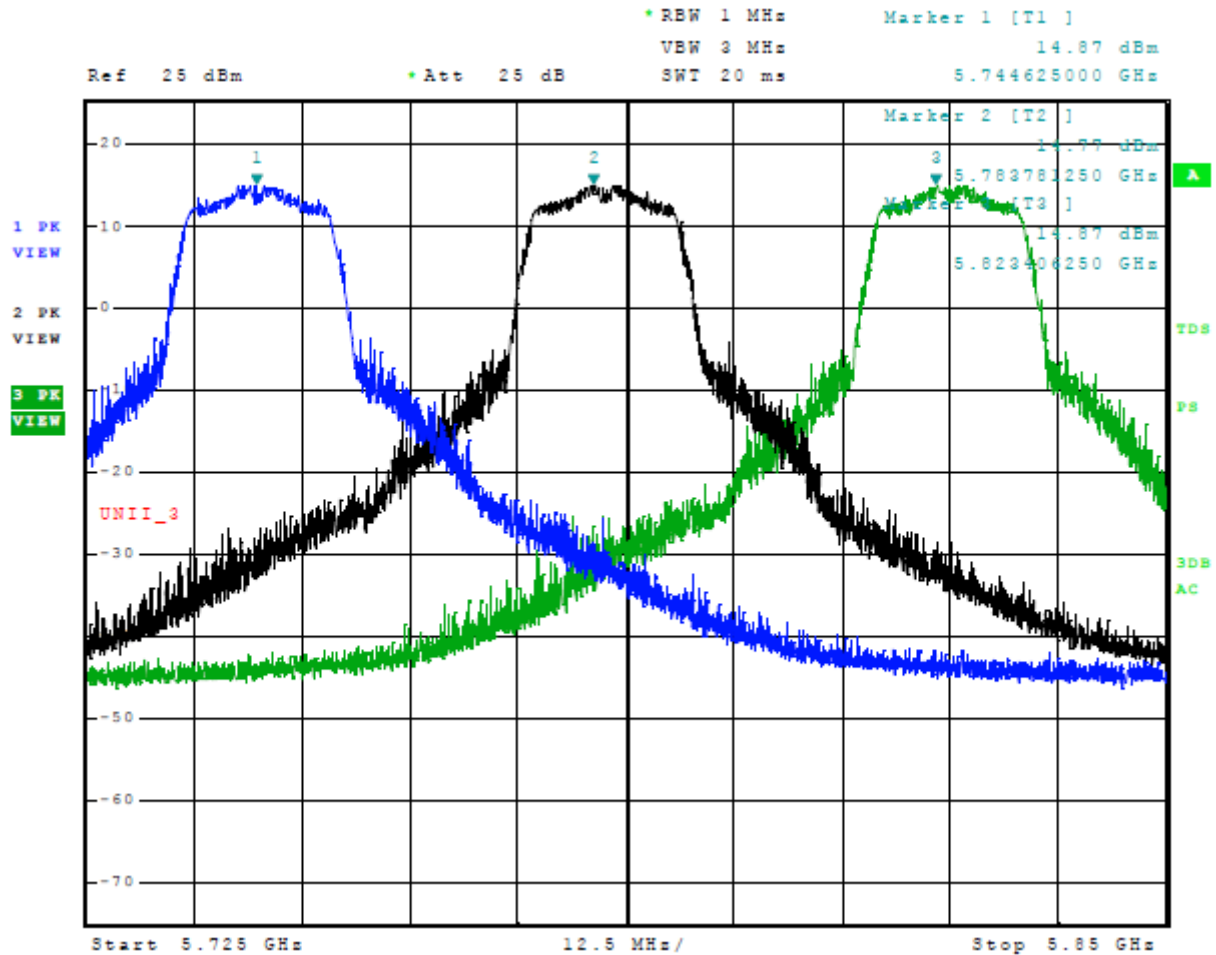


Figure 9 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)

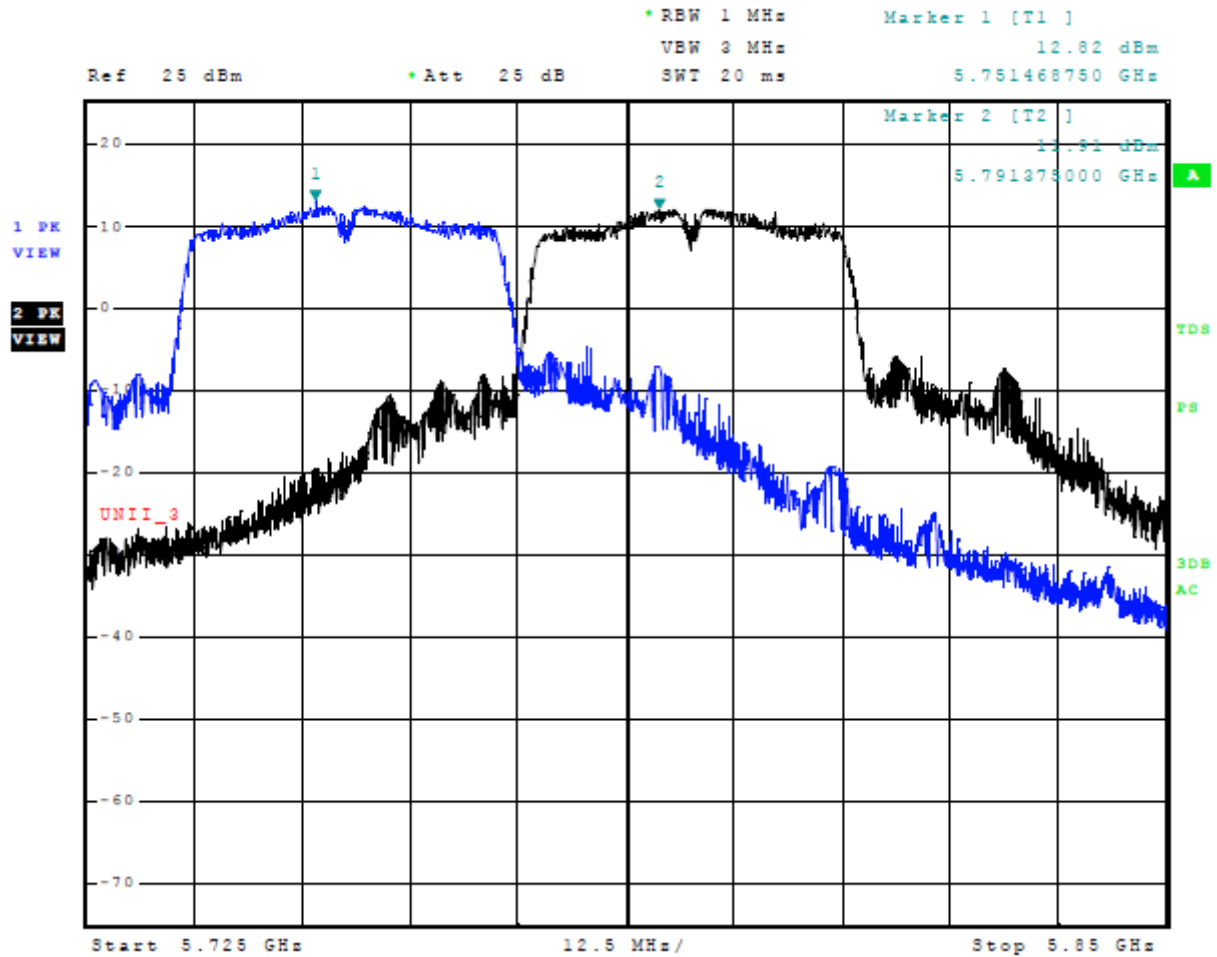


Figure 10 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

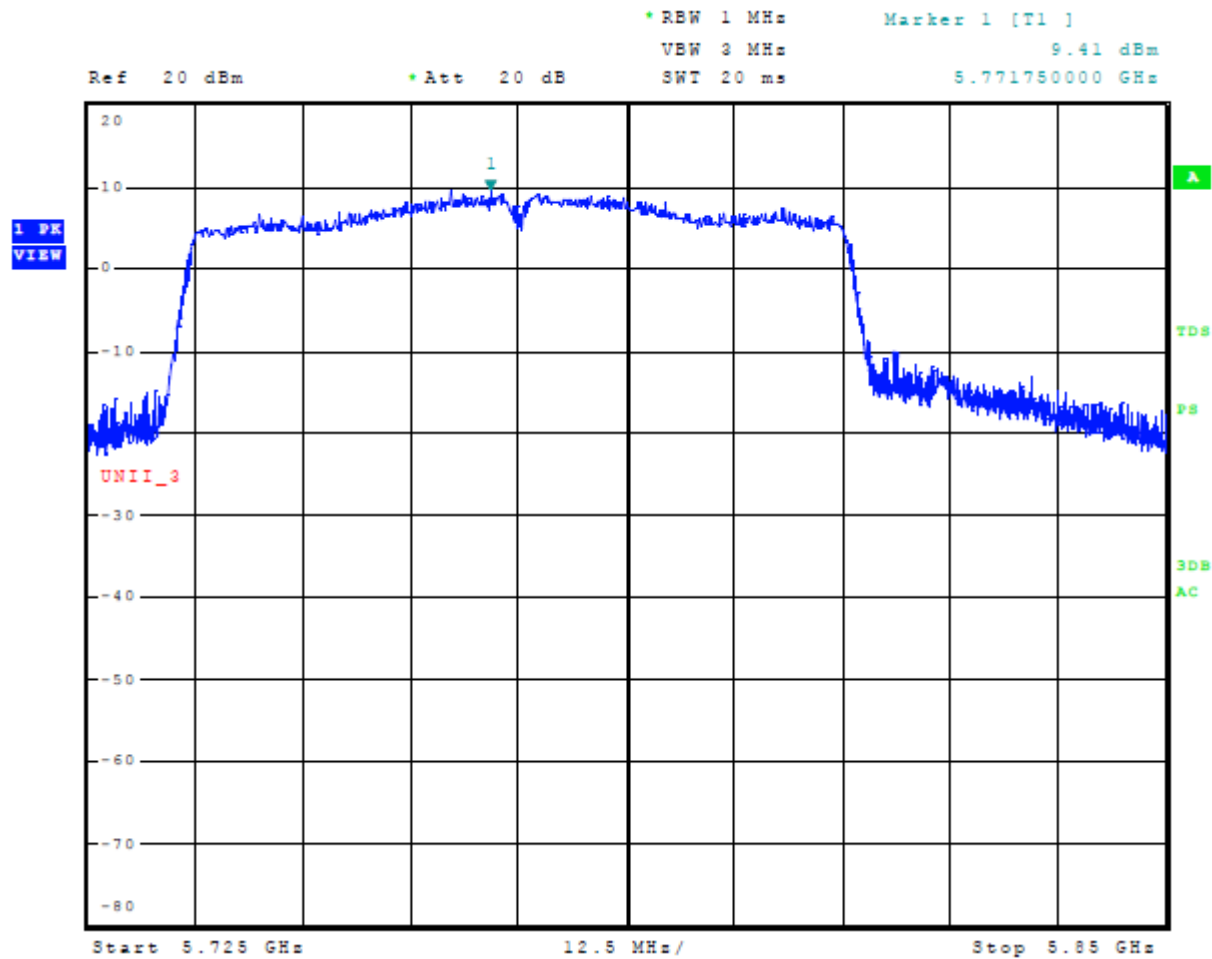


Figure 11 Plot of Lower Band Edge Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)

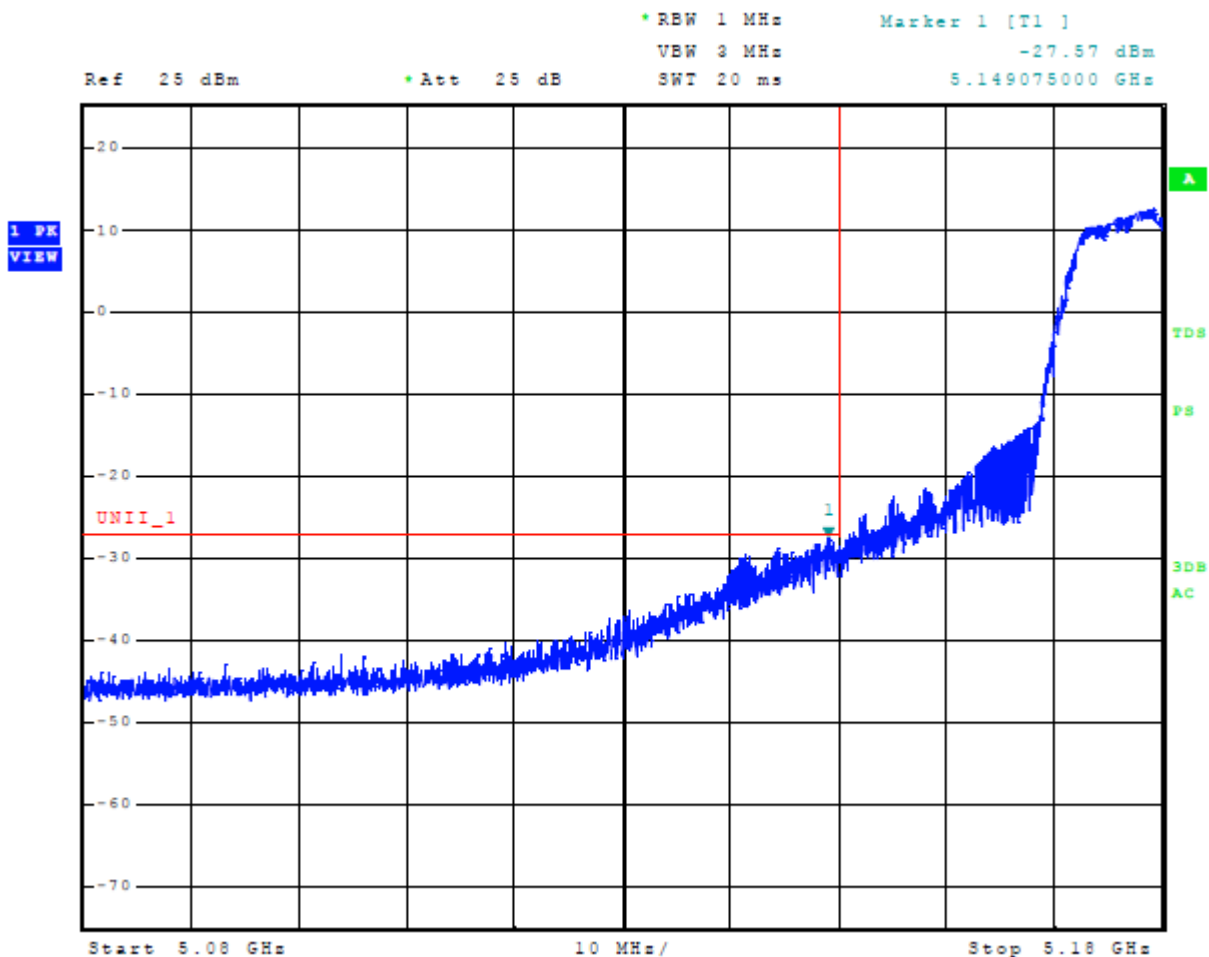


Figure 12 Plot of Lower Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)

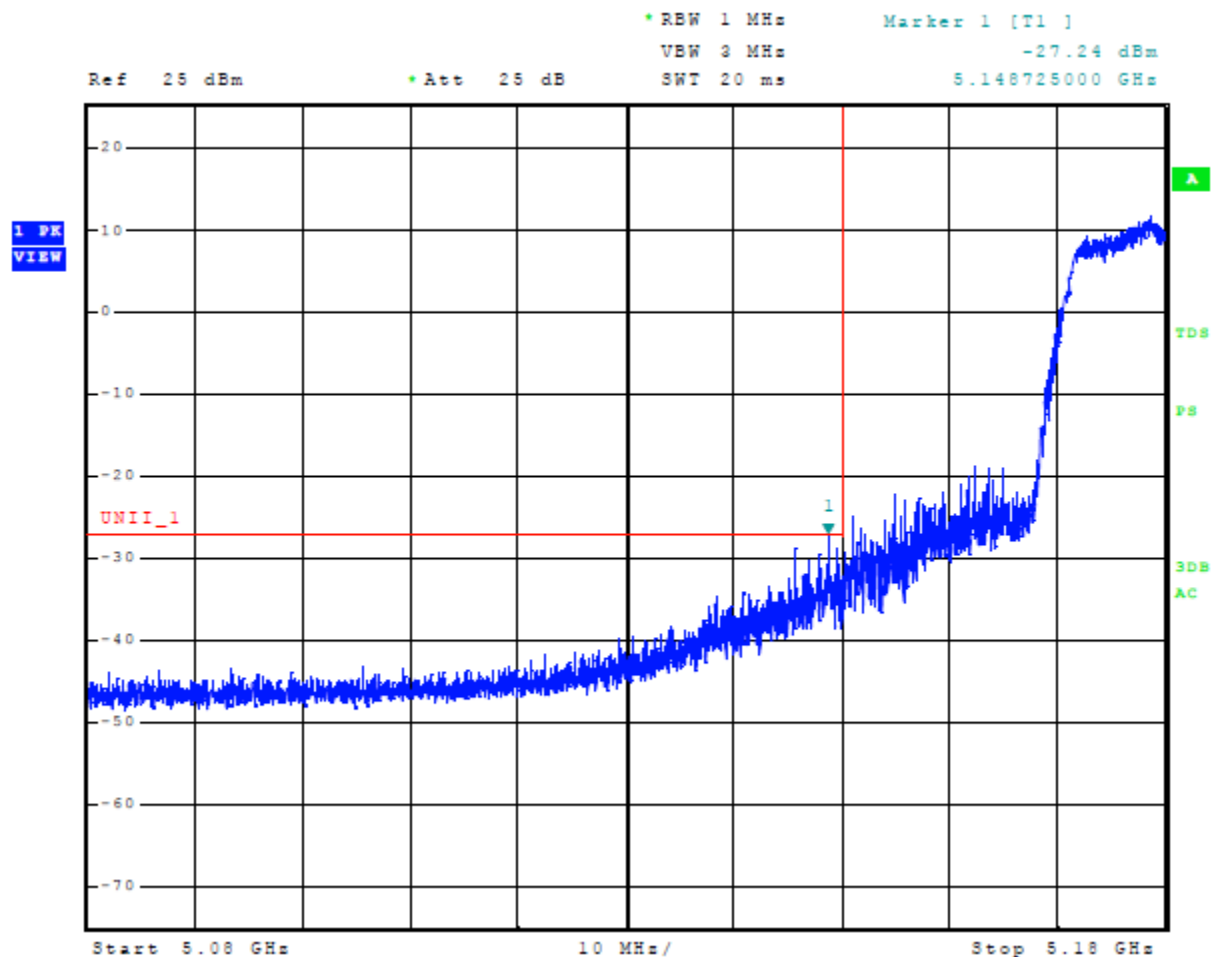


Figure 13 Plot of Lower Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)

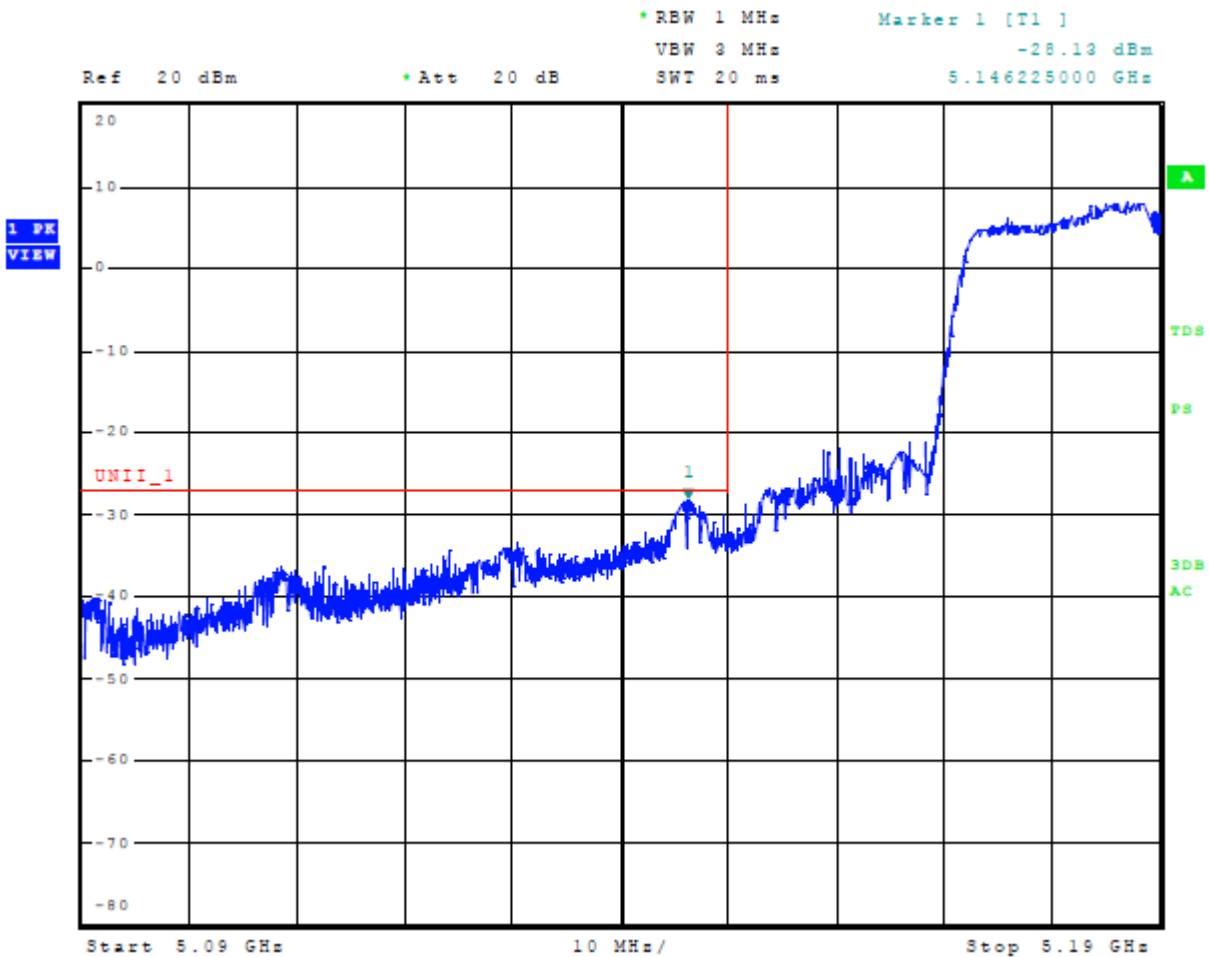


Figure 14 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)

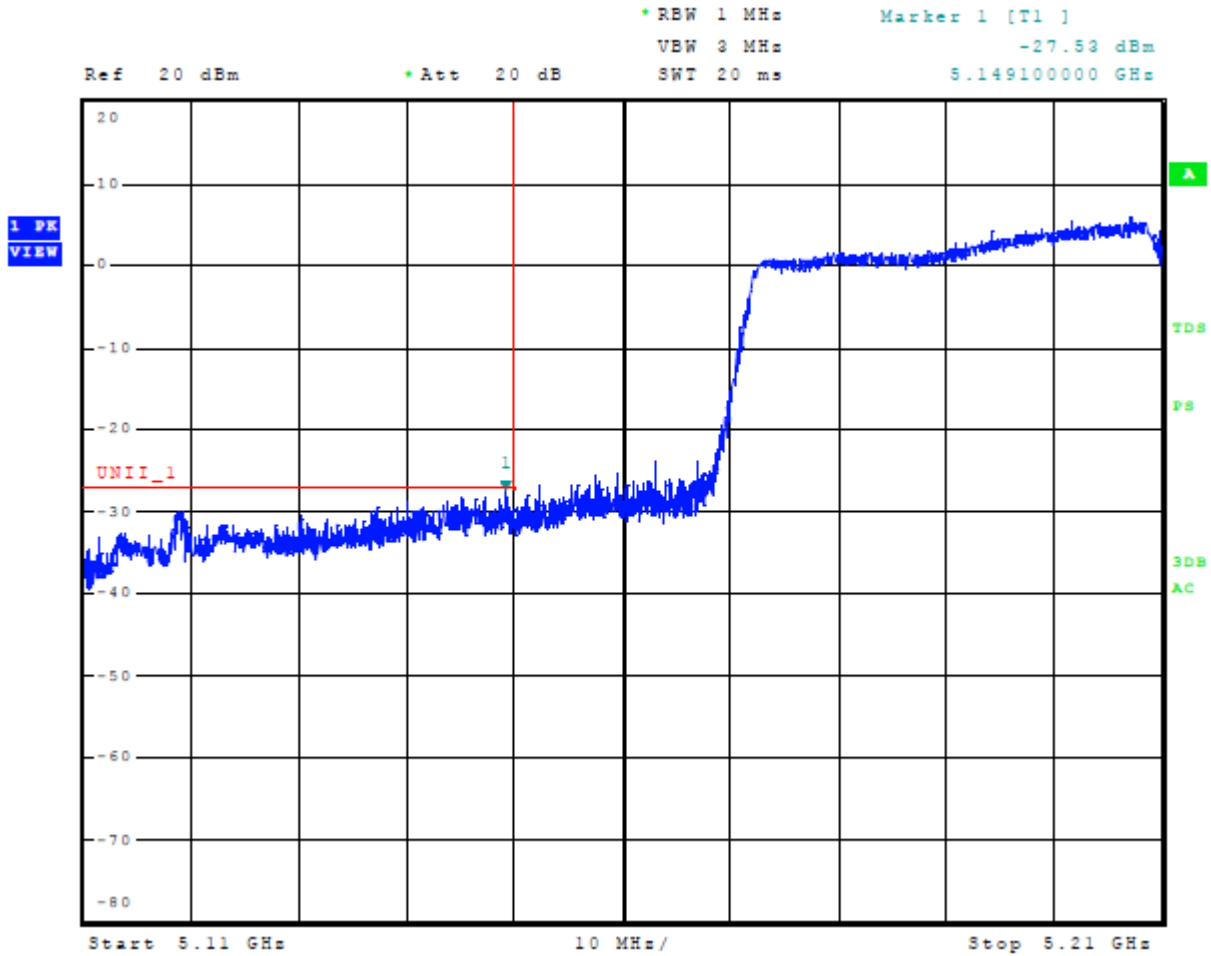


Figure 15 Plot of Lower Band Edge Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

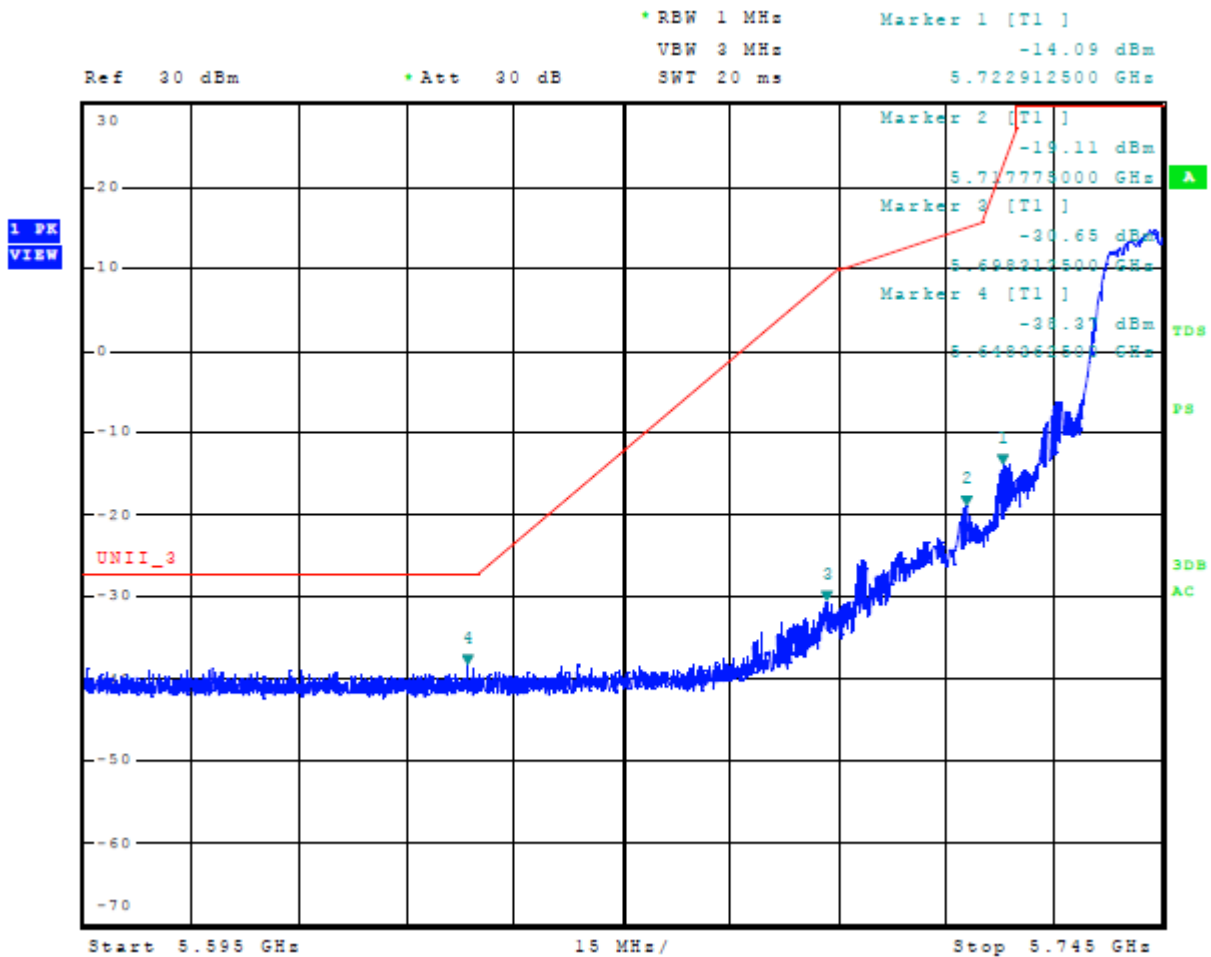


Figure 16 Plot of Lower Band Edge Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

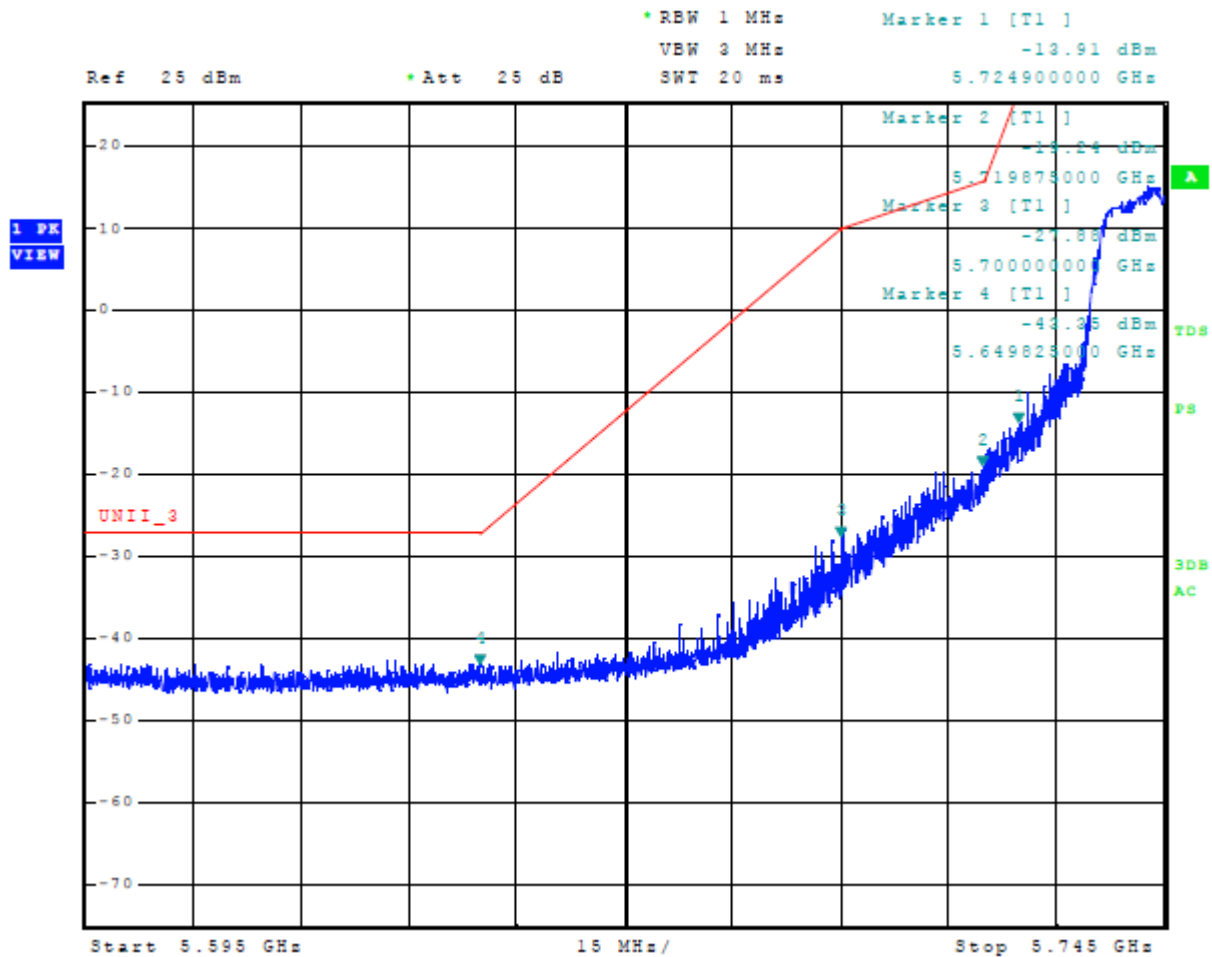


Figure 17 Plot of Lower Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)

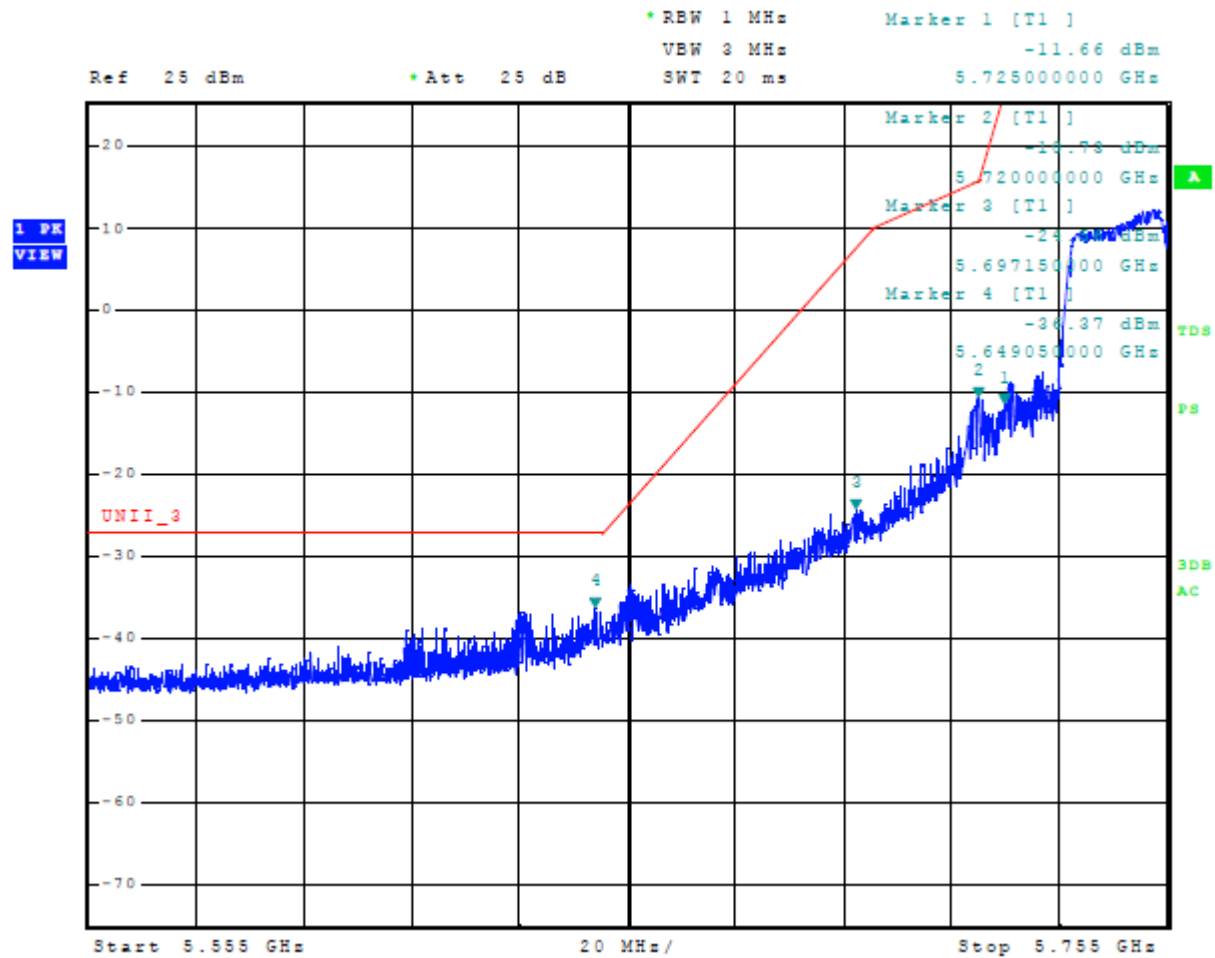


Figure 18 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

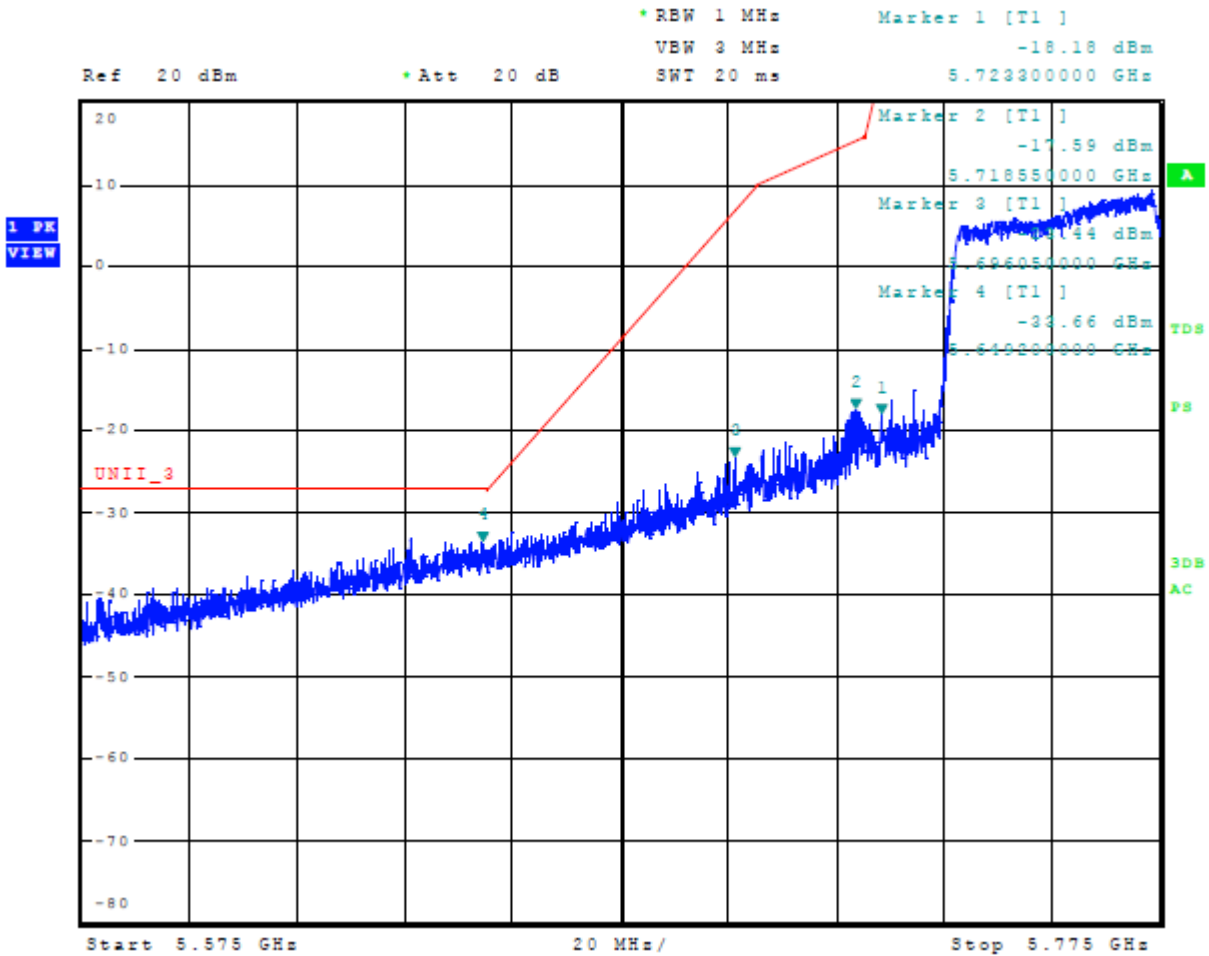


Figure 19 Plot of Upper Band Edge Across 5150-5250 MHz Mode 5 U-NII-1 (802.11a)

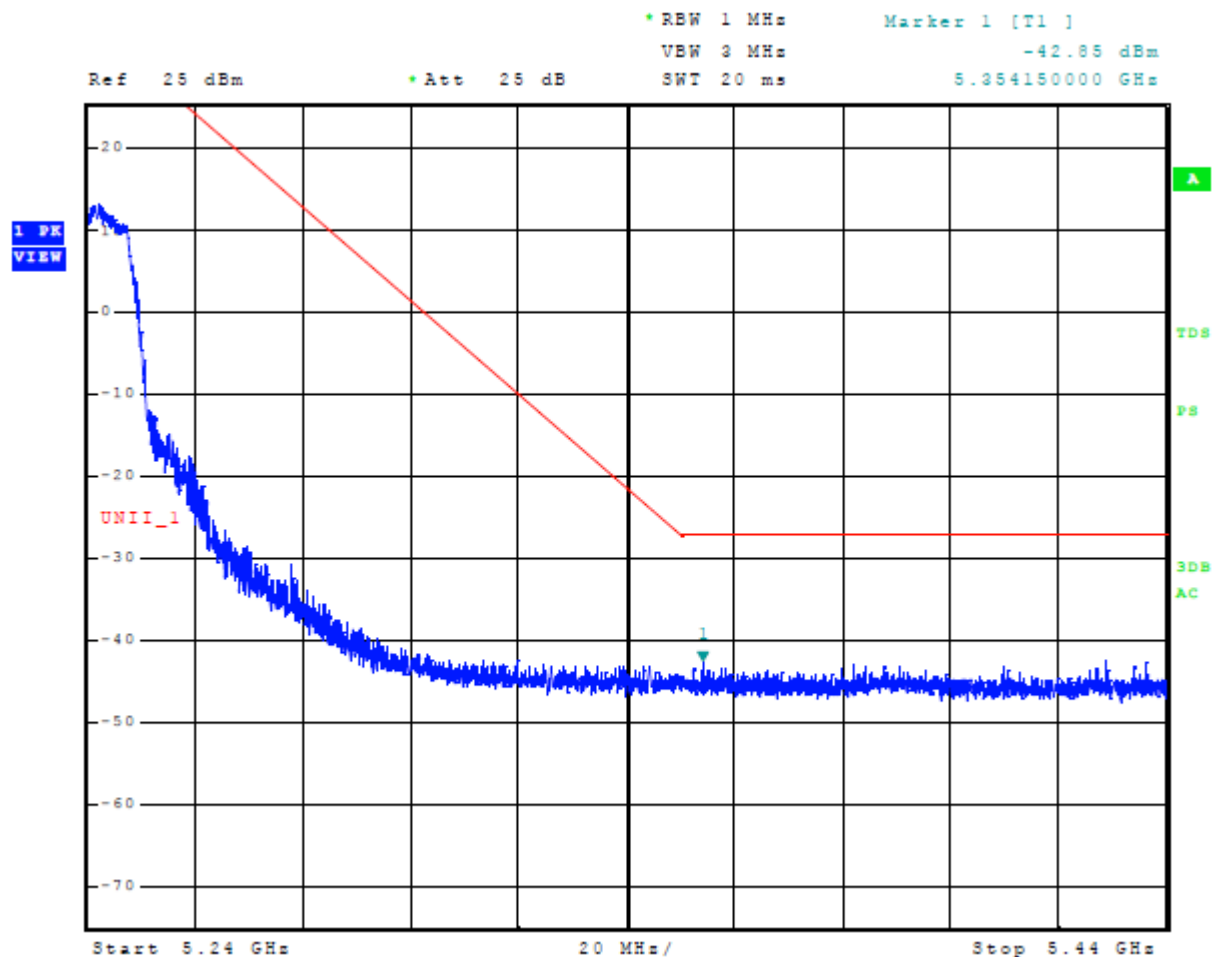


Figure 20 Plot of Upper Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11n)

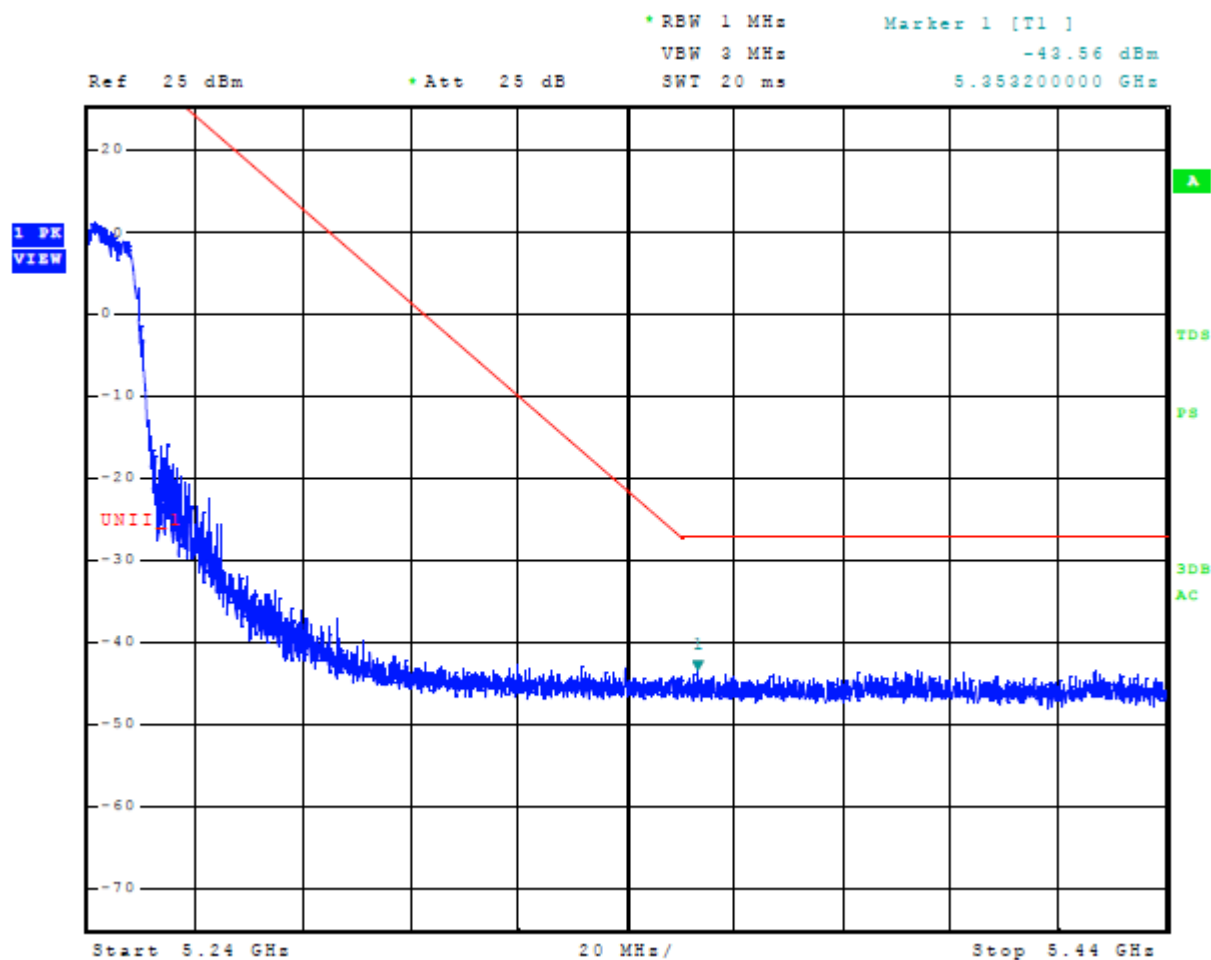


Figure 21 Plot of Upper Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)

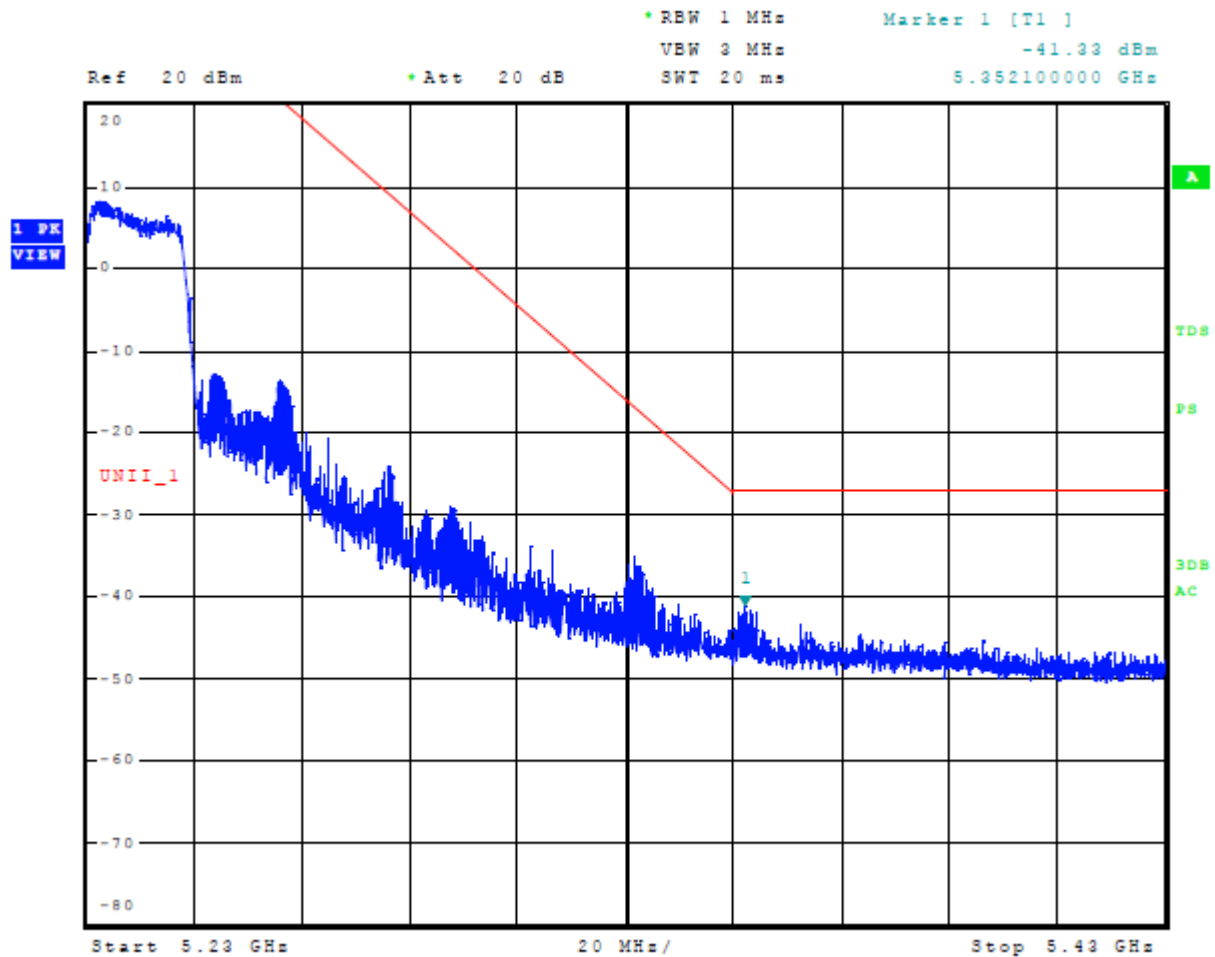


Figure 22 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)

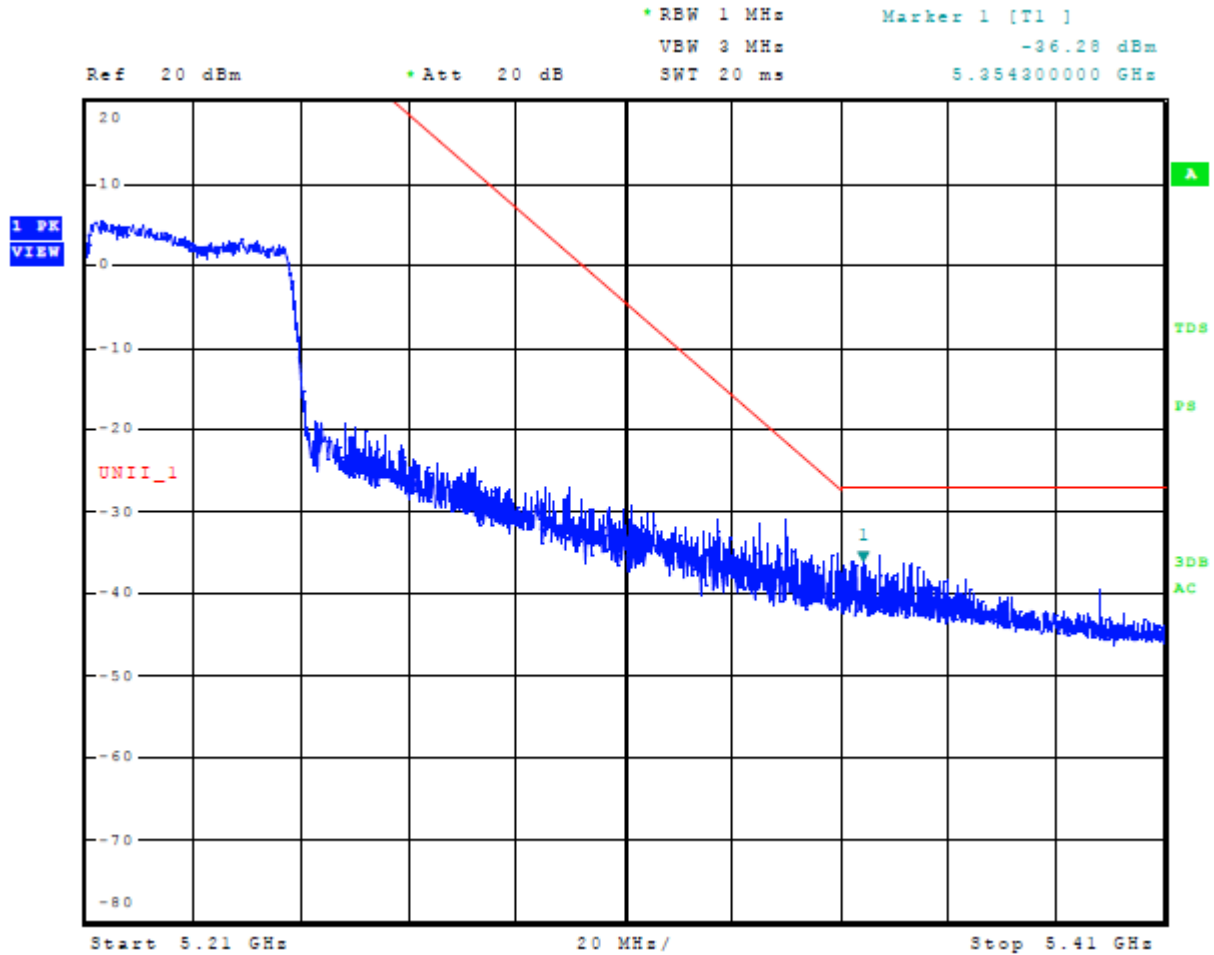


Figure 23 Plot of Upper Band Edge Across 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

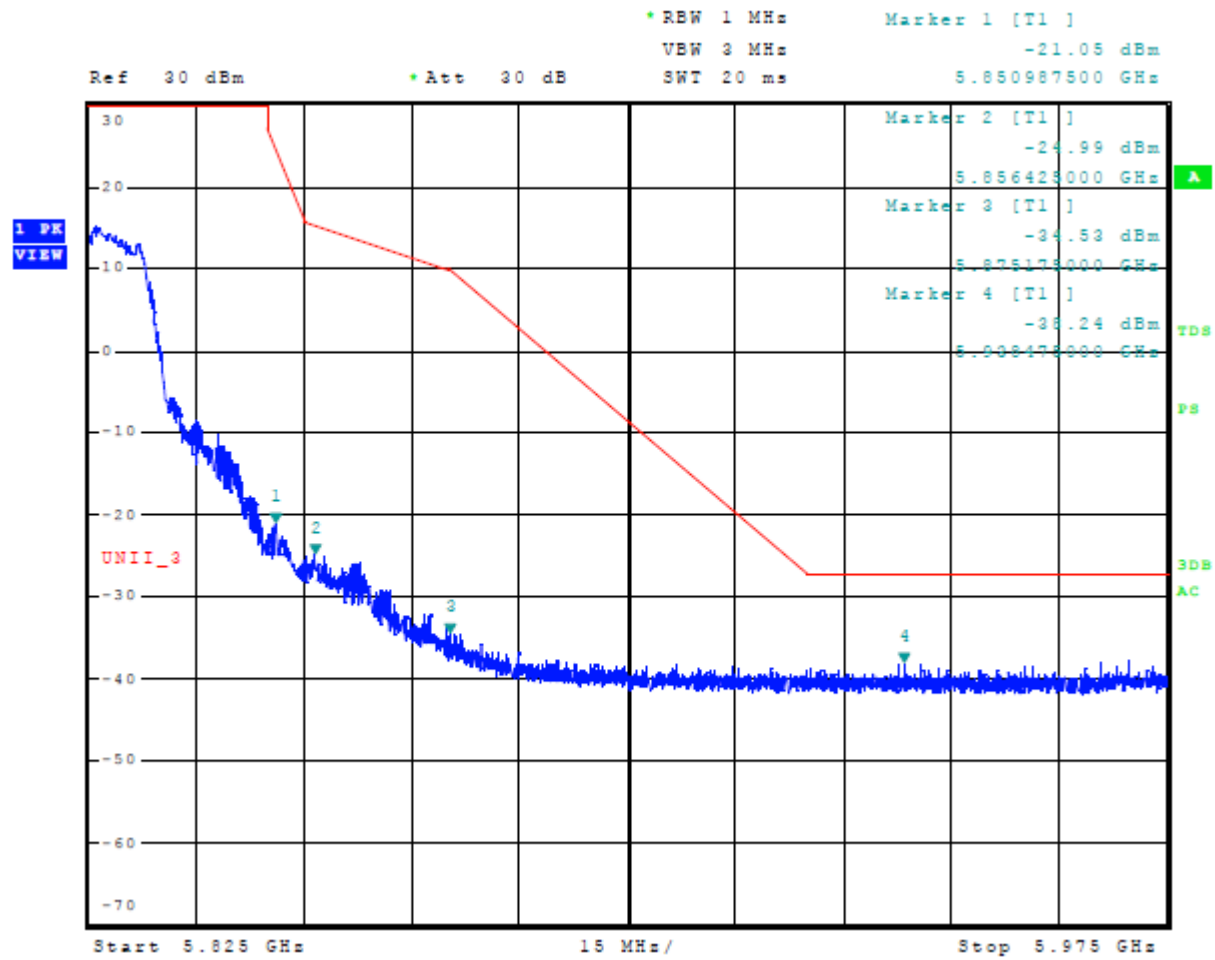


Figure 24 Plot of Upper Band Edge Across 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

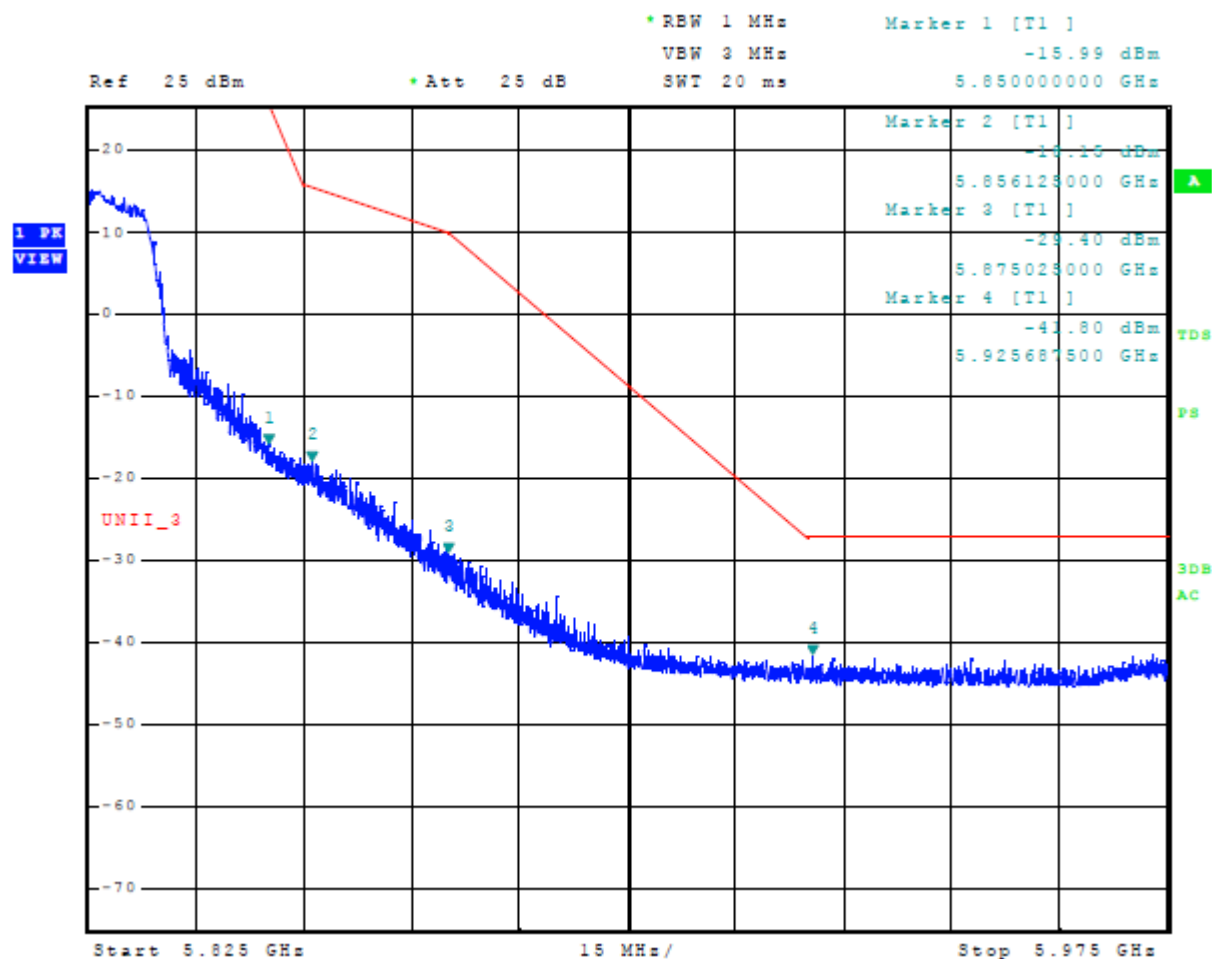


Figure 25 Plot of Upper Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)

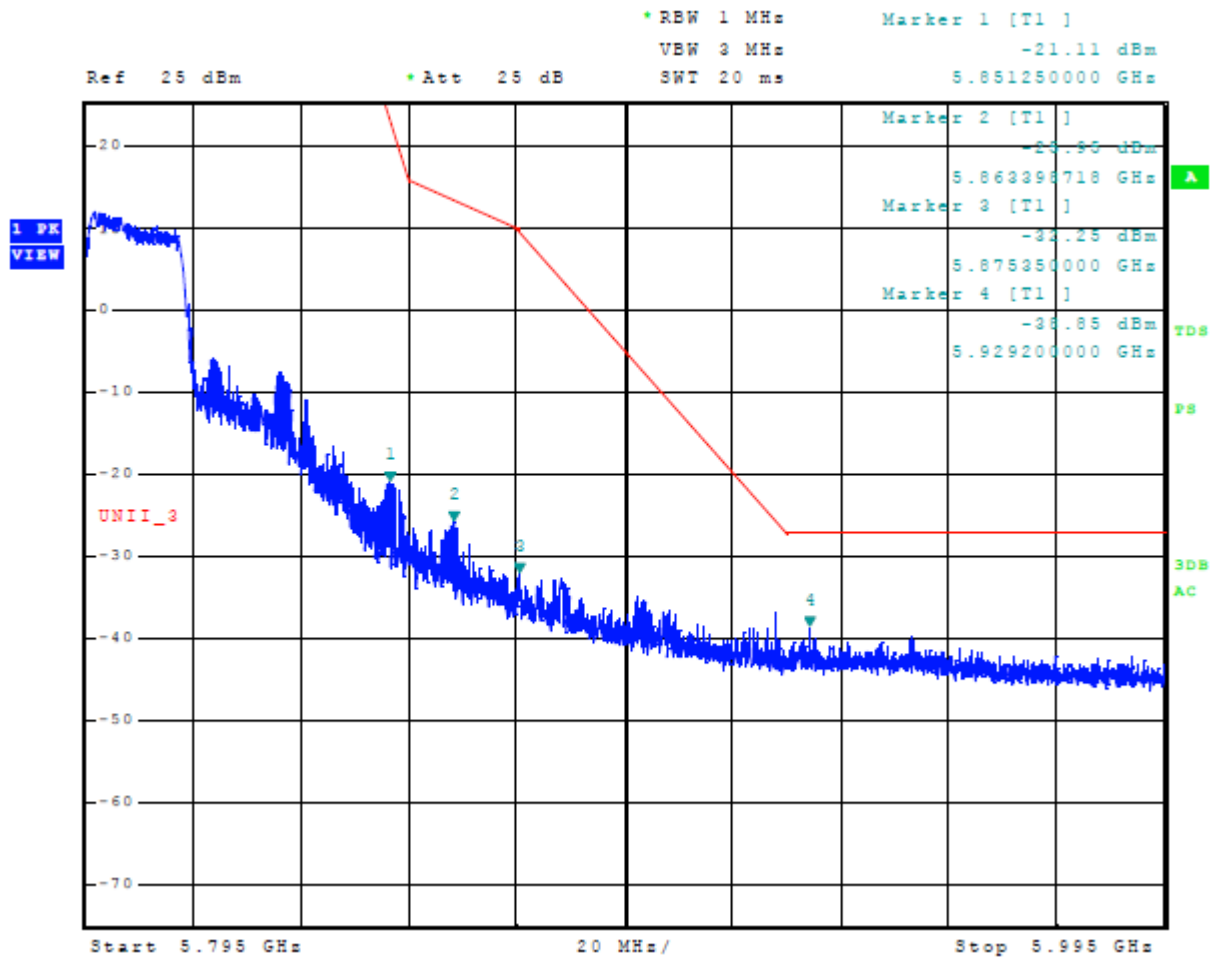


Figure 26 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

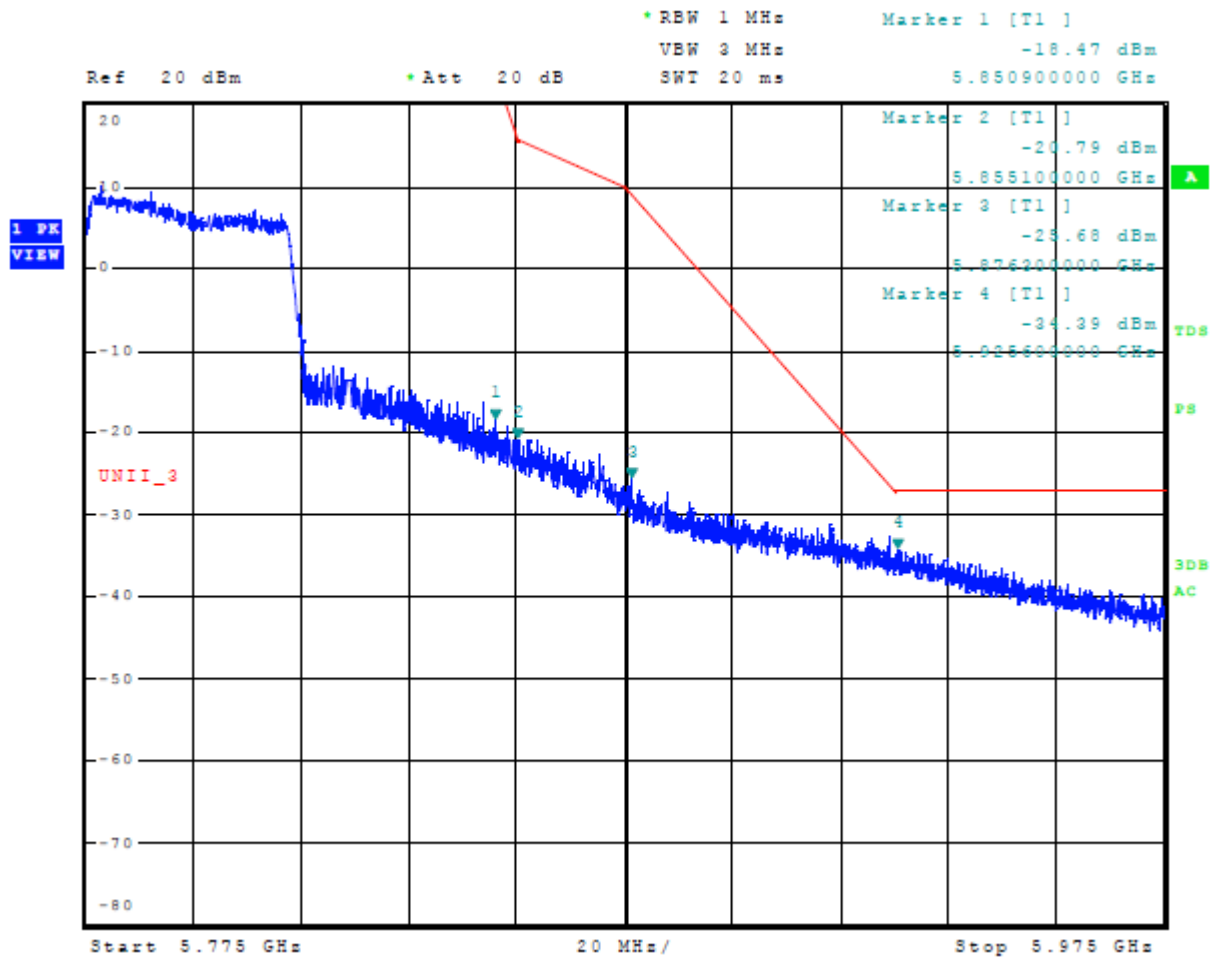


Figure 27 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 5 U-NII-1 (802.11a)

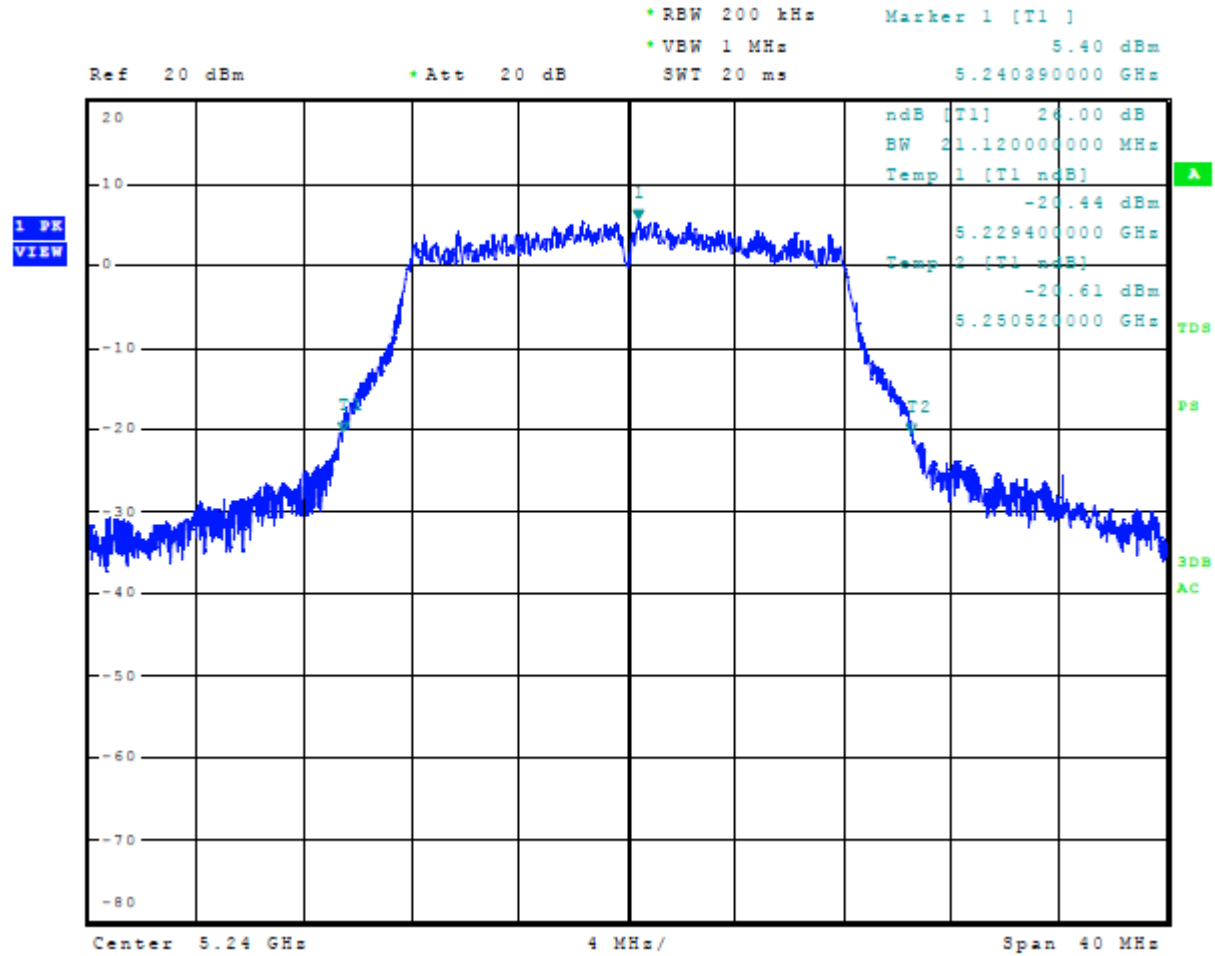


Figure 28 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11n)

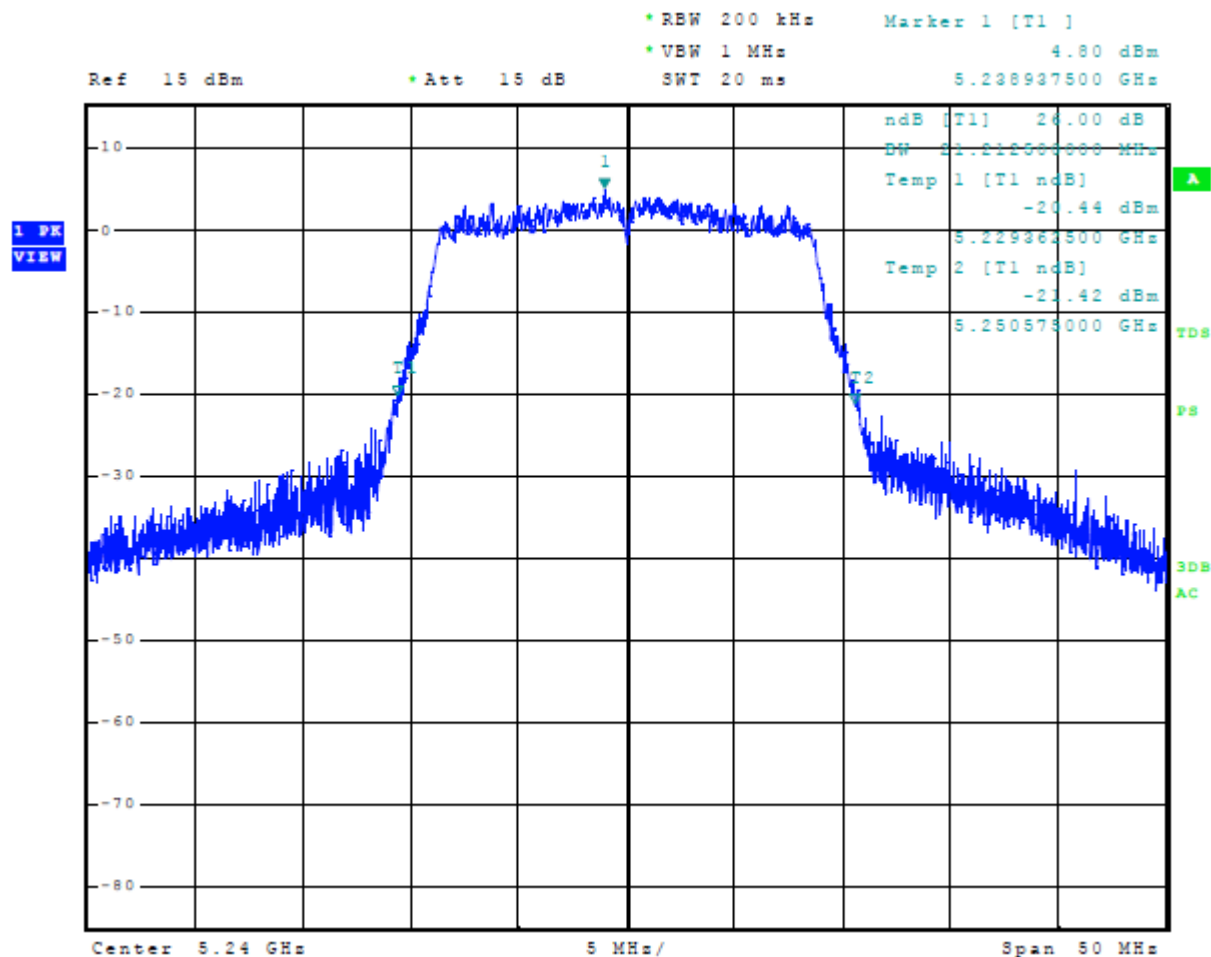


Figure 29 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)

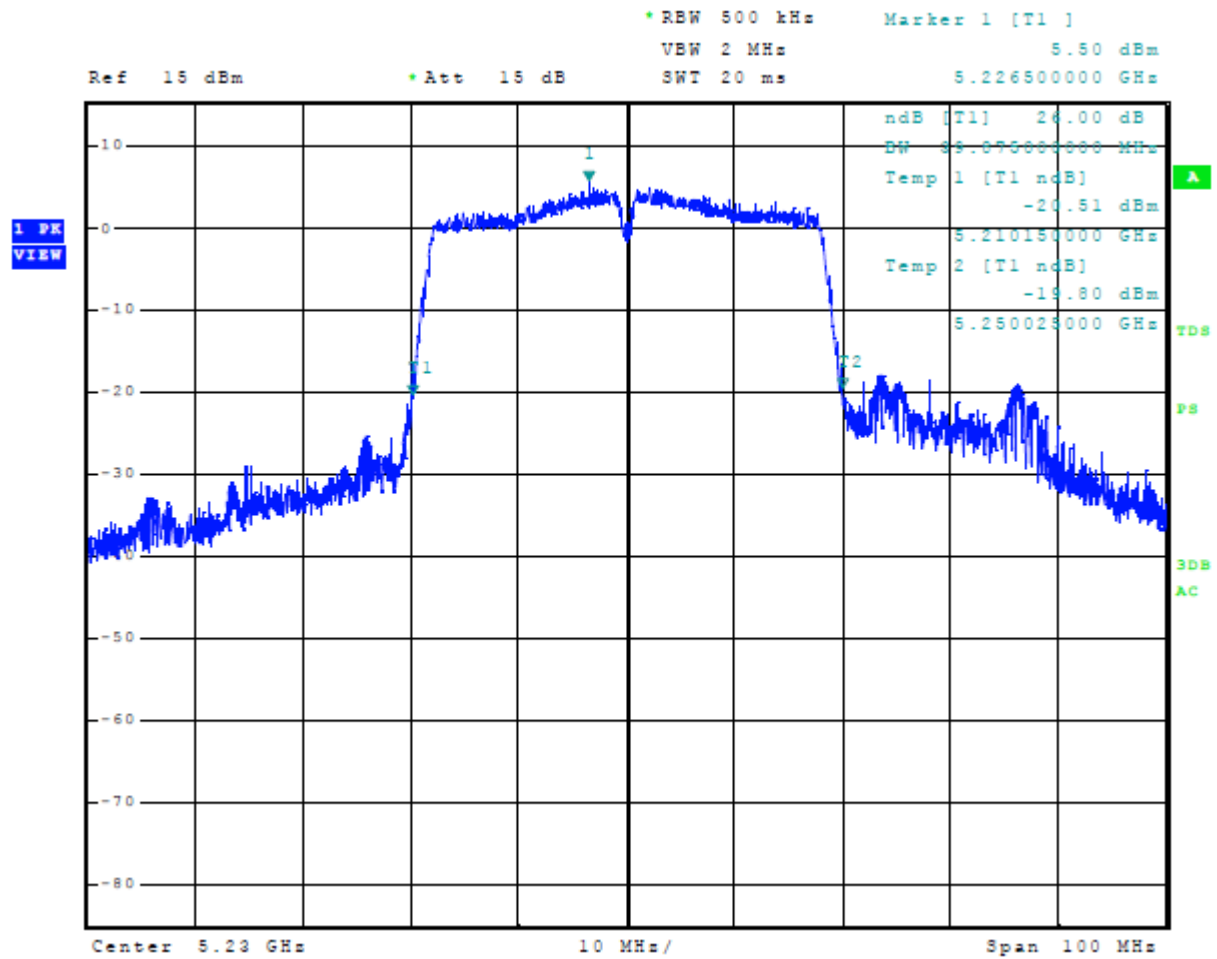


Figure 30 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)

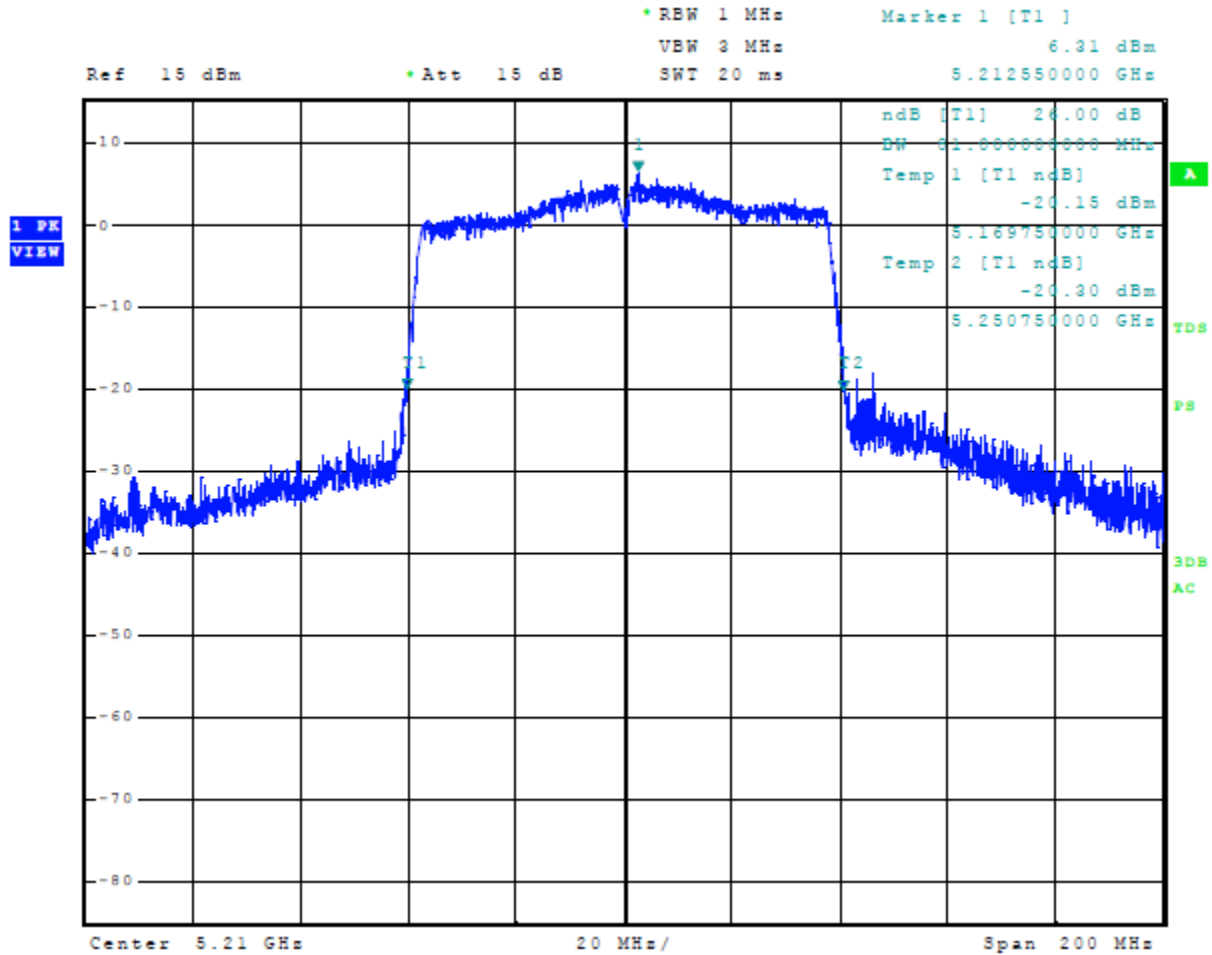


Figure 31 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

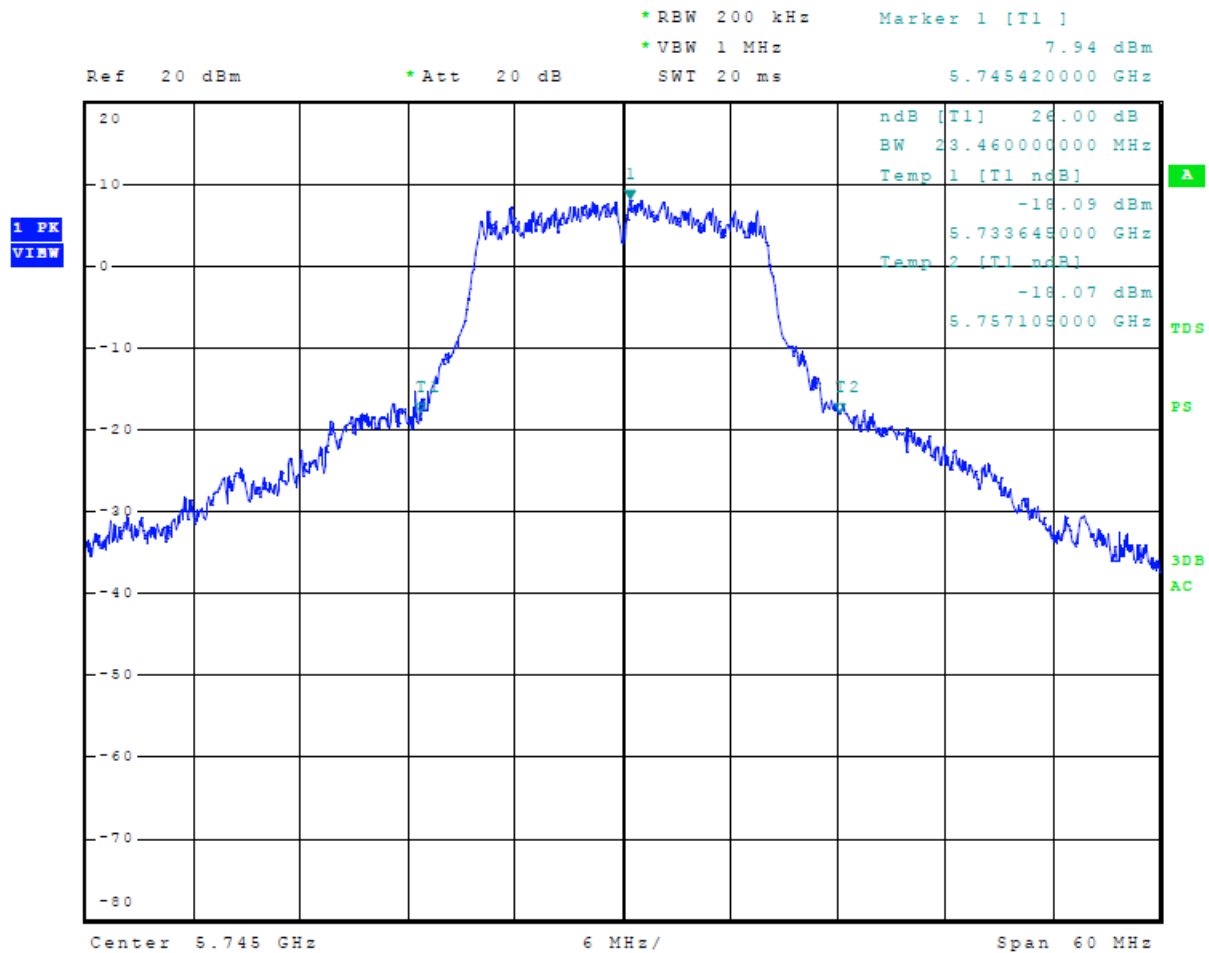


Figure 32 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

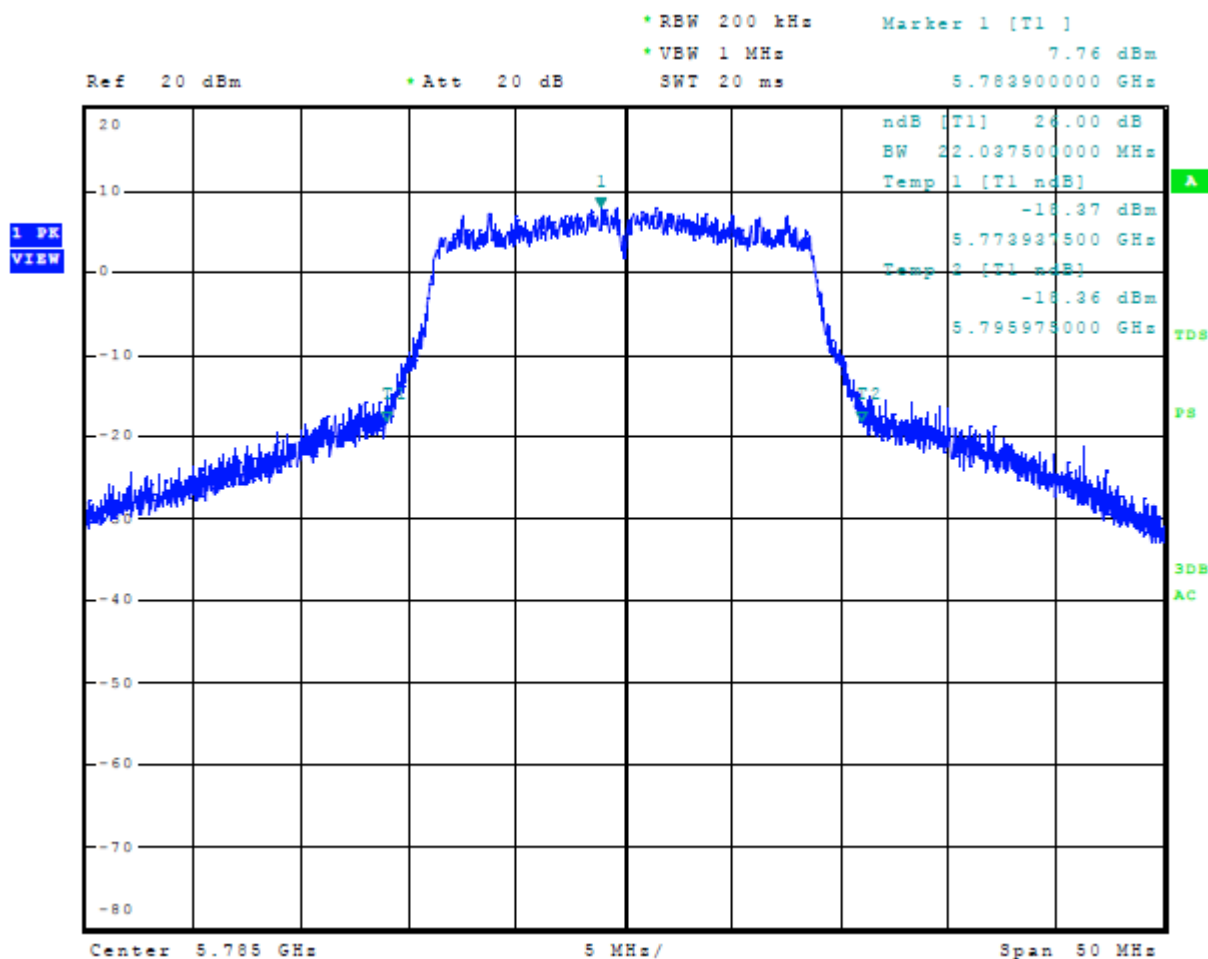


Figure 33 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)

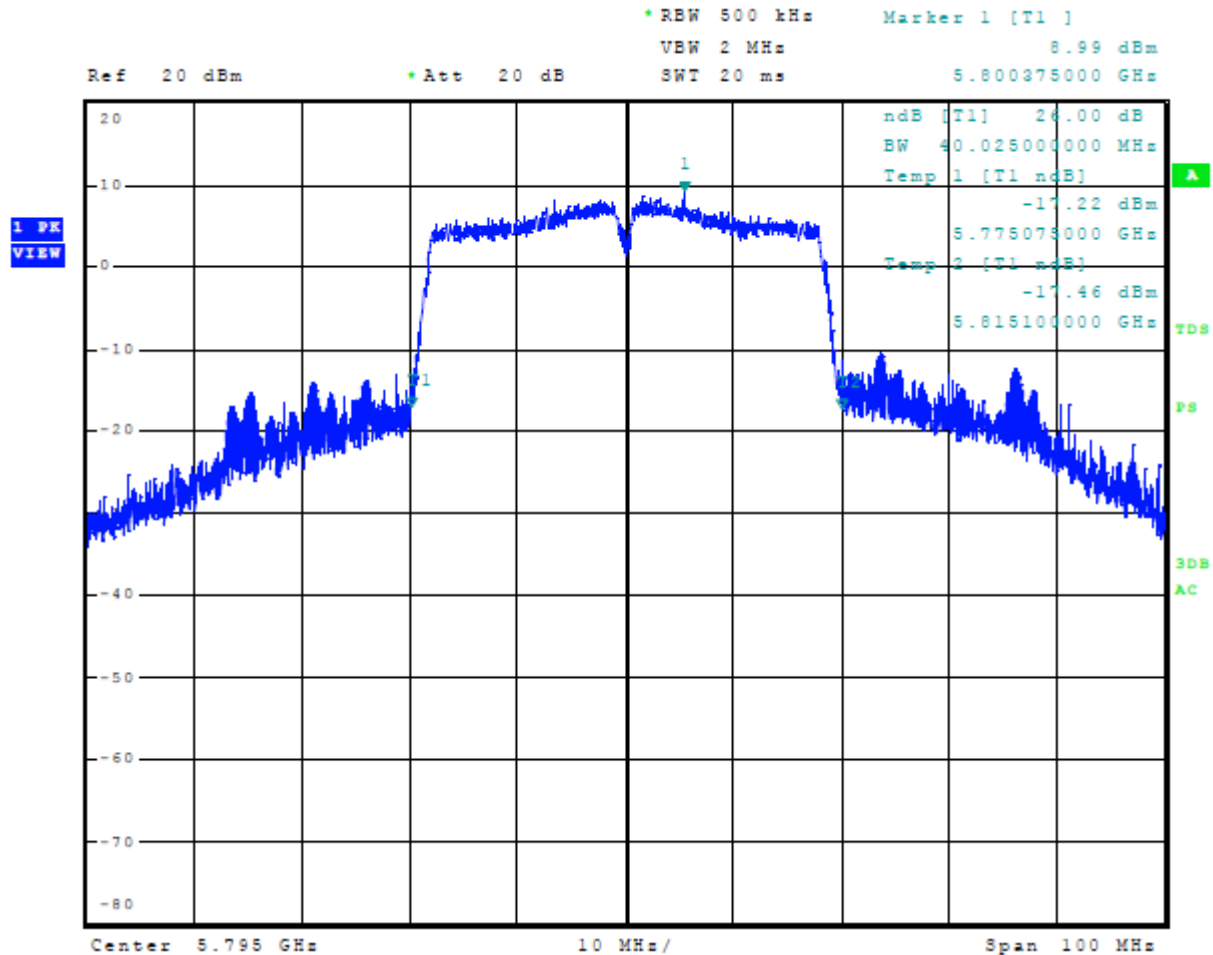


Figure 34 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

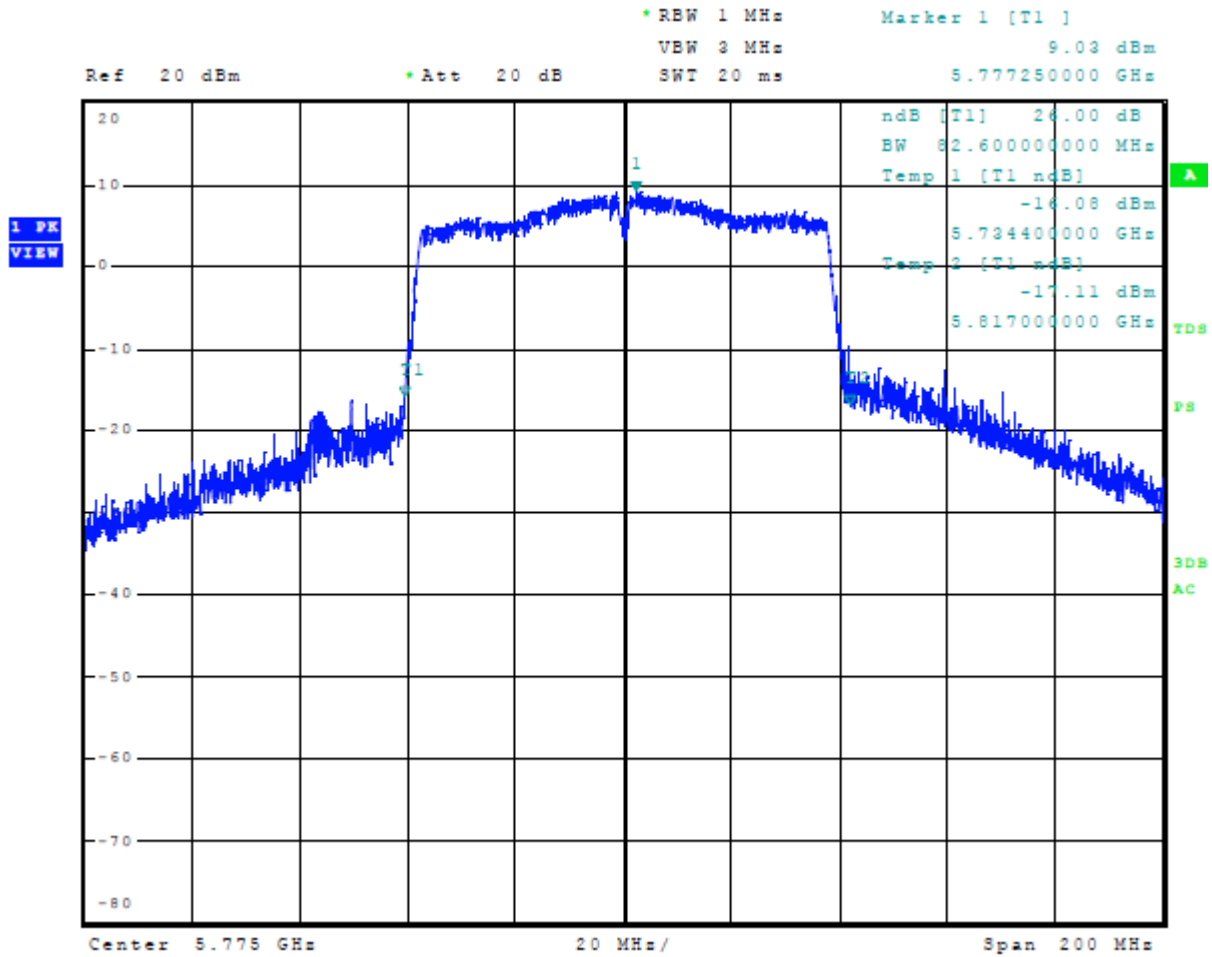


Figure 35 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 5 U-NII-1 (802.11a)

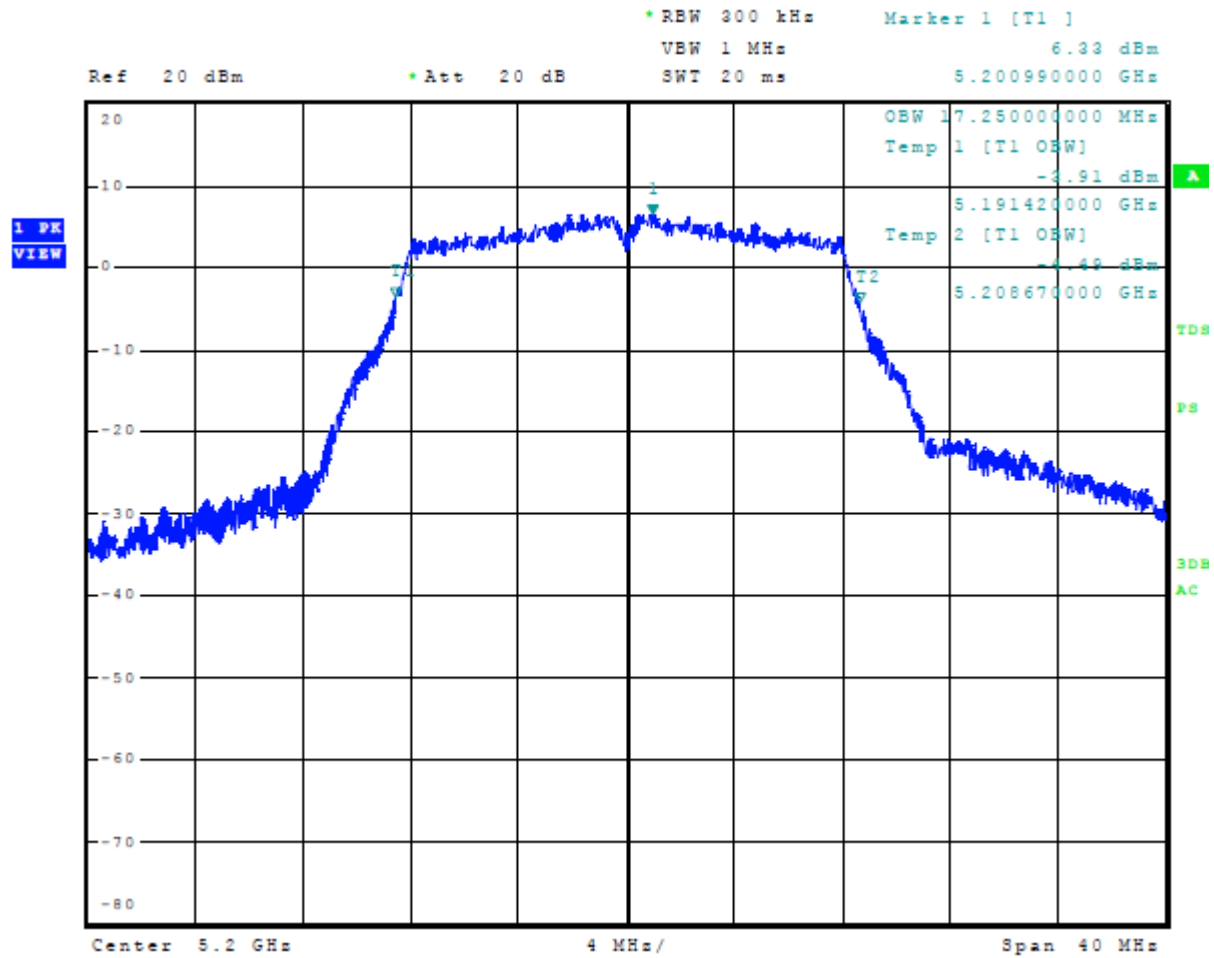


Figure 36 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11n)

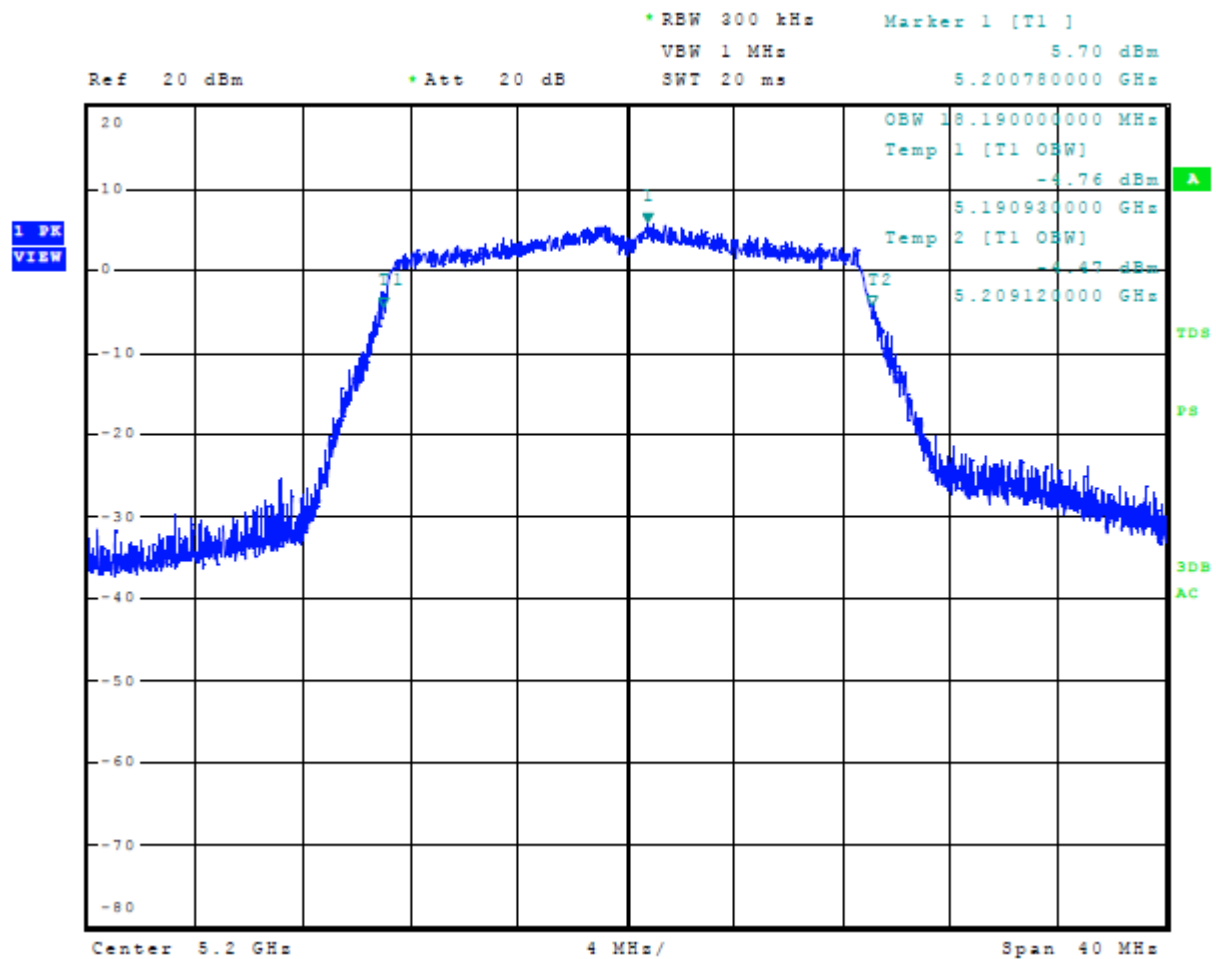


Figure 37 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n40)

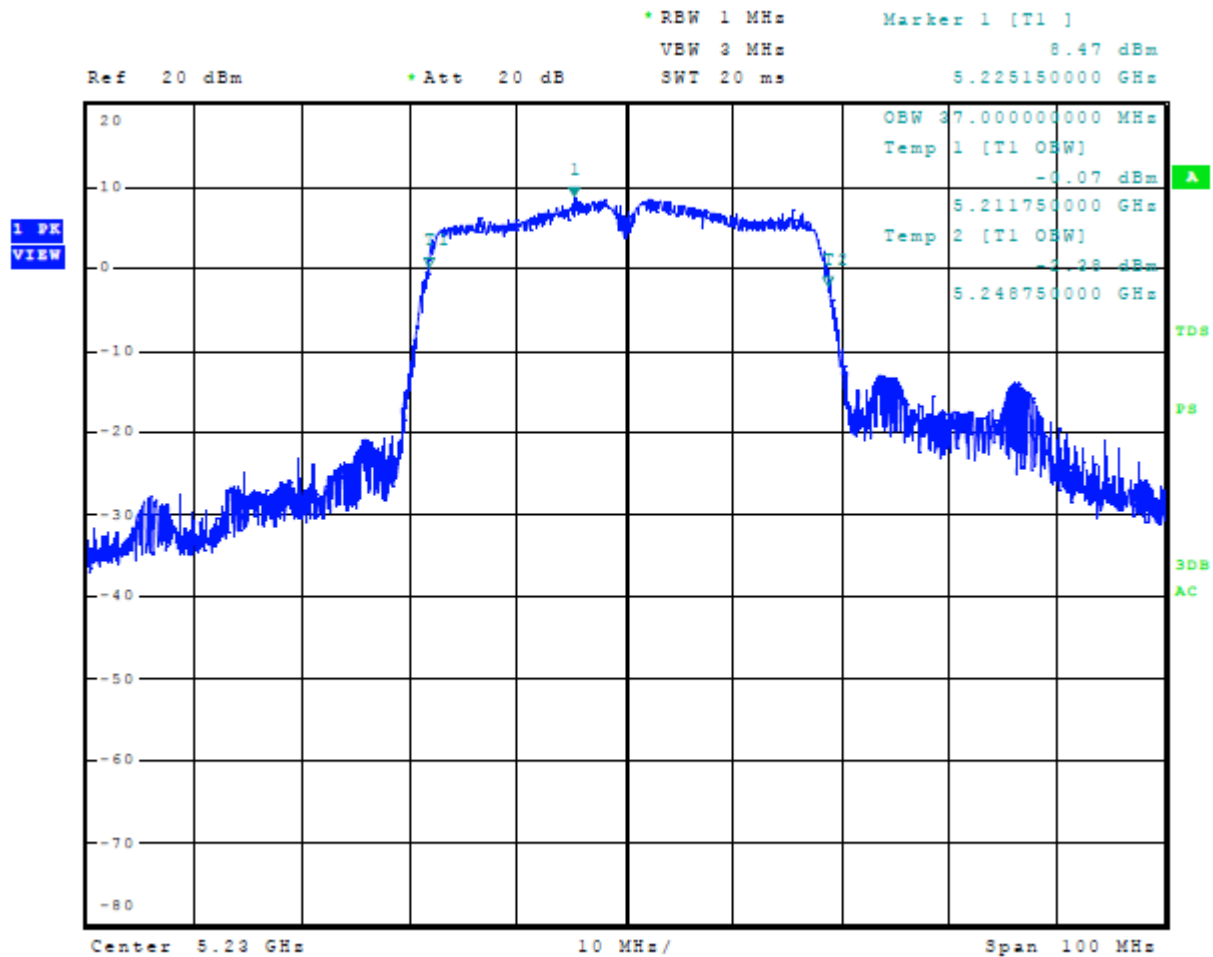


Figure 38 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11ac80)

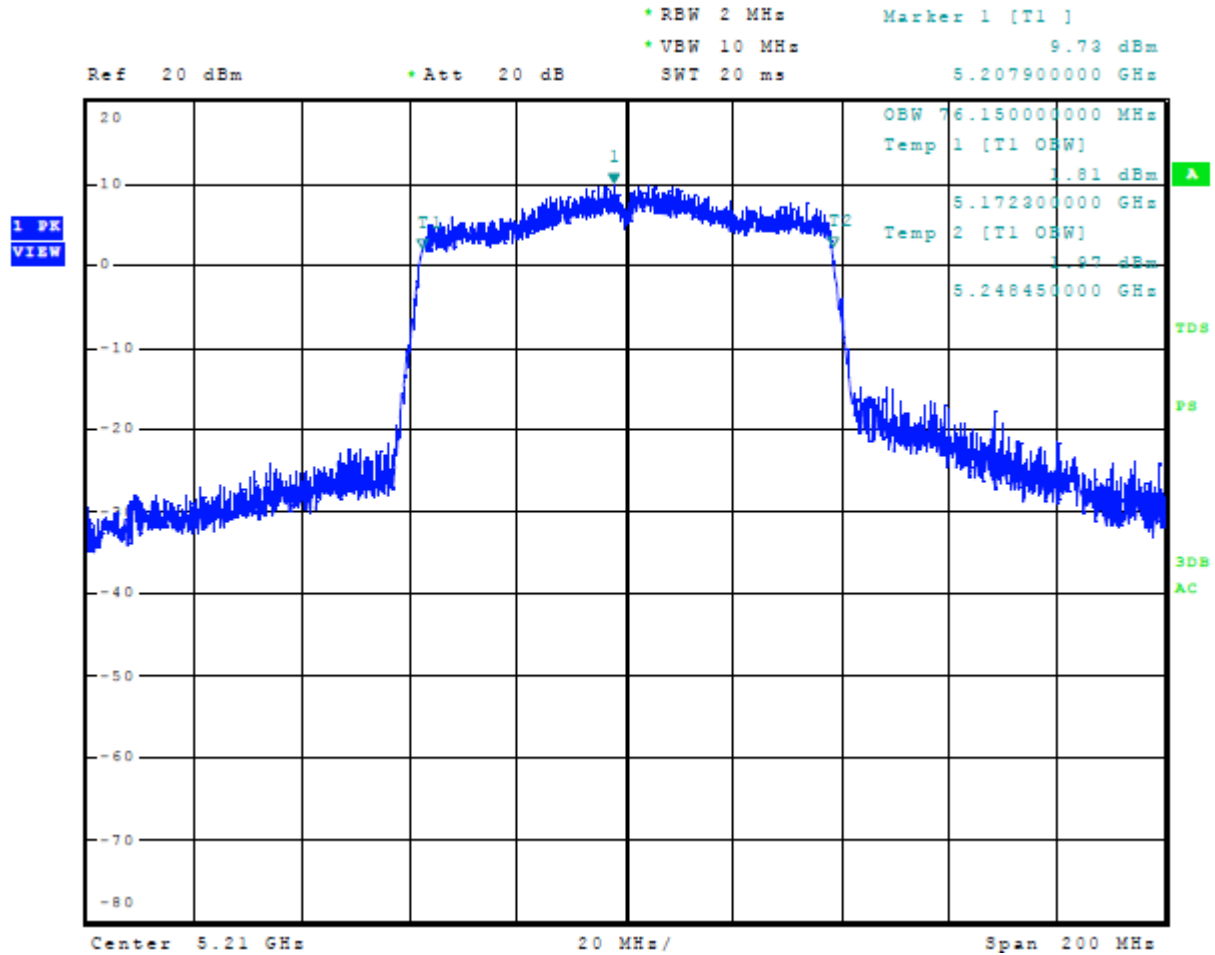


Figure 39 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

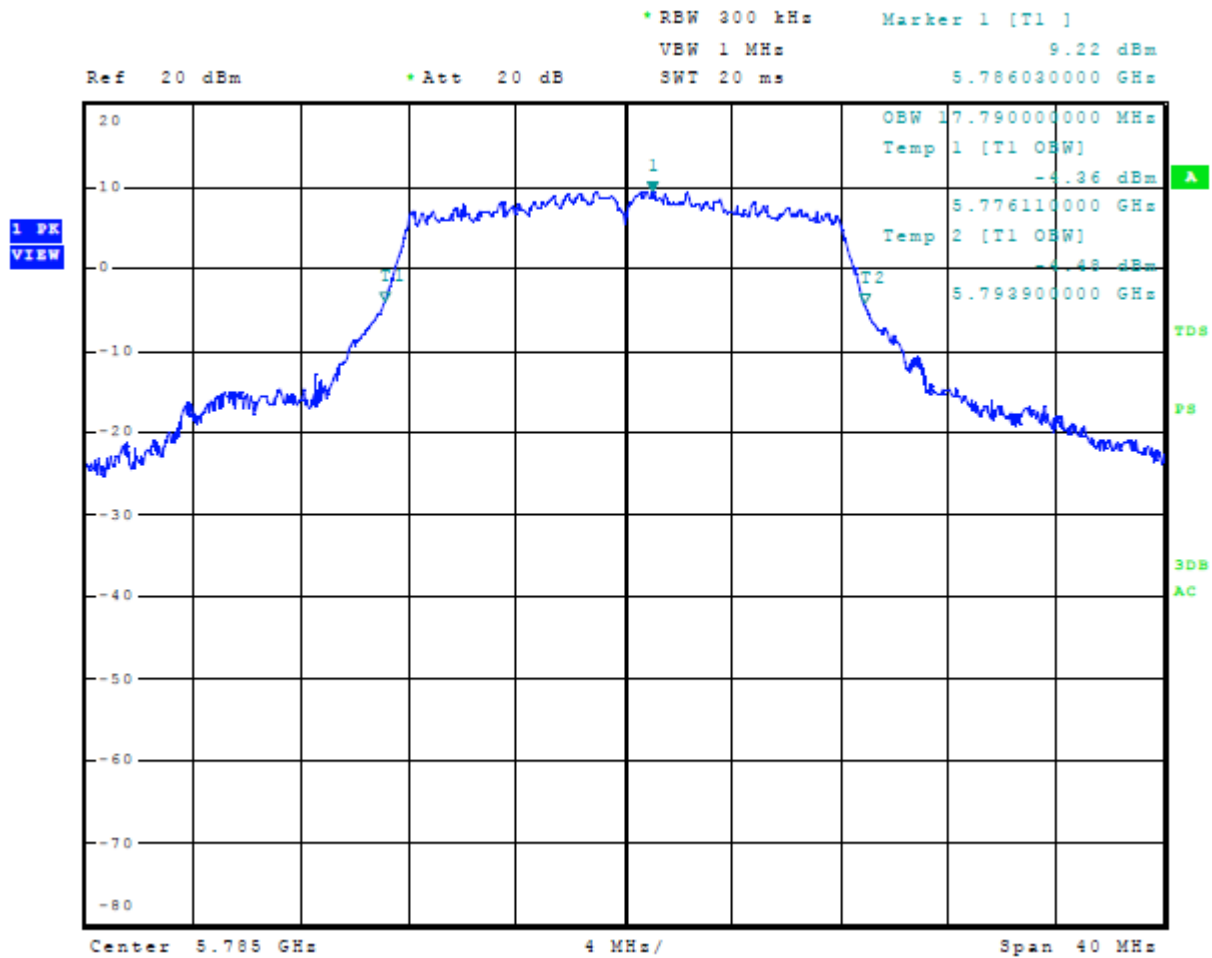


Figure 40 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

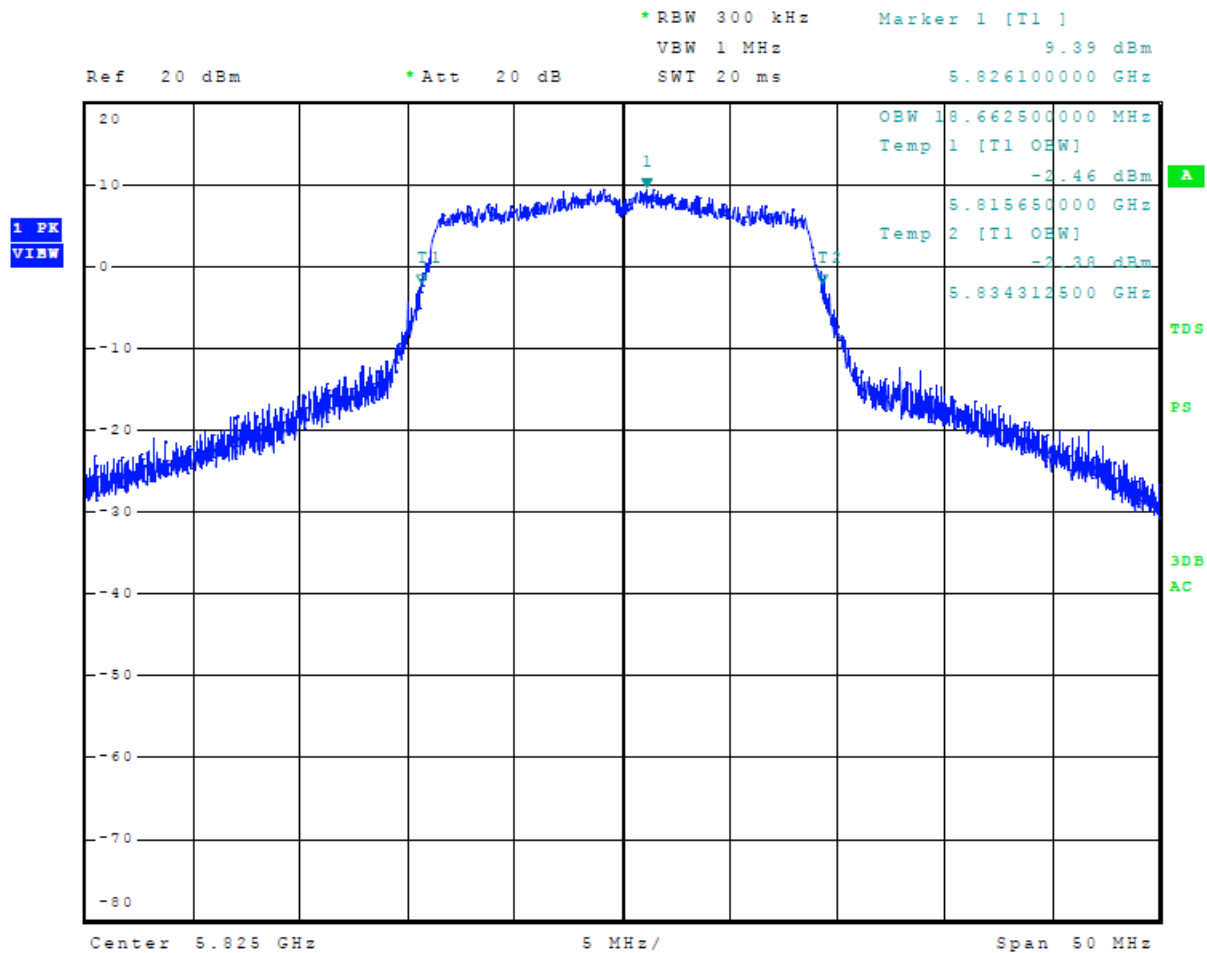


Figure 41 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)

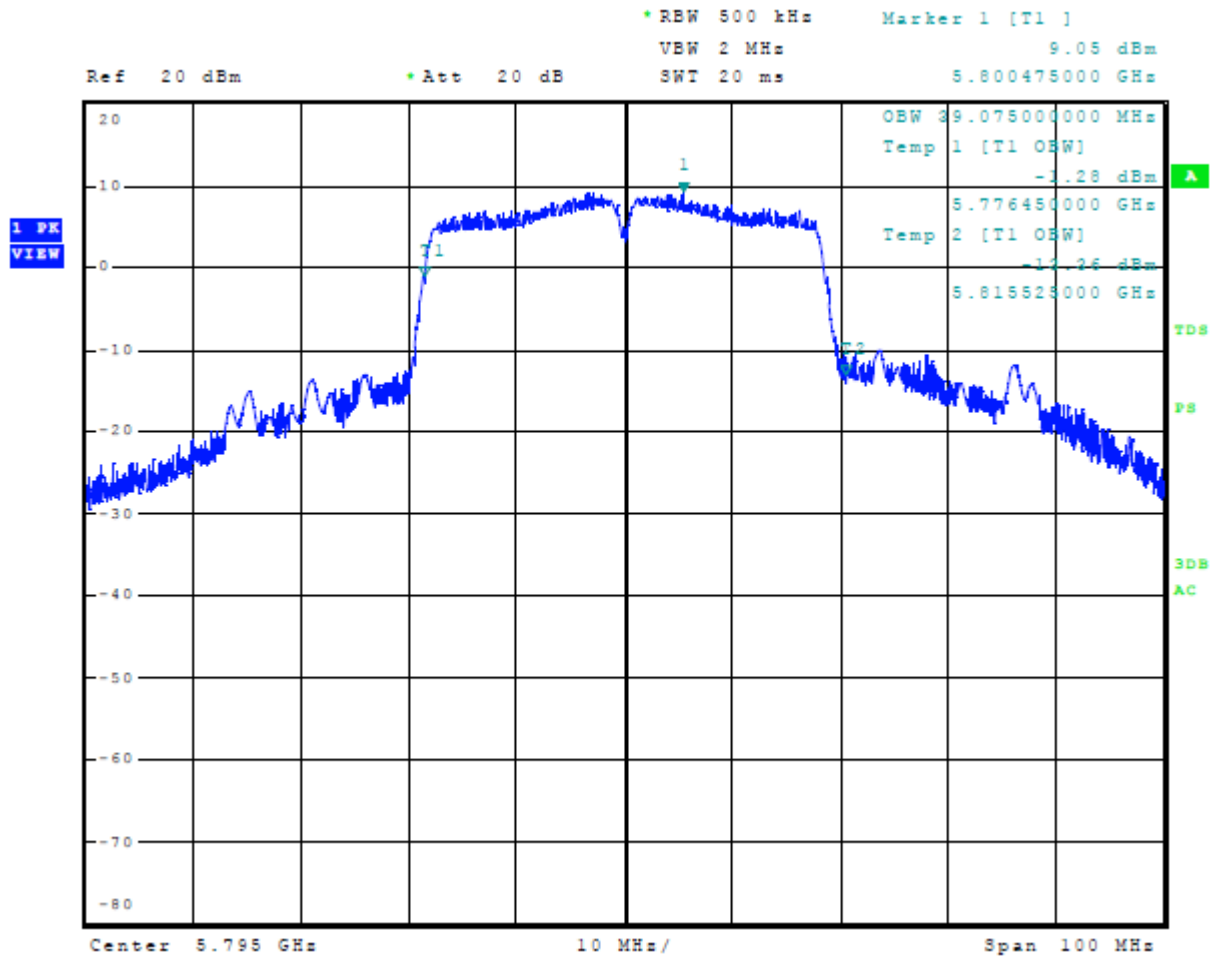


Figure 42 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

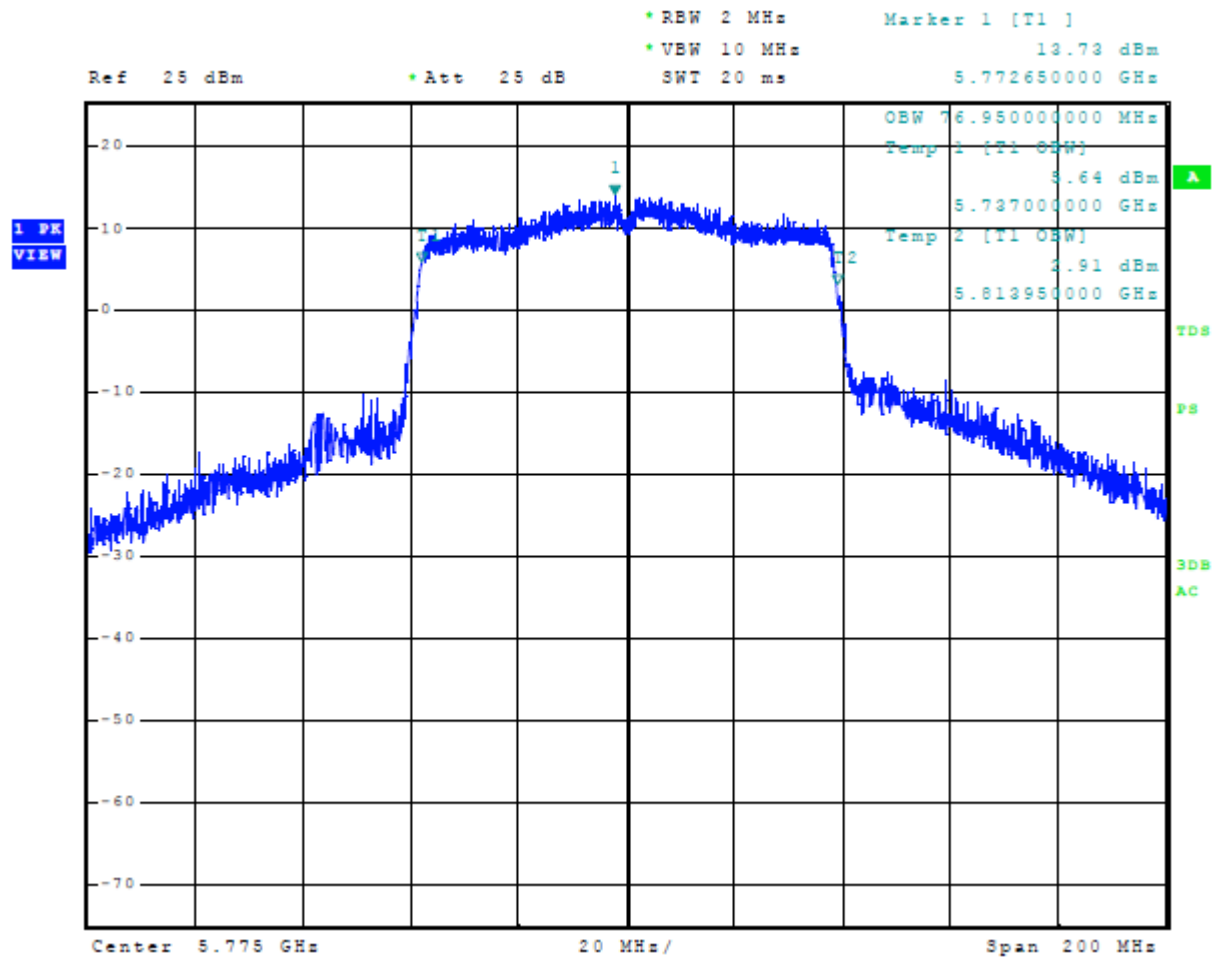


Figure 43 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 9 U-NII-3 (802.11a)

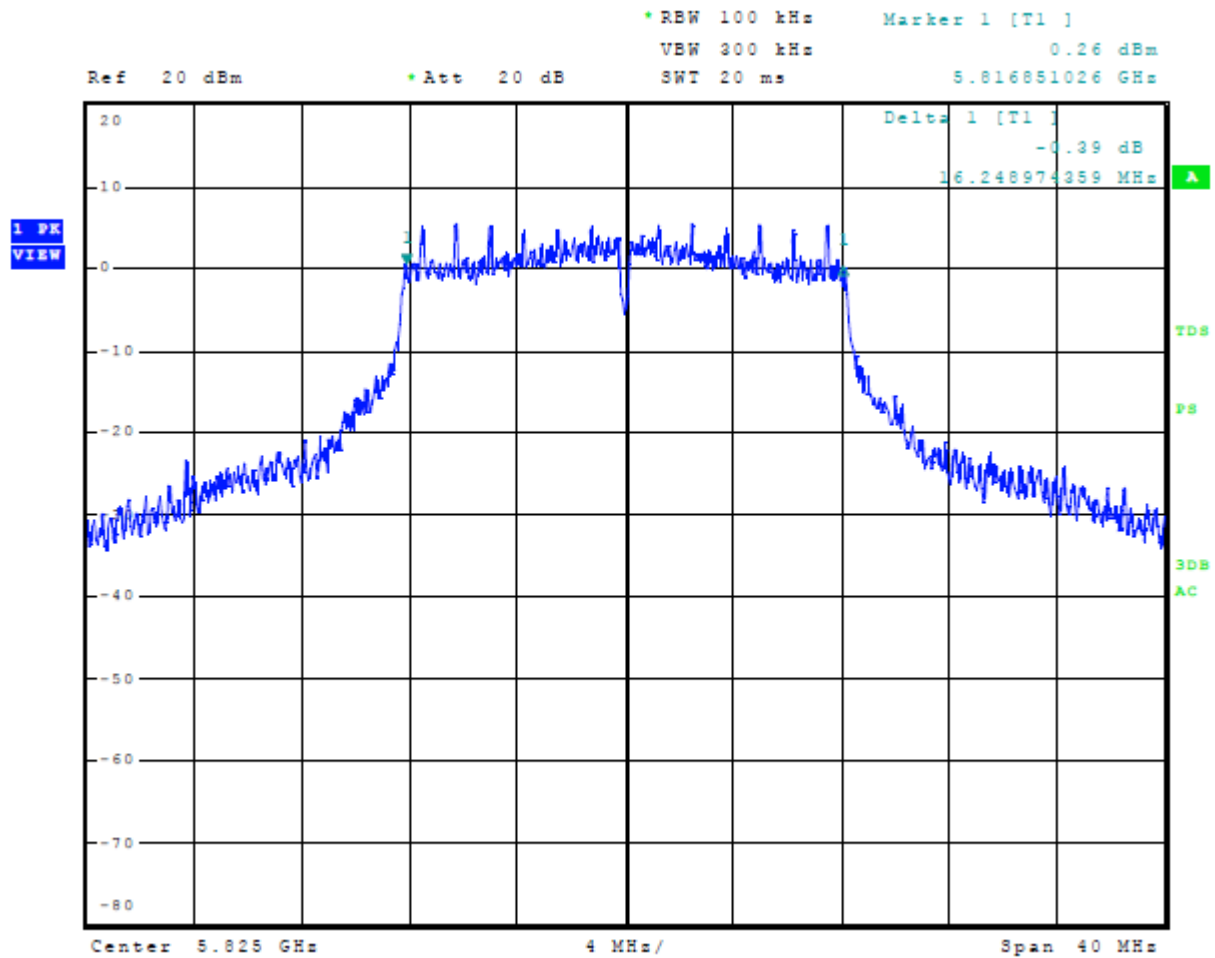


Figure 44 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 10 U-NII-3 (802.11n)

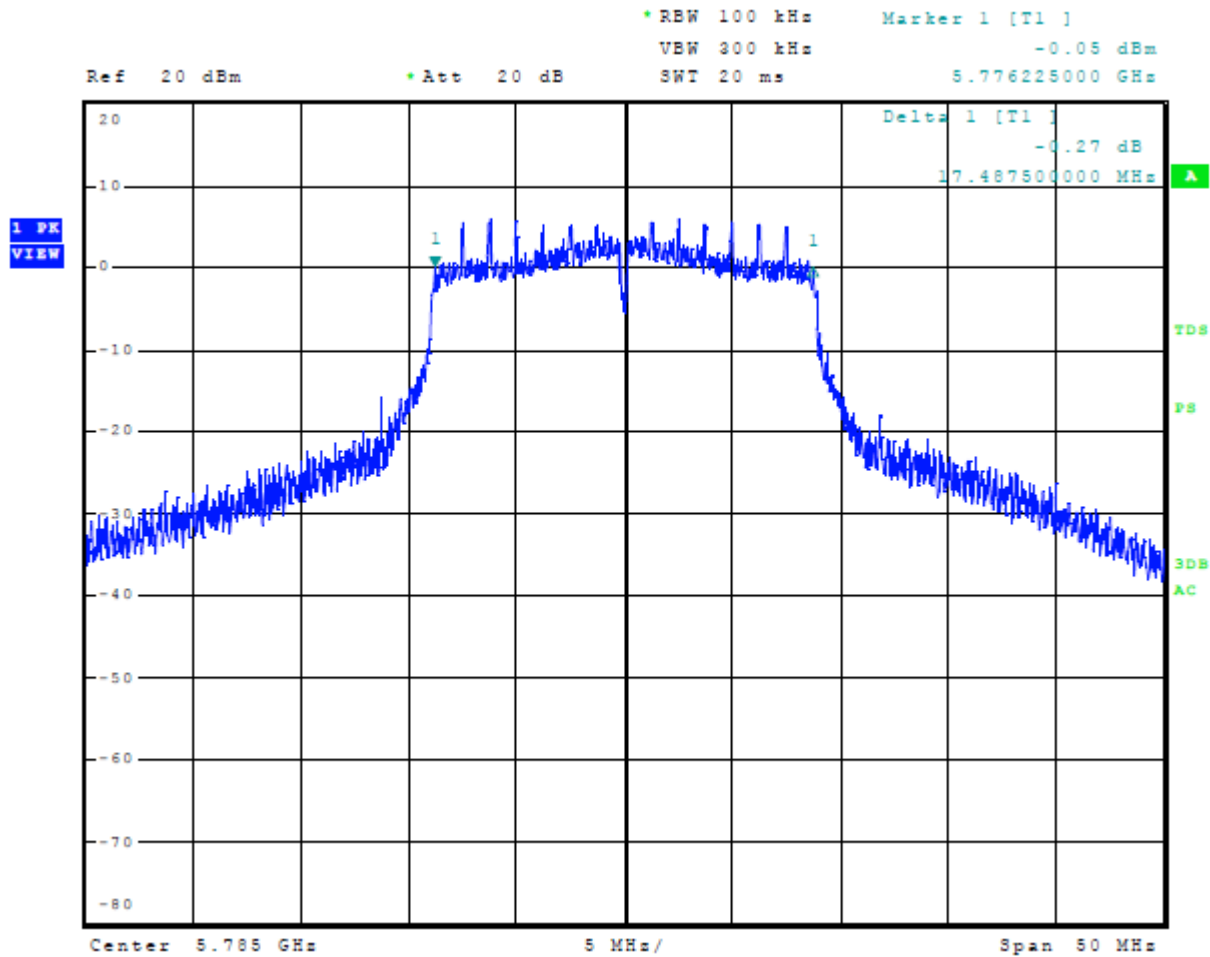


Figure 45 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11n40)


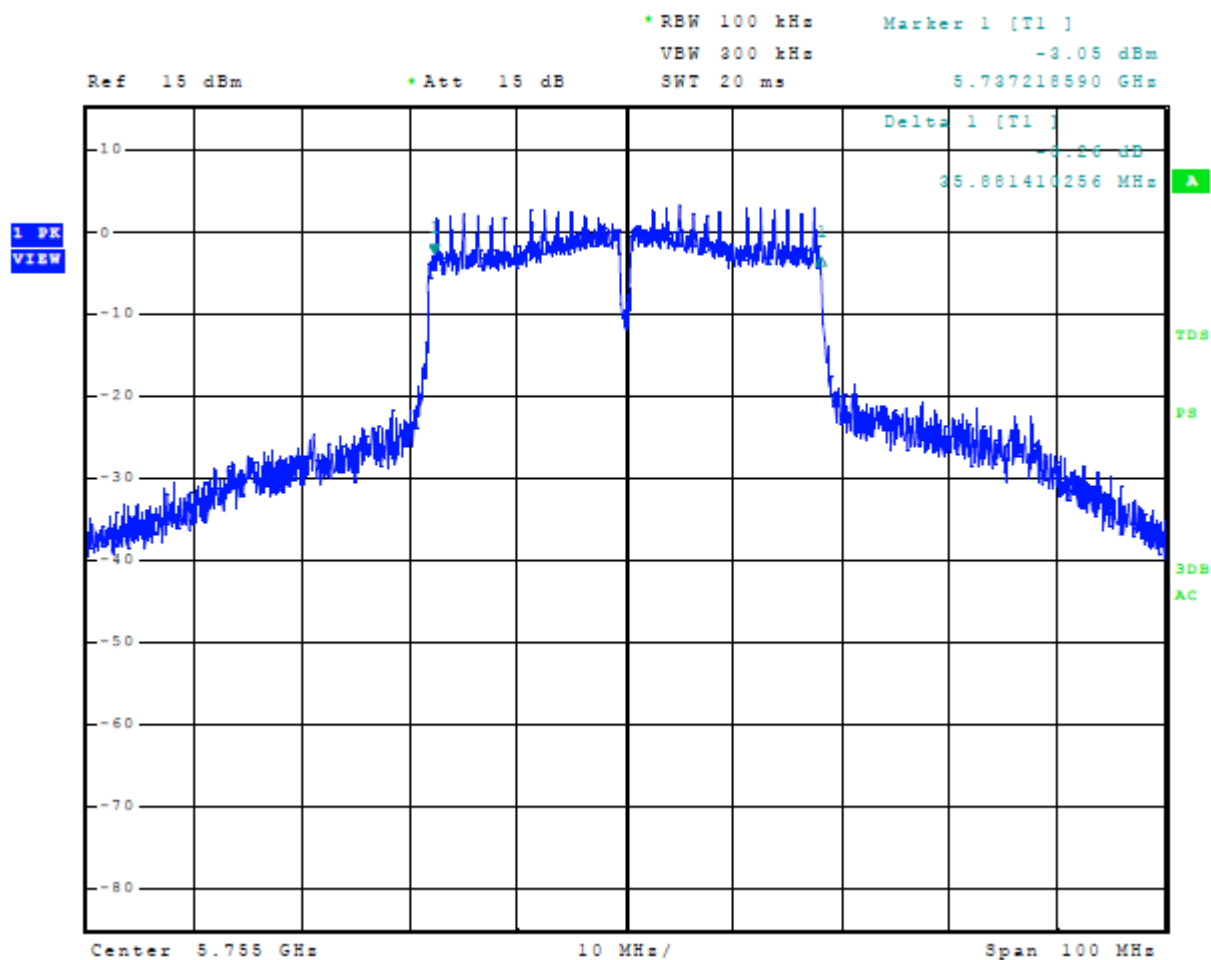


Figure 46 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11ac80)

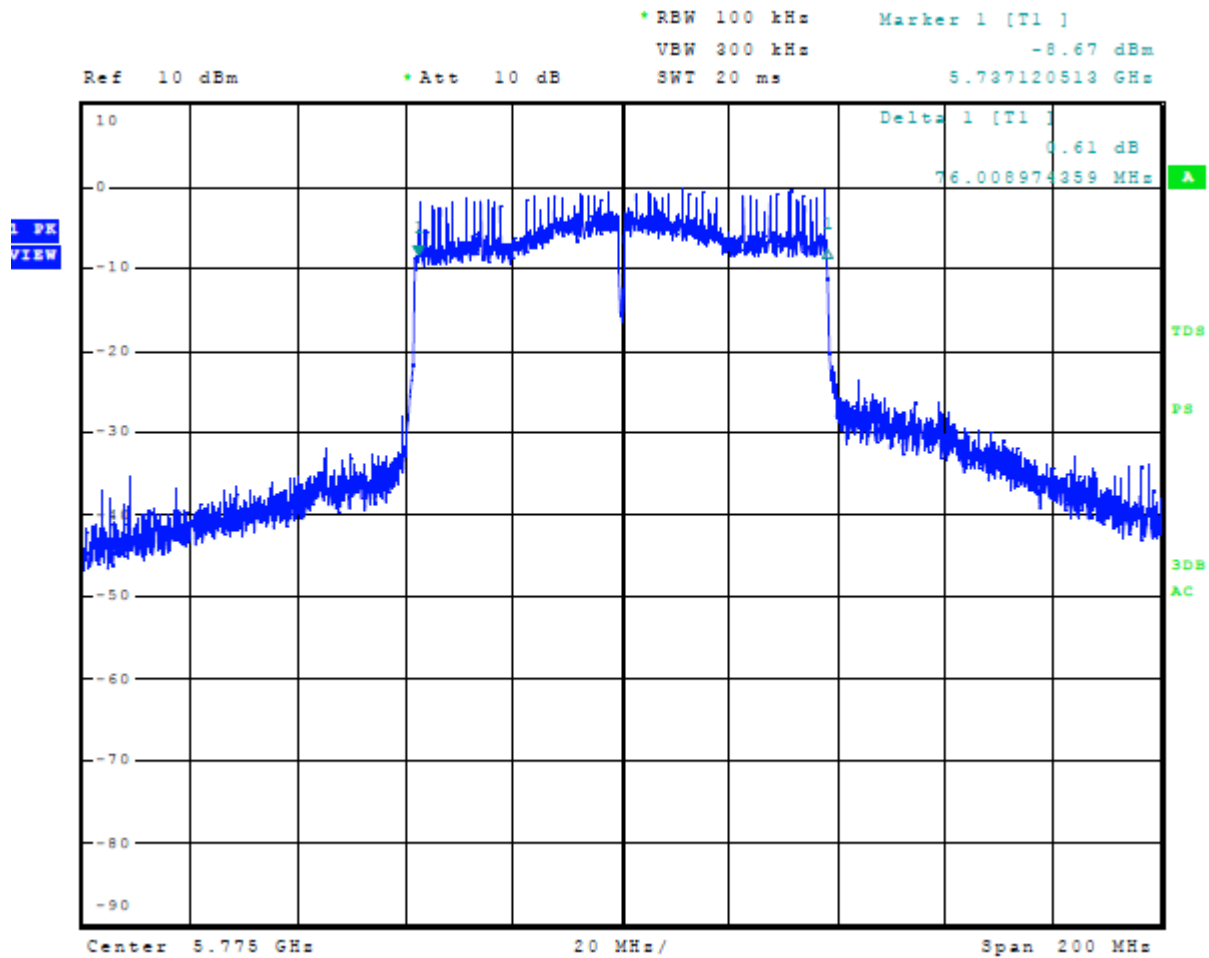

Transmitter Emissions Data

Table 12 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 5 U-NII-1 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	59.7	45.9	58.9	45.2	68.3	-22.4	-23.1
15540.0	63.5	50.0	63.8	50.0	68.3	-18.3	-18.3
20720.0	57.4	43.6	57.3	43.7	68.3	-24.7	-24.6
25900.0	61.4	48.1	61.5	48.1	68.3	-20.2	-20.2
5200.0	--	--	--	--	--	--	--
10400.0	59.5	45.7	59.0	45.7	68.3	-22.6	-22.6
15600.0	63.6	50.1	63.5	50.0	68.3	-18.2	-18.3
20800.0	57.1	43.6	56.9	43.6	68.3	-24.7	-24.7
26000.0	62.3	48.9	62.6	49.0	68.3	-19.4	-19.3
5240.0	--	--	--	--	--	--	--
10480.0	58.9	45.3	61.1	47.1	68.3	-23.0	-21.2
15720.0	62.5	49.2	62.7	49.2	68.3	-19.1	-19.1
20960.0	57.8	44.0	57.5	44.0	68.3	-24.3	-24.3
26200.0	62.2	49.0	62.4	49.0	68.3	-19.3	-19.3
Band Edges							
5150.0	64.9	50.4	66.4	50.9	54.0	-3.6	-3.1
5350.0	63.8	50.4	63.8	50.4	54.0	-3.6	-3.6

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 13 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 6 U-NII-1 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	58.9	45.6	58.6	45.1	68.3	-22.7	-23.2
15540.0	63.8	50.0	63.5	49.9	68.3	-18.3	-18.4
20720.0	57.4	43.7	57.2	43.7	68.3	-24.6	-24.6
25900.0	62.1	48.1	61.9	48.1	68.3	-20.2	-20.2
5200.0	--	--	--	--	--	--	--
10400.0	59.1	45.7	59.5	45.8	68.3	-22.6	-22.5
15600.0	63.7	50.0	63.1	50.1	68.3	-18.3	-18.2
20800.0	57.2	43.8	57.2	43.8	68.3	-24.5	-24.5
26000.0	62.3	49.0	62.1	48.9	68.3	-19.3	-19.4
5240.0	--	--	--	--	--	--	--
10480.0	59.2	45.6	59.6	46.0	68.3	-22.7	-22.3
15720.0	62.8	49.2	62.3	49.2	68.3	-19.1	-19.1
20960.0	58.4	44.1	57.9	44.1	68.3	-24.2	-24.2
26200.0	62.5	49.0	62.6	49.0	68.3	-19.3	-19.3
Band Edges							
5150.0	64.0	49.9	67.9	50.5	54.0	-4.1	-3.5
5350.0	64.1	50.4	64.3	50.4	54.0	-3.6	-3.6

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 14 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 7 U-NII-1 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5190.0	--	--	--	--	--	--	--
10380.0	61.8	47.7	59.3	45.7	68.3	-20.6	-22.6
15570.0	62.9	49.6	63.4	49.6	68.3	-18.7	-18.7
20760.0	58.2	43.7	57.5	43.6	68.3	-24.6	-24.7
25950.0	61.7	48.2	61.9	48.1	68.3	-20.1	-20.2
5230.0	--	--	--	--	--	--	--
10460.0	58.2	44.5	58.3	44.8	68.3	-23.8	-23.5
15690.0	62.9	49.0	62.8	49.0	68.3	-19.3	-19.3
20920.0	57.9	43.9	57.6	44.0	68.3	-24.4	-24.3
26150.0	62.9	48.9	62.7	48.9	68.3	-19.4	-19.4
Band Edges							
5150.0	65.9	51.3	66.9	51.4	54.0	-2.7	-2.6
5350.0	64.1	50.4	64.1	50.4	54.0	-3.6	-3.6

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 U-NII-1 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5210.0	--	--	--	--	--	--	--
10420.0	58.1	45.0	58.4	45.1	68.3	-23.3	-23.2
15630.0	63.3	49.8	63.6	49.8	68.3	-18.5	-18.5
20840.0	58.0	43.9	57.9	43.9	68.3	-24.4	-24.4
26050.0	63.1	49.3	62.9	49.3	68.3	-19.0	-19.0
Band Edges							
5150.0	64.0	50.3	66.0	51.4	54.0	-3.7	-2.6
5350.0	64.2	50.4	64.2	50.5	54.0	-3.6	-3.5

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 16 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 9 U-NII-3 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	60.2	46.7	60.3	46.9	68.3	-21.6	-21.4
17235.0	66.3	52.9	65.9	52.7	68.3	-15.4	-15.6
22980.0	59.2	45.1	58.6	45.0	68.3	-23.2	-23.3
28725.0	67.9	54.3	67.8	54.3	68.3	-14.0	-14.0
5785.0	--	--	--	--	--	--	--
11570.0	60.8	47.4	61.1	47.4	68.3	-20.9	-20.9
17355.0	66.2	52.9	66.3	53.0	68.3	-15.4	-15.3
23140.0	58.4	45.1	59.0	45.1	68.3	-23.2	-23.2
28925.0	68.0	54.7	67.8	54.7	68.3	-13.6	-13.6
5825.0	--	--	--	--	--	--	--
11650.0	62.8	48.8	63.0	49.2	68.3	-19.5	-19.1
17475.0	66.9	53.5	67.0	53.6	68.3	-14.8	-14.7
23300.0	59.7	45.3	59.2	45.4	68.3	-23.0	-22.9
29125.0	69.5	55.6	69.4	55.6	68.3	-12.3	-12.3
Band Edges							
5725.0	81.7	65.7	80.7	64.9	78.2	-12.5	-13.3
5850.0	77.8	61.9	74.8	59.2	78.2	-16.3	-19.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 17 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 10 U-NII-3 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	60.6	47.0	60.2	47.0	68.3	-21.3	-21.3
17235.0	66.3	52.9	66.2	52.8	68.3	-15.4	-15.5
22980.0	59.6	45.6	59.0	45.5	68.3	-22.7	-22.8
28725.0	68.5	54.7	68.2	54.6	68.3	-13.6	-13.7
5785.0	--	--	--	--	--	--	--
11570.0	61.5	47.8	60.6	47.3	68.3	-20.5	-21.0
17355.0	66.6	52.7	66.3	52.8	68.3	-15.6	-15.5
23140.0	59.7	45.7	59.2	45.7	68.3	-22.6	-22.6
28925.0	68.3	55.2	68.7	55.2	68.3	-13.1	-13.1
5825.0	--	--	--	--	--	--	--
11650.0	63.2	48.6	61.5	48.5	68.3	-19.7	-19.8
17475.0	67.0	53.4	68.1	53.3	68.3	-14.9	-15.0
23300.0	58.3	44.8	58.7	44.8	68.3	-23.5	-23.5
29125.0	68.2	55.3	68.9	55.3	68.3	-13.0	-13.0
Band Edges							
5725.0	88.3	68.5	84.1	64.0	78.2	-9.7	-14.2
5850.0	81.3	63.5	78.7	61.0	78.2	-14.7	-17.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 18 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 11 U-NII-3 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5755.0	--	--	--	--	--	--	--
11510.0	60.1	46.8	59.4	46.3	68.3	-21.5	-22.0
17265.0	65.9	52.4	65.9	52.4	68.3	-15.9	-15.9
23020.0	58.9	45.3	59.2	45.3	68.3	-23.0	-23.0
28775.0	68.5	54.8	68.4	54.8	68.3	-13.5	-13.5
5795.0	--	--	--	--	--	--	--
11590.0	61.5	47.5	60.8	47.6	68.3	-20.8	-20.7
17385.0	66.4	53.1	66.7	53.0	68.3	-15.2	-15.3
23180.0	59.5	45.4	58.7	45.3	68.3	-22.9	-23.0
28975.0	69.0	55.4	68.7	55.4	68.3	-12.9	-12.9
Band Edges							
5725.0	83.3	66.0	82.5	65.2	78.2	-12.2	-13.0
5850.0	78.9	62.1	74.2	57.4	78.2	-16.1	-20.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 U-NII-3 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5775.0	--	--	--	--	--	--	--
11550.0	60.9	46.8	60.1	46.5	68.3	-21.5	-21.8
17325.0	64.8	51.5	65.4	51.5	68.3	-16.8	-16.8
23100.0	60.0	45.3	59.0	45.3	68.3	-23.0	-23.0
28875.0	68.5	54.9	68.6	54.9	68.3	-13.4	-13.4
Band Edges							
5725.0	83.3	64.5	81.3	62.5	78.2	-13.7	-15.7
5850.0	84.0	67.3	79.8	63.4	78.2	-10.9	-14.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 21 Transmitter Antenna Port Data Modes 5-8, U-NII-1

Frequency MHz	Antenna Port Conducted Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/MHz)
20 MHz Mode 9 U-NII-1 (802.11a)			
5180	0.026	17,200.0	12.6
5200	0.025	17,250.0	12.5
5240	0.027	17,180.0	12.8
20 MHz Mode 10 U-NII-1 (802.11n)			
5180	0.021	18,190.0	11.6
5200	0.019	18,190.0	12.4
5240	0.020	18,200.0	11.7
40 MHz Mode 11 U-NII-1 (802.11n40)			
5190	0.018	36,950.0	8.4
5230	0.018	37,000.0	8.9
80 MHz Mode 12 U-NII-1 (802.11ac80)			
5210	0.017	76,150.0	6.2

Table 22 Transmitter Antenna Port Data Modes 9-12, (U-NII-3)

Frequency MHz	Antenna Port Conducted Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	26-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/500kHz)
20 MHz Mode 13 U-NII-3 (802.11a)					
5745	0.047	17,750.0	16,260.0	23,460.0	11.7
5785	0.046	17,790.0	16,282.1	22,065.0	11.3
5825	0.044	17,640.0	16,249.0	21,450.0	11.3
20 MHz Mode 14 U-NII-3 (802.11n)					
5745	0.044	18,600.0	17,500.0	21,537.5	12.7
5785	0.045	18,637.5	17,487.5	22,037.5	12.2
5825	0.044	18,662.5	17,521.5	22,225.0	12.3
40 MHz Mode 15 (802.11n40) U-NII-3					
5755	0.045	39,875.0	35,881.4	40,725.0	8.9
5795	0.045	39,075.0	36,266.0	40,025.0	9.0
80 MHz Mode 16 U-NII-3 (802.11ac80)					
5775	0.040	76,950.0	76,009.0	82,600.0	6.0

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15.407 and Industry Canada RSS-247 Issue 3. The maximum average conducted power delivered to antenna was 0.027-Watts in the U-NII-1 Band and 0.047-Watts in the U-NII-3 Band. The radiated harmonic emissions provided a minimum margin of -2.6 dB below requirements. There were no other significantly measurable emissions in the restricted bands other than those presented in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Additional Test Equipment
- Annex C Rogers Qualifications
- Annex D Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/28/2023	3/28/2024
☒ LISN: Fischer Custom Communications Model:		FCC-LISN-50-16-2-08		3/28/2023	3/28/2024
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)9kHz-40 GHz		10/11/2022	10/11/2023
☐ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)9kHz-40 GHz		10/11/2022	10/11/2023
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303070)9kHz-40 GHz		10/11/2022	10/11/2023
☐ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/11/2022	10/11/2023
☐ Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/11/2022	10/11/2023
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/11/2022	10/11/2023
☐ Antenna:	EMCO	6509	.001-30 MHz	10/14/2020	10/11/2023
☐ Antenna	ARA	BCD-235-B (169)	20-350MHz	10/11/2022	10/11/2023
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/11/2022	10/11/2023
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	10/11/2022	10/11/2024
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/28/2022	3/29/2024
☐ Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/11/2022	10/11/2024
☒ Antenna	Com Power	AH-840 (101046)	18-40 GHz	3/27/2023	3/27/2025
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	6/26/2023	6/26/2024
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/25/2023	1/25/2024
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☒ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/11/2022	10/11/2023
☒ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/11/2022	10/11/2023
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/11/2022	10/11/2023
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	10/11/2022	10/11/2023
☐ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	8/31/2022	8/31/2023
☐ Power Meter	Agilent	N1911A with N1921A	0.05-40 GHz	3/28/2023	3/28/2025
☐ Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	3/28/2023	3/28/2024
☐ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/28/2023	3/28/2024
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/28/2023	3/28/2025
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/28/2023	3/28/2025
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/28/2023	3/28/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	3/28/2023	3/28/2024
☐ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/28/2023	3/28/2024
☐ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/28/2023	3/28/2024
☐ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/28/2023	3/28/2024
☐ Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	3/28/2023	3/28/2024
☒ Weather station	Davis	6312 (A81120N075)		10/11/2022	10/11/2023

Rogers Labs, a division of The Compatibility Center LLC

Garmin International, Inc.

7915 Nieman Road FCC ID: IPH-04684 IC: 1792A-04684

PMN: A04684

Lenexa, KS 66214 Test: 230821A SN's: 3444728073, 3448985366, 3459196235, 3459196260

Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247

Date: June 19, 2024

Revision 1

File: A04684 NII TstRpt 230821A r1

Page 94 of 97

List of Test Equipment

Calibration Date (m/d/y) Due

☐	Frequency Counter: Leader LDC-825 (8060153	3/28/2023	3/28/2025
☐	ISN: Com-Power Model ISN T-8	3/28/2023	3/28/2024
☐	LISN Compliance Design FCC-LISN-2.Mod.cd,(126) .15-30MHz	10/11/2022	10/11/2024
☐	LISN: Com-Power Model LI-220A	3/29/2023	3/29/2025
☐	LISN: Com-Power Model LI-550C	10/11/2022	10/11/2024
☐	Cable Huber & Suhner Inc. Sucoflex102ea(1.5M)(303072) 9kHz-40 GHz	10/11/2022	10/11/2023
☐	Cable Huber & Suhner Inc. Sucoflex102ea(L1M)(281183) 9kHz-40 GHz	10/11/2022	10/11/2023
☒	Cable Huber & Suhner Inc. Sucoflex102ea(L4M)(281184) 9kHz-40 GHz	10/11/2022	10/11/2023
☐	Cable Huber & Suhner Inc. Sucoflex102ea(L10M)(317546)9kHz-40 GHz	10/11/2022	10/11/2023
☐	Cable Time Microwave 4M-750HF290-750 (4M) 9kHz-24 GHz	10/11/2022	10/11/2023
☐	RF Filter Micro-Tronics BRC17663 (001) 9.3-9.5 notch 30-1800 MHz	3/28/2023	3/28/2025
☐	RF Filter Micro-Tronics BRC19565 (001) 9.2-9.6 notch 30-1800 MHz	3/28/2023	3/28/2025
☐	Analyzer HP 8562A (3051A05950) 9kHz-125GHz	3/28/2023	3/28/2024
☐	Wave Form Generator Keysight 33512B (MY57400128)	3/29/2022	3/29/2024
☐	Antenna: Solar 9229-1 & 9230-1	2/18/2023	2/18/2024
☐	CDN: Com-Power Model CDN325E	10/11/2022	10/11/2024
☐	Oscilloscope Scope: Tektronix MDO 4104	2/18/2023	2/18/2024
☐	EMC Transient Generator HVT TR 3000	2/18/2023	2/18/2024
☐	AC Power Source (Ametech, California Instruments)	2/18/2023	2/18/2024
☐	Field Intensity Meter: EFM-018	2/18/2023	2/18/2024
☐	ESD Simulator: MZ-15	2/18/2023	2/18/2024
☐	Injection Clamp Luthi Model EM101	not required	
☐	R.F. Power Amp ACS 230-50W	not required	
☐	R.F. Power Amp EIN Model: A301	not required	
☐	R.F. Power Amp A.R. Model: 10W 1010M7	not required	
☐	R.F. Power Amp A.R. Model: 50U1000	not required	
☐	Temperature Chamber	not required	
☒	Shielded Room	not required	

Annex C Qualifications

Patrick Powell, Engineer

Rogers Labs, a division of The Compatibility Center LLC

Mr. Powell has approximately 40 years' experience in the field of electronics. Working experience includes automated test engineering in Military electronics; design & development in medical electronics; and application engineering / small business ownership in the semiconductor and display technology spaces.

Positions Held:

Test Engineer:	McDonnell Douglas (now Boeing)
	Allied Signal Aerospace (now Honeywell)
Electrical Engineer:	PPG Biomedical Systems
	Nellcor, Inc.
Applications Engineer / small business owner:	
	Sharp Electronics
	Lattice Semiconductor
EMC Test Engineering:	The Compatibility Center LLC (current)

Educational Background:

Bachelor of Science Degree in Electrical Engineering from Kansas State University

Annex D Laboratory Certificate of Accreditation

3/18/24 through 3/31/25:

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ilac-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2024-03-18 through 2025-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program

3/16/23 through 3/31/24:

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®] **ilac-MRA**

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200087-0


Rogers Labs, a division of The Compatibility Center LLC
Lenexa, KS

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2023-03-16 through 2024-03-31
Effective Dates

 
For the National Voluntary Laboratory Accreditation Program

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04684 IC: 1792A-04684

Lenexa, KS 66214 Test: 230821A SN's: 3444728073, 3448985366, 3459196235, 3459196260

Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 1

File: A04684 NII TstRpt 230821A r1

Garmin International, Inc.

PMN: A04684

Date: June 19, 2024

Page 97 of 97