



Band-edge Spectrum Plots

8.11.1 Lower Band Edge Plot

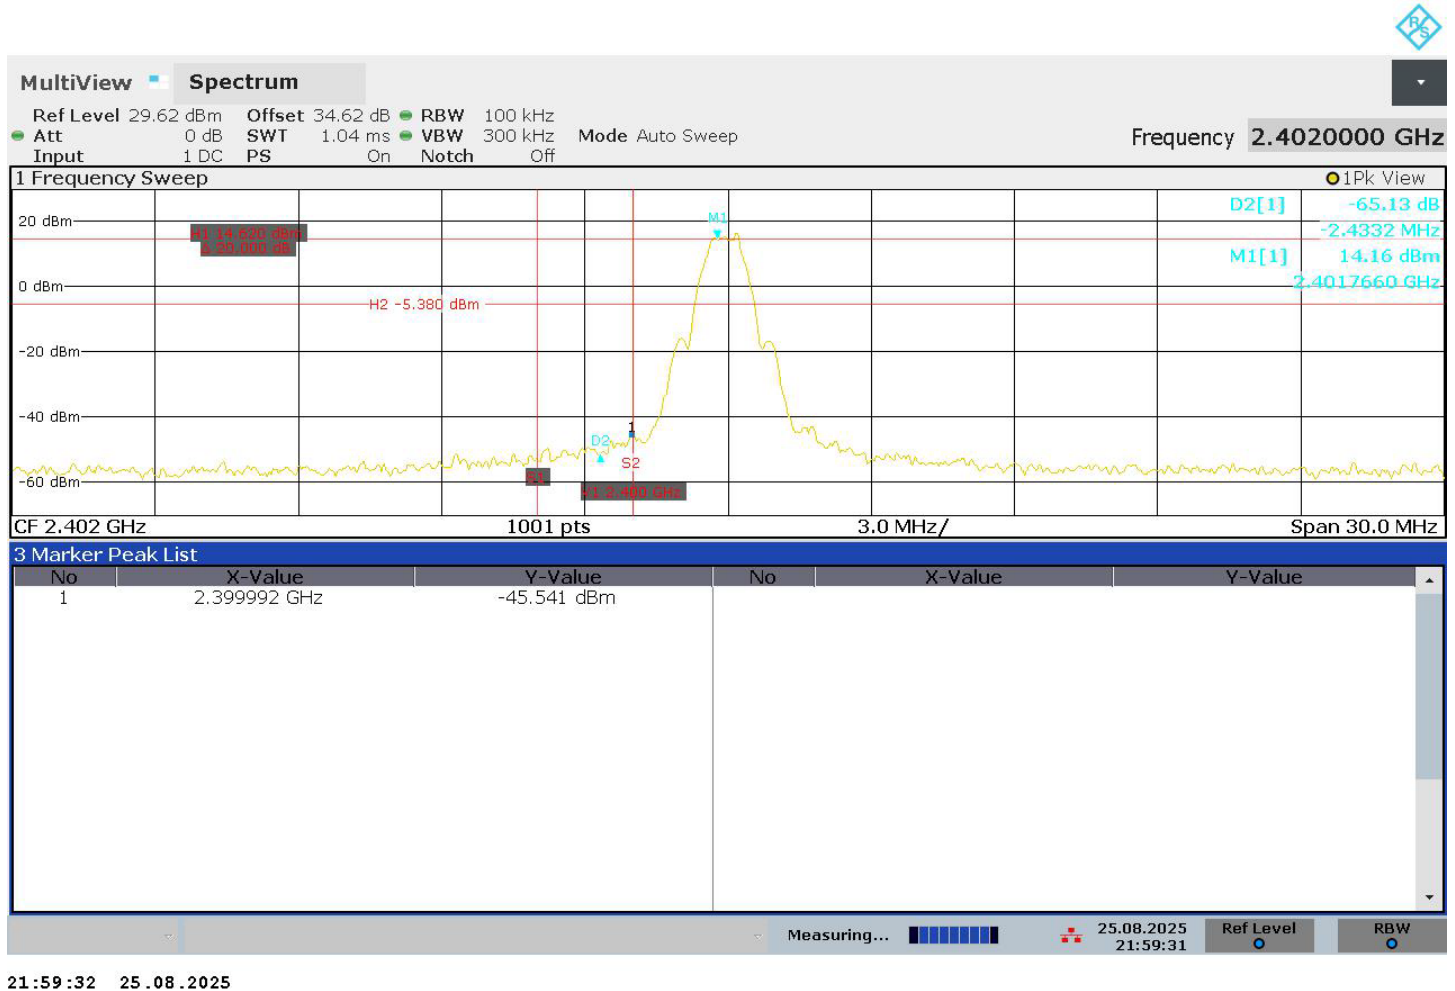

8.11.2 Upper Band Edge Plot

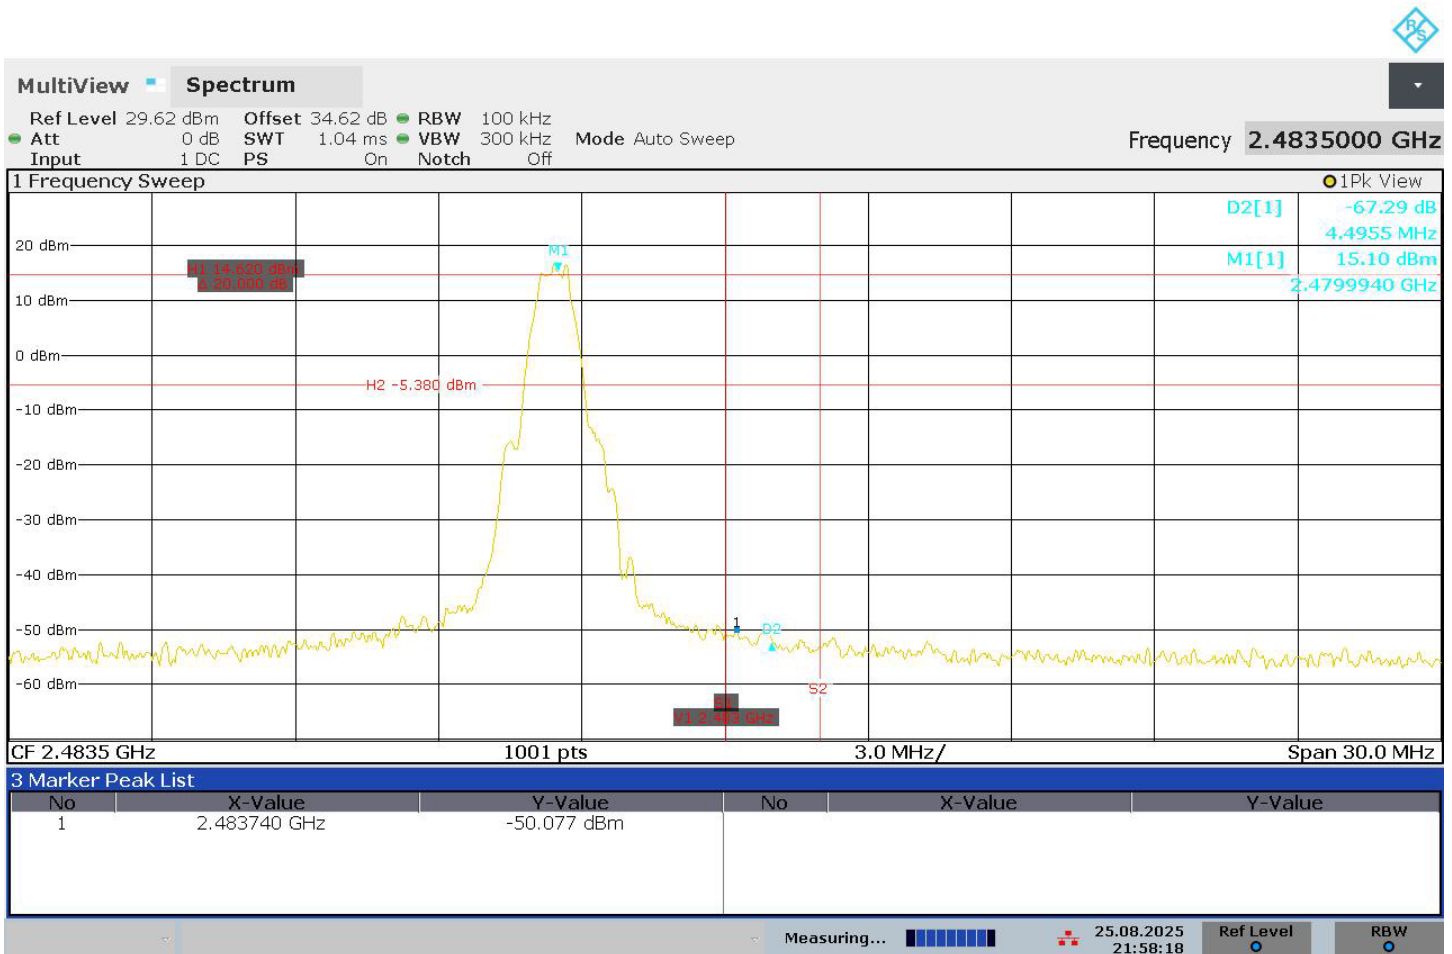


21:58:19 25.08.2025

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Fundamental Field Strength (dBμV/m)	Delta (dBm)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2480.00	2484.49	X	PK	84.78	67.29	17.49	73.98	56.49
2480.00	2484.49	X	PK	78.58	67.29	11.29	73.98	62.69
2480.00	2484.49	X	AVG	68.48	67.29	1.19	53.98	52.79
2480.00	2484.49	X	AVG	61.18	67.29	-6.11	53.98	60.09


8.12 Band-edge measurements – Coded

Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2020 section 7.8 or 11.13 as applicable.


Conducted Test Setup



Radiated Test Setup, 30 – 1000 MHz

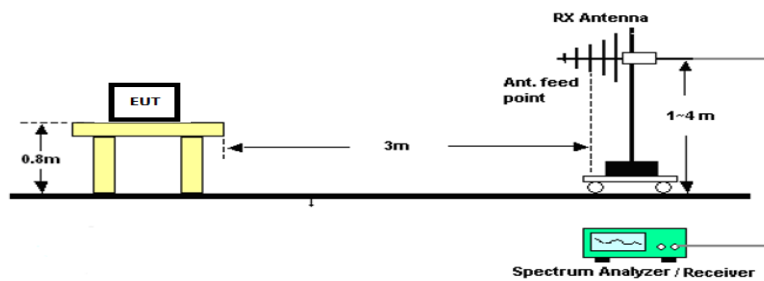


Radiated Test Setup, Above 1000 MHz

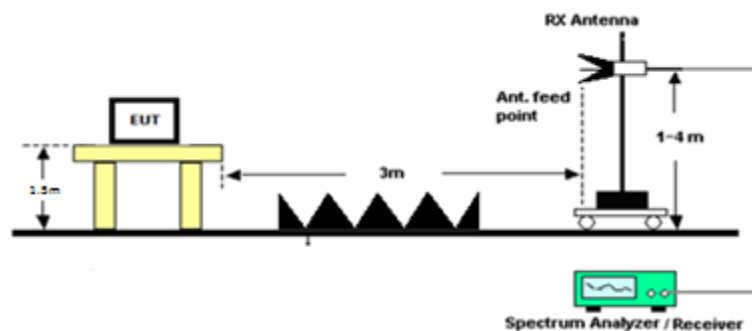


Band-edge Spectrum Plots

8.12.1 Lower Band Edge Plot

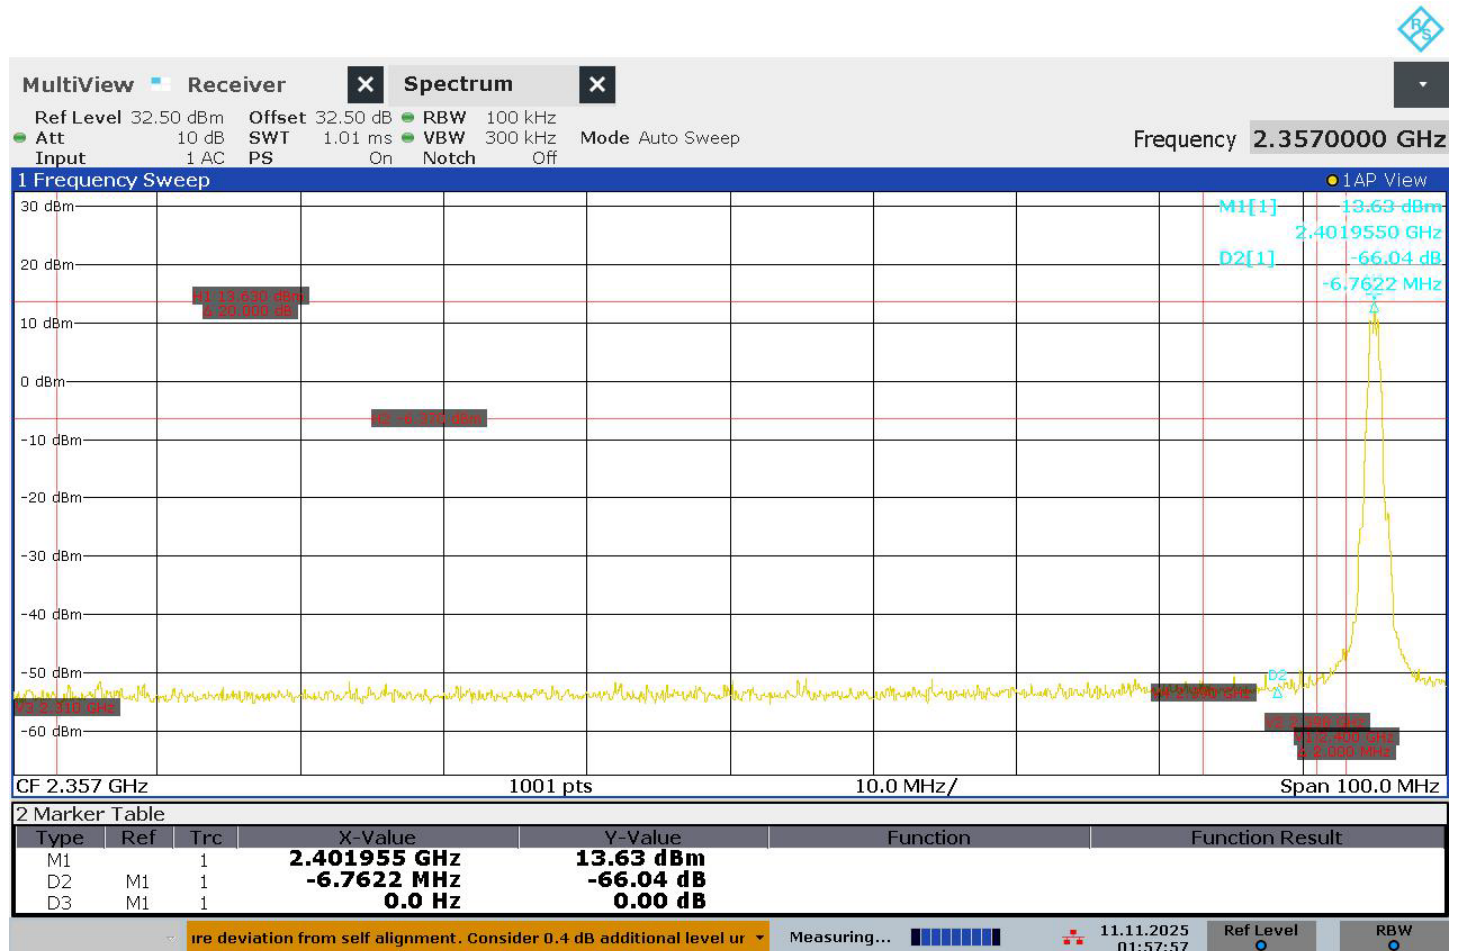

01:57:58 11.11.2025

8.12.2 Upper Band Edge Plot

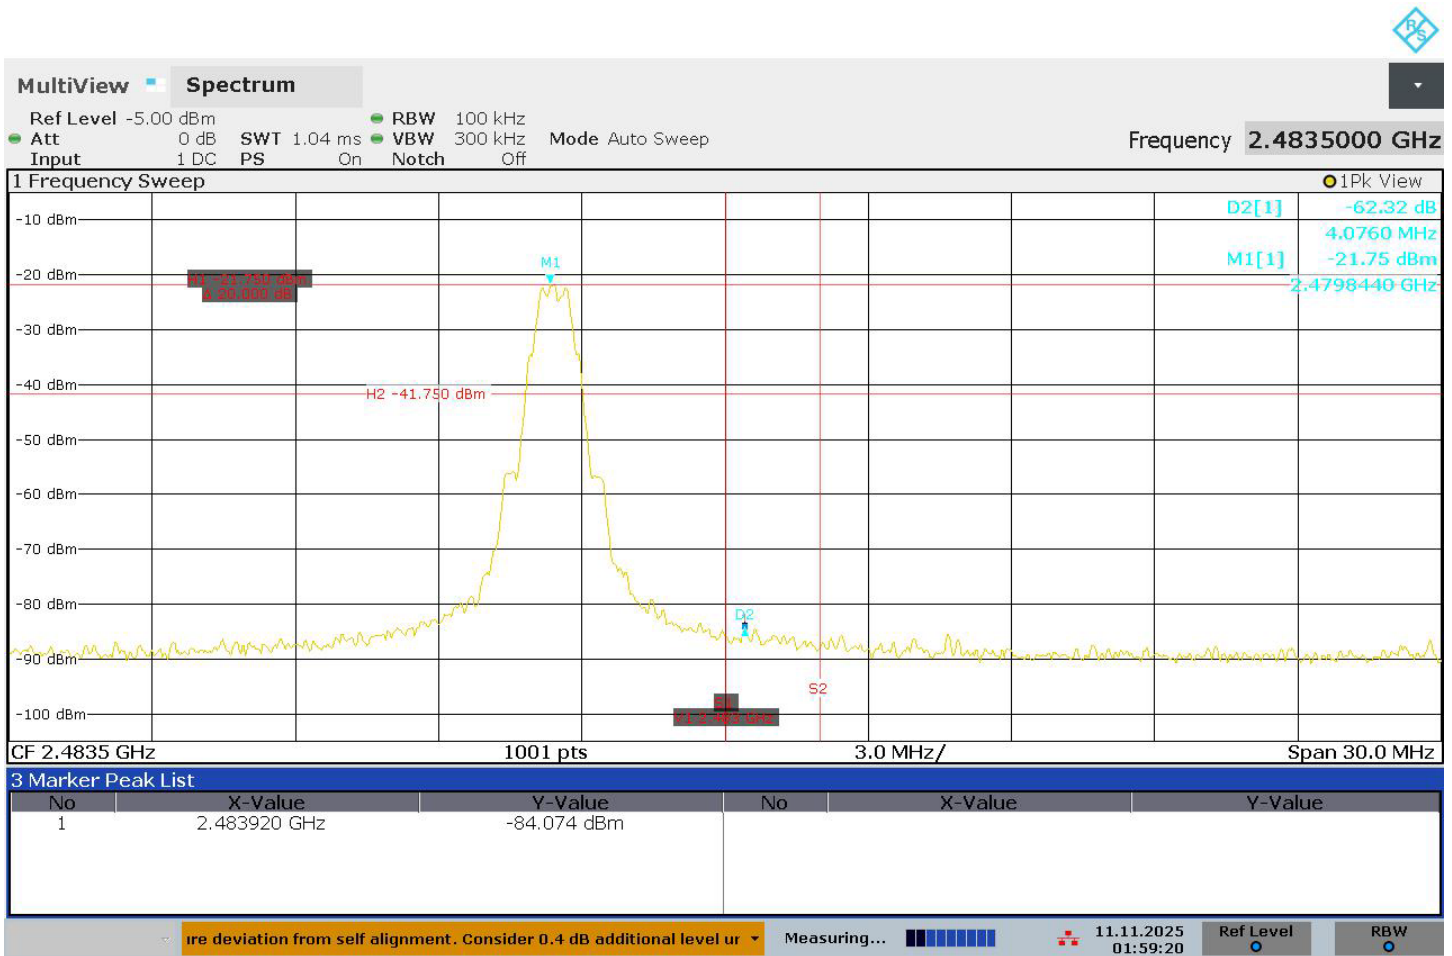


Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Fundamental Field Strength (dBμV/m)	Delta (dBm)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2480.00	2483.92	X	PK	77.81	62.32	15.49	73.98	58.49
2480.00	2483.92	X	PK	82.01	62.32	19.69	73.98	54.29
2480.00	2483.92	X	AVG	75.51	62.32	13.19	53.98	40.79
2480.00	2483.92	X	AVG	80.11	62.32	17.79	53.98	36.19


8.13 Radiated Emissions

Restricted Bands from FCC Part 15.205; Limits from FCC Part 15.209


Radiated Test Setup, Below 30 MHz

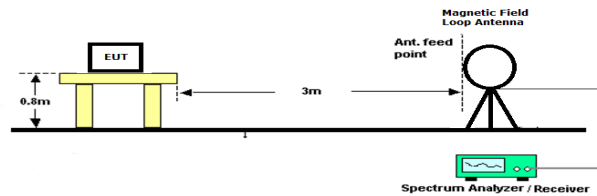

Radiated Test Setup, 30 – 1000 MHz

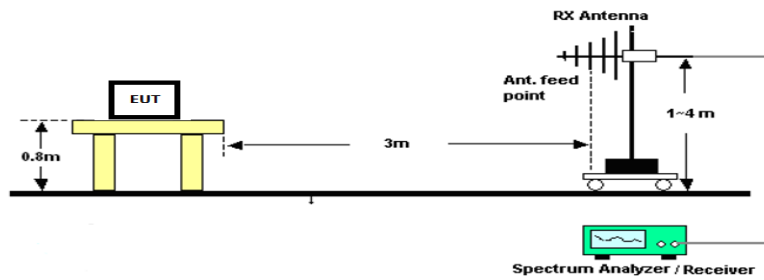

Radiated Test Setup, Above 1000 MHz

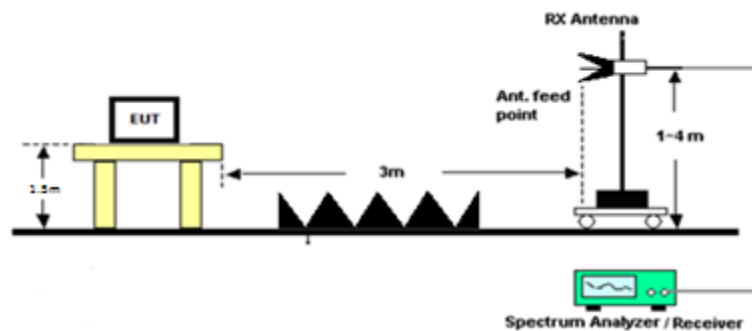

Radiated Emissions in Restricted Bands, Tabular Data


8.13.1 Radiated Emissions 9 kHz - 30 MHz


No emissions were noted within 20dB of the limit.

8.13.2 Radiated Emissions 30-1000 MHz

See test report: TR_21639-25_Remote_FCC 15B_1


8.13.3 Radiated Emissions, 2402 MHz – 1M

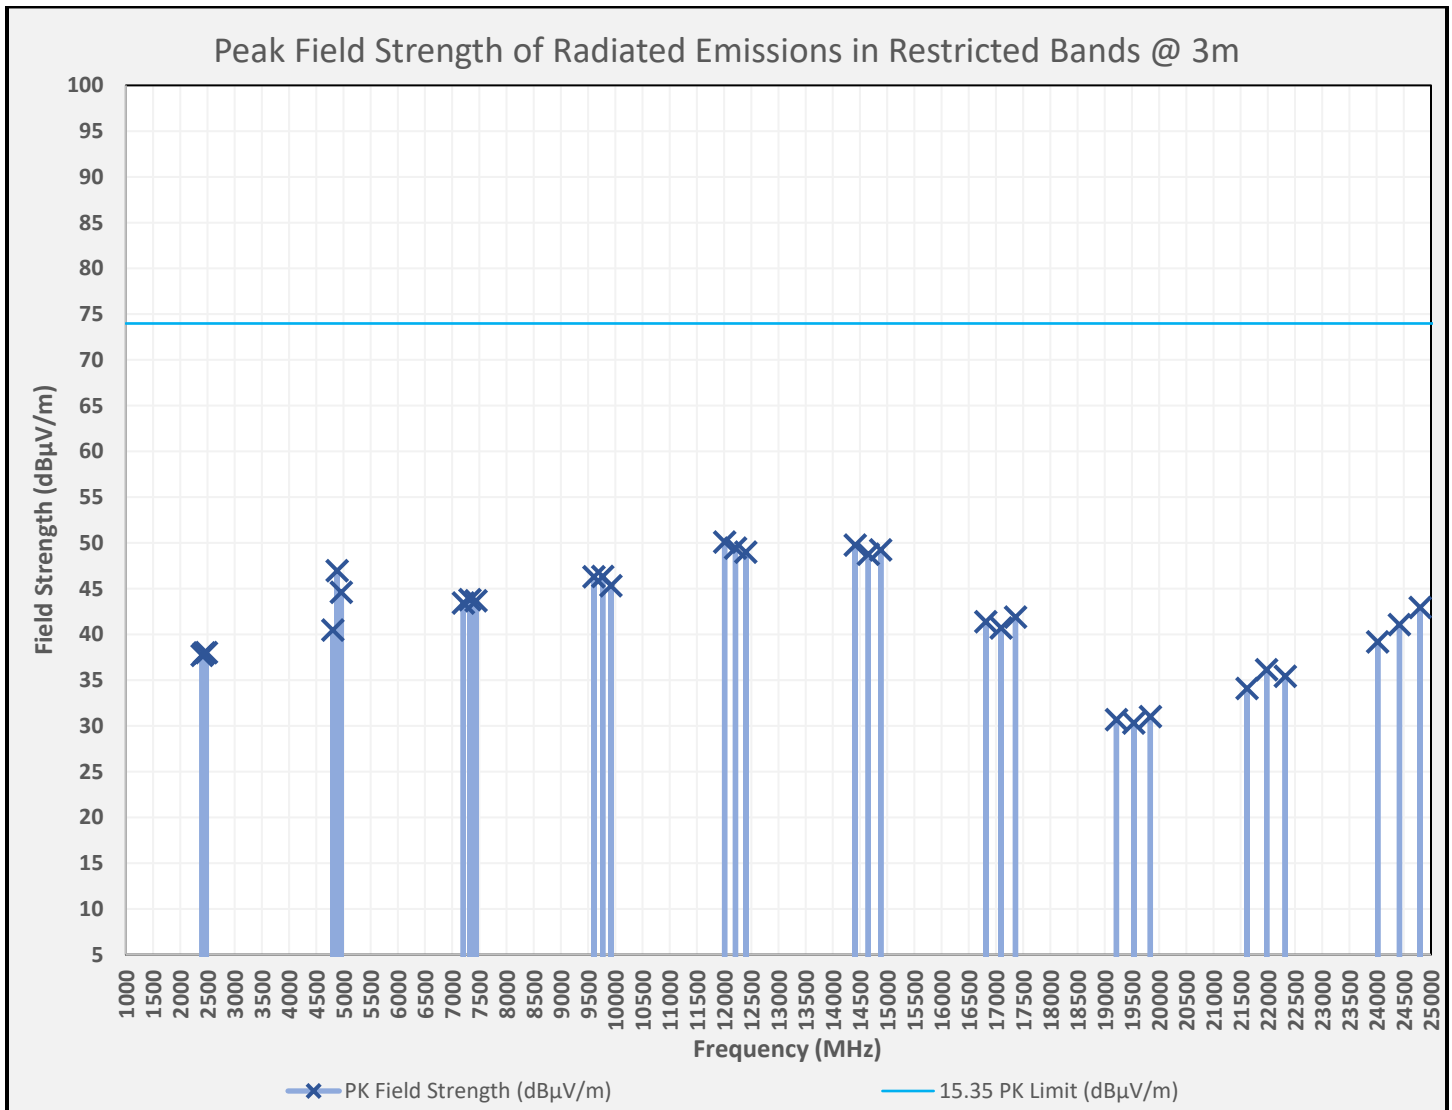


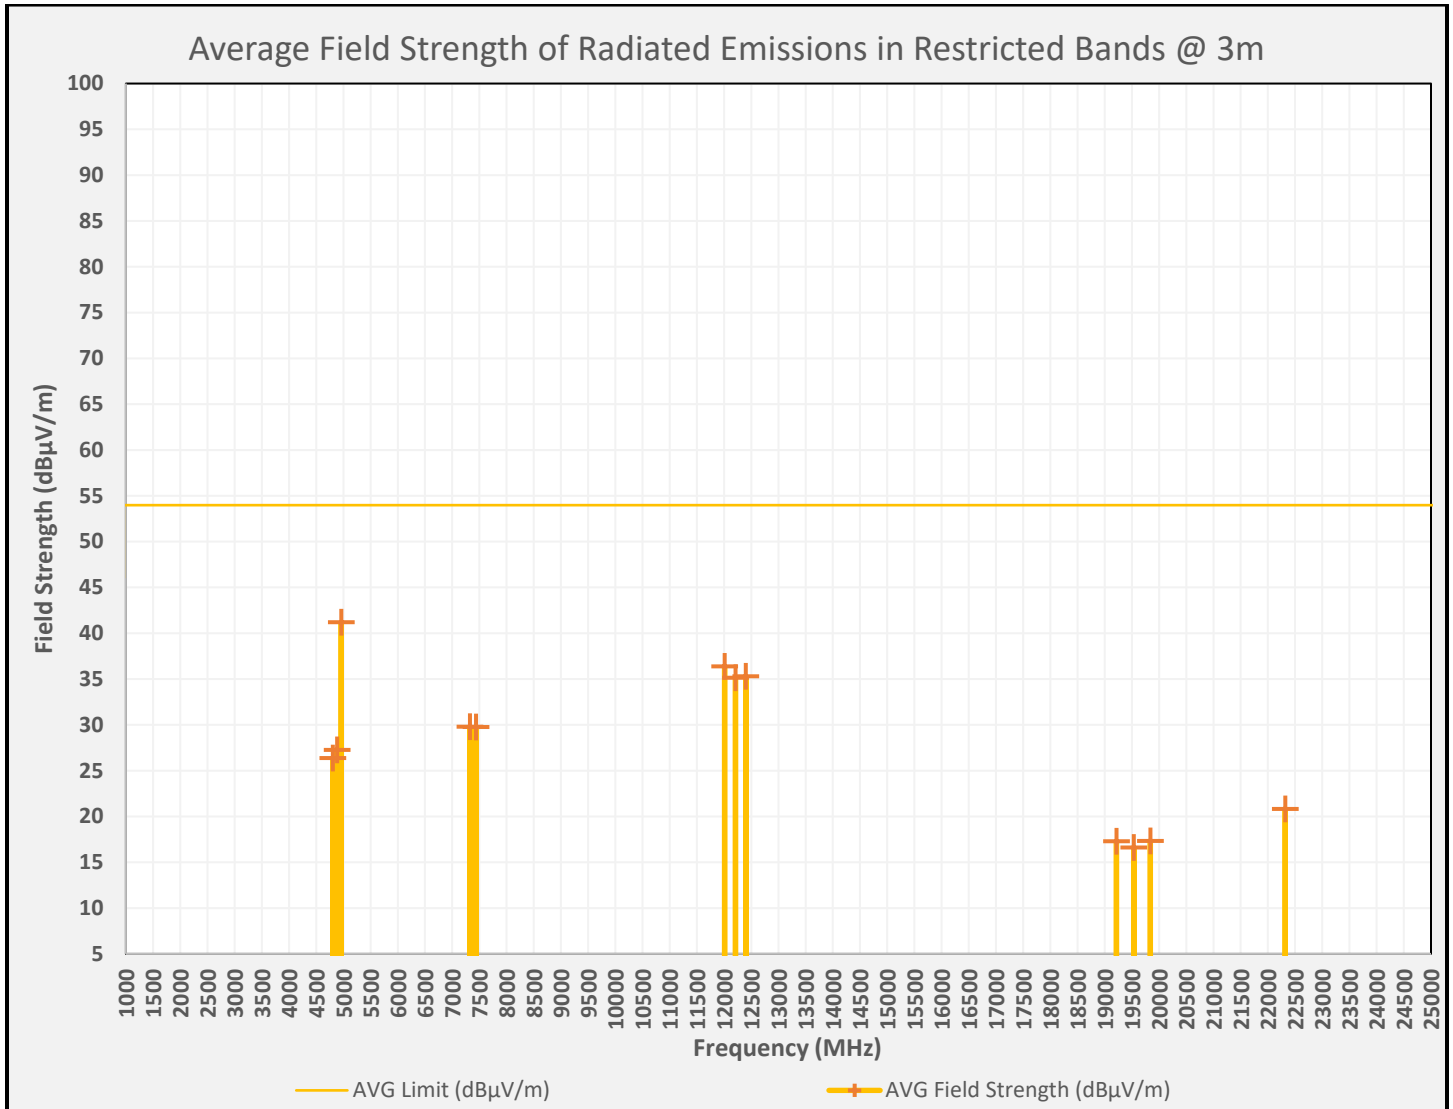

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor	Distance (m)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2402.00	2385.00	X	PK	1.40	H	5.62	0.00	32.10	3.00	39.11	73.98	34.87
2402.00	2385.00	X	PK	0.80	V	5.62	0.00	32.10	3.00	38.51	73.98	35.47
2402.00	2385.00	X	AVG	-14.70	H	5.62	0.00	32.10	3.00	23.01	53.98	30.97
2402.00	2385.00	X	AVG	-14.70	V	5.62	0.00	32.10	3.00	23.01	53.98	30.97
2402.00	4804.00	X	PK	-0.80	H	7.10	0.00	34.19	3.00	40.48	73.98	33.50
2402.00	4804.00	X	PK	-1.50	V	7.10	0.00	34.19	3.00	39.78	73.98	34.20
2402.00	7206.00		PK	-2.60	H	9.54	0.00	36.31	3.00	43.24	53.98	10.74
2402.00	7206.00		PK	-2.40	V	9.54	0.00	36.31	3.00	43.44	53.98	10.54
2402.00	9608.00		PK	-1.20	H	10.70	0.00	36.81	3.00	46.31	53.98	7.67
2402.00	9608.00		PK	-1.20	V	10.70	0.00	36.81	3.00	46.31	53.98	7.67
2402.00	9608.00				H	10.70	0.00	36.81	3.00		53.98	
2402.00	9608.00				V	10.70	0.00	36.81	3.00		53.98	
2402.00	12010.00	X	PK	-2.60	H	12.40	0.00	38.79	3.00	48.59	73.98	25.39
2402.00	12010.00	X	PK	-1.10	V	12.40	0.00	38.79	3.00	50.09	73.98	23.89
2402.00	14412.00		PK	-3.30	H	13.35	0.00	39.72	3.00	49.77	53.98	4.21
2402.00	14412.00		PK	-3.60	V	13.35	0.00	39.72	3.00	49.47	53.98	4.51
2402.00	16814.00		AVG	-15.50	H	14.60	0.00	42.29	3.00	41.40	53.98	12.58
2402.00	16814.00		AVG	-15.60	V	14.60	0.00	42.29	3.00	41.30	53.98	12.68
2402.00	16814.00				H	14.60	0.00	42.29	3.00		53.98	
2402.00	16814.00				V	14.60	0.00	42.29	3.00		53.98	
2402.00	19216.00	X	PK	-1.30	H	16.00	0.00	16.00	3.00	30.70	73.98	43.28
2402.00	19216.00	X	PK	-1.70	V	16.00	0.00	16.00	3.00	30.30	73.98	43.68
2402.00	21618.00		PK	0.30	H	16.90	0.00	16.90	3.00	34.10	53.98	19.88
2402.00	21618.00		PK	0.30	V	16.90	0.00	16.90	3.00	34.10	53.98	19.88
2402.00	24020.00		PK	2.80	H	17.95	0.00	17.95	3.00	38.70	53.98	15.28
2402.00	24020.00		PK	3.30	V	17.95	0.00	17.95	3.00	39.20	53.98	14.78
2402.00	24020.00				H	17.95	0.00	17.95	3.00		53.98	
2402.00	24020.00				V	17.95	0.00	17.95	3.00		53.98	


8.13.4 Radiated Emissions, 2442 MHz – 1M

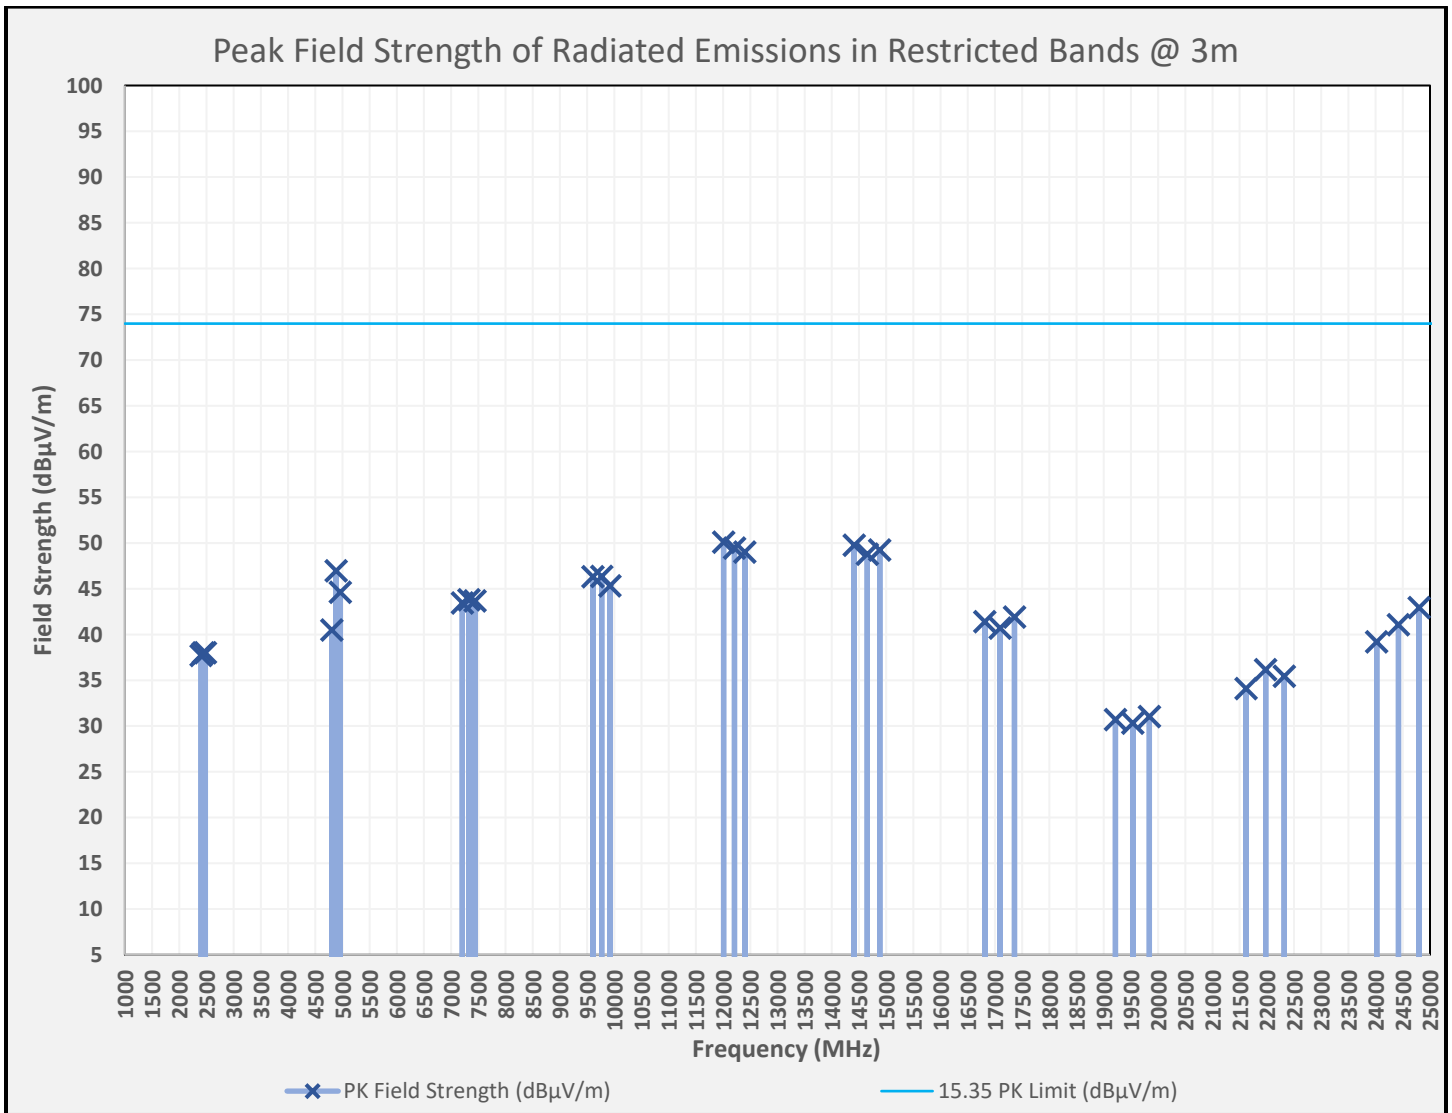


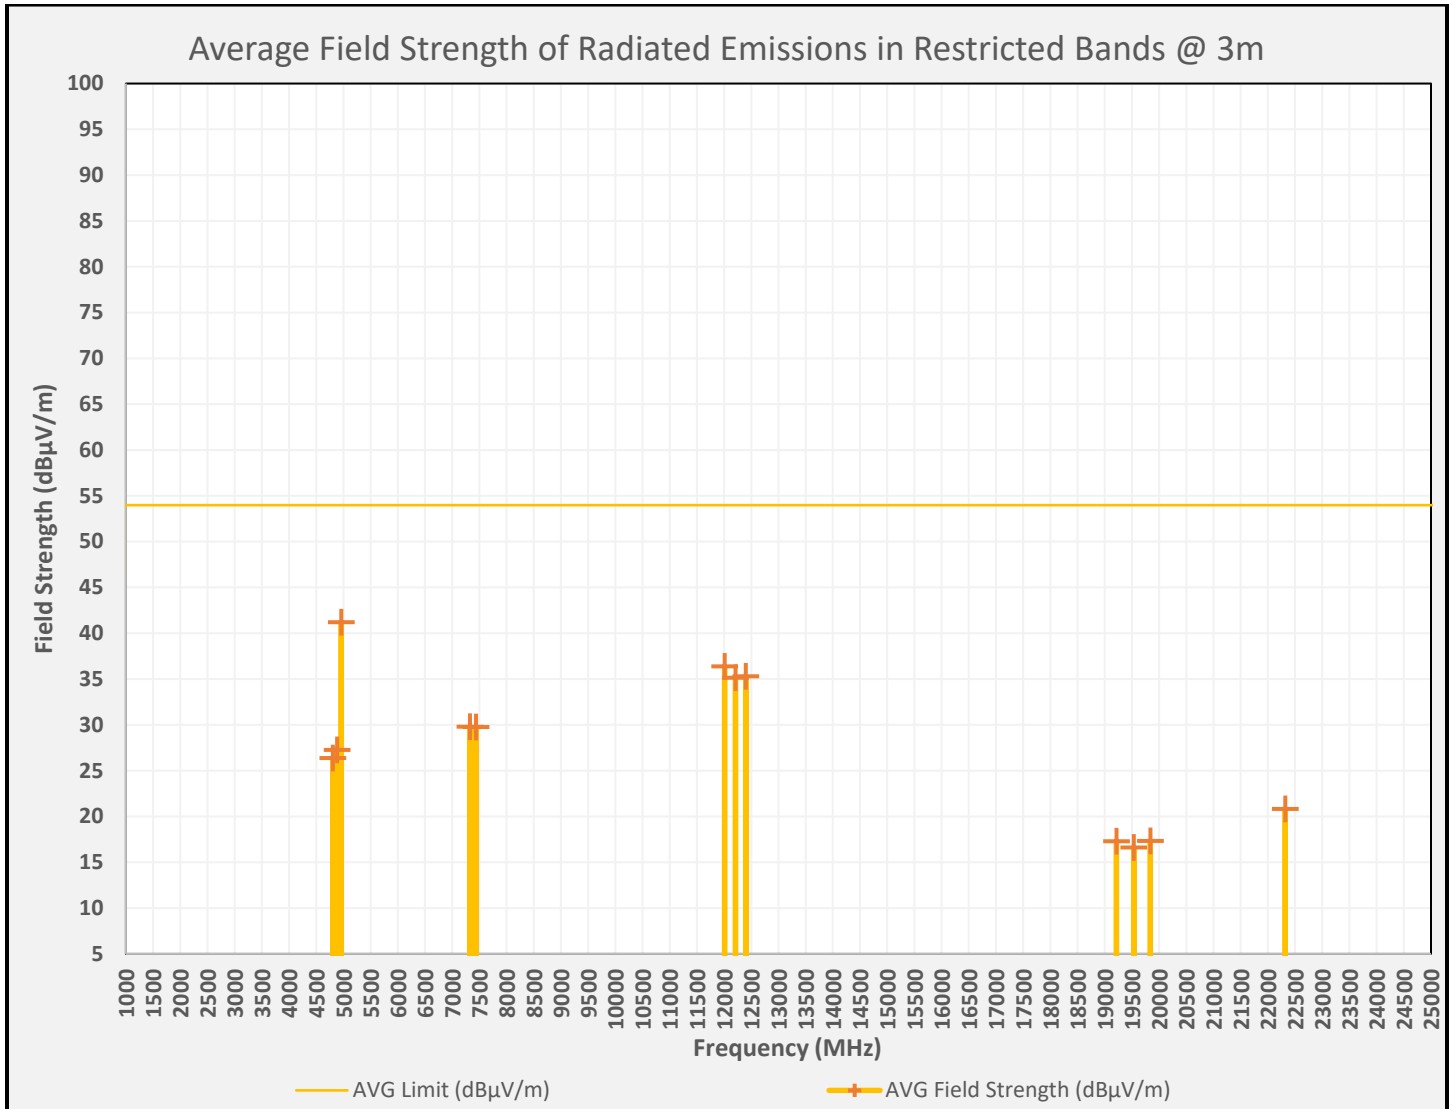

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2442.00	2362.00	X	PK	-0.60	H	5.60	0.00	31.97	3.00	36.96	73.98	37.02
2442.00	2362.00	X	PK	-1.20	V	5.60	0.00	31.97	3.00	36.36	73.98	37.62
2442.00	2362.00	X	AVG	-14.60	H	5.60	0.00	31.97	3.00	22.96	53.98	31.02
2442.00	2362.00	X	AVG	-14.60	V	5.60	0.00	31.97	3.00	22.96	53.98	31.02
2442.00	4884.00	X	PK	4.70	H	7.36	0.00	34.10	3.00	46.16	73.98	27.82
2442.00	4884.00	X	PK	5.50	V	7.36	0.00	34.10	3.00	46.96	73.98	27.02
2442.00	7326.00	X	PK	-2.20	H	9.59	0.00	36.41	3.00	43.80	73.98	30.18
2442.00	7326.00	X	PK	-2.40	V	9.59	0.00	36.41	3.00	43.60	73.98	30.38
2442.00	7326.00	X	AVG	-16.20	H	9.59	0.00	36.41	3.00	29.80	53.98	24.18
2442.00	7326.00	X	AVG	-16.30	V	9.59	0.00	36.41	3.00	29.70	53.98	24.28
2442.00	9768.00		PK	-1.70	H	11.01	0.00	37.03	3.00	46.34	53.98	7.64
2442.00	9768.00		PK	-1.90	V	11.01	0.00	37.03	3.00	46.14	53.98	7.84
2442.00	12210.00	X	PK	-2.10	H	12.50	0.00	39.05	3.00	49.44	73.98	24.54
2442.00	12210.00	X	PK	-3.10	V	12.50	0.00	39.05	3.00	48.44	73.98	25.54
2442.00	14652.00		PK	-4.70	H	13.61	0.00	39.87	3.00	48.77	53.98	5.21
2442.00	14652.00		PK	-5.00	V	13.61	0.00	39.87	3.00	48.47	53.98	5.51
2442.00	14652.00				H	13.61	0.00	39.87	3.00		53.98	
2442.00	14652.00				V	13.61	0.00	39.87	3.00		53.98	
2442.00	17094.00		AVG	-15.90	H	14.66	0.00	41.94	3.00	40.70	53.98	13.28
2442.00	17094.00		AVG	-15.90	V	14.66	0.00	41.94	3.00	40.70	53.98	13.28
2442.00	19536.00	X	PK	-0.90	H	15.61	0.00	15.61	3.00	30.32	73.98	43.66
2442.00	19536.00	X	PK	-1.50	V	15.61	0.00	15.61	3.00	29.72	73.98	44.26
2442.00	21978.00		PK	1.90	H	16.97	0.00	16.97	3.00	35.85	53.98	18.13
2442.00	21978.00		PK	2.20	V	16.97	0.00	16.97	3.00	36.15	53.98	17.83
2442.00	21978.00				H	16.97	0.00	16.97	3.00		53.98	
2442.00	24420.00		PK	4.50	H	18.29	0.00	18.29	3.00	41.07	53.98	12.91
2442.00	24420.00		PK	4.20	V	18.29	0.00	18.29	3.00	40.77	53.98	13.21
2442.00	24420.00				H	18.29	0.00	18.29	3.00		53.98	
2442.00	24420.00				V	18.29	0.00	18.29	3.00		53.98	


8.13.5 Radiated Emissions, 2480 MHz – 1M

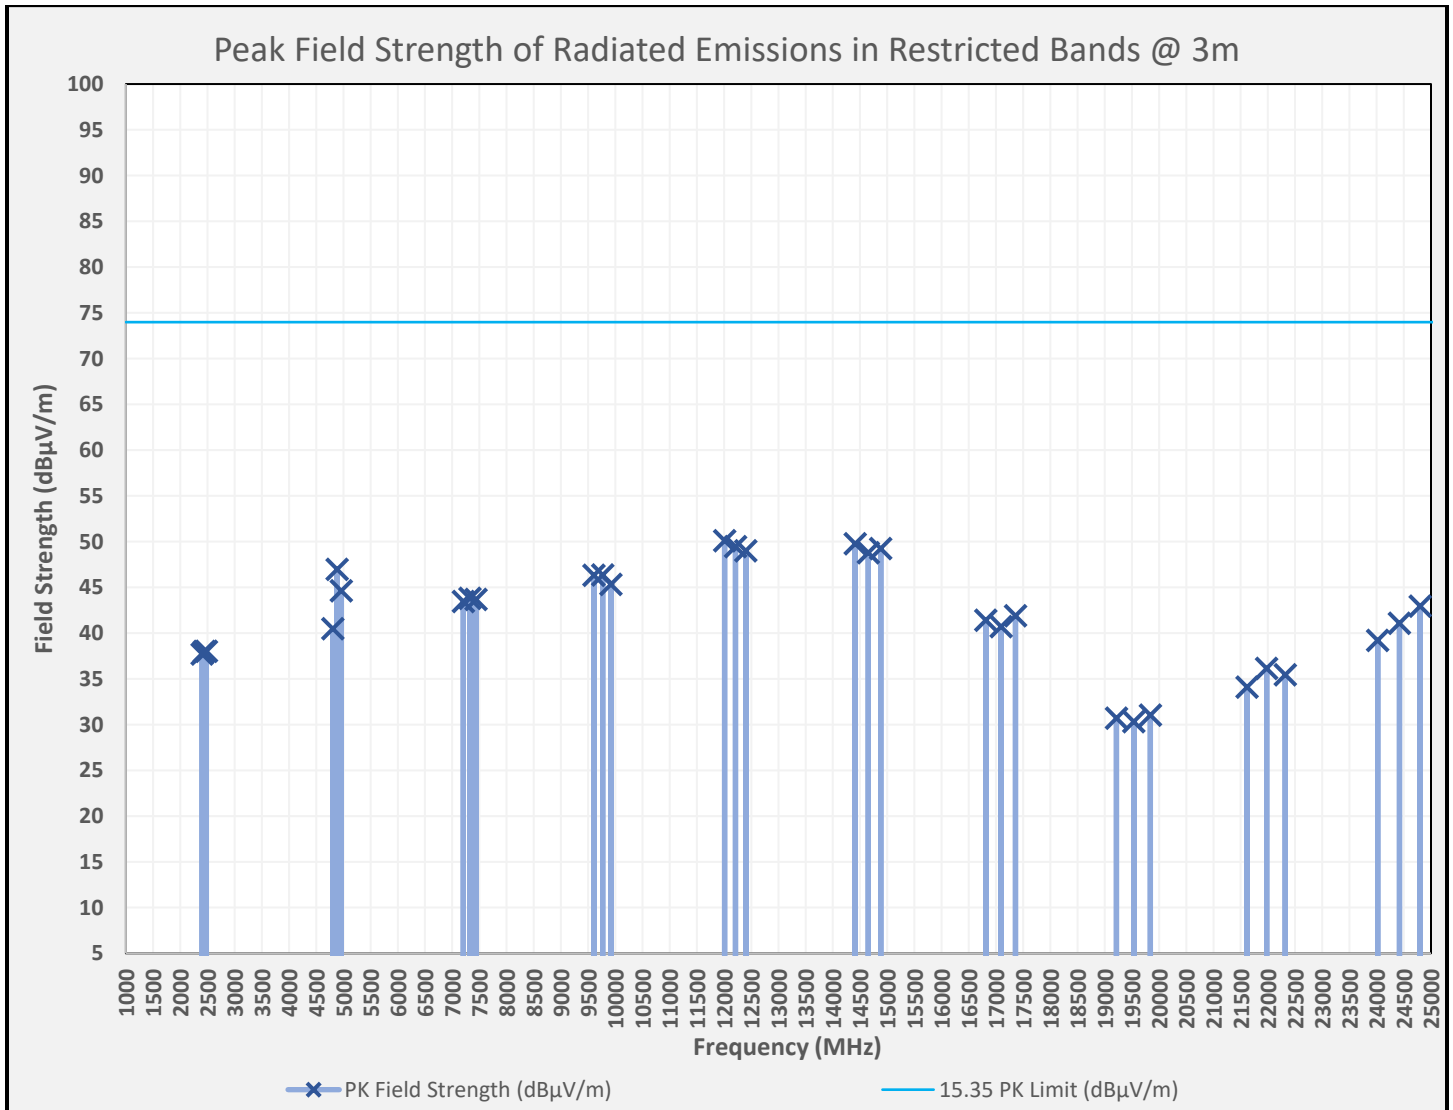


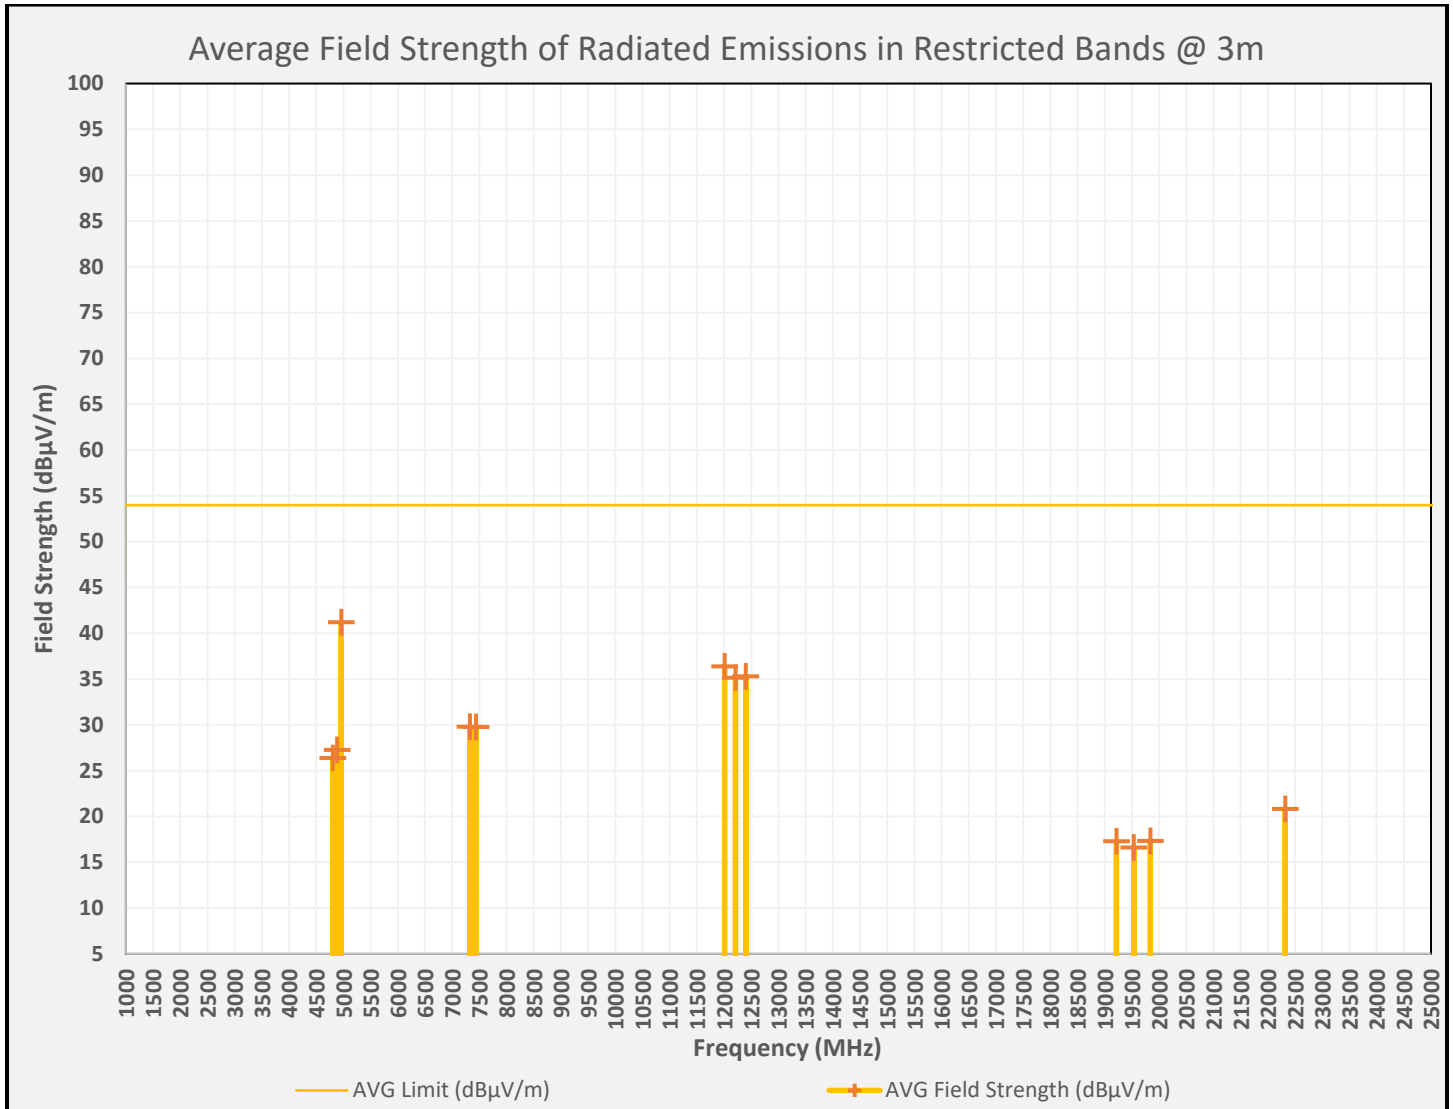

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2480.00	2342.00	X	PK	9.12	H	5.56	0.00	31.91	3.00	46.59	53.98	7.39
2480.00	2342.00	X	PK	8.52	V	5.56	0.00	31.91	3.00	45.99	53.98	7.99
2480.00	2342.00	X	AVG	-5.48	H	5.56	0.00	31.91	3.00	31.99	53.98	21.99
2480.00	2342.00	X	AVG	-5.48	V	5.56	0.00	31.91	3.00	31.99	53.98	21.99
2480.00	4960.00	X	PK	2.90	H	7.72	0.00	33.99	3.00	44.61	53.98	9.37
2480.00	4960.00	X	PK	-0.50	V	7.72	0.00	33.99	3.00	41.21	53.98	12.77
2480.00	4960.00	X	AVG	-14.50	H	7.72	0.00	33.99	3.00	27.21	53.98	26.77
2480.00	4960.00	X	AVG	-14.50	V	7.72	0.00	33.99	3.00	27.21	53.98	26.77
2480.00	7440.00	X	PK	-2.10	H	9.56	0.00	36.21	3.00	43.67	73.98	30.31
2480.00	7440.00	X	PK	-2.30	V	9.56	0.00	36.21	3.00	43.47	73.98	30.51
2480.00	9920.00		PK	-3.10	H	11.15	0.00	37.07	3.00	45.12	53.98	8.86
2480.00	9920.00		PK	-2.90	V	11.15	0.00	37.07	3.00	45.32	53.98	8.66
2480.00	12400.00	X	PK	-3.30	H	12.54	0.00	39.26	3.00	48.50	73.98	25.48
2480.00	12400.00	X	PK	-2.80	V	12.54	0.00	39.26	3.00	49.00	73.98	24.98
2480.00	12400.00	X	AVG	-16.50	H	12.54	0.00	39.26	3.00	35.30	53.98	18.68
2480.00	12400.00	X	AVG	-16.50	V	12.54	0.00	39.26	3.00	35.30	53.98	18.68
2480.00	14880.00		PK	-4.30	H	13.44	0.00	40.09	3.00	49.24	53.98	4.74
2480.00	14880.00		PK	-4.50	V	13.44	0.00	40.09	3.00	49.04	53.98	4.94
2480.00	14880.00				H	13.44	0.00	40.09	3.00		53.98	
2480.00	14880.00				V	13.44	0.00	40.09	3.00		53.98	
2480.00	17360.00		AVG	-14.70	H	15.01	0.00	41.59	3.00	41.90	53.98	12.08
2480.00	17360.00		AVG	-14.70	V	15.01	0.00	41.59	3.00	41.90	53.98	12.08
2480.00	19840.00	X	PK	-1.60	H	16.21	0.00	16.21	3.00	30.83	73.98	43.15
2480.00	19840.00	X	PK	-1.40	V	16.21	0.00	16.21	3.00	31.03	73.98	42.95
2480.00	19840.00	X	AVG	-15.10	H	16.21	0.00	16.21	3.00	17.33	53.98	36.65
2480.00	19840.00	X	AVG	-15.10	V	16.21	0.00	16.21	3.00	17.33	53.98	36.65
2480.00	22320.00	X	PK	1.40	H	17.02	0.00	17.02	3.00	35.43	73.98	38.55
2480.00	22320.00	X	PK	0.80	V	17.02	0.00	17.02	3.00	34.83	73.98	39.15
2480.00	22320.00	X	AVG	-13.20	H	17.02	0.00	17.02	3.00	20.83	53.98	33.15
2480.00	22320.00	X	AVG	-13.20	V	17.02	0.00	17.02	3.00	20.83	53.98	33.15
2480.00	24800.00		PK	6.70	H	18.07	0.00	18.07	3.00	42.84	53.98	11.14
2480.00	24800.00		PK	6.80	V	18.07	0.00	18.07	3.00	42.94	53.98	11.04
2480.00	24800.00				H	18.07	0.00	18.07	3.00		53.98	
2480.00	24800.00				V	18.07	0.00	18.07	3.00		53.98	


8.13.6 Radiated Emissions, 2402 MHz – Coded

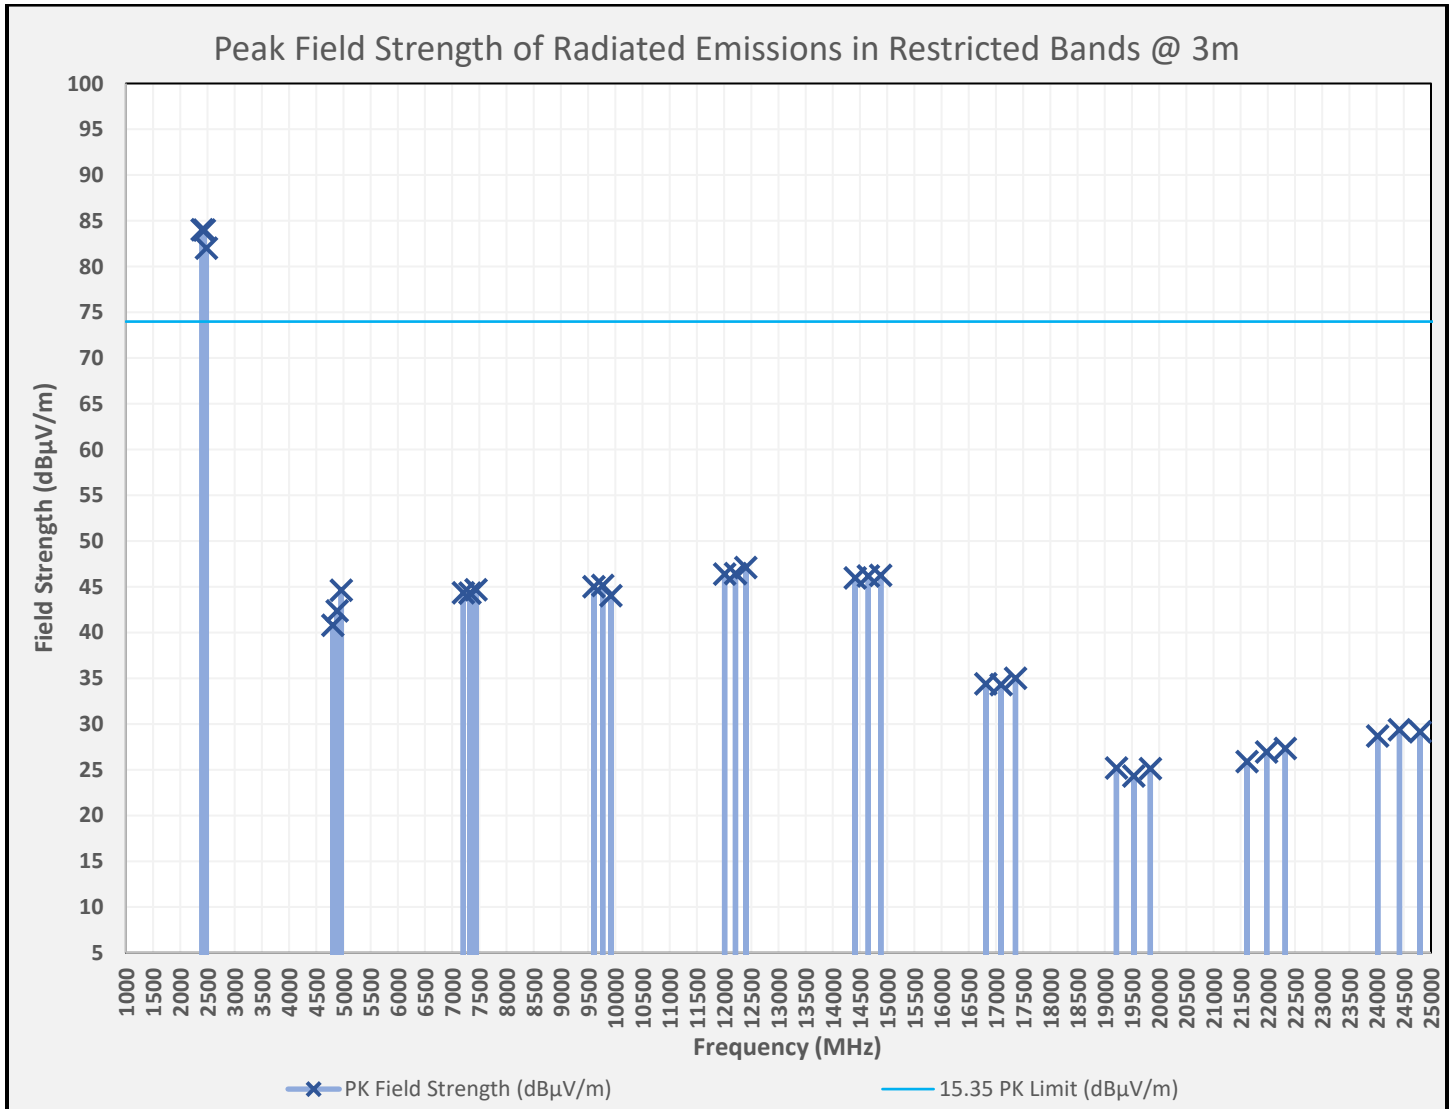


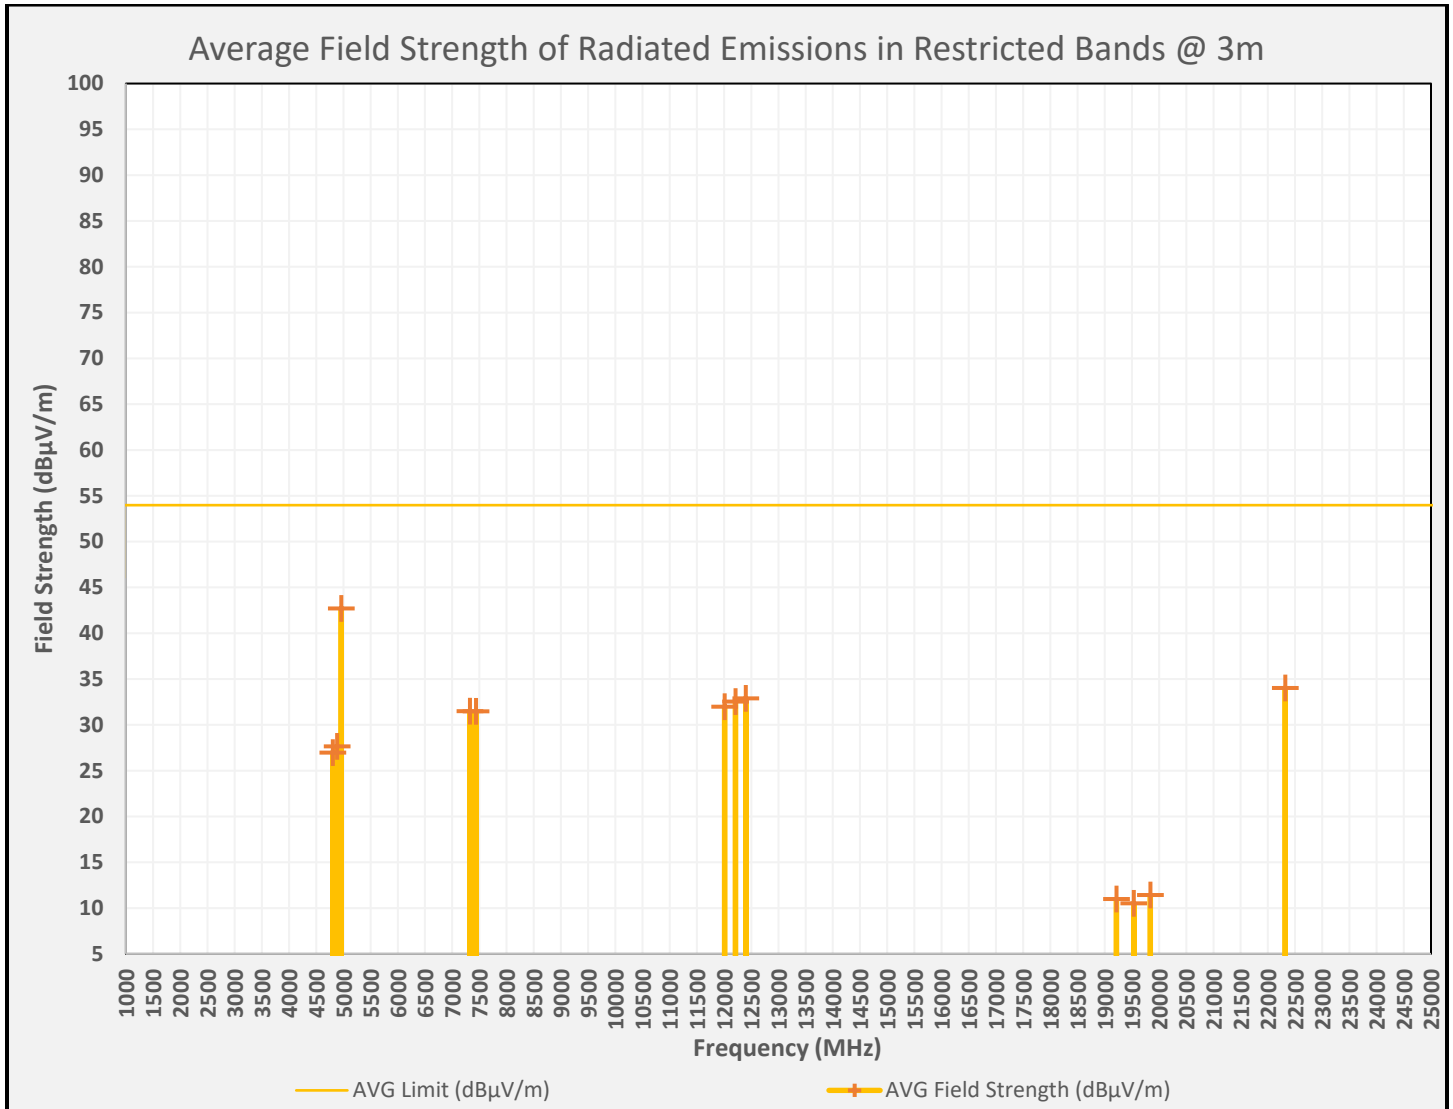

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d)	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor	Distance (m)	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2402.00	4804.00	X	PK	-0.90	H	7.10	0.00	34.19	3.00	40.38	73.98	33.60
2402.00	4804.00	X	PK	-0.50	V	7.10	0.00	34.19	3.00	40.78	73.98	33.20
2402.00	4804.00	X	AVG	-14.40	H	7.10	0.00	34.19	3.00	26.88	53.98	27.10
2402.00	4804.00	X	AVG	-14.30	V	7.10	0.00	34.19	3.00	26.98	53.98	27.00
2402.00	7206.00		PK	-1.90	H	9.54	0.00	36.31	3.00	43.94	53.98	10.04
2402.00	7206.00		PK	-1.50	V	9.54	0.00	36.31	3.00	44.34	53.98	9.64
2402.00	9608.00		PK	-2.50	H	10.70	0.00	36.81	3.00	45.01	53.98	8.97
2402.00	9608.00		PK	-2.50	V	10.70	0.00	36.81	3.00	45.01	53.98	8.97
2402.00	12010.00	X	PK	-4.80	H	12.40	0.00	38.79	3.00	46.39	73.98	27.59
2402.00	12010.00	X	PK	-4.90	V	12.40	0.00	38.79	3.00	46.29	73.98	27.69
2402.00	12010.00	X	AVG	-19.30	H	12.40	0.00	38.79	3.00	31.89	53.98	22.09
2402.00	12010.00	X	AVG	-19.20	V	12.40	0.00	38.79	3.00	31.99	53.98	21.99
2402.00	14412.00		PK	-7.10	H	13.35	0.00	39.72	3.00	45.97	53.98	8.01
2402.00	14412.00		PK	-7.20	V	13.35	0.00	39.72	3.00	45.87	53.98	8.11
2402.00	16814.00		AVG	-22.60	H	14.60	0.00	42.29	3.00	34.30	53.98	19.68
2402.00	16814.00		AVG	-22.50	V	14.60	0.00	42.29	3.00	34.40	53.98	19.58
2402.00	19216.00	X	PK	-7.60	H	16.00	0.00	16.00	3.00	24.40	73.98	49.58
2402.00	19216.00	X	PK	-6.80	V	16.00	0.00	16.00	3.00	25.20	73.98	48.78
2402.00	19216.00	X	AVG	-21.10	H	16.00	0.00	16.00	3.00	10.90	53.98	43.08
2402.00	19216.00	X	AVG	-21.00	V	16.00	0.00	16.00	3.00	11.00	53.98	42.98
2402.00	21618.00		PK	-8.30	H	16.90	0.00	16.90	3.00	25.50	53.98	28.48
2402.00	21618.00		PK	-7.90	V	16.90	0.00	16.90	3.00	25.90	53.98	28.08
2402.00	24020.00		PK	-7.20	H	17.95	0.00	17.95	3.00	28.70	53.98	25.28
2402.00	24020.00		PK	-7.80	V	17.95	0.00	17.95	3.00	28.10	53.98	25.88


8.13.7 Radiated Emissions, 2442 MHz – Coded

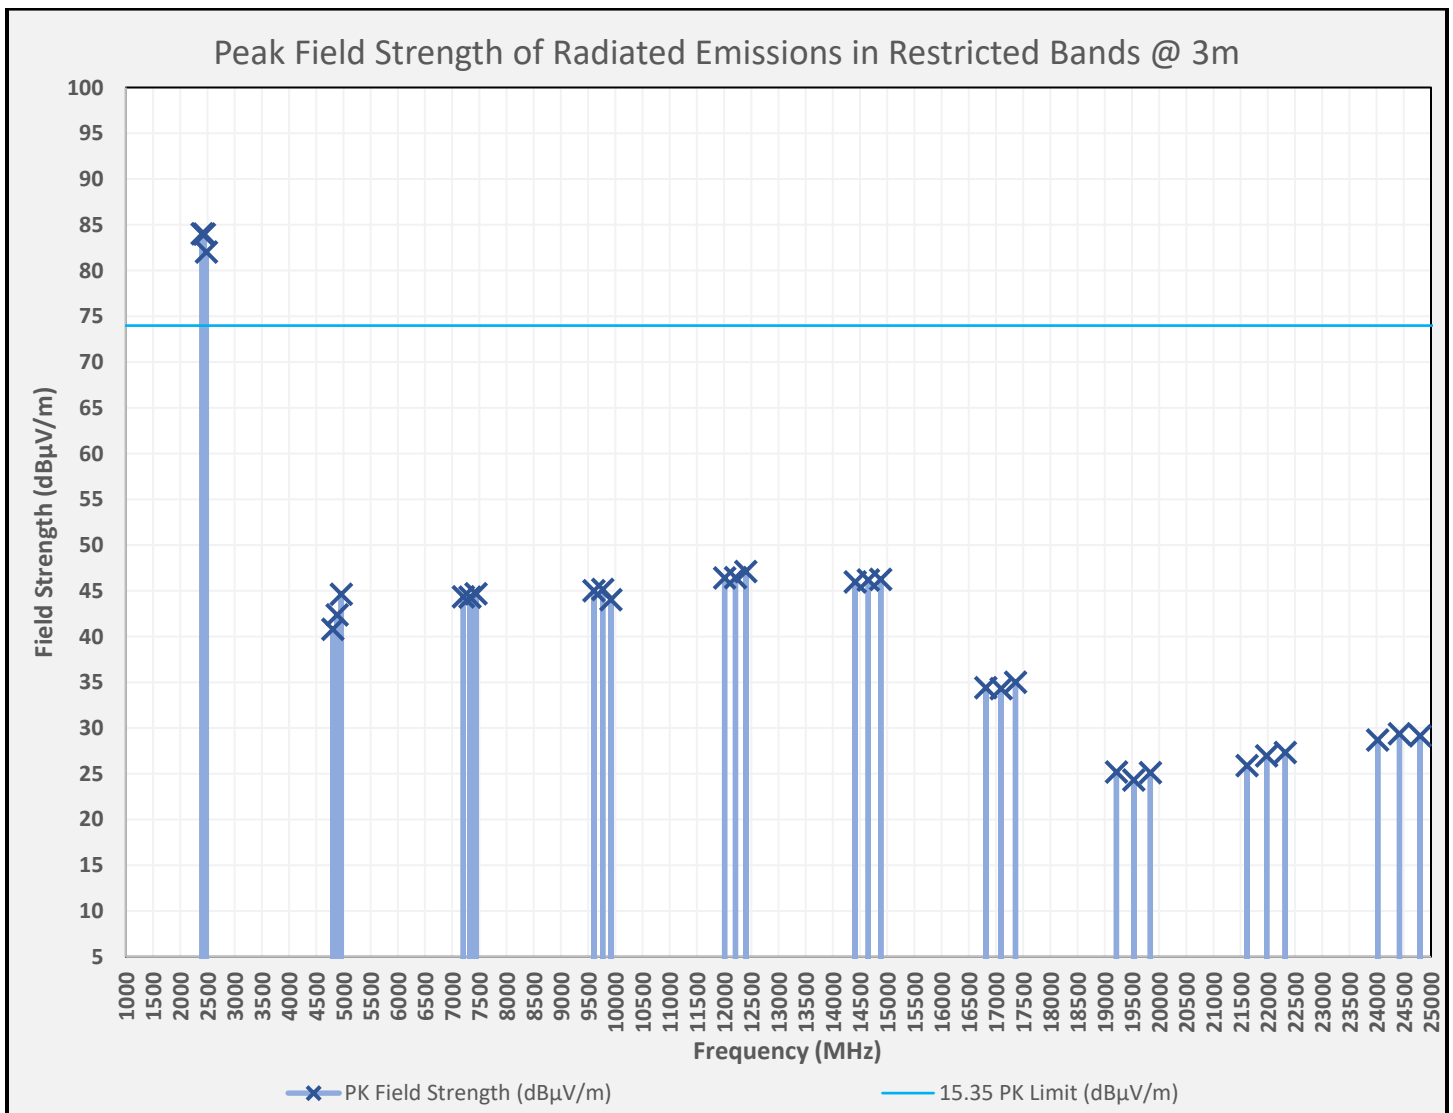


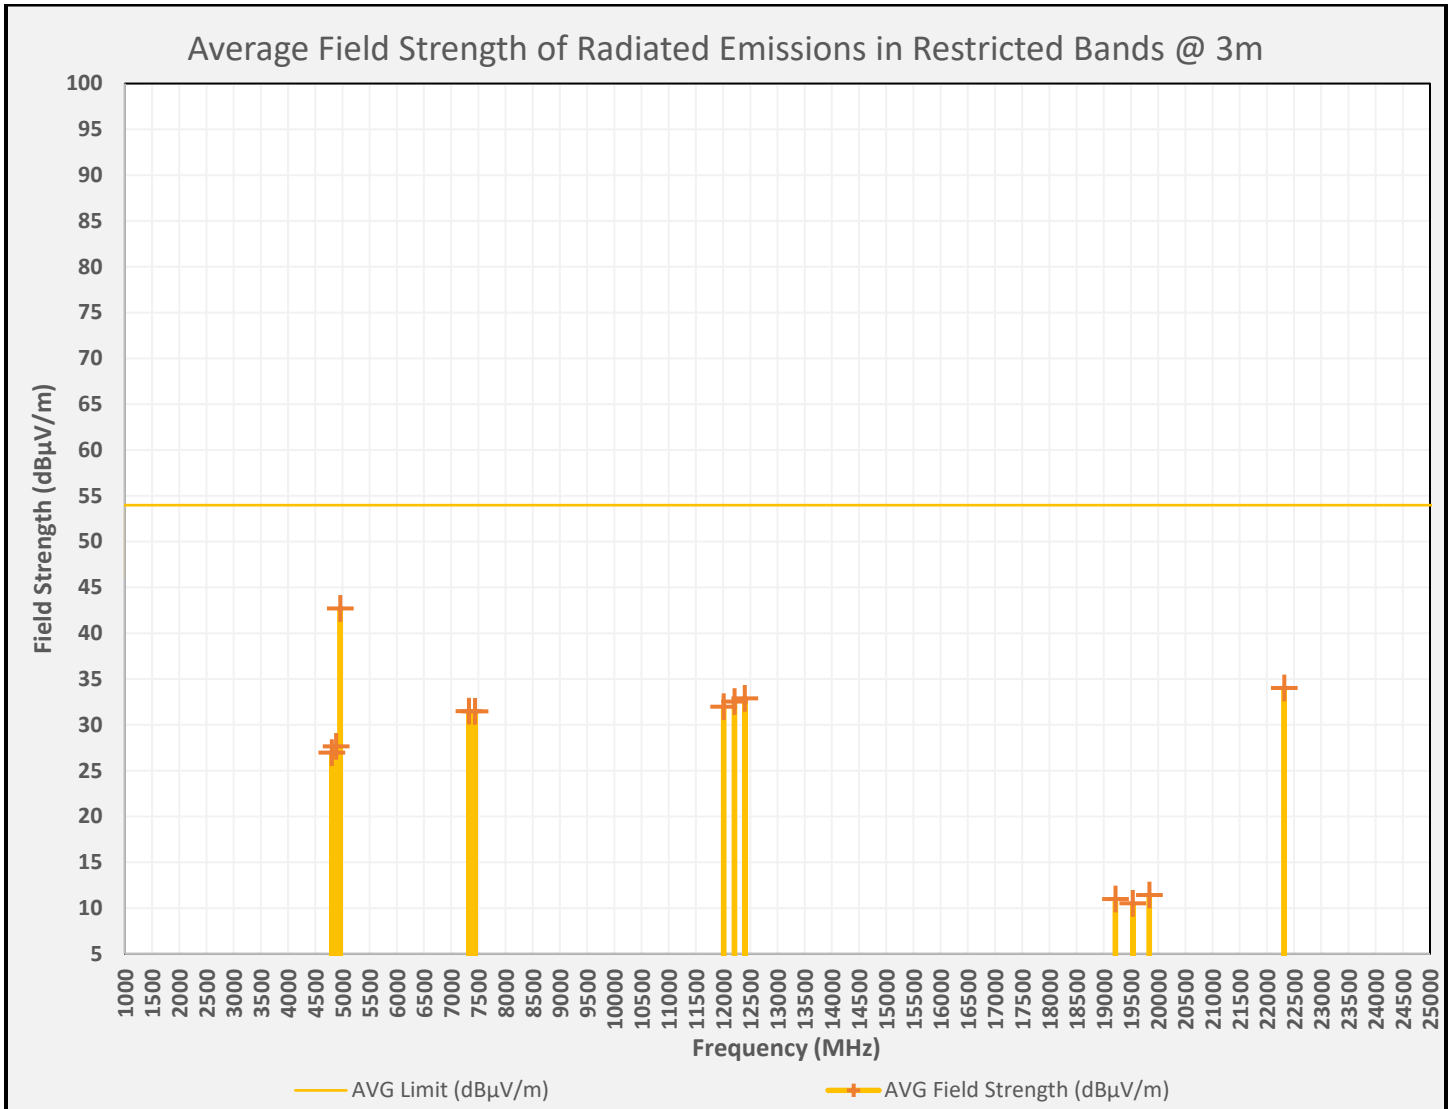

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2442.00	4884.00	X	PK	0.90	H	7.36	0.00	34.10	3.00	42.36	73.98	31.62
2442.00	4884.00	X	PK	0.00	V	7.36	0.00	34.10	3.00	41.46	73.98	32.52
2442.00	4884.00	X	AVG	-14.00	H	7.36	0.00	34.10	3.00	27.46	53.98	26.52
2442.00	4884.00	X	AVG	-13.80	V	7.36	0.00	34.10	3.00	27.66	53.98	26.32
2442.00	7326.00	X	PK	-1.70	H	9.59	0.00	36.41	3.00	44.30	73.98	29.68
2442.00	7326.00	X	PK	-1.80	V	9.59	0.00	36.41	3.00	44.20	73.98	29.78
2442.00	7326.00	X	AVG	-15.10	H	9.59	0.00	36.41	3.00	30.90	53.98	23.08
2442.00	7326.00	X	AVG	-14.50	V	9.59	0.00	36.41	3.00	31.50	53.98	22.48
2442.00	9768.00		PK	-3.50	H	11.01	0.00	37.03	3.00	44.54	53.98	9.44
2442.00	9768.00		PK	-2.90	V	11.01	0.00	37.03	3.00	45.14	53.98	8.84
2442.00	12210.00	X	PK	-5.30	H	12.50	0.00	39.05	3.00	46.24	73.98	27.74
2442.00	12210.00	X	PK	-5.10	V	12.50	0.00	39.05	3.00	46.44	73.98	27.54
2442.00	12210.00	X	AVG	-19.00	H	12.50	0.00	39.05	3.00	32.54	53.98	21.44
2442.00	12210.00	X	AVG	-19.00	V	12.50	0.00	39.05	3.00	32.54	53.98	21.44
2442.00	14652.00		PK	-7.30	H	13.61	0.00	39.87	3.00	46.17	53.98	7.81
2442.00	14652.00		PK	-7.50	V	13.61	0.00	39.87	3.00	45.97	53.98	8.01
2442.00	17094.00		AVG	-22.30	H	14.66	0.00	41.94	3.00	34.30	53.98	19.68
2442.00	17094.00		AVG	-22.30	V	14.66	0.00	41.94	3.00	34.30	53.98	19.68
2442.00	19536.00	X	PK	-7.10	H	15.61	0.00	15.61	3.00	24.12	73.98	49.86
2442.00	19536.00	X	PK	-6.90	V	15.61	0.00	15.61	3.00	24.32	73.98	49.66
2442.00	19536.00	X	AVG	-20.80	H	15.61	0.00	15.61	3.00	10.42	53.98	43.56
2442.00	19536.00	X	AVG	-20.70	V	15.61	0.00	15.61	3.00	10.52	53.98	43.46
2442.00	21978.00		PK	-7.30	H	16.97	0.00	16.97	3.00	26.65	53.98	27.33
2442.00	21978.00		PK	-7.00	V	16.97	0.00	16.97	3.00	26.95	53.98	27.03
2442.00	24420.00		PK	-7.20	H	18.29	0.00	18.29	3.00	29.37	53.98	24.61
2442.00	24420.00		PK	-7.60	V	18.29	0.00	18.29	3.00	28.97	53.98	25.01

8.13.8 Radiated Emissions, 2480 MHz – Coded

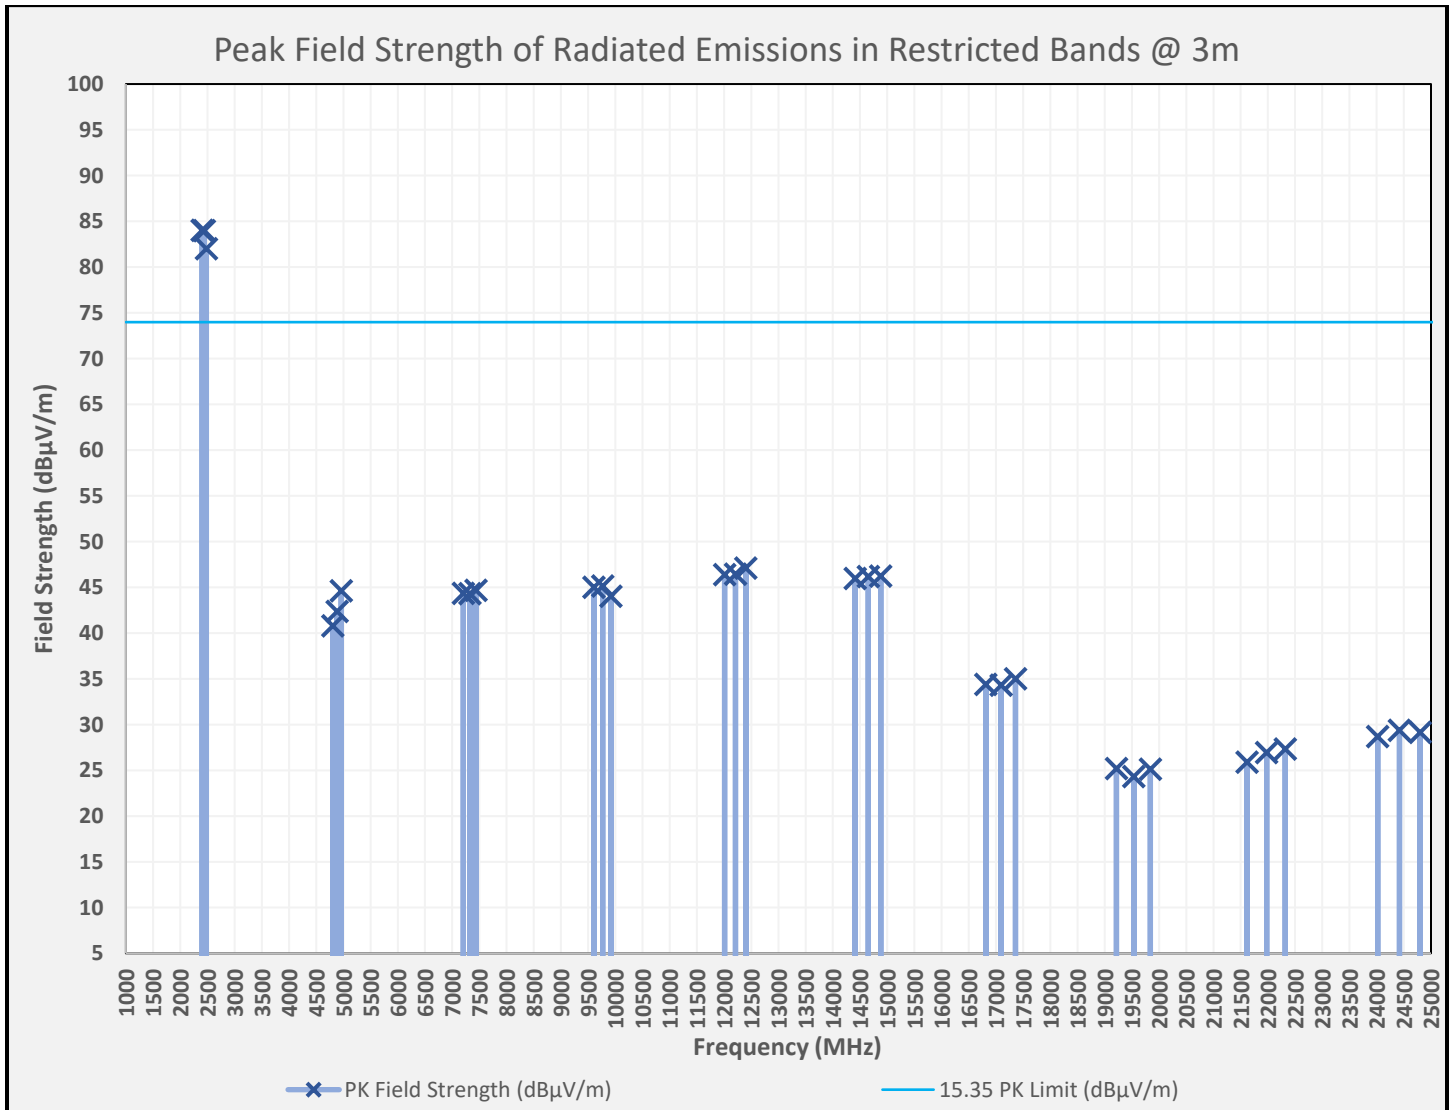

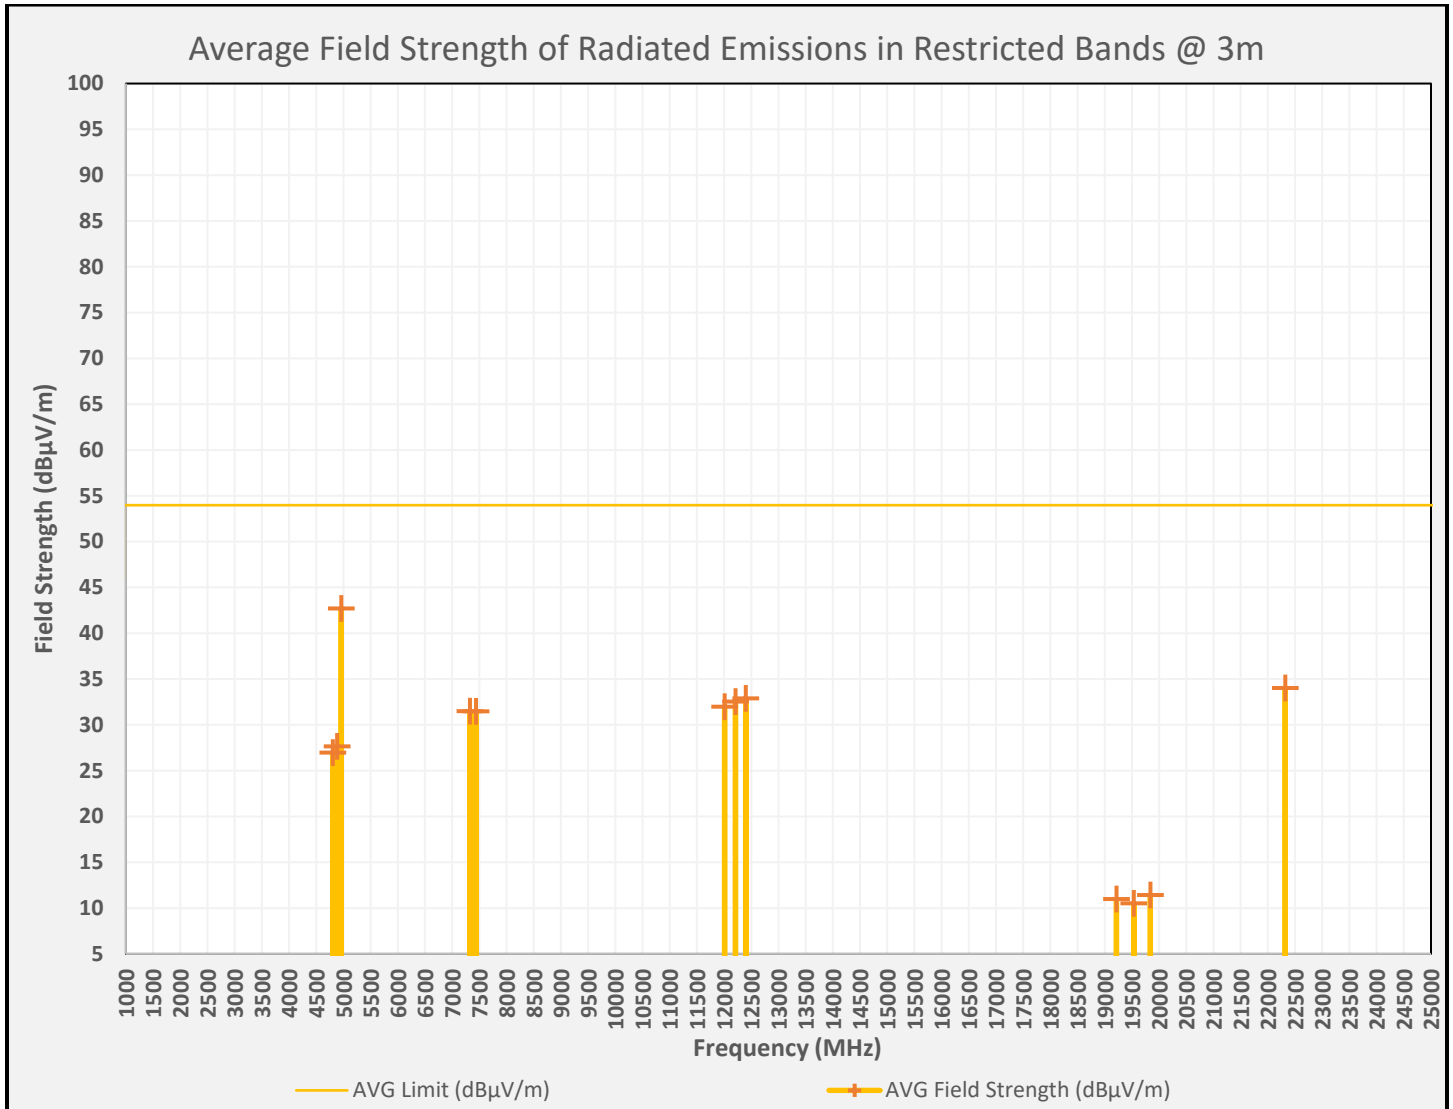

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2480.00	4960.00	X	PK	0.30	H	7.72	0.00	33.99	3.00	42.01	73.98	31.97
2480.00	4960.00	X	PK	1.00	V	7.72	0.00	33.99	3.00	42.71	53.98	11.27
2480.00	4960.00	X	AVG	-13.50	H	7.72	0.00	33.99	3.00	28.21	53.98	25.77
2480.00	4960.00	X	AVG	-13.10	V	7.72	0.00	33.99	3.00	28.61	53.98	25.37
2480.00	7440.00	X	PK	-1.30	H	9.56	0.00	36.21	3.00	44.47	73.98	29.51
2480.00	7440.00	X	PK	-1.10	V	9.56	0.00	36.21	3.00	44.67	73.98	29.31
2480.00	7440.00	X	AVG	-14.70	H	9.56	0.00	36.21	3.00	31.07	53.98	22.91
2480.00	7440.00	X	AVG	-14.30	V	9.56	0.00	36.21	3.00	31.47	53.98	22.51
2480.00	9920.00		PK	-4.40	H	11.15	0.00	37.07	3.00	43.82	53.98	10.16
2480.00	9920.00		PK	-4.20	V	11.15	0.00	37.07	3.00	44.02	53.98	9.96
2480.00	12400.00	X	PK	-4.80	H	12.54	0.00	39.26	3.00	47.00	73.98	26.98
2480.00	12400.00	X	PK	-4.70	V	12.54	0.00	39.26	3.00	47.10	73.98	26.88
2480.00	12400.00	X	AVG	-18.90	H	12.54	0.00	39.26	3.00	32.90	53.98	21.08
2480.00	12400.00	X	AVG	-18.90	V	12.54	0.00	39.26	3.00	32.90	53.98	21.08
2480.00	14880.00		PK	-7.60	H	13.44	0.00	40.09	3.00	45.94	53.98	8.04
2480.00	14880.00		PK	-7.30	V	13.44	0.00	40.09	3.00	46.24	53.98	7.74
2480.00	17360.00		AVG	-21.60	H	15.01	0.00	41.59	3.00	35.00	53.98	18.98
2480.00	17360.00		AVG	-21.60	V	15.01	0.00	41.59	3.00	35.00	53.98	18.98
2480.00	19840.00	X	PK	-7.40	H	16.21	0.00	16.21	3.00	25.03	73.98	48.95
2480.00	19840.00	X	PK	-7.30	V	16.21	0.00	16.21	3.00	25.13	73.98	48.85
2480.00	19840.00	X	AVG	-21.10	H	16.21	0.00	16.21	3.00	11.33	53.98	42.65
2480.00	19840.00	X	AVG	-21.00	V	16.21	0.00	16.21	3.00	11.43	53.98	42.55
2480.00	22320.00	X	PK	-7.90	H	17.02	0.00	17.02	3.00	26.13	73.98	47.85
2480.00	22320.00	X	PK	-6.70	V	17.02	0.00	17.02	3.00	27.33	73.98	46.65
2480.00	24800.00		PK	-7.00	H	18.07	0.00	18.07	3.00	29.14	53.98	24.84
2480.00	24800.00		PK	-7.10	V	18.07	0.00	18.07	3.00	29.04	53.98	24.94

9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_21639-25_Remote BT_FCC 15.247 DTS_	1	Initial release	12/18/2025
	2	Updated product description on Pg 7. Corrected several C63.10 references from 2013 to 2020. Updated by Mark Learner.	4/10/2026

END OF TEST REPORT
