

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

47CFR Paragraph 15.247 FHSS and
Industry Canada RSS-GEN Issue 5 and RSS-247 Issue 3
Application For Grant of Certification
Model: A05008

2402-2480 MHz (DSS)
Frequency Hopping Spread Spectrum
License Exempt Intentional Radiator
FCC ID: IPH-05008 IC: 1792A-05008

Garmin International, Inc.

1200 East 151st Street
Olathe, KS 66062
Tim Olson
Senior Compliance Engineer

Test Report Number: 241031

Test Date: October 31, 2024 – January 3, 2025

Authorized Signatory: 

Patrick Powell
Rogers Labs, a division of The Compatibility Center LLC
FCC Designation: US5305
ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 4

Test: 241031

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 1 of 50

TABLE OF CONTENTS.....	2
REVISIONS.....	4
EXECUTIVE SUMMARY	5
OPINION / INTERPRETATION OF RESULTS	5
EQUIPMENT TESTED.....	8
Equipment Operational Modes.....	9
Equipment Function	10
Equipment Configuration.....	11
APPLICATION FOR CERTIFICATION.....	12
APPLICABLE STANDARDS.....	13
TEST PROCEDURES.....	14
AC Line Conducted Emission Test Procedure	14
Radiated Emission Procedure	14
Antenna Port Conducted Emission Test Procedure.....	14
Diagram 1 Test arrangement for power-line conducted emissions.....	15
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	16
Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)	17
Diagram 4 Test arrangement for Antenna Port Conducted emissions.....	18
TEST SITE LOCATIONS	18
UNITS OF MEASUREMENTS	19
ENVIRONMENTAL CONDITIONS.....	19
STATEMENT OF MODIFICATIONS AND DEVIATIONS	20

INTENTIONAL RADIATORS	20
Antenna Requirements	20
Restricted Bands of Operation	20
Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, BT BR (GFSK)	21
Summary of Results for Radiated Emissions in Restricted Bands	21
AC Line Conducted EMI Procedure	22
Figure 1 AC Line Conducted Emissions Data L1 (#5, EUT – Computer)	23
Figure 2 AC Line Conducted Emissions Data L2 (#5, EUT – Computer)	24
Table 2 AC Line Conducted Emissions Data L1 (#5, EUT – Computer)	25
Table 3 AC Line Conducted Emissions Data L2 (#5, EUT – Computer)	25
Summary of Results for AC Line Conducted Emissions	25
General Radiated Emissions Procedure	26
Table 4 General Radiated Emissions Data - Horizontal Polarization	27
Figure 3 Plot of General Radiated Emissions – Horizontal Polarization	27
Table 5 General Radiated Emissions Data - Vertical Polarization	28
Figure 4 Plot of General Radiated Emissions – Vertical Polarization	28
Summary of Results for General Radiated Emissions	29
Operation in the Band 2400 – 2483.5 MHz	30
Figure 3 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2, BT BR	32
Figure 4 Plot of Transmitter Emissions 20-dB Occupied Bandwidth Mode 2, BT BR	33
Figure 5 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2, BT BR	34
Figure 6 Plot of Number of Hopping Channels Mode 2, BT BR	35
Figure 7 Plot of Number of Hopping Channels Mode 2, BT BR	36
Figure 8 Plot of Number of Hopping Channels Mode 2, BT BR	37
Figure 9 Plot of Number of Hopping Channels Mode 2, BT BR	38
Figure 10 Plot of Channel Separation Mode 2, BT BR	39
Figure 9 Plot of Dwell time On Channel Mode 2, BT BR	40
Figure 10 Plot of Number of Times on Channel over 6 Second Period Mode 2, BT BR	41
Figure 11 Plot of Transmitter Emissions Low Band Edge Mode 2, BT BR	42
Figure 12 Plot of Transmitter Emissions High Band Edge Mode 2, BT BR	43
Transmitter Emissions Data	44

Table 6 Transmitter Radiated Emissions Mode 2, BT BR	44
Table 7 Transmitter Antenna Port Conducted Data Mode 2, BT BR	45
Summary of Results for Transmitter Radiated Emissions of Intentional Radiator	45
ANNEX.....	46
Annex A Measurement Uncertainty Calculations.....	47
Annex B Test Equipment.....	48
Annex C Laboratory Certificate of Accreditation.....	50

Revisions

Revision 1 Issued January 26, 2025 – Initial Release.
 Revision 2 Issued February 12, 2025 – Incorporated review feedback.
 Revision 3 Issued February 18, 2025 – Corrected PMN/HVIN.
 Revision 4 Issued February 25, 2025 – Updated FVIN.

Executive Summary

License Exempt Digital Transmission System Intentional Radiator operating under Title 47 of the Code of Federal Regulations (47CFR) Paragraph 15.247 and Industry Canada RSS-247 Issue 3 and RSS-GEN Issue 5, Frequency Hopping Spread Spectrum (FHSS) or Direct Sequence Spread Spectrum (DSS) transmitter operations in the 2400-2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

PMN: A05008

FCC ID: IPH-05008 IC: 1792A-05008

Operating Frequency Range: 2402-2480 MHz

Operation Direct Sequence Spread Spectrum (DSS) communication mode 2

A05008 was chosen for transmitter configuration testing and used for final measurements.

Mode	Antenna Port Conducted Power Watts	99% OBW (kHz)	20-dB OBW (kHz)
Mode 2, BT BR (GFSK)	0.008	964.5	1044.4

This report addresses EUT Operations as Direct Sequence Spread Spectrum Transmitter using transmitter modulation in Mode 2. Note, the production device utilizes integral non-user accessible antenna system providing 2.4 dBi gain.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47CFR 15.205, RSS-210 4.1	-6.9	Complies
Conducted Emissions as per 47CFR 15.207, RSS-GEN 8.8	-13.71	Complies
Radiated Emissions 47CFR 15.209, RSS-GEN 8.9	-1.09	Complies
Harmonic Emissions per 47CFR 15.247, RSS-247	-2.2	Complies

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 5 of 50

Tests performed include

47CFR

§15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20-dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20-dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(c) Operation with directional antenna gains greater than 6 dBi.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Revision 4

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 6 of 50

5.1 Frequency hopping systems (FHS)

FHSs employ a spread spectrum technology in which the carrier is modulated with coded information in a conventional manner, causing a conventional spreading of the radio frequency (RF) energy around the carrier frequency. The carrier frequency is not fixed, but changes at fixed intervals under the direction of a coded sequence.

FHSs are not required to employ all available hopping frequencies during each transmission.

However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the requirements in this section in case the transmitter is presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of frequency hopping equipment and must distribute its transmissions over the minimum number of hopping channels specified in this section.

Incorporation of intelligence into an FHS that enables it to recognize other users of the band and to avoid occupied frequencies is permitted provided that the FHS does it individually and independently chooses or adapts its hopset. The coordination of FHSs in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The following applies to FHSs in each of the three bands:

a) The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped. The system's radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

c) For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

d) FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

e) FHSs operating in the band 5725-5850 MHz shall use at least 75 hopping channels. The maximum 20 dB bandwidth of the hopping channel shall be 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30-second period.

Rogers Labs, a division of The Compatibility Center LLC

Garmin International, Inc.

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

PMN: A05008

Lenexa, KS 66214

Test: 241031

SN's: 3495259652, 3495259647

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Date: February 25, 2025

Revision 4

File: A05008 DSS TstRpt 241031 r4

Page 7 of 50

Equipment Tested

Model: A05008

Garmin International, Inc.
 1200 East 151st Street
 Olathe, KS 66062

Equipment	Model / PN	Serial Number
EUT #1 Radiate	A05008	3495259652
EUT #2 Antenna Port	A05008	3495259647
Bare wire power cable	320-01485-01	N/A
Bare wire power cable	320-01485-21	N/A
GNSS Interface	320-01477-02	N/A
GNSS Antenna	011-05696-00	N/A
CLA	320-01486-02	N/A
Remote	010-02974-00	N/A
GRR	010-013087-xx	N/A
USB Cable	320-01545-00	N/A
Laptop Computer	Latitude 74870	EFSPSN2
USB Printer	Dell 0N5819	5D1SL61

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Software (FVIN): 4.31; Antennas: 2.4 GHz PIFA (2.4 dBi), 5.1 GHz PIFA (2.11 dBi), 5.7 GHz PIFA (0.0 dBi)

Equipment Operational Modes


Mode	Transmitter Operation
mode 1	ANT (GFSK)
mode 2	BT BR (GFSK)
mode 3	BT (2EDR $\pi/4$ DQPSK)
mode 4	BT (3EDR 8DPSK)
mode 5	BT BLE (GMSK)
mode 6	802.11b
mode 7	802.11g
mode 8	802.11n
mode 9	U-NII-1 802.11a
mode 10	U-NII-1 802.11n
mode 11	U-NII-1 802.11n40
mode 12	U-NII-1 802.11ac80
mode 13	U-NII-3 802.11a
mode 14	U-NII-3 802.11n
mode 15	U-NII-3 802.11n40
mode 16	U-NII-3 802.11ac80

Equipment Function


The EUT is a GPS receiver with graphical display and user interface design. The unit provides GPS reception, graphical display of location, navigation, and other information for the user. The design offers use as a hand-held, transportation mounted or portable configuration for use in navigational applications. The design incorporates transmitter circuitry operating in the 2402-2480, and 5150-5250 MHz frequency bands. The typical use configuration has the EUT mounted in a transportation vehicle and powered from the direct current vehicle power through direct, Cigarette Lights Adapter (CLA), or power mount interface cable. The design provides a Micro SD Card slot and USB-C interface port as presented below and wireless communications with compatible equipment. The EUT operates from direct current power provided from internal rechargeable battery or external power. External power may be supplied through the installation vehicles 12-volt power or compliant USB interface as documented this report. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those presented in the configuration options as described by the manufacturer and presented below. For testing purposes, the EUT received power from both internal and external power options and configurations. During testing, the test system was configured to operate in a manufacturer defined mode. The manufacturer provided test software for testing transmitter and equipment function. The software provided ability to operate the transmitter at near 100% duty cycle for testing purposes. The testing mode of operation exceeds typical duty cycle operation of production equipment. As requested by the manufacturer the equipment was tested for emissions compliance using the available configurations with the worse-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration

- 1) EUT operating off internal battery.




- 2) EUT connected to Bare wire PWR cable.

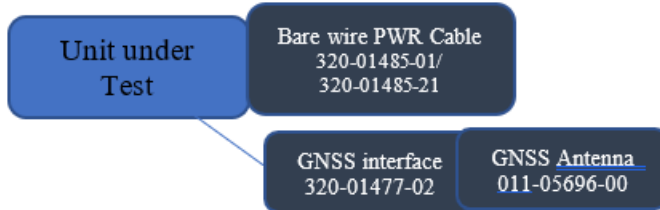


- 3) EUT connected to CLA



- 4) EUT connected and powered through Group Ride Radio, Bare wire PWR or CLA.

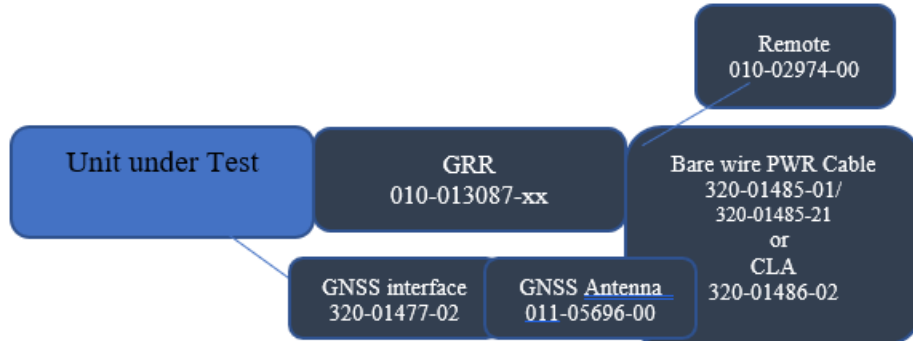

- 5) EUT connected to Computer Through USB cable.



Application for Certification

- (1) Manufacturer: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
- (2) Identification: HVIN: A05008
FCC ID: IPH-05008 IC: 1792A-05008
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from external direct current power provided from installation vehicle. The EUT provides interface ports for power, loads and communications as presented in this filing.
- (9) Transition Provisions of 47CFR 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. This requirement is not applicable to his DTS device.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards

The following information is submitted in accordance with the eCFR (electronic Title 47 Code of Federal Regulations) (47CFR), dated February 15, 2024: Part 2, Subpart J, Part 15C Paragraph 15.247, RSS-247 Issue 3, and RSS-GEN Issue 5. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2020. This report documents compliance for the EUT operations as Frequency Hopping Spread Spectrum (DSS) Transmitter.

Test Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions were performed as required in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in the test setup exhibit for EUT placement used during testing.

Radiated Emission Procedure

Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 3, RSS-GEN and specified in ANSI C63.10-2020. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. Per above requirements, the frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure

The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2020. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025


Page 14 of 50

Diagram 1 Test arrangement for power-line conducted emissions

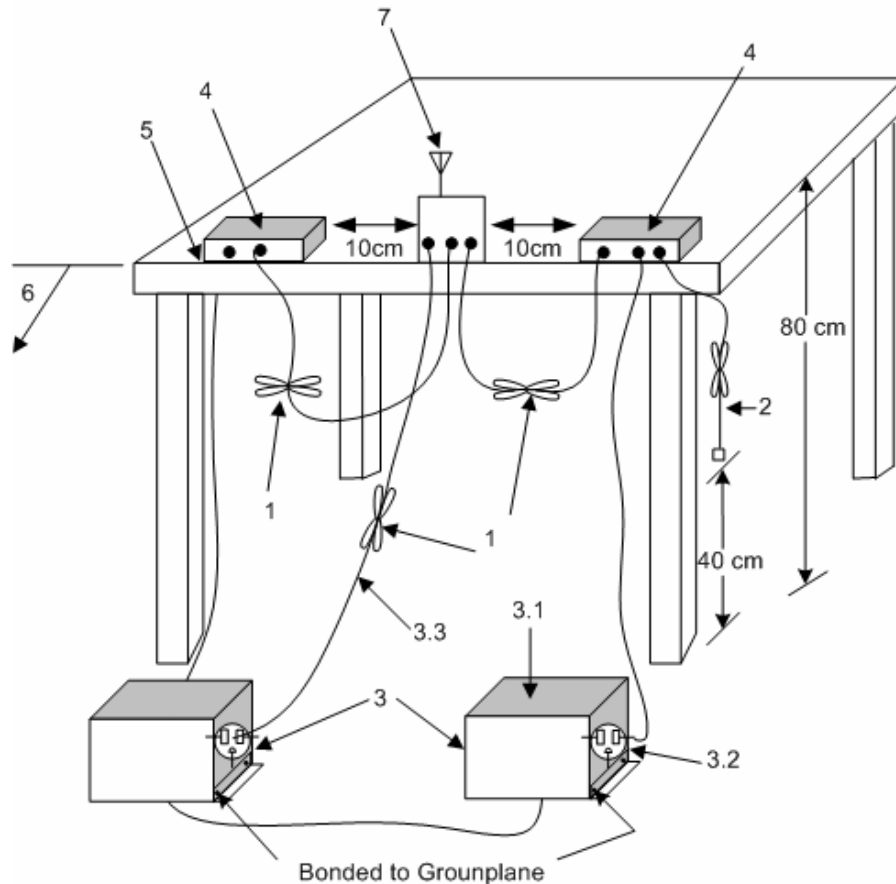

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test


Diagram 2 Test arrangement for radiated emissions of tabletop equipment

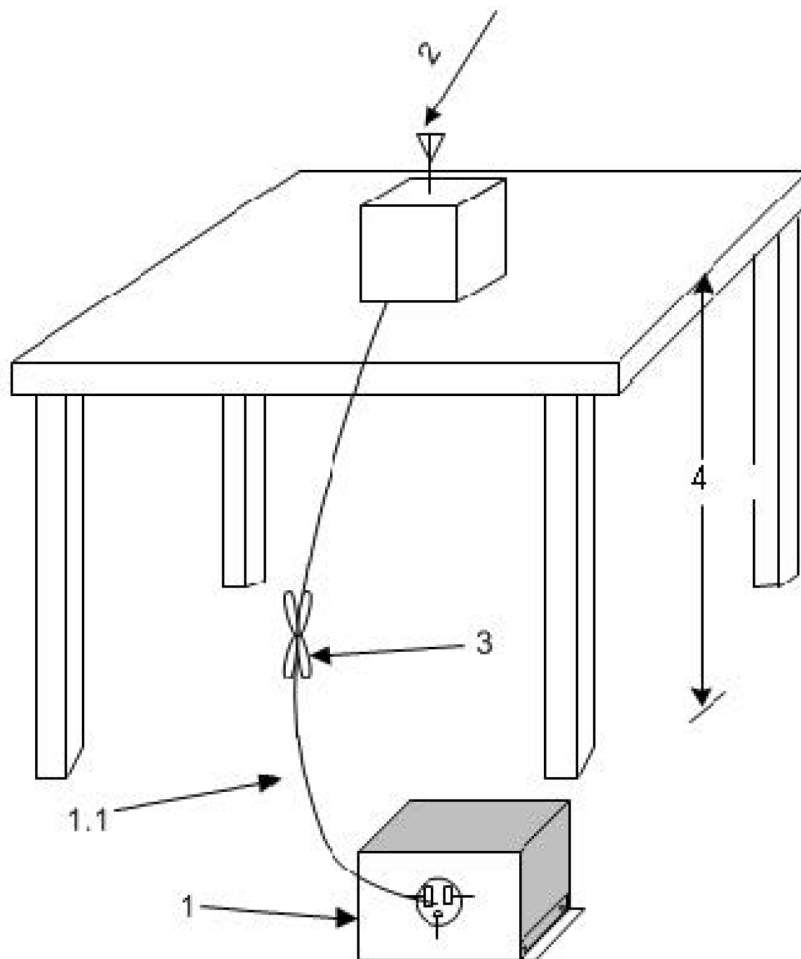

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1. LISN spaced at least 80 cm from the nearest part of the EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

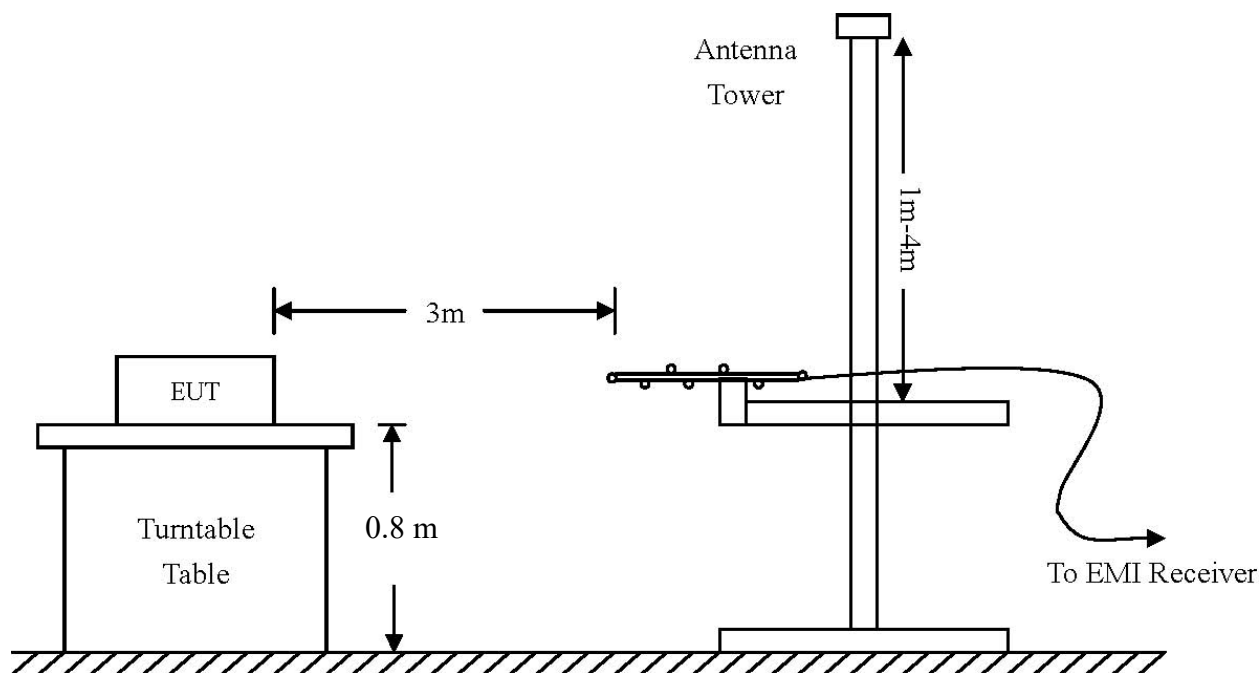

Above 1 GHz:


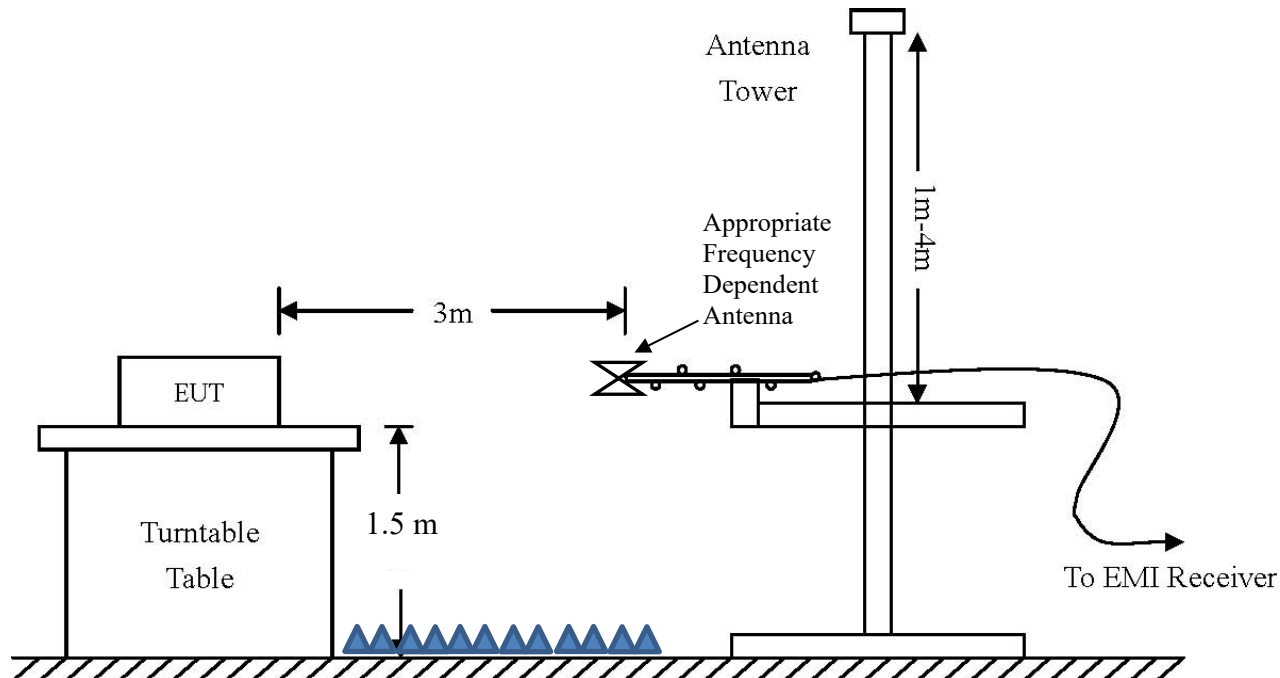


Diagram 4 Test arrangement for Antenna Port Conducted emissions
Spectrum Analyzer

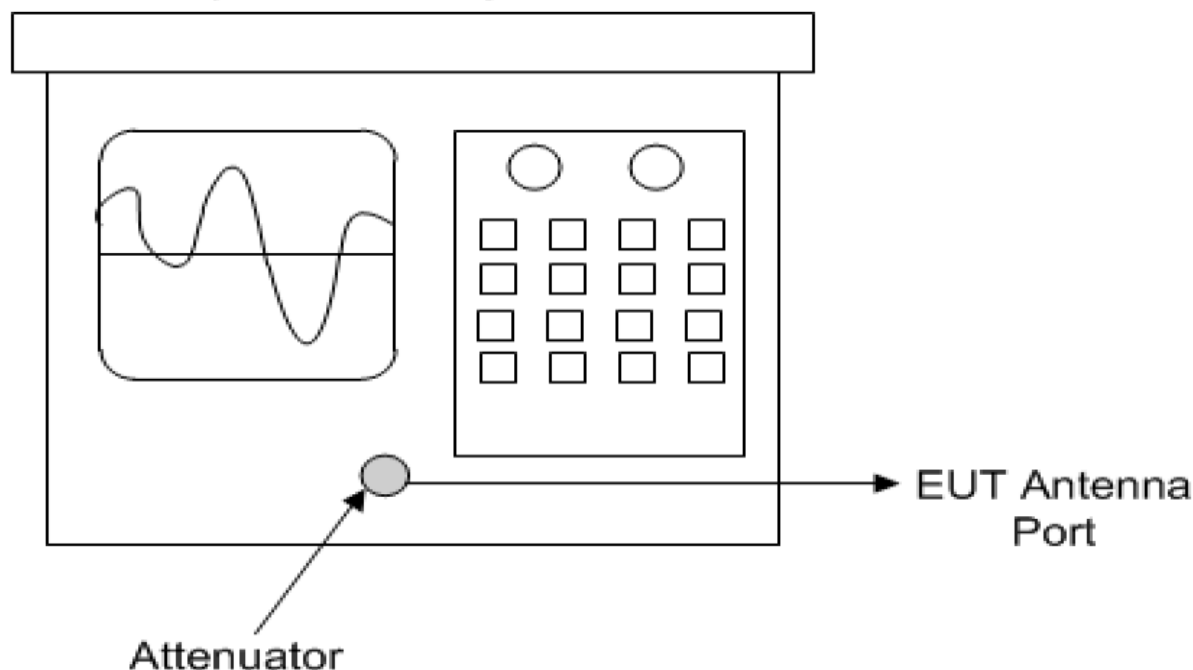

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 18 of 50

Units of Measurements

Conducted EMI Data presented in dB μ V; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dB μ V/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dB μ V/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Environmental Conditions

Ambient Temperature 19.9° C

Relative Humidity 49.0 %

Atmospheric Pressure 1018.2 mb

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Revision 4

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 19 of 50

Statement of Modifications and Deviations

No modifications to the EUT were required for the equipment to demonstrate compliance with the 47CFR Part 15C, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

The following information is submitted supporting compliance with the requirements of 47CFR, Subpart C, paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5.

Antenna Requirements

The EUT incorporates integral non-user accessible system. Production equipment offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2020 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Frequency Bands Data Mode 2, BT BR (GFSK)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2390.0	53.1	39.3	53.0	39.3	54.0	-14.7	-14.7
2483.5	53.5	40.5	54.3	40.4	54.0	-13.5	-13.6
4804.0	51.0	36.4	49.7	36.4	54.0	-17.6	-17.6
4882.0	49.8	36.1	49.8	36.1	54.0	-17.9	-17.9
4960.0	50.6	36.6	50.4	36.6	54.0	-17.4	-17.4
7206.0	53.2	39.8	52.9	39.8	54.0	-14.2	-14.2
7323.0	53.5	40.2	54.0	40.2	54.0	-13.8	-13.8
7440.0	53.2	39.7	53.1	39.7	54.0	-14.3	-14.3
12010.0	58.8	45.9	59.6	46.2	54.0	-8.1	-7.8
12205.0	60.9	47.1	60.9	47.1	54.0	-6.9	-6.9
12400.0	60.6	46.8	60.1	46.8	54.0	-7.2	-7.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C and RSS-247 Issue 3 Intentional Radiator requirements. The EUT demonstrated a worst-case minimum margin of -6.9 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025


Page 21 of 50

AC Line Conducted EMI Procedure

The EUT was arranged in typical equipment configurations as offered by manufacturer and presented above in equipment configuration. AC Line Conducted emission testing was performed with the EUT placed on a 1 x 1.5-meter bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the AC line-conducted emissions followed the procedures of ANSI C63.10-2020. The EUT was configured as presented in the AC Line conducted configurations as directed by the manufacturer and presented above in equipment configuration. The AC adapter for the EUT was connected to the LISN for AC line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the test configuration. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz and data recorded.


Refer to figure one and two for plots of the Configuration #5 EUT – USB Computer interface AC Line conducted emissions.

Figure 1 AC Line Conducted Emissions Data L1 (#5, EUT – Computer)

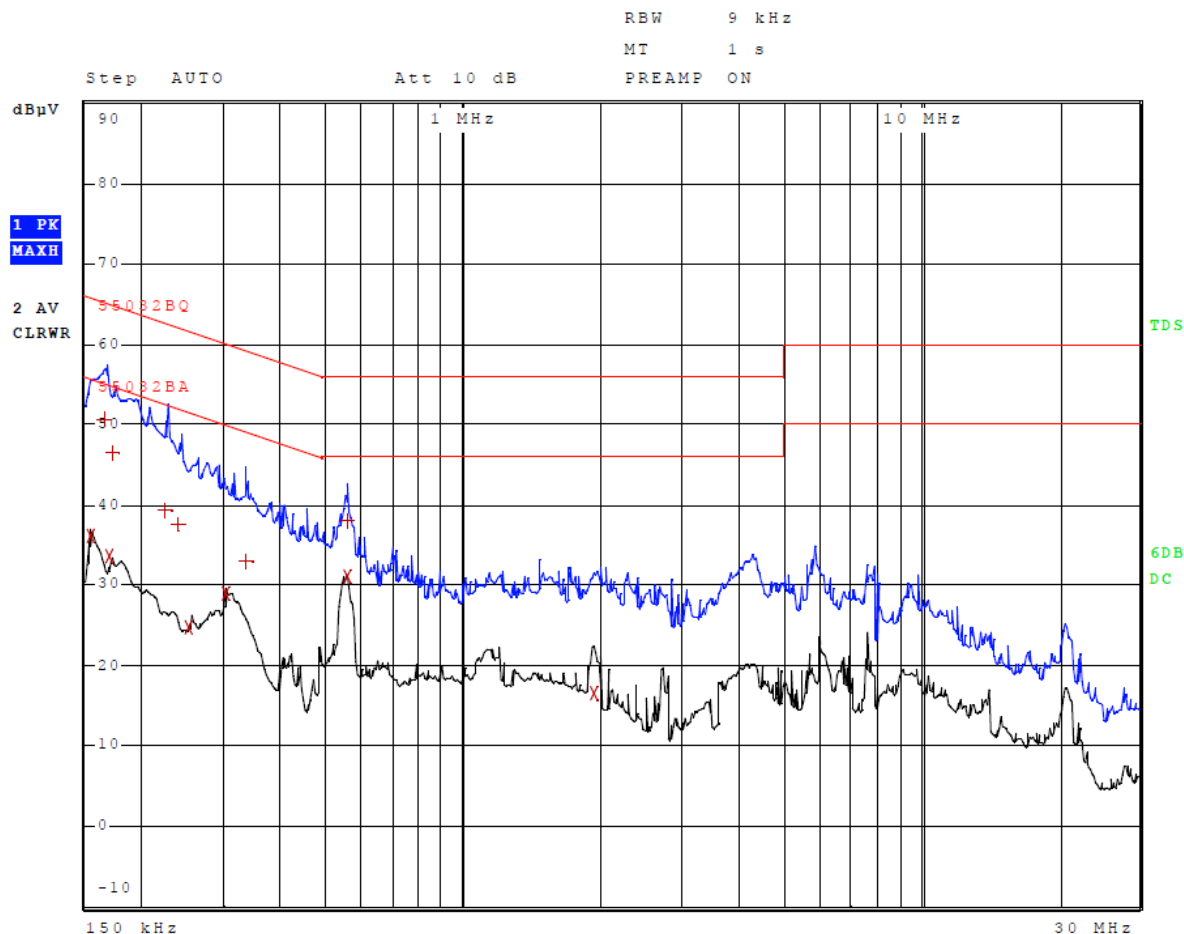

Other emissions present had amplitudes at least 20 dB below the limit.

Figure 2 AC Line Conducted Emissions Data L2 (#5, EUT – Computer)

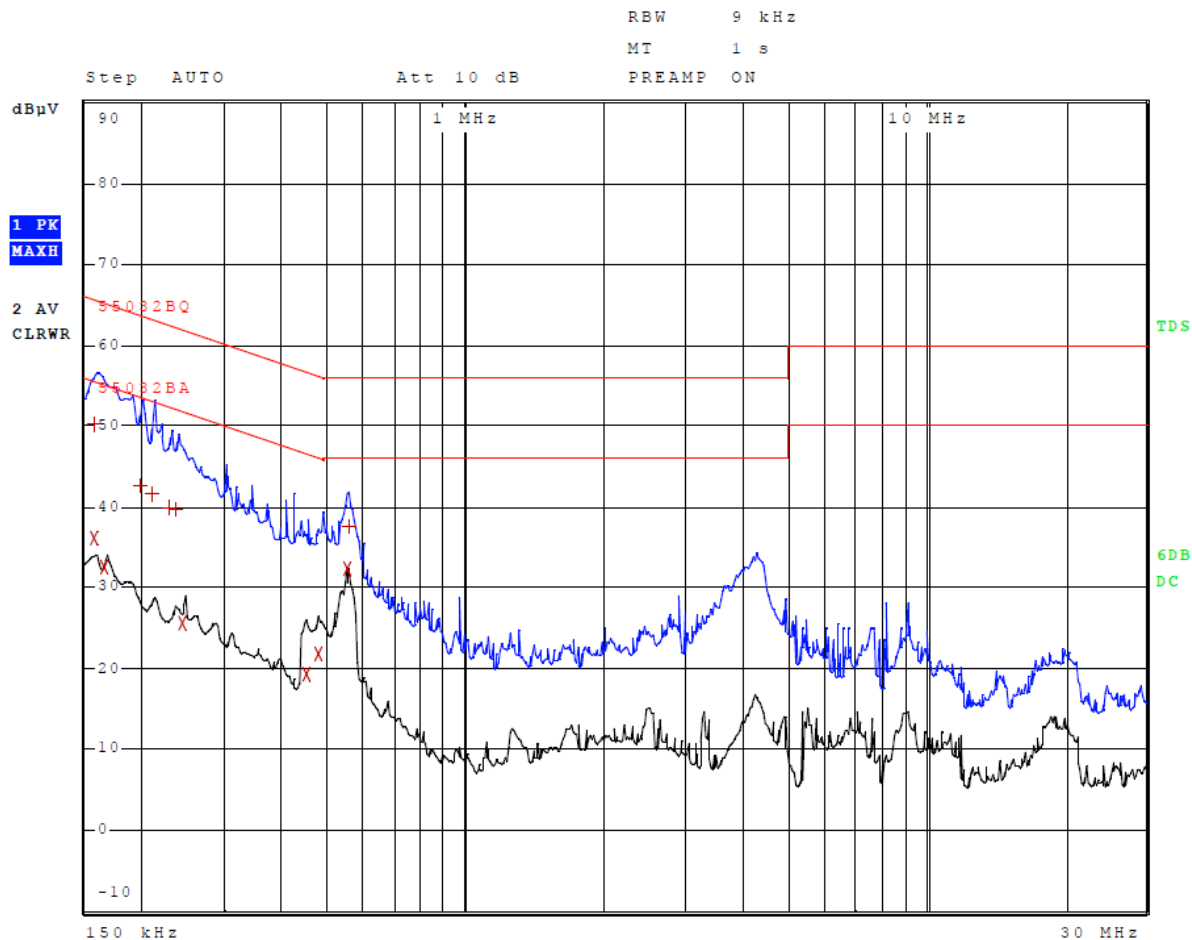

Other emissions present had amplitudes at least 20 dB below the limit.

Table 2 AC Line Conducted Emissions Data L1 (#5, EUT – Computer)

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
2	154.000000000 kHz	36.19	Average	-19.59
1	166.000000000 kHz	50.61	Quasi Peak	-14.54
2	170.000000000 kHz	33.67	Average	-21.29
1	174.000000000 kHz	46.33	Quasi Peak	-18.43
1	226.000000000 kHz	39.34	Quasi Peak	-23.25
1	242.000000000 kHz	37.61	Quasi Peak	-24.42
2	254.000000000 kHz	24.69	Average	-26.94
2	302.000000000 kHz	28.95	Average	-21.24
1	334.000000000 kHz	33.05	Quasi Peak	-26.30
2	554.000000000 kHz	31.14	Average	-14.86
1	554.000000000 kHz	37.93	Quasi Peak	-18.07
2	1.930000000 MHz	16.55	Average	-29.45

Other emissions present had amplitudes at least 20 dB below the limit.

Table 3 AC Line Conducted Emissions Data L2 (#5, EUT – Computer)

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
2	158.000000000 kHz	36.14	Average	-19.43
1	158.000000000 kHz	50.09	Quasi Peak	-15.48
2	166.000000000 kHz	32.63	Average	-22.53
1	198.000000000 kHz	42.60	Quasi Peak	-21.09
1	210.000000000 kHz	41.56	Quasi Peak	-21.65
1	230.000000000 kHz	39.89	Quasi Peak	-22.56
1	238.000000000 kHz	39.62	Quasi Peak	-22.55
2	246.000000000 kHz	25.61	Average	-26.28
2	450.000000000 kHz	19.24	Average	-27.64
2	478.000000000 kHz	21.91	Average	-24.46
2	550.000000000 kHz	32.29	Average	-13.71
1	554.000000000 kHz	37.64	Quasi Peak	-18.36

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47CFR Part 15C and other applicable emissions requirements. The EUT configuration #5 demonstrated a minimum margin of -13.71 dB below the requirement. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

General Radiated Emissions Procedure

Testing for the radiated emissions were performed as specified in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. For testing purposes, the EUT was arranged as presented in the applicable configuration diagrams above and operated through all modes as presented.

Exploratory radiated emissions measurements were performed in the SAC chamber or screen room, finding maximized emissions over frequency, EUT orientation, antenna height and polarity. This data is then used to focus the final radiated emissions measurements on these maximized points.

Final radiated emissions data were taken with the EUT located in the OATS or SAC at distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 6,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop, Biconical, Broadband Biconilog, Log Periodic, and Double Ridge or Pyramidal Horns and mixers above 1 GHz.

Table 4 General Radiated Emissions Data - Horizontal Polarization

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
41.85	25.937	18.03	40	-21.97
59.99	31.703	25.73	40	-14.27
326.18	46.994	43.09	47	-3.91
330.56	46.935	44.28	47	-2.72
332.63	47.191	44.76	47	-2.24
337.01	46.312	43.98	47	-3.02

Figure 3 Plot of General Radiated Emissions – Horizontal Polarization


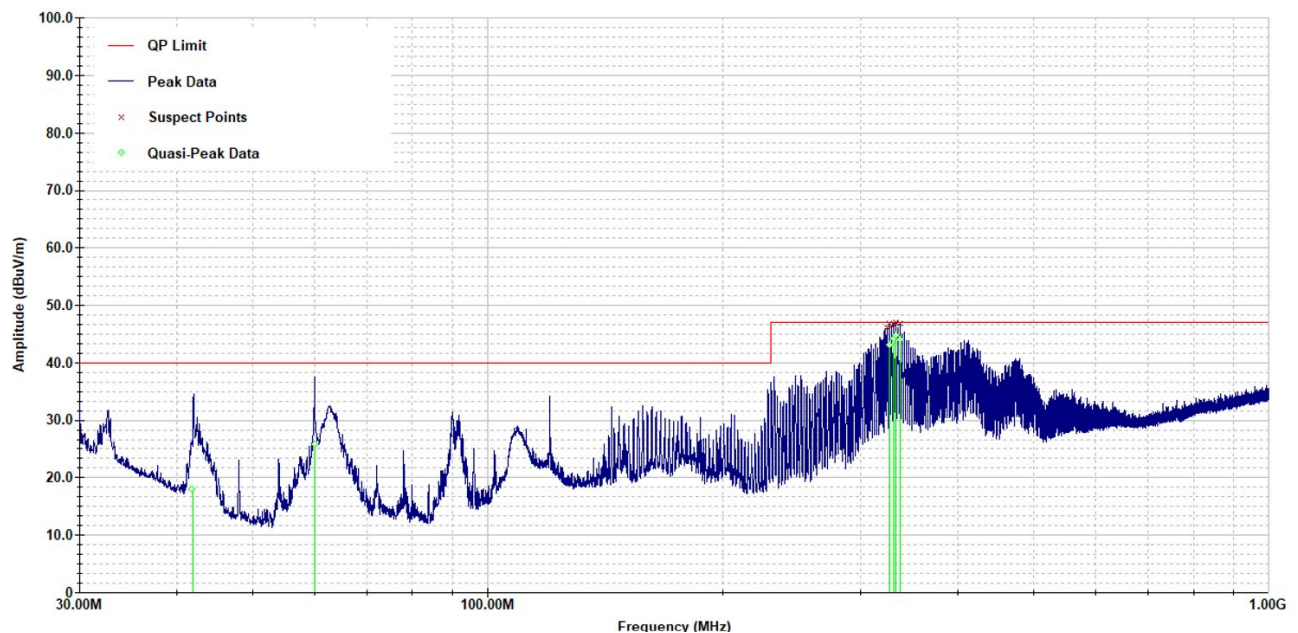


Table 5 General Radiated Emissions Data - Vertical Polarization

Frequency (MHz)	Peak (dB μ V/m)	Quasi-Peak (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dBm)
32.66	39.91	33.08	40	-6.92
42.44	45.41	38.91	40	-1.09
63.20	38.25	34.74	40	-5.26
108.68	38.98	35.33	40	-4.67
322.01	44.17	41.78	47	-5.22
332.69	44.66	42.30	47	-4.70

Figure 4 Plot of General Radiated Emissions – Vertical Polarization

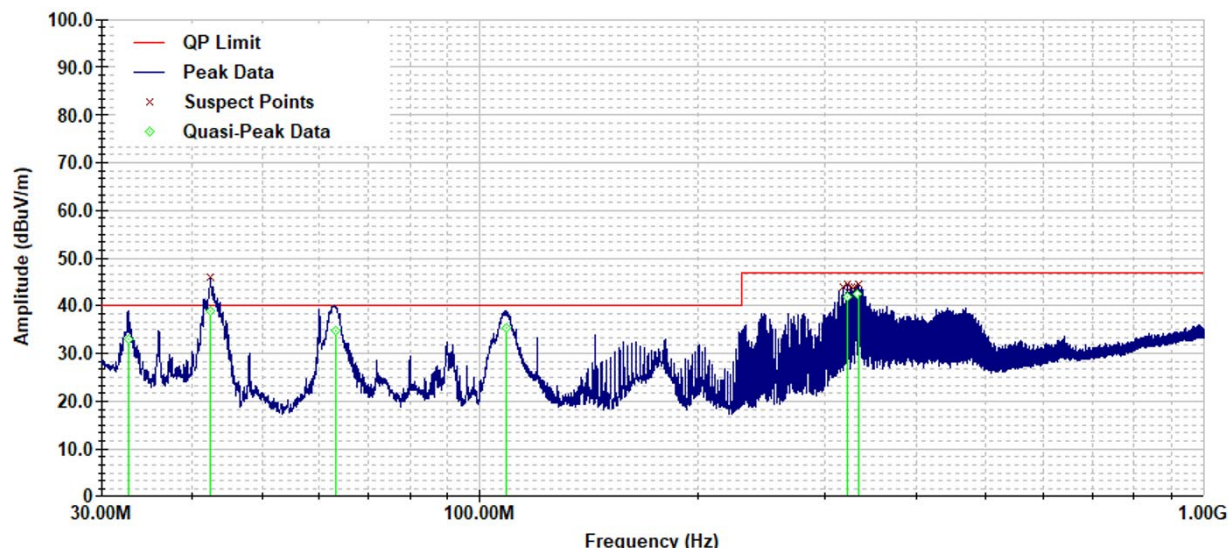

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15C paragraph 15.209, RSS-210 Issue 11, and RSS-GEN Issue 5 Intentional Radiators. The EUT worst-case transmitter configuration demonstrated a minimum margin of -1.09 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Band 2400 – 2483.5 MHz

Test procedures of ANSI C63.10-2020 and KDB 558074 D01 15.247 Meas Guidance v05 were used during transmitter testing. The transmitter peak power was measured at the antenna port as described in ANSI C63.10-2020. The 20-dB and 99% emission bandwidths were measured as described in C63.10-2013. The channel separation and the number of hopping channels were measured at the antenna port as described in C63.10-2013. The system utilizes at least 15 channels with average time of occupancy on any channel not exceeding 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. The transmitter radiated spurious and general emissions were measured on an open area test site @ 3 meters. During radiated emissions measurements, the EUT sample #1 was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the measurement antenna. The amplitude of each emission was then recorded from the measurement results. The test system gains and losses were accounted for in the measurement results presented. The amplitude of each radiated emission was maximized by equipment orientation and placement on the turn table, raising and lowering the FSM (Field Strength Measuring) antenna, changing the FSM antenna polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB μ V/m @ 3 meters. Antenna port conducted emission data and plots were taken using test sample #2.

Requirement:

Average occupancy time Requirement:

Average time of occupancy on any channel shall not be greater than 400 mS (0.4 seconds) within a 30 second period (0.4 times the number of hopping channels of 79).


Time on channel:

The design resides on channel 60 times in 6 seconds (300 times in a 30 second period) transmitting each time for 141.9 μ S. This equates to an average time of occupancy of (300*141.9 μ S) 42.6 mS over 30 seconds.

The 42.6 mS average time of occupancy over 30 seconds demonstrates compliance with the requirement of less than 400 mS in 30 second period. Additional Frequency Hopping detail may be found in the operational description exhibits.

Refer to figures three through twelve showing plots taken of the 2402-2480 MHz BT BR (GFSK) Frequency Hopping Spread Spectrum operation displaying compliance with the specifications.

Figure 3 Plot of Transmitter Emissions Operation in 2402-2480 MHz Mode 2, BT BR

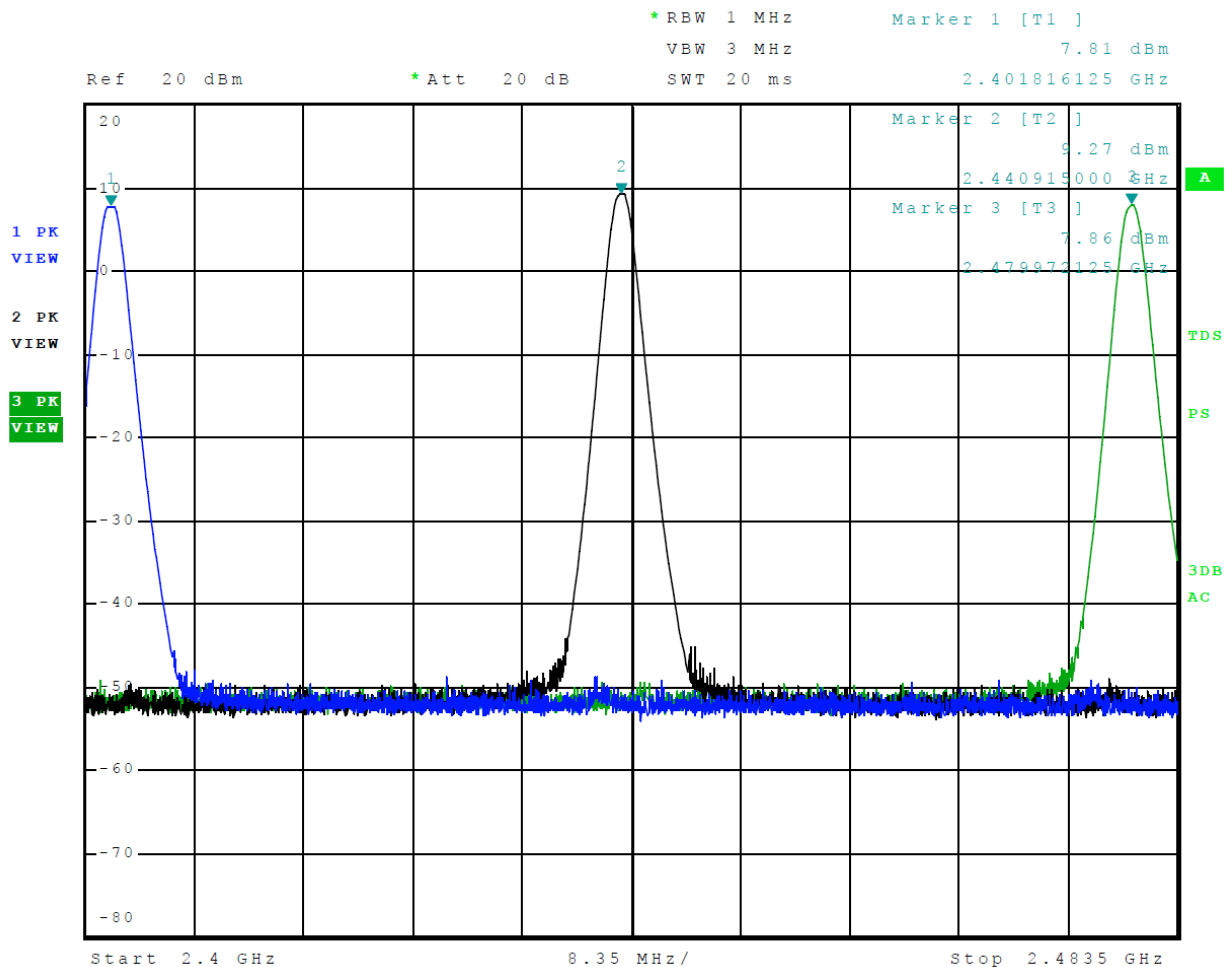

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Phone/Fax: (913) 660-0666

Revision 4

Test: 241031

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 32 of 50

Figure 5 Plot of Transmitter Emissions 99% Occupied Bandwidth Mode 2, BT BR

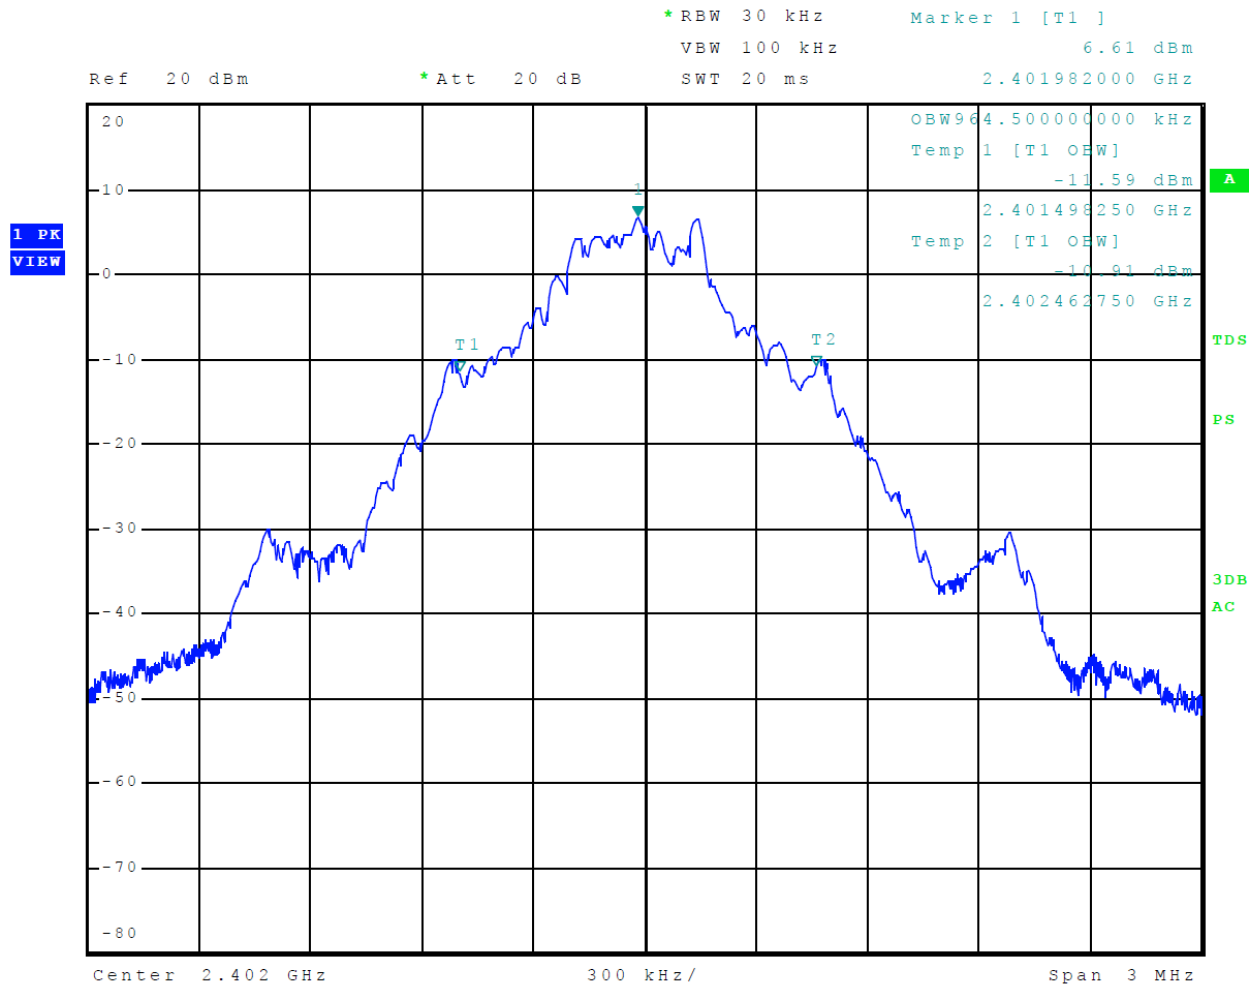

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 34 of 50

Figure 6 Plot of Number of Hopping Channels Mode 2, BT BR

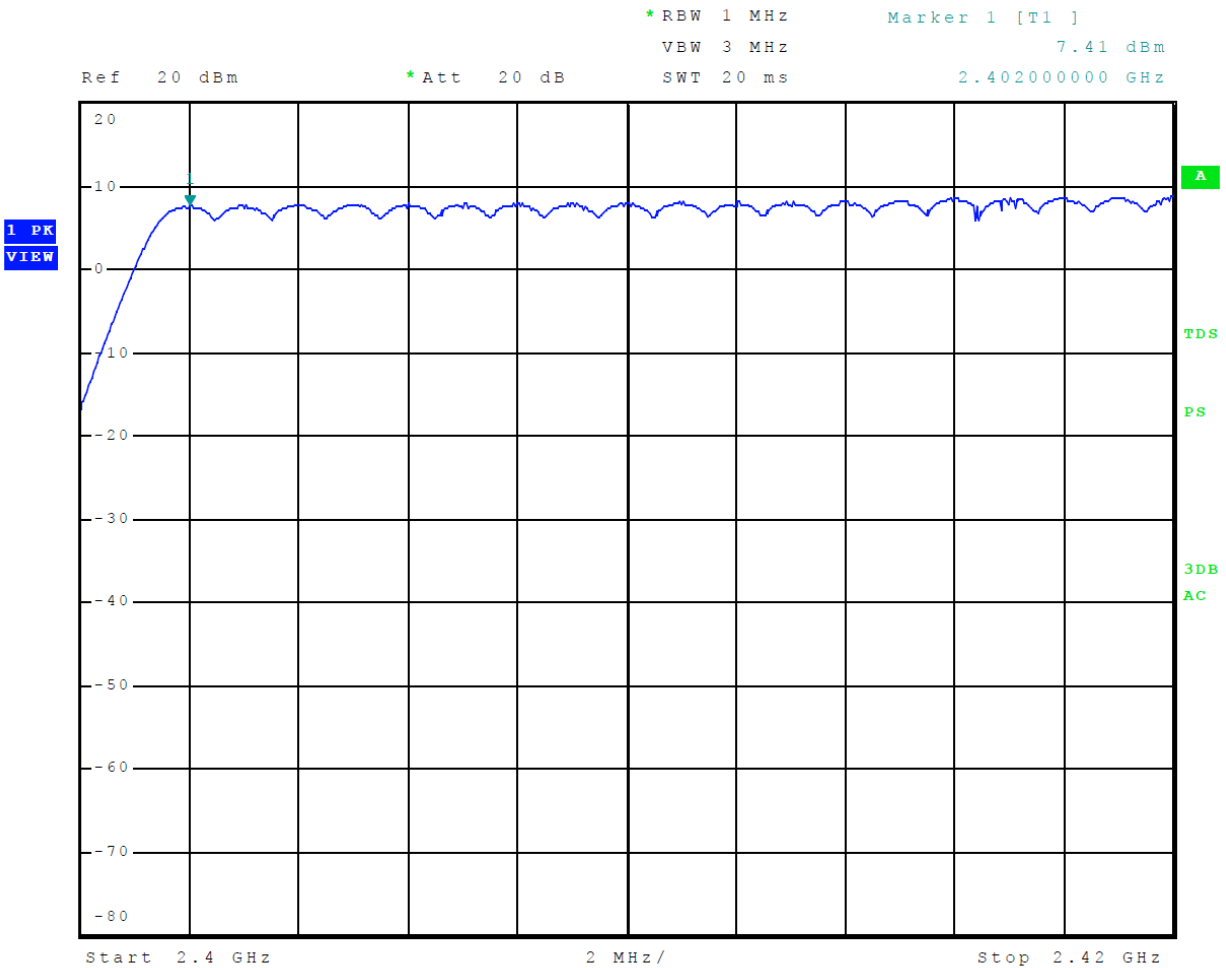

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 35 of 50

Figure 7 Plot of Number of Hopping Channels Mode 2, BT BR

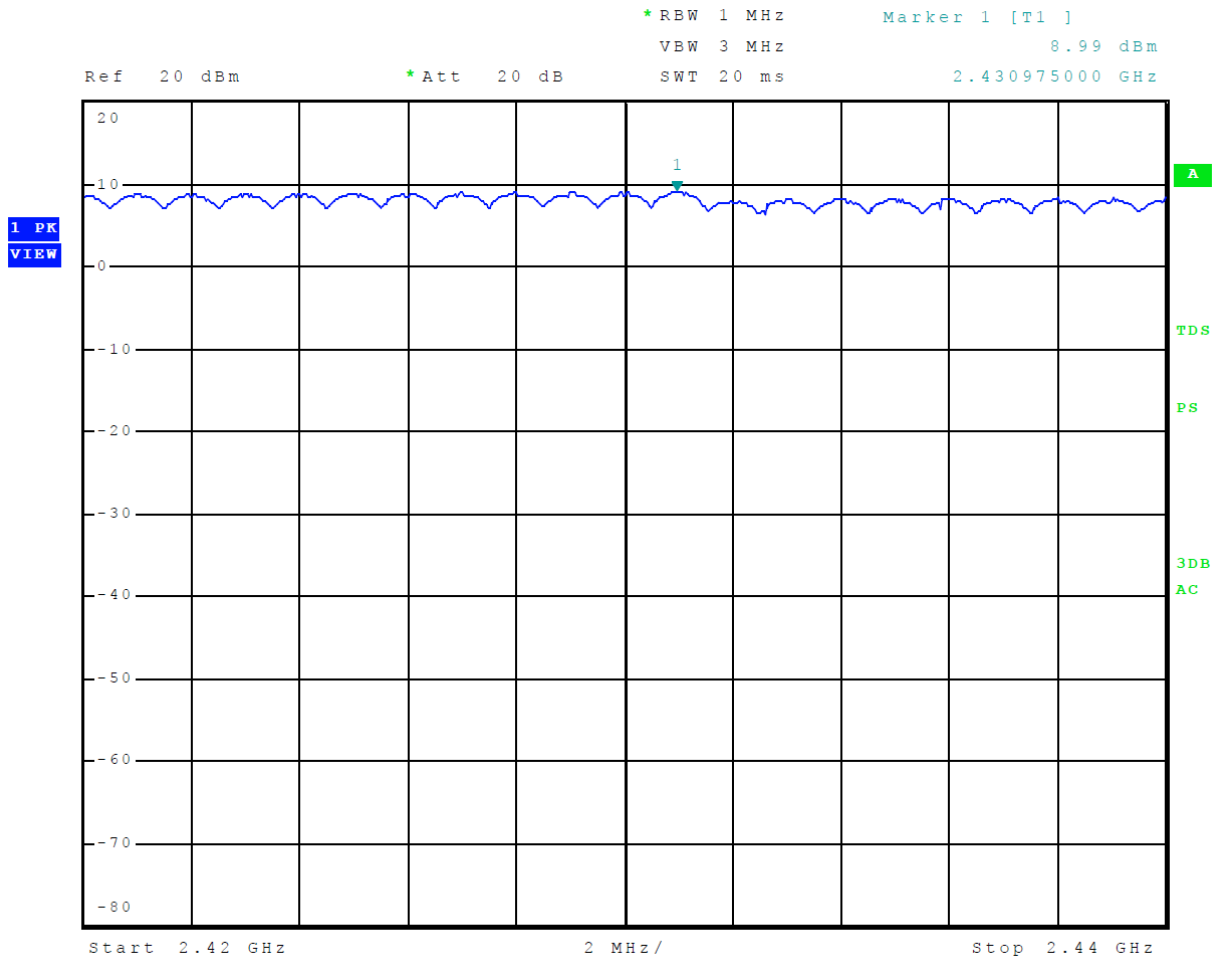

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 36 of 50

Figure 8 Plot of Number of Hopping Channels Mode 2, BT BR

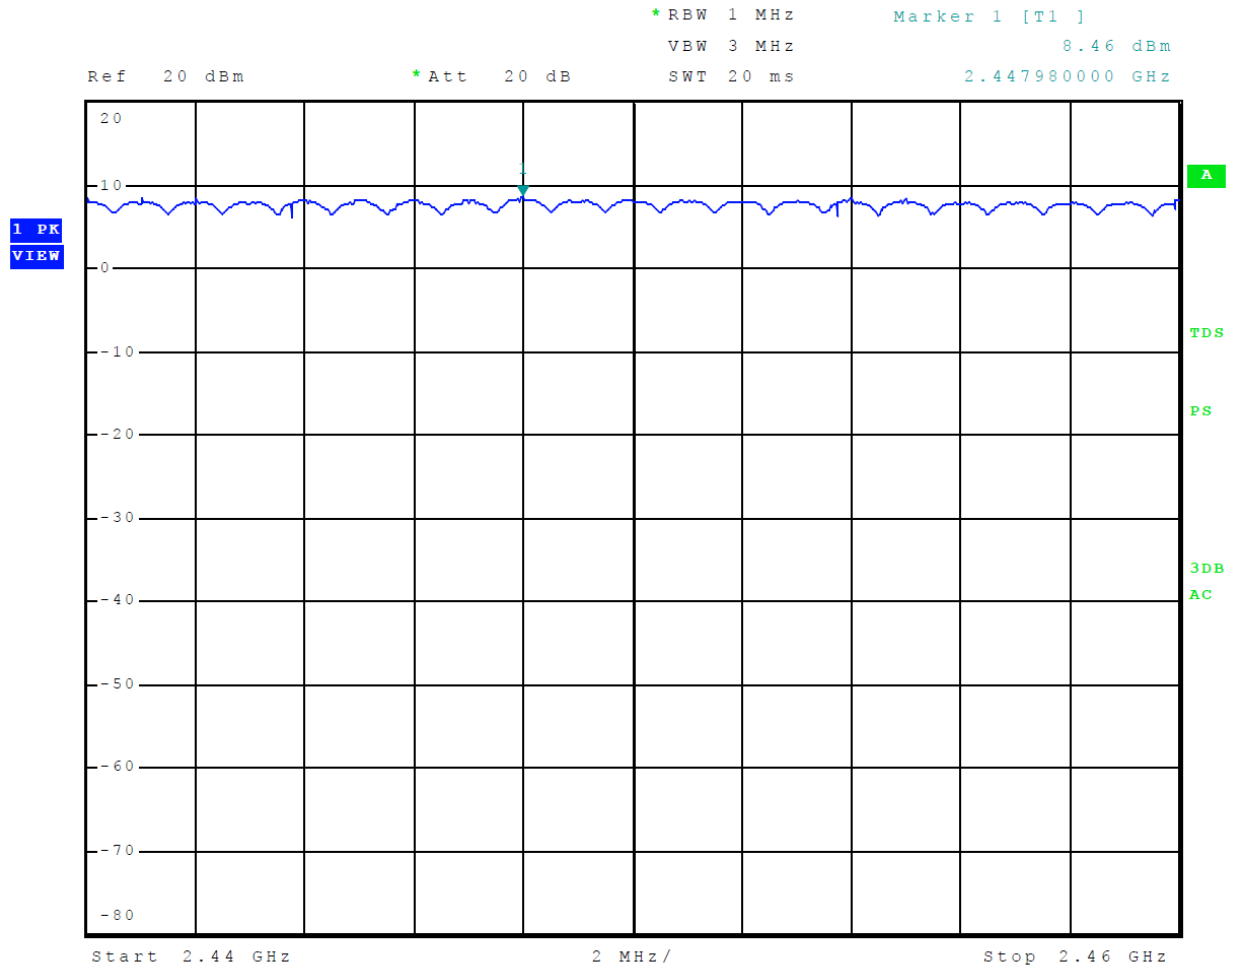

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Revision 4

Test to: 47CFR 15C, RSS-Gen RSS-247

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 37 of 50

Figure 9 Plot of Number of Hopping Channels Mode 2, BT BR

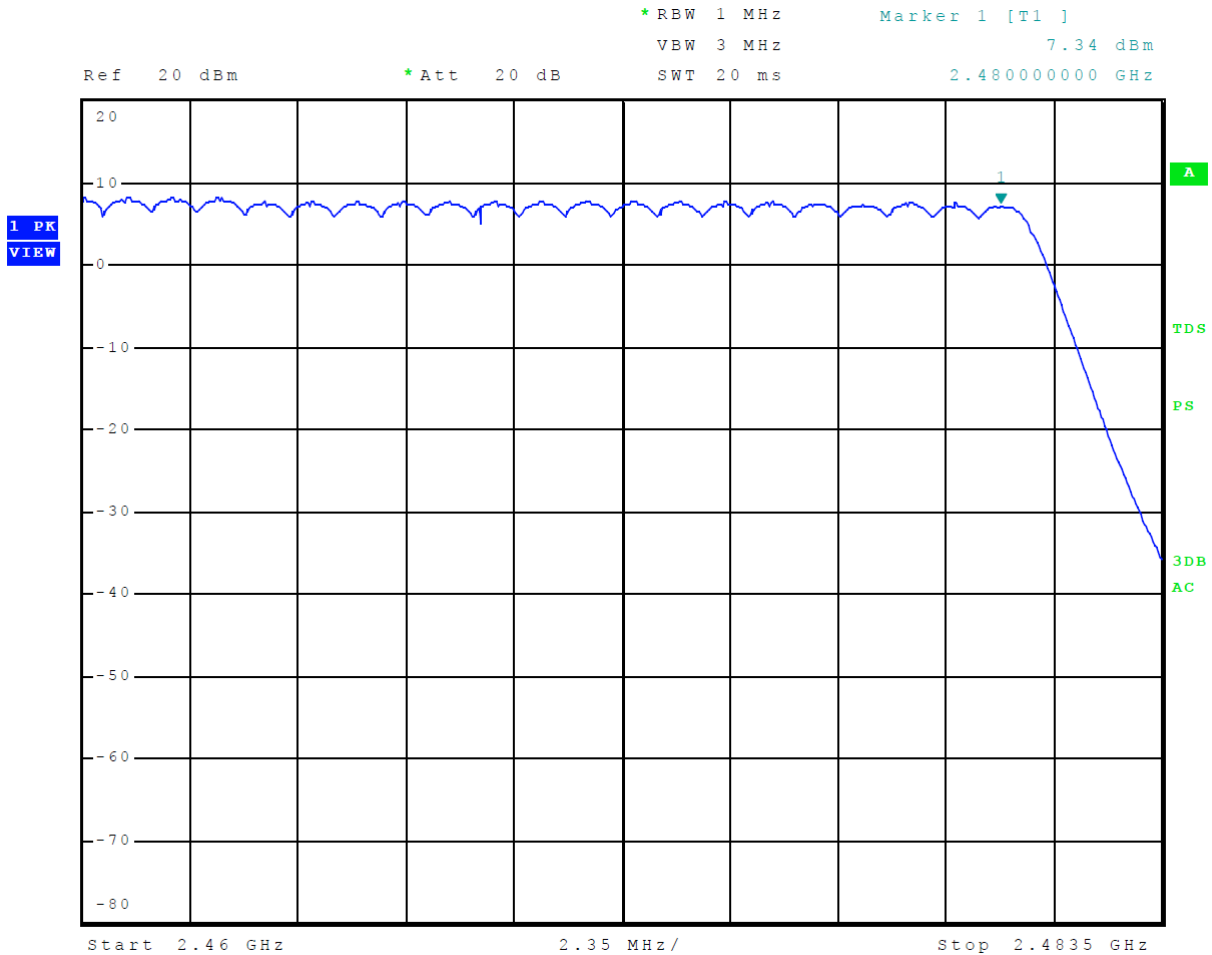

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.

PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 38 of 50

Figure 10 Plot of Channel Separation Mode 2, BT BR

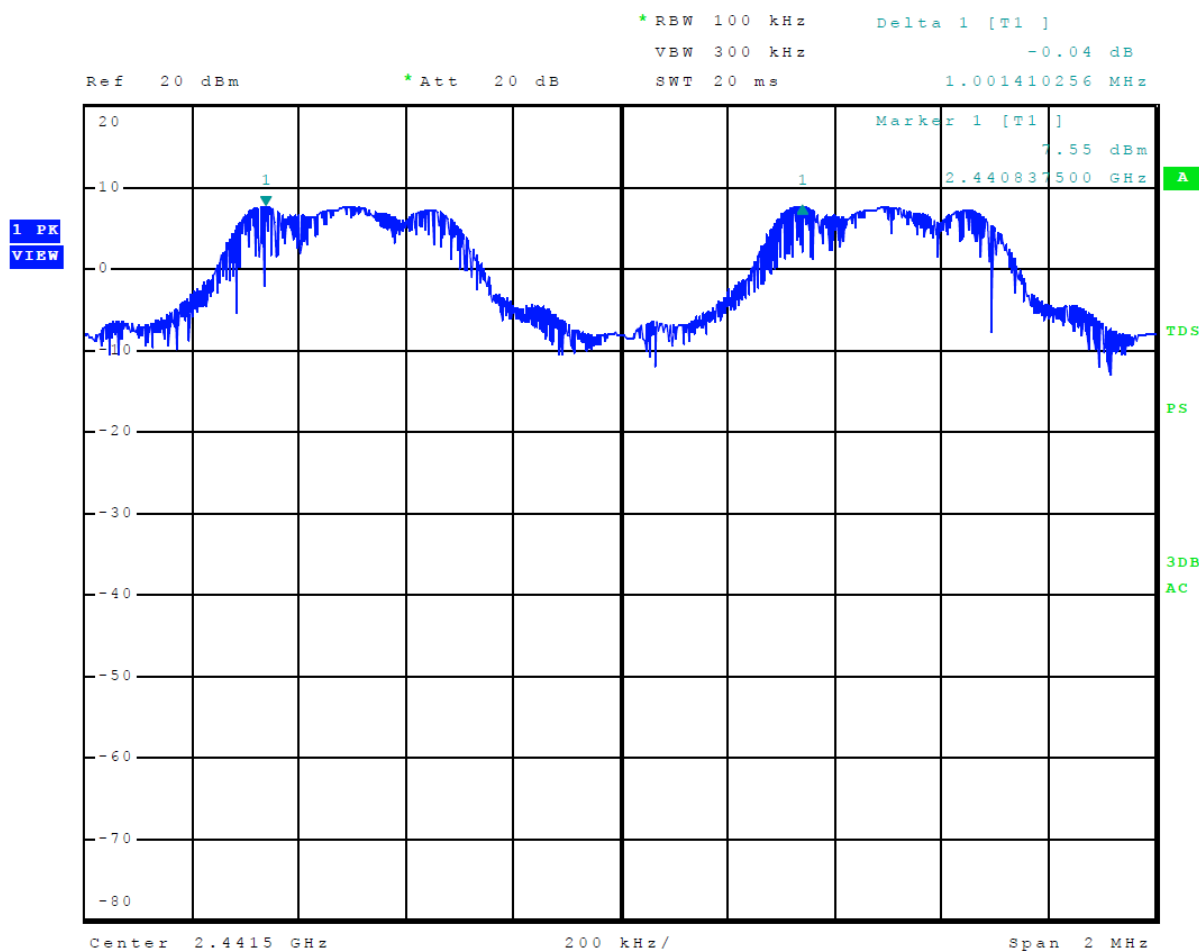


Figure 9 Plot of Dwell time On Channel Mode 2, BT BR


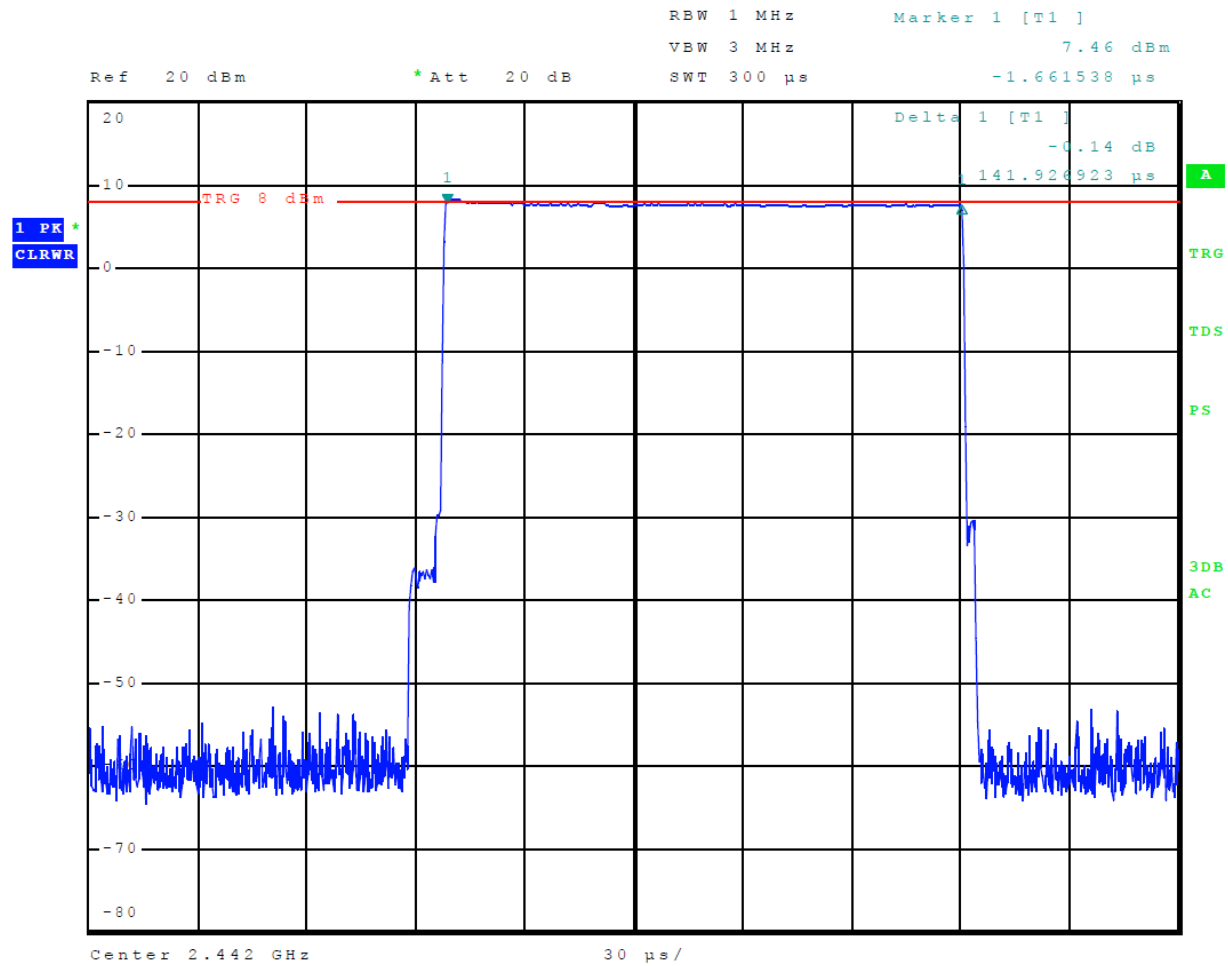


Figure 10 Plot of Number of Times on Channel over 6 Second Period Mode 2, BT BR

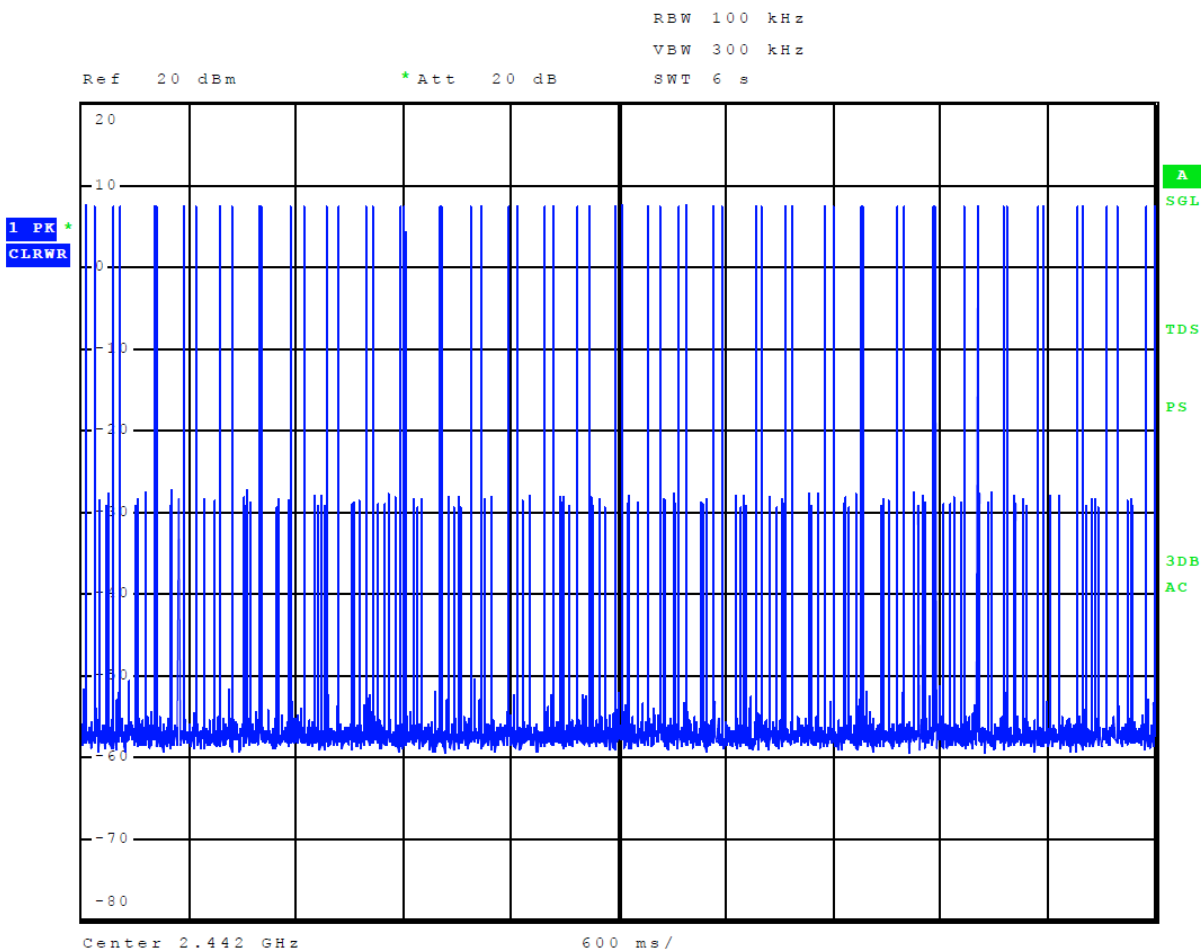

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 41 of 50

Figure 11 Plot of Transmitter Emissions Low Band Edge Mode 2, BT BR

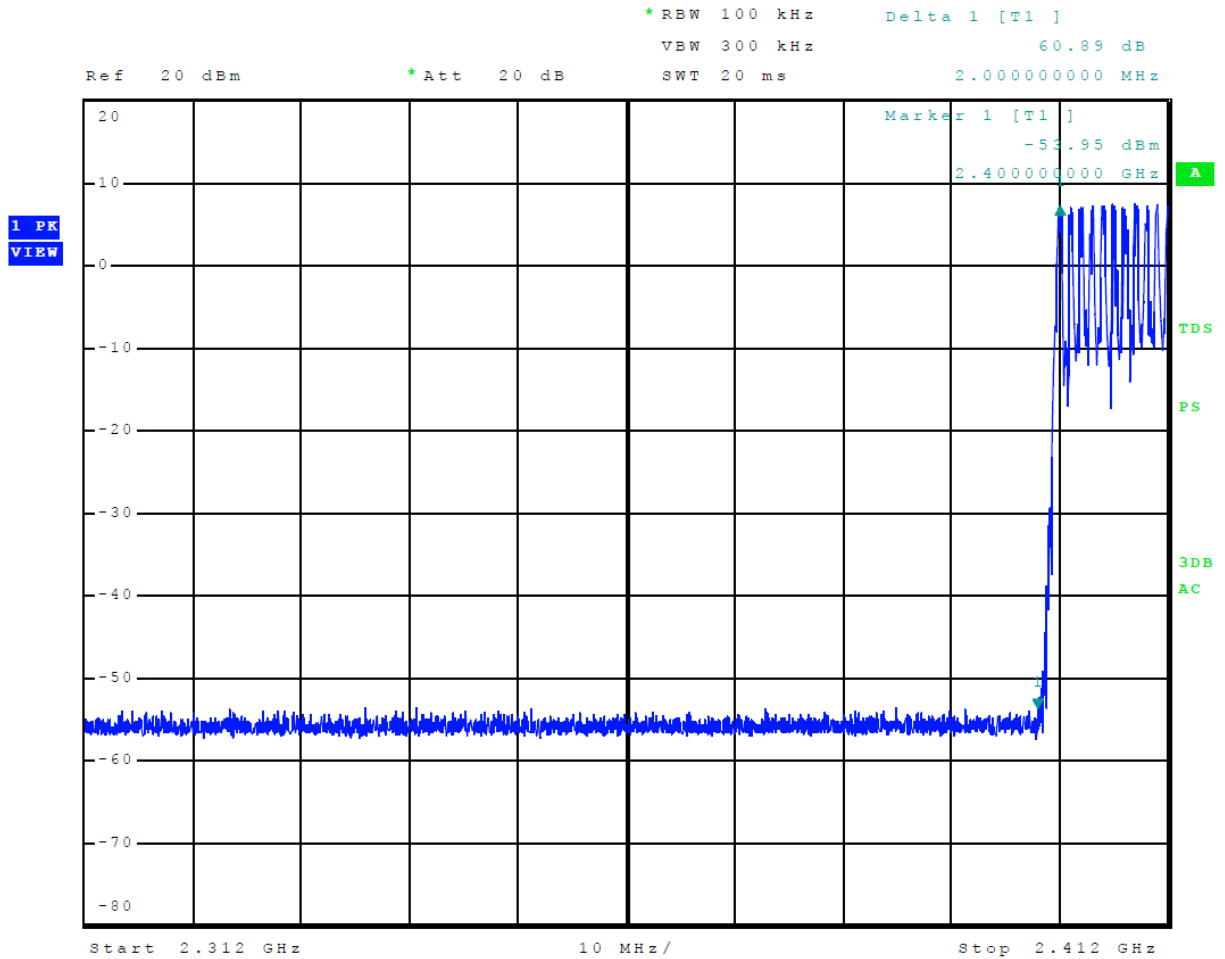

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

Lenexa, KS 66214

Test: 241031

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Revision 4

File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.


PMN: A05008

SN's: 3495259652, 3495259647

Date: February 25, 2025

Page 42 of 50

Figure 12 Plot of Transmitter Emissions High Band Edge Mode 2, BT BR

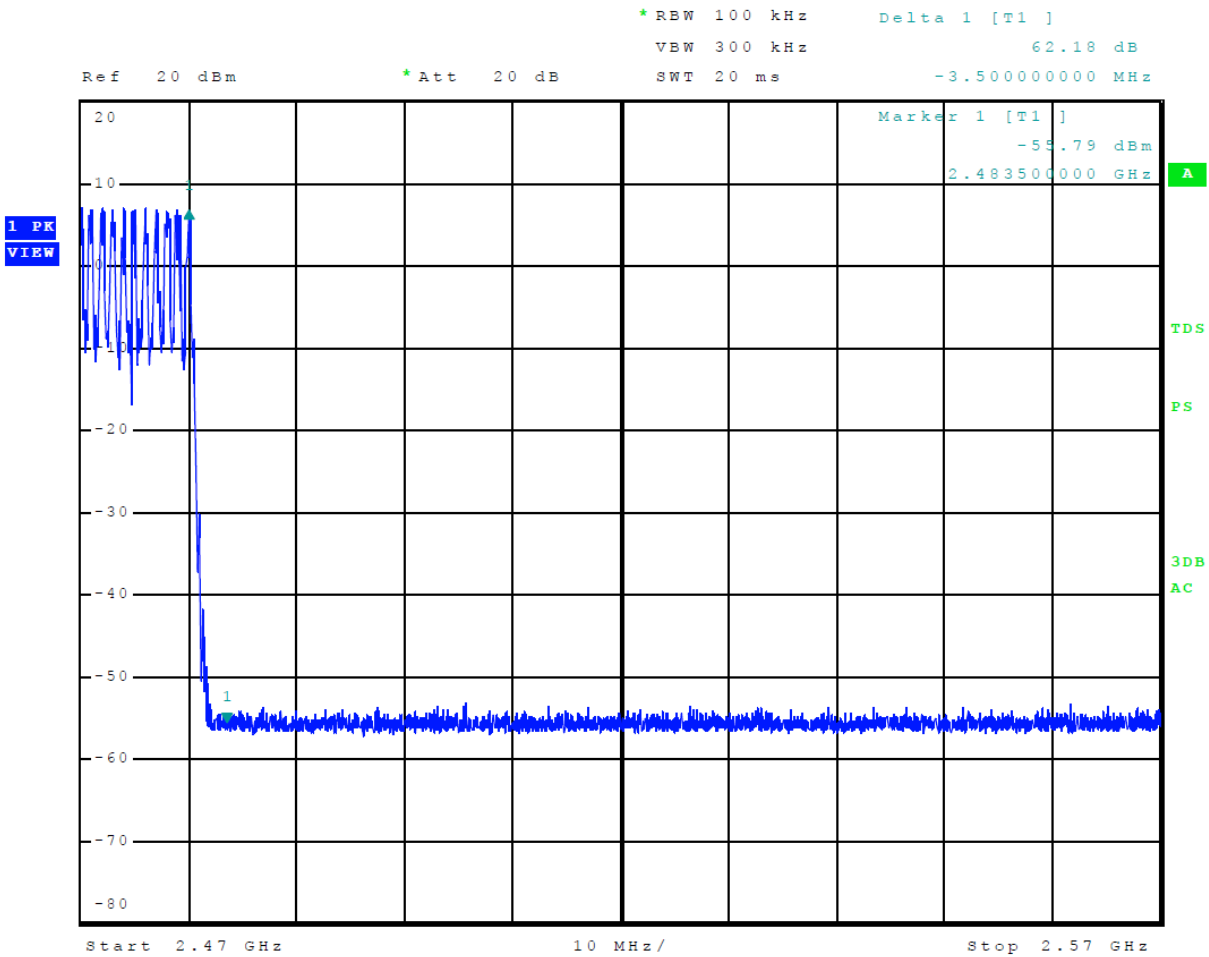

Transmitter Emissions Data

Table 6 Transmitter Radiated Emissions Mode 2, BT BR

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
2402.0	--	--	--	--	--	--	--
4804.0	51.0	36.4	49.7	36.4	54.0	-17.6	-17.6
7206.0	53.2	39.8	52.9	39.8	54.0	-14.2	-14.2
9608.0	56.8	43.4	57.0	43.5	54.0	-10.6	-10.5
12010.0	58.8	45.9	59.6	46.2	54.0	-8.1	-7.8
14412.0	60.5	46.8	60.3	46.9	54.0	-7.2	-7.1
16814.0	65.2	51.5	65.3	51.8	54.0	-2.5	-2.2
2441.0	--	--	--	--	--	--	--
4882.0	49.8	36.1	49.8	36.1	54.0	-17.9	-17.9
7323.0	53.5	40.2	54.0	40.2	54.0	-13.8	-13.8
9764.0	56.5	43.0	57.1	43.0	54.0	-11.0	-11.0
12205.0	60.9	47.1	60.9	47.1	54.0	-6.9	-6.9
14646.0	61.0	47.3	61.4	47.4	54.0	-6.7	-6.6
17087.0	65.0	51.4	64.8	51.3	54.0	-2.6	-2.7
2480.0	--	--	--	--	--	--	--
4960.0	50.6	36.6	50.4	36.6	54.0	3.3	1.1
7440.0	53.2	39.7	53.1	39.7	54.0	-17.4	-17.4
9920.0	57.2	43.8	57.0	43.8	54.0	-14.3	-14.3
12400.0	60.6	46.8	60.1	46.8	54.0	-10.2	-10.2
14880.0	61.2	48.2	61.7	48.3	54.0	-7.2	-7.2
17360.0	64.6	50.9	64.6	51.1	54.0	-5.8	-5.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Transmitter Antenna Port Conducted Data Mode 2, BT BR

Frequency MHz	Antenna Port Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	20-dB Occupied Bandwidth (kHz)
Mode 2, BT BR			
2402	0.006	964.5	1,044.4
2441	0.008	963.8	1,043.3
2480	0.006	962.3	1,043.3

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Paragraph 15.247, Industry Canada RSS-247 Issue 3, and RSS-GEN Issue 5. The antenna port conducted output power measured was 0.008 Watts. The unit utilizes 79 hopping channels with the average time of occupancy less than 0.4 seconds over the required time. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -2.2 dB below the limit. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment
- Annex C Laboratory Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/25/2024	3/25/2025
☐ LISN: Fischer Custom Communications Model:		FCC-LISN-50-16-2-08		3/25/2024	3/25/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303070)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☐ Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
☐ Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
☒ Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/25/2024	3/25/2026
☒ Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
☒ Antenna	Com Power	AH-1840 (101046)	18-40 GHz	3/27/2023	3/27/2025
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/26/2024	1/26/2025
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☐ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
☐ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
☒ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
☒ Power meter	Agilent	N1911A with N1921A	0.05-40 GHz	3/25/2024	3/25/2025
☒ Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	3/25/2024	3/25/2025
☒ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/25/2024	3/25/2025
☐ Attenuator	Fairview	SA6NFFNF100W-40 (1625)	30-18000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/25/2024	3/25/2025
☐ Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	3/25/2024	3/25/2025
☒ Weather station	Davis	6152 (A70927D44N)		7/11/2024	7/11/2025

Rogers Labs, a division of The Compatibility Center LLC

Garmin International, Inc.

7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008

PMN: A05008

Lenexa, KS 66214

Test: 241031

SN's: 3495259652, 3495259647

Phone/Fax: (913) 660-0666

Test to: 47CFR 15C, RSS-Gen RSS-247

Date: February 25, 2025


Revision 4

File: A05008 DSS TstRpt 241031 r4

Page 48 of 50

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☐ Frequency Counter: Leader		LDC-825 (8060153)		3/28/2023	3/28/2025
☐ ISN	Com-Power	Model ISN T-8 (600111)		3/25/2024	3/25/2025
☐ LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
☐ LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
☒ LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
☒ Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	BRC17663 (001)	9.3-9.5 notch 30-1800 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	BRC19565 (001)	9.2-9.6 notch 30-1800 MHz	3/28/2023	3/28/2025
☒ Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/25/2024	3/25/2025
☐ Wave Form Generator Keysight		33500B (MY57400128)		3/25/2024	3/25/2025
☐ Antenna: Solar		9229-1 & 9230-1		2/10/2024	2/10/2025
☐ CDN: Com-Power		Model CDN325E		10/11/2022	10/11/2024
☐ Oscilloscope Scope: Tektronix		MDO 4104		2/10/2024	2/10/2025
☐ EMC Transient Generator HVT		TR 3000		2/10/2024	2/10/2025
☐ AC Power Source (Ametech, California Instruments)				2/10/2024	2/10/2025
☒ Field Intensity Meter: EFM-018				2/10/2024	2/10/2025
☒ ESD Simulator: MZ-15				2/10/2024	2/10/2025
☐ Injection Clamp Luthi Model EM101				not required	
☐ R.F. Power Amp ACS 230-50W				not required	
☐ R.F. Power Amp EIN Model: A301				not required	
☐ R.F. Power Amp A.R. Model: 10W 1010M7				not required	
☐ R.F. Power Amp A.R. Model: 50U1000				not required	
☒ Temperature Chamber				not required	
☒ Shielded Room				not required	
POSSIBLY USE FOR GARMIN GPS TESTING					
☐ GNSS Sig Gen SG80K, SN: GNSS-00952			not required		

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce National Institute of Standards and Technology	
NVLAP[®] ilac-MRA	
Certificate of Accreditation to ISO/IEC 17025:2017	
NVLAP LAB CODE: 200087-0	
Rogers Labs, a division of The Compatibility Center LLC Lenexa, KS	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2024-03-18 through 2025-03-31 Effective Dates	  For the National Voluntary Laboratory Accreditation Program

Rogers Labs, a division of The Compatibility Center LLC
7915 Nieman Road FCC ID: IPH-05008 IC: 1792A-05008
Lenexa, KS 66214 Test: 241031
Phone/Fax: (913) 660-0666 Test to: 47CFR 15C, RSS-Gen RSS-247
Revision 4 File: A05008 DSS TstRpt 241031 r4

Garmin International, Inc.
PMN: A05008
SN's: 3495259652, 3495259647
Date: February 25, 2025
Page 50 of 50