






Spurious Emission 8DPSK 3M DH5 2402MHz

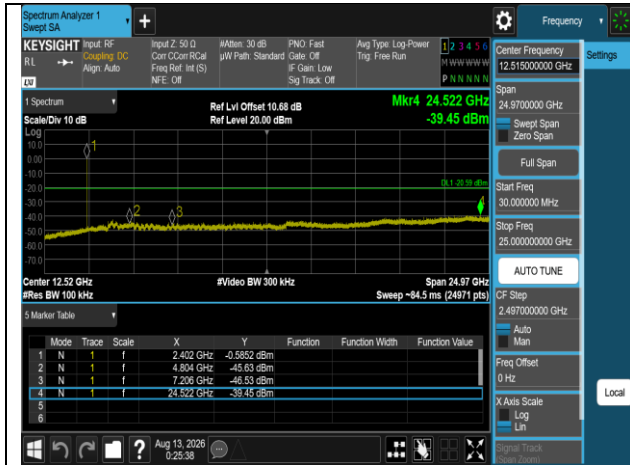

Spurious Emission 8DPSK 3M DH5 2441MHz

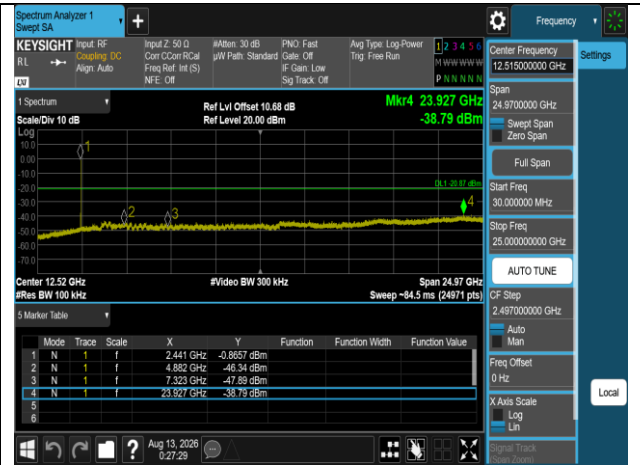

Spurious Emission 8DPSK 3M DH5 2480MHz



4.7 TIME OF OCCUPANCY (DWELL TIME)

4.7.1 Test Limit

According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = 5 ms
~15ms(Depends on signal characteristics)

4.7.3 Test Setup

Refer to section 1.9.

4.7.4 Test Result

Temperature: 23.3 ~ 23.6°C

Test date: August 12 ~ 13, 2026

Humidity: 59 ~ 61% RH

Tested by: Marco Chan

GFSK_DH5

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
39	DH1	140.80	400
	DH3	270.40	400
	DH5	313.60	400

$\pi/4$ DQPSK_2DH5

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
39	2DH1	124.80	400
	2DH3	262.40	400
	2DH5	308.80	400

8DPSK_3DH5

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
39	3DH1	124.80	400
	3DH3	262.40	400
	3DH5	308.80	400

GFSK (1Mbps):

CH Mid	DH1 time slot	=	0.440	*	(1600/2/79)	*	31.6	=	140.80 (ms)
	DH3 time slot	=	1.690	*	(1600/4/79)	*	31.6	=	270.40 (ms)
	DH5 time slot	=	2.940	*	(1600/6/79)	*	31.6	=	313.60 (ms)

$\pi/4$ -DQPSK (2Mbps):


CH Mid	2DH1 time slot	=	0.390	*	(1600/2/79)	*	31.6	=	124.80 (ms)
	2DH3 time slot	=	1.640	*	(1600/4/79)	*	31.6	=	262.40 (ms)
	2DH5 time slot	=	2.895	*	(1600/6/79)	*	31.6	=	308.80 (ms)

8-DPSK (3Mbps):


CH Mid	3DH1 time slot	=	0.390	*	(1600/2/79)	*	31.6	=	124.80 (ms)
	3DH3 time slot	=	1.640	*	(1600/4/79)	*	31.6	=	262.40 (ms)
	3DH5 time slot	=	2.895	*	(1600/6/79)	*	31.6	=	308.80 (ms)

A period time = 0.4 (s) * 79 = 31.6 (s)


Test Data

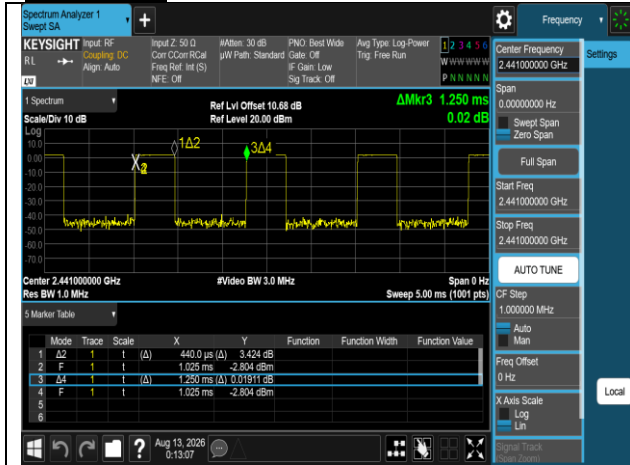


Dwell Time GFSK 1M DH1 2441MHz

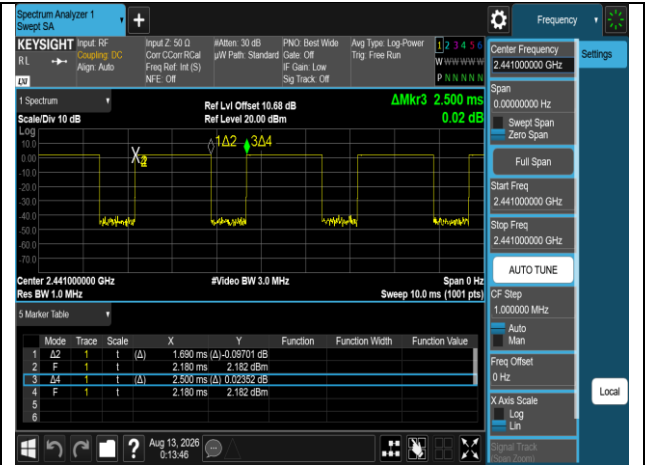


Dwell Time GFSK 1M DH3 2441MHz

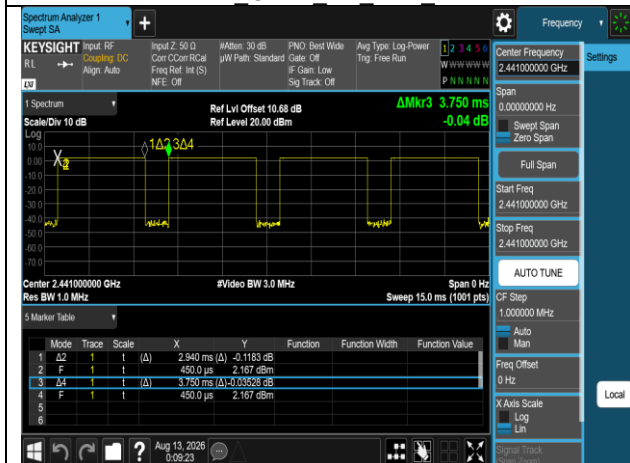


Dwell Time GFSK 1M DH5 2441MHz

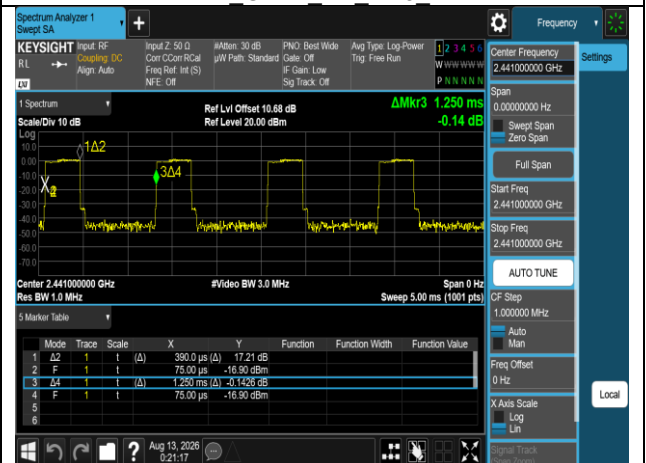


Dwell Time 4DQPSK 2M DH1 2441MHz

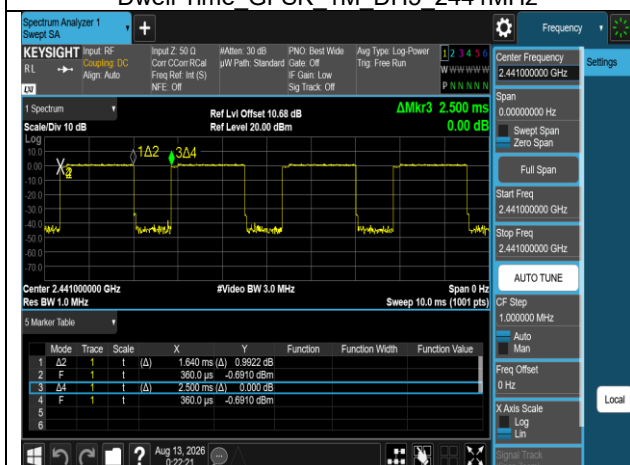


Dwell Time 4DQPSK 2M DH3 2441MHz

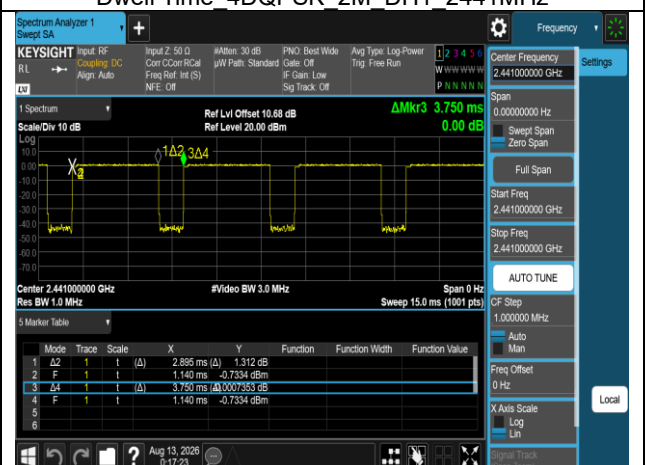


Dwell Time 4DQPSK 2M DH5 2441MHz

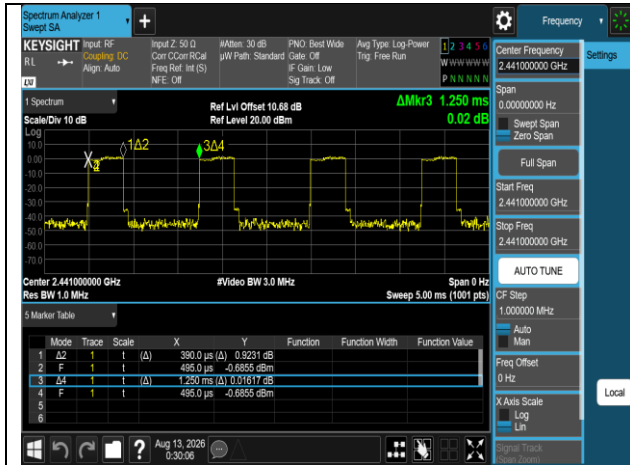


Dwell Time 8DPSK 3M DH1 2441MHz

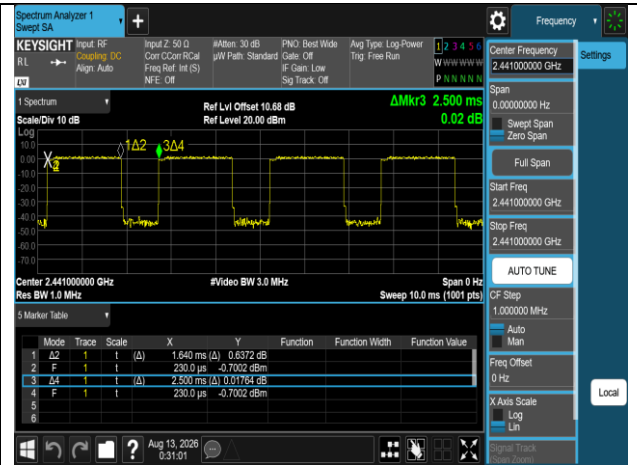

Dwell Time 8DPSK 3M DH3 2441MHz

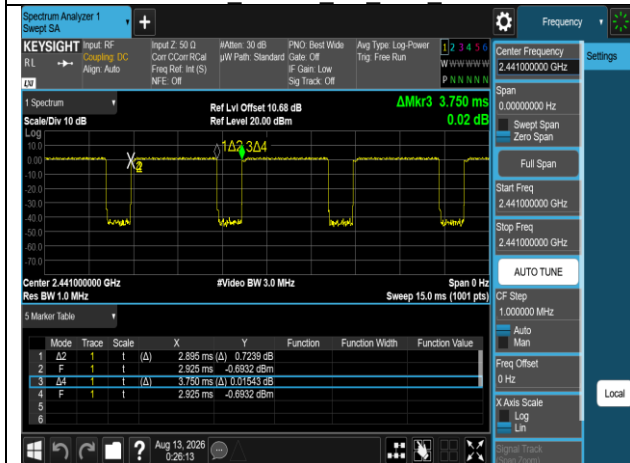

Dwell Time 8DPSK 3M DH5 2441MHz



4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10-2020 and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz).

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

5. The SA setting following :

(1) Below 30MHz :

(1.1) 9KHz-490KHz : RBW=200Hz / VBW=1kHz / Sweep=AUTO

(1.2) 490KHz-30MHz : RBW=10kHz / VBW=30kHz / Sweep=AUTO

(2) 30MHz to 1GHz : RBW = 100kHz, VBW $\geq$ 3*RBW, Sweep = Auto,

Detector = Peak, Trace = Max hold.

(3) Above 1GHz :

(3.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(3.2) For Average measurement : RBW = 1MHz, VBW

·If Duty Cycle $\geq$ 98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW=1/T.


6. Data result

Actual FS=Spectrum Reading Level + Factor


Margin=Actual FS- Limit

4.8.3 Test Setup


9kHz ~ 30MHz

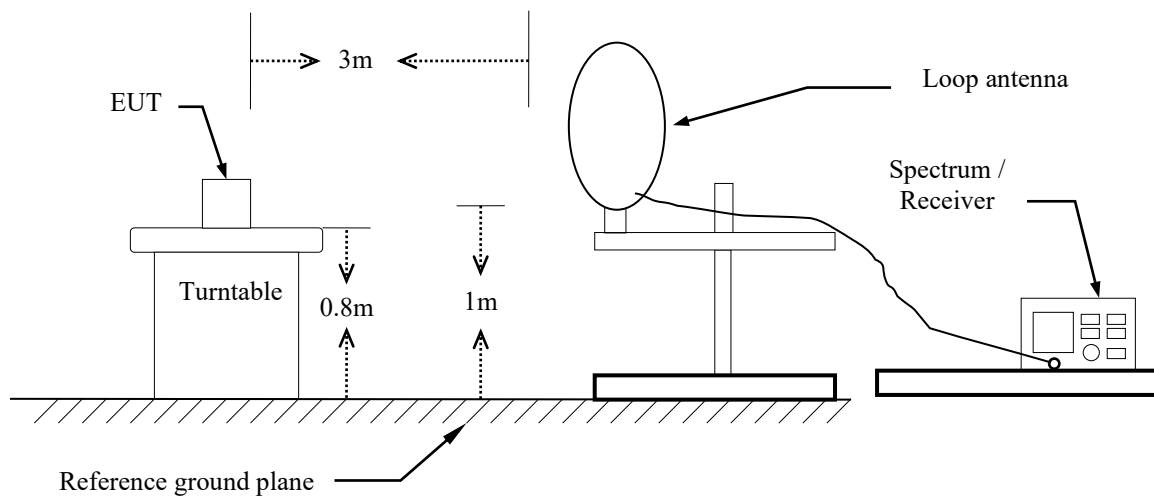

30MHz ~ 1GHz

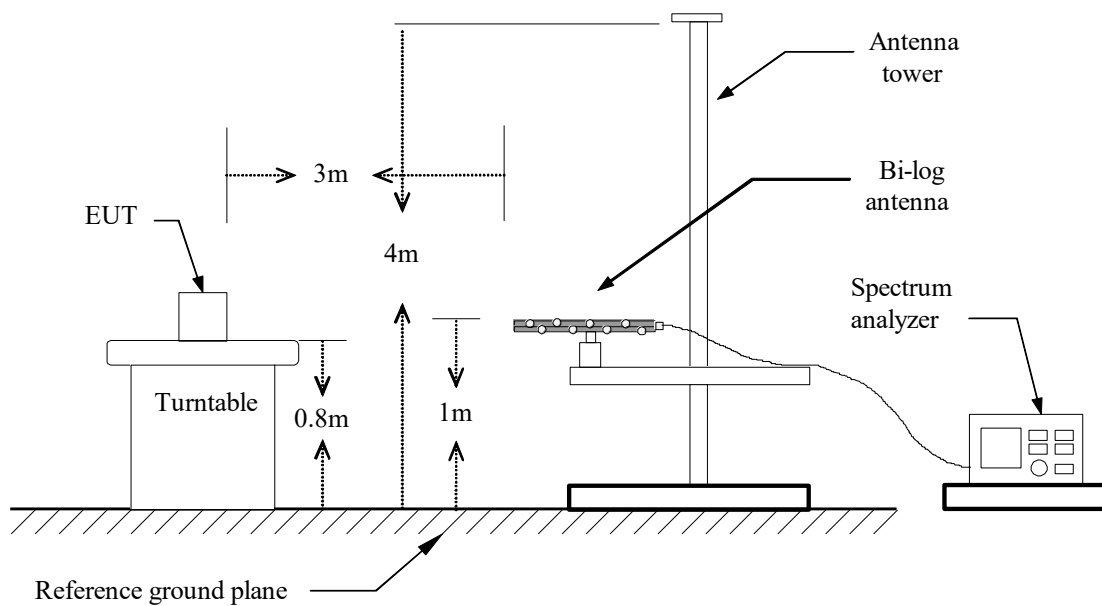

Above 1 GHz

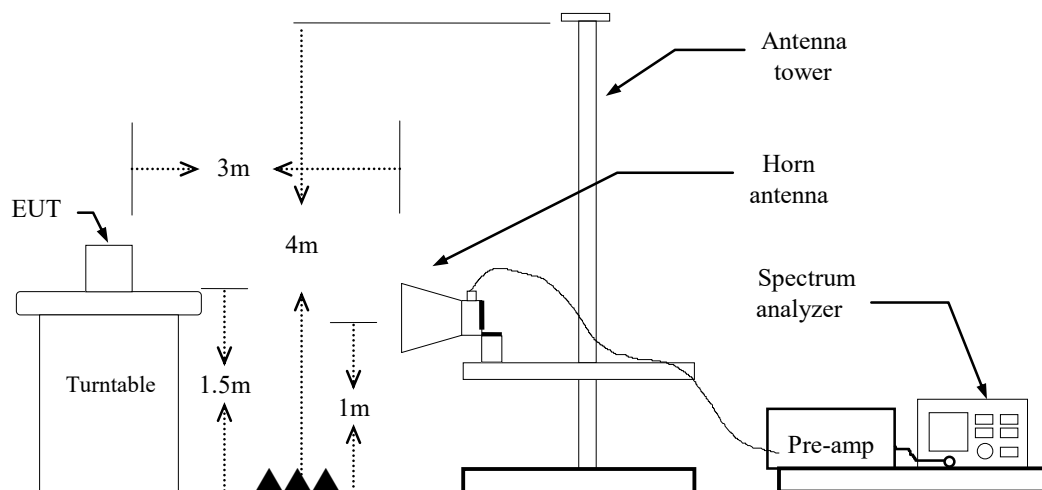


4.8.4 Test Result

Band Edge Test Data

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : Vertical
Engineer : Ben.Yang
Test Chamber : 966A

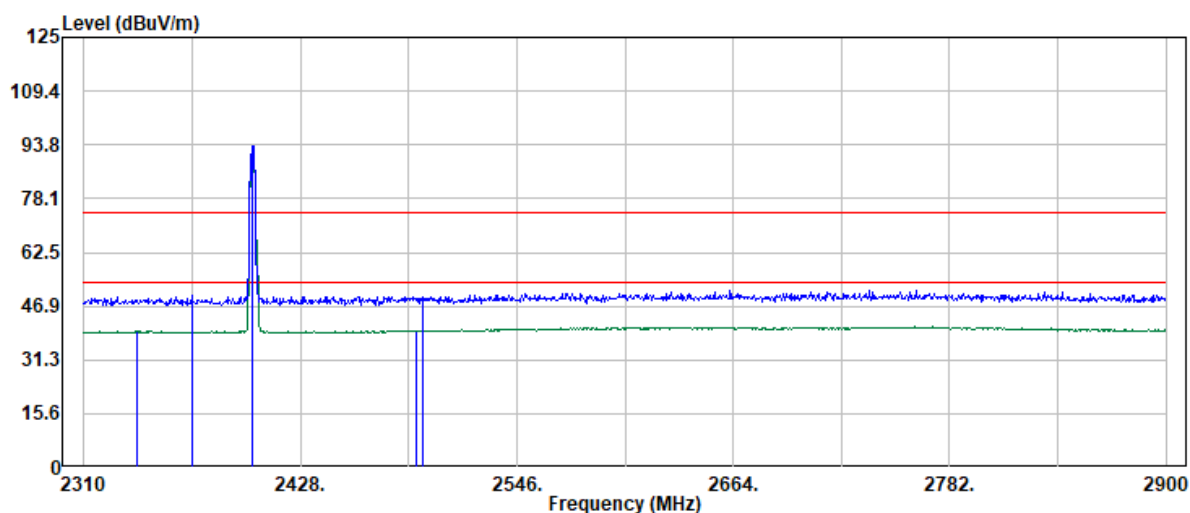


Freq	Read		Actual	Limit		Detector
MHz	Level	Factor	FS	@3m	Margin	Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2338.98	32.83	6.72	39.55	54.00	-14.45	Average
2368.95	43.14	6.64	49.78	74.00	-24.22	Peak
2402.00	86.94	6.56	93.50	--	--	Peak
2402.00	86.88	6.56	93.44	--	--	Average
2490.85	32.84	7.01	39.85	54.00	-14.15	Average
2494.34	42.64	7.01	49.65	74.00	-24.35	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 51 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

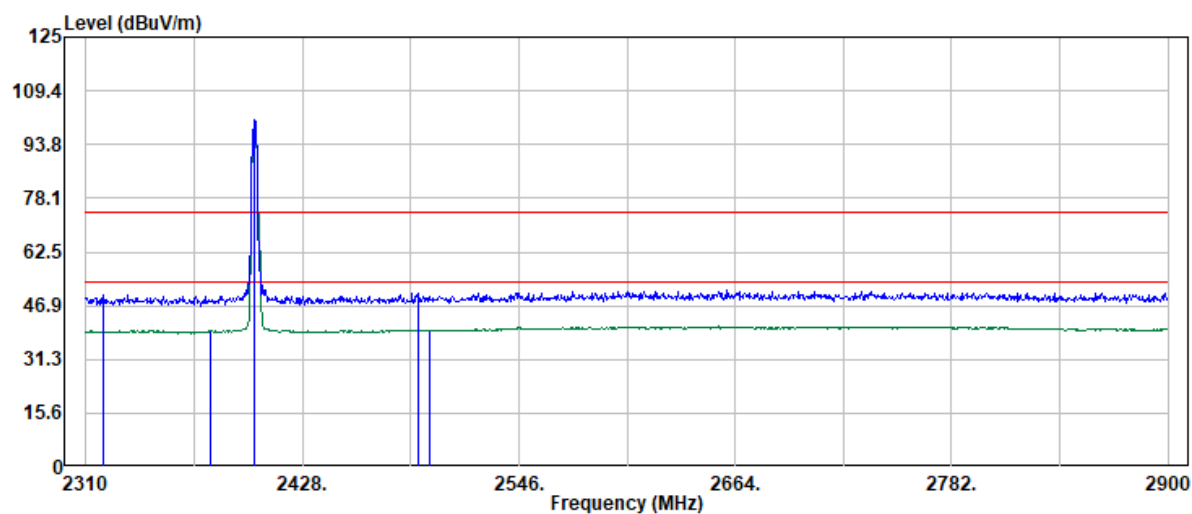


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2319.49	43.57	6.62	50.19	74.00	-23.81	Peak
2377.94	33.12	6.65	39.77	54.00	-14.23	Average
2402.00	94.70	6.56	101.26	--	--	Peak
2402.00	94.07	6.56	100.63	--	--	Average
2491.35	43.55	7.01	50.56	74.00	-23.44	Peak
2497.34	32.79	7.02	39.81	54.00	-14.19	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 52 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

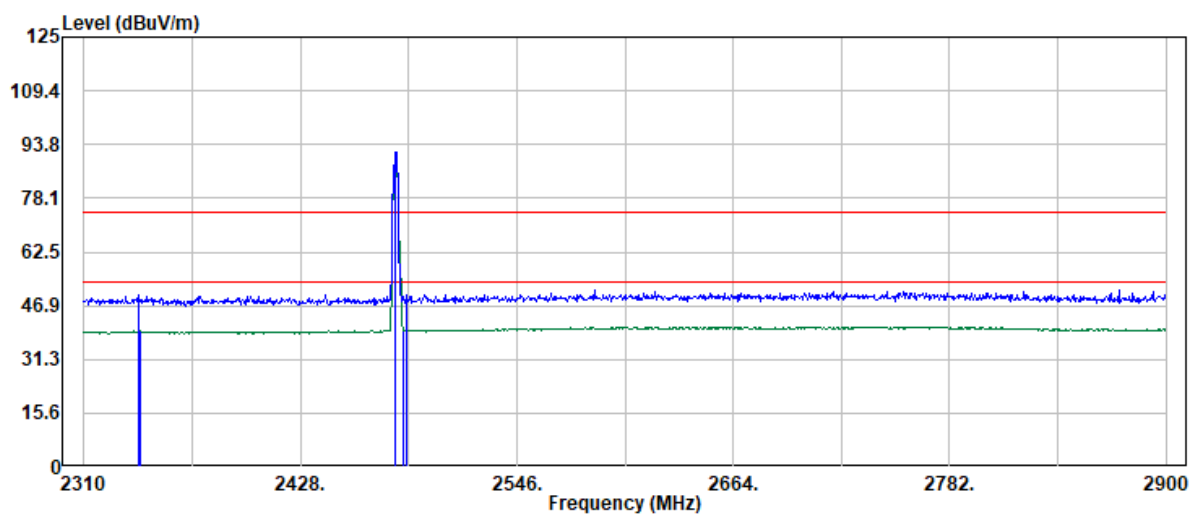


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2339.48	43.29	6.73	50.02	74.00	-23.98	Peak
2340.47	32.81	6.74	39.55	54.00	-14.45	Average
2480.00	84.40	6.89	91.29	--	--	Peak
2480.00	84.35	6.89	91.24	--	--	Average
2484.35	32.88	6.94	39.82	54.00	-14.18	Average
2485.85	42.94	6.96	49.90	74.00	-24.10	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 53 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

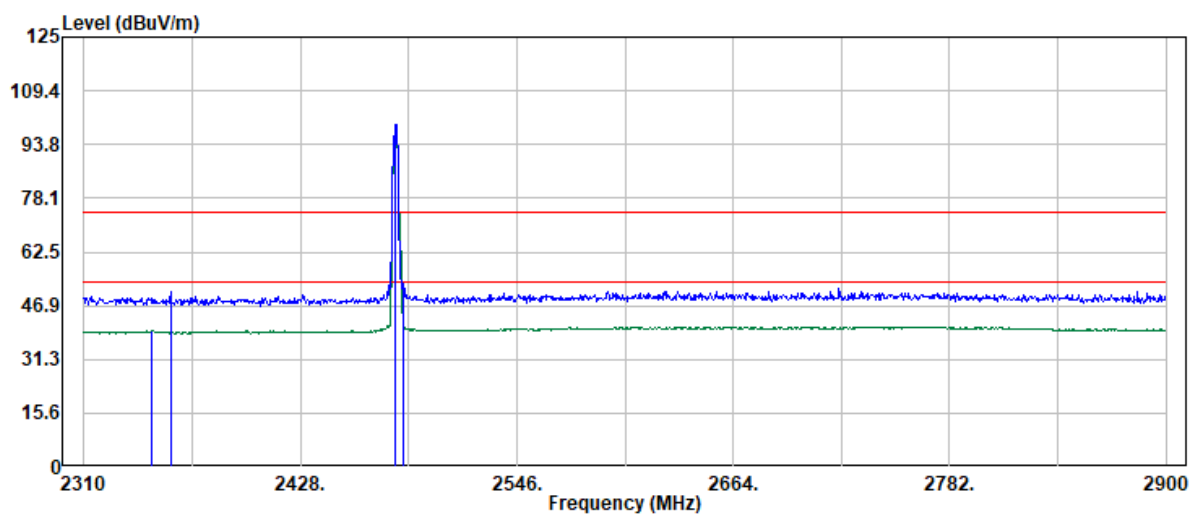


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2346.97	32.80	6.68	39.48	54.00	-14.52	Average
2357.46	44.54	6.58	51.12	74.00	-22.88	Peak
2480.00	92.62	6.89	99.51	--	--	Peak
2480.00	92.45	6.89	99.34	--	--	Average
2483.85	46.52	6.94	53.46	74.00	-20.54	Peak
2483.85	34.87	6.94	41.81	54.00	-12.19	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 54 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : E2
Setting :

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

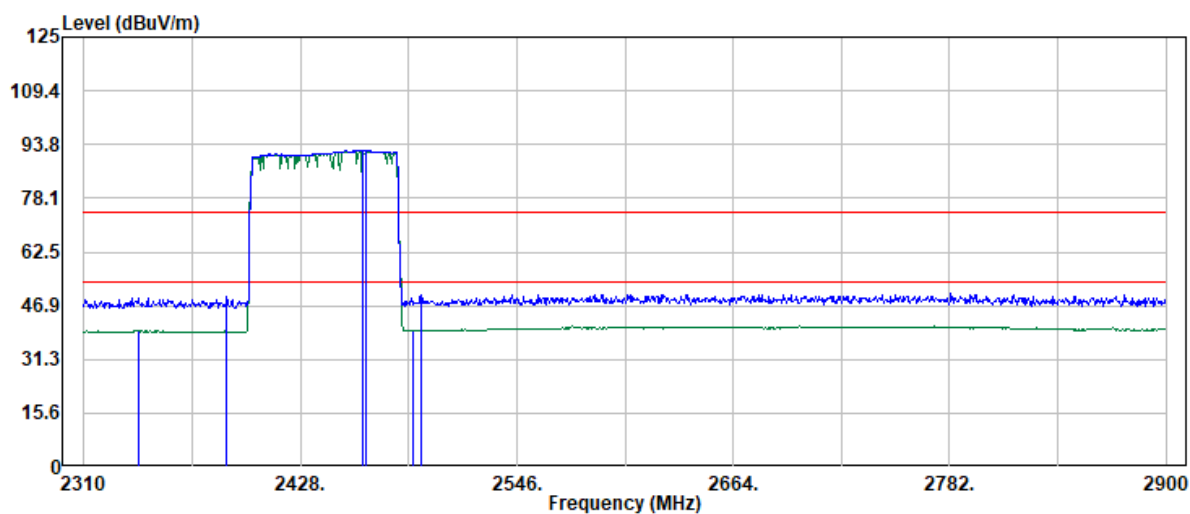


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2339.48	32.77	6.73	39.50	54.00	-14.50	Average
2387.93	42.73	6.64	49.37	74.00	-24.63	Peak
2462.37	85.16	6.78	91.94	--	--	Peak
2463.87	85.03	6.78	91.81	--	--	Average
2489.35	32.79	7.00	39.79	54.00	-14.21	Average
2493.84	42.85	7.01	49.86	74.00	-24.14	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 55 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : E2
Setting :

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

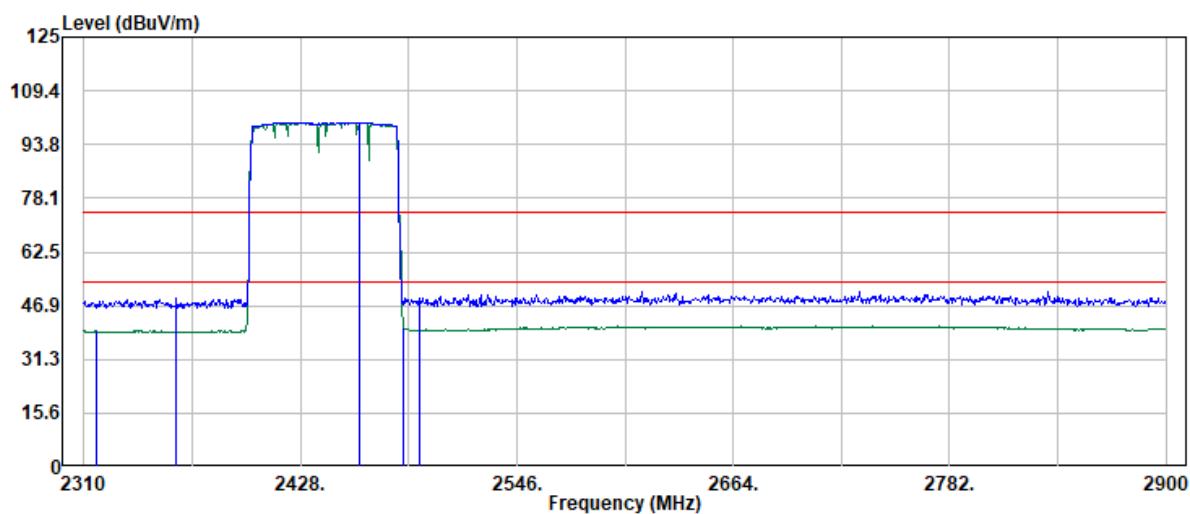


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2316.99	32.94	6.63	39.57	54.00	-14.43	Average
2360.46	42.31	6.54	48.85	74.00	-25.15	Peak
2459.87	93.24	6.78	100.02	--	--	Average
2460.37	93.37	6.78	100.15	--	--	Peak
2483.85	33.78	6.94	40.72	54.00	-13.28	Average
2493.35	42.06	7.01	49.07	74.00	-24.93	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 56 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

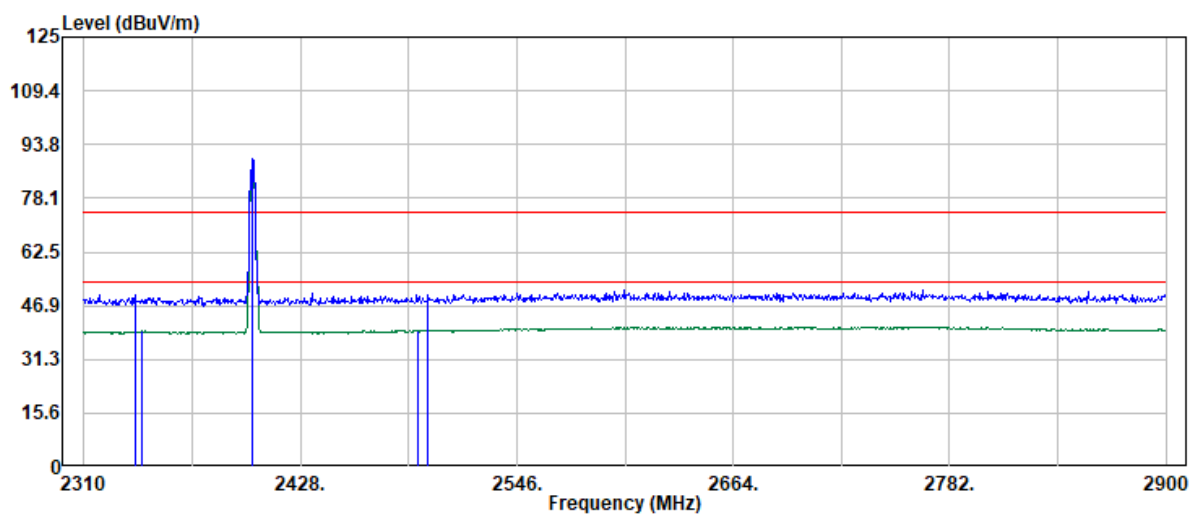


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2337.98	43.11	6.71	49.82	74.00	-24.18	Peak
2341.97	32.75	6.72	39.47	54.00	-14.53	Average
2402.00	82.87	6.56	89.43	--	--	Peak
2402.00	79.94	6.56	86.50	--	--	Average
2492.35	32.67	7.01	39.68	54.00	-14.32	Average
2497.84	43.01	7.02	50.03	74.00	-23.97	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 57 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

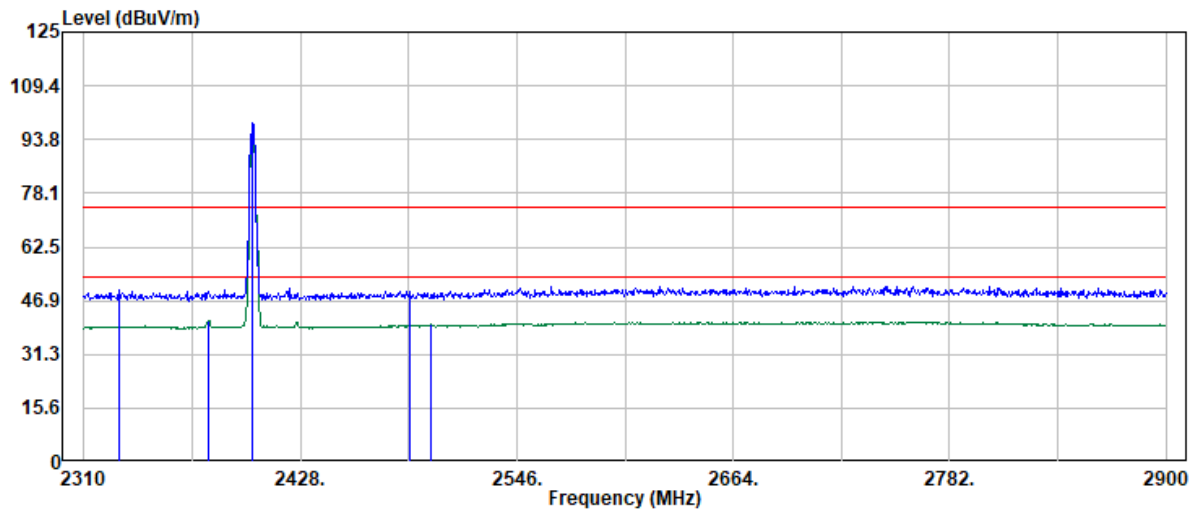


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2328.98	43.44	6.62	50.06	74.00	-23.94	Peak
2377.94	34.54	6.65	41.19	54.00	-12.81	Average
2402.00	91.86	6.56	98.42	--	--	Peak
2402.00	88.94	6.56	95.50	--	--	Average
2487.35	42.73	6.97	49.70	74.00	-24.30	Peak
2498.84	32.88	7.02	39.90	54.00	-14.10	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 58 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

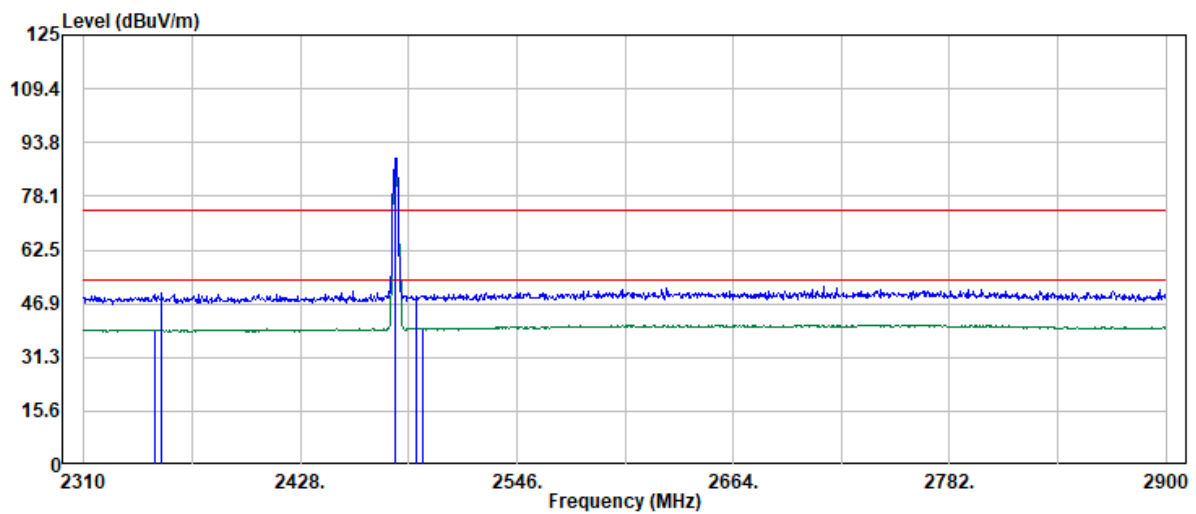


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2348.97	32.72	6.66	39.38	54.00	-14.62	Average
2352.46	43.16	6.63	49.79	74.00	-24.21	Peak
2480.00	82.23	6.89	89.12	--	--	Peak
2480.00	79.45	6.89	86.34	--	--	Average
2491.35	42.18	7.01	49.19	74.00	-24.81	Peak
2494.84	32.79	7.01	39.80	54.00	-14.20	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 59 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : Bandedge
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

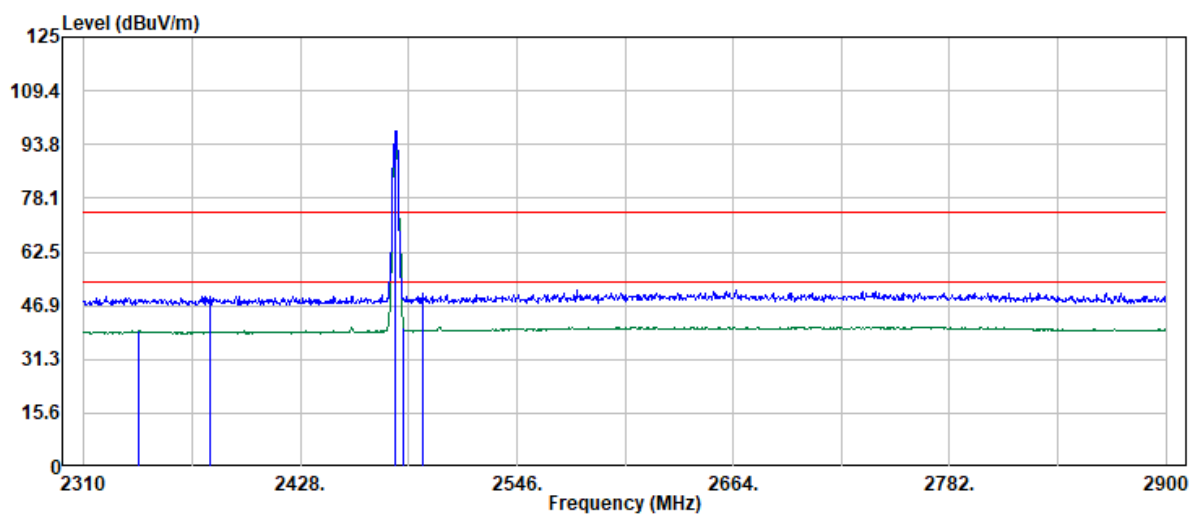


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2339.98	32.70	6.74	39.44	54.00	-14.56	Average
2378.44	43.11	6.65	49.76	74.00	-24.24	Peak
2480.00	90.85	6.89	97.74	--	--	Peak
2480.00	87.89	6.89	94.78	--	--	Average
2483.85	33.77	6.94	40.71	54.00	-13.29	Average
2494.34	43.37	7.01	50.38	74.00	-23.62	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 60 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : E2
Setting :

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

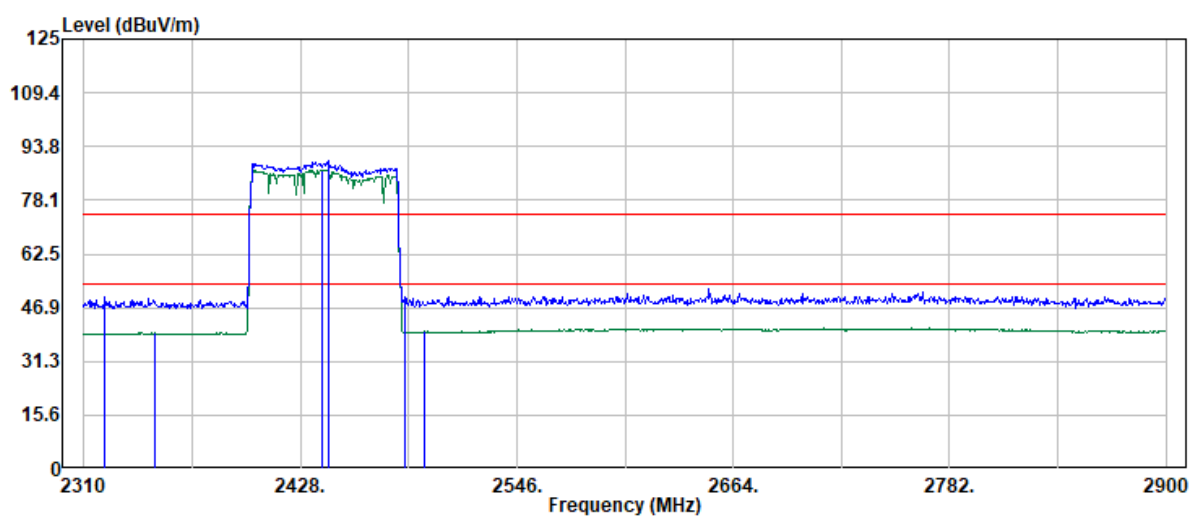


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2321.49	43.16	6.61	49.77	74.00	-24.23	Peak
2348.97	32.91	6.66	39.57	54.00	-14.43	Average
2439.89	80.25	6.56	86.81	--	--	Average
2443.39	82.81	6.59	89.40	--	--	Peak
2485.35	42.96	6.95	49.91	74.00	-24.09	Peak
2495.34	32.89	7.01	39.90	54.00	-14.10	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 61 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402~2480 MHz
Operation Mode : Hopping
EUT Pol : E2
Setting :

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

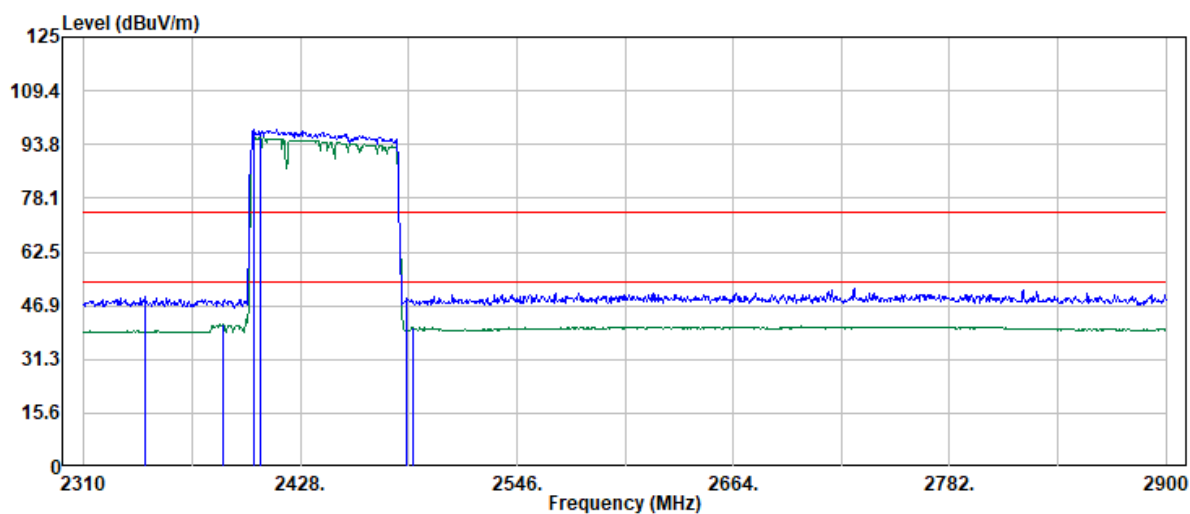


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
2342.97	42.72	6.71	49.43	74.00	-24.57	Peak
2385.94	34.79	6.65	41.44	54.00	-12.56	Average
2402.42	91.49	6.56	98.05	--	--	Peak
2405.92	89.02	6.61	95.63	--	--	Average
2486.35	42.00	6.96	48.96	74.00	-25.04	Peak
2489.35	33.48	7.00	40.48	54.00	-13.52	Average

TX Test Data

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-24
Temp./Humi. : 25.4/53
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

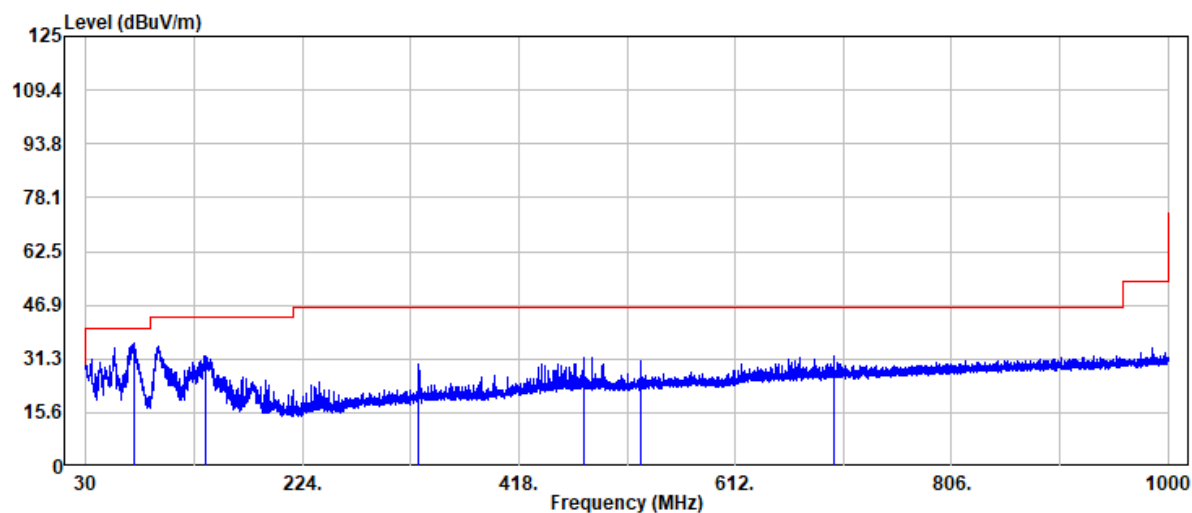


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
73.40	51.46	-15.66	35.80	40.00	-4.20	Peak
137.40	42.65	-10.35	32.30	43.50	-11.20	Peak
328.20	38.29	-8.73	29.56	46.00	-16.44	Peak
477.00	36.11	-4.41	31.70	46.00	-14.30	Peak
527.20	34.61	-3.90	30.71	46.00	-15.29	Peak
700.70	33.08	-1.02	32.06	46.00	-13.94	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 63 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-24
Temp./Humi. : 25.4/53
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

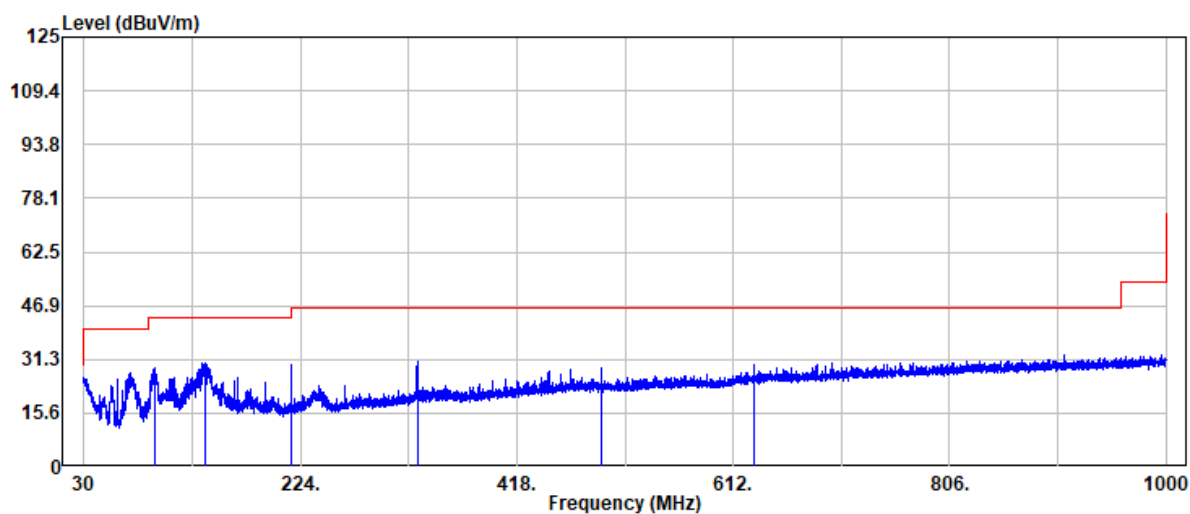


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
93.90	43.87	-15.09	28.78	43.50	-14.72	Peak
138.90	40.67	-10.33	30.34	43.50	-13.16	Peak
216.00	42.36	-12.52	29.84	43.50	-13.66	Peak
329.40	39.22	-8.70	30.52	46.00	-15.48	Peak
493.50	32.98	-4.34	28.64	46.00	-17.36	Peak
631.10	31.54	-1.85	29.69	46.00	-16.31	Peak

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 64 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

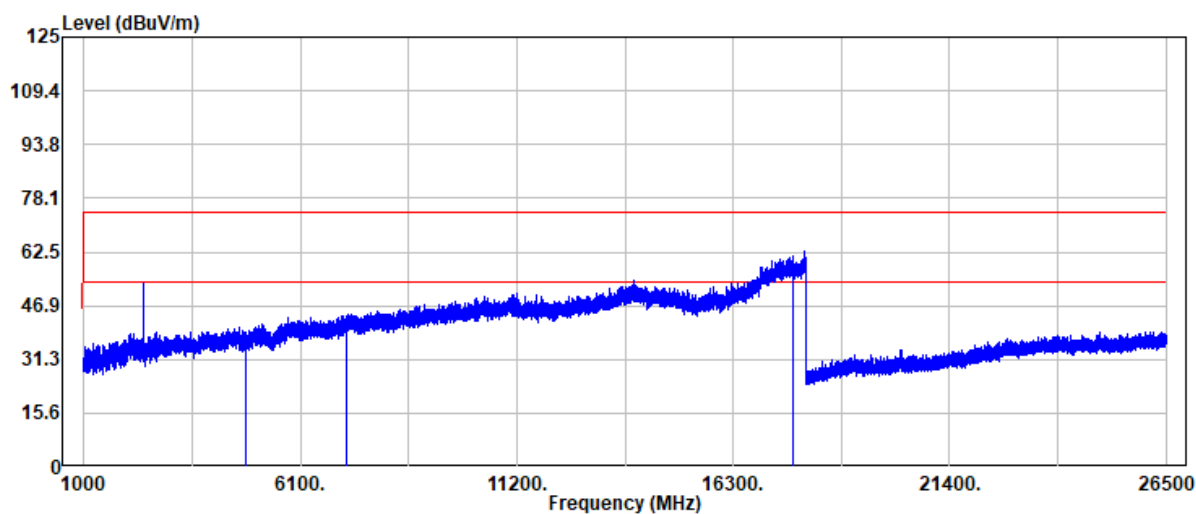


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.37	2.94	39.31	74.00	-34.69	Peak
4804.00	28.55	2.94	31.49	54.00	-22.51	Average
7206.00	34.74	9.81	44.55	74.00	-29.45	Peak
7206.00	26.60	9.81	36.41	54.00	-17.59	Average
17717.00	34.61	26.59	61.20	74.00	-12.80	Peak
17717.00	24.09	26.59	50.68	54.00	-3.32	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 65 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

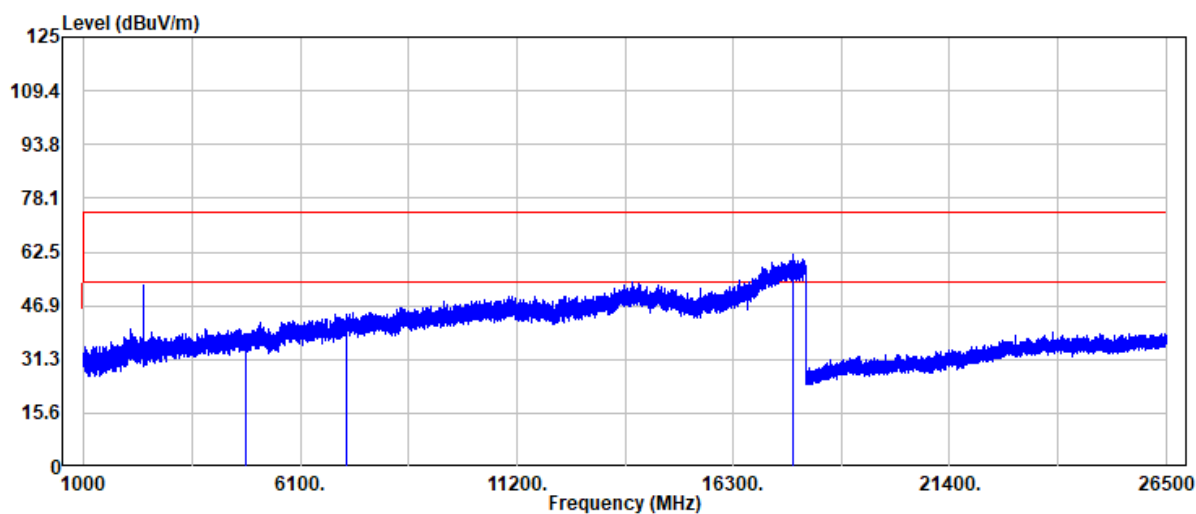


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	35.82	2.94	38.76	74.00	-35.24	Peak
4804.00	28.97	2.94	31.91	54.00	-22.09	Average
7206.00	34.57	9.81	44.38	74.00	-29.62	Peak
7206.00	26.68	9.81	36.49	54.00	-17.51	Average
17721.00	35.10	26.47	61.57	74.00	-12.43	Peak
17721.00	24.12	26.47	50.59	54.00	-3.41	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 66 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

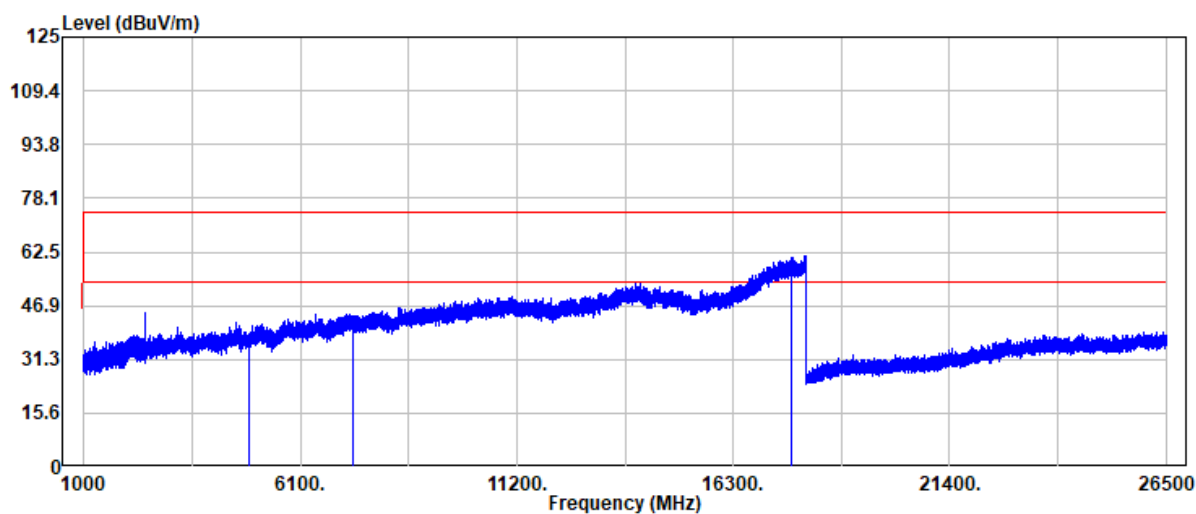


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	35.71	3.16	38.87	74.00	-35.13	Peak
4882.00	28.53	3.16	31.69	54.00	-22.31	Average
7323.00	34.11	9.82	43.93	74.00	-30.07	Peak
7323.00	26.17	9.82	35.99	54.00	-18.01	Average
17682.00	33.99	26.80	60.79	74.00	-13.21	Peak
17682.00	24.06	26.80	50.86	54.00	-3.14	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 67 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

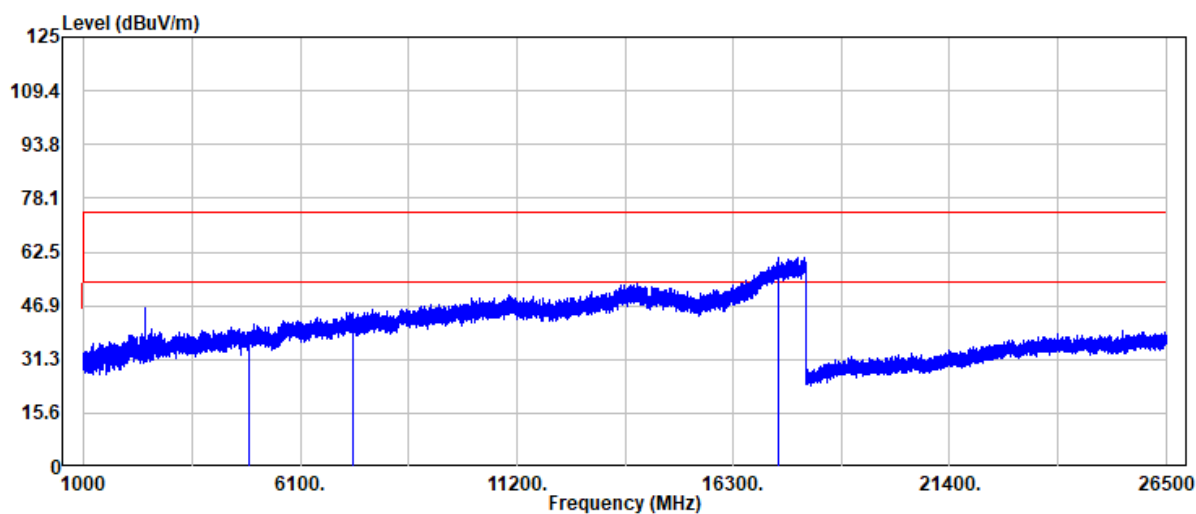


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	35.81	3.16	38.97	74.00	-35.03	Peak
4882.00	28.59	3.16	31.75	54.00	-22.25	Average
7323.00	34.93	9.82	44.75	74.00	-29.25	Peak
7323.00	26.61	9.82	36.43	54.00	-17.57	Average
17351.00	34.65	26.26	60.91	74.00	-13.09	Peak
17351.00	24.03	26.26	50.29	54.00	-3.71	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 68 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

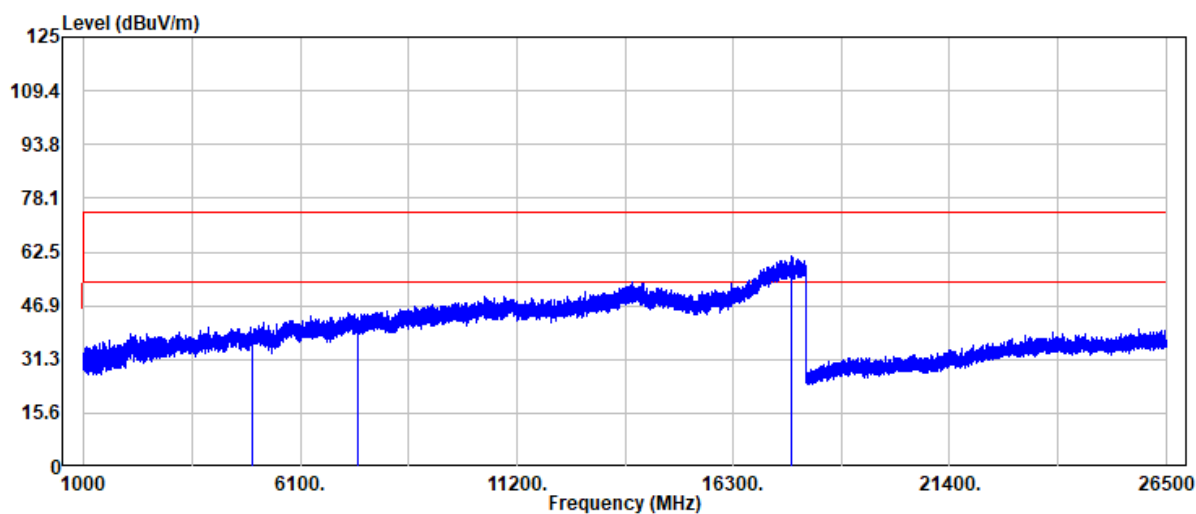


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	34.48	4.00	38.48	74.00	-35.52	Peak
4960.00	27.98	4.00	31.98	54.00	-22.02	Average
7440.00	33.73	9.80	43.53	74.00	-30.47	Peak
7440.00	26.19	9.80	35.99	54.00	-18.01	Average
17677.00	34.45	26.73	61.18	74.00	-12.82	Peak
17677.00	24.05	26.73	50.78	54.00	-3.22	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 69 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_BR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

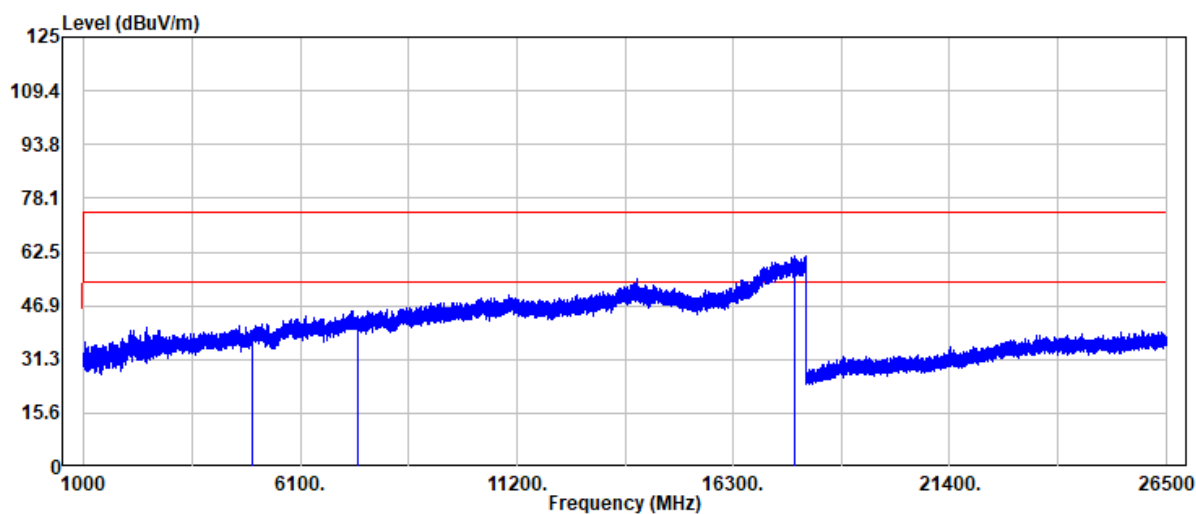


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.86	4.00	39.86	74.00	-34.14	Peak
4960.00	28.07	4.00	32.07	54.00	-21.93	Average
7440.00	34.01	9.80	43.81	74.00	-30.19	Peak
7440.00	26.68	9.80	36.48	54.00	-17.52	Average
17740.00	35.58	25.95	61.53	74.00	-12.47	Peak
17740.00	24.13	25.95	50.08	54.00	-3.92	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 70 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

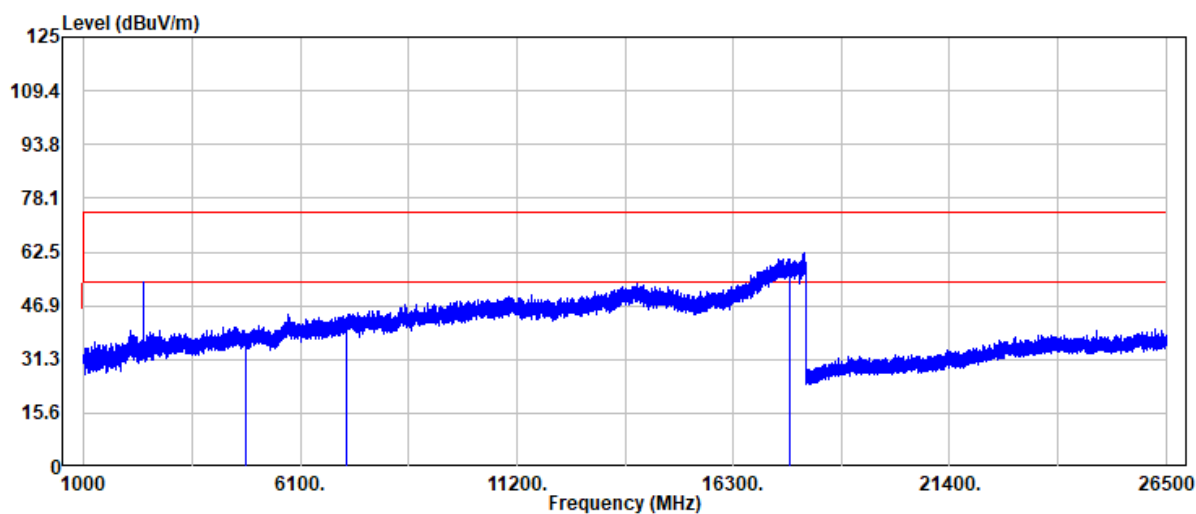


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	35.68	2.94	38.62	74.00	-35.38	Peak
4804.00	28.71	2.94	31.65	54.00	-22.35	Average
7206.00	34.07	9.81	43.88	74.00	-30.12	Peak
7206.00	26.22	9.81	36.03	54.00	-17.97	Average
17616.00	34.11	26.47	60.58	74.00	-13.42	Peak
17616.00	24.04	26.47	50.51	54.00	-3.49	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 71 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2402 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

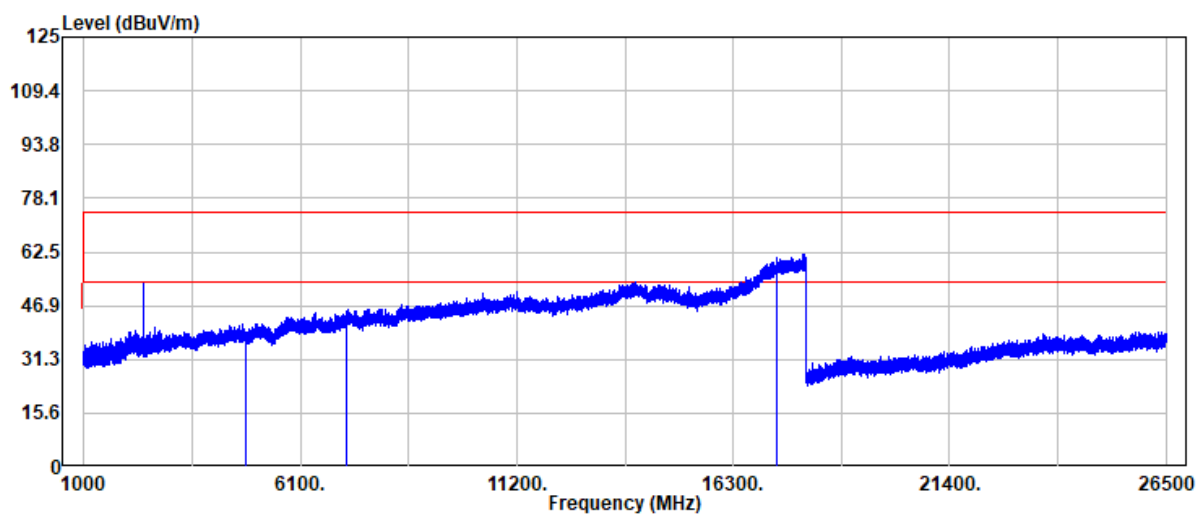


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4804.00	36.11	2.94	39.05	74.00	-34.95	Peak
4804.00	28.82	2.94	31.76	54.00	-22.24	Average
7206.00	35.94	9.81	45.75	74.00	-28.25	Peak
7206.00	26.61	9.81	36.42	54.00	-17.58	Average
17342.00	34.63	26.26	60.89	74.00	-13.11	Peak
17342.00	24.00	26.26	50.26	54.00	-3.74	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 72 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

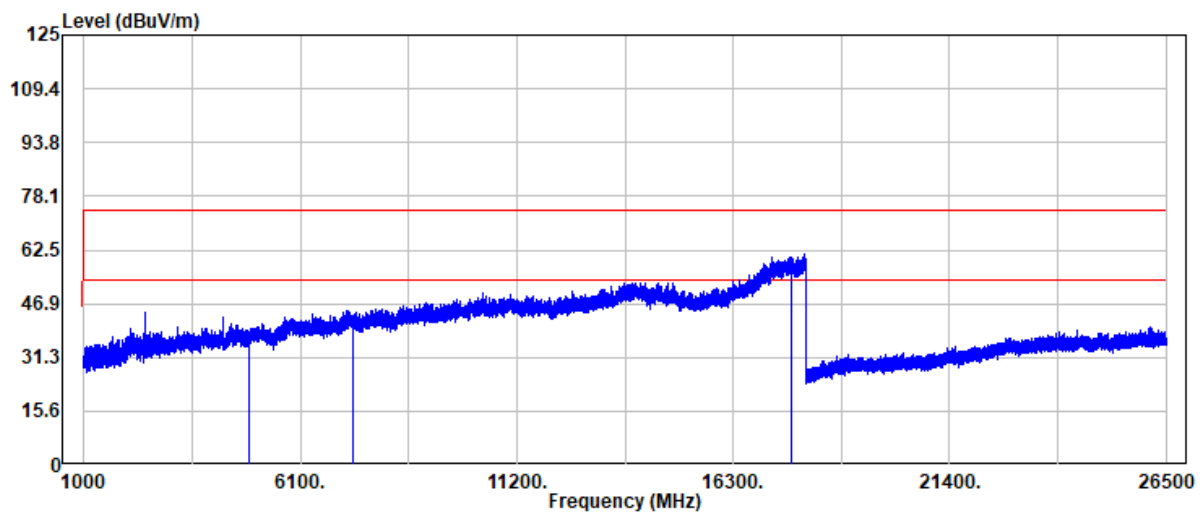


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	35.84	3.16	39.00	74.00	-35.00	Peak
4882.00	28.04	3.16	31.20	54.00	-22.80	Average
7323.00	33.04	9.82	42.86	74.00	-31.14	Peak
7323.00	26.27	9.82	36.09	54.00	-17.91	Average
17680.00	33.75	26.77	60.52	74.00	-13.48	Peak
17680.00	24.09	26.77	50.86	54.00	-3.14	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 73 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2441 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

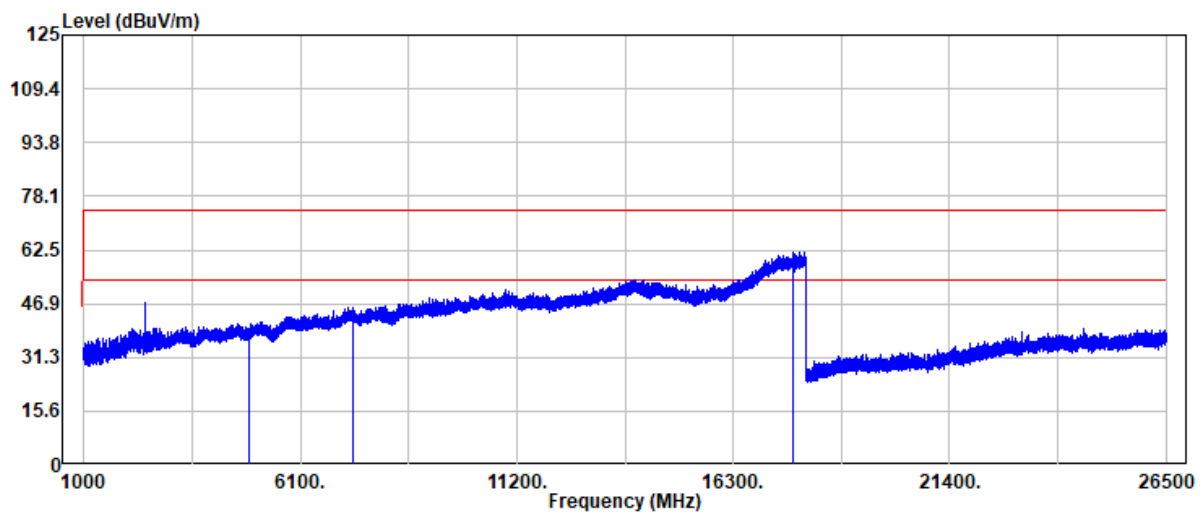


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4882.00	36.43	3.16	39.59	74.00	-34.41	Peak
4882.00	28.75	3.16	31.91	54.00	-22.09	Average
7323.00	36.09	9.82	45.91	74.00	-28.09	Peak
7323.00	26.24	9.82	36.06	54.00	-17.94	Average
17708.00	35.10	26.83	61.93	74.00	-12.07	Peak
17708.00	24.09	26.83	50.92	54.00	-3.08	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 74 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : VERTICAL
Engineer : Ben.Yang
Test Chamber : 966A

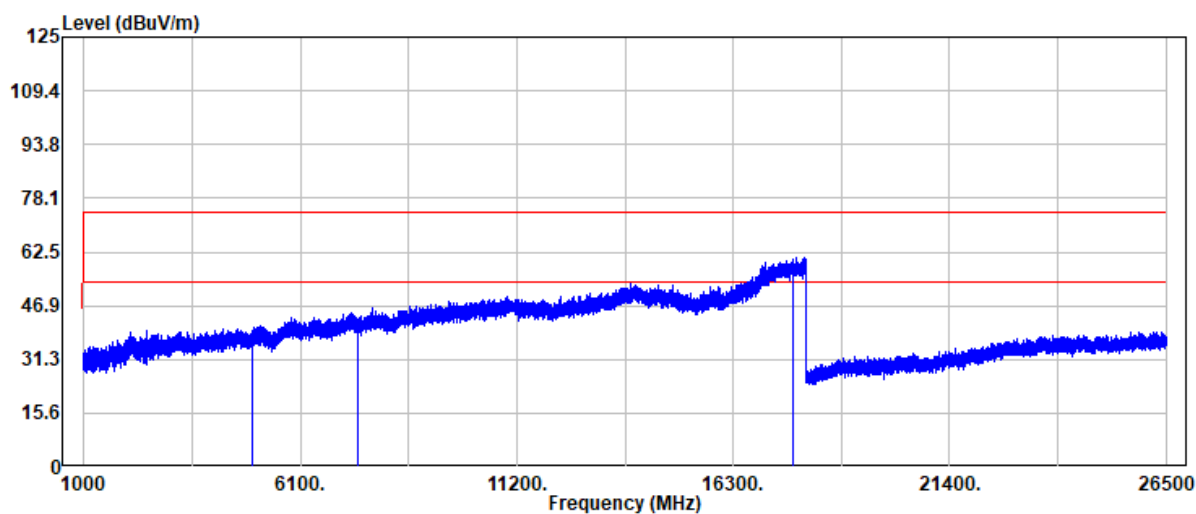


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.61	4.00	39.61	74.00	-34.39	Peak
4960.00	28.31	4.00	32.31	54.00	-21.69	Average
7440.00	33.45	9.80	43.25	74.00	-30.75	Peak
7440.00	26.21	9.80	36.01	54.00	-17.99	Average
17707.00	33.69	26.86	60.55	74.00	-13.45	Peak
17707.00	24.02	26.86	50.88	54.00	-3.12	Average

Project No: TM-2607000496P
Report No.: TMWK2608004129KR

Page: 75 / 75
Rev.: 00

Project No : TM-2607000496P
Operation Band : BT_EDR
Frequency : 2480 MHz
Operation Mode : TX
EUT Pol : E2
Setting : 0x0

Test Date : 2026-08-14
Temp./Humi. : 25.5/54
Antenna Pol. : HORIZONTAL
Engineer : Ben.Yang
Test Chamber : 966A

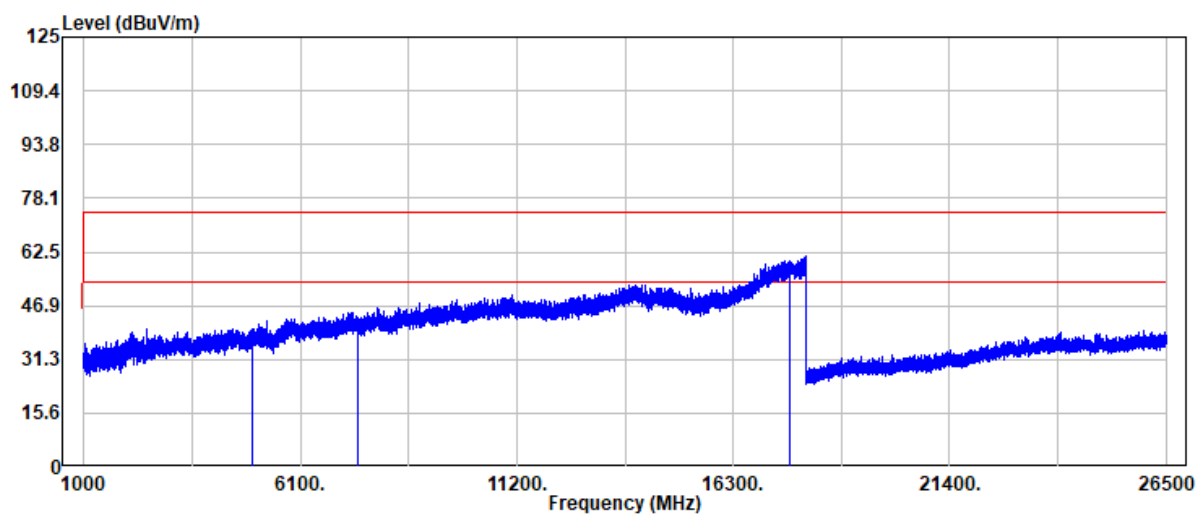

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4960.00	35.93	4.00	39.93	74.00	-34.07	Peak
4960.00	28.85	4.00	32.85	54.00	-21.15	Average
7440.00	34.03	9.80	43.83	74.00	-30.17	Peak
7440.00	26.18	9.80	35.98	54.00	-18.02	Average
17649.00	33.63	26.34	59.97	74.00	-14.03	Peak
17649.00	24.05	26.34	50.39	54.00	-3.61	Average

- End of Test Report -