

TEST REPORT

APPLICANT

Garmin International Inc

MODEL NAME

A05146

FCC ID

IPH-05146

ISED ID

1792A-0516

REPORT NUMBER

HA260504-GAR-005-R01

TEST REPORT

Date of Issue

August 06, 2026

Test Site

HCT America, Inc.
840 Yosemite Way, Milpitas, CA 95035, USA

Applicant	Garmin International Inc
Applicant Address	1200 E. 151st Street Olathe, Kansas 66062, USA
FCC ID	IPH-05146
ISED ID	1792A-05146
EUT TYPE	Portable Digital Transceiver
Modulation Type	ASK
FCC Classification	Low Power Transmitter (DXX)
FCC Rule Part(s)	Part 15.225, Part 15.209, Part 15.207
ISED Rule Part(s)	RSS-210 Issue 11 (June 2024) RSS-Gen Issue 5 Amd 2 (February 2021)
Test Procedure	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, KDB 558074 D01 v05r02

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Authorized & Released By:**Tested By:**

Dan Coronio
Technical Manager



Joe Vang
RF Engineer

REVISION HISTORY

The revision history for this document is shown in table.

TEST REPORT NO.	REVISION	DATE	DESCRIPTION
HA260504-GAR-005	0	August 02, 2026	Initial Issue
HA260504-GAR-005-01	01	August 06, 2026	- Page 1: Update ANSI C63.10 - Update Section 4, 7.1, and 9.1

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. METHODOLOGY	5
3. INSTRUMENT CALIBRATION	5
4. FACILITIES AND ACCREDITATIONS	6
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY OF TEST RESULTS	15
9. TEST RESULT	18
9.1 20 dB BANDWIDTH / 99% BANDWIDTH	18
9.2 FREQUENCY STABILITY	19
9.3 Operation within the band 13.110 MHz – 14.010 MHz	21
9.4 RADIATED SPURIOUS EMISSIONS	23
9.5 AC Power line Conducted Emissions	26
10. LIST OF TEST EQUIPMENT	28
APPENDIX A. TEST SETUP PHOTOS	29
APPENDIX B. PHOTOGRAPHS OF EUT	30

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	A05146
Serial Number	Radiated: 3633597522
Power rating	5 V d.c. (USB type C - External adaptor)
RF Specification	ANT 2.4 GHz ISM Bluetooth 5.0 LE (BR / EDR / 1M / 2M), WIFI 2.4 GHz: 802.11b /g/ n (HT20) NFC
Transmitter Chain	1
Operating Environment	Indoor and outdoor
Operating Temperature	-20 °C ~ 55 °C

RF SPECIFICATION SUBJECT TO THE REPORT

RF Specification	NFC
Transmitter Chain	1
Frequency Range	13.56 MHz
Max. RF Output Power	34.66 dBuV/m @3m
Modulation Type	ASK
Antenna Specification	Loop antenna
Firmware Version ¹⁾	22.21
Hardware Version ¹⁾	V2
Date(s) of Tests	May 28, 2026, ~ July 7, 2026

Notes:

1. Firmware and Hardware Version are as received by the client.

2. METHODOLOGY

The measurement procedure described in ANSI C63.10(Version : 2020) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C and RSS-GEN issue 5, RSS-210 issue 11.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2020) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. To find out the maximum emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.4 of ANSI C63.10. (Version: 2020)

DESCRIPTION OF TEST MODES

The EUT has been tested per test setup instruction provided by the manufacturer under continuous Tx operating condition.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

HCT America, Inc. holds A2LA accreditation (certificate no. 4201.01) covering all testing included in the scope of this report. All tests were conducted at the facilities listed below.

	Address	ISED CABID	ISED Company Number	FCC Registration	FCC Designation Number
☒	840 Yosemite Way, Milpitas, CA 95035 USA	US0198	25729	898494	US01202
☐	1177 Comstock Road, Hollister, CA 95023 USA	US0198	25729	898494	US01202



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

According to RSS-Gen Issue 5 (Section 6.8) :

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Frequency Tolerance	± 16.78 kHz
Occupied Bandwidth	± 120.66 kHz
Radiated Emissions (below 1 GHz)	± 5.29 dB

7. DESCRIPTION OF TESTS


7.1. 20 dB BANDWIDTH / 99 % BANDWIDTH

Limit

20 dB bandwidth: According to §15.215(c), the bandwidth at 20 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

99% Bandwidth: Section 6.7, RSS-Gen Issue 5

Test Configuration

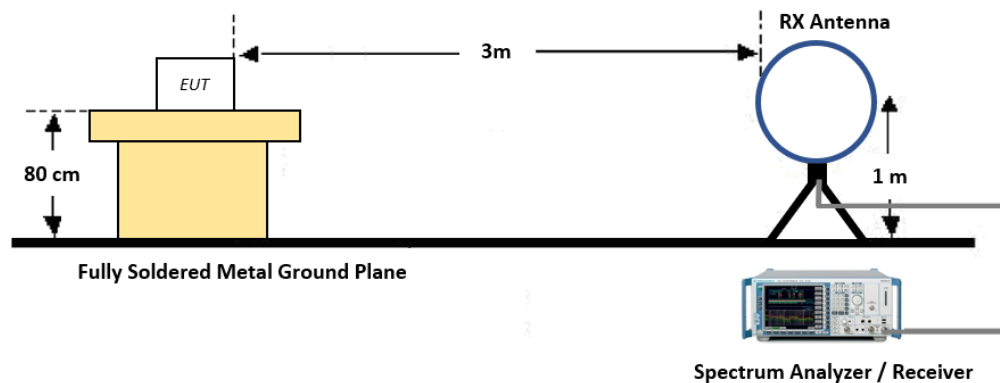

Test Procedure (20 dB Bandwidth)

The Spectrum Analyzer setting:

- RBW = 100 Hz (CW-like NFC signal per ANSI C63.10 Amendment 1 guidance)
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize
- The transmitter output was connected directly to a spectrum analyzer. The resolution bandwidth (RBW) was set to 1% to 5% of the measured 20 dB bandwidth, the video bandwidth (VBW) was set to at least three times the RBW, and the sweep time was coupled. The spectrum analyzer's internal X dB bandwidth function was used to determine the 20 dB bandwidth.

Note: The NFC emission is CW-like in nature. As a result, the measured bandwidth is inherently influenced by the selected RBW, making strict application of the 1% to 5% RBW criterion impractical. Accordingly, a minimum RBW of 100 Hz was used in accordance with the guidance provided in ANSI C63.10 Amendment 1 for measurements within this frequency range.

Test Procedure (99 % Bandwidth)

The transmitter output is connected to the spectrum analyzer.

- RBW = 1 kHz
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Notes:

Bandwidth measurement feature in the spectrum analyzer was used to measure 20 dB bandwidth (X dB bandwidth function) and 99 % bandwidth.


7.2. FREQUENCY STABILITY

Limit

§15.225 (e), RSS-210 Issue 11

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

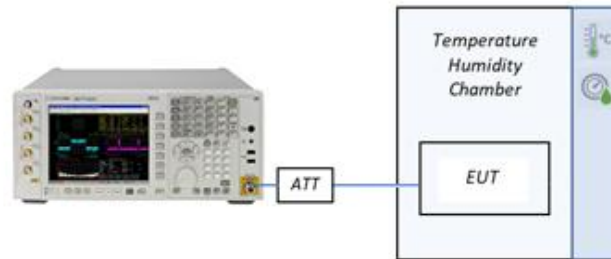

Test Procedure

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Notes:

- Temperature humidity chamber is used to adjust the temperature between -20°C and $+50^{\circ}\text{C}$
- The primary supply voltage was adjusted between 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.3. RADIATED EMISSION

RADIATION EMISSION LIMIT

FCC: 47 CFR § 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


ISED: RSS-GEN Section 8.9		
Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Operation within the band 13.110 MHz – 14.010 MHz

FCC: 47 CFR § 15.225 (a), (b), (c), (d) / ISED : RSS-211 ANNEX B.6		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 ≤ f ≤ 13.553 13.567 ≤ f ≤ 13.710	334	30
13.110 ≤ f ≤ 13.410 13.710 ≤ f ≤ 14.010	106	30

Test Configuration

Below 30 MHz

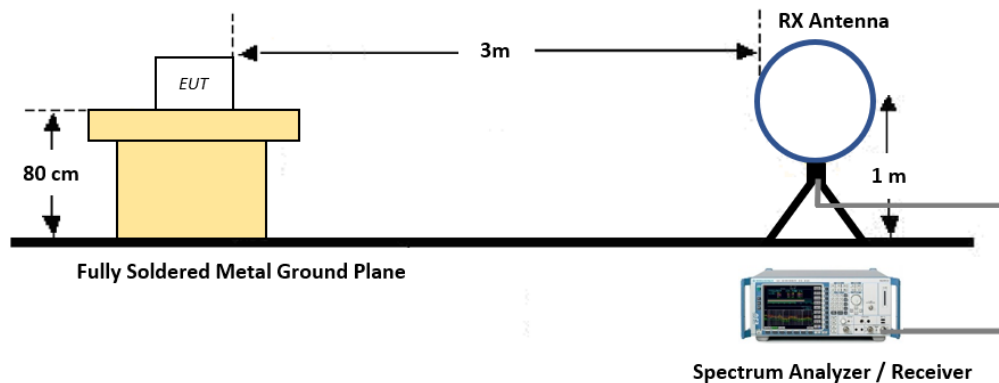

Test Procedure of Radiated spurious emissions (Below 30 MHz)


1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L) + Distance Factor (D.F)

Adequate comparison measurements were confirmed against an open field site since the test was performed at alternative site (3m SAC) other than the open area test site. Sufficient test was made to demonstrate that the alternative site produces result that correlate with the one of test made at the open field site based on KDB 414788.

30 MHz - 1 GHz

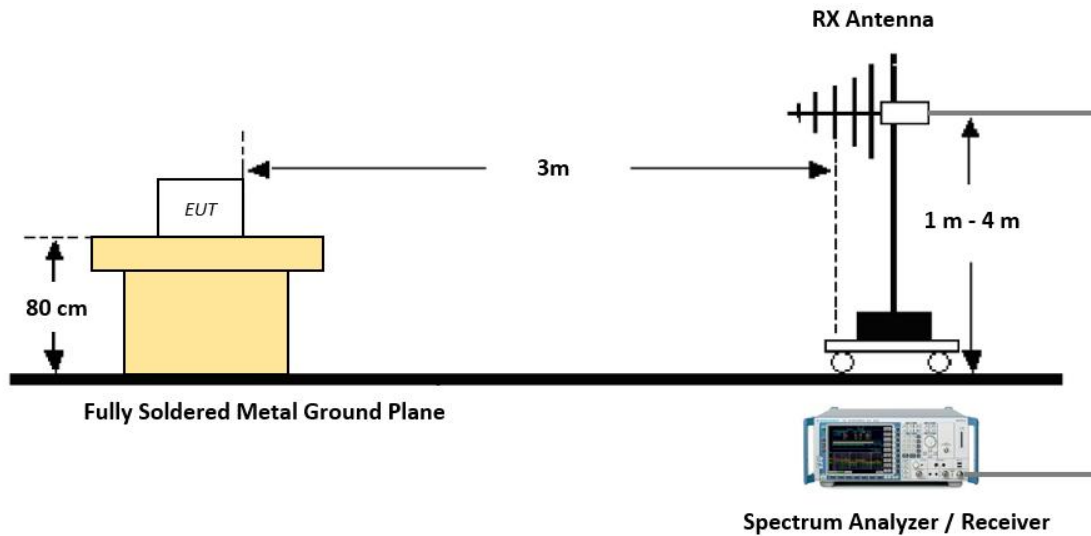

Test Procedure of Radiated spurious emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type (Peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, the method (1) is mainly used

6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

7.4. AC LINE CONDUCTED EMISSIONS

LIMIT

47 CFR § 15.207, RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

According to FCC KDB 174176 D01 Line Conducted FAQ v01r01 :

Devices Operating Above 30 MHz

For a device with a permanent or detachable antenna operating above 30 MHz, measurements must be performed with the antenna connected as specified in clause 6.2 of ANSI C63.10-2020.

Devices Operating Below 30 MHz

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band. All measurements must be performed as specified in clause 6.2 of ANSI C63.10-20.

Sample Calculation

Quasi-peak (Final Result) = Reading Value + Correction Factor

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.215 (c)	-	N/A	Radiated	PASS
Occupied Bandwidth	-	Section 6.7 RSS-GEN	N/A		PASS
Radiated E-Field Emissions 13.553 MHz - 13.567 MHz	§15.225 (a)	Annex B.6 (a)(i) RSS-210	cf. Section 7.3		PASS
Radiated E-Field Emissions $13.410 \text{ MHz} \leq f \leq 13.553 \text{ MHz}$ $13.567 \text{ MHz} \leq f \leq 13.710 \text{ MHz}$	§15.225 (b)	Annex B.6 (a)(ii) RSS-210	cf. Section 7.3		PASS
Radiated E-Field Emissions $13.110 \text{ MHz} \leq f \leq 13.410 \text{ MHz}$ $13.710 \text{ MHz} \leq f \leq 14.010 \text{ MHz}$	§15.225 (c)	Annex B.6 (a)(iii) RSS-210	cf. Section 7.3		PASS
Radiated Spurious Emissions	15.209	Section 8.9 RSS-GEN	cf. Section 7.3		PASS
Frequency Stability	§15.225 (e)	RSS-210, B.6	cf. Section 7.2		PASS
AC Power line Conducted Emissions	§15.207	RSS-GEN, 8.8	cf. Section 7.4	Conducted	PASS


Notes:

WORST CASE CONFIGURATION

RADIATED TEST

All X, Y, and Z positions for horizontal / vertical antenna polarization were investigated to find the worst-case position. X position was selected for the final evaluation.

TEST CONFIGURATION

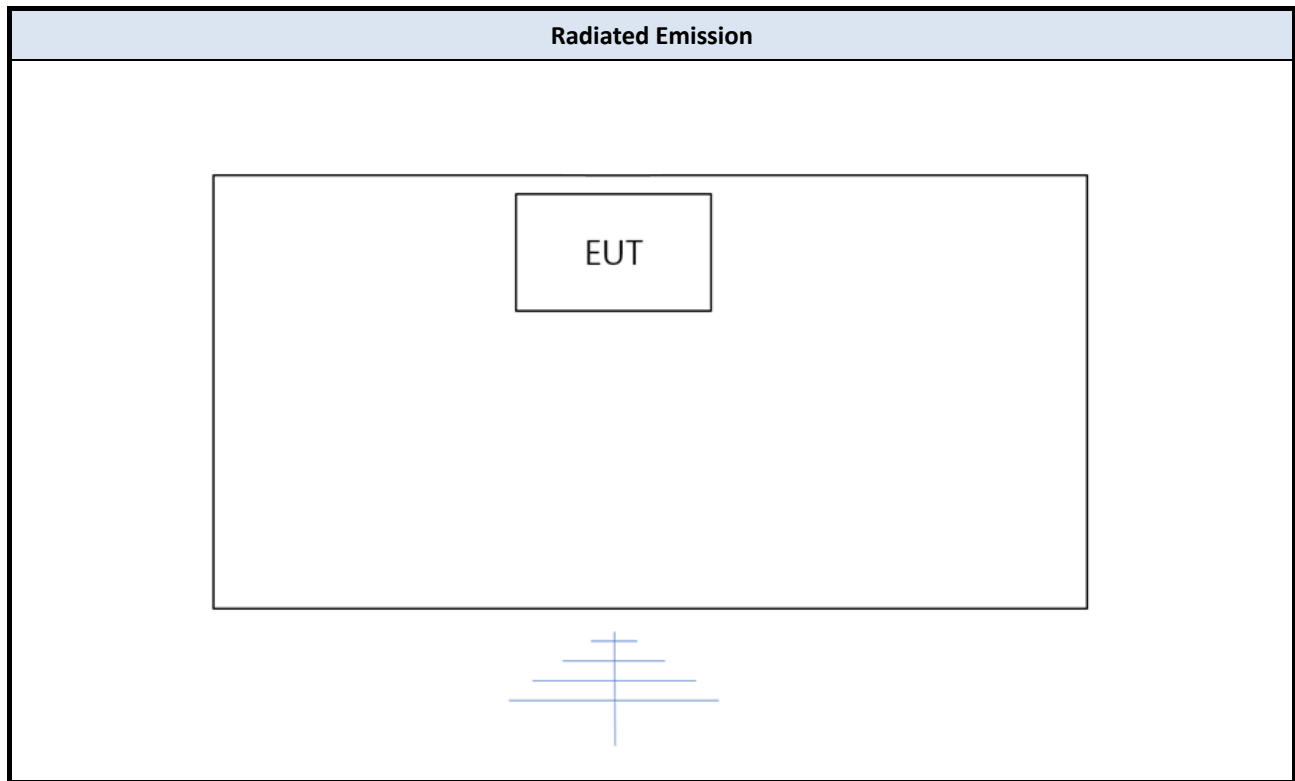

LIST OF SUPPORT EQUIPMENT

Equipment Type	Model No.	Serial No.	Manufacturer	Qty	Note
NFC Tag	Approach CT1	A0P2513	Garmin	1	


9. TEST RESULT

9.1 20 dB BANDWIDTH / 99% BANDWIDTH

Note: The NFC signal exhibited CW-like characteristics. A minimum RBW of 100 Hz was used in accordance with ANSI C63.10 Amendment 1 guidance for this frequency range.

HF		20 dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit
Frequency (MHz)	Modulation	Result	Result	
13.56	ASK	44.49	57.658	N/A

TEST PLOTS

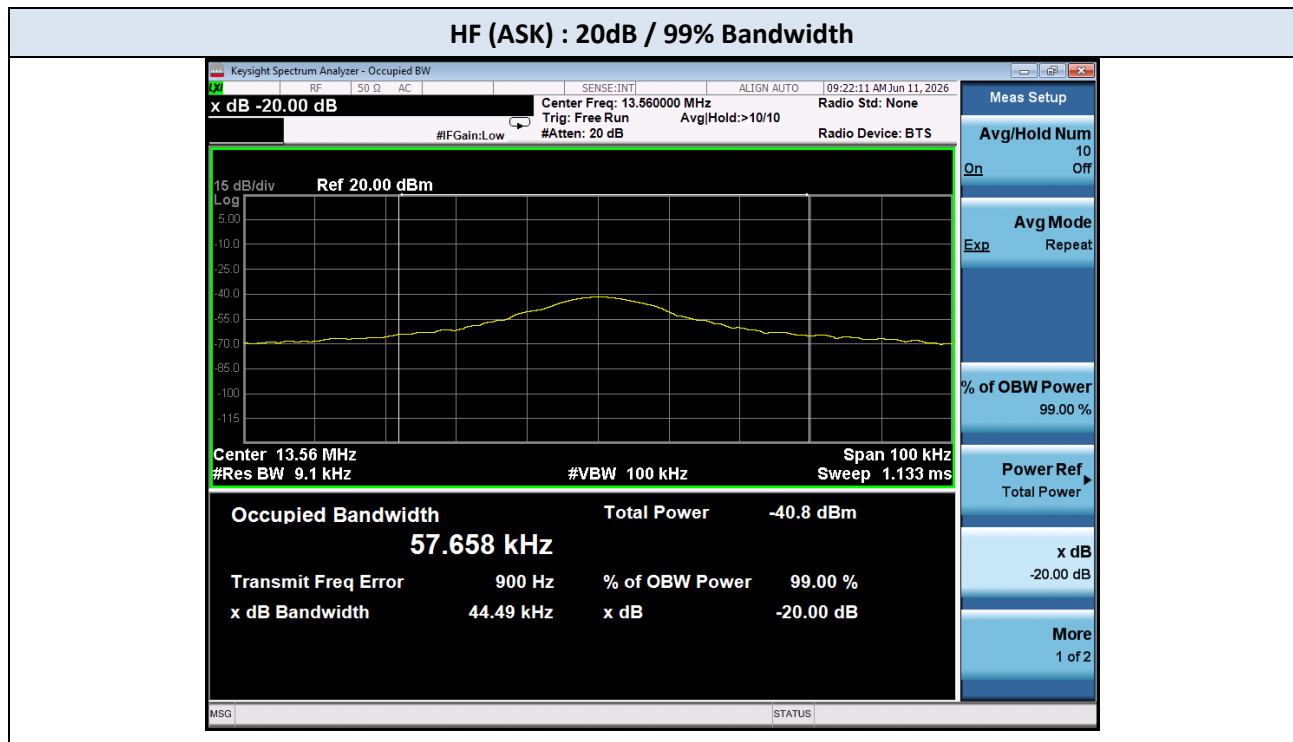

Notes:

9.2 FREQUENCY STABILITY

Operating Frequency 13.56 MHz
Reference Voltage 4.5 VDC

Versus Temp.		0 Minutes			Limit	
Temp. (°C))	Voltage (V)	Measured freq. (MHz)	Frequency Dev. (Hz)	Frequency Drift (%)	(Hz)	(%)
+50	4.5	13.559 969 63	30.373	0.000 223 990	1356	0.01
+40	4.5	13.559 984 13	15.868	0.000 117 021		
+30	4.5	13.560 012 62	12.624	0.000 093 097		
+20(Ref.)	4.5	13.560 049 22	49.215	0.000 362 942		
+10	4.5	13.560 108 64	108.637	0.000 801 160		
+0	4.5	13.560 118 22	118.221	0.000 871 836		
-10	4.5	13.560 139 27	139.273	0.001 027 087		
-20	4.5	13.560 138 81	138.811	0.001 023 680		
+20	3.825	13.560 006 96	6.959	0.000 051 321		
+20	5.175	13.560 046 25	46.250	0.000 341 077		

Versus Temp.		2 Minutes			Limit	
Temp. (°C))	Voltage (V)	Measured freq. (MHz)	Frequency Dev. (Hz)	Frequency Drift (%)	(Hz)	(%)
+50	4.5	13.559 968 82	31.177	0.000 229 919	1356	0.01
+40	4.5	13.559 981 34	18.657	0.000 137 588		
+30	4.5	13.560 009 51	9.510	0.000 070 133		
+20(Ref.)	4.5	13.560 054 97	54.973	0.000 405 406		
+10	4.5	13.560 108 19	108.187	0.000 797 842		
+0	4.5	13.560 115 12	115.121	0.000 848 975		
-10	4.5	13.560 137 95	137.950	0.001 017 330		
-20	4.5	13.560 142 36	142.364	0.001 049 882		
+20	3.825	13.560 006 58	6.575	0.000 048 490		
+20	5.175	13.560 041 53	41.529	0.000 306 261		

Notes:

Versus Temp.		5 Minutes			Limit	
Temp. (°C)	Voltage (V)	Measured freq. (MHz)	Frequency Dev. (Hz)	Frequency Drift (%)	(Hz)	(%)
+50	4.5	13.559 968 77	31.228	0.000 230 295	1356	0.01
+40	4.5	13.559 979 60	20.398	0.000 150 428		
+30	4.5	13.560 006 73	6.726	0.000 049 609		
+20(Ref.)	4.5	13.560 058 32	58.315	0.000 430 052		
+10	4.5	13.560 107 90	107.900	0.000 795 725		
+0	4.5	13.560 112 57	112.568	0.000 830 147		
-10	4.5	13.560 136 64	136.638	0.001 007 655		
-20	4.5	13.560 142 93	142.931	0.001 054 063		
+20	3.825	13.560 006 39	6.389	0.000 047 114		
+20	5.175	13.560 040 34	40.336	0.000 297 463		

Versus Temp.		10 Minutes			Limit	
Temp. (°C)	Voltage (V)	Measured freq. (MHz)	Frequency Dev. (Hz)	Frequency Drift (%)	(Hz)	(%)
+50	4.5	13.559 968 85	31.149	0.000 229 712	1356	0.01
+40	4.5	13.559 978 84	21.165	0.000 156 084		
+30	4.5	13.560 005 24	5.242	0.000 038 658		
+20(Ref.)	4.5	13.560 061 80	61.800	0.000 455 752		
+10	4.5	13.560 107 74	107.739	0.000 794 533		
+0	4.5	13.560 111 68	111.681	0.000 823 606		
-10	4.5	13.560 135 91	135.914	0.001 002 316		
-20	4.5	13.560 142 74	142.737	0.001 052 633		
+20	3.825	13.560 006 32	6.320	0.000 046 607		
+20	5.175	13.560 039 20	39.200	0.000 289 086		

Notes:

9.3 Operation within the band 13.110 MHz – 14.010 MHz


Test Mode HF (ASK) – Mode A
 Operating Frequency 13.56 MHz

Measured Frequency Range: 13.110 MHz – 14.010 MHz							
Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m) ²⁾	Margin (dB)	Measurement Type
13.09	180°	7.31	-18.25	25.56	69.50	43.94	QP
13.31	180°	7.33	-18.19	25.52	80.51	54.99	QP
13.48	180°	7.69	-18.15	25.84	90.47	64.63	QP
13.56	180°	16.53	-18.13	34.66	124.00	89.34	QP
13.69	180°	7.52	-18.10	25.62	90.47	64.85	QP
13.80	180°	7.54	-18.08	25.62	80.51	54.89	QP
14.38	180°	7.93	-17.94	25.87	69.50	43.63	QP

Notes:

- Correction Factor: Antenna Factor + Cable loss + Distance factor
 - Distance factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
 - Distance factor of 9kHz-150kHz: $40 \log (300/3) = 80$ (dB)
 - Distance factor of 150kHz-30MHz: $40 \log (30/3) = 40$ (dB)
- Test was performed at 3 meters distance.
- Fundamental frequency for 13.56 MHz band
- Worst case is reported

TEST PLOTS

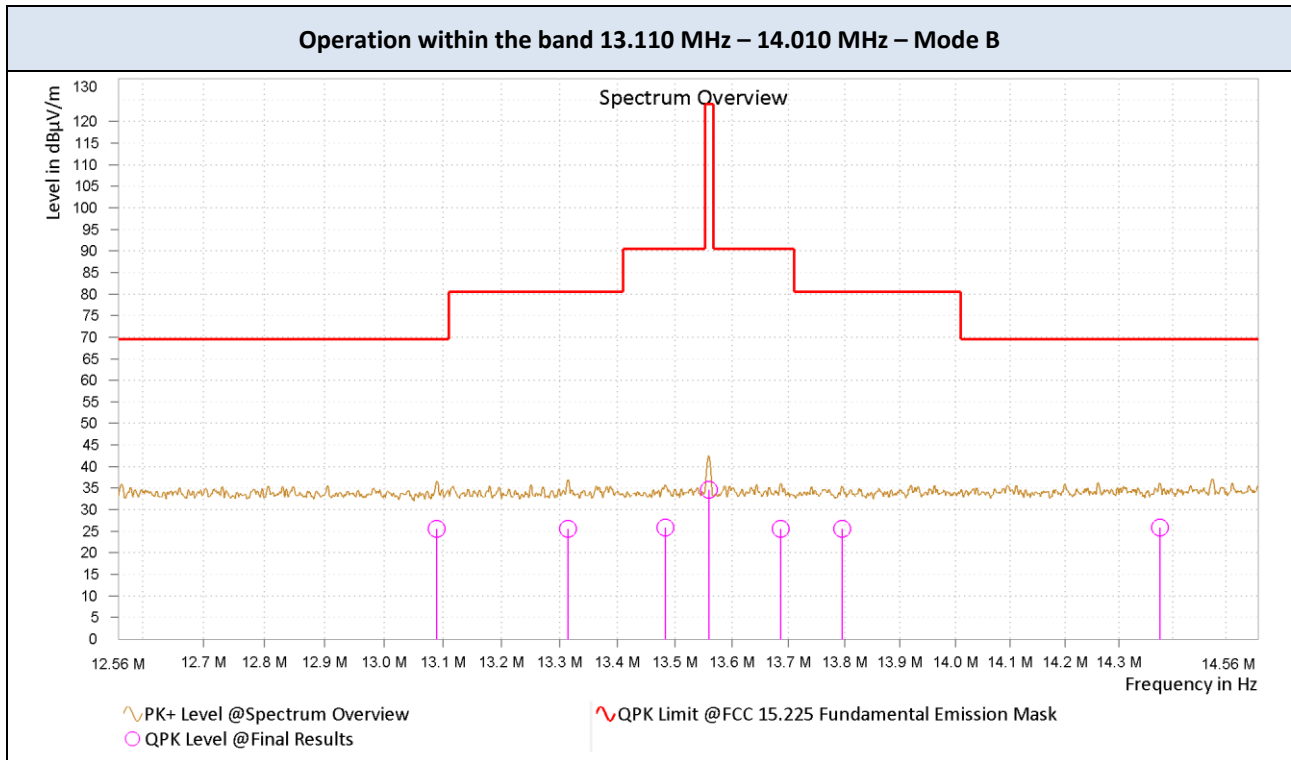

Notes:

1. The worst case is reported.

9.4 RADIATED SPURIOUS EMISSIONS

Radiated Spurious Emission

Test Mode	HF (ASK) – Mode A
Operating Frequency	13.56 MHz

Frequency Range: 9 kHz – 30MHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m) ²⁾	Margin (dB)	Measurement Type
0.01	180°	-23.74	-59.82	36.08	127.01	90.93	QP
0.71	180°	5.35	-20.23	25.58	70.61	45.04	QP
13.56	180°	16.83	-18.13	34.97	69.50	34.53	QP
0.03	90°	-33.54	-60.26	26.72	118.66	91.94	QP
1.24	90°	4.96	-20.38	25.35	65.78	40.43	QP
13.56	90°	13.47	-18.13	31.61	69.50	37.89	QP
0.03	Bent Over	-35.32	-60.26	24.94	117.34	92.40	QP
1.09	Bent Over	5.11	-20.28	25.40	66.84	41.44	QP
13.56	Bent Over	13.89	-18.13	32.03	69.50	37.47	QP

Notes:

- Correction Factor: Antenna Factor + Cable loss + Distance factor
 - Distance factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
 - Distance factor of 9kHz-150kHz: $40 \log (300/3) = 80$ (dB)
 - Distance factor of 150kHz-30MHz: $40 \log (30/3) = 40$ (dB)
- Test was performed at 3 meters distance.
- Fundamental frequency for 13.56 MHz band

Frequency Range: Below 1 GHz


Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
81.36	V	37.08	14.24	22.84	40.00	17.16	QP
94.94	V	40.34	15.49	24.84	43.50	18.66	QP
40.67	V	41.17	19.90	21.27	40.00	18.73	QP
67.78	V	35.22	14.73	20.49	40.00	19.51	QP
81.36	H	34.17	14.24	19.93	40.00	20.07	QP
94.94	H	38.35	15.49	22.86	43.50	20.64	QP

Notes:


- Correction Factor: Antenna Factor + Cable loss

■ TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 90°): HF ASK – Mode A

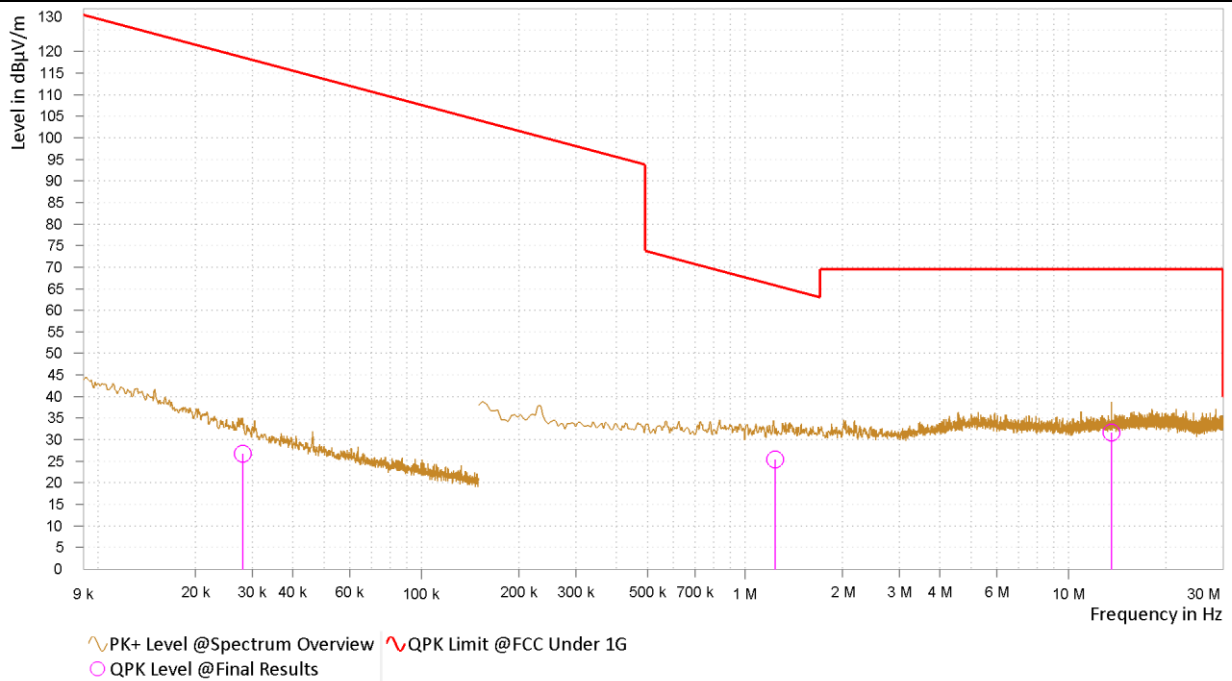

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 180°): HF ASK – Mode A

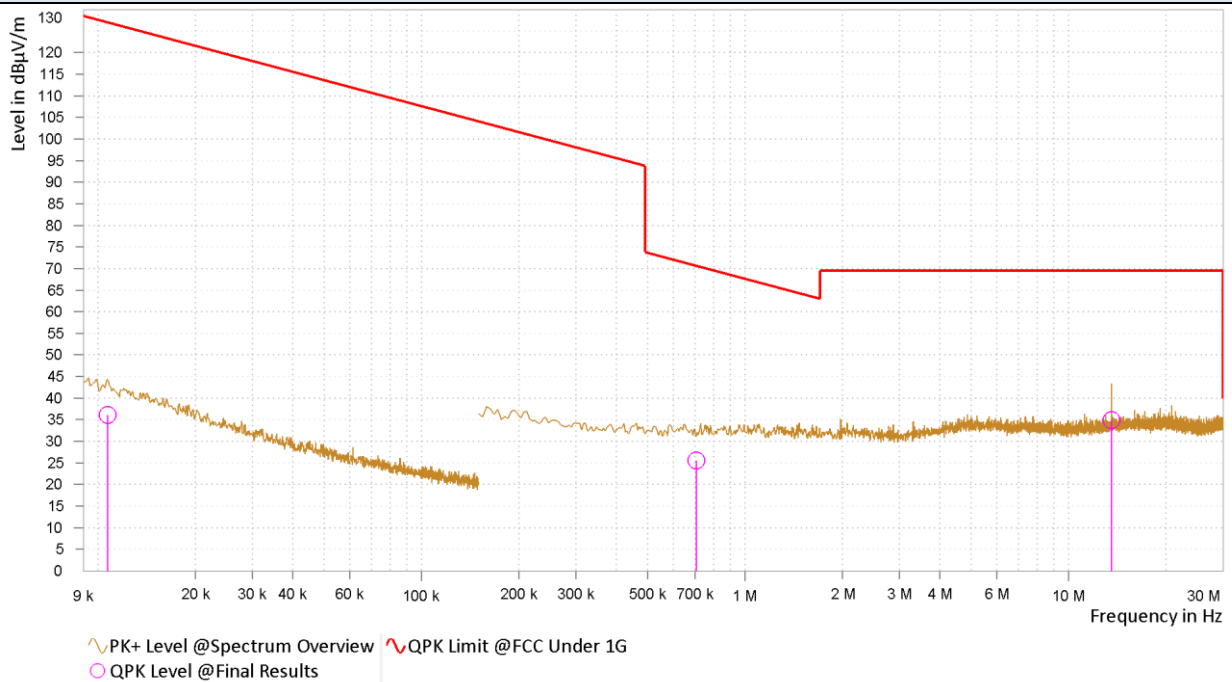


Notes:


1. The worst case is reported.

TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position BentOver): HF ASK – Mode A

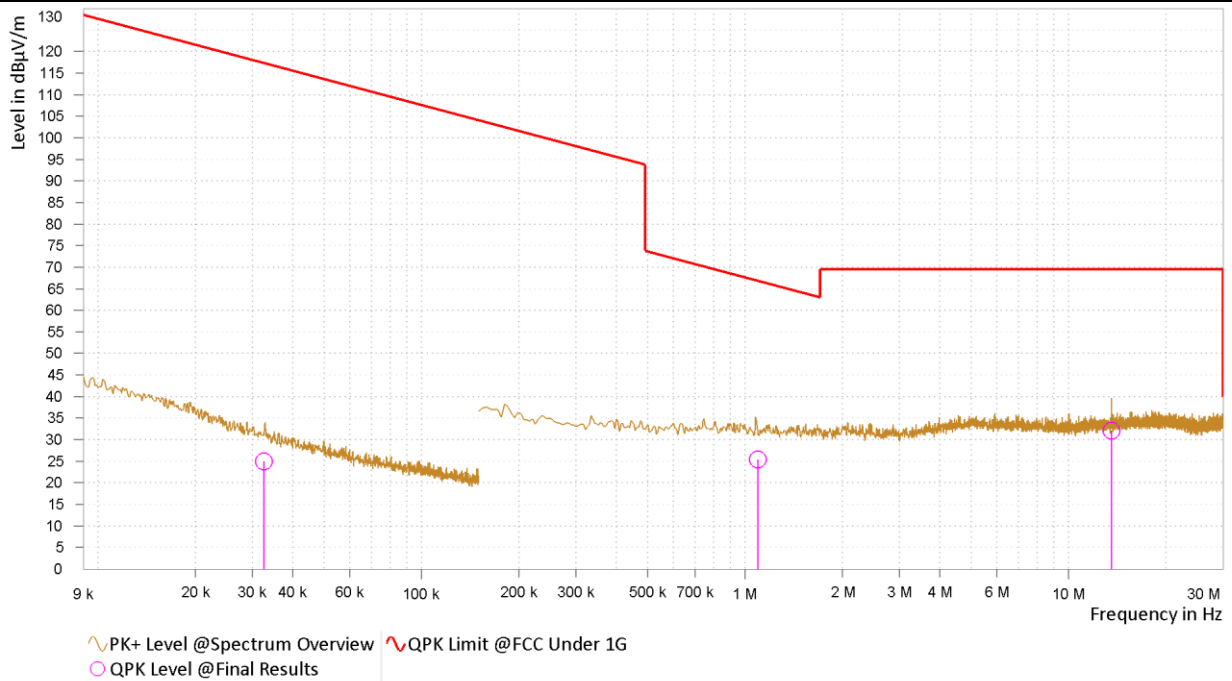

Radiated Spurious Emission 30 MHz – 1 GHz: HF ASK – Mode A

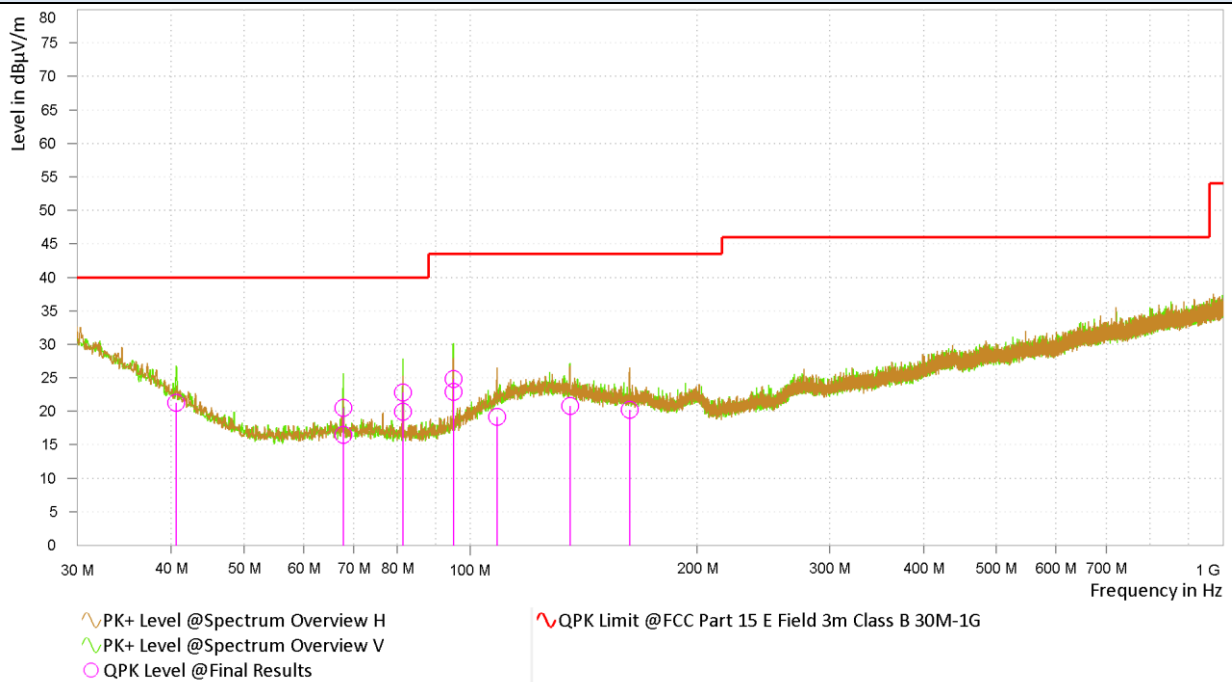

Notes:

1. The worst case is reported.

9.5 AC Power line Conducted Emissions

HF Signal

Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
27.120	L1	18.7	16.5	10.4	29.1	26.9	60	50	30.9	23.1
0.456	L1	14.1	9.3	9.6	23.7	18.9	56.8	46.8	33.1	27.9
13.562	L1	16.4	11.8	10.2	26.6	22.0	60	50	33.4	28.0


Frequency (MHz)	Line	Reading (dBμV)		Corr. ¹⁾ (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
27.120	N	18.2	15.8	10.5	28.7	26.3	60	50	31.3	23.7
0.438	N	11.0	6.9	9.6	20.6	16.5	57.1	47.1	36.5	30.6
4.099	N	10.3	5.3	9.8	20.1	15.1	56	46	35.9	30.9

Note(s) :


1. Quasi-peak (Final Result) = Reading Value + Correction Factor

TEST PLOTS

AC Line Conducted Emission (L1) – HF Signal

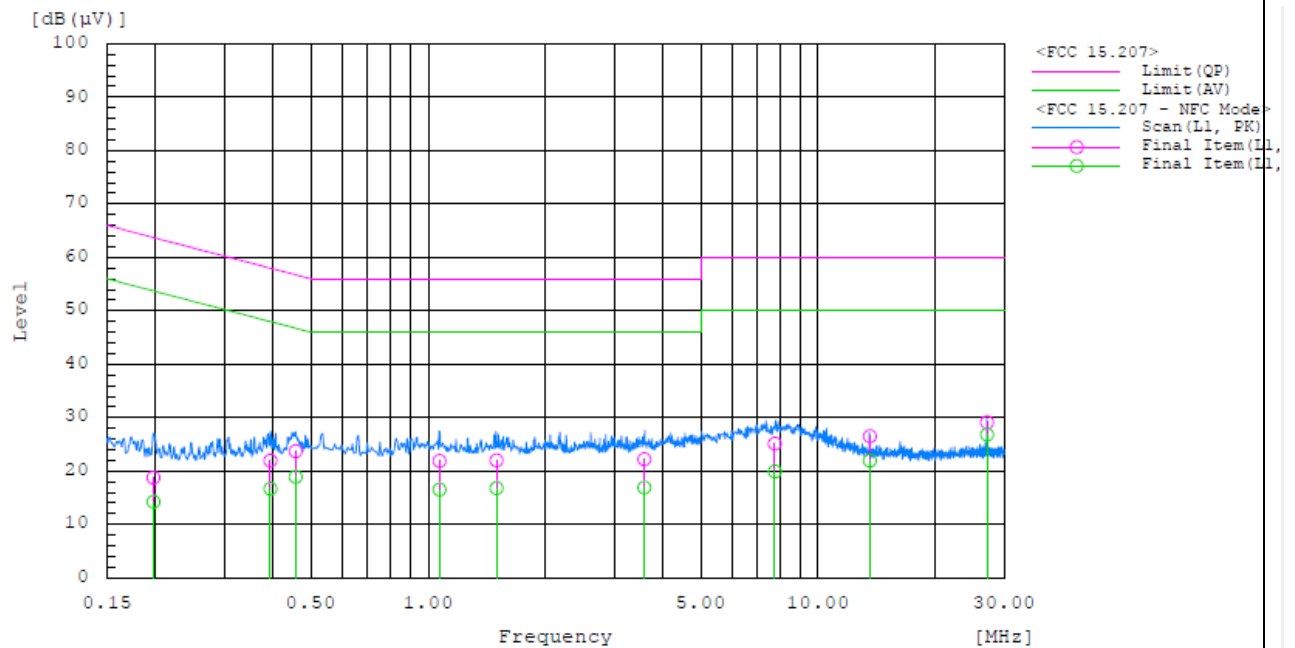

AC Line Conducted Emission (N) – HF Signal

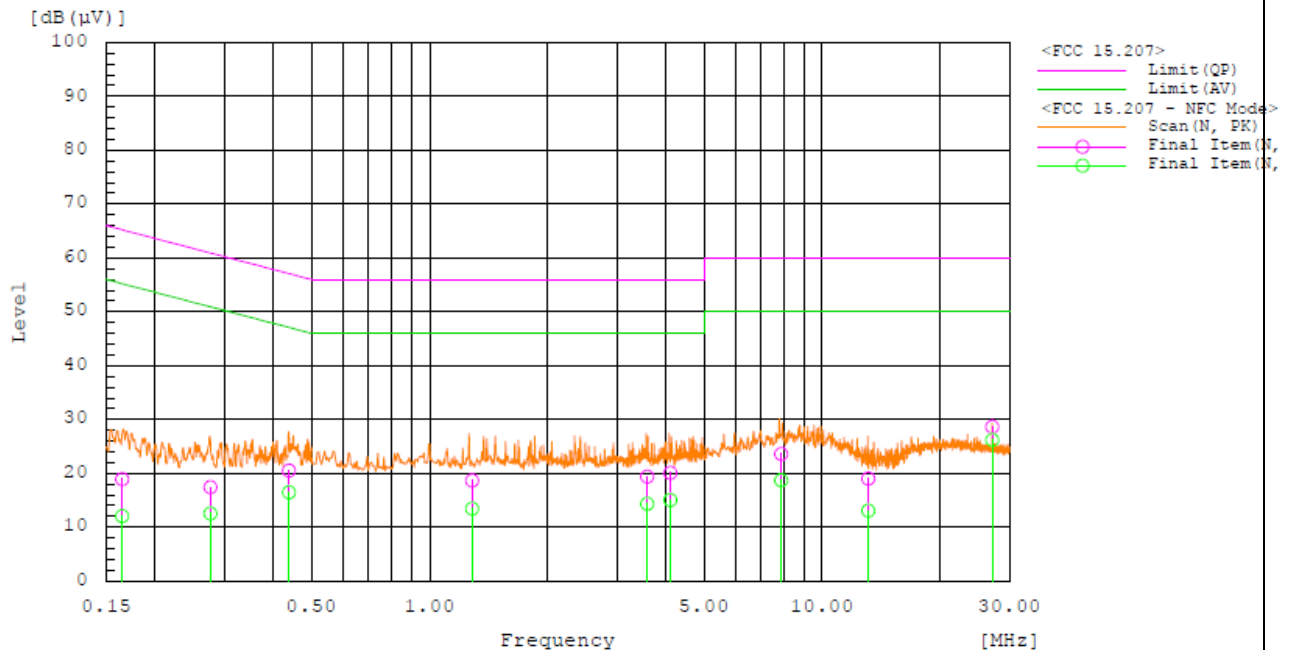

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Calibration Due (mm/dd/yy)	Manufacture	Serial No.
☒	Signal Analyzer (1 Hz ~ 40.0 GHz)	ESW44	08/05/2026	Rohde & Schwarz	103176
☒	Signal Analyzer (20 Hz ~ 26.5 GHz)	N9020A	10/09/2026	Keysight	MY53280148
☒	Loop Antenna (0.009 MHz ~ 30 MHz)	HLA 6121	03/03/2027	TESEQ	43964
☒	BI-LOG Antenna (30 MHz ~ 6 GHz)	JB6	10/22/2026	Sunol	A071116
☒	Temp & Humidity Chamber	SH-662	9/19/2026	ESPEC	93019836
☒	25 MHz High Pass Filter	CHPFL-0025-BNC	5/20/2027	Crystek Corporation	1935-01
☒	DC Power Supply	E36232A	5/27/2027	Keysight	MY61003849
☒	ESR Test Receiver	ESR3	07/18/2026	Rohde & Schwarz	102363
☒	LISN	ENV216	08/28/2026	Rohde & Schwarz	101550
☒	Test Software	R&S®ELEKTRA	-	Rhode & Schwarz	-

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date

APPENDIX A. TEST SETUP PHOTOS

The setup photos are provided as separate documents.

APPENDIX B. PHOTOGRAPHS OF EUT

B.1. EXTERNAL PHOTOS

The external photos are provided as separate documents.

B.2. INTERNAL PHOTOS

The internal photos are provided as separate documents.

END OF TEST REPORT