



**ELEMENT MATERIALS TECHNOLOGY,
Columbia MD**

(formerly PCTEST)

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>

PART 25 | RSS-170 MEASUREMENT REPORT

Applicant Name:

Garmin International Inc
1200 E. 151st. Street
Olathe, Kansas
United States 66062

Date of Testing:

3/20/2026 - 7/6/2026

Test Report Issue Date:

7/8/2026

Test Site/Location:

Element Lab., Columbia, MD, USA
Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1M2606290055-02.IPH

FCC ID:

IPH-05168

IC:

1792A-05168

APPLICANT:

Garmin International Inc

Application Type:

Certification

Model/HVIN:

A05168

EUT Type:

Portable Digital Transceiver

FCC Classification:

PCS licensed Transmitter worn on body(PCT)

FCC Rule Part:

25

ISED Specification:

RSS-Gen Issue 5, RSS-170 Issue 4

Test Procedure(s):

ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 1 of 35

© 2026 ELEMENT

V11.2 09/11/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	7/8/2026	WKR0000005883

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 2 of 35

MEASUREMENT REPORT

FCC Part 25 | ISSED RSS-170

Mode	SCS	Frequency [MHz]	EIRP		Emission Designator
			Max.Power [mW]	Max.Power [dBm]	
NTN BAND 255	3.75kHz / 15kHz	1626.6-1660.4	0.079	18.95	189KG7D
NTN BAND 255(23)	3.75kHz / 15kHz	2000.1-2019.9	0.183	22.63	190KG7D

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 3 of 35

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Antenna Description	6
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE EMISSION DESIGNATORS	12
7.0	TEST RESULTS	13
7.1	Summary	13
7.2	Conducted Output Power & Radiated Power (EIRP).....	14
7.3	Occupied Bandwidth	18
7.4	Radiated Spurious Emissions Measurements	21
7.5	Radiated Spurious Emissions Measurements (1559 – 1610MHz)	29
7.6	Carrier-Off State Emissions Measurements (1559 – 1610MHz).....	32
8.0	CONCLUSION	35

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 4 of 35

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. (MD)

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered test laboratory with the site description on file with ISED (Wireless Test Lab number 2451B) and FCC (Designation Number US1113, Test Lab Registration Number 445776).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A. (CA)

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered test laboratory with the site description on file with ISED (Wireless Test Lab number 22831) and FCC (Designation Number US1163).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 5 of 35

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Garmin Portable Digital Transceiver FCC ID: IPH-05168** and **IC: 1792A-05168**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 25 and RSS-170.

The EUT integrated a certified module (Nordic) which is authorized under FCC ID: 2ANPO00NRF9151 and IC: 24529-NRF9151

For this EUT configuration, only the NB-IoT capability of the module is enabled for NTN specific operation

Test Device Serial No.: 3638074973, 3638074808, 3626419740, 3626419733, 3633608152

2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE (CAT-M1) / Multi-band NTN / Bluetooth (1x, EDR, LE) / ANT+ / 802.11b/g/n WLAN / NFC

For NTN operation under B255 (1626.5 – 1660.5MHz) and B23/252 (2000.1 - 2019.9MHz), this device supports both 3.75kHz and 15kHz subcarrier spacings with QPSK and BPSK modulations.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The EUT was configured for testing using client-provided software/instruction that allowed direct control of the modem operating parameters. The device was connected to a call box to establish and maintain a communication link, enabling the EUT to operate in a controlled transmit state. The call box was configured to force the EUT to transmit at maximum output power for all applicable measurements.

2.4 Antenna Description

The manufacturer provided the antenna gains which can affect the validity of test results used for determination of compliance. The following antenna gains are used in this device provided by the client.

Band	Frequency Range [MHz]	Maximum Peak Gain (dBi)
LTE Cat M1 B2	1850 - 1910	-2.2
LTE Cat M1 B4	1710 -1755	-2.7
LTE Cat M1 B12	699 - 716	-21.6
NTN n23	2000 - 2020	0.2
NTN n255	1626.5 - 1660.5	-3.5

Table 2-1. Antenna Peak Gain

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 6 of 35



2.5 Software and Firmware

Testing was performed on device(s) using software/firmware version 4.20 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 7 of 35

© 2026 ELEMENT

V11.2 09/11/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, ERP or EIRP are calculated based on the manufacturer provided antenna gain and the measured conducted output power per the guidance of ANSI C63.26:2015. The power of the emission is calculated using the following formula:

$$\text{ERP or EIRP}_{[\text{dBm}]} = P_{\text{measured} [\text{dBm}]} + G_T [\text{dBd/dBi}];$$

where ERP or EIRP_[dBm] is the effective radiated power or equivalent isotropically radiated power, P_{measured} is measured transmitter output power or PSD, in dBm or dBW, G_T is gain of the transmitting antenna in dBd (ERP) or dBi (EIRP)

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26:2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[\text{dB}\mu\text{V/m}]} = \text{Measured amplitude level}_{[\text{dBm}]} + 107 + \text{Cable Loss}_{[\text{dB}]} + \text{Antenna Factor}_{[\text{dB/m}]}$$

And

$$\text{EIRP}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4:2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26:2015.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 8 of 35

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz-1GHz)	4.96
Radiated Disturbance (1-18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

Table 4-2. Measurement Uncertainty Budget – CA

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 9 of 35

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-001
-	AP2-002	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-002
Keysight Technologies	N9030A	PXA Signal Analyzer	11/3/2025	Annual	11/3/2026	MY54490576
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2025	Annual	12/19/2026	100342
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	6/1/2026	Biennial	6/1/2028	101058
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/14/2025	Annual	8/14/2026	164948
Schwarzbeck	VULB9162	Bilog Antenna	6/4/2025	Biennial	6/4/2027	301

Table 5-1. Test Equipment Calibration Table – MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/31/2026	Annual	3/31/2027	T058601-02
ESPEC	SU-241	Tabletop Temperature Chamber	11/6/2025	Annual	11/6/2026	92009574
ETS-Lindgren	3117	Double Ridged Guide Horn (1-18 GHz)	4/21/2026	Annual	4/21/2027	218555
Fairview Microwave	FMCA1975-36	30MHz-40GHz Conducted RF Cable *	6/10/2025	Annual	6/10/2026	-
Fairview Microwave	M2CP1122-10	30MHz-40GHz Conducted Coupler *	6/10/2025	Annual	6/10/2026	1946
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Keysight Technology	N9040B	UXA Signal Analyzer	7/29/2025	Annual	7/29/2026	US57212289
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	8/5/2025	Annual	8/5/2026	104093
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	12/5/2025	Annual	12/5/2026	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/3/2025	Annual	10/3/2026	171008
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	7/17/2025	Annual	7/17/2026	00302

Table 5-2. Test Equipment Calibration Table – CA

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that has been internally verified/calibrated.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 10 of 35

Component	Serial Number
Flex Cable	P2A-0001
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Chamber Passthrough	CP4/X12
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 6463	232069-001
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181

Table 5-3. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 5-4. AP2-002 EMC Cable and Switch System Components

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 11 of 35

6.0 SAMPLE EMISSION DESIGNATORS

PSK Modulation

Emission Designator = 200KG7D

BW = 200 kHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 12 of 35

7.0 TEST RESULTS

7.1 Summary

Company Name: Garmin International Inc
 FCC ID: IPH-05168
 IC: 1792A-05168
 FCC Classification: PCS licensed Transmitter worn on body(PCT)
 Mode(s): NTN

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference	Data Leveraged	Test Lab Location
CONDUCTED	Transmitter Conducted Output Power / Equivalent Isotropic Radiated Power	2.1046, 25.204(a)	N/A	40dBW (FCC)	PASS	Section 7.2	No	CA
	Occupied Bandwidth	2.1049	RSS-Gen (6.7)	N/A	PASS	Section 7.3	No	CA
	Conducted Emission Mask; Conducted Spurious Emissions	2.1051, 25.202(f)	RSS-170 (5.1) (5.8)	25.202(f)	PASS	Please see Note 5	Yes	N/A
	Frequency Stability	2.1055, 25.202(d)	RSS-170 (5.3)	<0.001% of reference frequency	PASS	Please see Note 5	Yes	N/A
RADIATED	Radiated Spurious Emissions	25.202(f)	RSS-170 (5.8)	> 43 + 10 log10 P[Watts] for all out-of-band emissions	PASS	Section 7.4	No	MD
	Radiated Spurious Emissions (1559 - 1610MHz)	25.216(c/h)	RSS-170 (5.9)	< -70dBW/MHz for emissions in the band 1559 - 1605MHz; < -46dBW/MHz at 1610MHz	PASS	Section 7.5	No	MD
	Carrier-Off State Emissions (1559 - 1610MHz)	25.216(i)	RSS-170 (5.10)	< -80dBW/MHz for emissions in the band 1559 - 1610MHz	PASS	Section 7.6	No	MD

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0.
- 5) This report is based on the original report (Report No. 5121ERM.001A1) for Model: nRF9151 (FCC ID: 2ANPO00NRF9151 and IC: 24529-NRF9151). The firmware remains identical, with only a difference in the software name. The new sample has been evaluated to verify worst-case Radiated Spurious Emissions (RSE) and conducted power. Accordingly, this report includes only the conducted power and RSE results. All other test data are leveraged from the original report as noted in the Data Leveraged column of the above table.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02-IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 13 of 35

7.2 Conducted Output Power & Radiated Power (EIRP)

§2.1046, 25.204(a)

Test Overview

All emissions are measured with a power meter connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The EIRP shall not exceed +40 dBW in any 4 kHz band.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.2

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions
3. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

Test Notes:

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
4. The Ant. Gains (GT) are listed in dBi.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 14 of 35

Band 255

SCS	SC Size	Tx Channel	Frequency [MHz]	Conducted Power [dBm]		Ant. Gain [dBi]	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
				BPSK	QPSK						
3.75kHz	1SC0	261505	1626.6	22.32	22.30	-3.50	22.32	18.82	0.076	70.00	-69.92
	1SC24	261505	1626.6	22.22	22.19	-3.50	22.22	18.72	0.074	70.00	-69.93
	1SC47	261505	1626.6	22.16	22.11	-3.50	22.16	18.66	0.073	70.00	-69.93
15kHz	1SC0	261505	1626.6	22.25	22.16	-3.50	22.25	18.75	0.075	70.00	-69.93
	1SC6	261505	1626.6	22.20	22.21	-3.50	22.21	18.71	0.074	70.00	-69.93
	1SC11	261505	1626.6	22.16	22.24	-3.50	22.24	18.74	0.075	70.00	-69.93
	3SC0	261505	1626.6	N/A	22.09	-3.50	22.09	18.59	0.072	70.00	-69.93
	3SC6	261505	1626.6	N/A	22.16	-3.50	22.16	18.66	0.073	70.00	-69.93
	3SC9	261505	1626.6	N/A	22.05	-3.50	22.05	18.55	0.072	70.00	-69.93
	6SC0	261505	1626.6	N/A	21.09	-3.50	21.09	17.59	0.057	70.00	-69.94
	6SC6	261505	1626.6	N/A	21.26	-3.50	21.26	17.76	0.060	70.00	-69.94
3.75kHz	1SC0	261674	1643.5	22.08	22.09	-3.50	22.09	18.59	0.072	70.00	-69.93
	1SC24	261674	1643.5	22.21	22.18	-3.50	22.21	18.71	0.074	70.00	-69.93
	1SC47	261674	1643.5	22.11	22.09	-3.50	22.11	18.61	0.073	70.00	-69.93
15kHz	1SC0	261674	1643.5	22.31	22.33	-3.50	22.33	18.83	0.076	70.00	-69.92
	1SC6	261674	1643.5	22.45	22.44	-3.50	22.45	18.95	0.079	70.00	-69.92
	1SC11	261674	1643.5	22.13	22.44	-3.50	22.44	18.94	0.078	70.00	-69.92
	3SC0	261674	1643.5	N/A	21.98	-3.50	21.98	18.48	0.070	70.00	-69.93
	3SC6	261674	1643.5	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	3SC9	261674	1643.5	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	6SC0	261674	1643.5	N/A	21.15	-3.50	21.15	17.65	0.058	70.00	-69.94
	6SC6	261674	1643.5	N/A	21.17	-3.50	21.17	17.67	0.058	70.00	-69.94
3.75kHz	1SC0	261843	1660.4	22.13	22.17	-3.50	22.17	18.67	0.074	70.00	-69.93
	1SC24	261843	1660.4	22.19	22.20	-3.50	22.20	18.70	0.074	70.00	-69.93
	1SC47	261843	1660.4	22.11	22.10	-3.50	22.11	18.61	0.073	70.00	-69.93
15kHz	1SC0	261843	1660.4	22.16	22.14	-3.50	22.16	18.66	0.073	70.00	-69.93
	1SC6	261843	1660.4	22.12	22.19	-3.50	22.19	18.69	0.074	70.00	-69.93
	1SC11	261843	1660.4	22.05	22.15	-3.50	22.15	18.65	0.073	70.00	-69.93
	3SC0	261843	1660.4	N/A	21.98	-3.50	21.98	18.48	0.070	70.00	-69.93
	3SC6	261843	1660.4	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	3SC9	261843	1660.4	N/A	21.99	-3.50	21.99	18.49	0.071	70.00	-69.93
	6SC0	261843	1660.4	N/A	21.03	-3.50	21.03	17.53	0.057	70.00	-69.94
	6SC6	261843	1660.4	N/A	21.11	-3.50	21.11	17.61	0.058	70.00	-69.94
3.75kHz	1SC0	261843	1660.4	22.13	22.17	-3.50	22.17	18.67	0.074	70.00	-69.93
	1SC24	261843	1660.4	22.19	22.20	-3.50	22.20	18.70	0.074	70.00	-69.93
	1SC47	261843	1660.4	22.11	22.10	-3.50	22.11	18.61	0.073	70.00	-69.93
15kHz	1SC0	261843	1660.4	22.16	22.14	-3.50	22.16	18.66	0.073	70.00	-69.93
	1SC6	261843	1660.4	22.12	22.19	-3.50	22.19	18.69	0.074	70.00	-69.93
	1SC11	261843	1660.4	22.05	22.15	-3.50	22.15	18.65	0.073	70.00	-69.93
	3SC0	261843	1660.4	N/A	21.98	-3.50	21.98	18.48	0.070	70.00	-69.93
	3SC6	261843	1660.4	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	3SC9	261843	1660.4	N/A	21.99	-3.50	21.99	18.49	0.071	70.00	-69.93
	6SC0	261843	1660.4	N/A	21.03	-3.50	21.03	17.53	0.057	70.00	-69.94
	6SC6	261843	1660.4	N/A	21.11	-3.50	21.11	17.61	0.058	70.00	-69.94
3.75kHz	1SC0	261843	1660.4	22.13	22.17	-3.50	22.17	18.67	0.074	70.00	-69.93
	1SC24	261843	1660.4	22.19	22.20	-3.50	22.20	18.70	0.074	70.00	-69.93
	1SC47	261843	1660.4	22.11	22.10	-3.50	22.11	18.61	0.073	70.00	-69.93
15kHz	1SC0	261843	1660.4	22.16	22.14	-3.50	22.16	18.66	0.073	70.00	-69.93
	1SC6	261843	1660.4	22.12	22.19	-3.50	22.19	18.69	0.074	70.00	-69.93
	1SC11	261843	1660.4	22.05	22.15	-3.50	22.15	18.65	0.073	70.00	-69.93
	3SC0	261843	1660.4	N/A	21.98	-3.50	21.98	18.48	0.070	70.00	-69.93
	3SC6	261843	1660.4	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	3SC9	261843	1660.4	N/A	21.99	-3.50	21.99	18.49	0.071	70.00	-69.93
	6SC0	261843	1660.4	N/A	21.03	-3.50	21.03	17.53	0.057	70.00	-69.94
	6SC6	261843	1660.4	N/A	21.11	-3.50	21.11	17.61	0.058	70.00	-69.94
3.75kHz	1SC0	261843	1660.4	22.13	22.17	-3.50	22.17	18.67	0.074	70.00	-69.93
	1SC24	261843	1660.4	22.19	22.20	-3.50	22.20	18.70	0.074	70.00	-69.93
	1SC47	261843	1660.4	22.11	22.10	-3.50	22.11	18.61	0.073	70.00	-69.93
15kHz	1SC0	261843	1660.4	22.16	22.14	-3.50	22.16	18.66	0.073	70.00	-69.93
	1SC6	261843	1660.4	22.12	22.19	-3.50	22.19	18.69	0.074	70.00	-69.93
	1SC11	261843	1660.4	22.05	22.15	-3.50	22.15	18.65	0.073	70.00	-69.93
	3SC0	261843	1660.4	N/A	21.98	-3.50	21.98	18.48	0.070	70.00	-69.93
	3SC6	261843	1660.4	N/A	22.02	-3.50	22.02	18.52	0.071	70.00	-69.93
	3SC9	261843	1660.4	N/A	21.99	-3.50	21.99	18.49	0.071	70.00	-69.93
	6SC0	261843	1660.4	N/A	21.03	-3.50	21.03	17.53	0.057	70.00	-69.94
	6SC6	261843	1660.4	N/A	21.11	-3.50	21.11	17.61	0.058	70.00	-69.94

Table 7-2. Conducted/Radiated Power Result – Band 255

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 15 of 35

Band 23/252

SCS	SC Size	Tx Channel	Frequency [MHz]	Conducted Power [dBm]		Ant. Gain [dBi]	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
				BPSK	QPSK						
3.75kHz	1SC0	261070	2000.1	22.13	22.10	0.20	22.13	22.33	0.171	70.00	-69.83
	1SC24	261070	2000.1	22.16	22.20	0.20	22.20	22.40	0.174	70.00	-69.83
	1SC47	261070	2000.1	22.10	22.11	0.20	22.11	22.31	0.170	70.00	-69.83
15kHz	1SC0	261070	2000.1	22.14	22.16	0.20	22.16	22.36	0.172	70.00	-69.83
	1SC6	261070	2000.1	22.20	22.21	0.20	22.21	22.41	0.174	70.00	-69.83
	1SC11	261070	2000.1	22.14	22.12	0.20	22.14	22.34	0.171	70.00	-69.83
	3SC0	261070	2000.1	N/A	21.54	0.20	21.54	21.74	0.149	70.00	-69.85
	3SC6	261070	2000.1	N/A	21.59	0.20	21.59	21.79	0.151	70.00	-69.85
	3SC9	261070	2000.1	N/A	21.51	0.20	21.51	21.71	0.148	70.00	-69.85
	6SC0	261070	2000.1	N/A	21.10	0.20	21.10	21.30	0.135	70.00	-69.87
	6SC6	261070	2000.1	N/A	21.16	0.20	21.16	21.36	0.137	70.00	-69.86
	12SC0	261070	2000.1	N/A	20.12	0.20	20.12	20.32	0.108	70.00	-69.89
3.75kHz	1SC0	261169	2010	22.16	22.12	0.20	22.16	22.36	0.172	70.00	-69.83
	1SC24	261169	2010	22.18	22.38	0.20	22.38	22.58	0.181	70.00	-69.82
	1SC47	261169	2010	22.28	22.33	0.20	22.33	22.53	0.179	70.00	-69.82
15kHz	1SC0	261169	2010	22.36	22.37	0.20	22.37	22.57	0.181	70.00	-69.82
	1SC6	261169	2010	22.43	22.42	0.20	22.43	22.63	0.183	70.00	-69.82
	1SC11	261169	2010	22.36	22.35	0.20	22.36	22.56	0.180	70.00	-69.82
	3SC0	261169	2010	N/A	21.74	0.20	21.74	21.94	0.156	70.00	-69.84
	3SC6	261169	2010	N/A	21.80	0.20	21.80	22.00	0.158	70.00	-69.84
	3SC9	261169	2010	N/A	21.78	0.20	21.78	21.98	0.158	70.00	-69.84
	6SC0	261169	2010	N/A	21.38	0.20	21.38	21.58	0.144	70.00	-69.86
	6SC6	261169	2010	N/A	21.40	0.20	21.40	21.60	0.145	70.00	-69.86
	12SC0	261169	2010	N/A	20.47	0.20	20.47	20.67	0.117	70.00	-69.88
3.75kHz	1SC0	261268	2019.9	22.30	22.31	0.20	22.31	22.51	0.178	70.00	-69.82
	1SC24	261268	2019.9	22.39	22.36	0.20	22.39	22.59	0.182	70.00	-69.82
	1SC47	261268	2019.9	22.25	22.34	0.20	22.34	22.54	0.179	70.00	-69.82
15kHz	1SC0	261268	2019.9	22.27	22.37	0.20	22.37	22.57	0.181	70.00	-69.82
	1SC6	261268	2019.9	22.34	22.43	0.20	22.43	22.63	0.183	70.00	-69.82
	1SC11	261268	2019.9	22.29	22.29	0.20	22.29	22.49	0.177	70.00	-69.82
	3SC0	261268	2019.9	N/A	21.83	0.20	21.83	22.03	0.160	70.00	-69.84
	3SC6	261268	2019.9	N/A	21.76	0.20	21.76	21.96	0.157	70.00	-69.84
	3SC9	261268	2019.9	N/A	21.75	0.20	21.75	21.95	0.157	70.00	-69.84
	6SC0	261268	2019.9	N/A	21.34	0.20	21.34	21.54	0.143	70.00	-69.86
	6SC6	261268	2019.9	N/A	21.44	0.20	21.44	21.64	0.146	70.00	-69.85
	12SC0	261268	2019.9	N/A	20.53	0.20	20.53	20.73	0.118	70.00	-69.88

Table 7-3. Conducted/Radiated Power Result – Band 23/252

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 16 of 35



Sample e.i.r.p Calculation:

At 2000.1MHz (NTN n23/25), the average conducted output power was measured to be 22.13 dBm with antenna gain 0.20 dBi.

$$\text{ERP or EIRP}_{[\text{dBm}]} = P_{\text{measured} [\text{dBm}]} + G_{\text{T} [\text{dBd/dBi}]};$$

ERP or EIRP = effective radiated power or equivalent isotropically radiated power

P_{measured} = measured transmitter output power

G_{T} = gain of the transmitting antenna in dBd (ERP) or dBi (EIRP)

$$22.13 \text{ dBm} + 0.20 \text{ dBi} = 22.33 \text{ dBm}$$

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 17 of 35

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26:2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

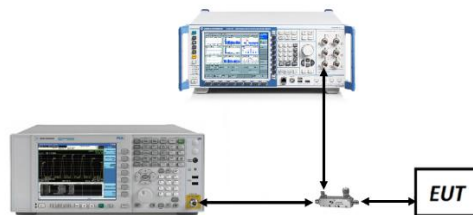


Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 18 of 35


Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [kHz]
NTN BAND 255	3.75kHz / 15kHz	QPSK	Mid	189.49
NTN BAND 252(23)	3.75kHz / 15kHz	QPSK	Mid	190.29

Table 7-4. Occupied Bandwidth Results

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 19 of 35

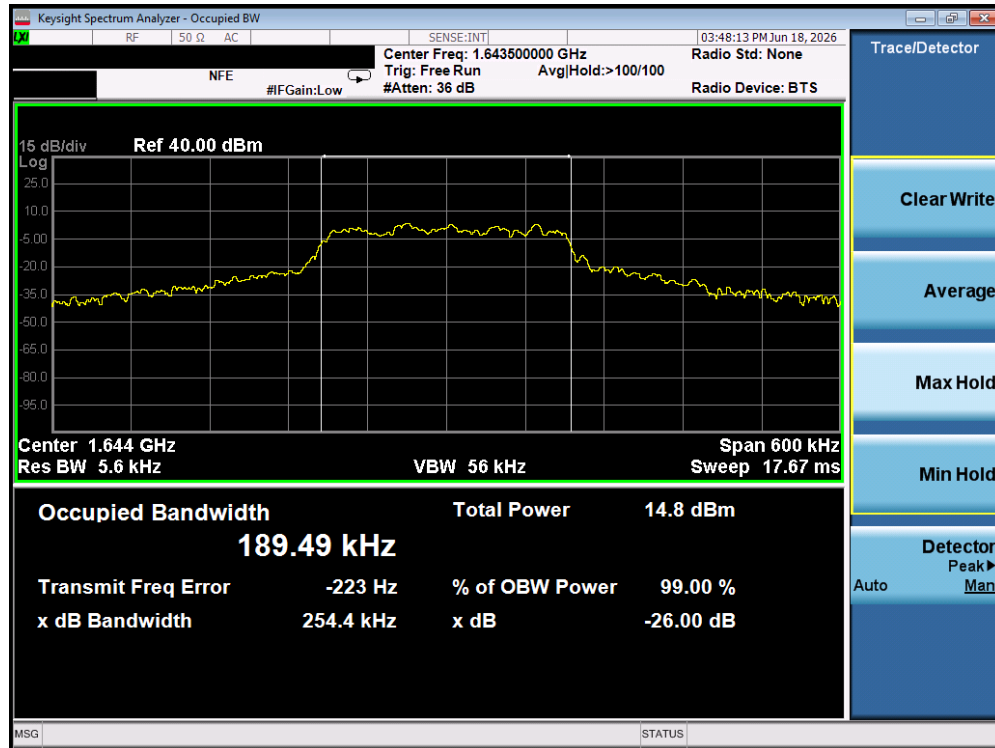

Plot 7-1. Occupied Bandwidth Plot (Band 255, Mid Channel) - QPSK

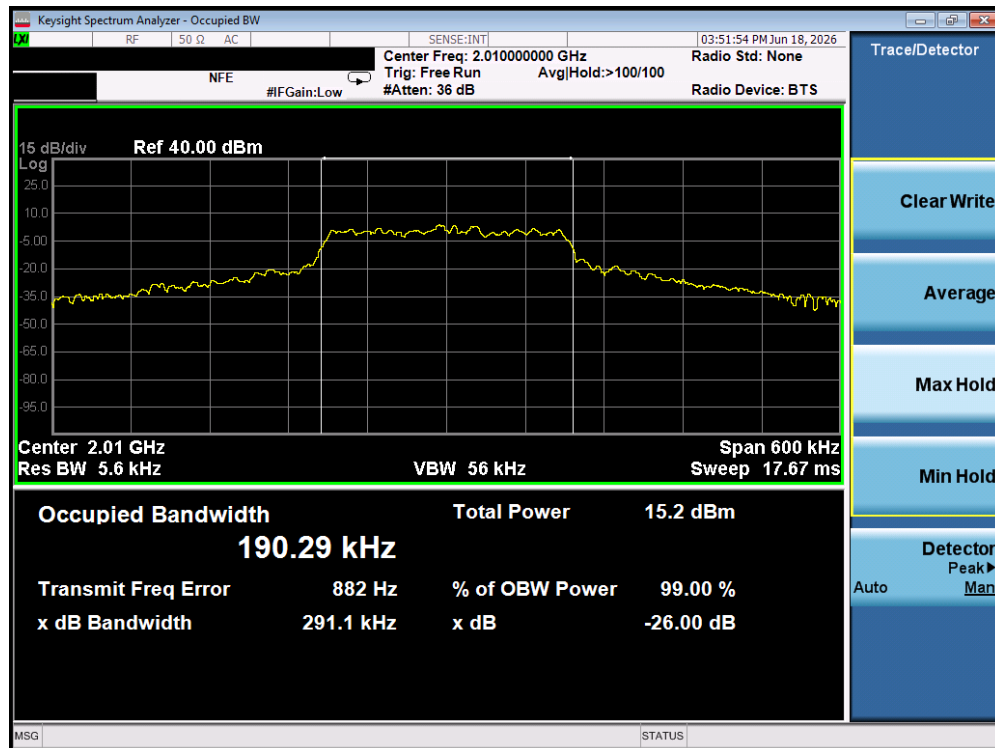

Plot 7-2. Occupied Bandwidth Plot (Band 23/255, Mid Channel) - QPSK

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 20 of 35

7.4 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW $\geq$ 100kHz
2. VBW $\geq$ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq$ 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average
7. The trace was allowed to stabilize

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 21 of 35

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

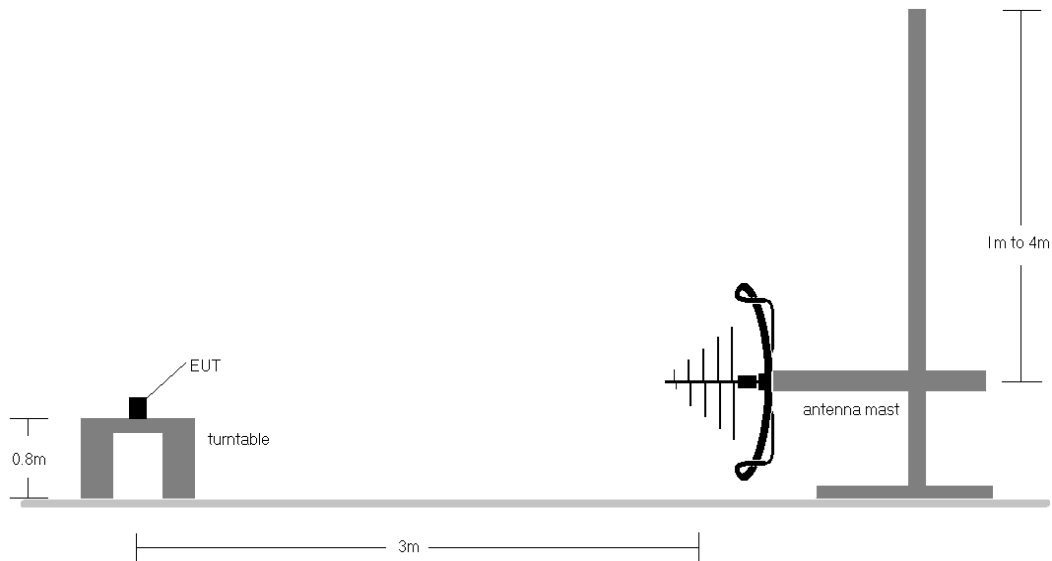


Figure 7-3. Test Instrument & Measurement Setup < 1GHz

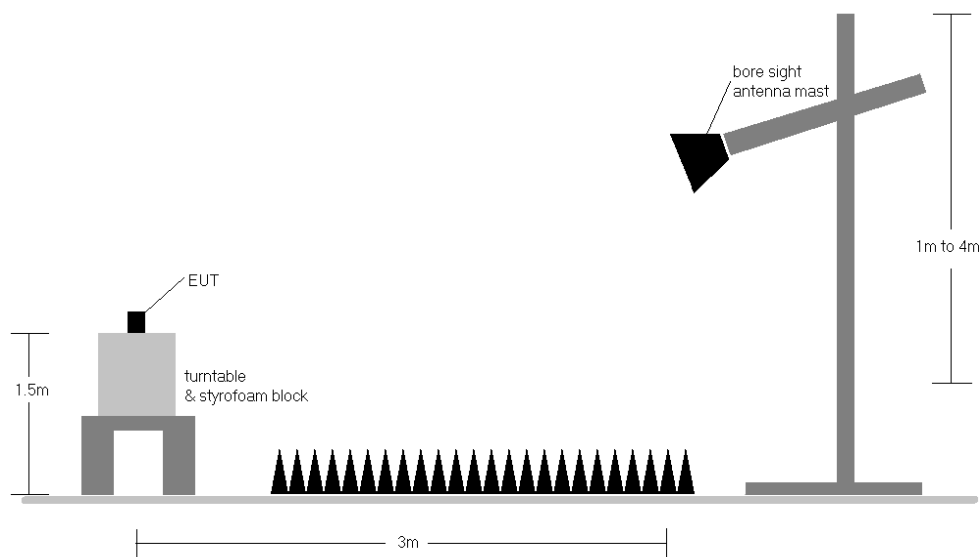


Figure 7-4. Test Instrument & Measurement Setup >1 GHz


FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 22 of 35

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 6) This device supports simultaneous transmission operation, which allows LTE or NTN band and BT or BLE or ANT to operate simultaneously. BLE or ANT case is not considered as worst case since the BLE and ANT power is lower than BT powers

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 23 of 35

Band 255

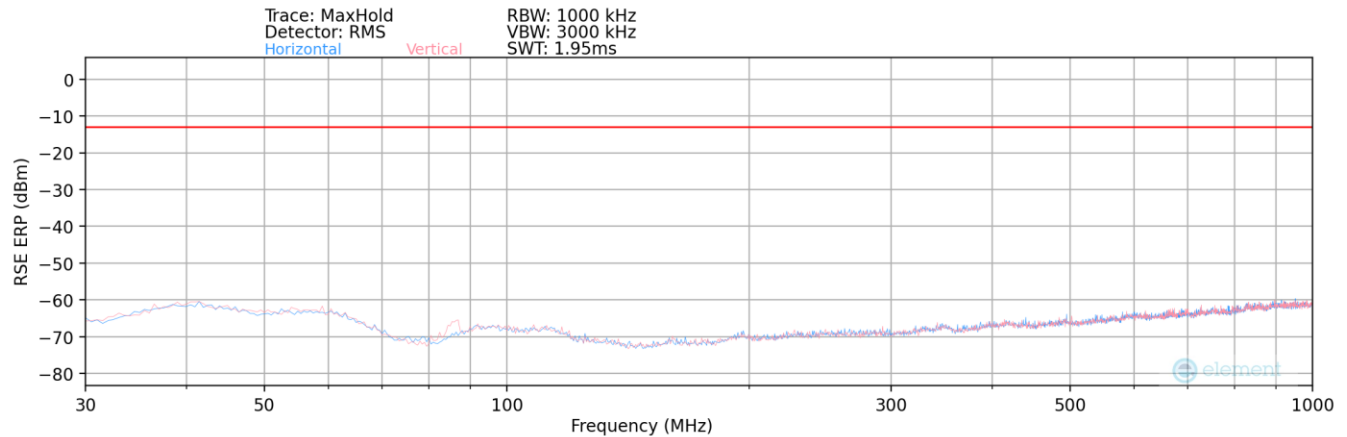


Plot 7-3. Radiated Spurious Plot – Band 255

Frequency (MHz):	1643.5
RB / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
166.50	H	-	-	-72.08	-16.44	18.48	-78.93	-13.00	-65.93
440.50	H	-	-	-75.66	-8.51	22.83	-74.58	-13.00	-61.58
495.00	H	-	-	-75.93	-7.30	23.77	-73.64	-13.00	-60.64

Table 7-5. Radiated Spurious Data – Band 255

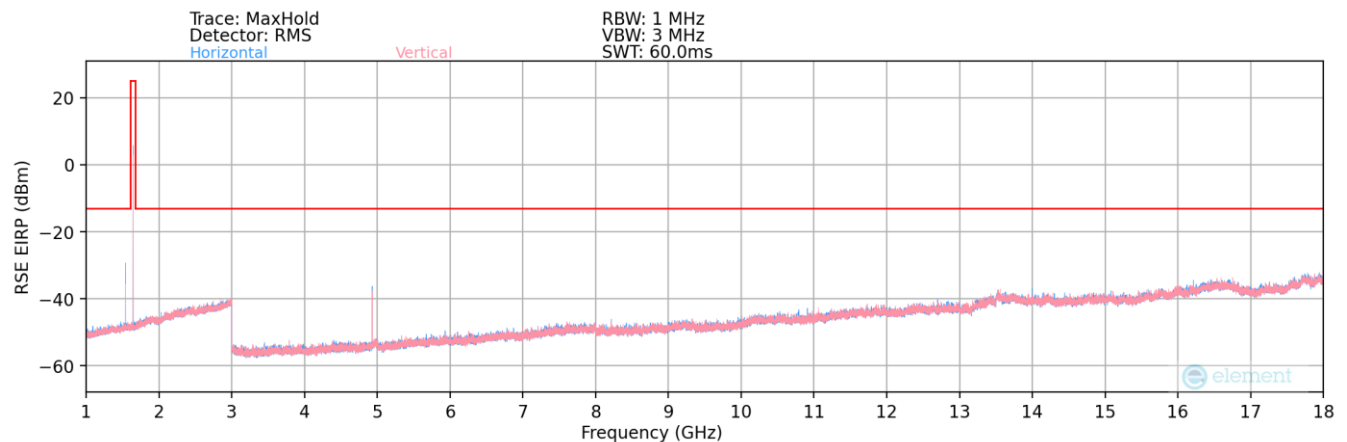

Plot 7-4. Radiated Spurious Plot – Band 255

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 24 of 35

Frequency (MHz):	1626.6
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3253.20	H	104	183	-71.37	6.70	42.33	-52.93	-13.00	-39.93
4879.80	H	108	3	-59.04	9.24	57.20	-38.06	-13.00	-25.06
6506.40	H	-	-	-82.04	13.06	38.02	-57.23	-13.00	-44.23
8133.00	H	241	98	-76.32	15.59	46.27	-48.99	-13.00	-35.99
9759.60	H	-	-	-83.48	18.31	41.83	-53.43	-13.00	-40.43
11386.20	H	-	-	-83.15	21.27	45.12	-50.14	-13.00	-37.14
13012.80	H	-	-	-84.21	24.14	46.93	-48.32	-13.00	-35.32

Table 7-6. Radiated Spurious Data – Band 255 – Low Channel

Frequency (MHz):	1643.5
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3287.00	H	115	167	-76.42	7.01	37.59	-57.66	-13.00	-44.66
4930.50	H	127	116	-62.36	9.78	54.42	-40.83	-13.00	-27.83
6574.00	H	-	-	-81.76	12.68	37.92	-57.33	-13.00	-44.33
8217.50	H	272	115	-77.25	15.74	45.49	-49.77	-13.00	-36.77
9861.00	H	-	-	-83.28	18.07	41.79	-53.47	-13.00	-40.47
11504.50	H	-	-	-83.24	21.63	45.39	-49.86	-13.00	-36.86
13148.00	H	-	-	-84.09	24.05	46.96	-48.30	-13.00	-35.30

Table 7-7. Radiated Spurious Data – Band 255 – Mid Channel


Frequency (MHz):	1660.4
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3320.80	H	119	169	-77.10	6.79	36.69	-58.56	-13.00	-45.56
4981.20	H	122	348	-63.96	10.35	53.39	-41.87	-13.00	-28.87
6641.60	H	-	-	-82.05	13.27	38.22	-57.03	-13.00	-44.03
8302.00	H	270	118	-77.87	15.90	45.03	-50.23	-13.00	-37.23
9962.40	H	-	-	-83.30	18.86	42.56	-52.70	-13.00	-39.70
11622.80	H	-	-	-83.39	22.05	45.66	-49.60	-13.00	-36.60
13283.20	H	-	-	-84.33	25.01	47.68	-47.58	-13.00	-34.58

Table 7-8. Radiated Spurious Data – Band 255 – High Channel

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 25 of 35

Band 23/252

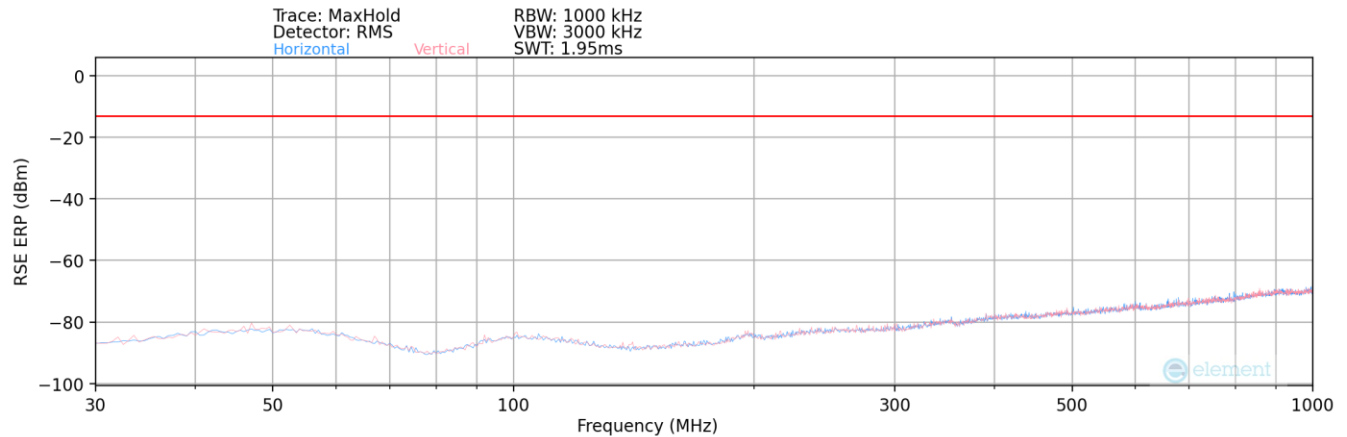


Plot 7-5. Radiated Spurious Plot – Band 23/252

Frequency (MHz):	0.0
RB / Offset:	1 / 24


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
256.50	H	-	-	-73.83	19.02	52.19	-45.22	-13.00	-32.22
638.50	H	-	-	-76.81	27.80	57.99	-39.42	-13.00	-26.42
827.00	H	-	-	-77.53	30.39	59.86	-37.55	-13.00	-24.55

Table 7-9. Radiated Spurious Data – Band 23/252

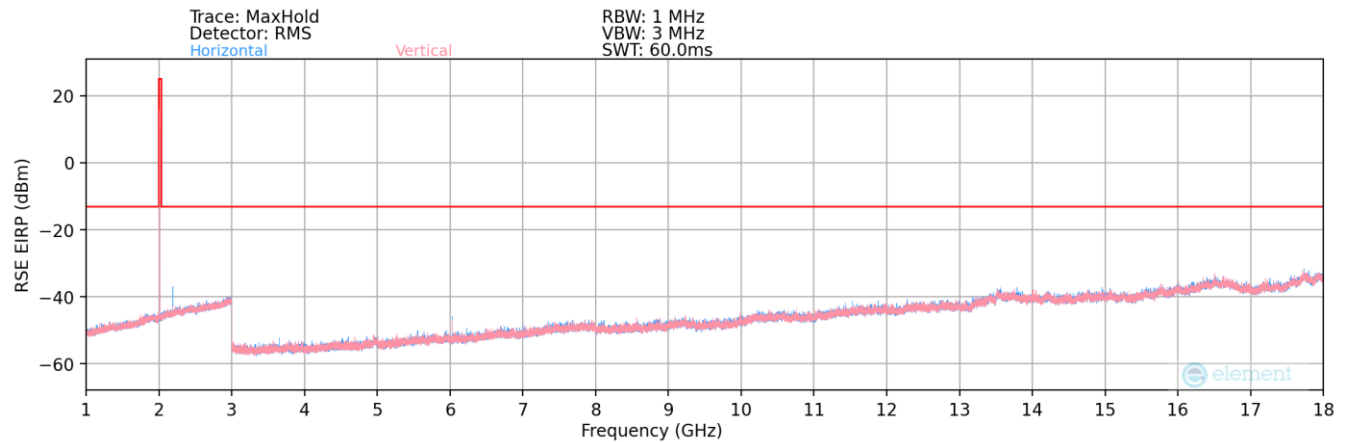

Plot 7-6. Radiated Spurious Plot – Band 23/252

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 26 of 35

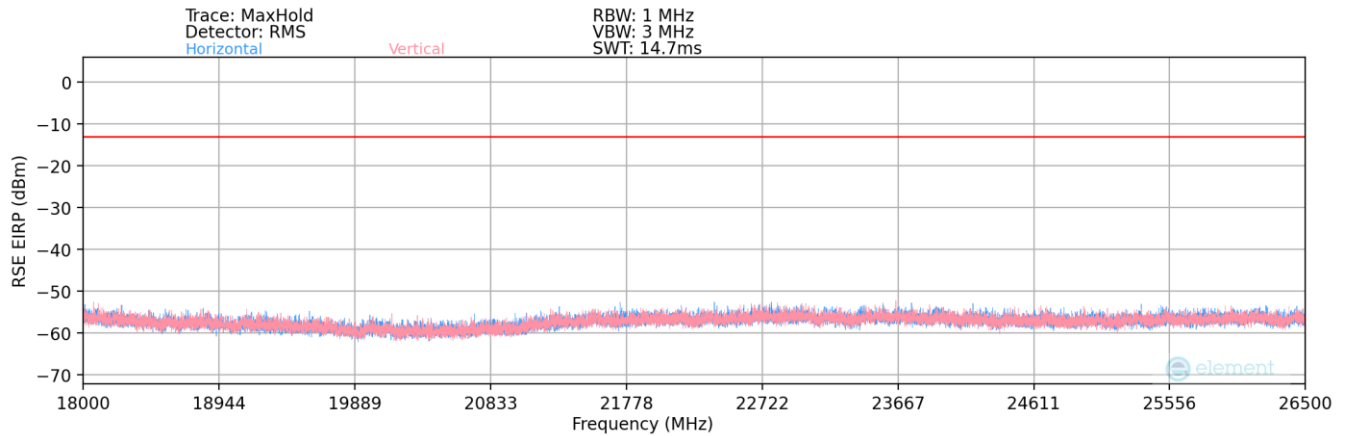

Plot 7-7. Radiated Spurious Plot – Band 23/252

Frequency (MHz):	2000.1
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4000.20	V	-	-	-79.93	7.75	34.82	-60.43	-13.00	-47.43
6000.30	H	115	-5	-71.21	11.40	47.19	-48.06	-13.00	-35.06
8000.40	V	-	-	-82.44	15.60	40.16	-55.10	-13.00	-42.10
10000.50	V	-	-	-83.53	19.12	42.59	-52.67	-13.00	-39.67
12000.60	V	-	-	-83.46	22.12	45.66	-49.60	-13.00	-36.60

Table 7-10. Radiated Spurious Data – Band 23/252 – Low Channel

Frequency (MHz):	2010.0
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4020.00	V	-	-	-80.05	7.61	34.56	-60.70	-13.00	-47.70
6030.00	H	101	206	-71.15	11.32	47.17	-48.09	-13.00	-35.09
8040.00	V	-	-	-82.55	16.00	40.45	-54.81	-13.00	-41.81
10050.00	V	-	-	-83.07	18.39	42.32	-52.93	-13.00	-39.93
12060.00	V	-	-	-83.66	22.29	45.63	-49.63	-13.00	-36.63

Table 7-11. Radiated Spurious Data – Band 23/252 – Mid Channel


Frequency (MHz):	2019.9
SC / Offset:	1 / 24

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4039.80	V	-	-	-80.27	7.76	34.49	-60.77	-13.00	-47.77
6059.70	H	104	44	-71.90	12.14	47.24	-48.02	-13.00	-35.02
8079.60	V	-	-	-82.55	16.70	41.15	-54.11	-13.00	-41.11
10099.50	V	-	-	-82.99	18.97	42.98	-52.28	-13.00	-39.28
12119.40	V	-	-	-83.98	22.39	45.41	-49.84	-13.00	-36.84


Table 7-12. Radiated Spurious Data – Band 23/252 – High Channel

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 27 of 35

Simultaneous Transmission – NTN n23/252 + Bluetooth

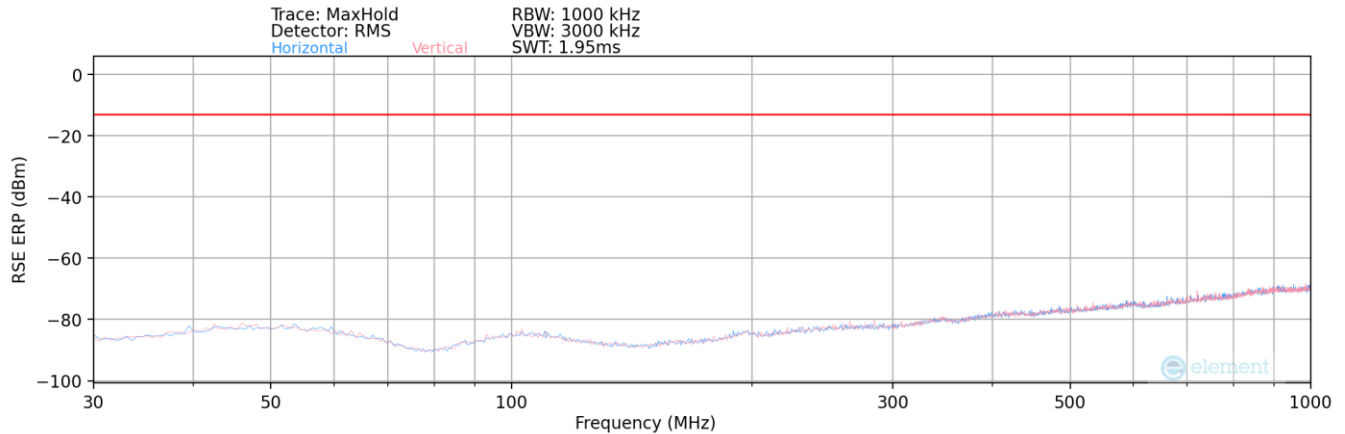

Plot 7-8. Radiated Spurious Plot below 1GHz NTN n23/252 + Bluetooth

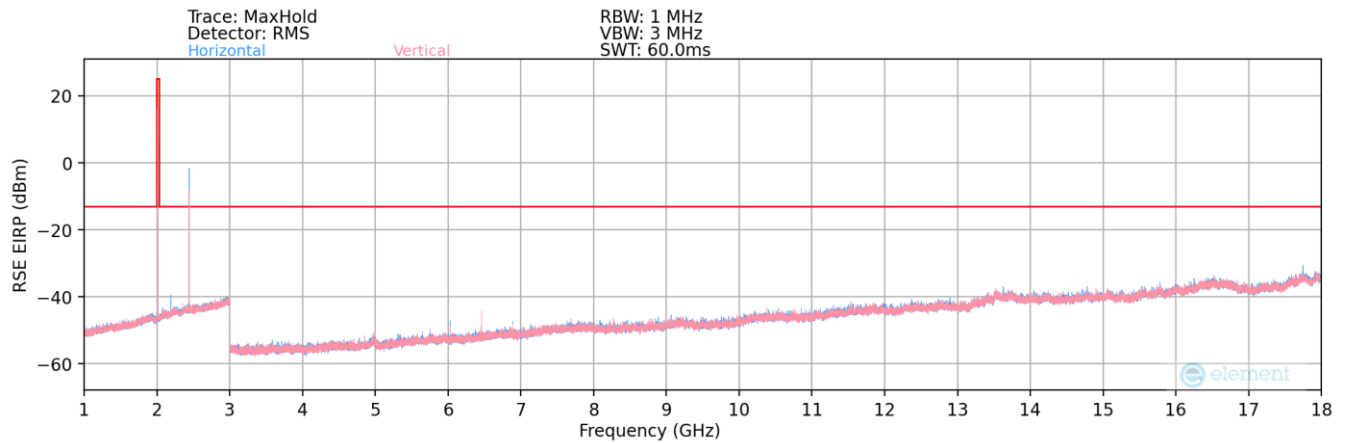

Plot 7-9. Radiated Spurious Plot below 1-18GHz NTN n23/252 + Bluetooth

Sim Tx	NTN BAND 23/252 + Bluetooth 1Mbps
Frequency (MHz):	2010 MHz + 2441 MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
431.00	H	-	-	-78.39	-8.38	20.23	-75.03	-13.00	-62.03
2872.00	H	-	-	-69.63	14.21	51.58	-43.68	-13.00	-30.68
6030.00	H	102	315	-67.99	11.32	50.33	-44.93	-13.00	-31.93
6461.00	V	103	178	-66.04	12.81	53.77	-41.49	-13.00	-28.49
6892.00	H	104	142	-70.93	13.47	49.54	-45.72	-13.00	-32.72
13639.00	H	-	-	-74.90	24.81	56.91	-38.35	-13.00	-25.35
14646.00	H	-	-	-71.34	26.95	62.61	-32.65	-13.00	-19.65
17804.00	H	-	-	-73.54	30.89	64.35	-30.91	-13.00	-17.91

Table 7-13. Radiated Measurements NTN n23/252 + Bluetooth

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 35

7.5 Radiated Spurious Emissions Measurements (1559 – 1610MHz)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Per FCC Part 25.216:

(c) The e.i.r.p. density of emissions from mobile earth stations placed in service after July 21, 2002 with assigned uplink frequencies between 1610 MHz and 1660.5 MHz shall not exceed -70 dBW/MHz, averaged over any 2 millisecond active transmission interval, in the band 1559-1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval, in the 1559-1605 MHz band

(h) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies in the 1626.5-1660.5 MHz band shall suppress the power density of emissions in the 1605-1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -46 dBW/MHz at 1610 MHz, averaged over any 2 millisecond active transmission interval. The e.i.r.p of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -56 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1559 – 1610MHz
4. No. of sweep points = 1001
5. Detector = RMS
6. Trace mode = Average
7. The trace was allowed to stabilize

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 29 of 35

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

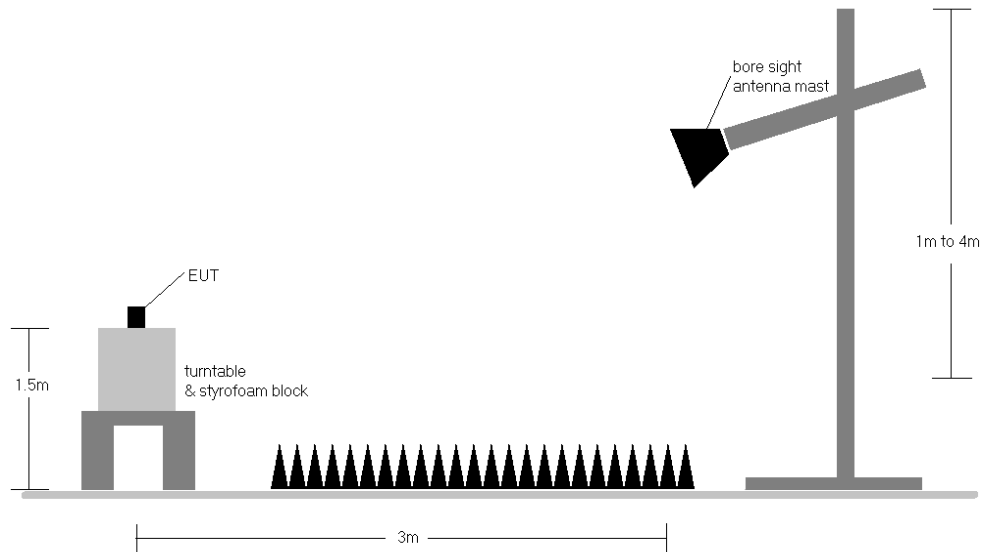



Figure 7-5. Test Instrument & Measurement Setup >1 GHz

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 30 of 35

Band 255 (1559 – 1610MHz)

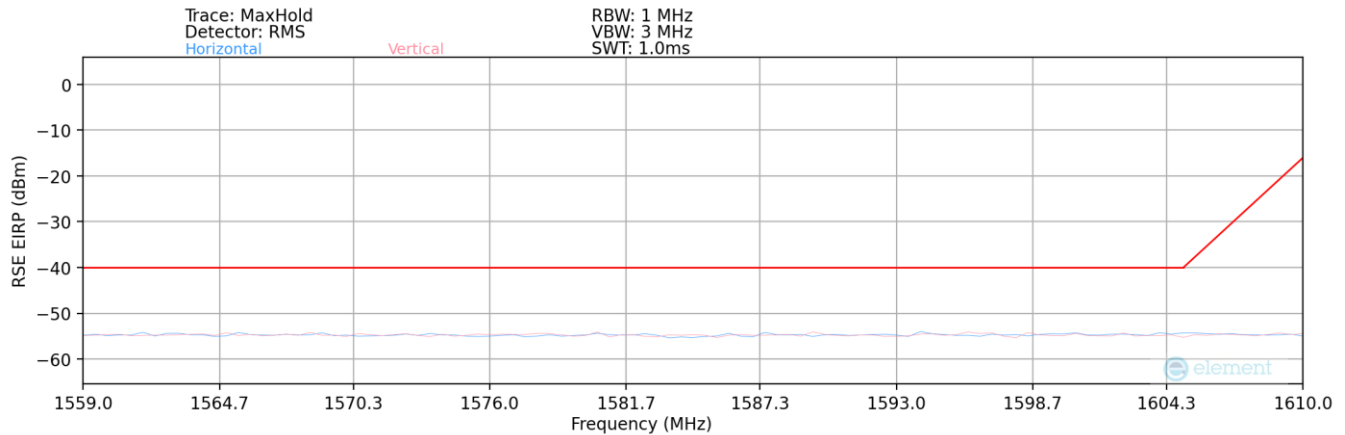

Plot 7-10. Radiated Spurious Plot – Band 255 (1559 – 1610MHz)

Frequency (MHz):	1626.6
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1562.00	H	-	-	-78.04	8.51	37.47	-57.79	-40.00	-17.79
1577.50	H	-	-	-77.94	8.45	37.51	-57.75	-40.00	-17.75
1608.00	H	-	-	-77.83	8.48	37.65	-57.61	-40.00	-17.61

Table 7-14. Radiated Spurious Data – Band 255 – Low Channel

Frequency (MHz):	1643.5
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.00	H	-	-	-77.93	8.49	37.56	-57.69	-40.00	-17.69
1581.00	H	-	-	-77.98	8.44	37.46	-57.80	-40.00	-17.80
1598.70	H	-	-	-77.96	8.37	37.41	-57.85	-40.00	-17.85

Table 7-15. Radiated Spurious Data – Band 255 – Mid Channel

Frequency (MHz):	1660.4
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1568.00	H	-	-	-77.94	8.47	37.53	-57.73	-40.00	-17.73
1583.00	H	-	-	-78.17	8.43	37.26	-58.00	-40.00	-18.00
1606.00	H	-	-	-77.98	8.45	37.47	-57.79	-40.00	-17.79

Table 7-16. Radiated Spurious Data – Band 255 – High Channel

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 31 of 35

7.6 Carrier-Off State Emissions Measurements (1559 – 1610MHz)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Per FCC Part 25.216:

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1 and 3 GHz shall not exceed -80 dBW/MHz in the 1559-1610 MHz band averaged over any two millisecond interval.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points = 1001
5. Detector = RMS
6. Trace mode = Average
7. The trace was allowed to stabilize

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 32 of 35

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

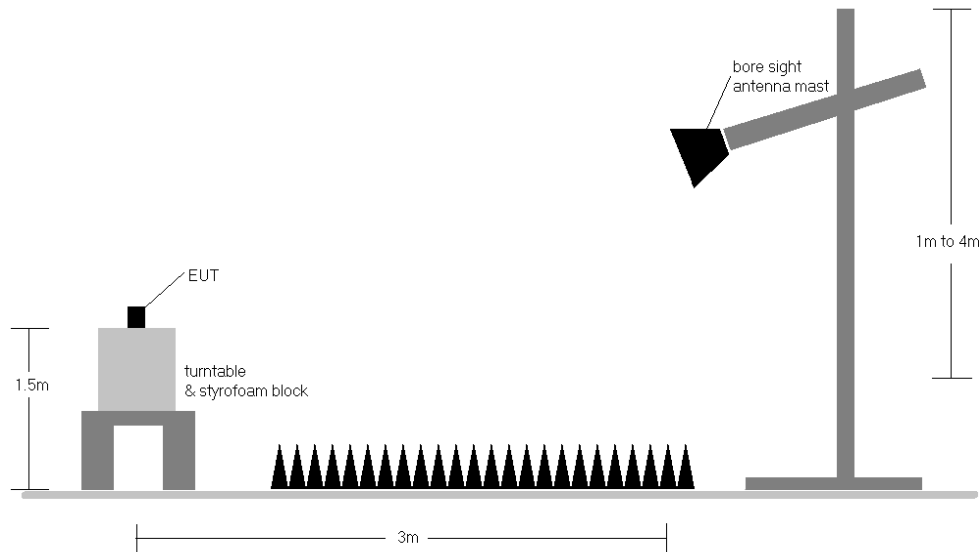



Figure 7-6. Test Instrument & Measurement Setup >1 GHz

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 33 of 35

Band 255 (1559 – 1610MHz, Carrier Off)

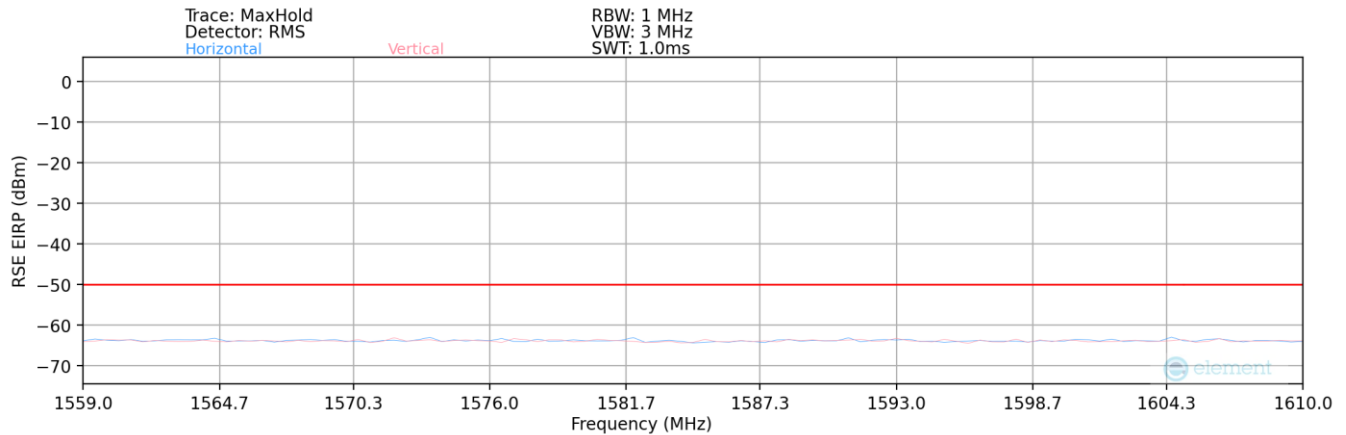

Plot 7-11. Radiated Spurious Plot – Band 255 (1559 – 1610MHz, Carrier Off)

Frequency (MHz):	1626.6
RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1565.00	H	-	-	-77.69	-0.85	28.46	-66.80	-50.00	-16.80
1584.00	H	-	-	-77.99	-0.52	28.49	-66.77	-50.00	-16.77
1604.00	H	-	-	-78.25	-0.31	28.44	-66.82	-50.00	-16.82

Table 7-17. Radiated Spurious Data – Band 255 – Low Channel, Carrier Off

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 34 of 35

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Garmin Portable Digital Transceiver FCC ID: IPH-05168** and **IC: 1792A-05168** complies with the requirements of Part 25 of the FCC rules and RSS-170 of the ISED rules for operation in the 1626.5 – 1660.5MHz and 2000.1 - 2019.9MHz band.

- END OF TEST REPORT -

FCC ID: IPH-05168 IC: 1792A-05168	PART 25 RSS-170 MEASUREMENT REPORT	Test Dates: 3/20/2026 - 7/6/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-02.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 35 of 35