



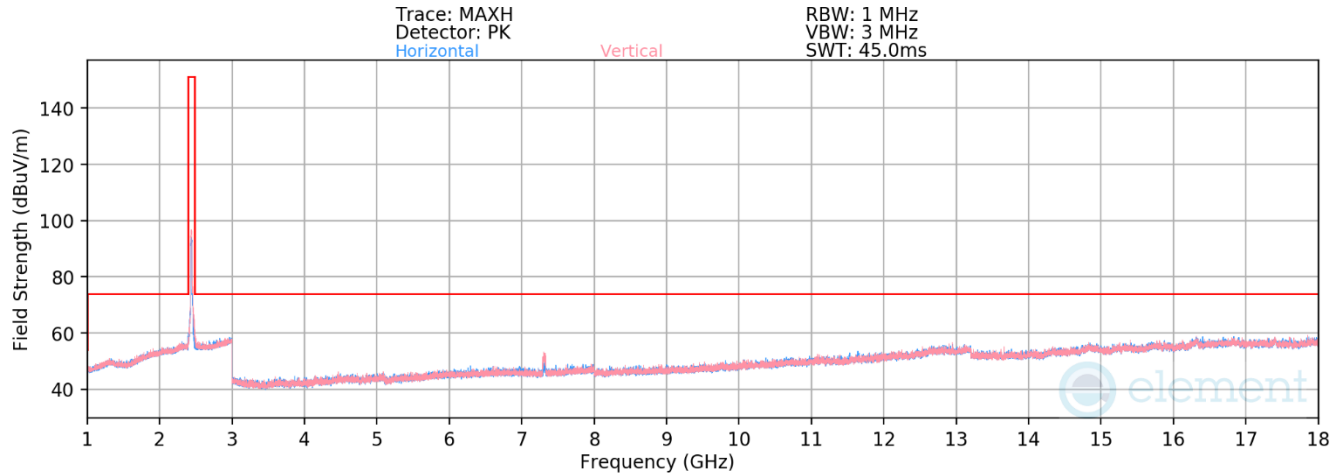

Plot 7-60. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 6)

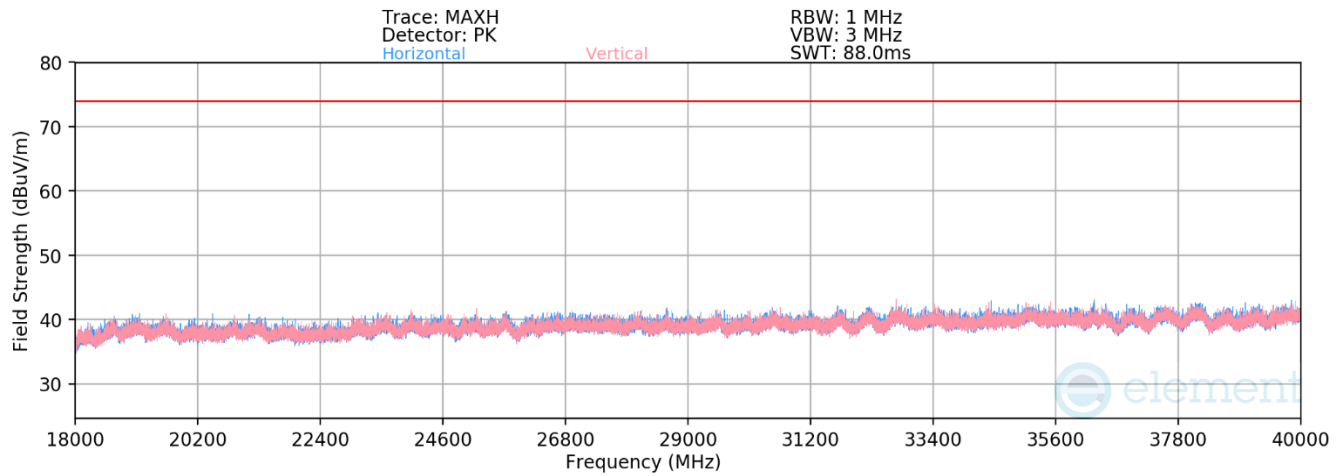

Plot 7-61. Radiated Spurious Emissions above 18GHz (802.11n – Ch.6)


FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 71 of 92

Mode: 802.11n
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	-	-	-	-82.56	9.97	0.00	34.41	53.98	-19.57
4874.00	Peak	-	-	-	-70.93	9.97	0.00	46.04	73.98	-27.94
7311.00	Avg	V	305	299	-74.02	10.90	0.00	43.88	53.98	-10.10
7311.00	Peak	V	305	299	-61.69	10.90	0.00	56.21	73.98	-17.77
12185.00	Avg	-	-	-	-78.29	12.98	0.00	41.69	53.98	-12.29
12185.00	Peak	-	-	-	-67.61	12.98	0.00	52.37	73.98	-21.61
19496.00	Avg	-	-	-	-62.78	-6.00	-9.54	28.68	53.98	-25.30
19496.00	Peak	-	-	-	-51.16	-6.00	-9.54	40.30	73.98	-33.68

Table 7-19. Radiated Measurements

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 72 of 92

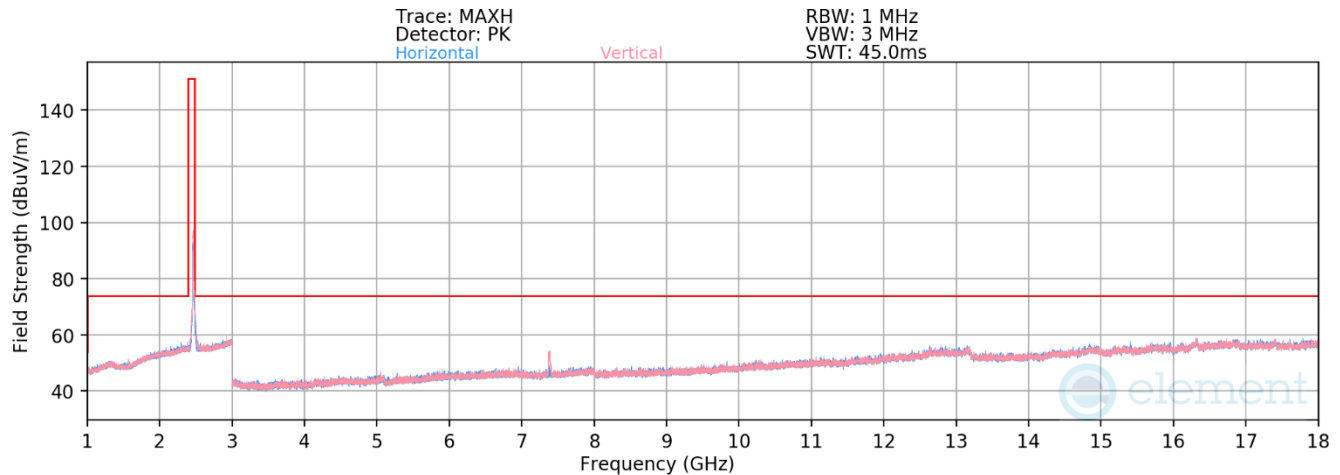

Plot 7-62. Radiated Spurious Emissions above 1GHz (802.11n – Ch. 11)

Mode: 802.11n
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Avg	-	-	-	-82.50	10.04	34.54	53.98	-19.44
4924.00	Peak	-	-	-	-71.47	10.04	45.57	73.98	-28.41
7386.00	Avg	V	250	360	-77.58	11.78	41.20	53.98	-12.78
7386.00	Peak	V	250	360	-65.37	11.78	53.41	73.98	-20.57
12310.00	Avg	-	-	-	-78.27	13.06	41.79	53.98	-12.19
12310.00	Peak	-	-	-	-66.28	13.06	53.78	73.98	-20.20

Table 7-20. Radiated Measurements


FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 73 of 92

7.8.2 Radiated Restricted Band Edge Measurements

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2412MHz
Channel	1

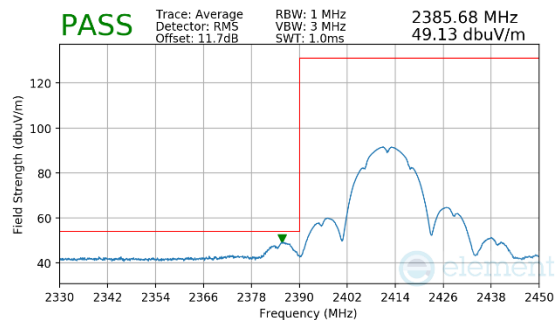


Plot 7-63 Radiated Restricted Lower Band Edge Measurement (Average)

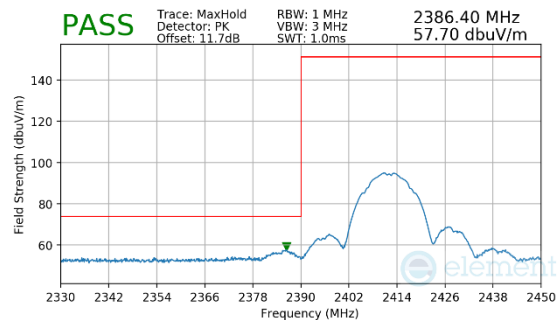


Plot 7-64 Radiated Restricted Lower Band Edge Measurement (Peak)

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

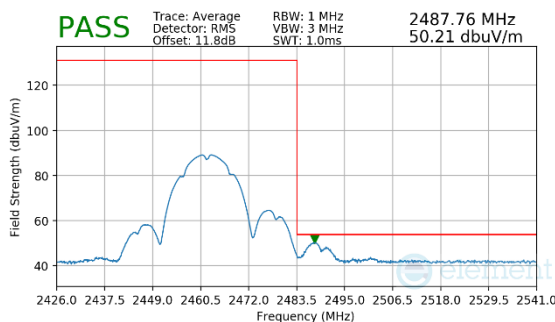


Plot 7-65 Radiated Restricted Higher Band Edge Measurement (Average)

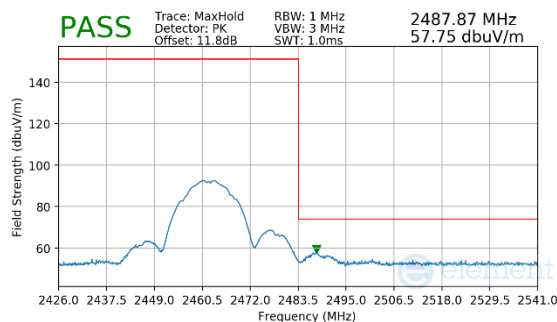


Plot 7-66 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 74 of 92

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	12

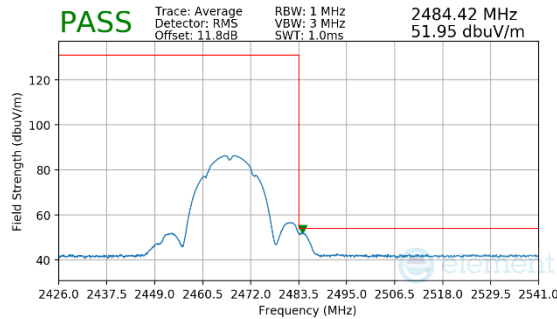


Plot 7-67 Radiated Restricted Higher Band Edge Measurement (Average)

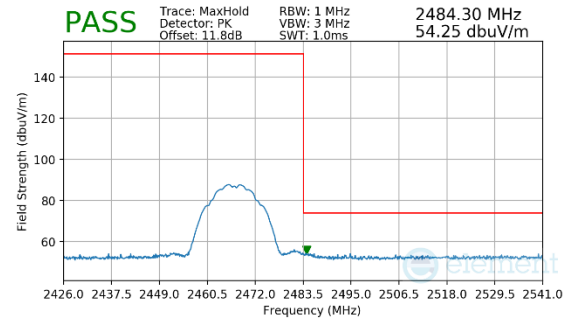


Plot 7-68 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

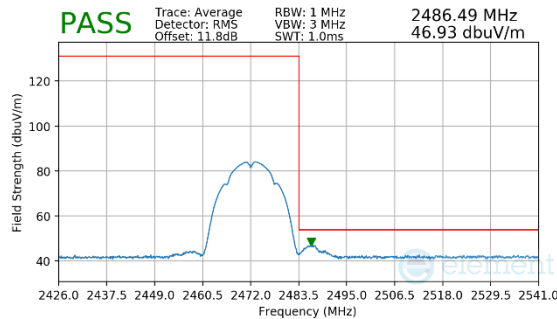


Plot 7-69 Radiated Restricted Higher Band Edge Measurement (Average)

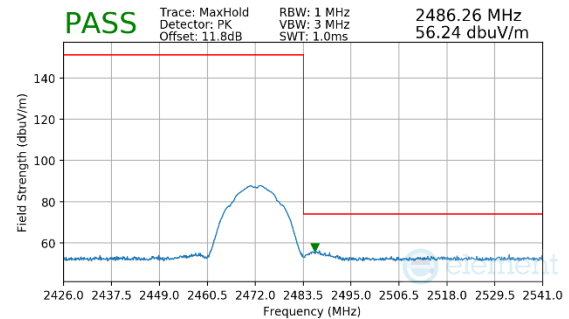


Plot 7-70 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 75 of 92

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	1

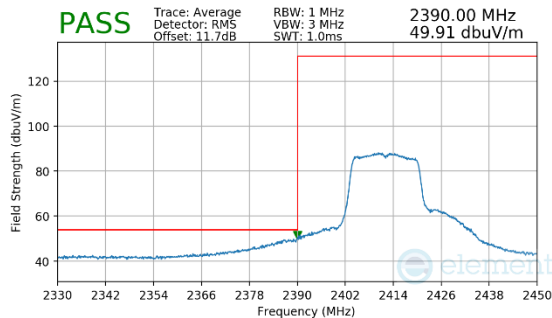


Plot 7-71 Radiated Restricted Lower Band Edge Measurement (Average)

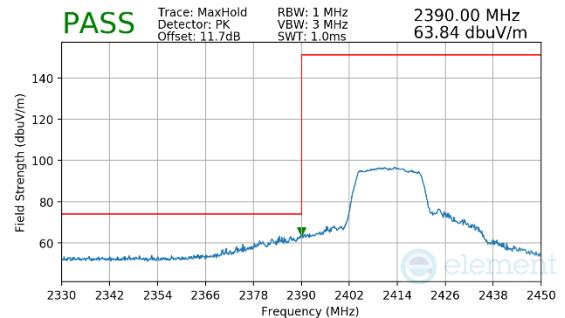


Plot 7-72 Radiated Restricted Lower Band Edge Measurement (Peak)

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2452MHz
Channel	9

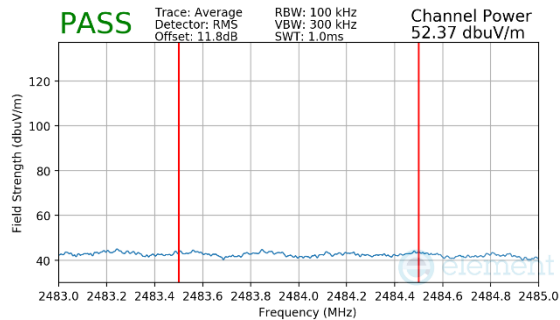


Plot 7-73 Radiated Restricted Higher Band Edge Measurement (Average)

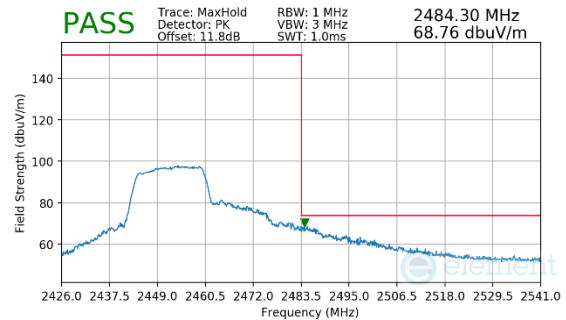


Plot 7-74 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 76 of 92

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2457MHz
Channel	10

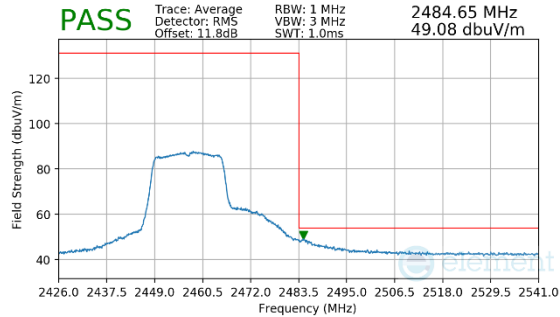


Plot 7-75 Radiated Restricted Higher Band Edge Measurement (Average)

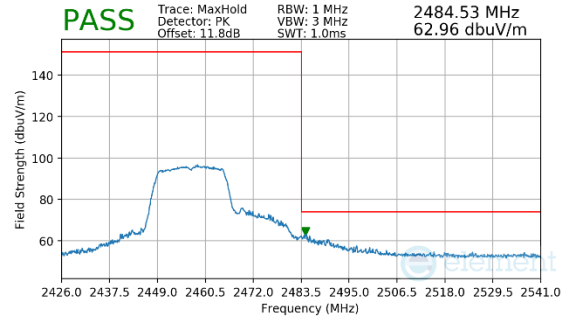


Plot 7-76 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

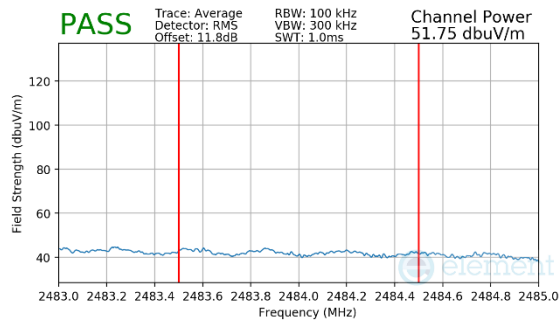


Plot 7-77 Radiated Restricted Higher Band Edge Measurement (Average)

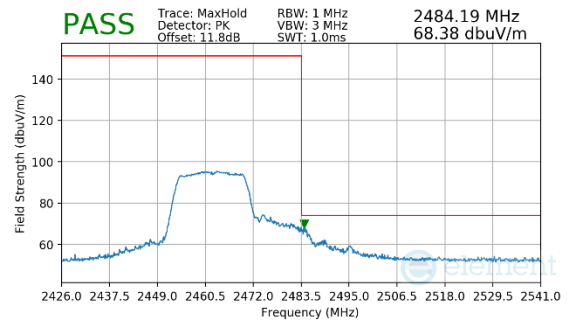


Plot 7-78 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 77 of 92

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	12

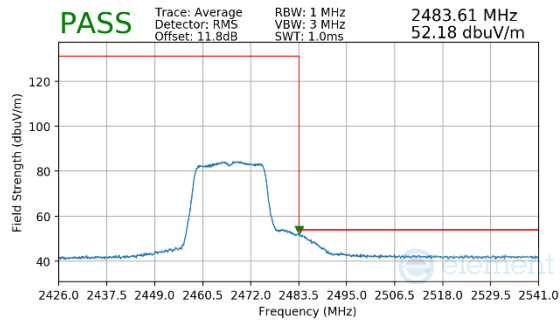


Plot 7-79 Radiated Restricted Higher Band Edge Measurement (Average)

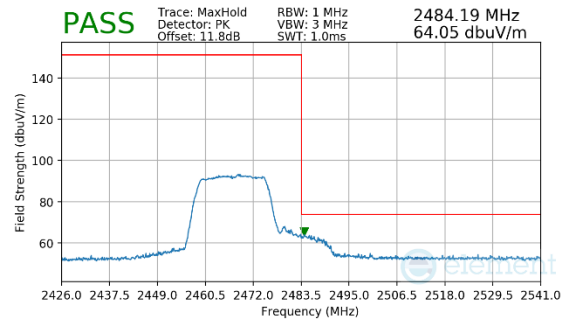


Plot 7-80 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11g
Data Rate	6Mbps
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

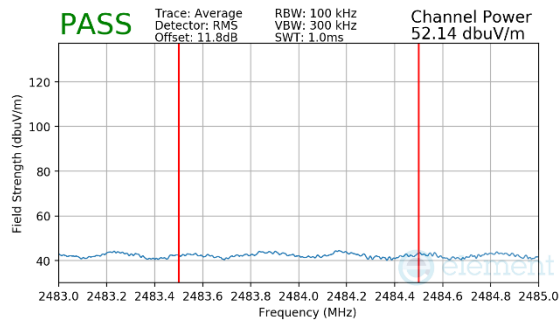


Plot 7-81 Radiated Restricted Higher Band Edge Measurement (Average)

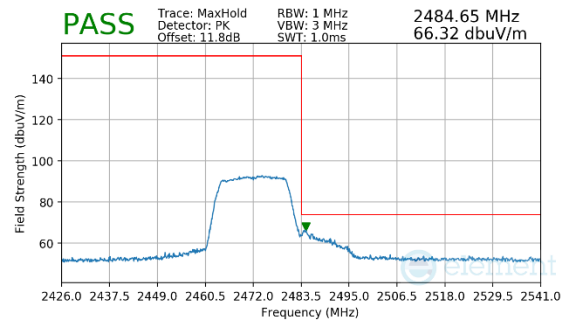


Plot 7-82 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 78 of 92

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2412MHz
Channel	1

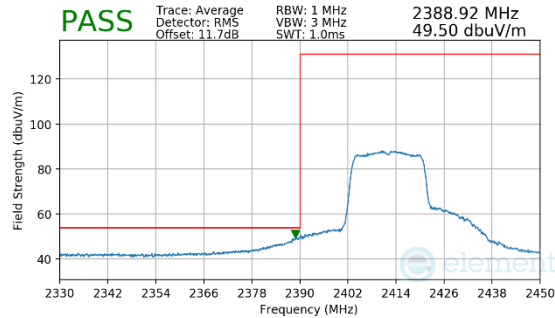


Plot 7-83 Radiated Restricted Lower Band Edge Measurement (Average)

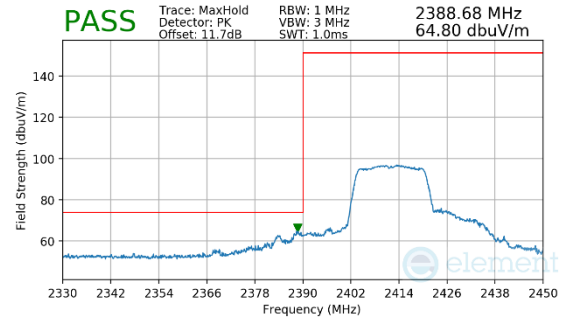


Plot 7-84 Radiated Restricted Lower Band Edge Measurement (Peak)

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2417MHz
Channel	2

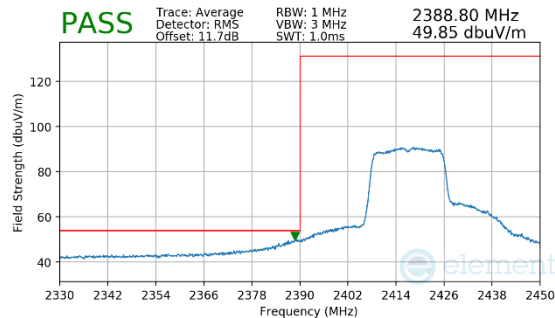


Plot 7-85 Radiated Restricted Lower Band Edge Measurement (Average)

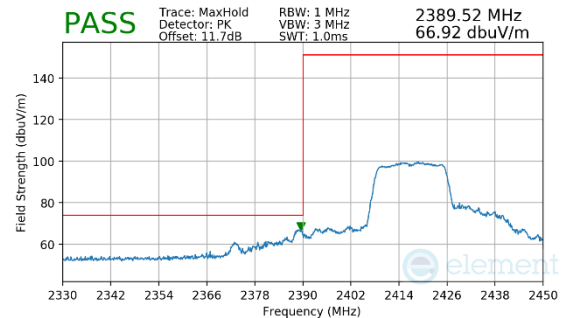


Plot 7-86 Radiated Restricted Lower Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 79 of 92

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2422MHz
Channel	3

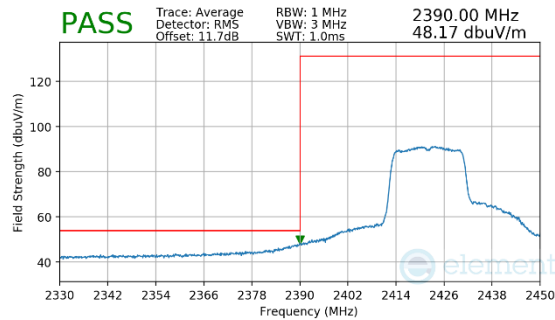


Plot 7-87 Radiated Restricted Lower Band Edge Measurement (Average)

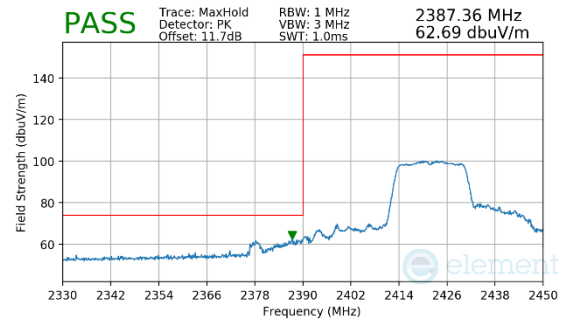


Plot 7-88 Radiated Restricted Lower Band Edge Measurement (Peak)

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2442MHz
Channel	7

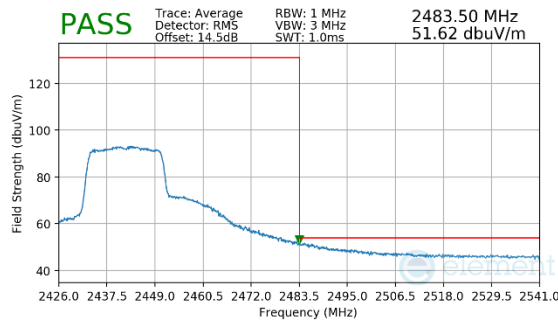


Plot 7-89 Radiated Restricted Higher Band Edge Measurement (Average)

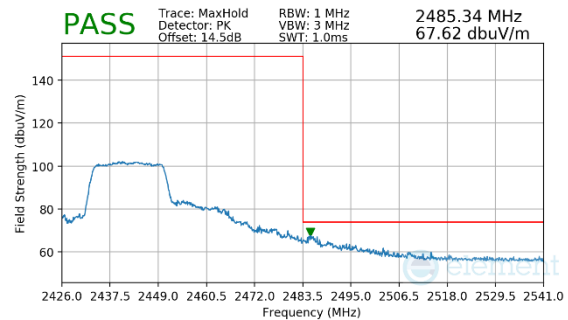


Plot 7-90 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 80 of 92

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2447MHz
Channel	8

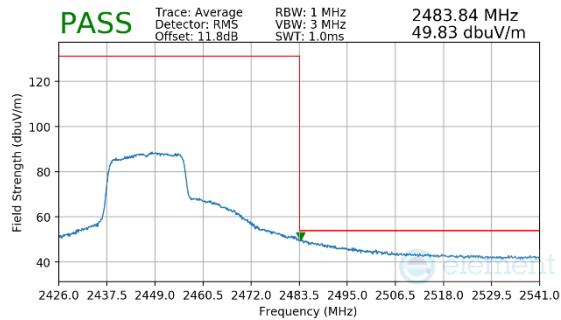


Plot 7-91 Radiated Restricted Higher Band Edge Measurement (Average)

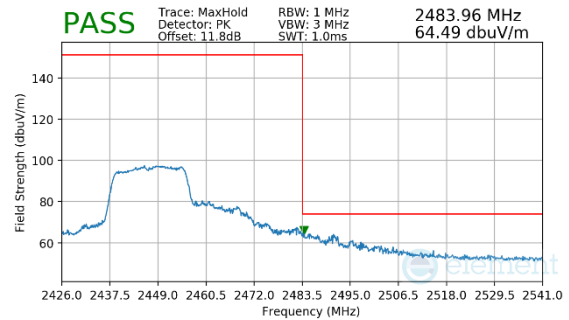


Plot 7-92 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2452MHz
Channel	9

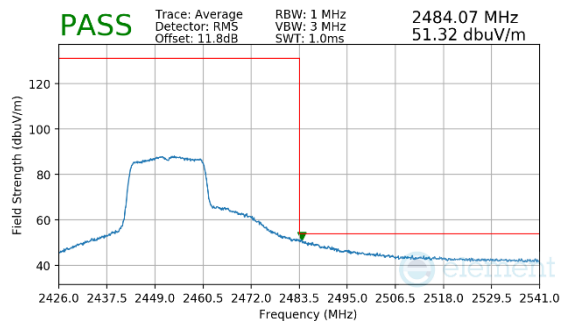


Plot 7-93 Radiated Restricted Higher Band Edge Measurement (Average)

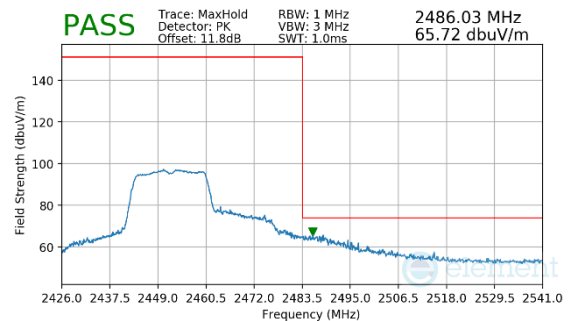


Plot 7-94 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 81 of 92

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2457MHz
Channel	10

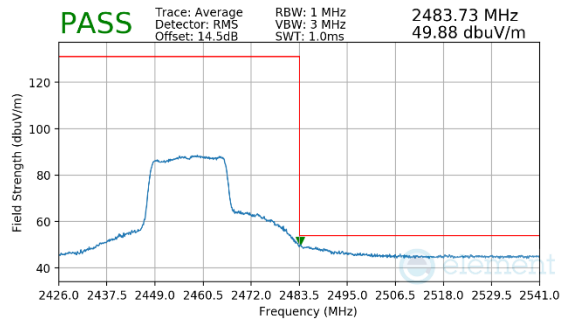


Plot 7-95 Radiated Restricted Higher Band Edge Measurement (Average)

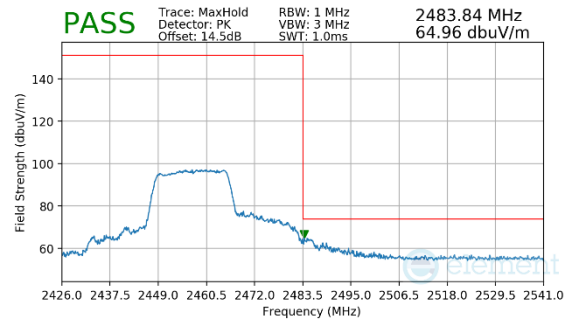


Plot 7-96 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

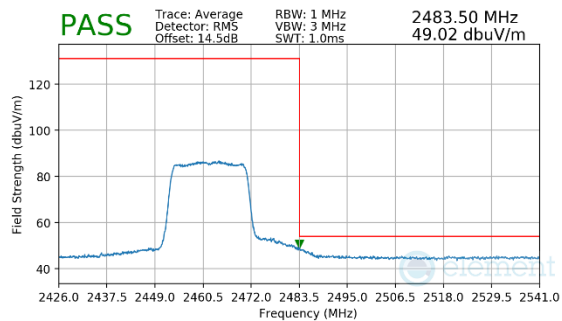


Plot 7-97 Radiated Restricted Higher Band Edge Measurement (Average)

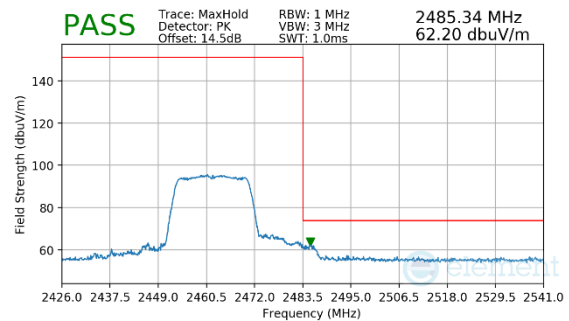


Plot 7-98 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 82 of 92

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	12

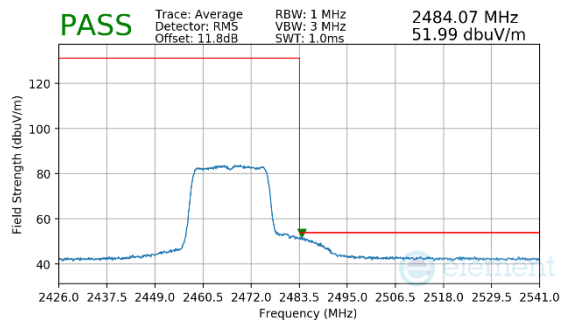


Plot 7-99 Radiated Restricted Higher Band Edge Measurement (Average)

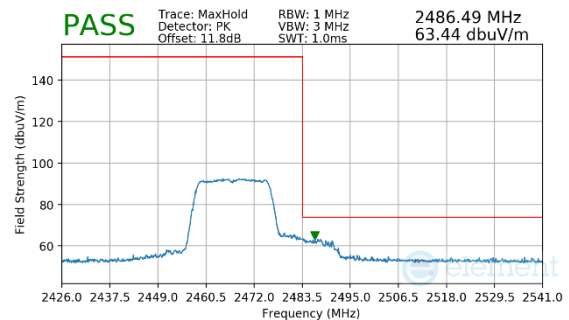


Plot 7-100 Radiated Restricted Higher Band Edge Measurement (Peak)

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

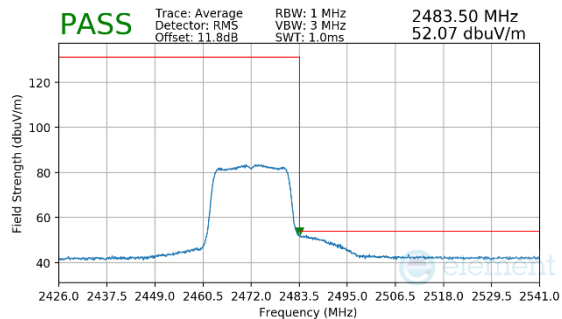

Plot 7-101 Radiated Restricted Higher Band Edge Measurement (Average)

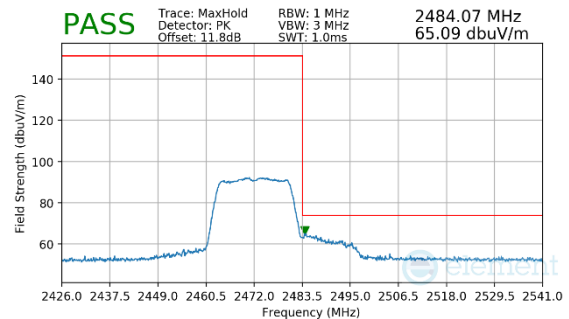

Plot 7-102 Radiated Restricted Higher Band Edge Measurement (Peak)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 83 of 92

7.9 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-21 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-21. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04-IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 84 of 92

6. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

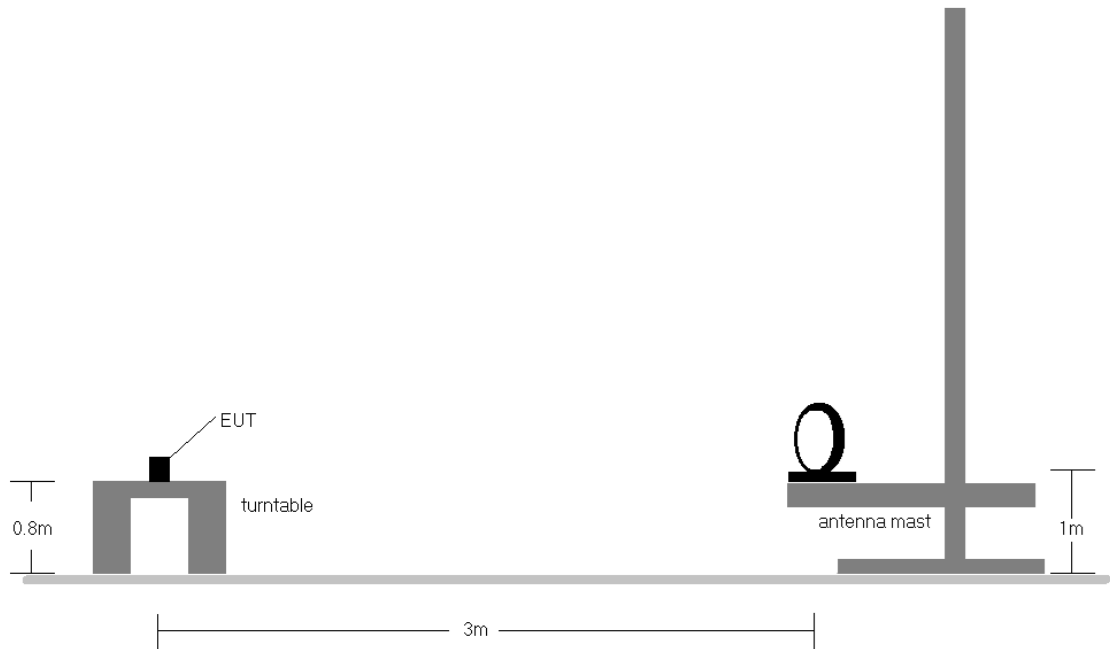


Figure 7-8. Radiated Test Setup < 30Mhz

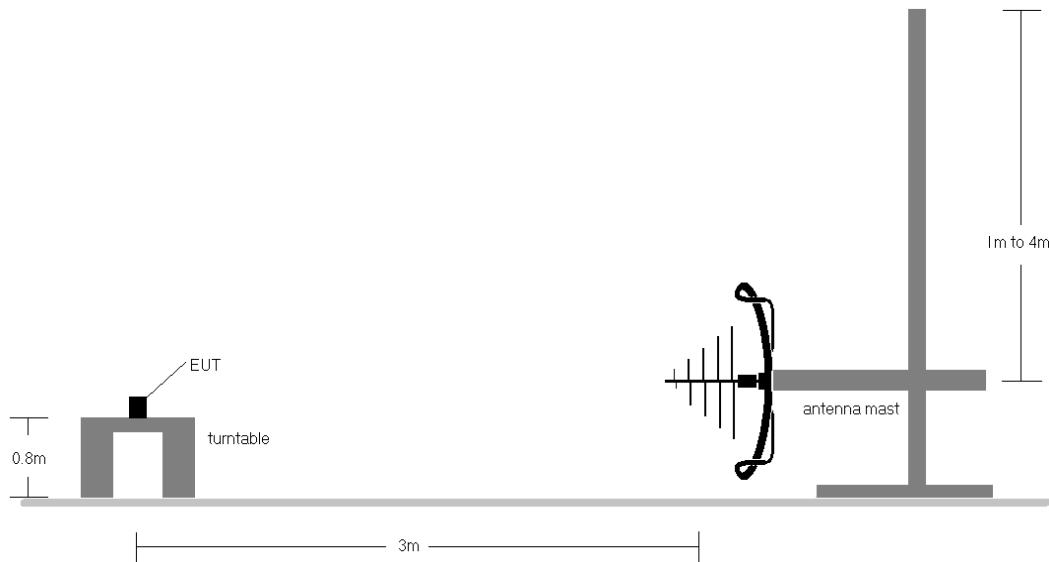


Figure 7-9. Radiated Test Setup < 1GHz

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 85 of 92

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-21.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
11. The unit was tested with all possible modes and only the highest emission is reported.
12. All antenna configurations were investigated and only the worst case is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- Margin $[\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 86 of 92

Radiated Spurious Emissions Measurements (Below 1GHz)

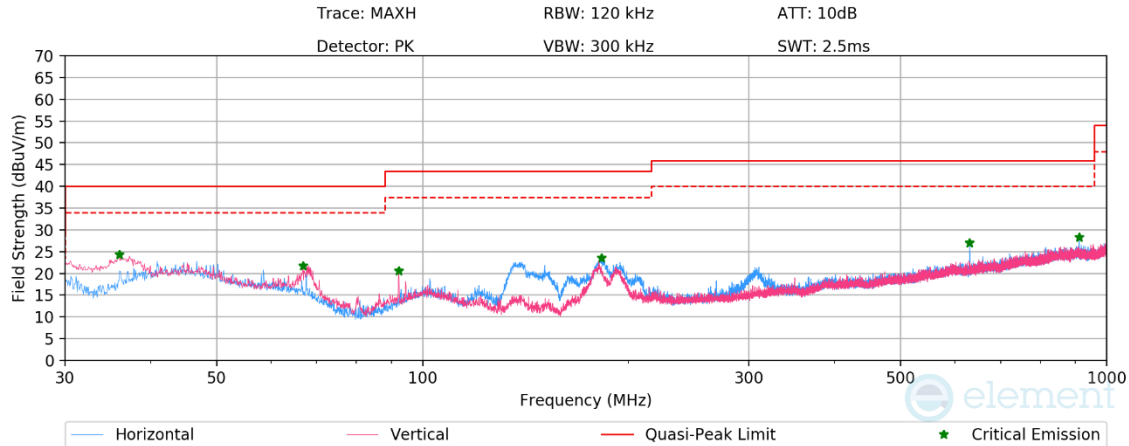

Plot 7-103. Radiated Spurious Emissions below 1GHz 11b Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.00	Max-Peak	V	100	0	-62.48	-20.21	24.31	40.00	-15.69
66.84	Max-Peak	V	100	343	-64.59	-20.66	21.75	40.00	-18.25
92.22	Max-Peak	V	100	7	-65.67	-20.71	20.62	43.50	-22.88
182.59	Max-Peak	H	200	77	-63.46	-20.03	23.51	43.50	-19.99
630.62	Max-Peak	H	100	121	-70.91	-9.03	27.06	46.00	-18.94
911.86	Max-Peak	H	200	342	-74.69	-4.00	28.32	46.00	-17.68

Table 7-22. Radiated Spurious Emissions below 1GHz 11b Ch.6, with AC/DC Adaptor

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 87 of 92

7.10 AC Line-Conducted Emissions

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-23. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 88 of 92

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


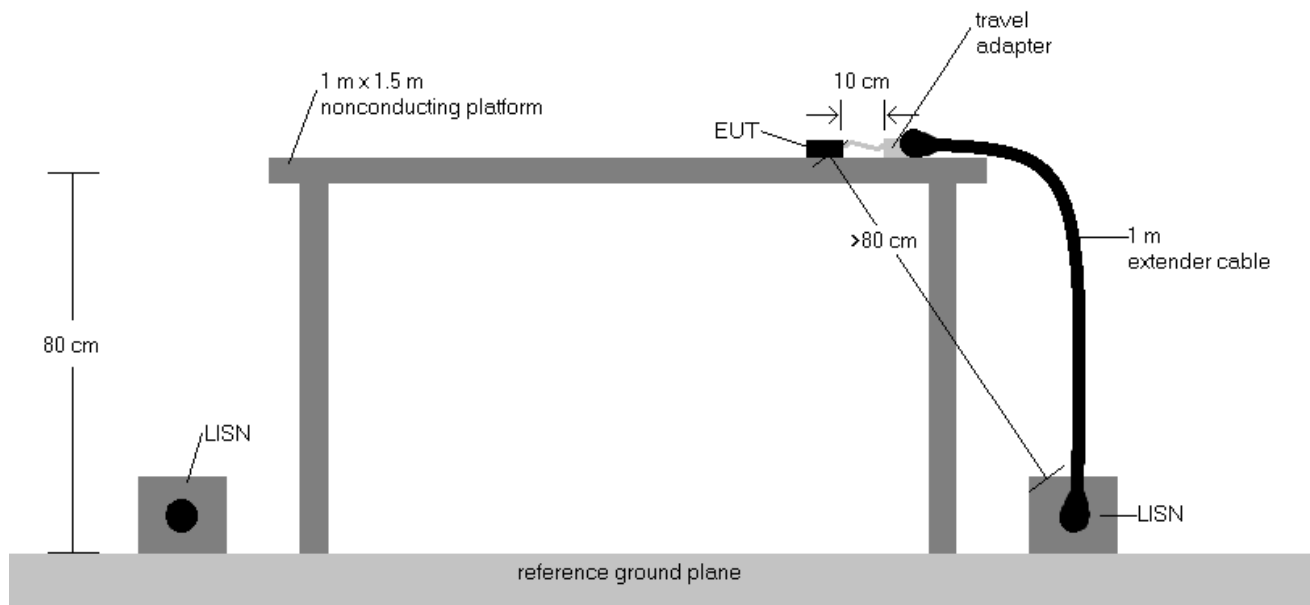


Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	Page 89 of 92	

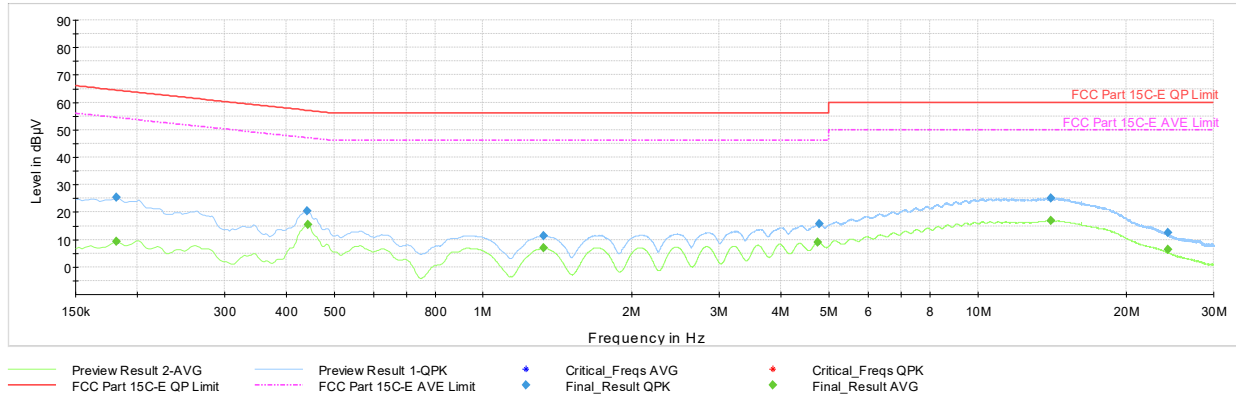


Plot 7-104. AC Line Conducted Plot with 11b Ch.6 (L1, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.18	FINAL	—	9.28	54.42	-45.14	L1	GND
0.18	FINAL	25.27	—	64.42	-39.15	L1	GND
0.44	FINAL	20.30	—	57.06	-36.76	L1	GND
0.44	FINAL	—	15.45	47.02	-31.57	L1	GND
1.32	FINAL	—	6.86	46.00	-39.14	L1	GND
1.33	FINAL	11.49	—	56.00	-44.51	L1	GND
4.75	FINAL	—	9.09	46.00	-36.91	L1	GND
4.78	FINAL	15.65	—	56.00	-40.35	L1	GND
14.07	FINAL	—	16.84	50.00	-33.16	L1	GND
14.07	FINAL	25.16	—	60.00	-34.84	L1	GND
24.28	FINAL	—	6.30	50.00	-43.70	L1	GND
24.28	FINAL	12.40	—	60.00	-47.60	L1	GND

Table 7-24. AC Line Conducted Data with 11b Ch.6 (L1, with AC/DC Adaptor)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	Page 90 of 92	

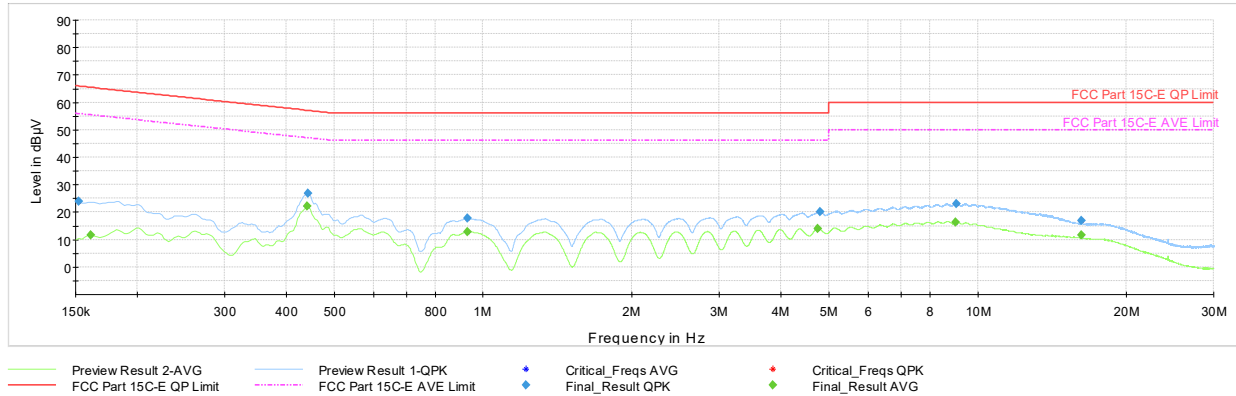

Plot 7-105. AC Line Conducted Plot with 11b Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.15	FINAL	24.01	—	65.88	-41.87	N	GND
0.16	FINAL	—	11.78	55.40	-43.62	N	GND
0.44	FINAL	—	22.08	47.06	-24.98	N	GND
0.44	FINAL	26.78	—	57.02	-30.24	N	GND
0.93	FINAL	17.67	—	56.00	-38.33	N	GND
0.93	FINAL	—	12.87	46.00	-33.13	N	GND
4.76	FINAL	—	14.08	46.00	-31.92	N	GND
4.80	FINAL	20.08	—	56.00	-35.92	N	GND
9.02	FINAL	—	16.35	50.00	-33.65	N	GND
9.04	FINAL	23.14	—	60.00	-36.86	N	GND
16.18	FINAL	—	11.51	50.00	-38.49	N	GND
16.18	FINAL	17.00	—	60.00	-43.00	N	GND

Table 7-25. AC Line Conducted Data with 11b Ch.6 (N, with AC/DC Adaptor)

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 91 of 92

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Garmin Portable Digital Transceiver FCC ID: IPH-05171, IC: 1792A-05171** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: IPH-05171 IC: 1792A-05171		Test Dates: 02/17/2026 - 07/07/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1C2605260039-04.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 92 of 92