

Appendix A: SAR Test Plots

RF SAFETY LABORATORY

DUT: A05206; SN: 79789

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Extremity	Flat, BACK, 0.00	2.4 GHz Bluetooth LE	Bluetooth Low Energy, 10670	2.4 GHz Antenna	Ch. 37	2402.000	6.72, 7.08,6.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-11-24	21.9	21.5	16.4.0.5005	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.82	42.2	EX3DV4 – SN7859, 2025-05-05	DAE4ip Sn1905, 2025-04-25

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.027
Power Drift [dB]	-0.17
Peak SAR (Extrapolated) [W/kg]	0.084
M2 /M1 [%]	90.0
Dist 3dB Peak [mm]	10.0

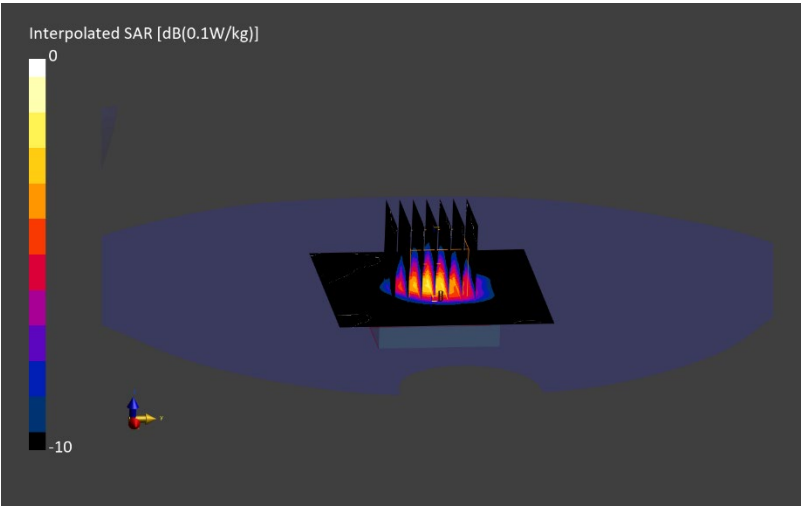

RF SAFETY LABORATORY

DUT: A05206; SN: 79789

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Extremity	Flat, BACK, 0.00	2.4 GHz ANT/ANT+	Bluetooth (GFSK, DH5), 10032	2.4 GHz Antenna	Ch. 39	2441.000	6.72, 7.08,6.68

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-11-24	21.9	21.5	16.4.0.5005	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.85	42.1	EX3DV4 – SN7859, 2025-05-05	DAE4ip Sn1905, 2025-04-25

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0
Power Drift [dB]	0
Peak SAR (Extrapolated) [W/kg]	0.003
M2/M1 [%]	52.1
Dist 3dB Peak [mm]	1.5

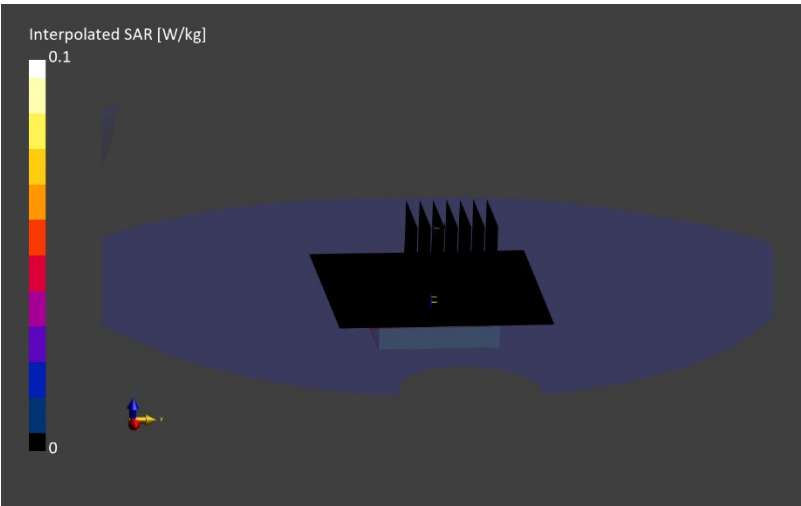

RF SAFETY LABORATORY

DUT: A05206; SN: 79789

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Frequency [MHz]	ConvF (x,y,z)
Extremity	Flat, BACK, 0.00	NFC	CW, 0	NFC	13.600	14.3, 16.56,15.27

Test Setup

Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2025-11-24	22.8	22.2	16.4.0.5005	ELI V8.0 – 2216	Head Simulating Liquid	0.708	51.6	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	48.0 x 48.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0
Power Drift [dB]	0.05
Peak SAR (Extrapolated) [W/kg]	0.003
M2/M1 [%]	N/A
Dist 3dB Peak [mm]	1.7

