

TEST REPORT

APPLICANT

Garmin International Inc

MODEL NAME

A05216

FCC ID

IPH-05216

ISED ID

1792A-05216

REPORT NUMBER

HA2603-0045-R09-01

TEST REPORT

Date of Issue

June 10, 2026

Test Site

HCT America, Inc.
840 Yosemite Way, Milpitas, CA 95035, USA

Applicant	Garmin International Inc
Applicant Address	1200 E. 151 st Street Olathe, Kansas 66062, USA
Model Name	A05216
EUT Type	Mobile GNSS navigator with 2.4 GHz and 5 GHz WLAN
Modulation Type	OFDM
FCC Classification	Digital Transmission System (DTS) Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s)	47 CFR FCC PART C § 15.205/15.209/15.247/15.407
ISED Rule Part(s)	RSS-210 Issue 4 RSS-Gen Issue 5 Amd 2
Test Procedure	ANSI C63.10-2020, KDB 558074 D01 v05r02

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Authorized & Released By:

Dan Corona
Technical Manager

Tested By:

Kevin Kim
RF Engineer

REVISION HISTORY

The revision history for this document is shown in table.

TEST REPORT NO.	REVISION	DATE	DESCRIPTION
HA2603-0045-R09	0	May 30, 2026	Initial Issue
HA2603-0045-R09-01	01	June 10, 2026	Updated page 5 to include the FVIN

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. METHODOLOGY	6
3. INSTRUMENT CALIBRATION	6
4. FACILITIES AND ACCREDITATIONS	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY OF TEST RESULTS	15
9. TEST RESULT	17
9.1 RADIATED SPURIOUS EMISSIONS	17
10. LIST OF TEST EQUIPMENT	23
APPENDIX A. TEST SETUP PHOTOS	24
APPENDIX B. PHOTOGRAPHS OF EUT	25

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	A05216
EUT Type	Mobile GNSS navigator with 2.4 GHz and 5 GHz WLAN
Serial Number	3634646844
Power rating	Normal operation: 10.0 – 24.0 VDC, 2 A *USB: 5 VDC, 3A
RF Specification	Bluetooth 5.0 LE (BR / EDR / 1M / 2M) WIFI 2.4 GHz: 802.11b/g/nHT20 WIFI 5 GHz: 802.11a/n20/n40/ac80
Transmitter Chain	Bluetooth LE / Bluetooth BR/EDR / WIFI 2.4 GHz: SISO WIFI 5 GHz: SISO
Operating Environment	Outdoor
Operating Temperature	0 °C ~ +55 °C

NOTE: *The 5 VDC, 3 A supply is via USB and is not used during normal operation.

RF SPECIFICATION SUBJECT TO THE REPORT

RF Specification	WLAN 2.4 GHz	802.11n(HT20)
	WLAN 5 GHz	802.11n(HT40)
Max. RF Output Power	WLAN 2.4 GHz	Peak: 15.638 dBm
	WLAN 5 GHz	Peak: 14.64 dBm
Modulation Type	WLAN 2.4 GHz	OFDM
	WLAN 5 GHz	OFDM
Antenna Specification ¹⁾	WLAN 2.4 GHz	Antenna Type: Chip antenna Peak Gain: 2.11 dBi
	WLAN 5 GHz	Antenna Type: Chip antenna Peak Gain: 2.11 dBi
Firmware Version ²⁾	1.24	
Hardware Version ²⁾	A05216	
FVIN	2.14	
Date(s) of Tests	April 10, 2026, ~ April 22, 2026	
Test Environment	20.5 °C~24.7 °C / 38%~47%	

Note:

1. Antenna information is based on the document provided.
2. Firmware and Hardware Version are as received by the client.

2. METHODOLOGY

FCC KDB 558074 D01 DTS Measurement Guidance v05r02 dated April 2nd, 2019 entitled “Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules”.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, and 15.247 under the FCC Rules Part 15 Subpart C / RSS-Gen issue 5 Amd 2, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2020)

DESCRIPTION OF TEST MODES

The EUT has been tested at 5 GHz WLAN test mode. Power level setting at continuous TX and normal RX mode for each 802.11a/n(HT20/40) /ac80.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

HCT America, Inc. holds A2LA accreditation (certificate no. 4201.01) covering all testing included in the scope of this report. All tests were conducted at the facilities listed below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	840 Yosemite Way, Milpitas, CA 95035 USA	US0198	25729	898494
☐	1177 Comstock Road, Hollister, CA 95023 USA	US0198	25729	898494



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

According to RSS-Gen Issue 5 (Section 6.8):

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Output Power, Conducted	± 0.54 dB
Radiated Emissions (below 1 GHz)	± 5.29 dB
Radiated Emissions (Above 1~40 GHz)	± 4.29 dB

7. DESCRIPTION OF TESTS

7.1. RADIATED EMISSIONS

RADIATION EMISSION LIMIT

FCC : 47 CFR § 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

ISED : RSS-GEN Section 8.9		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


RESTRICTED BANDS OF OPERATION

FCC: 47 CFR § 15.205(a)				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	12.29 - 12.293	149.9 - 150.05	1660.0 - 1710.0	8025 - 8500
0.495 - 0.505	12.51975 - 12.52025	156.52475 - 156.52525	1718.8 - 1722.2	9000 - 9200
2.1735 - 2.1905	12.57675 - 12.57725	156.7 - 156.9	2200.0 - 2300.0	9300 - 9500
4.125 - 4.128	13.36 - 13.41	162.0125 - 167.17	2310.0 - 2390.0	10600 - 12700
4.17725 - 4.17775	16.42 - 16.423	167.72 - 173.2	2483.5 - 2500.0	13250 - 13400
4.20725 - 4.20775	16.69475 - 16.69525	240.0 - 285.0	2690.0 - 2900.0	14470 - 14500
6.215 - 6.218	16.80425 - 16.80475	322.0 - 335.4	3260.0 - 3267.0	15350 - 16200
6.26775 - 6.26825	25.5 - 25.67	399.9 - 410.0	3332.0 - 3339.0	17700 - 21400
6.31175 - 6.31225	37.5 - 38.25	608.0 - 614.0	3345.8 - 3358.0	22010 - 23120
8.291 - 8.294	73 - 74.6	960.0 - 1240.0	3600.0 - 4400.0	23600 - 24000
8.362 - 8.366	74.8 - 75.2	1300.0 - 1427.0	4500.0 - 5150.0	31200 - 31800
8.37625 - 8.38675	108 - 121.94	1435.0 - 1626.5	5350.0 - 5460.0	36430 - 36500
8.41425 - 8.41475	123 - 138	1645.5 - 1646.5	7250.0 - 7750.0	Above 38600


ISED: RSS-GEN Section 8.10				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	8.37625 - 8.38675	108 - 138	1660 - 1710	8025 - 8500
0.495 - 0.505	8.41425 - 8.41475	149.9 - 150.05	1718.8 - 1722.2	9000 - 9200
2.1735 - 2.1905	12.29 - 12.293	156.52475 - 156.52525	2200 - 2300	9300 - 9500
3.020 - 3.026	12.51975 - 12.52025	156.7 - 156.9	2310 - 2390	10600 - 12700
4.125 - 4.128	12.57675 - 12.57725	162.0125 - 167.17	2483.5 - 2500	13250 - 13400
4.17725 - 4.17775	13.36 - 13.41	167.72 - 173.2	2655 - 2900	14470 - 14500
4.20725 - 4.20775	16.42 - 16.423	240 - 285	3260 - 3267	15350 - 16200
5.677 - 5.683	16.69475 - 16.69525	322 - 335.4	3332 - 3339	17700 - 21400
6.215 - 6.218	16.80425 - 16.80475	399.9 - 410	3345.8 - 3358	22010 - 23120
6.26775 - 6.26825	25.5 - 25.67	608 - 614	3500 - 4400	23600 - 24000
6.31175 - 6.31225	37.5 - 38.25	960 - 1427	4500 - 5150	31200 - 31800
8.291 - 8.294	73 - 74.6	1435 - 1626.5	5350 - 5460	36430 - 36500
8.362 - 8.366	74.8 - 75.2	1645.5 - 1646.5	7250 - 7750	Above 38600

TEST SETUP


Below 30 MHz

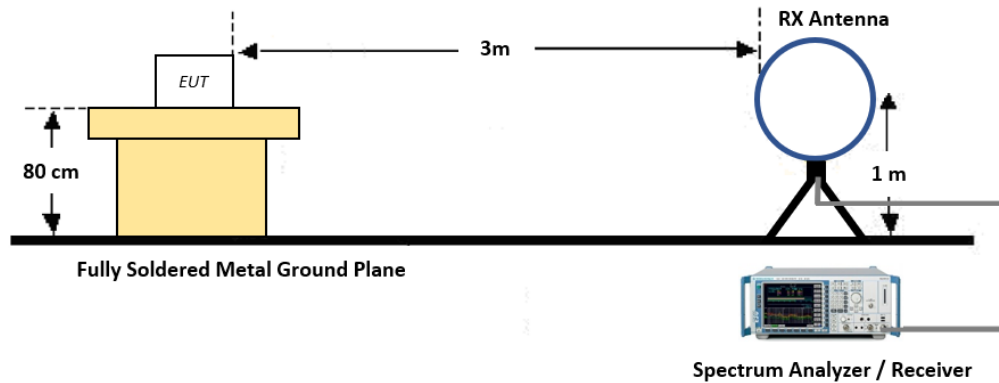

30 MHz - 1 GHz

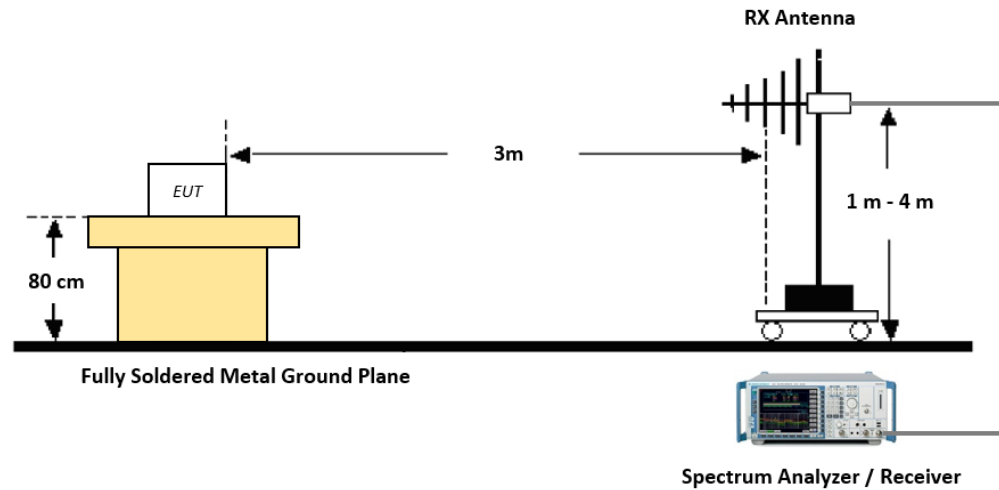

1 GHz - 40 GHz

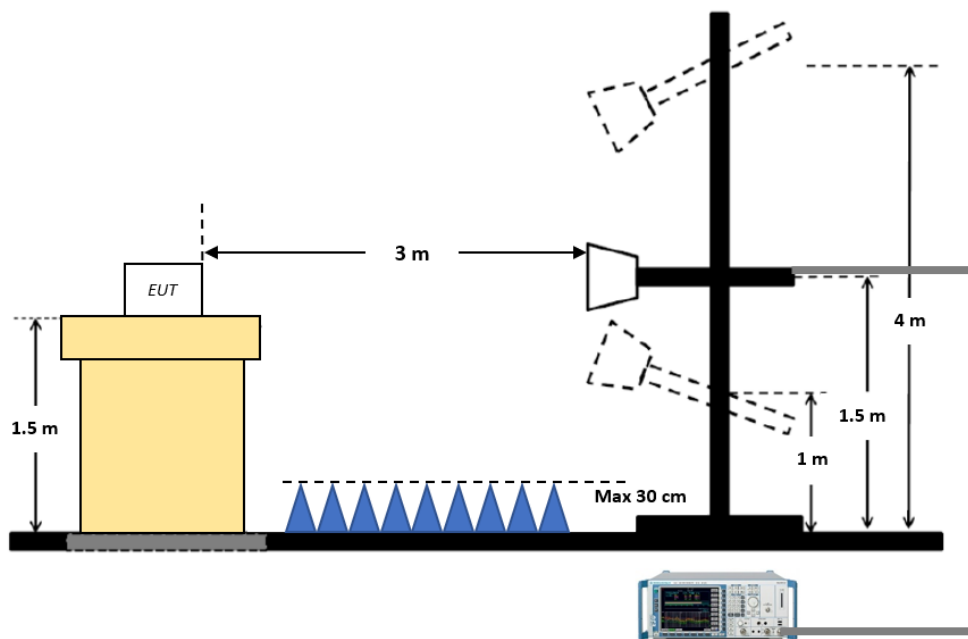

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (BELOW 30 MHz)

Section 8.5 and 8.6 in KDB 558074 D01 v05r02, Subclause 11.11 and 11.12 in ANSI 63.10-2020

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)
10. There is a comparison data both open-field test site and alternative test site – semi-Anechoic chamber according to 414788 D01. And the results are properly calibrated.

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (30 MHz – 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type (Peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

Section 8.5 and 8.6 in KDB 558074 D01 v05r02, Subclause 11.11 and 11.12 in ANSI 63.10-2020

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max hold
- Allow sweeps to continue until the trace stabilizes.
- Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle $\geq$ 98 percent) = VBW $\leq$ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW $\geq$ $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor

10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency (or 40 GHz whichever comes first)

11. Sample Calculation

- (1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)
- (2) Total (Average, Duty $\geq$ 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)
- (3) Total (Average, Duty < 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Duty Cycle Factor

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Spurious Emissions	15.209	RSS-Gen 8.9	Cf. Section 7.1	Radiated	PASS

WORST CASE CONFIGURATION


TEST MODE

Mode	Frequency (MHz)	Channel	Data Rate	PLS
WIFI 2.4 GHz	2 437	6	MCS0	-5
WIFI 5 GHz	5 755	151	MCS0	-4

Note:

- The selected channels are set as the channels where the worst IMD occurs.

TEST CONFIGURATION

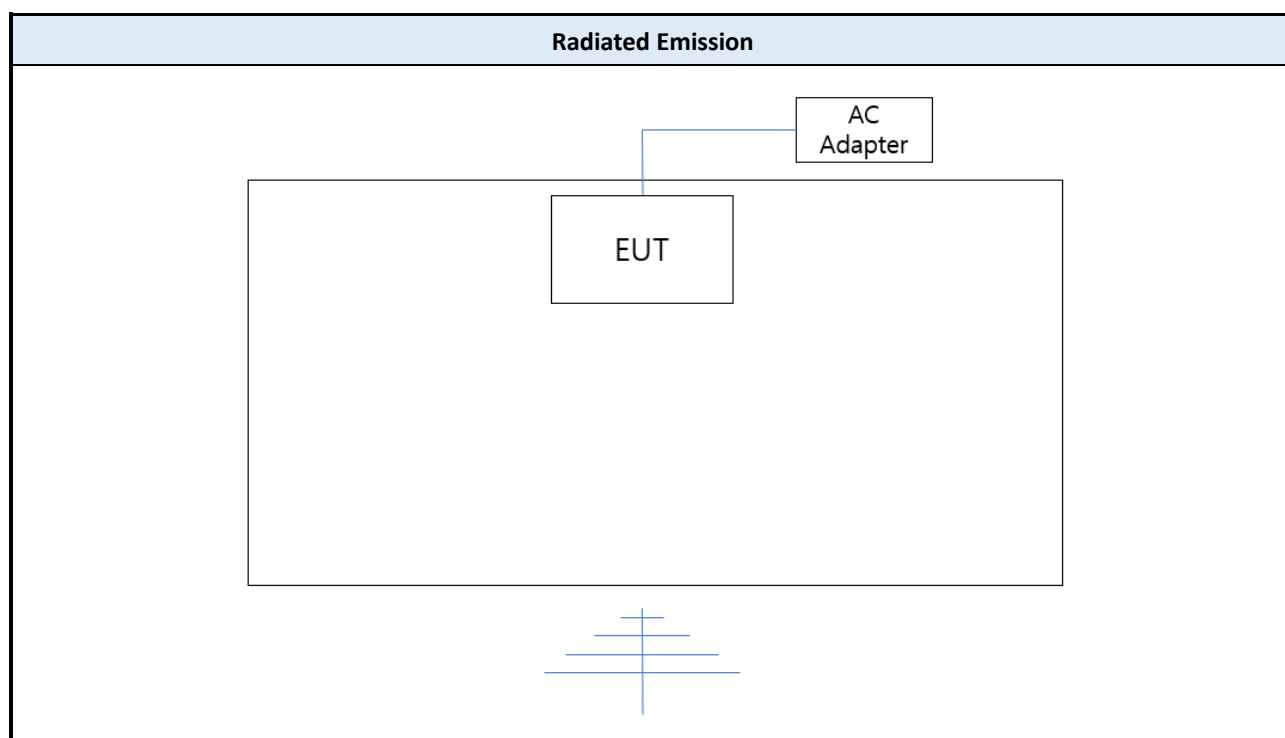

LIST OF SUPPORT EQUIPMENT

Equipment Type	Model No.	Serial No.	Manufacturer	Qty	Note
EUT AC Adapter	AQ27A-59CFA	-	PHIHONG TECH CO LTD	1	

9. TEST RESULT

9.1 RADIATED SPURIOUS EMISSIONS

Frequency Range: Below 1 GHz

Test Mode WIFI 2.4 GHz + WiFi 5 GHz
Operating Frequency 2 437 MHz (CH 6) + 5 755 MHz (CH 151)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks							

Note:

1. Correction Factor: Antenna Factor + Cable loss + Preamplifier Gain

Frequency Range: 1 GHz - 40 GHz

Test Mode WIFI 2.4 GHz + WiFi 5 GHz

Operating Frequency 2 437 MHz (CH 6) + 5 755 MHz (CH 151)


Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)		Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	Duty	AV	PK	AV	PK	AV	PK
3132.227	H	43.09	52.46	-2.41	-	40.68	50.05	54	74	13.32	23.95
3132.391	V	44.31	53.39	-2.47	-	41.84	50.92	54	74	12.16	23.08
4873.845	H	36.76	50.47	0.53	-	37.29	51.00	54	74	16.71	23.00
4875.743	V	36.19	50.32	0.46	-	36.65	50.78	54	74	17.35	23.22
7302.544	V	39.85	53.64	6.59	-	46.44	60.23	54	74	7.56	13.77
7308.339	H	41.05	54.85	6.71	-	47.76	61.56	54	74	6.24	12.44
11510.000	H	54.84	67.76	-5.86	-	48.98	61.90	54	74	5.02	12.10
11510.000	V	58.40	69.41	-5.82	-	52.58	63.59	54	74	1.42	10.41
17239.500	V	51.72	64.98	-5.39	-	46.33	59.59	54	74	7.67	14.41
17257.500	H	55.29	68.69	-5.56	-	49.73	63.13	54	74	4.27	10.87
23025.613	H	73.32	59.97	-10.74	-	62.58	49.23	74	54	11.42	4.77
23026.888	V	70.34	57.76	-10.75	-	59.59	47.01	74	54	14.41	6.99

Note:


1. Correction Factor: Antenna Factor + Cable loss + Preamplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).

TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 90°)

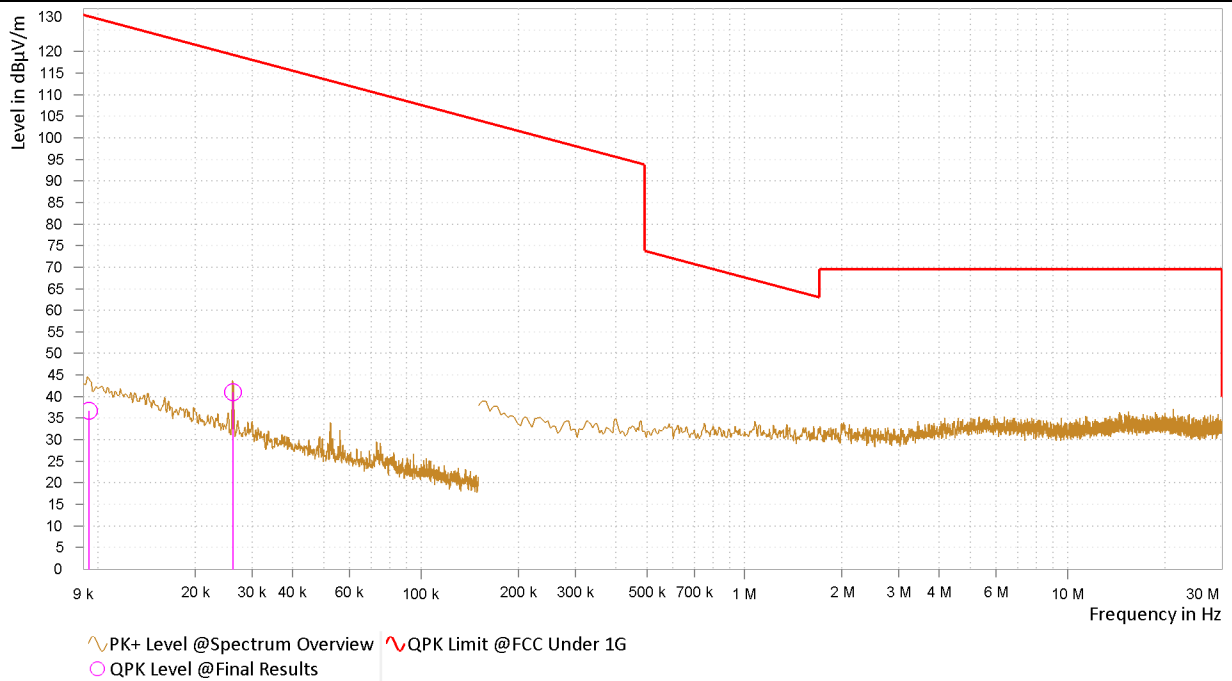

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 180°)

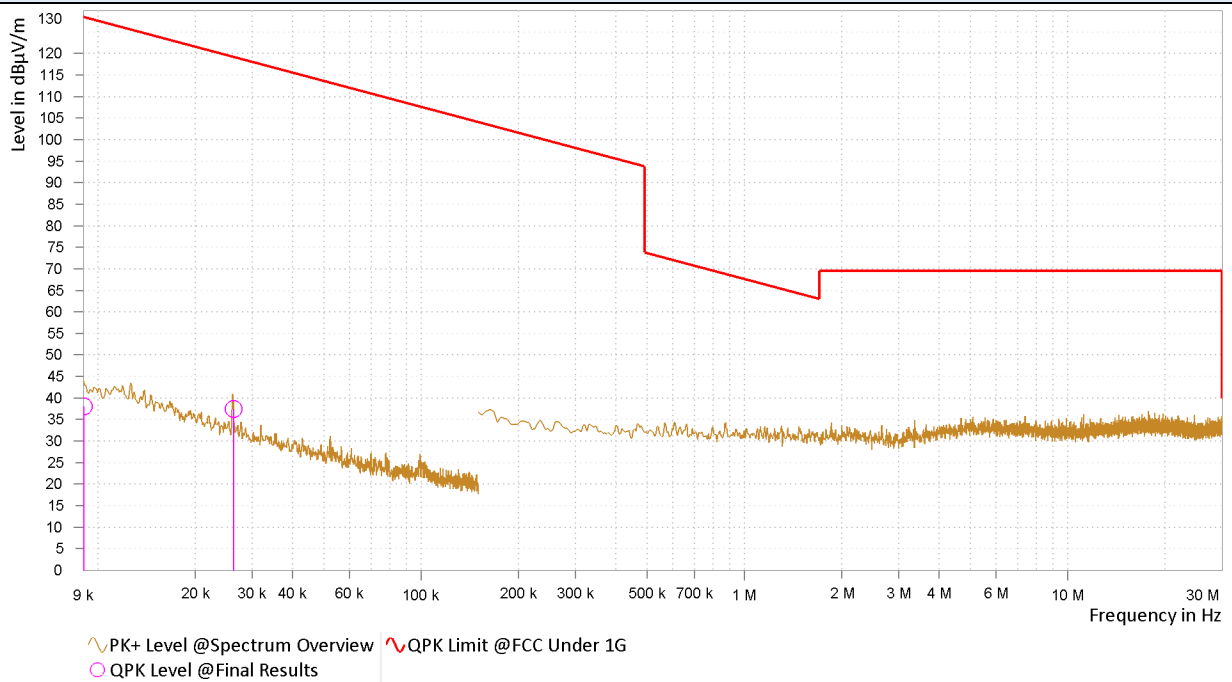


Note:


1. The worst-case plot are included in this report.

TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position Bent Over)

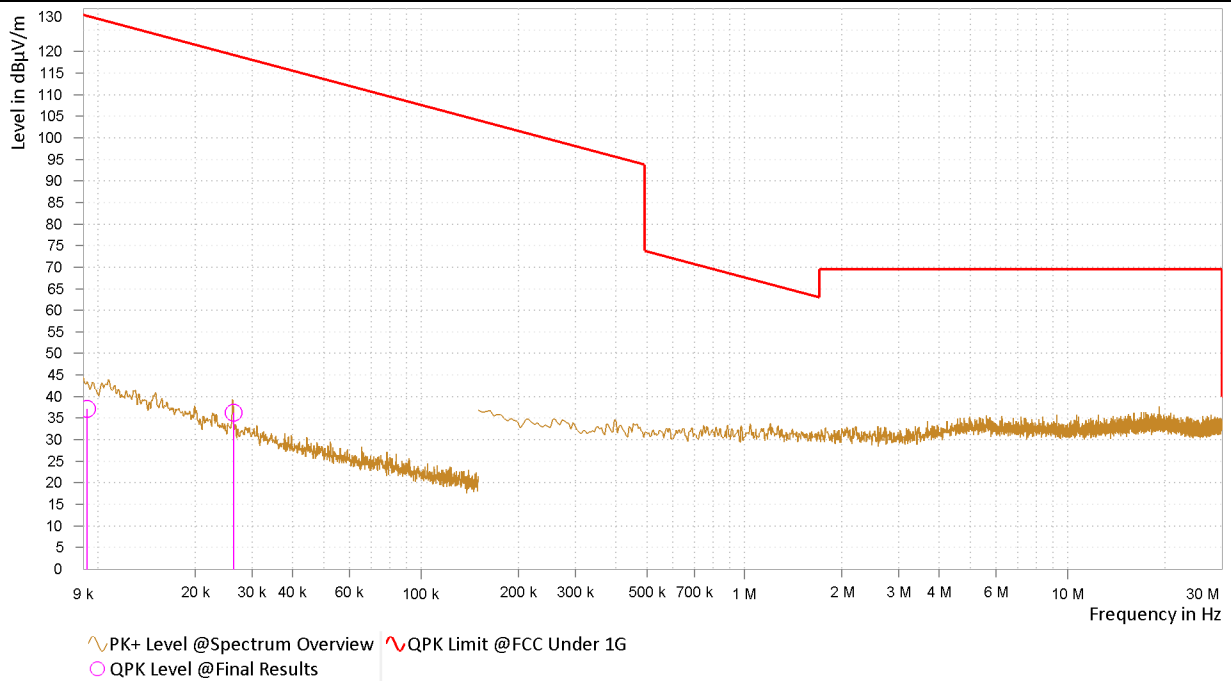


Radiated Spurious Emission 30 MHz – 1 GHz

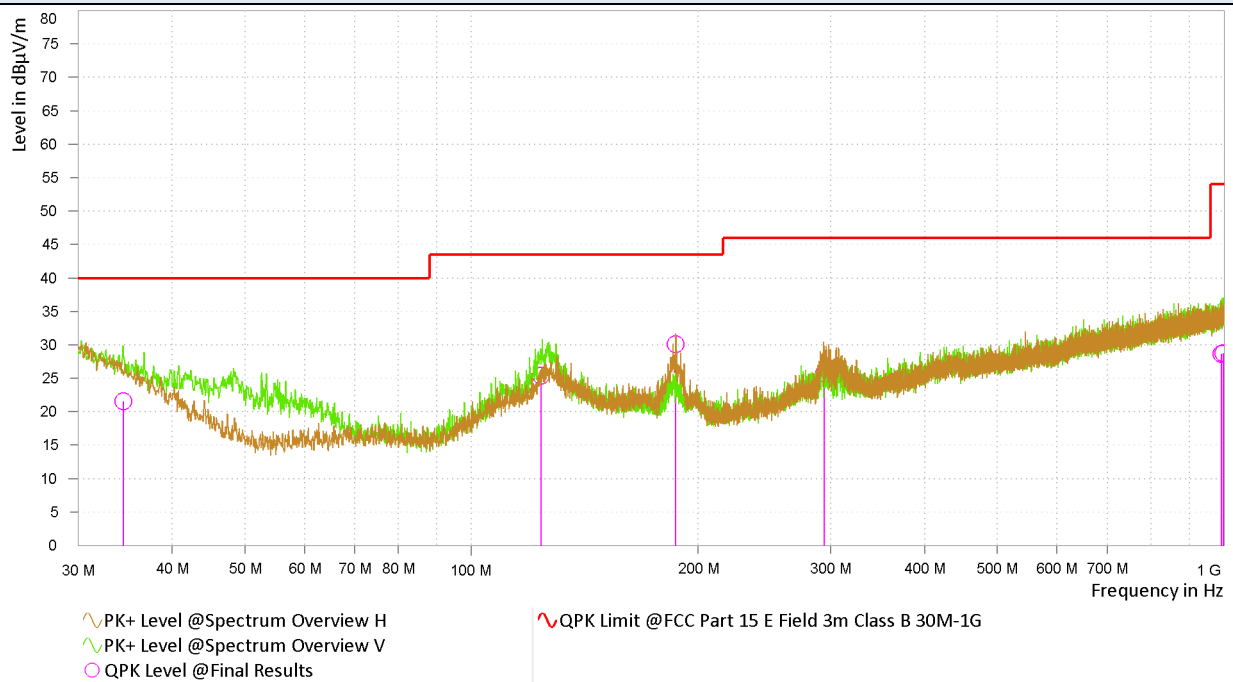

Note:

1. The worst-case plot are included in this report.


TEST PLOTS

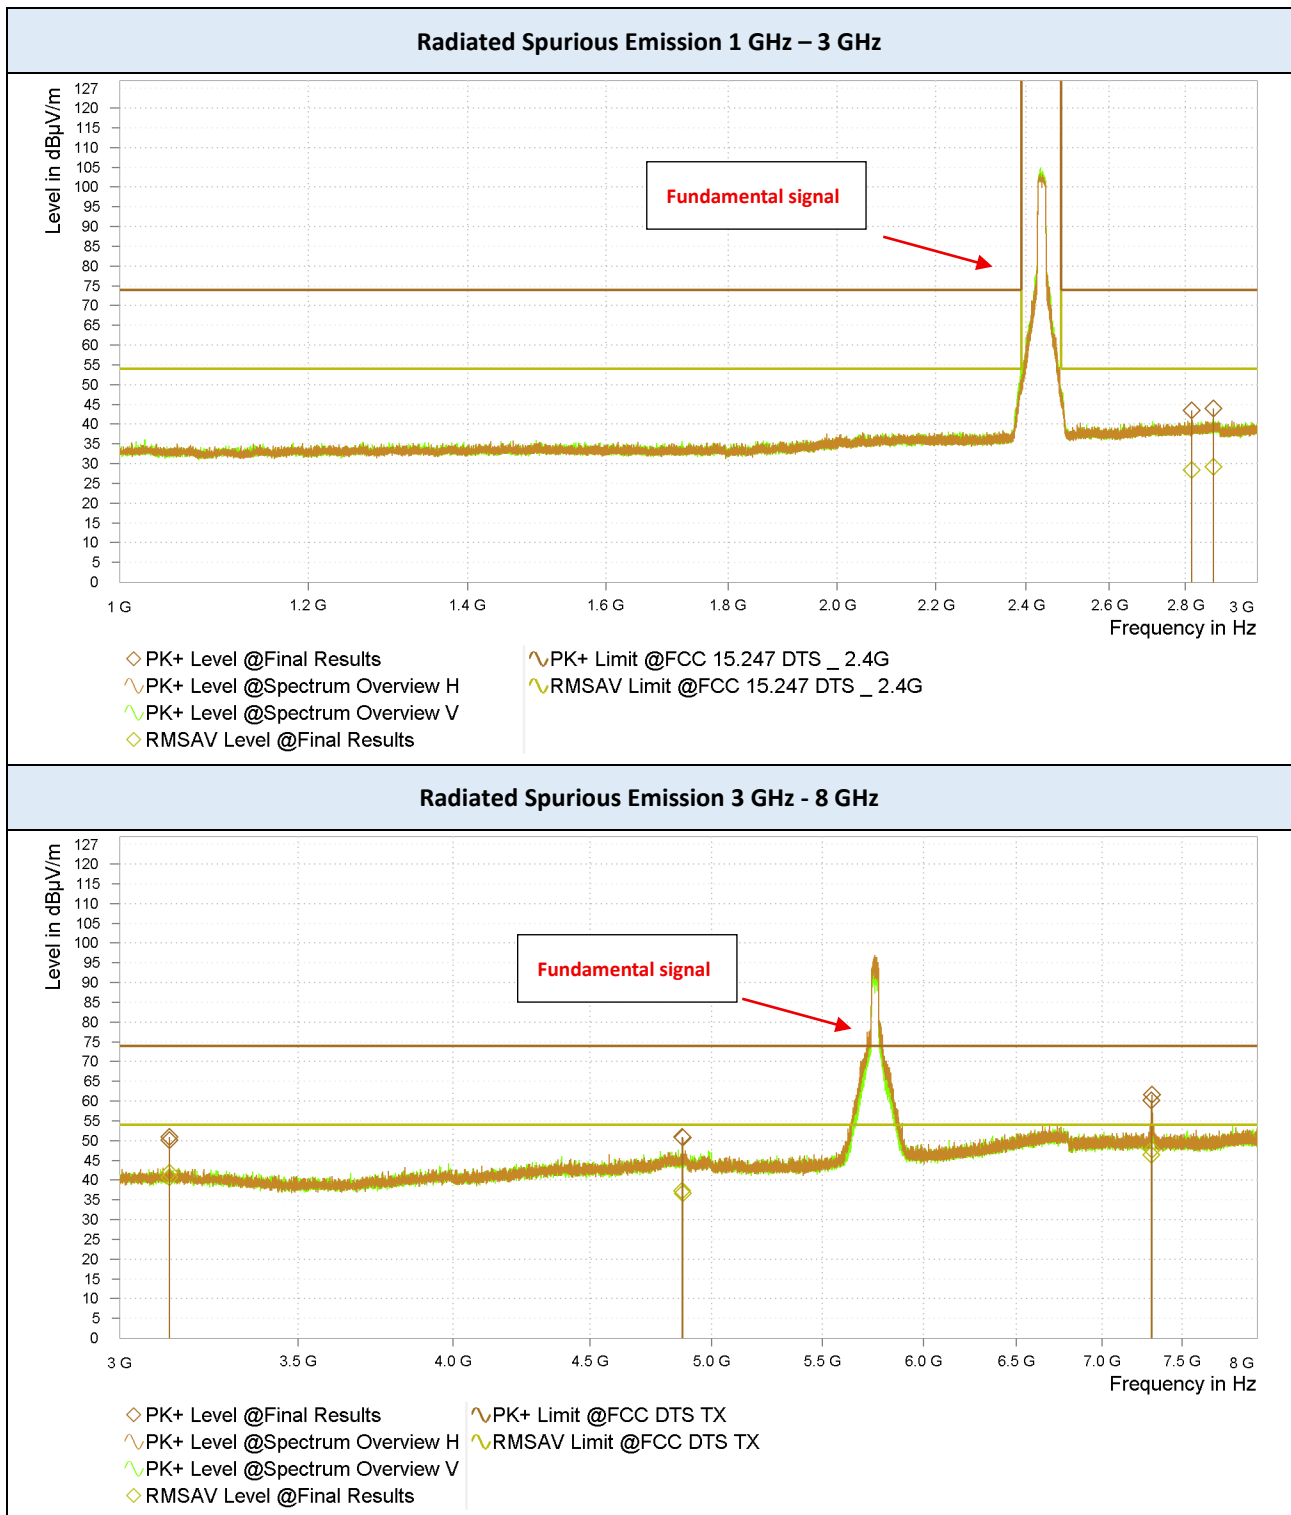

Note:

1. The worst-case plot are included in this report.

TEST PLOTS

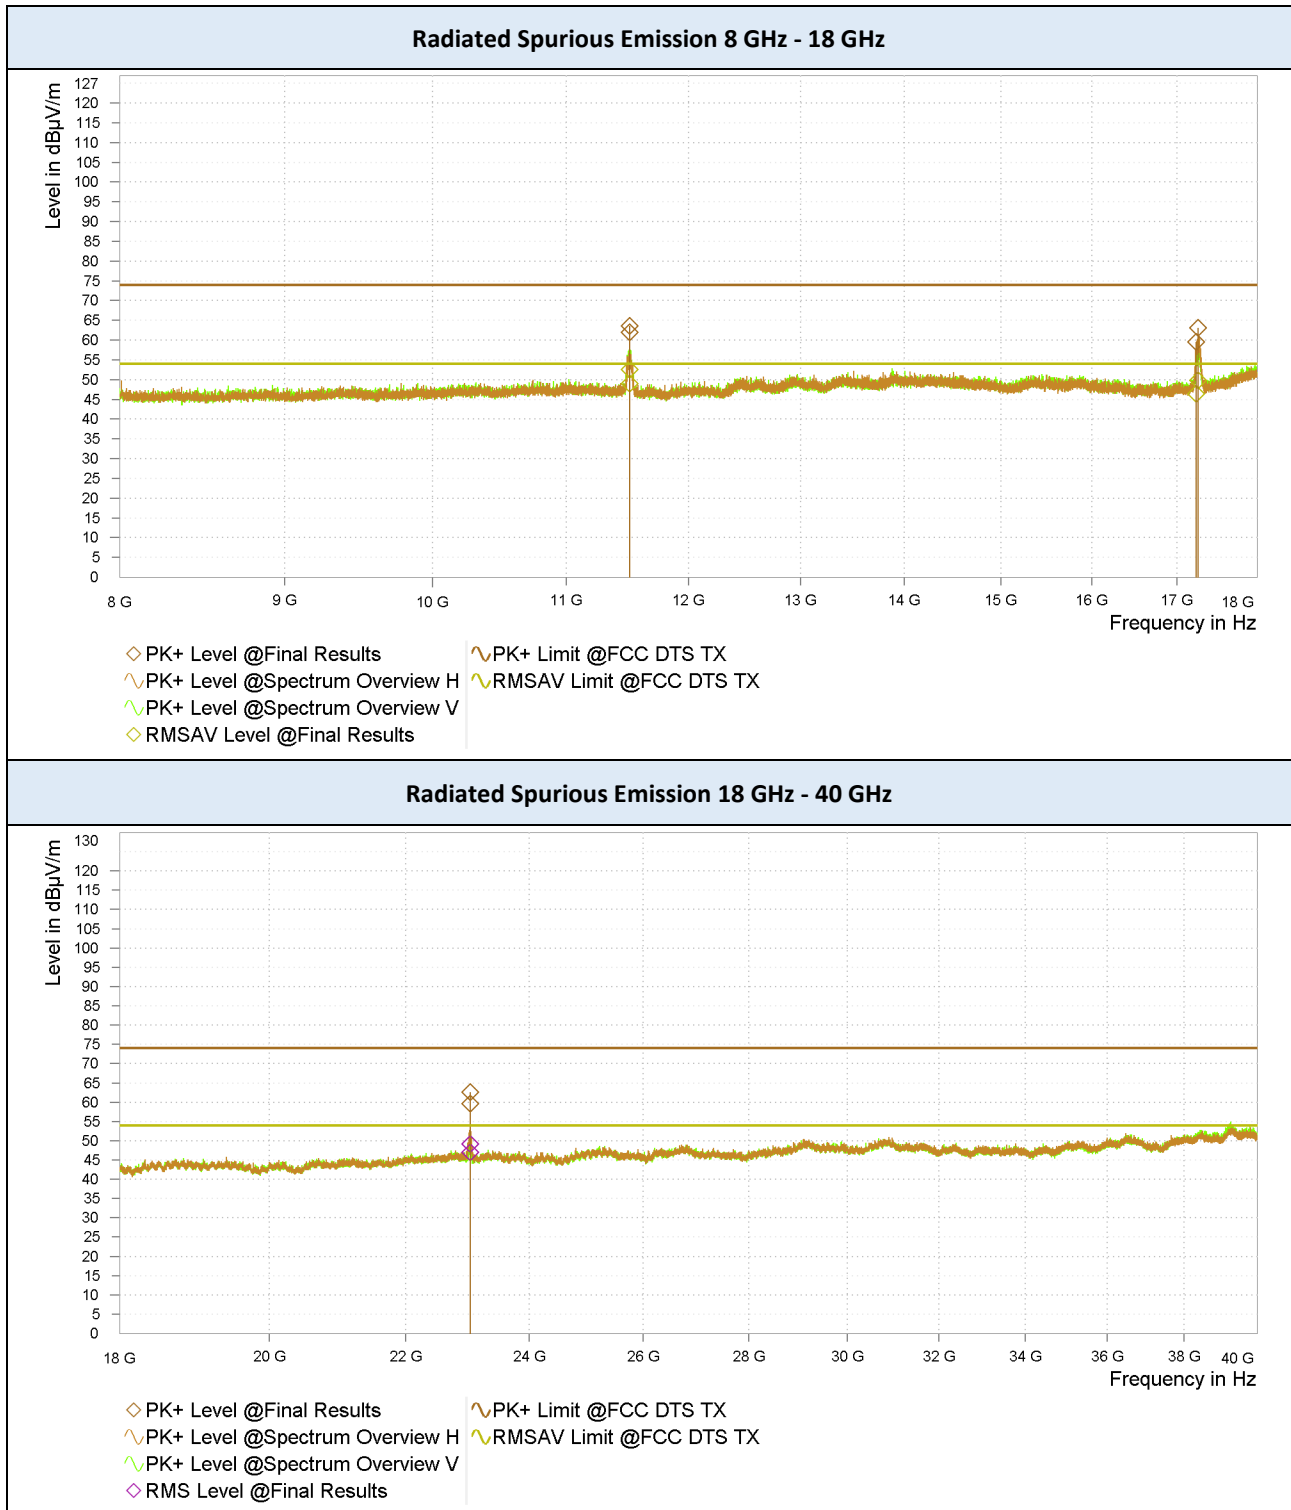

Note:

1. The worst-case plot is included in this report.
2. VBW in pre-scan for 18 GHz – 40 GHz was reduced to 30kHz to better see emissions but was adjusted to 3 MHz in final scan.

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Calibration Due (mm/dd/yy)	Manufacture	Serial No.
☒	Signal Analyzer (1 Hz ~ 40.0 GHz)	ESW44	08/05/2026	Rohde & Schwarz	103176
☒	Loop Antenna (0.009 MHz ~ 30 MHz)	HLA 6121	03/03/2027	TESEQ	43964
☒	BI-LOG Antenna (30 MHz ~ 6 GHz)	JB6	10/22/2026	Sunol	A071116
☒	Horn Antenna (1 GHz ~ 18 GHz)	BBHA 9120 D	07/15/2027	Schwarzbeck	03023
☒	Horn Antenna (15 GHz ~ 40 GHz)	BBHA 9170	01/21/2027	Schwarzbeck	1342
☒	RF Switch Matrix System	HRSMS-VL	01/02/2027	HCT Ltd.	2-51-001
☒	Test Software	R&S®ELEKTRA	-	Rhode & Schwarz	-

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

APPENDIX A. TEST SETUP PHOTOS

The setup photos are provided as a separate document.

APPENDIX B. PHOTOGRAPHS OF EUT

B.1. EXTERNAL PHOTOS

The external photos are provided as separate documents.

B.2. INTERNAL PHOTOS

The internal photos are provided as separate documents.

END OF TEST REPORT