

#01_WLAN2.4GHz_802.11b 1Mbps_Back Slant_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7813; ConvF(7.07, 7.09, 7.65); Calibrated: 2026-05-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2026-06-02
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.474 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.548 W/kg; SAR (10g) = 0.497 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

TSL Correction: Positive only

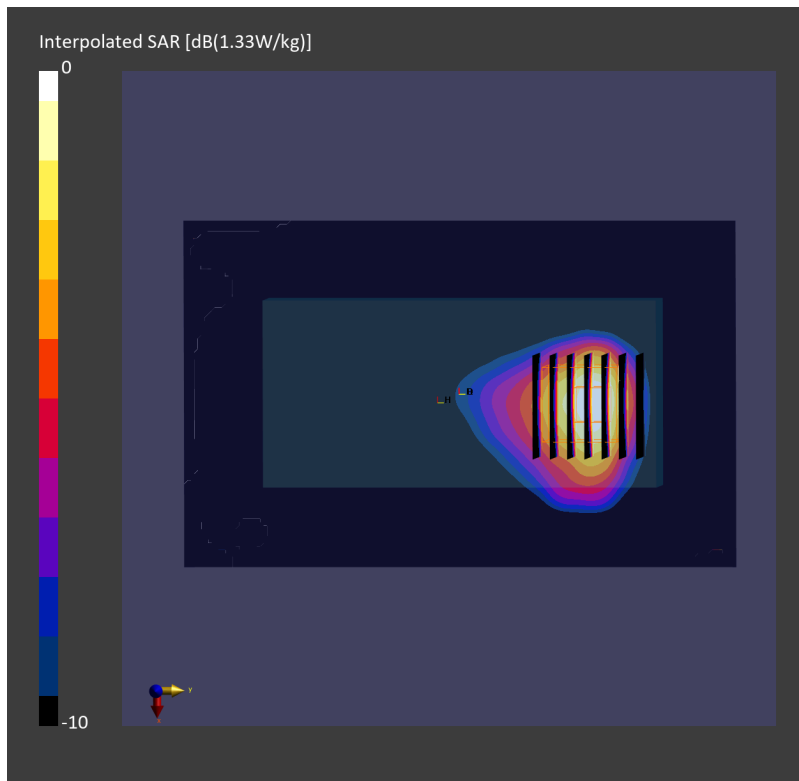

#02_Bluetooth_1Mbps_Back Slant_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7813; ConvF(7.07, 7.09, 7.65); Calibrated: 2026-05-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2026-06-02
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.006 W/kg; SAR (10g) = 0.003 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.004 W/kg; SAR (8g) = 0.002 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

TSL Correction: Positive only

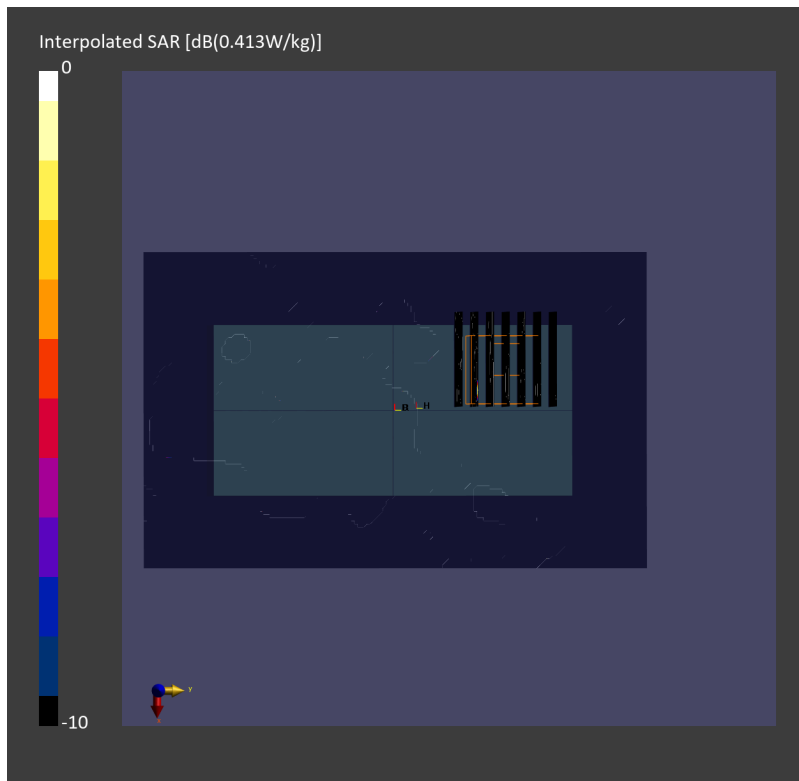

#03_ANT+_Back Slant_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.28, 7.08, 7.07); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1805; Calibrated: 2026-05-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2055_for Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.044 W/kg; SAR (10g) = 0.020 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.043 W/kg; SAR (8g) = 0.022 W/kg; SAR (10g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

