



ELEMENT MATERIALS TECHNOLOGY,
Columbia MD

(formerly PCTEST)
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.381.1520
<http://www.element.com>

MEASUREMENT REPORT
FCC PART 15.247 / ISED RSS-247 802.11b/g/n (OFDM)

Applicant Name:

Garmin International Inc
1200 E. 151st. Street
Olathe, Kansas
United States 66062

Date of Testing:

2/3/2026 - 7/8/2026

Test Report Issue Date:

7/8/2026

Test Site/Location:

Element lab., Columbia, MD, USA
Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1M2606290055-14.IPH

FCC ID:

IPH-A5168

IC:

1792A-A5168

APPLICANT:

Garmin International Inc

Application Type:

Certification

Model/HVIN:

AA5168

EUT Type:

Portable Digital Transceiver

Frequency Range:

2412 – 2472MHz

Modulation Type:

CCK, DSSS, OFDM

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specifications:

RSS-247 Issue 4

FCC Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023

ISED Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice Presiden



FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 1 of 75

TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	7/8/2026	WKR0000005883

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 2 of 75

T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities	6
2.3	Test Configuration	7
2.4	Antenna Description	7
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s) / Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	14
7.1	Summary	14
7.2	6dB Bandwidth & Occupied Bandwidth Measurement	15
7.3	Output Power Measurement.....	29
7.4	Power Spectral Density	31
	Power Spectral Density Measurements.....	33
7.5	Conducted Band Edge Emissions	38
	Conducted Band Edge Emissions	39
7.6	Conducted Spurious Emissions.....	46
7.6.1	Conducted Spurious Emission	48
7.7	Radiated Emission Measurements	57
	Radiated Spurious Emission Measurements	61
	Radiated Restricted Band Edge Measurements	65
7.8	Line-Conducted Test Data.....	68
8.0	CONCLUSION	71
9.0	APPENDIX A – DATA REFERENCING SPOT-CHECKS.....	72

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 3 of 75

MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tx Frequency [MHz]	Ant1			
			Avg. Conducted		Peak Conducted	
			Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11b	2412 - 2472	63.68	18.04	99.08	19.96
	802.11g	2412 - 2472	59.98	17.78	185.35	22.68
	802.11n	2412 - 2472	49.55	16.95	174.58	22.42

EUT Overview

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 4 of 75

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4:2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. (MD)

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered test laboratory with the site description on file with ISSED (Wireless Test Lab number 2451B) and FCC (Designation Number US1113, Test Lab Registration Number 445776).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A. (CA)

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Materials Technology facility is a registered test laboratory with the site description on file with ISSED (Wireless Test Lab number 22831) and FCC (Designation Number US1163).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 5 of 75		

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Garmin Portable Digital Transceiver FCC ID: IPH-A5168, IC: 1792A-A5168**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

This device is a variant device that applies Data Referencing from a parent model approved under FCC ID: IPH-05168. A summary of the referenced data can be found in Section 7.0 and the corresponding data referencing spot-check data can be found in Section 9.0 of this test report.

Test Device Serial No.: 3638074973, 3638074808, 3626419740, 3626419733, 3633608152, 3637869880, 3626419745

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE) / ANT+ / 802.11b/g/n WLAN / NFC

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency / Channel Operations

802.11 Mode/Band		ANT1	
		Duty Cycle [%]	Radiated DCCF [dB]
2.4GHz	b	100.00	N/A
	g	100.00	N/A
	n (HT20)	100.00	N/A

Table 2-2. Measured Duty Cycles

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 6 of 75

1. The device supports the following data rates (shown in Mbps):

802.11b	802.11g	MCS Index	OFDM (802.11n)	
20MHz	20MHz	HT	20MHz	
			0.8μs GI	0.4μs GI
1	6	0	6.5	7.2
2	9	1	13	14.4
5.5	12	2	19.5	21.7
11	18	3	26	28.9
	24	4	39	43.3
	36	5	52	57.8
	48	6	58.5	65
	54	7	65	72.2

Table 2-3. Supported Data Rates

2.3 Test Configuration

ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.8 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be Y-orientation (landscape).

EUT was configured to operate at a 100% duty cycle using software provided by the customer.

2.4 Antenna Description

The manufacturer provided the antenna gains which can affect the validity of test results used for determination of compliance. The following antenna gains are used in this device provided by the client.

Frequency [GHz]	Antenna-1 Gain [dBi]
2.4	-3.30

Table 2-4. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with software/firmware version 4.20 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 7 of 75

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 8 of 75		

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4:2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4:2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 9 of 75

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 10 of 75

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz-1GHz)	4.96
Radiated Disturbance (1-18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

Table 5-2. Measurement Uncertainty Budget – CA

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 11 of 75

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	MD 1M 40	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	MD 1M 40
-	AP2-001	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-001
-	AP2-002	EMC Cable and Switch System	1/30/2026	Annual	1/30/2027	AP2-002
-	WL25-1	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	1/30/2026	Annual	1/30/2027	WL25-2
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	11676
Keysight Technologies	N9038A	MXE EMI Receiver	11/10/2025	Annual	11/10/2026	MY51210133
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	11/10/2025	Annual	11/10/2026	MY57141001
Keysight Technologies	N9030A	PXA Signal Analyzer	11/3/2025	Annual	11/3/2026	MY54490576
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/30/2026	Annual	1/30/2027	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	12/19/2026	Annual	12/19/2026	100342
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	ENV216	Two-Line V-Network	2/4/2026	Biennial	2/4/2028	101379
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	6/1/2026	Biennial	6/1/2028	101058
Schwarzbeck	VULB9162	Bilog Antenna	6/4/2025	Biennial	6/4/2027	301

Table 6-1. Test Equipment Calibration Table – MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	7/7/2025	Biennial	7/7/2027	MY56470202
Anritsu	ML2496A	Power Meter	4/6/2026	Annual	4/6/2027	1351001
Anritsu	MA2411B	Pulse Power Sensor	4/6/2026	Annual	4/6/2027	1315051
Anritsu	MA2411B	Pulse Power Sensor	7/3/2025	Annual	7/3/2026	1726261
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/31/2026	Annual	3/31/2027	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Horn (1-18 GHz)	4/21/2026	Annual	4/21/2027	218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Keysight Technology	N9040B	UXA Signal Analyzer	6/9/2025	Annual	6/9/2026	MY60080210
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	8/5/2025	Annual	8/5/2026	104093
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	7/3/2025	Annual	7/3/2026	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/26/2025	Annual	6/26/2026	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	8/18/2025	Annual	8/18/2026	101363
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	7/17/2025	Annual	7/17/2026	00302

Table 6-2. Test Equipment Calibration Table – CA

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that have been internally verified/calibrated.

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable TM40-K1K1-30	20233002 004
Uniflex Micro Coax UFB 142A-Q-0984-200200	64639 232063 001
R&S TS-PR1840	9037.7670.02

Table 6-3. MD 1M 18-40 EMC Cable and Switch System Components

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 12 of 75

Component	Serial Number
Flex Cable	P2A-0001
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Chamber Passthrough	CP4/X12
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 6463	232069-001
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181

Table 6-4. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 6-5. AP2-002 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable, Model: TM26-S1S1-30	20929201 004
Pasternack 6dB Attenuator, Model: PE7005-6	N/A

Table 6-6. WL25-1 Conducted Cable Set Components

Component	Serial Number
Mini-Circuits Cable, Model: CBL-2FT-SMSM+	77743
MCL 6dB Attenuator, Model: BW-S6W2+	1314

Table 6-7. WL25-2 Conducted Cable Set Components

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 13 of 75

7.0 TEST RESULTS

7.1 Summary

Company Name: Garmin International Inc
 FCC ID: IPH-A5168
 IC: 1792A-A5168
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	Test Lab Location	Data Referencing
15.247(a)(2)	RSS-247 [6.3.1(a)]	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2	CA	Yes
15.247(b)(3)	RSS-247 [6.3.2]	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3	MD	Yes
N/A	RSS-247 [6.3.2]	e.i.r.p.	shall not exceed 4 W		PASS	Section 7.3	MD	Yes
15.247(e)	RSS-247 [6.3.1(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4	CA	Yes
15.247(d)	RSS-247 [6.6]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Section 7.5, 7.6	CA & MD	Yes
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7	MD	Yes
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	LINE CONDUCTED	PASS	Section 7.8	MD	No

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.7.7.
- 6) Data was referenced from model A05168 for the certification of AA5168. See Section 9.0 for spotcheck results.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 14 of 75		

7.2 6dB Bandwidth & Occupied Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure Used

ANSI C63.10:2020 – Section 11.8.2

Test Settings - 6dB Bandwidth

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Settings - Occupied Bandwidth

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 15 of 75

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 16 of 75		

6dB Bandwidth Measurements


Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	b	1Mbps	10.07	0.50	Pass
2437	6	b	1Mbps	10.07	0.50	Pass
2462	11	b	1Mbps	10.09	0.50	Pass
2412	1	g	6Mbps	16.57	0.50	Pass
2437	6	g	6Mbps	16.61	0.50	Pass
2462	11	g	6Mbps	16.58	0.50	Pass
2412	1	n	MCS0	17.68	0.50	Pass
2437	6	n	MCS0	17.67	0.50	Pass
2462	11	n	MCS0	17.69	0.50	Pass

Table 7-2. Conducted Bandwidth Measurements

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 17 of 75

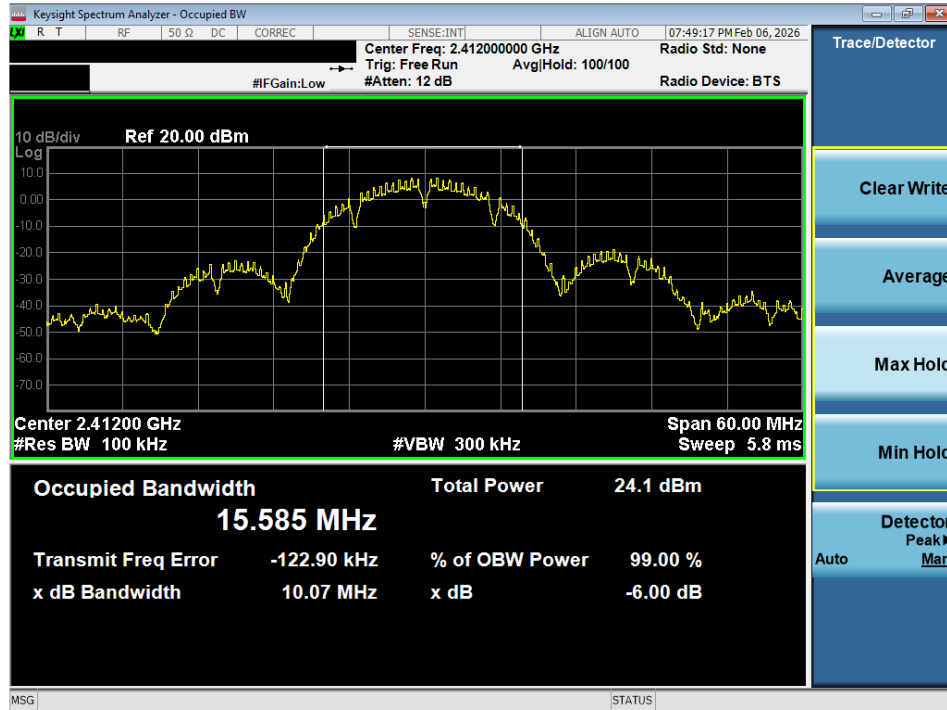


Plot 7-1 6dB BW (20MHz BW 802.11b - Ch.1)

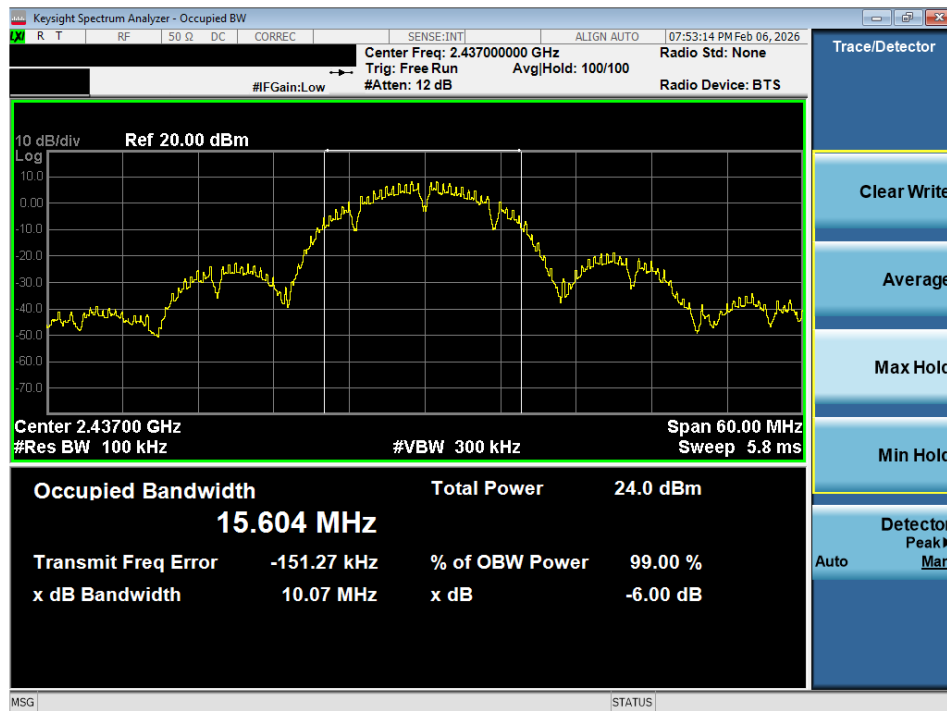


Plot 7-2 6dB BW (20MHz BW 802.11b - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 18 of 75

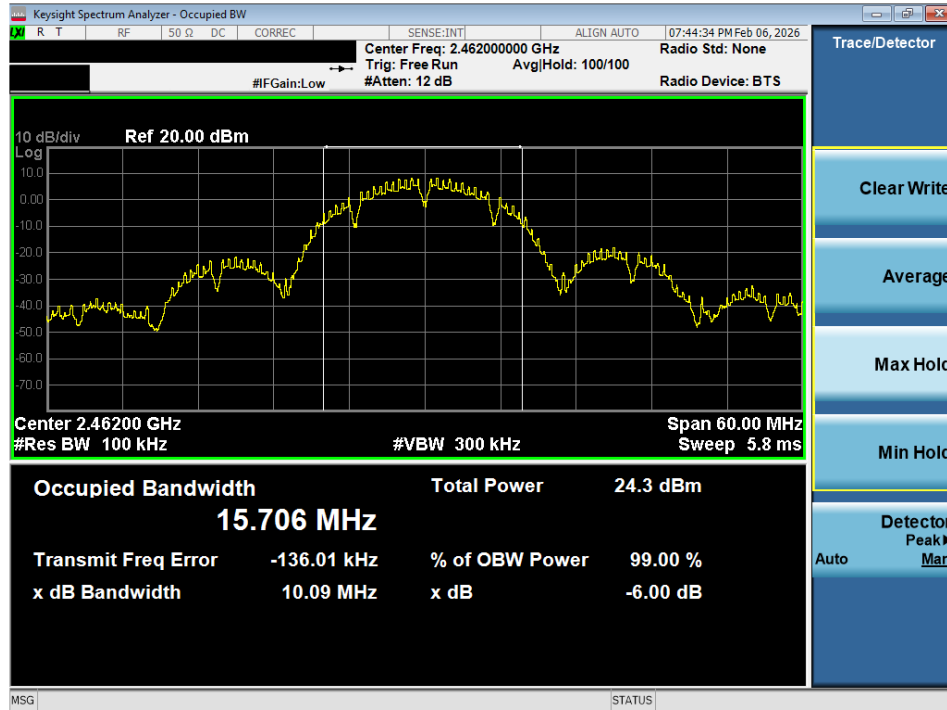


Plot 7-3 6dB BW (20MHz BW 802.11b - Ch.11)

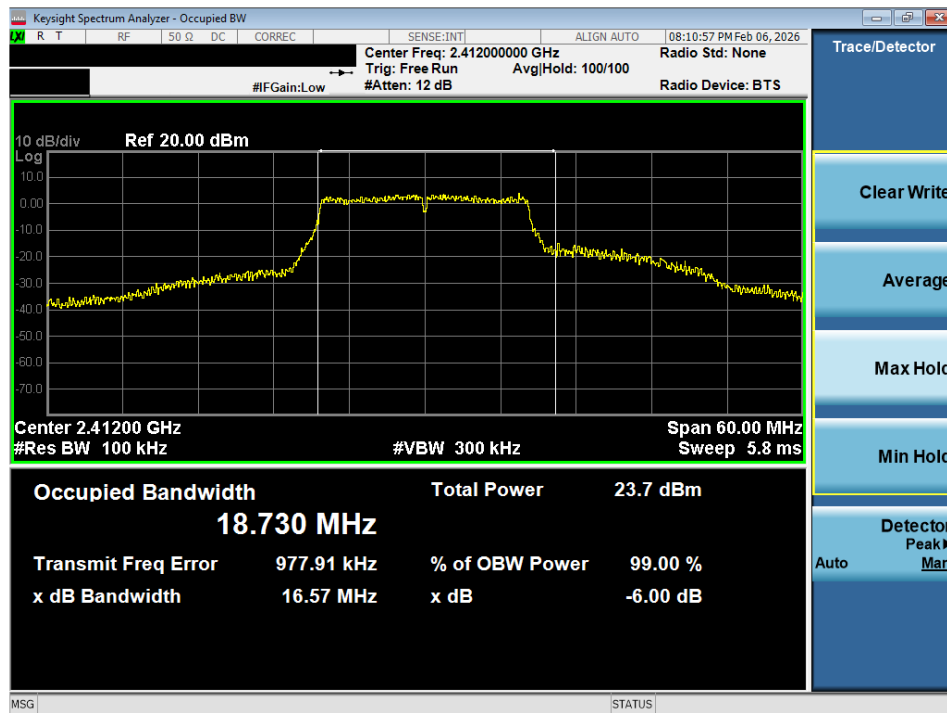


Plot 7-4 6dB BW (20MHz BW 802.11g - Ch.1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 19 of 75

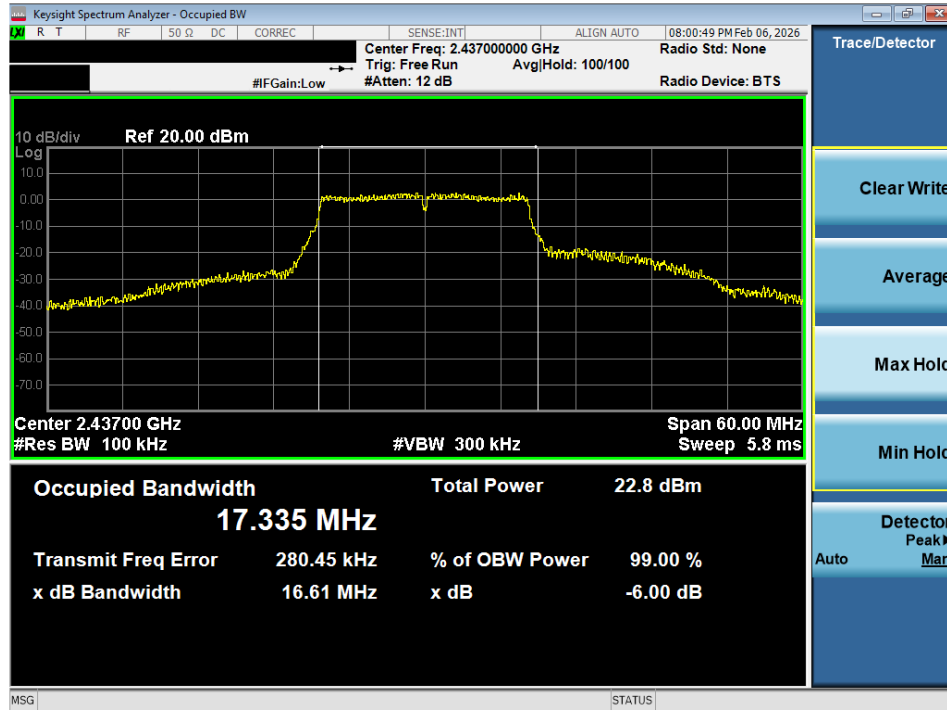


Plot 7-5 6dB BW (20MHz BW 802.11g - Ch.6)

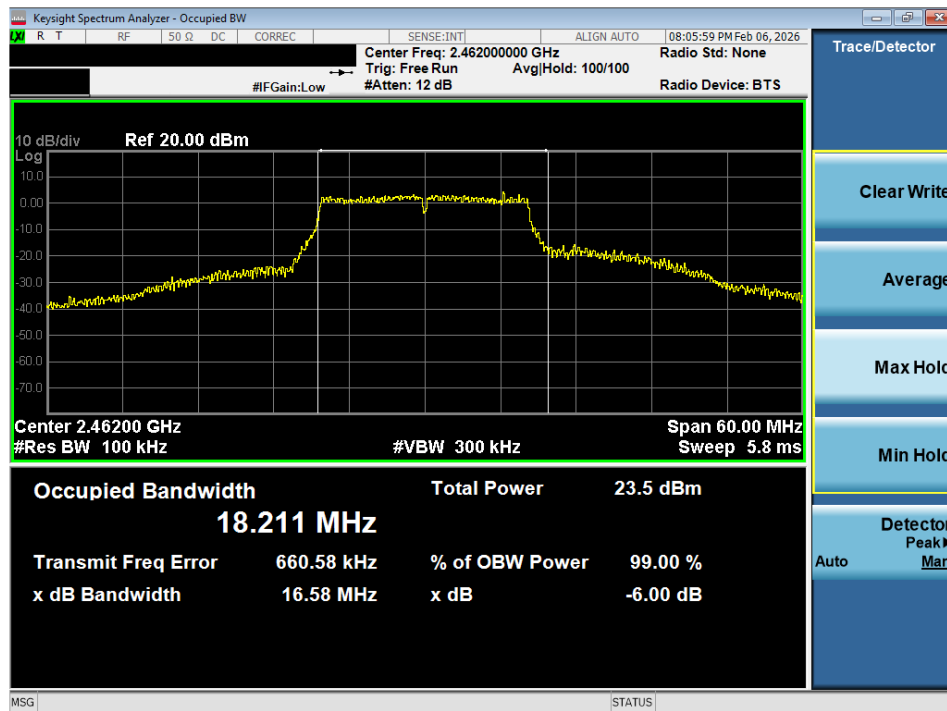


Plot 7-6 6dB BW (20MHz BW 802.11g - Ch.11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 20 of 75

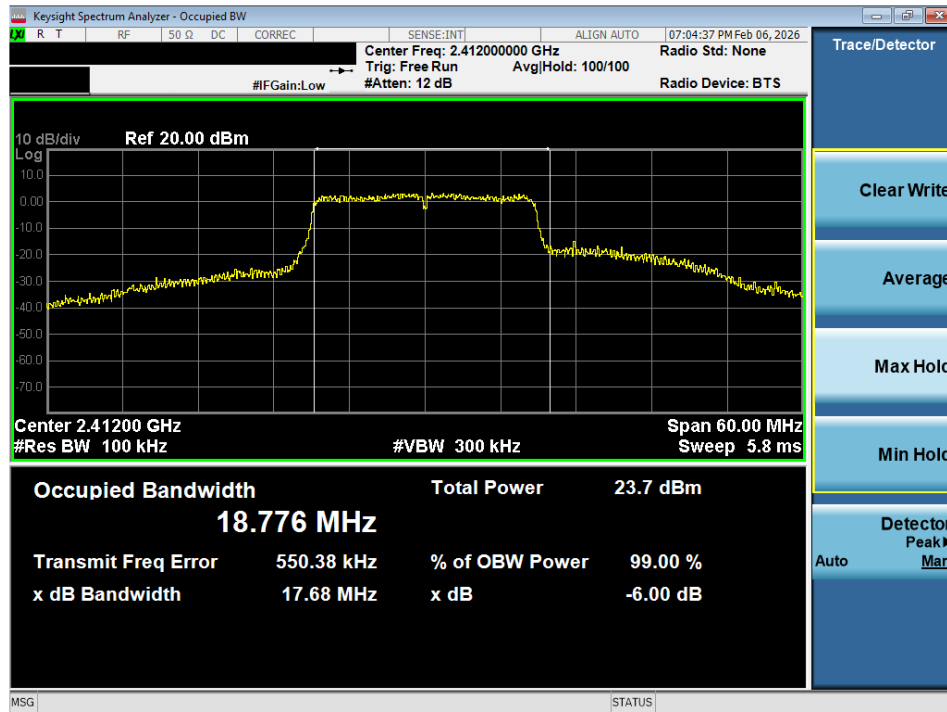


Plot 7-7 6dB BW (20MHz BW 802.11n - Ch.1)

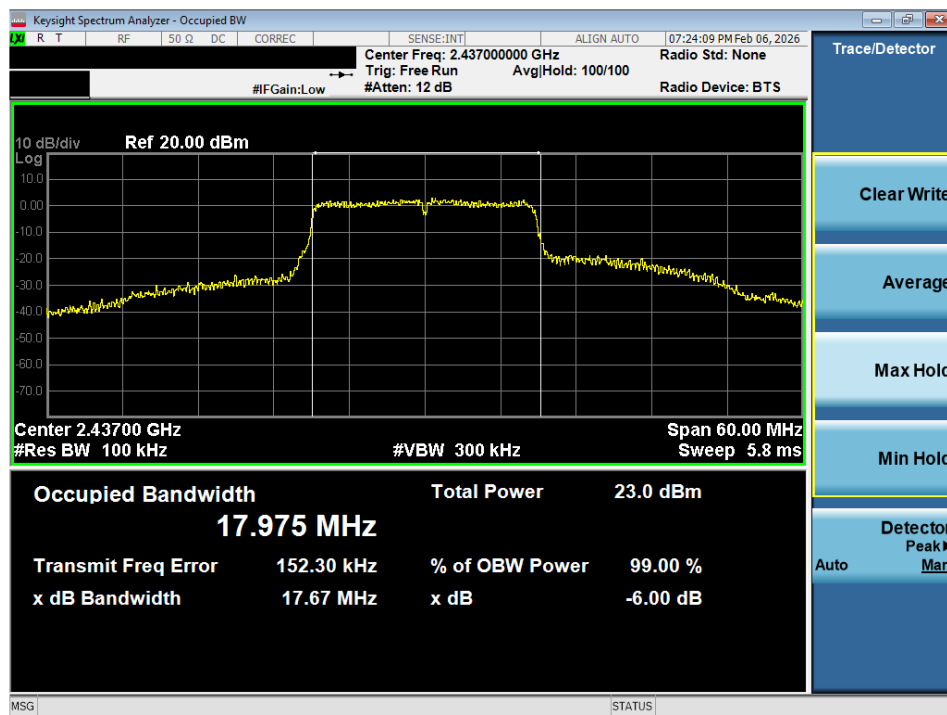

Plot 7-8 6dB BW (20MHz BW 802.11n - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 21 of 75

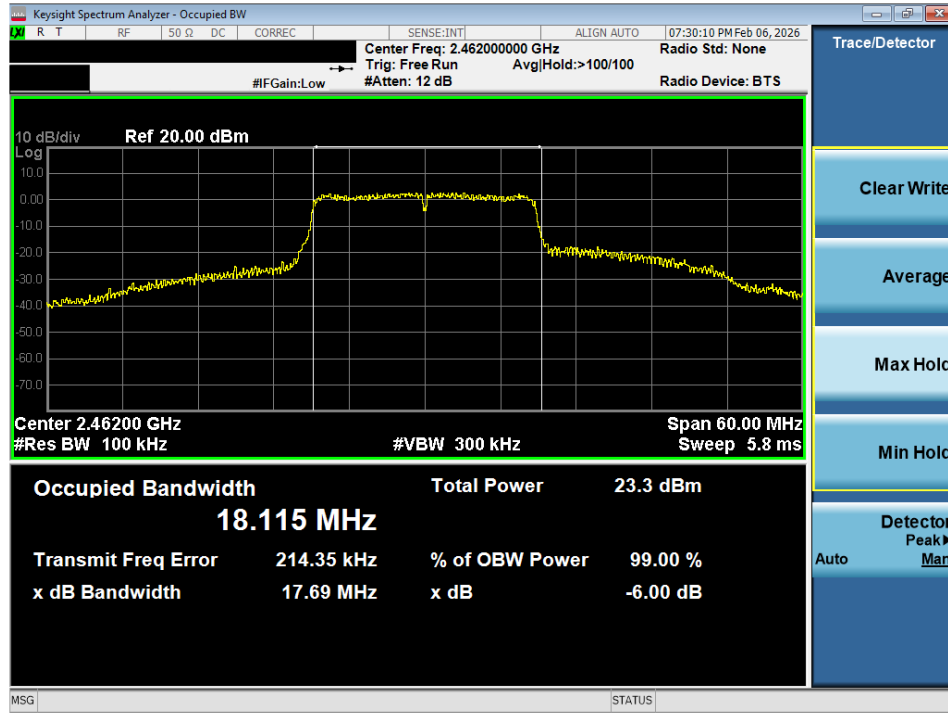

Plot 7-9 6dB BW (20MHz BW 802.11n - Ch.11)


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 22 of 75

OBW Measurements


Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	b	1Mbps	15.67
2437	6	b	1Mbps	15.71
2462	11	b	1Mbps	15.82
2412	1	g	6Mbps	20.34
2437	6	g	6Mbps	20.38
2462	11	g	6Mbps	20.27
2412	1	n	MCS0	19.95
2437	6	n	MCS0	18.51
2462	11	n	MCS0	18.92

Table 7-3. Conducted Bandwidth Measurements

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 23 of 75

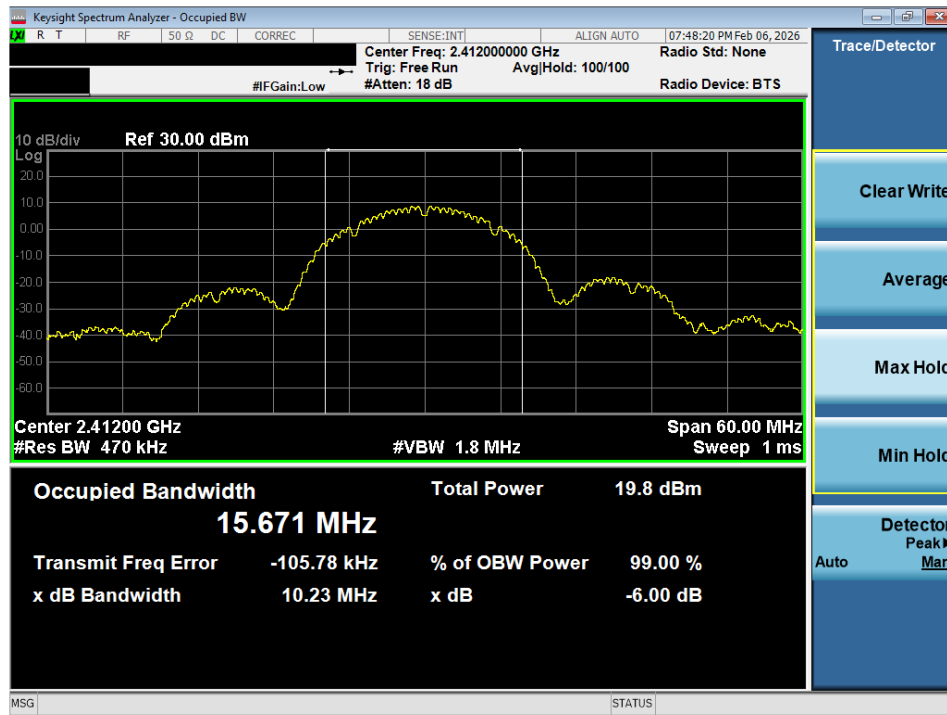

Plot 7-10 99% OBW Plot (20MHz BW 802.11b - Ch.1)

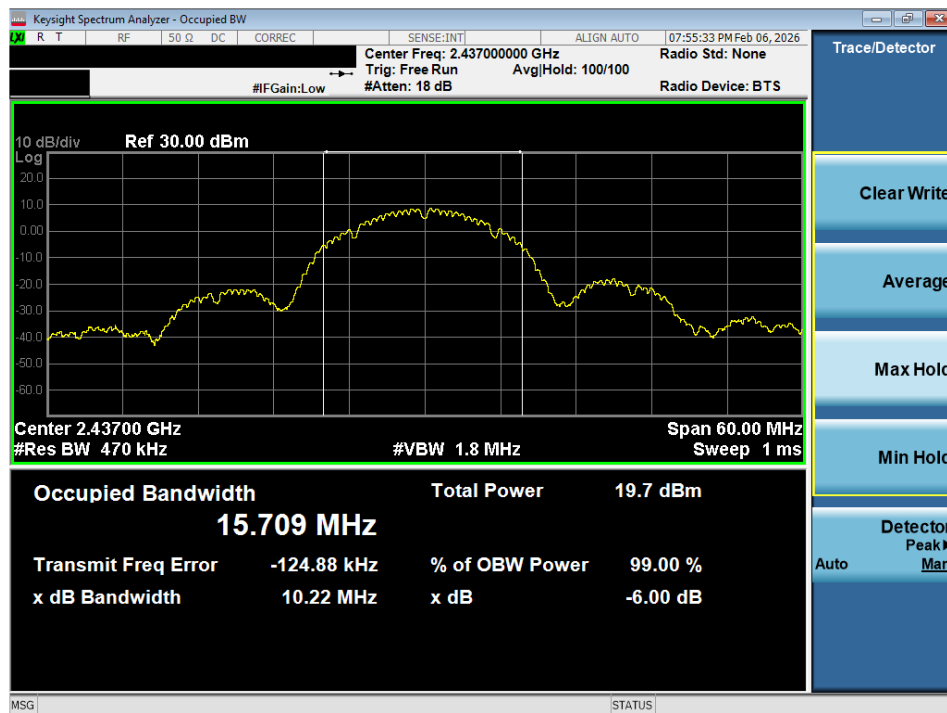


Plot 7-1 99% OBW Plot (20MHz BW 802.11b - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 24 of 75




Plot 7-11 99% OBW Plot (20MHz BW 802.11b - Ch.11)

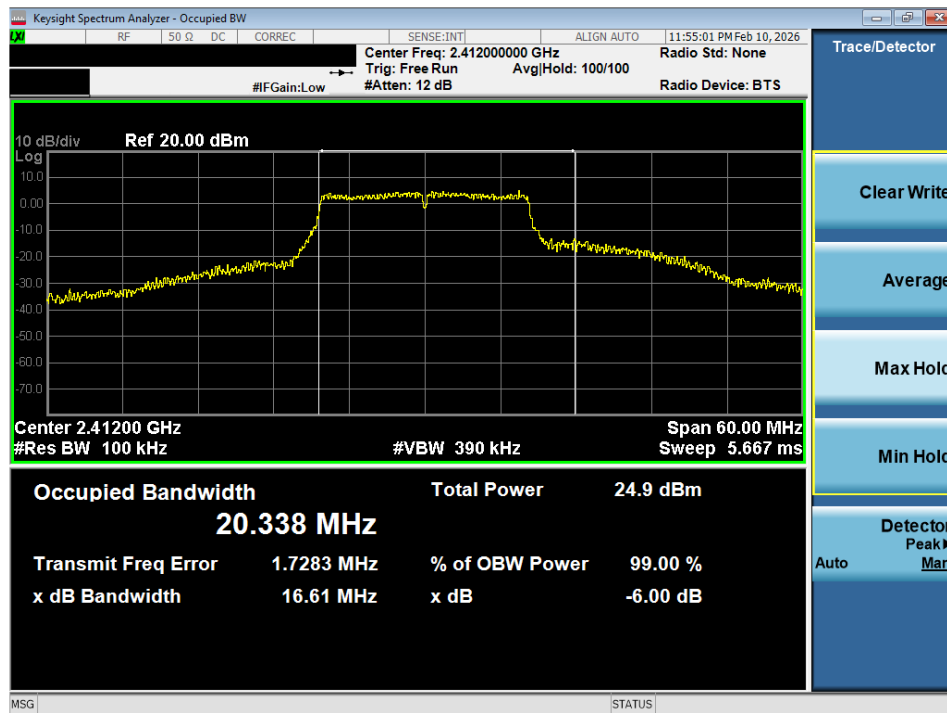


Plot 7-12 99% OBW Plot (20MHz BW 802.11g - Ch.1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 25 of 75

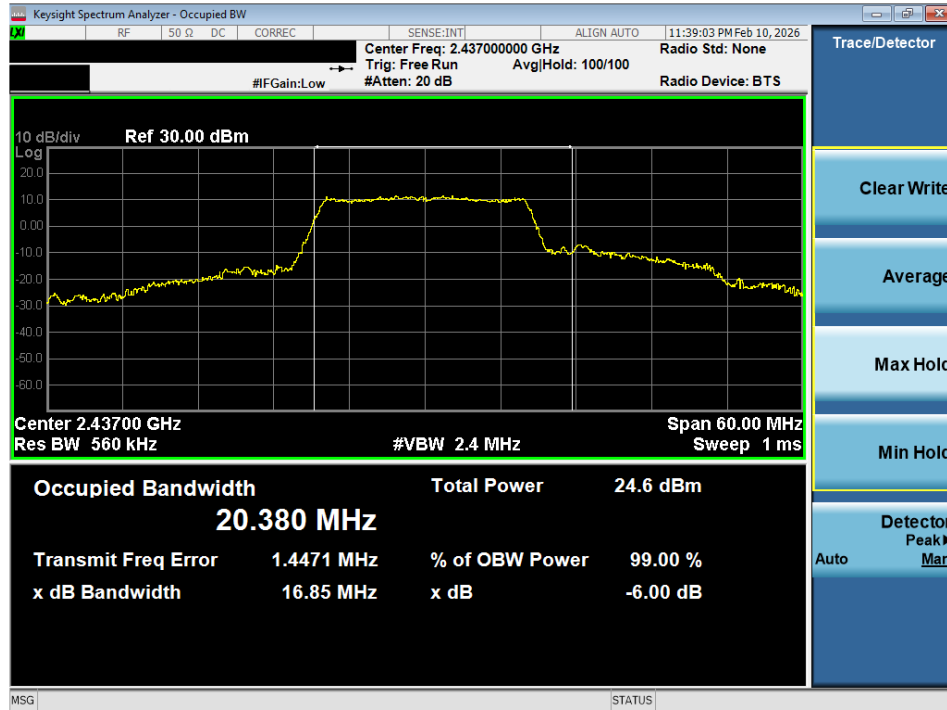


Plot 7-13 99% OBW Plot (20MHz BW 802.11g - Ch.6)

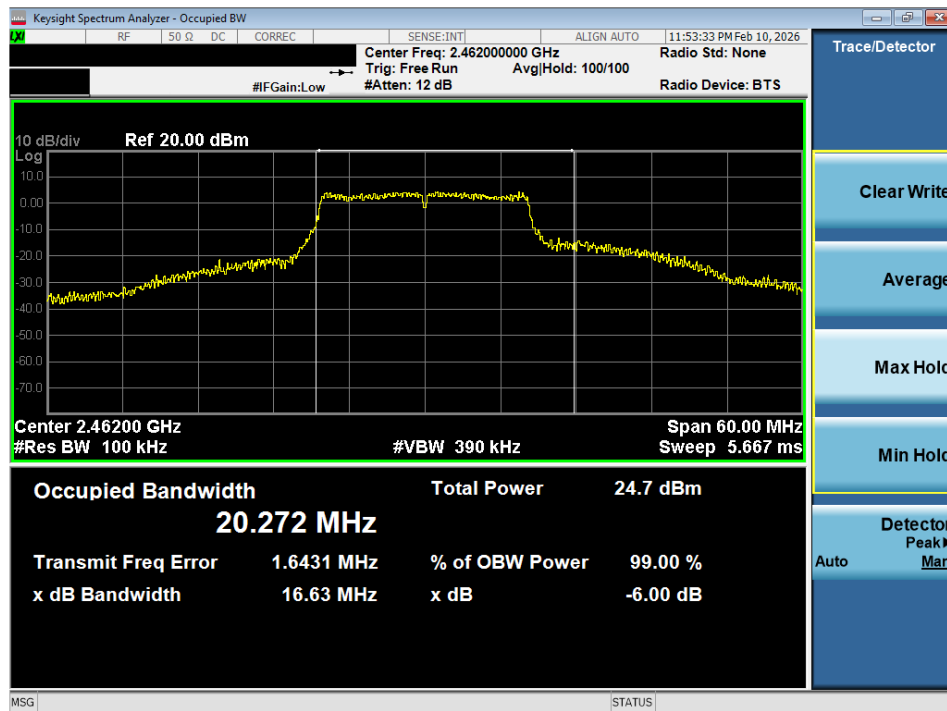


Plot 7-14 99% OBW Plot (20MHz BW 802.11g - Ch.11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 26 of 75

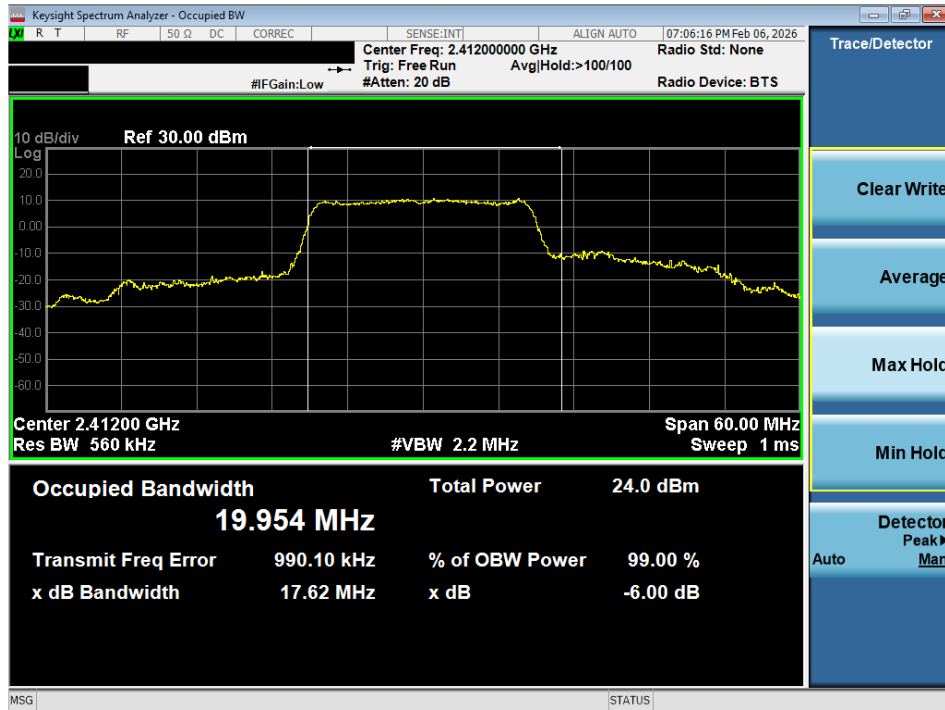


Plot 7-15 99% OBW Plot (20MHz BW 802.11n - Ch.1)

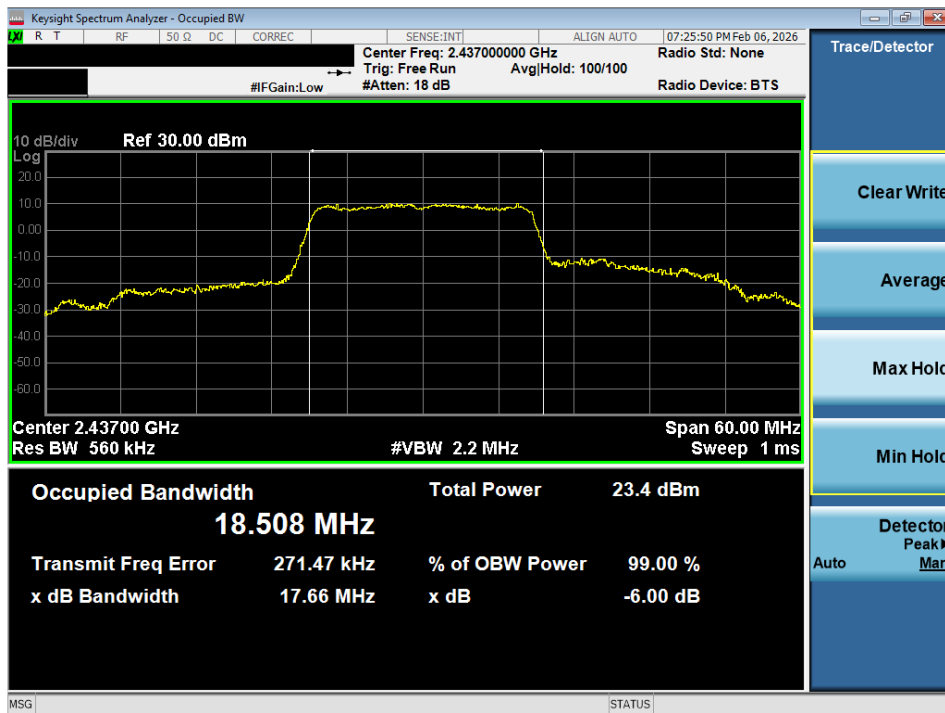

Plot 7-16 99% OBW Plot (20MHz BW 802.11n - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 27 of 75

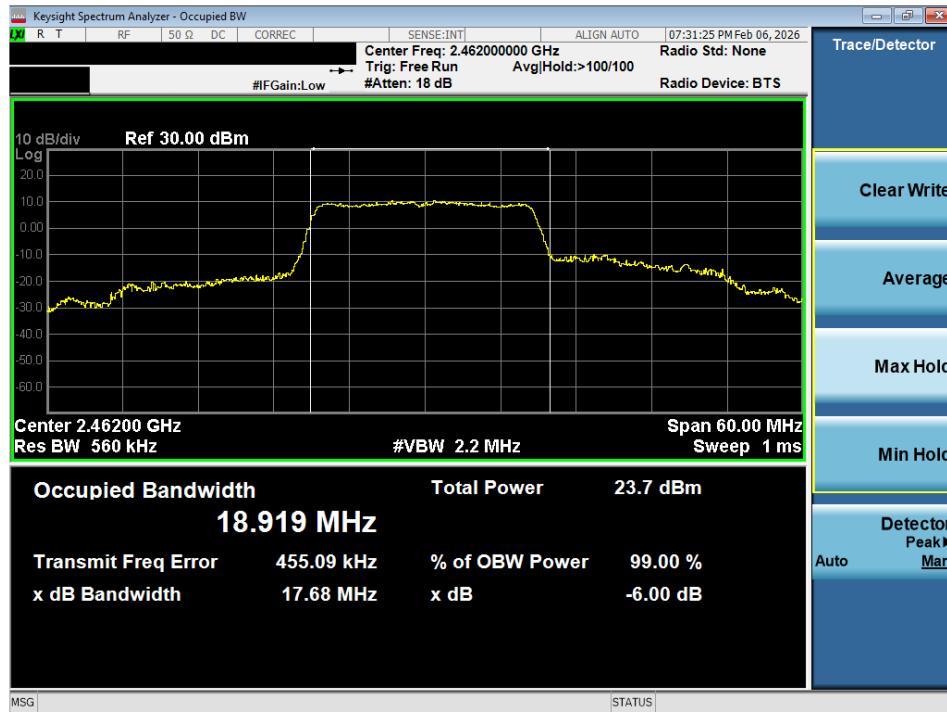

Plot 7-17 99% OBW Plot (20MHz BW 802.11n - Ch.11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 75

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247. The e.i.r.p. shall not exceed 4 W per RSS-247.

Test Procedure Used

ANSI C63.10:2020 – Section 11.9.1.2 PKPM1 Peak Power Method
ANSI C63.10:2020 – Section 11.9.2.3.2 Method AVGPM

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

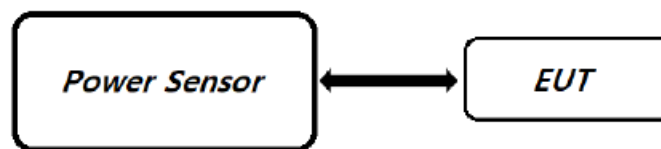


Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

PLS is the power level setting set in the customer provided software to obtain the measured powers.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 29 of 75

2.4GHz WIFI (20MHz 802.11b SISO ANT1)					Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]	PLS						
2412	1	Average	17.90	42.0	30.00	-12.10	-3.30	14.60	36.02	-21.42
2437	6		18.04	42.0	30.00	-11.96	-3.30	14.74	36.02	-21.28
2452	9		17.88	42.0	30.00	-12.12	-3.30	14.58	36.02	-21.44
2457	10		17.65	33.0	30.00	-12.35	-3.30	14.35	36.02	-21.67
2462	11		16.86	31.0	30.00	-13.14	-3.30	13.56	36.02	-22.46
2467	12		14.09	25.0	30.00	-15.91	-3.30	10.79	36.02	-25.23
2472	13		12.37	23.0	30.00	-17.63	-3.30	9.07	36.02	-26.95
2412	1	Peak	19.80		30.00	-10.20	-3.30	16.50	36.02	-19.52
2437	6		19.96		30.00	-10.04	-3.30	16.66	36.02	-19.36
2452	9		19.68		30.00	-10.32	-3.30	16.38	36.02	-19.64
2457	10		19.57		30.00	-10.43	-3.30	16.27	36.02	-19.75
2462	11		18.88		30.00	-11.12	-3.30	15.58	36.02	-20.44
2467	12		16.36		30.00	-13.64	-3.30	13.06	36.02	-22.96
2472	13		14.79		30.00	-15.21	-3.30	11.49	36.02	-24.53

Table 7-4. Conducted Output Power Measurements (802.11b)

2.4GHz WIFI (20MHz 802.11g SISO ANT1)					Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]	PLS						
2412	1	Average	17.72	42.0	30.00	-12.28	-3.30	14.42	36.02	-21.60
2437	6		17.25	42.0	30.00	-12.75	-3.30	13.95	36.02	-22.07
2457	10		17.78	42.0	30.00	-12.22	-3.30	14.48	36.02	-21.54
2462	11		16.67	32.0	30.00	-13.33	-3.30	13.37	36.02	-22.65
2467	12		13.59	27.0	30.00	-16.41	-3.30	10.29	36.02	-25.73
2472	13		11.64	24.0	30.00	-18.36	-3.30	8.34	36.02	-27.68
2412	1	Peak	22.52		30.00	-7.48	-3.30	19.22	36.02	-16.80
2437	6		22.28		30.00	-7.72	-3.30	18.98	36.02	-17.04
2457	10		22.48		30.00	-7.52	-3.30	19.18	36.02	-16.84
2462	11		22.68		30.00	-7.32	-3.30	19.38	36.02	-16.64
2467	12		20.11		30.00	-9.89	-3.30	16.81	36.02	-19.21
2472	13		18.67		30.00	-11.33	-3.30	15.37	36.02	-20.65

Table 7-5. Conducted Output Power Measurements (802.11g)

2.4GHz WIFI (20MHz 802.11n SISO ANT1)					Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]	PLS						
2412	1	Average	16.95	42.0	30.00	-13.05	-3.30	13.65	36.02	-22.37
2437	6		16.57	42.0	30.00	-13.43	-3.30	13.27	36.02	-22.75
2452	9		16.44	42.0	30.00	-13.56	-3.30	13.14	36.02	-22.88
2457	10		16.31	35.0	30.00	-13.69	-3.30	13.01	36.02	-23.01
2462	11		15.31	29.0	30.00	-14.69	-3.30	12.01	36.02	-24.01
2467	12		14.44	27.0	30.00	-15.56	-3.30	11.14	36.02	-24.88
2472	13		13.44	25.0	30.00	-16.56	-3.30	10.14	36.02	-25.88
2412	1	Peak	22.42		30.00	-7.58	-3.30	19.12	36.02	-16.90
2437	6		22.22		30.00	-7.78	-3.30	18.92	36.02	-17.10
2452	9		22.18		30.00	-7.82	-3.30	18.88	36.02	-17.14
2457	10		21.72		30.00	-8.28	-3.30	18.42	36.02	-17.60
2462	11		20.34		30.00	-9.66	-3.30	17.04	36.02	-18.98
2467	12		19.58		30.00	-10.42	-3.30	16.28	36.02	-19.74
2472	13		18.38		30.00	-11.62	-3.30	15.08	36.02	-20.94

Table 7-6. Conducted Output Power Measurements (802.11n)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 30 of 75

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates are investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10:2020 – Section 11.10.2 Method PKPSD

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 31 of 75		


Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	b	1Mbps	4.69	8.00	-3.32	Pass
2437	6	b	1Mbps	4.76	8.00	-3.25	Pass
2462	11	b	1Mbps	4.52	8.00	-3.48	Pass
2412	1	g	6Mbps	-6.56	8.00	-14.56	Pass
2437	6	g	6Mbps	-7.22	8.00	-15.22	Pass
2462	11	g	6Mbps	-6.99	8.00	-14.99	Pass
2412	1	n	MCS0	-8.50	8.00	-16.50	Pass
2437	6	n	MCS0	-8.89	8.00	-16.89	Pass
2462	11	n	MCS0	-8.82	8.00	-16.82	Pass


Table 7-7. Conducted Power Density Measurements

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 32 of 75

Power Spectral Density Measurements

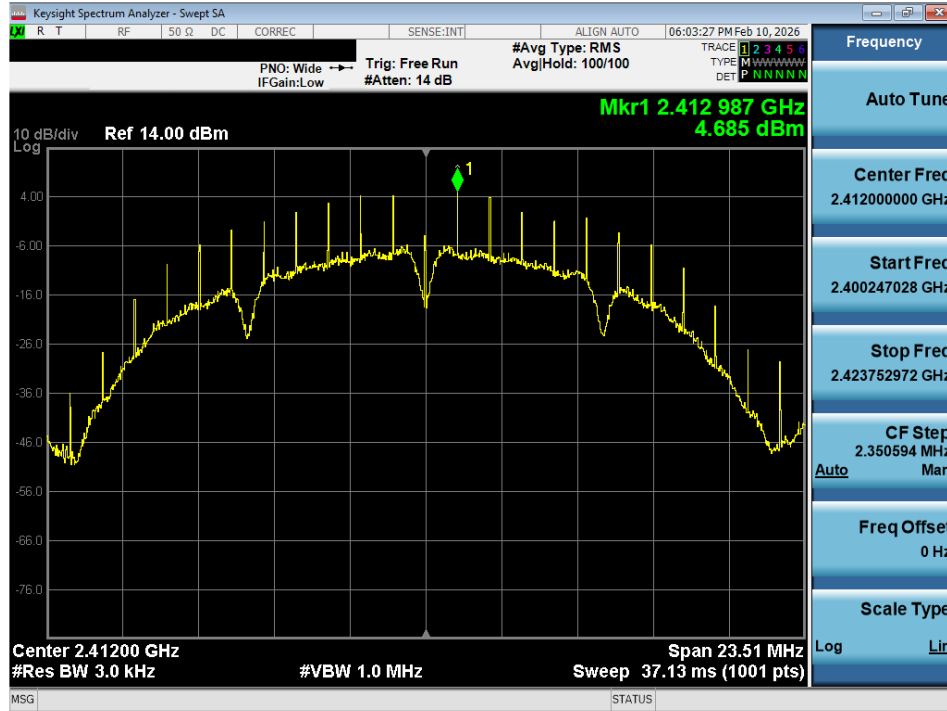


Plot 7-18 PSD (20MHz BW 802.11b - Ch.1)

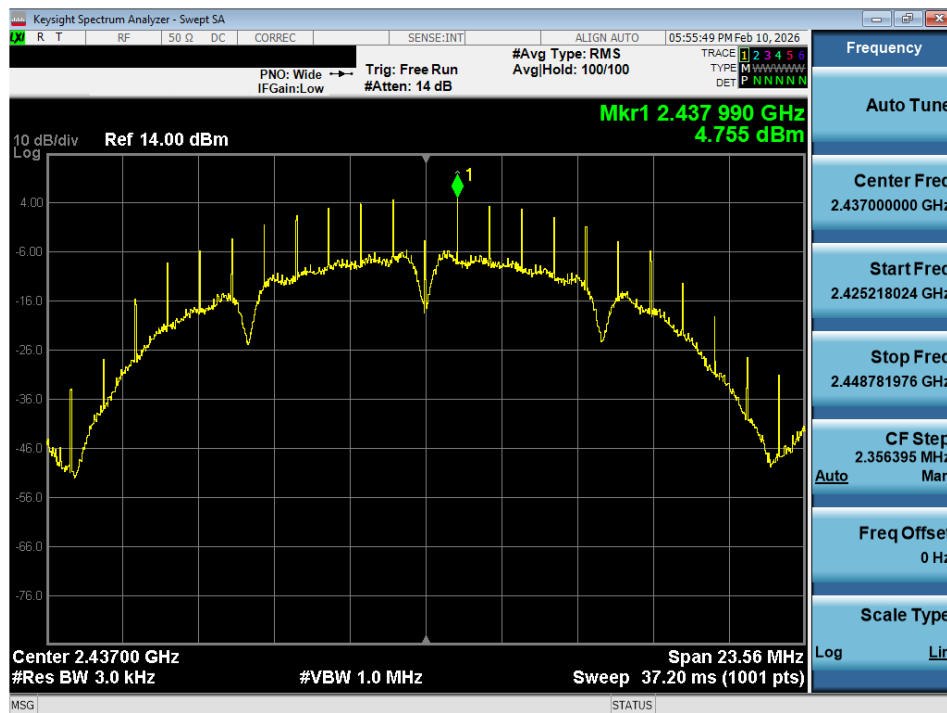


Plot 7-19 PSD (20MHz BW 802.11b - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 33 of 75

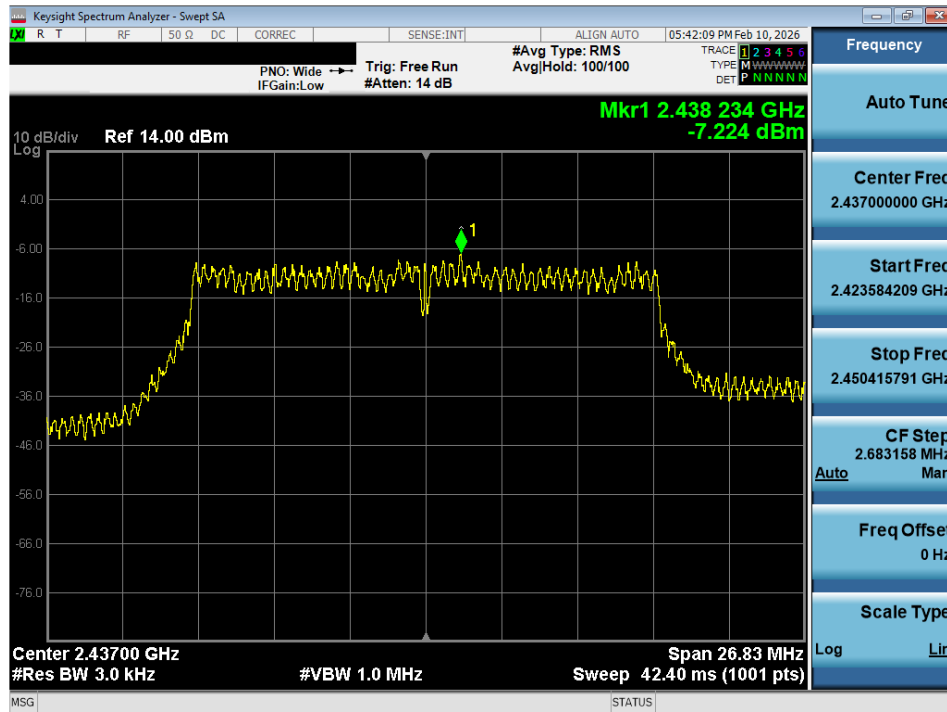


Plot 7-22 PSD (20MHz BW 802.11g - Ch.6)

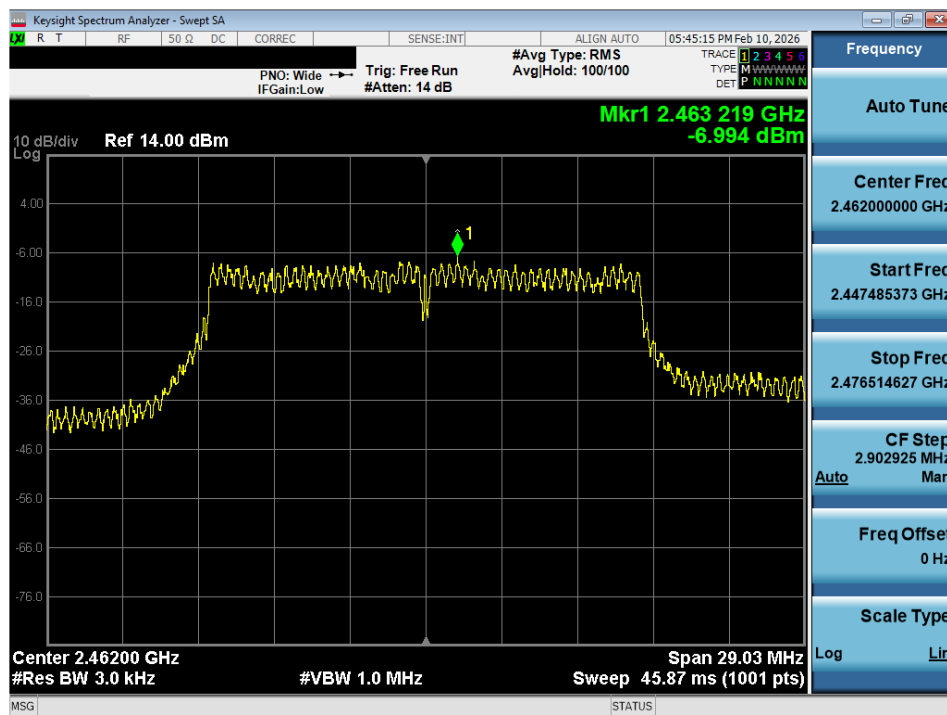


Plot 7-23 PSD (20MHz BW 802.11g - Ch.11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 35 of 75

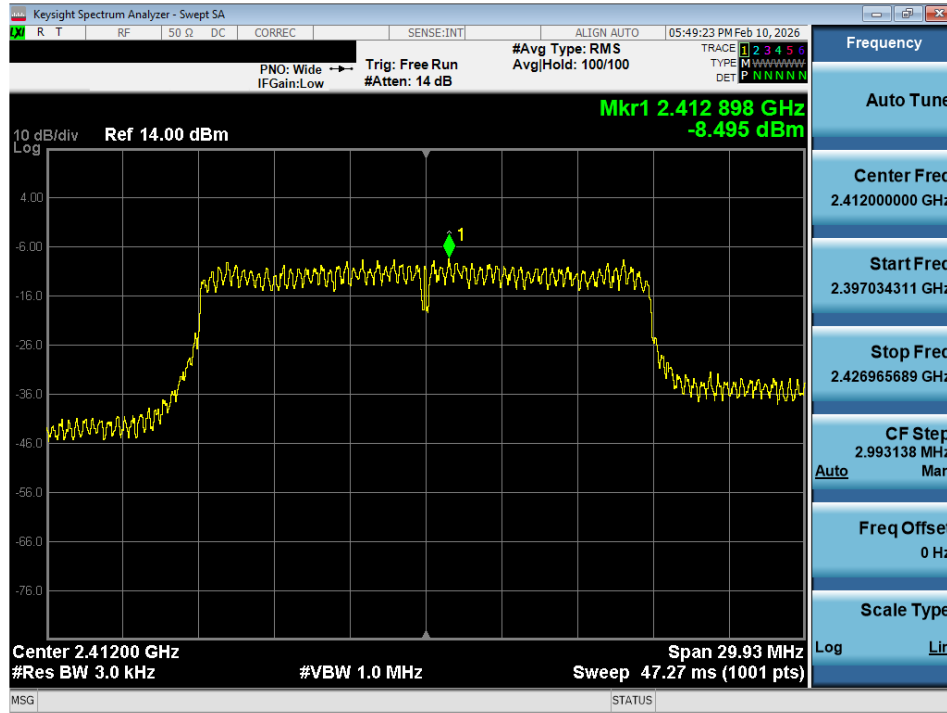


Plot 7-24 PSD (20MHz BW 802.11n - Ch.1)

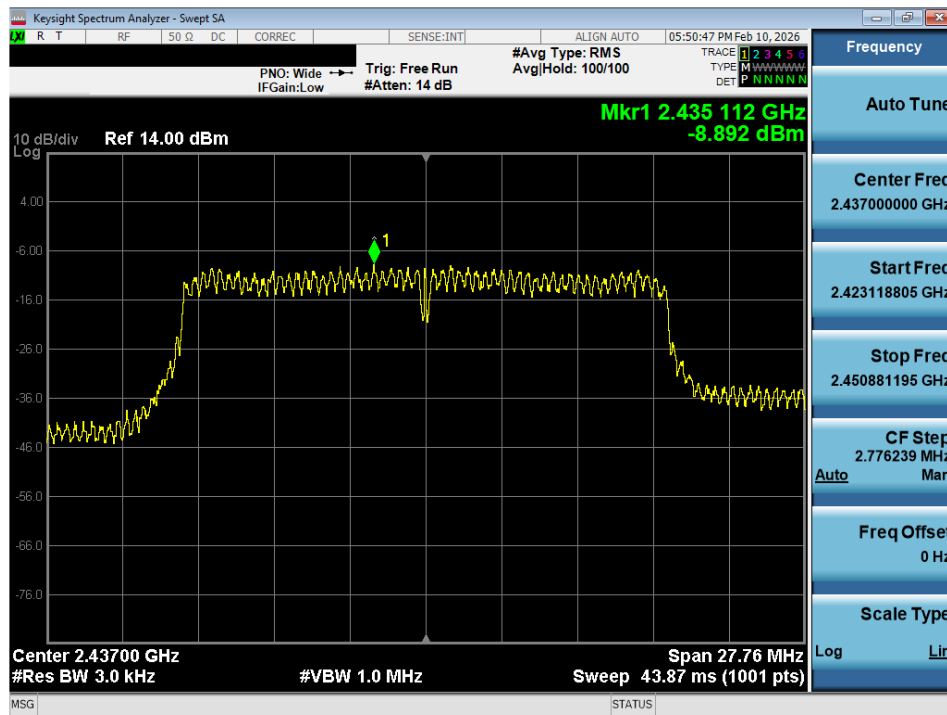

Plot 7-25 PSD (20MHz BW 802.11n - Ch.6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 36 of 75

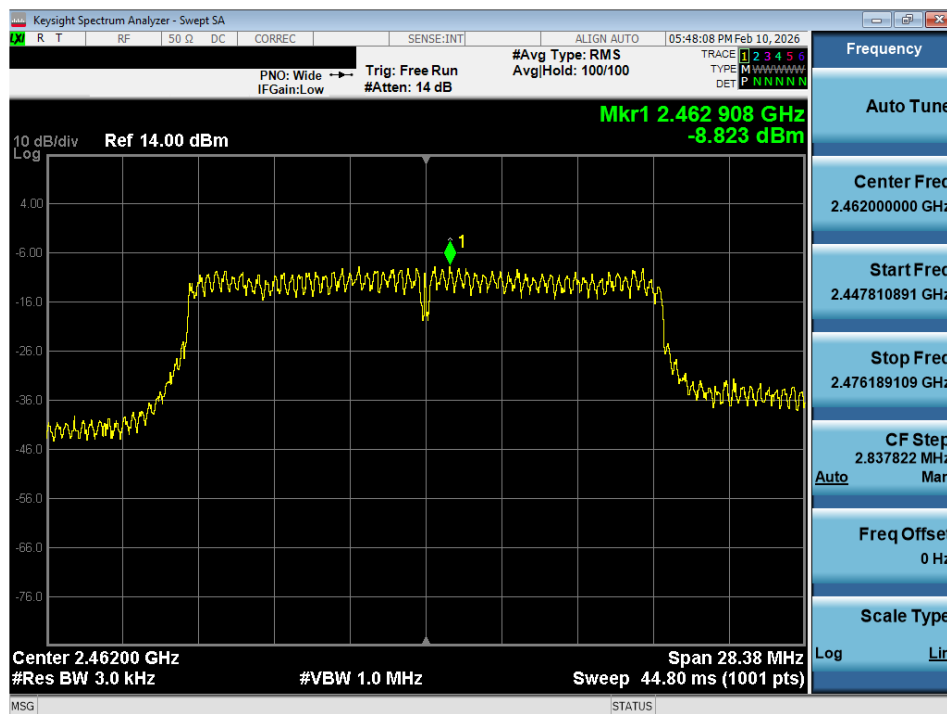

Plot 7-26 PSD (20MHz BW 802.11n - Ch.11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 37 of 75

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 38 of 75		

Conducted Band Edge Emissions

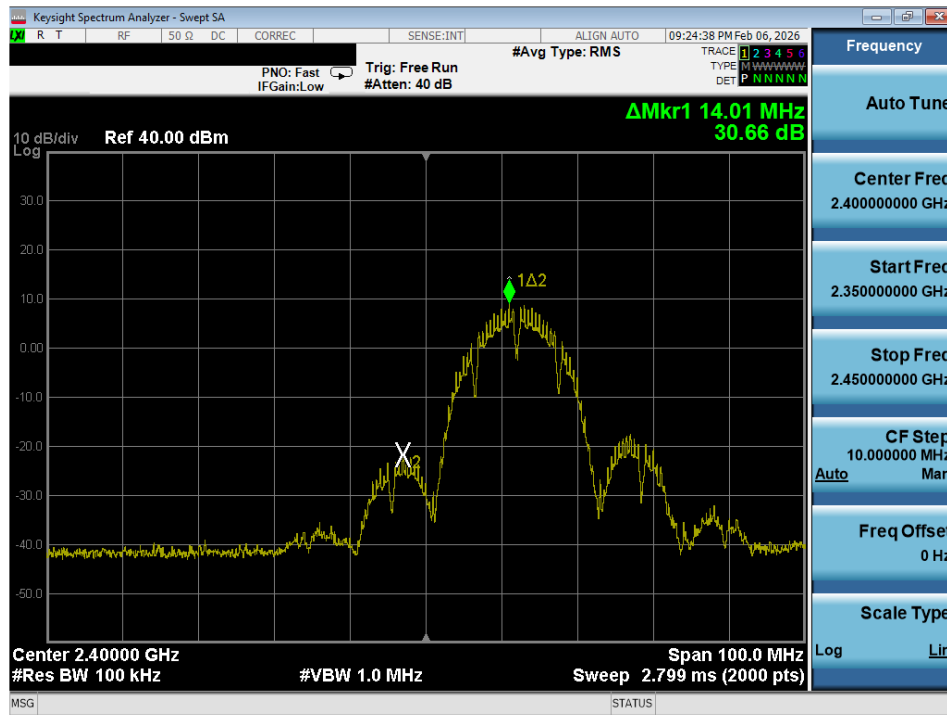


Plot 7-27. Band Edge Plot (802.11b – Ch. 1)




Plot 7-28. Band Edge Plot (802.11b – Ch. 10)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 39 of 75

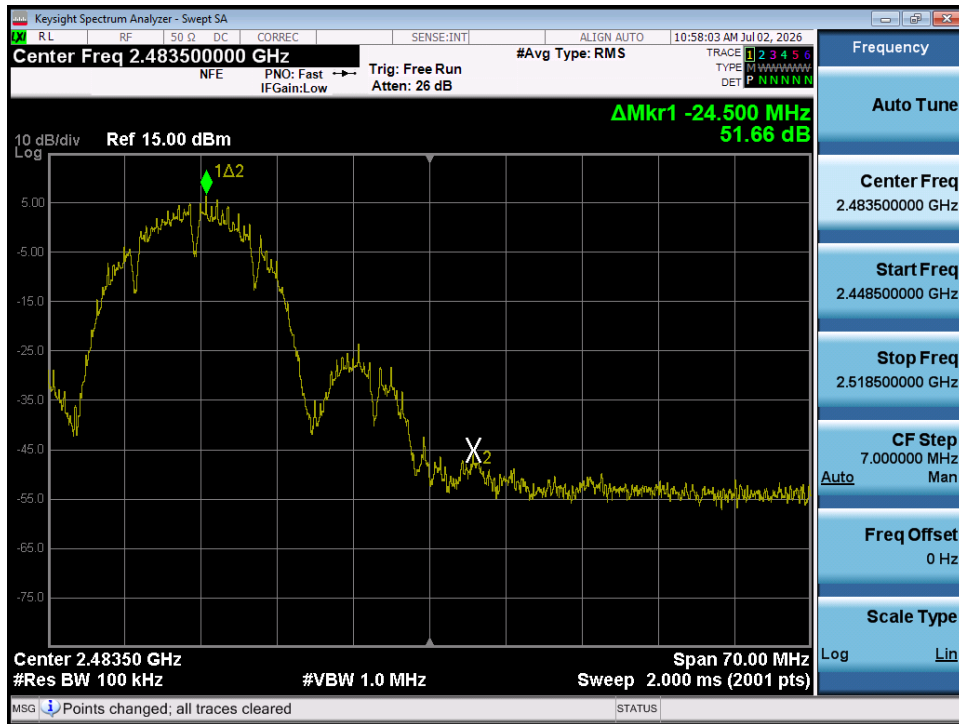


Plot 7-29. Band Edge Plot (802.11b – Ch. 11)

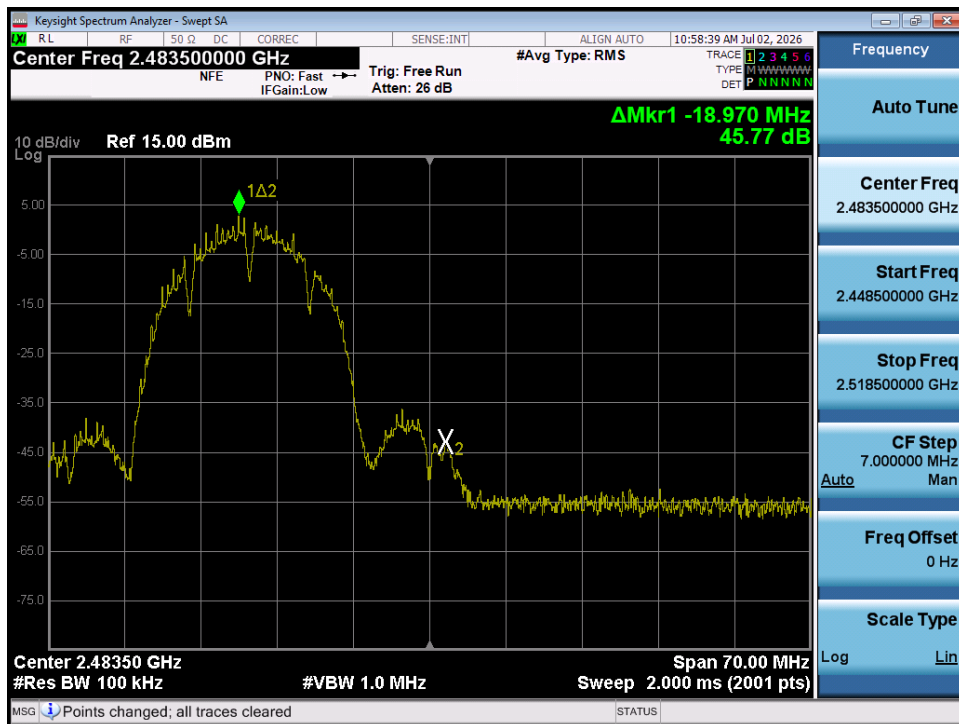


Plot 7-30. Band Edge Plot (802.11b – Ch. 12)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 40 of 75

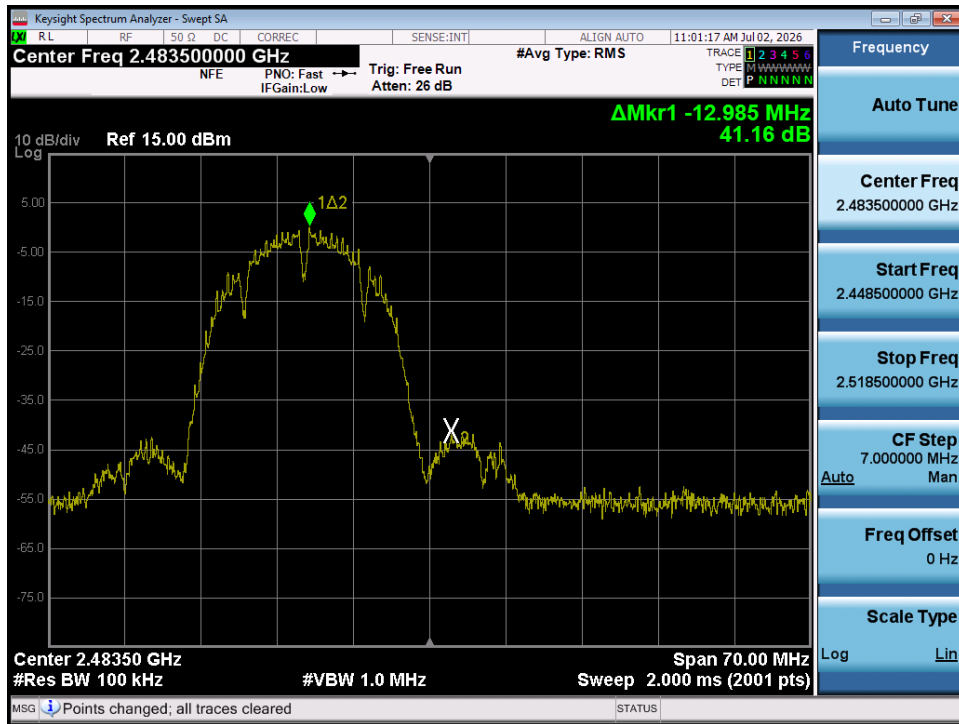


Plot 7-31. Band Edge Plot (802.11b – Ch. 13)

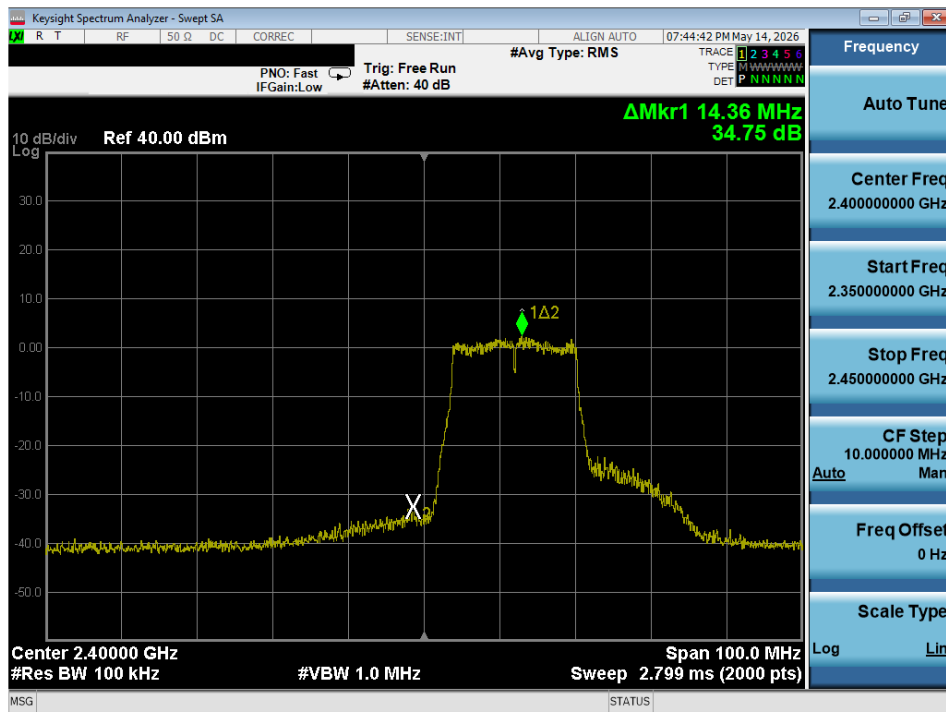

Plot 7-32. Band Edge Plot (802.11g – Ch. 1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 41 of 75

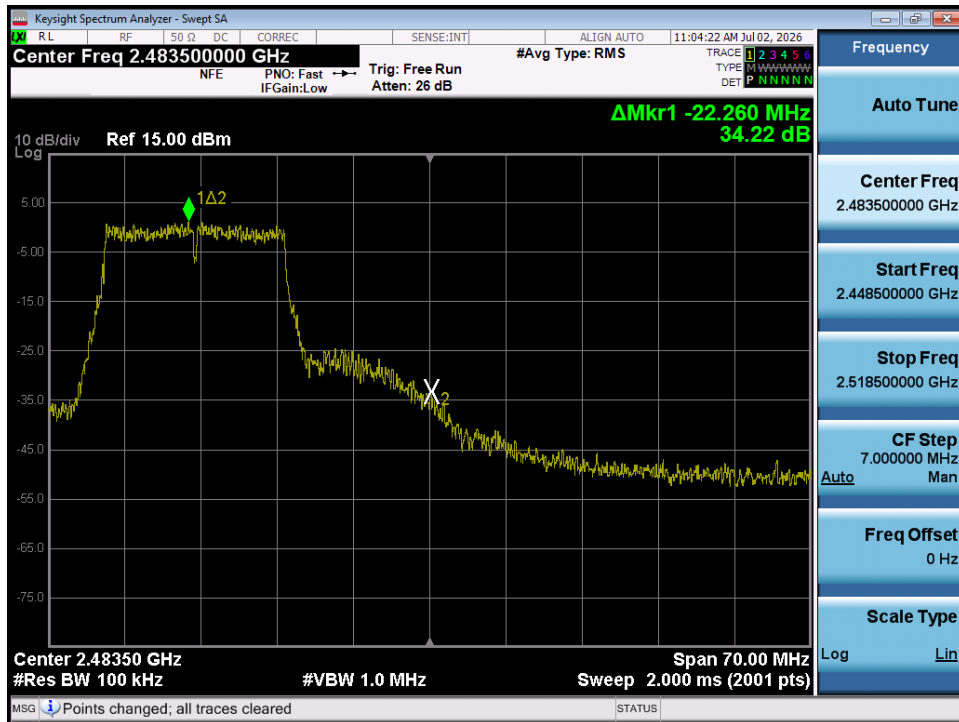


Plot 7-33. Band Edge Plot (802.11g – Ch. 11)




Plot 7-34. Band Edge Plot (802.11g – Ch. 12)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 42 of 75

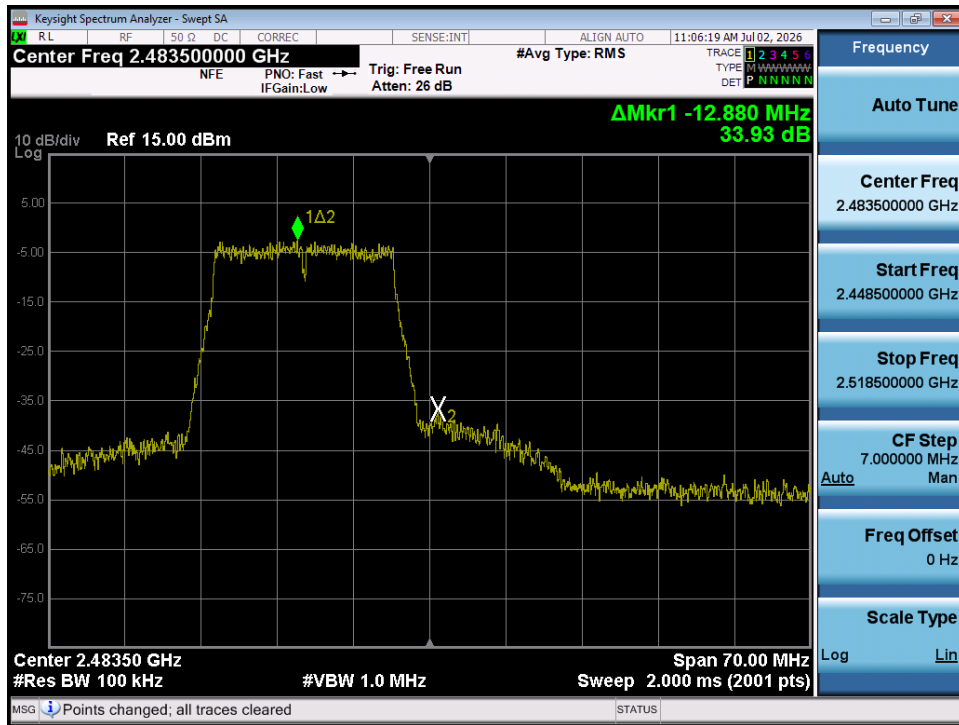

Plot 7-35. Band Edge Plot (802.11g – Ch. 13)

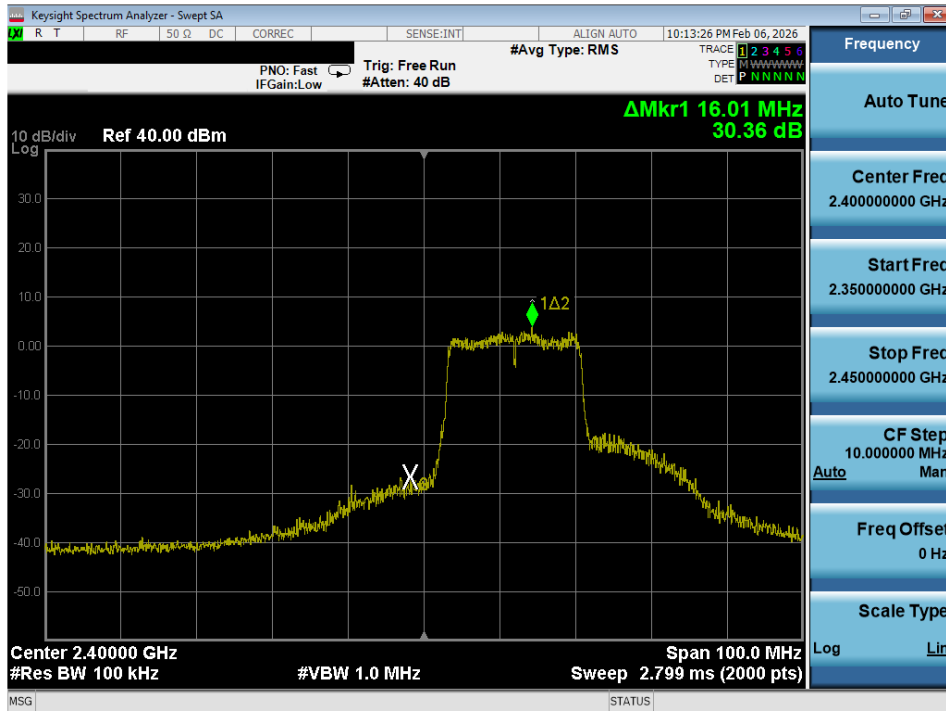

Plot 7-36. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 43 of 75




Plot 7-37. Band Edge Plot (802.11n (2.4GHz) – Ch. 10)




Plot 7-38. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 44 of 75

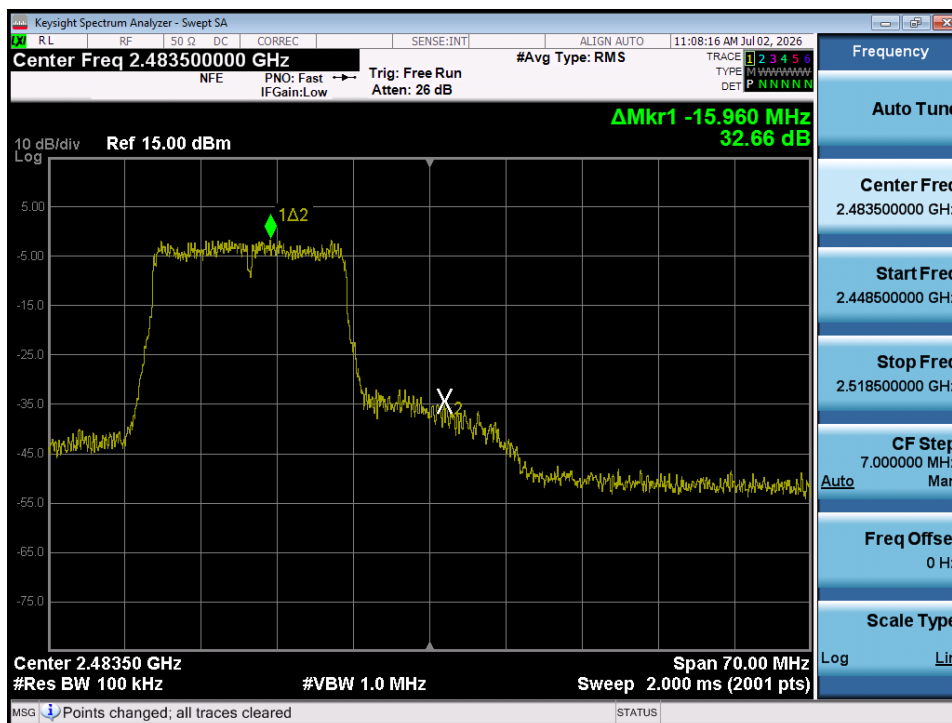

Plot 7-39. Band Edge Plot (802.11n (2.4GHz) – Ch. 12)

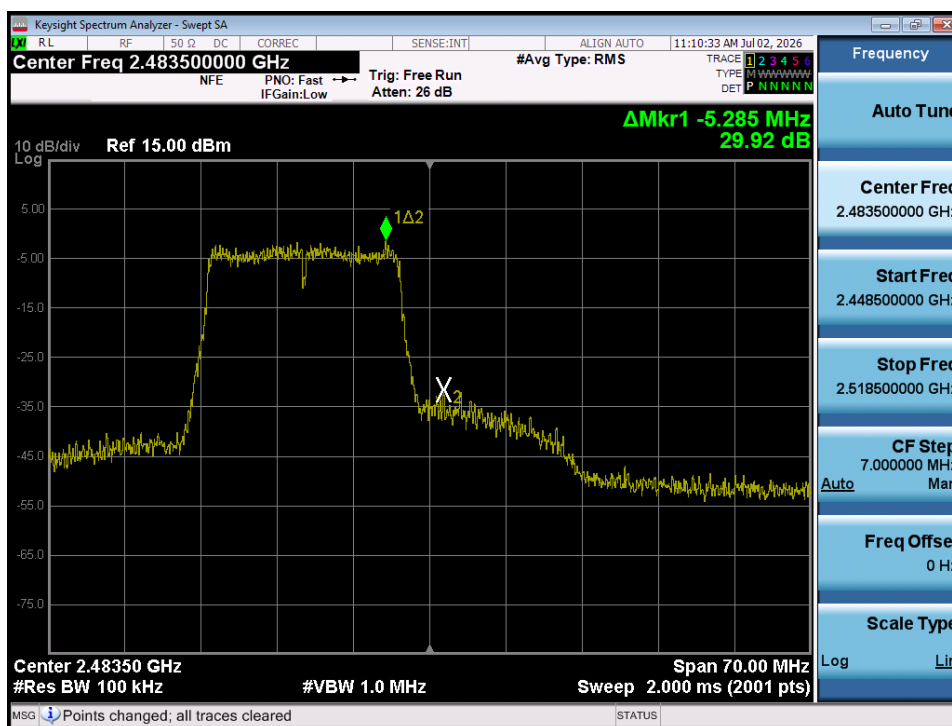

Plot 7-40. Band Edge Plot (802.11n (2.4GHz) – Ch. 13)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 45 of 75

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n” modes. The worst-case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10:2020.

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3
ANSI C63.10:2020 – Section 14.5.2.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

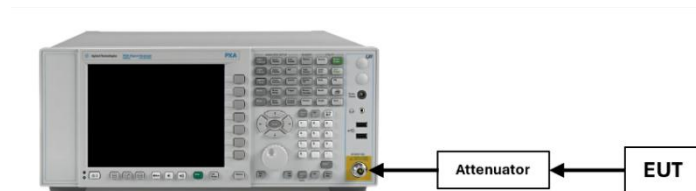


Figure 7-5. Test Instrument & Measurement Setup


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 46 of 75		

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10:2020 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.
5. All modes, data rates, and antenna configurations were investigated.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 47 of 75

7.6.1 Conducted Spurious Emission

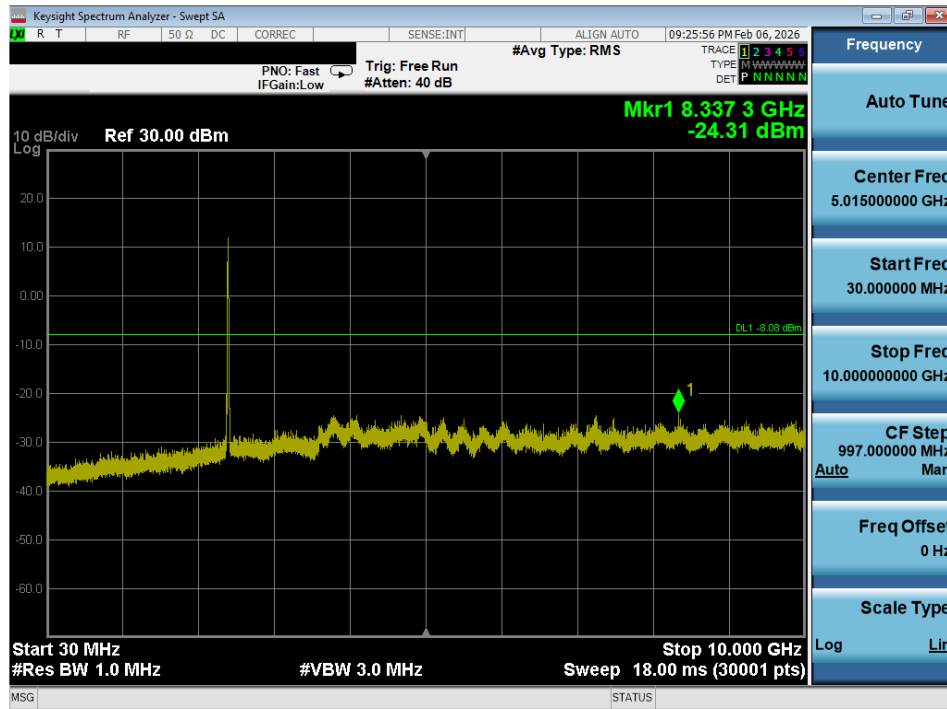


Plot 7-41. Conducted Spurious Plot (802.11b – Ch. 1)

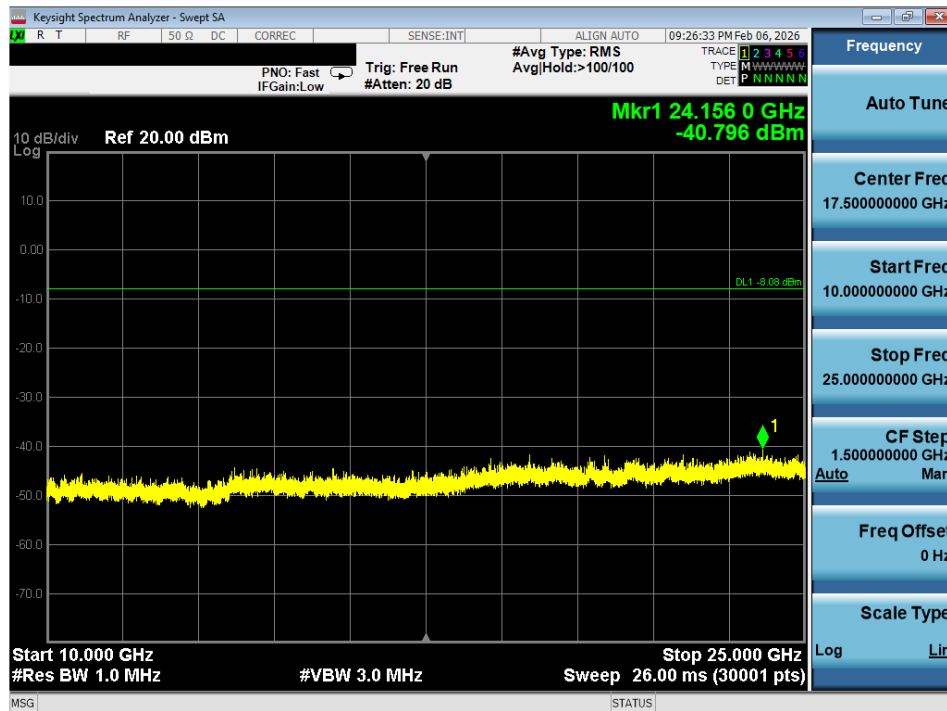


Plot 7-42. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 48 of 75

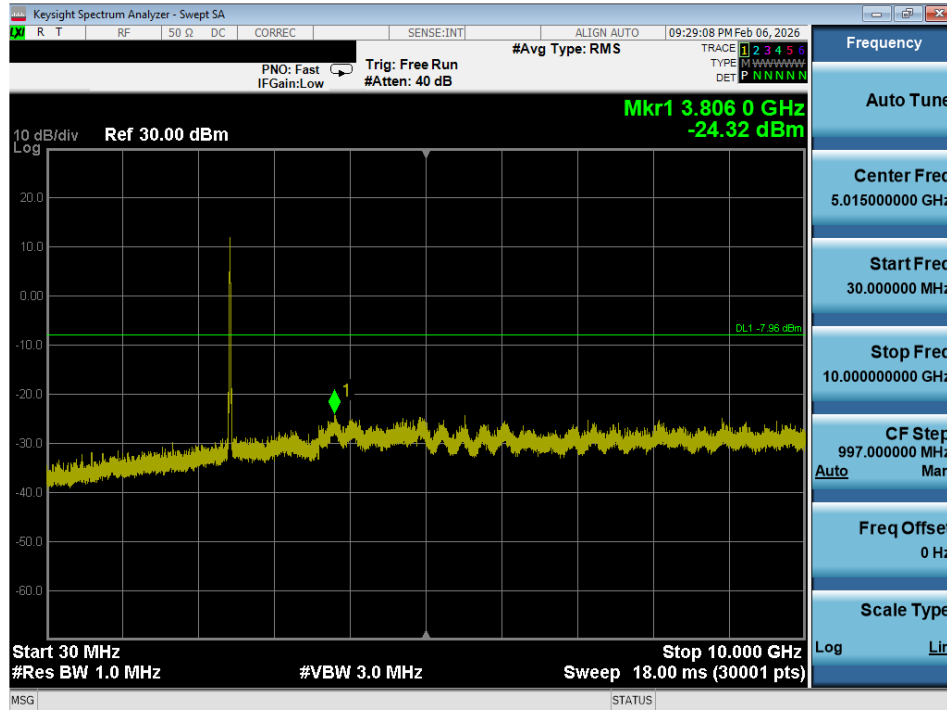


Plot 7-43. Conducted Spurious Plot (802.11b – Ch. 6)

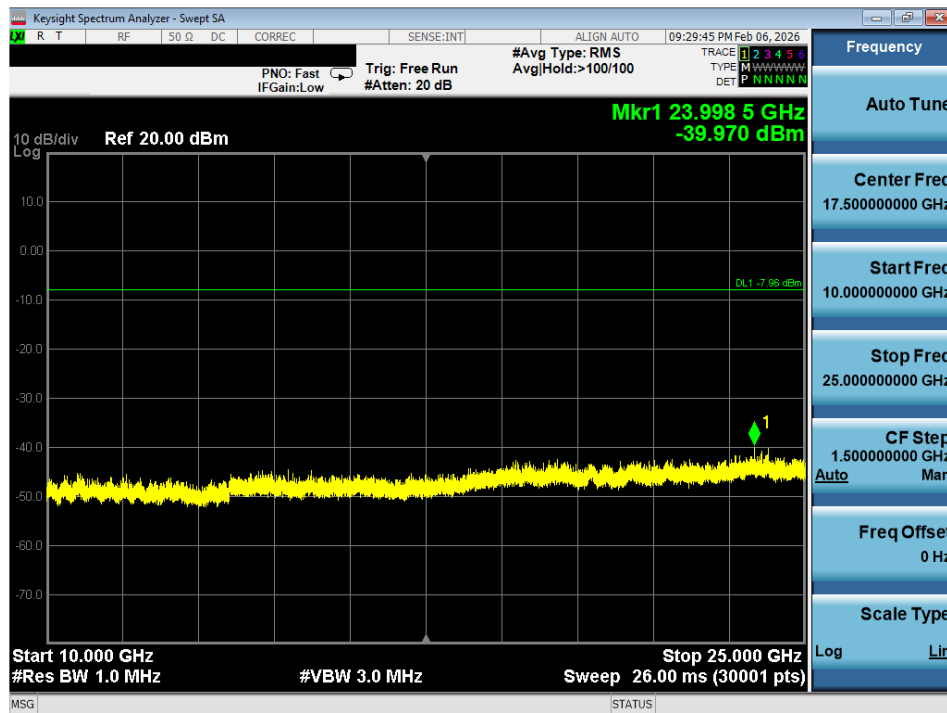


Plot 7-44. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 49 of 75

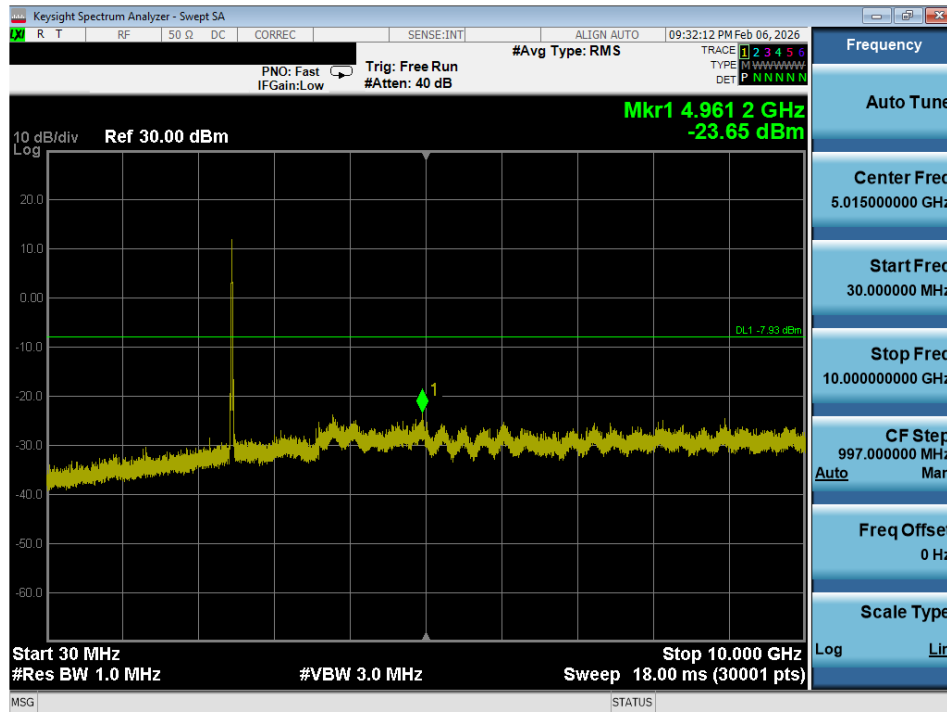


Plot 7-45. Conducted Spurious Plot (802.11b – Ch. 11)

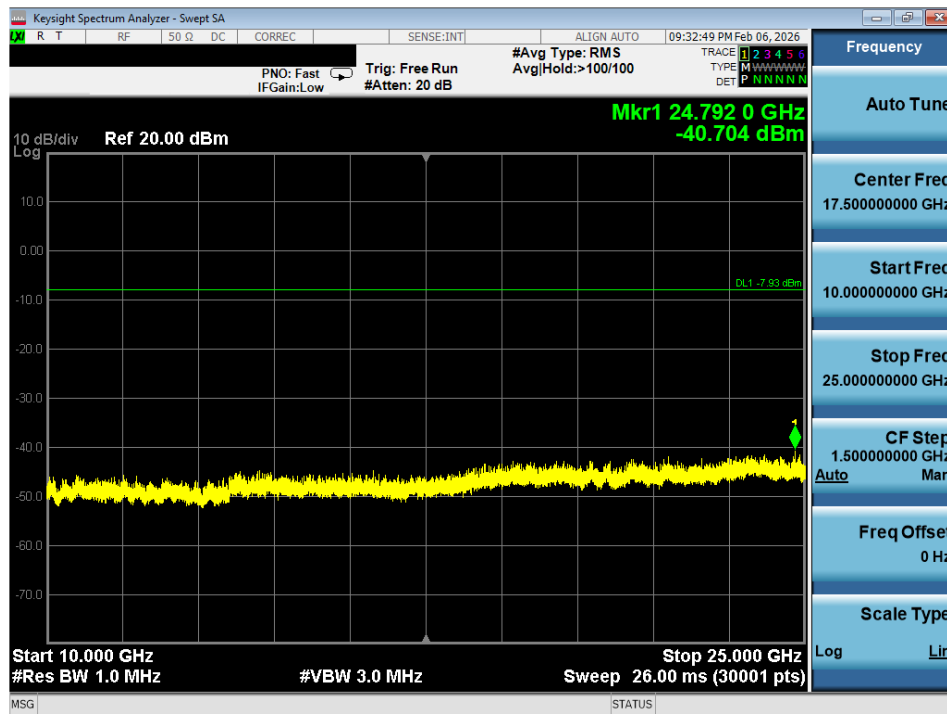


Plot 7-46. Conducted Spurious Plot (802.11b – Ch. 11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 50 of 75

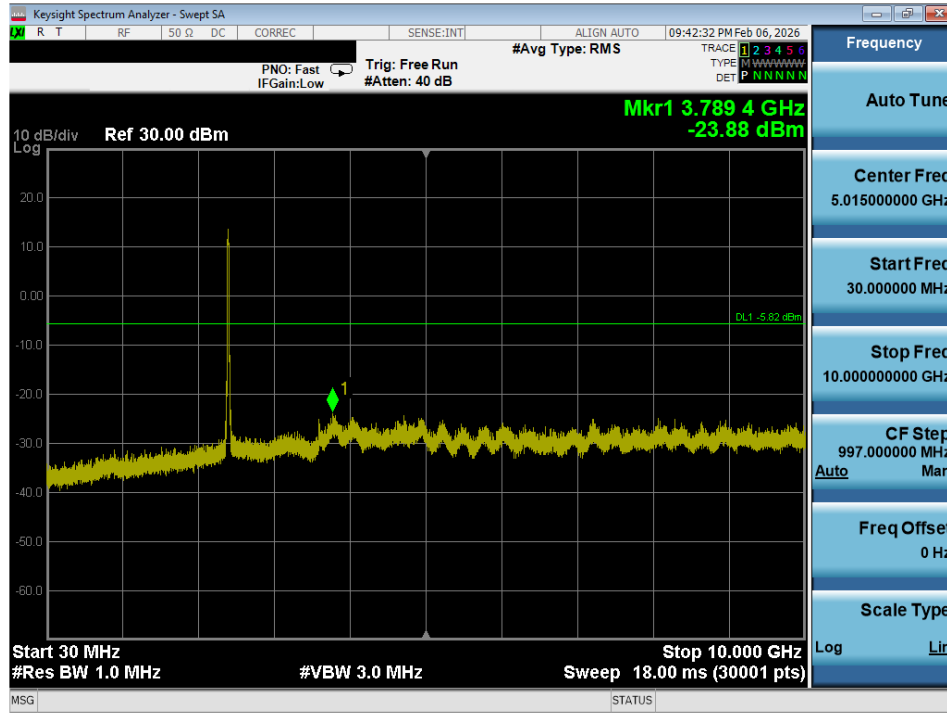


Plot 7-47. Conducted Spurious Plot (802.11g – Ch. 1)

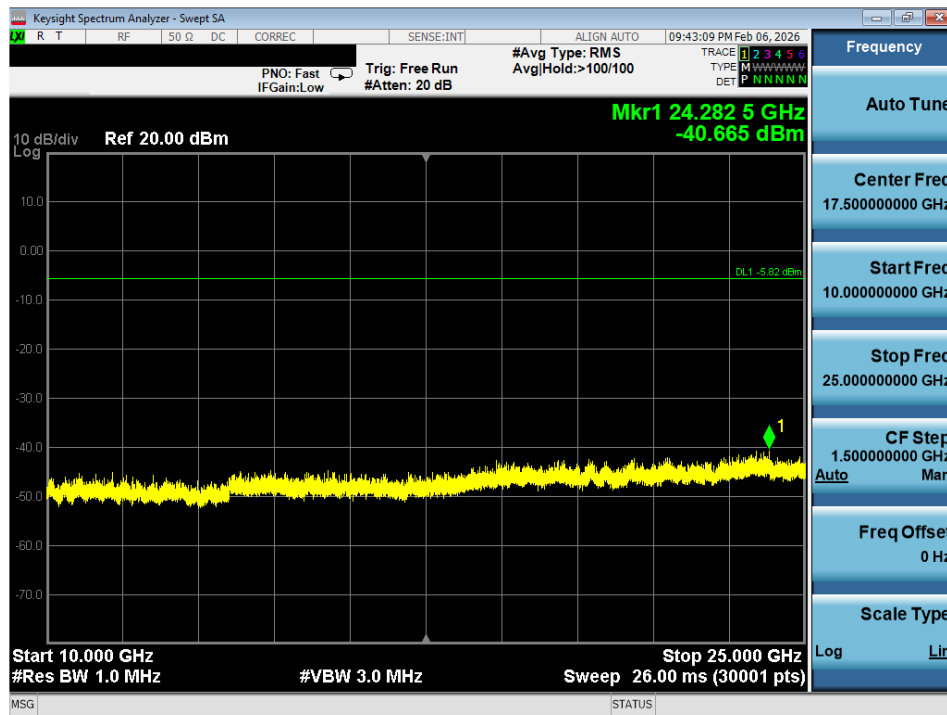


Plot 7-48. Conducted Spurious Plot (802.11g – Ch. 1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 51 of 75

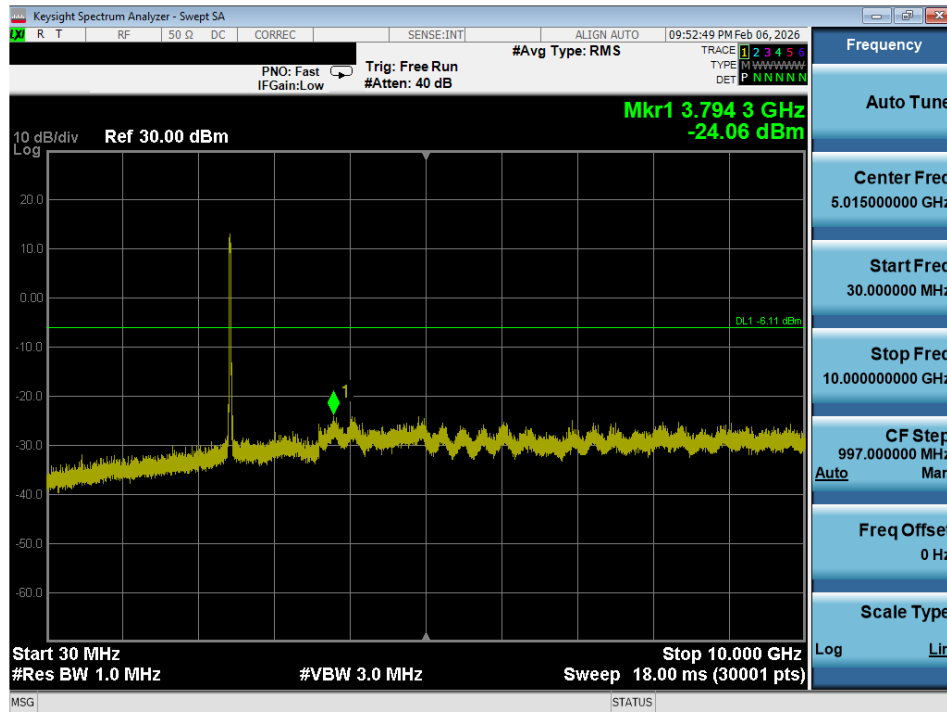


Plot 7-49. Conducted Spurious Plot (802.11g – Ch. 6)

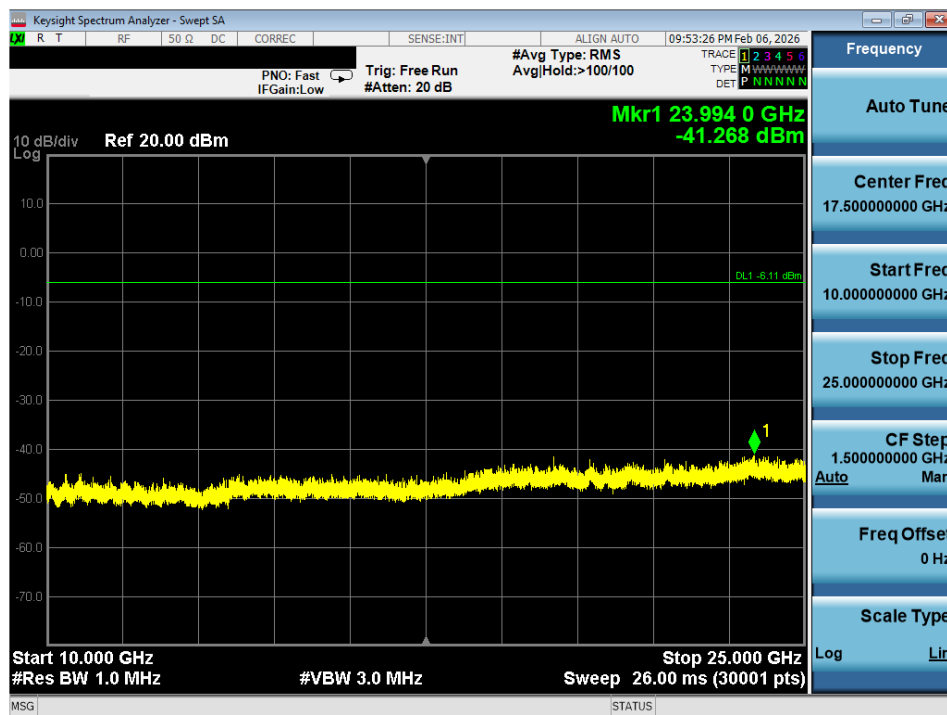


Plot 7-50. Conducted Spurious Plot (802.11g – Ch. 6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 52 of 75

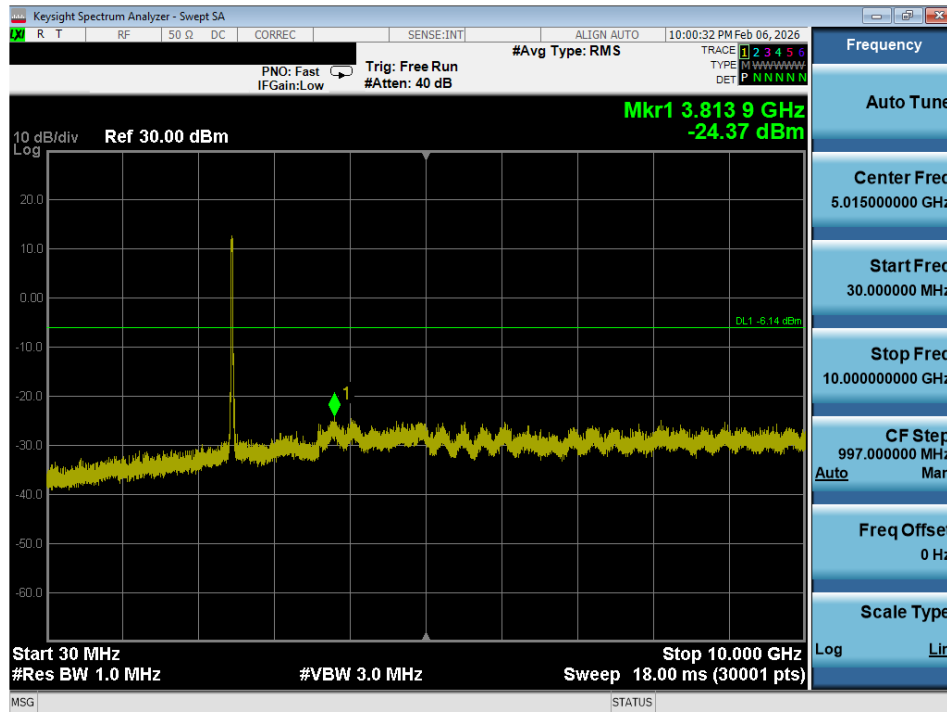


Plot 7-51. Conducted Spurious Plot (802.11g – Ch. 11)

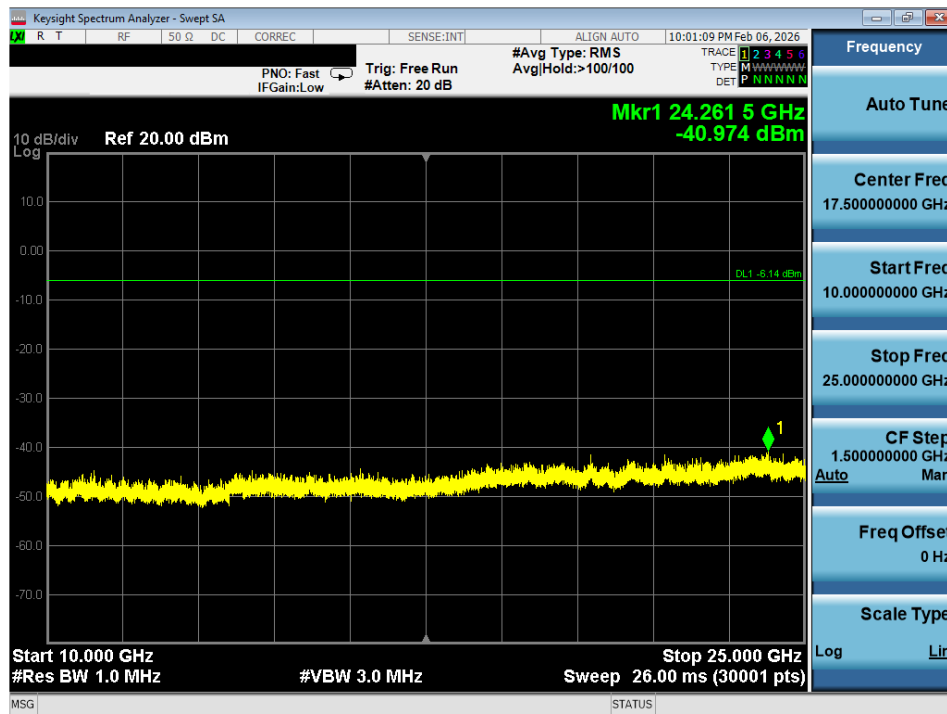


Plot 7-52. Conducted Spurious Plot (802.11g – Ch. 11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 53 of 75

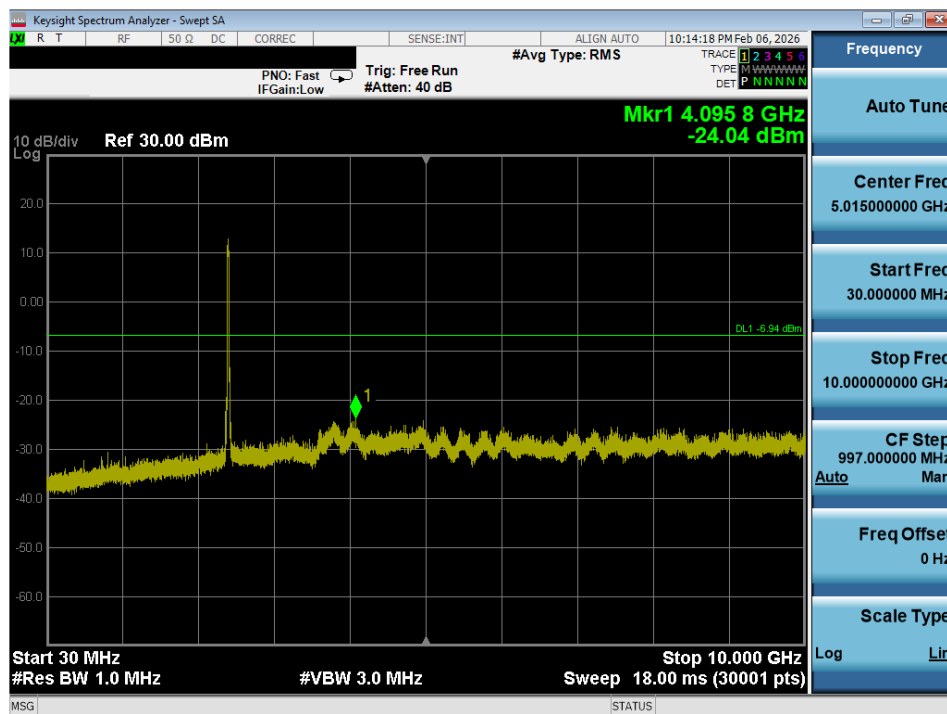


Plot 7-53. Conducted Spurious Plot (802.11n – Ch. 1)

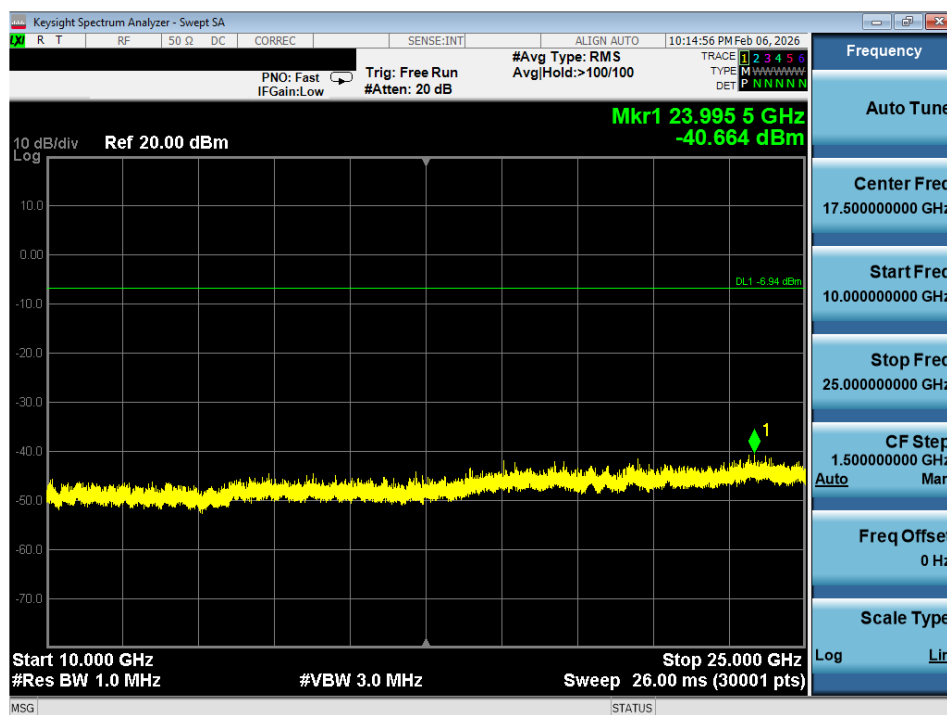


Plot 7-54. Conducted Spurious Plot (802.11n – Ch. 1)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 54 of 75

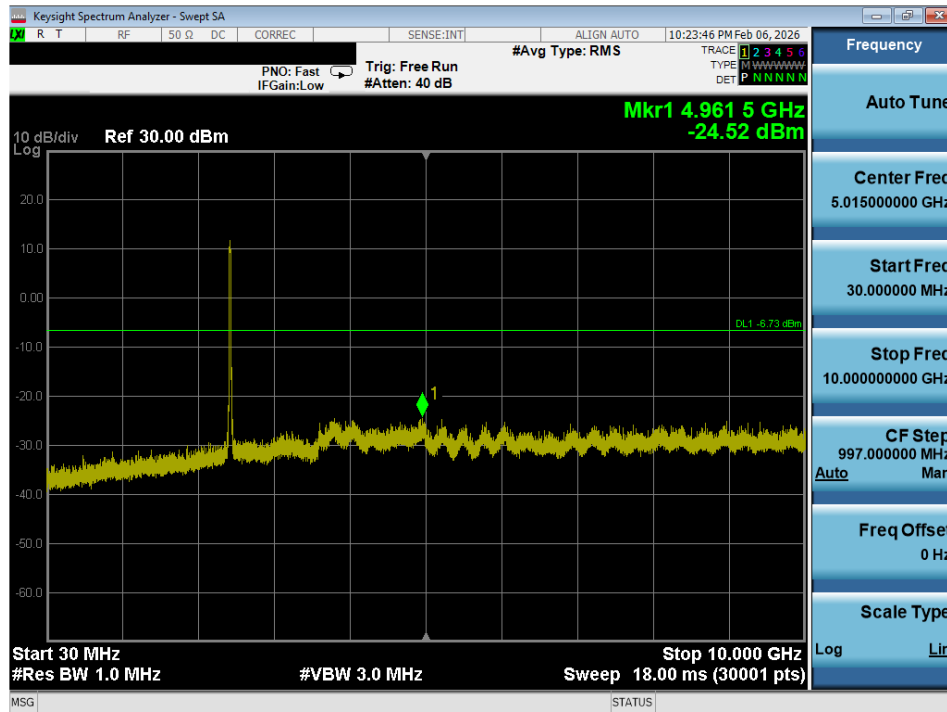


Plot 7-55. Conducted Spurious Plot (802.11n – Ch. 6)

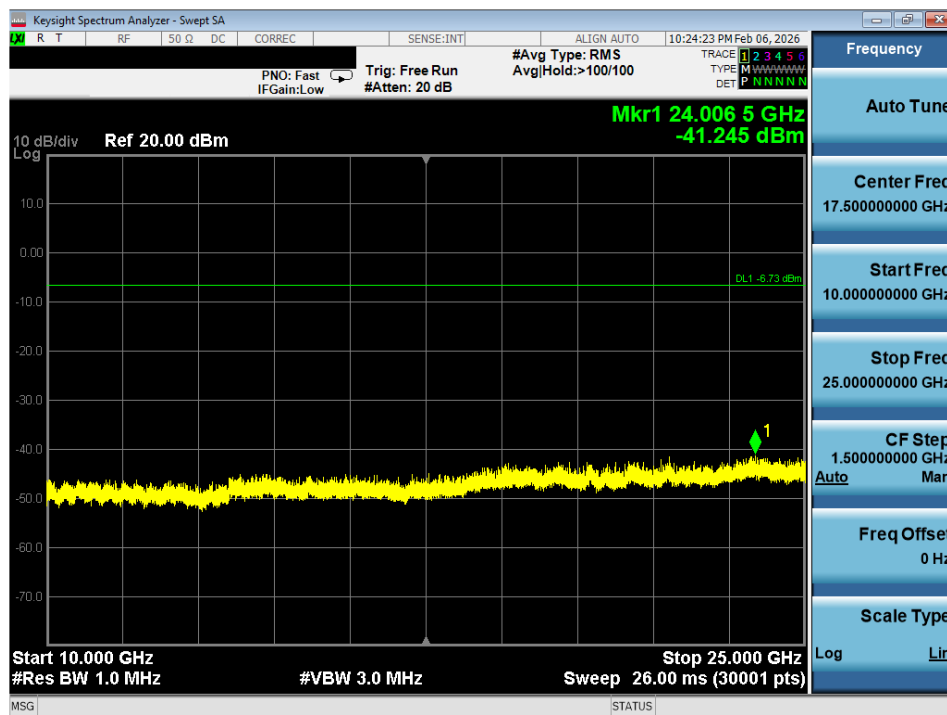


Plot 7-56. Conducted Spurious Plot (802.11n – Ch. 6)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 55 of 75

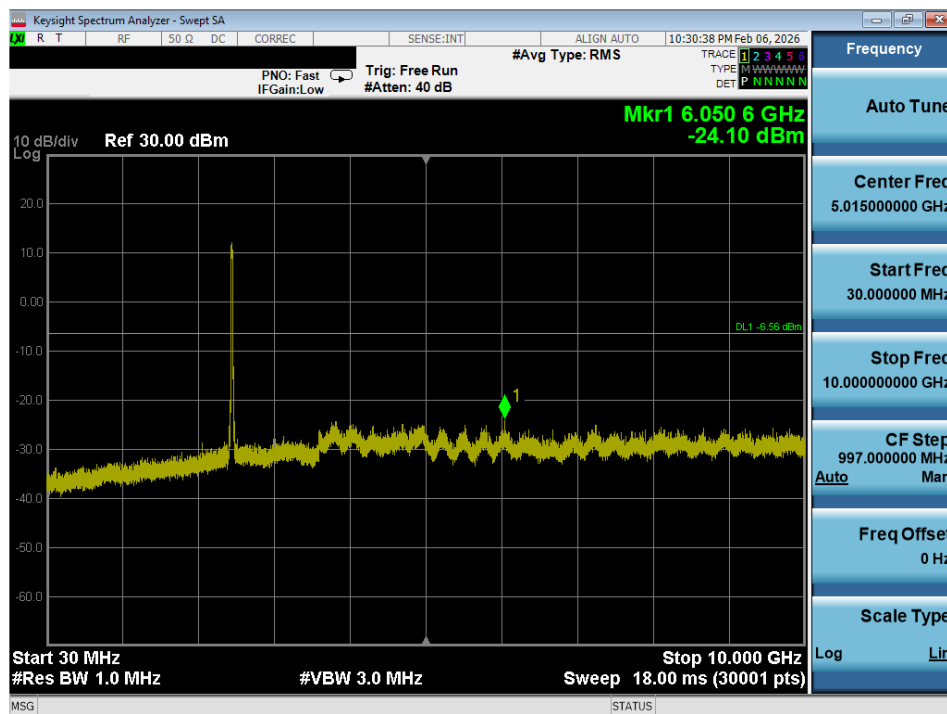

Plot 7-57. Conducted Spurious Plot (802.11n – Ch. 11)

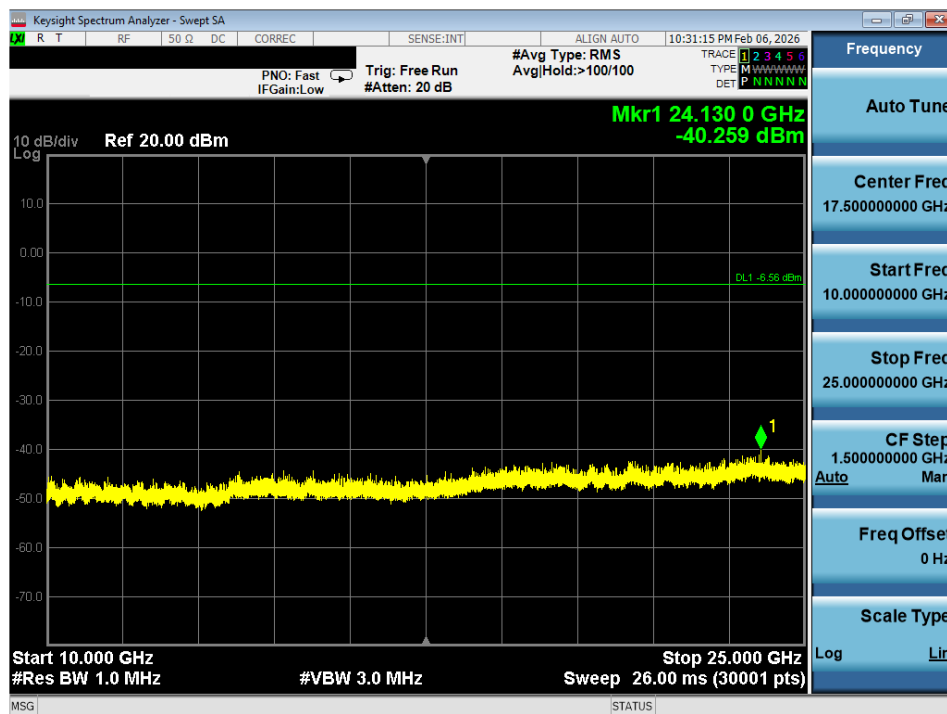

Plot 7-58. Conducted Spurious Plot (802.11n – Ch. 11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 56 of 75

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-8. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 57 of 75

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

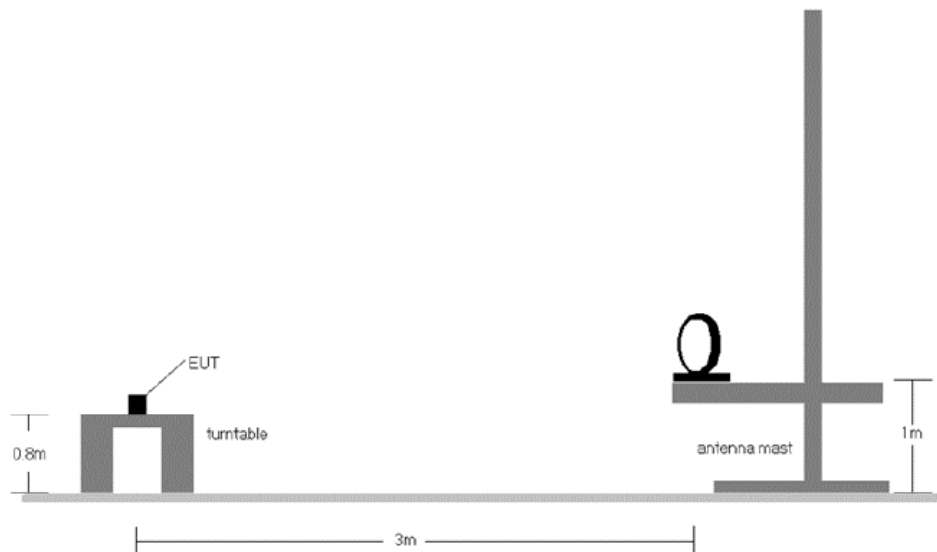


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 58 of 75		

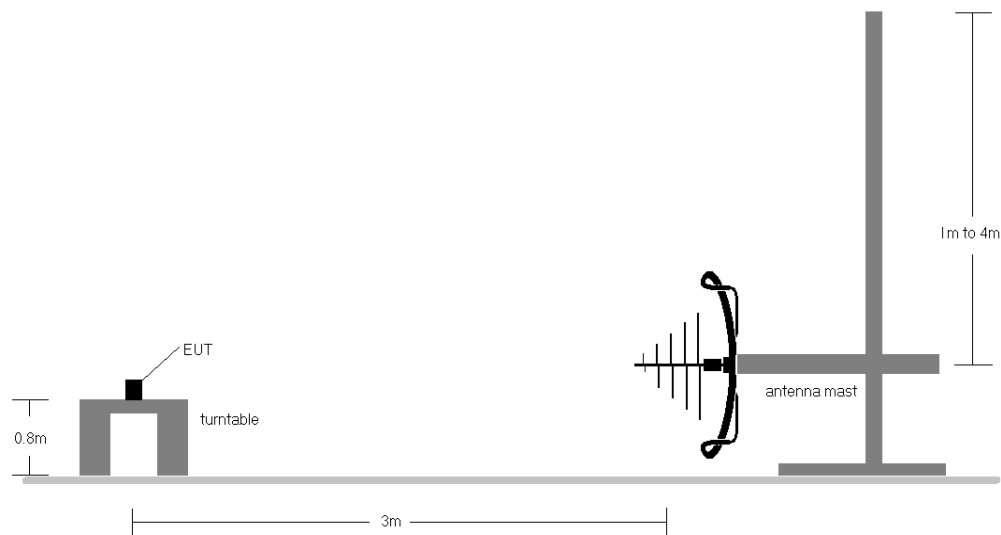


Figure 7-7. Radiated Test Setup < 1GHz

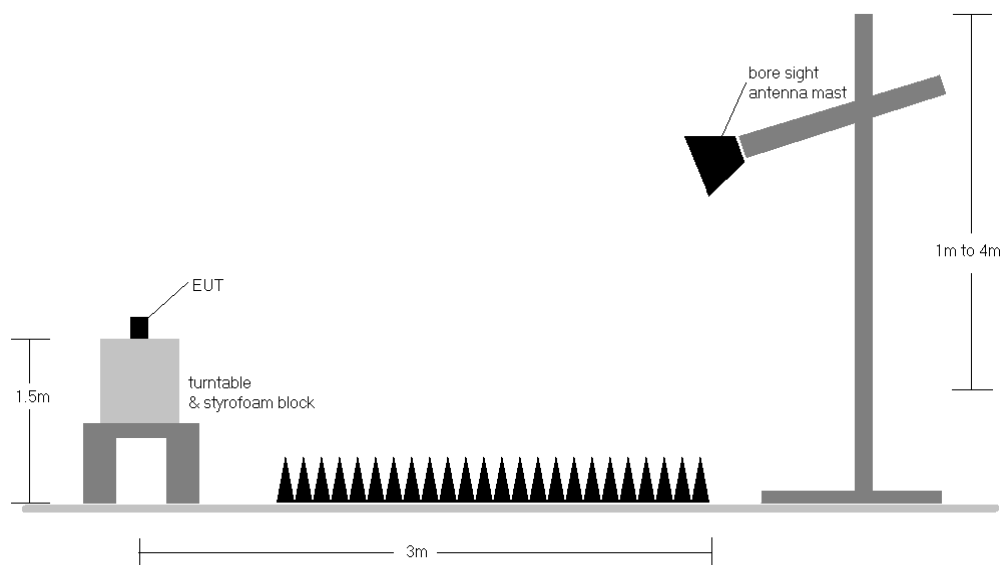


Figure 7-8. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10:2020 Section 11.12.2 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 59 of 75

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
13. In this section, plots showing measurements shown as "channel power" are recorded using the integration methods described in Section 11.12.3.2 of ANSI C63.10:2020 for average and peak measurements as allowed per Section 12.7.4.4.1.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 60 of 75

Radiated Spurious Emission Measurements

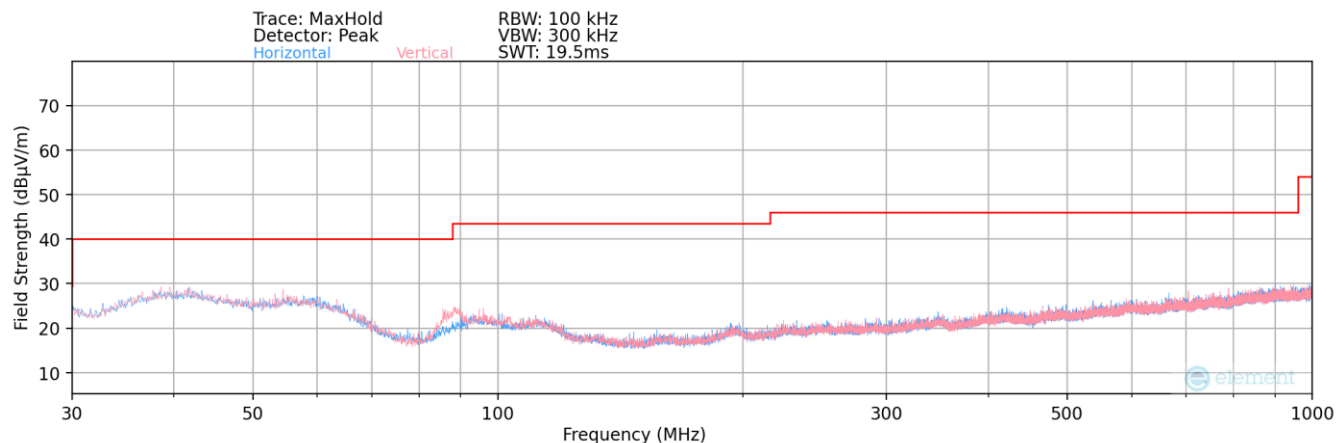


Plot 7-59. Radiated Spurious Plot below 1GHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
62.59	Quasi-Peak	H	-	-	-68.10	-13.84	25.06	40.00	-14.94
76.10	Quasi-Peak	H	211	201	-67.25	-18.66	21.09	40.00	-18.91
186.85	Quasi-Peak	H	-	-	-72.38	-15.06	19.56	43.52	-23.96
243.67	Quasi-Peak	H	-	-	-72.72	-12.65	21.63	43.52	-21.89

Table 7-9. Radiated Measurements below 1GHz


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 61 of 75		

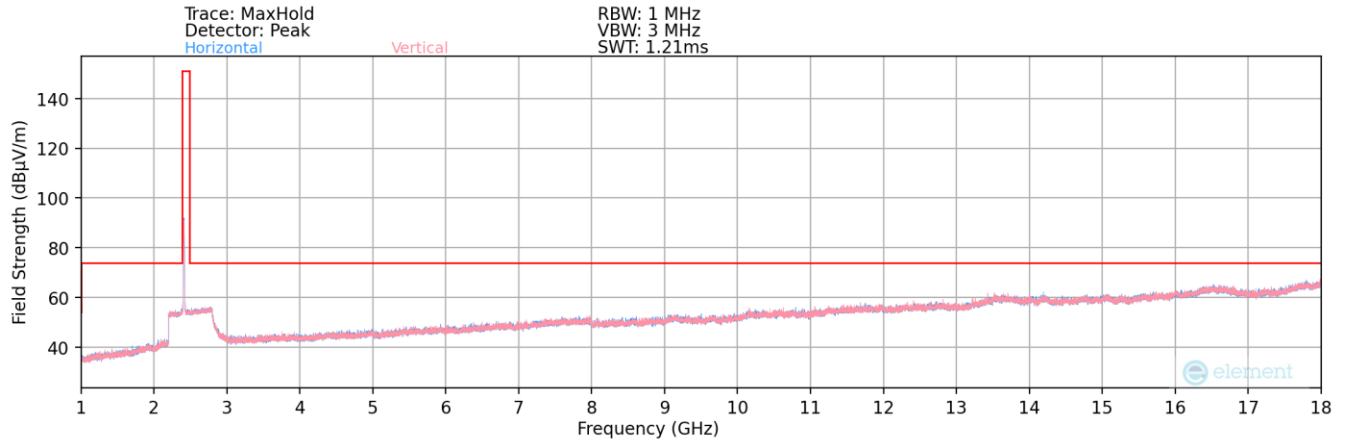

Plot 7-60. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1)

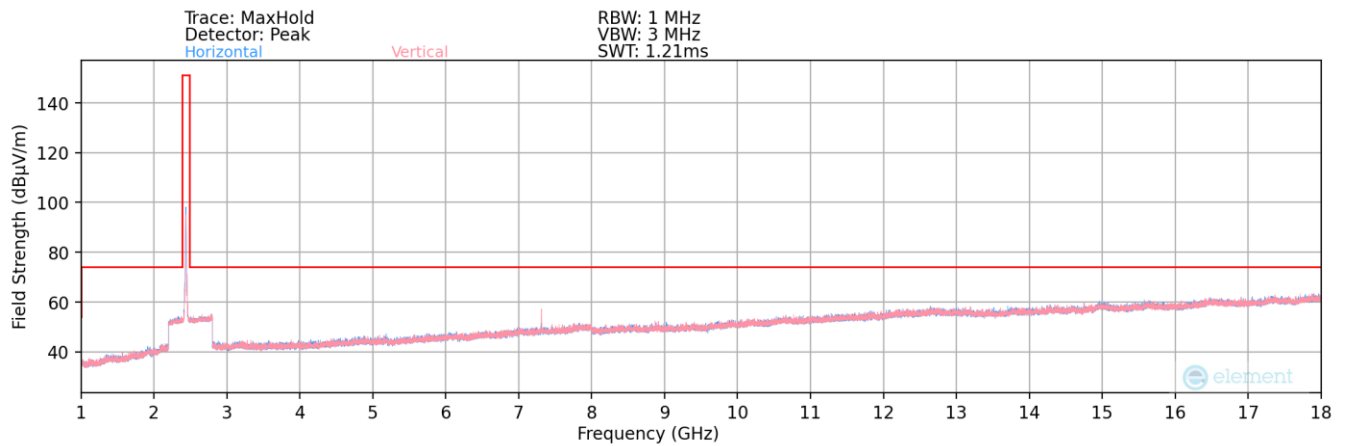


Plot 7-61. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6)

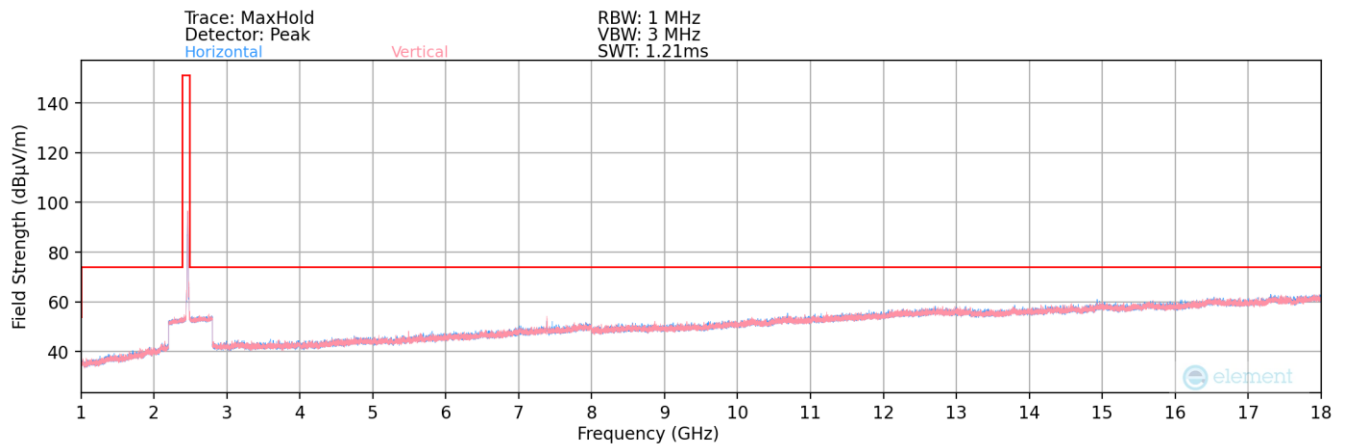

Plot 7-62. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 62 of 75

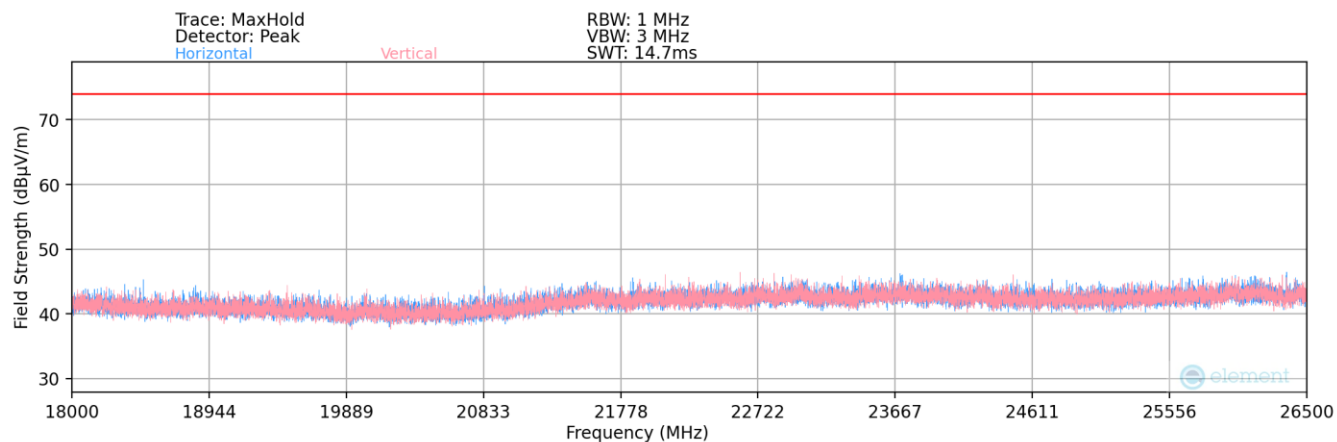

Plot 7-63. Radiated Spurious Plot above 18GHz

Worst Case Mode: 802.11b

Worst Case Transfer Rate: 1Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-80.62	9.07	35.45	53.98	-18.52
4824.00	Peak	H	-	-	-68.61	9.07	47.46	73.98	-26.51
12060.00	Avg	H	-	-	-83.62	22.33	45.71	53.98	-8.27
12060.00	Peak	H	-	-	-72.77	22.33	56.56	73.98	-17.42

Table 7-10. Radiated Measurements

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 63 of 75

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	127	105	-78.39	7.50	36.11	53.98	-17.87
4874.00	Peak	H	127	105	-69.09	7.50	45.41	73.98	-28.57
7311.00	Avg	V	105	35	-70.28	12.83	49.55	53.98	-4.43
7311.00	Peak	V	105	35	-64.05	12.83	55.78	73.98	-18.20
12185.00	Avg	H	-	-	-81.66	20.13	45.47	53.98	-8.51
12185.00	Peak	H	-	-	-71.51	20.13	55.62	73.98	-18.36

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	147	79	-78.92	7.67	35.75	53.98	-18.23
4924.00	Peak	H	147	79	-68.42	7.67	46.25	73.98	-27.73
7386.00	Avg	H	105	11	-75.71	12.70	43.99	53.98	-9.99
7386.00	Peak	H	105	11	-66.73	12.70	52.97	73.98	-21.01
12310.00	Avg	H	-	-	-84.18	20.19	43.01	53.98	-10.97
12310.00	Peak	H	-	-	-72.57	20.19	54.62	73.98	-19.36


Table 7-12. Radiated Measurements

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 64 of 75

Radiated Restricted Band Edge Measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting. Plots showing an RBW of 100 kHz are for channel integration used in average measurements. All other measurements were performed using an RBW of 1 MHz in accordance with the requirements.

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

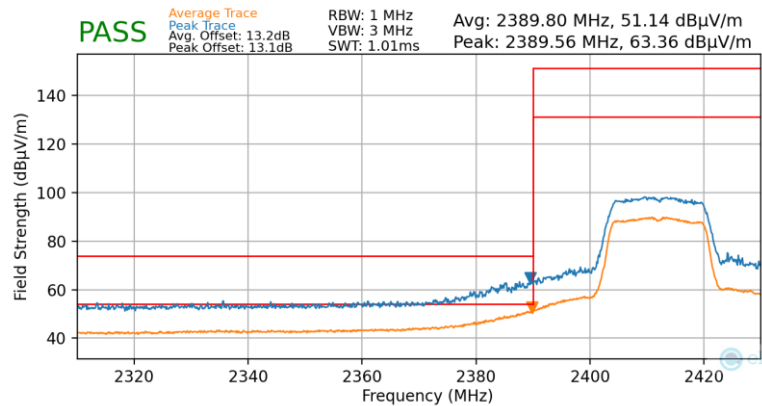

Plot 7-64. Radiated Restricted Lower Band Edge Measurement (Average & Peak)


Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2452MHz
Channel: 9

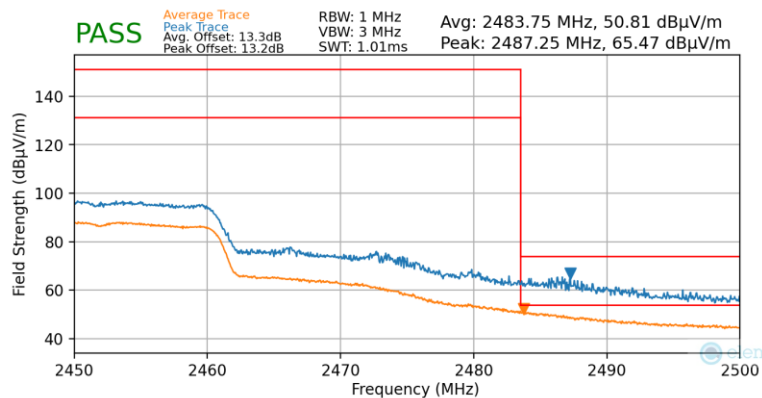

Plot 7-65. Radiated Restricted Upper Band Edge Measurement (Average & Peak)


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 65 of 75

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

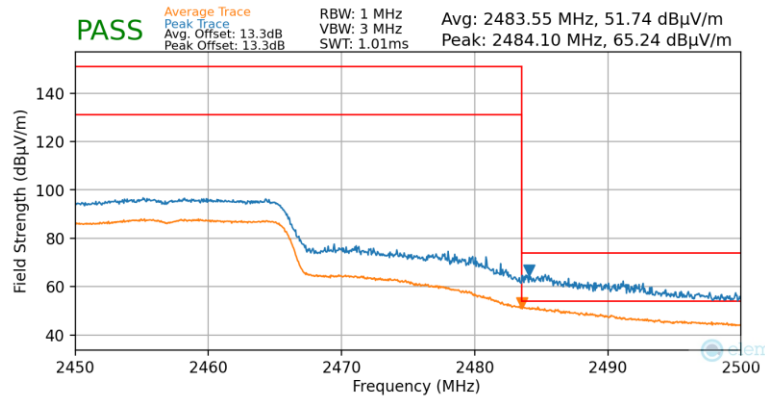

Plot 7-66. Radiated Restricted Upper Band Edge Measurement (Average & Peak)


Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

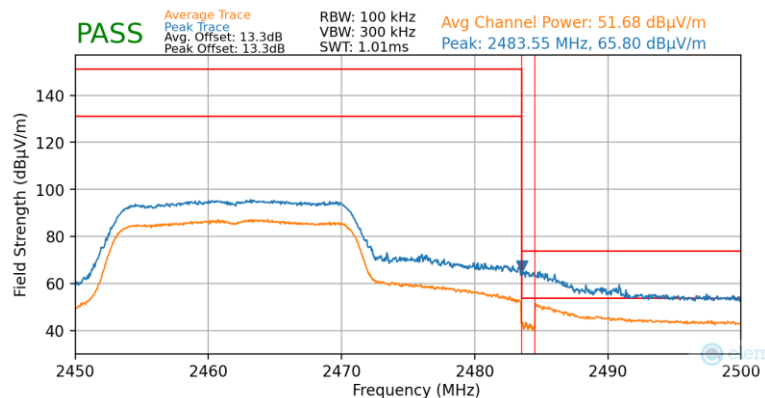

Plot 7-67. Radiated Restricted Upper Band Edge Measurement (Average & Peak)


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 66 of 75

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

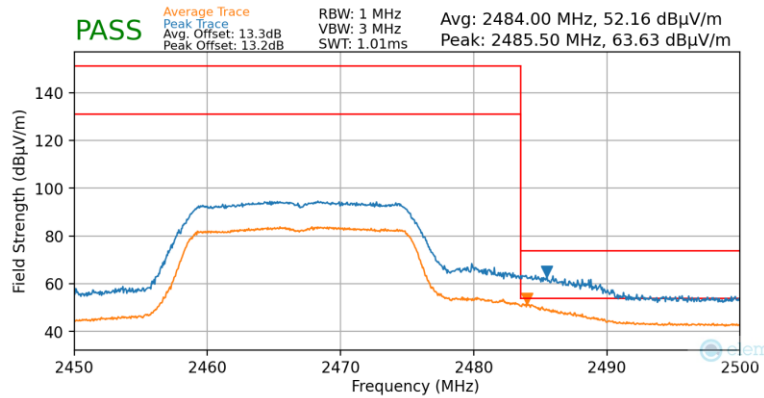

Plot 7-68. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

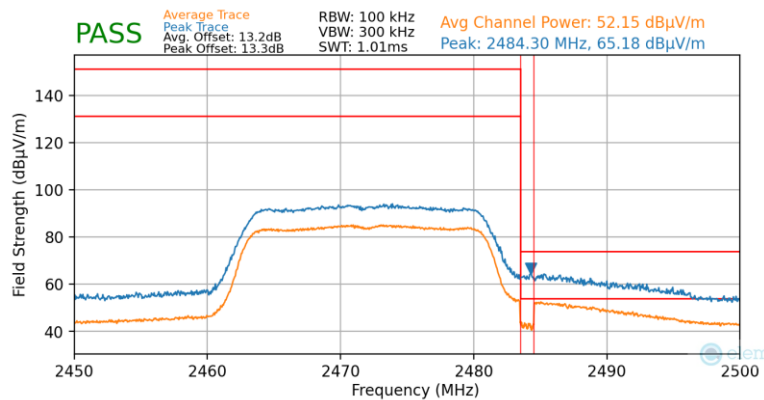

Plot 7-69. Radiated Restricted Upper Band Edge Measurement (Average & Peak)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 67 of 75

7.8 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-13. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 68 of 75

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


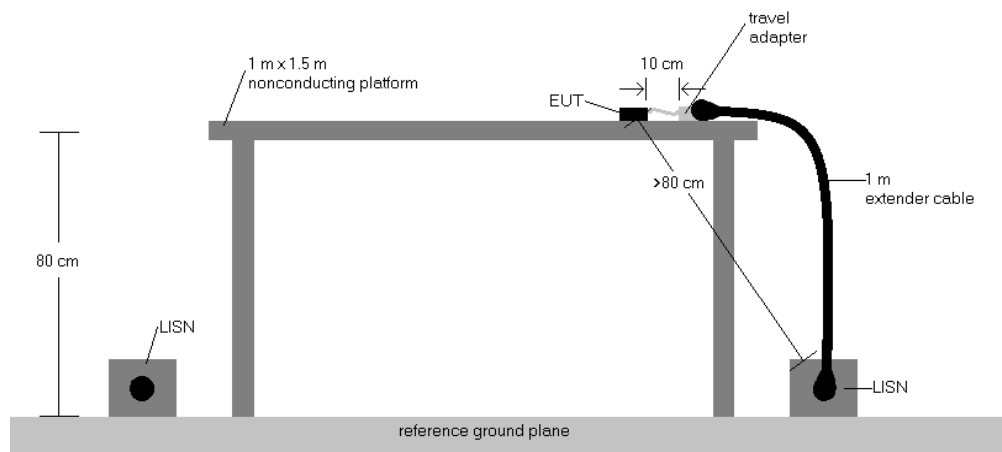


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 69 of 75		

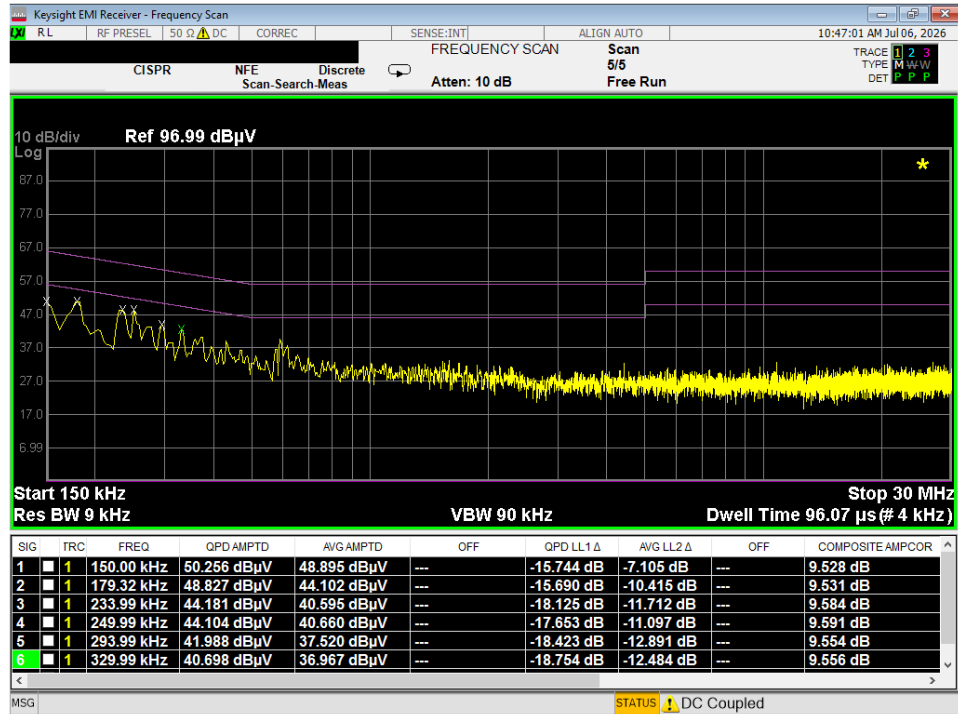

Plot 7-70. Line Conducted Plot with 802.11b (L1)

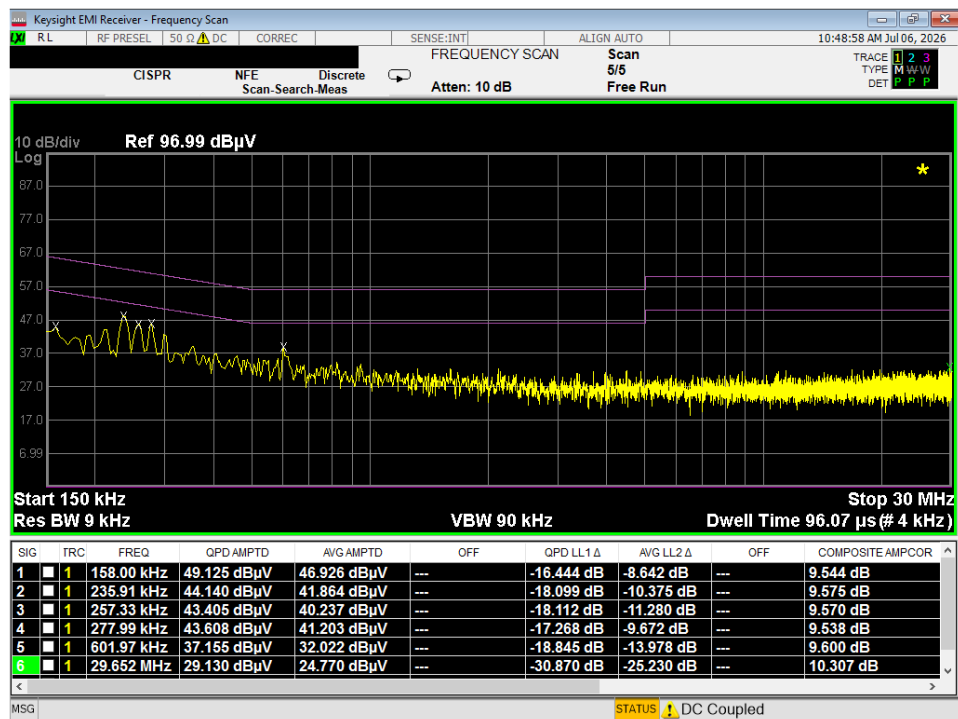

Plot 7-71. Line Conducted Plot with 802.11b (N)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 70 of 75

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Garmin Portable Digital Transceiver FCC ID: IPH-A5168, IC: 1792A-A5168** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED Rules. The data referenced from **FCC ID: IPH-05168** (Model: **A05168**) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: IPH-A5168**.

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 71 of 75

9.0 APPENDIX A – DATA REFERENCING SPOT-CHECKS


The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes

1. Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – AA5168

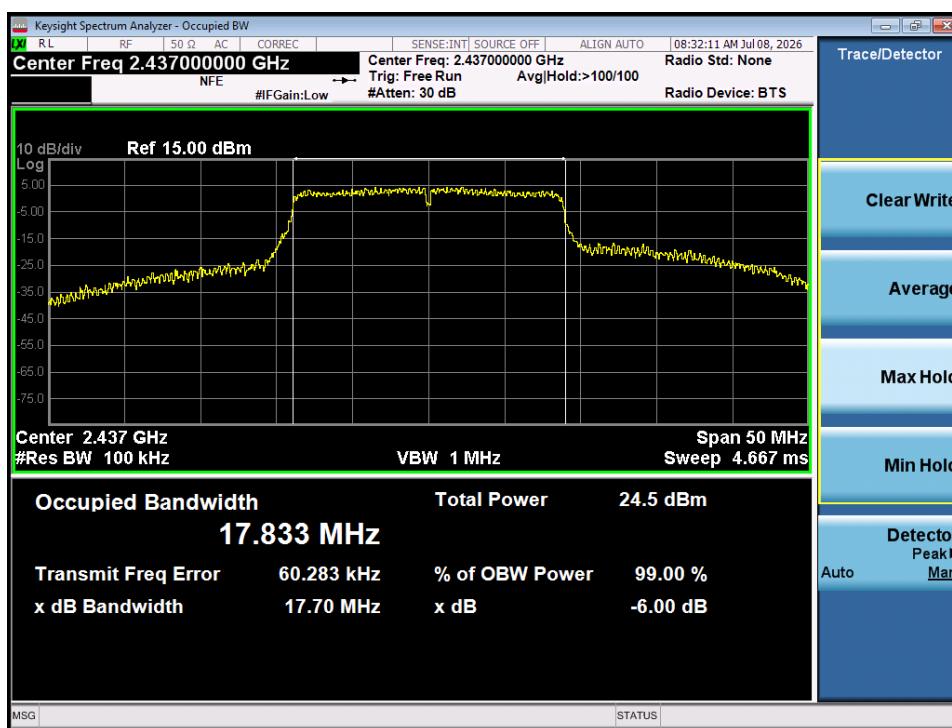

Plot 9-1. 6dB Bandwidth Plot (Spot-check)

2.4GHz WIFI (20MHz 802.11b SISO ANT1)				
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]	PLS
2437	6	Average	18.00	42.0

Table 9-1. Conducted Output Power Measurements (Spot-check)

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 72 of 75		



Plot 9-2. Power Spectral Density Plot (Spot-check)


FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 73 of 75

Radiated Spot-Checks – AA5168

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
7311.00	Avg	V	105	35	-73.08	12.83	46.75	53.98	-7.23
7311.00	Peak	V	105	35	-65.41	12.83	54.42	73.98	-19.56


Table 9-2. RSE Measurements (Spot-check)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

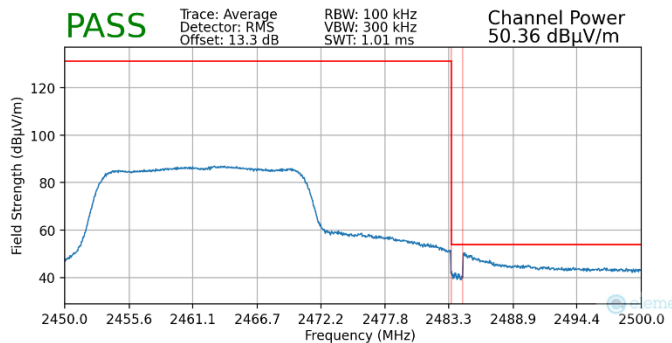

Plot 9-3. Radiated Restricted Upper Band Edge Measurement (Average) – Spot-check


Worst Case Mode: 802.11g
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

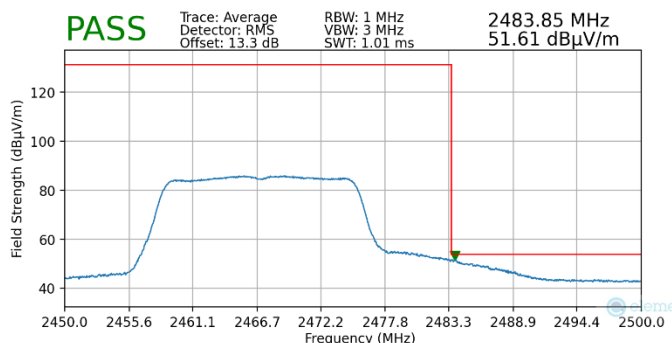

Plot 9-4. Radiated Restricted Upper Band Edge Measurement (Average) – Spot-check

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 74 of 75		

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

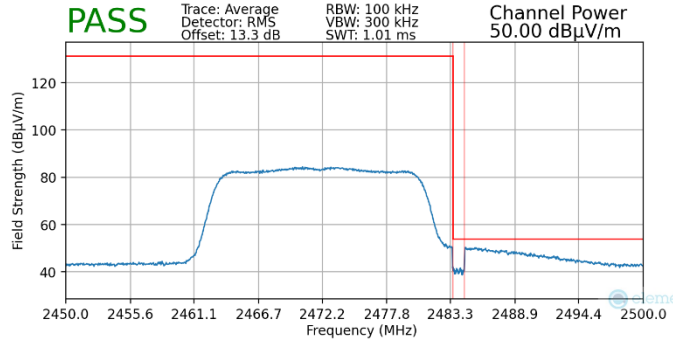

Plot 9-5. Radiated Restricted Upper Band Edge Measurement (Average) – Spot-check

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: IPH-05168	Variant Model: IPH-A5168	Deviation (dB)	Max Deviation (dB)	Pass/Fail
15.247(b)(3)	Conducted Output Power	802.11b Ch.6 - AVG	dBm	30	18.04	18	-0.04	3	PASS
15.247(e)	Power Spectral Density	802.11b Ch.6	dBm/3kHz	8	4.755	5.41	0.66	3	PASS
2.1049, 15.247(a)(2)	6dB Bandwidth	802.11n Ch.6	MHz	0.5	17.67	17.7	0.03	N/A	PASS
15.209	Radiated Spurious Emissions	802.11b Ch.6 - 7311MHz - Average	dBuV/m	53.98	49.55	46.75	-2.80	3	PASS
15.209	Radiated Band Edge Emissions	802.11n Ch.11 - Average	dBm	53.98	51.68	50.36	-1.32	3	PASS
		802.11g Ch.12 - Average	dBm	53.98	52.16	51.61	-0.55	3	PASS
		802.11n Ch.13 - Average	dBm	53.98	52.15	50	-2.15	3	PASS

Table 9-3. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: IPH-A5168 IC: 1792A-A5168	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 2/3/2026 - 7/8/2026	EUT Type: Portable Digital Transceiver	Approved by: Technical Manager
Test Report S/N: 1M2606290055-14.IPH	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.	Page 75 of 75		