

Appendix A: SAR Test Plots

RF SAFETY LABORATORY

DUT: AA5170; SN: 00043

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Extremity	Flat, BACK, 0.00	2.4 GHz WIFI	WiFi (802.11b): DSSS, DBPSK, 1.0 Mbps, 99.9% DC, 10415	2.4 GHz	Ch. 11	2462.000	6.8, 6.79,6.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-22	23.7	22.6	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.8	39.4	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0.03
Power Drift [dB]	0.04
Peak SAR (Extrapolated) [W/kg]	0.220
M2 /M1 [%]	77.0
Dist 3dB Peak [mm]	5.4

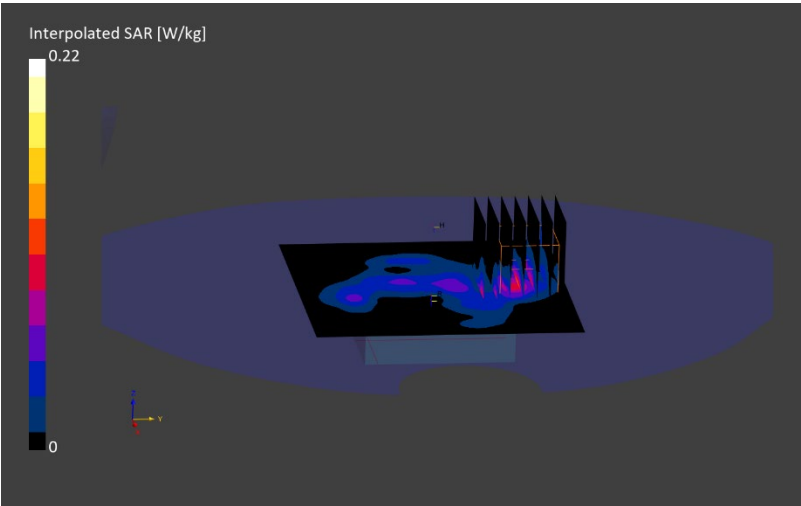

RF SAFETY LABORATORY

DUT: AA5170; SN: 00043

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Channel Number	Frequency [MHz]	ConvF (x,y,z)
Head	Flat, FRONT, 10.00	2.4 GHz Bluetooth	Bluetooth: BR, DH5, GFSK, 10032	2.4 GHz	Ch. 0	2402.000	6.8, 6.79,6.4

Test Setup


Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-06-03	21.9	21.9	17.0.4.7034	Twin-SAM V8.0 – 2159	Head Simulating Liquid	1.72	39.0	EX3DV4 – SN7857, 2025-12-09	DAE4ip Sn1838, 2025-12-04

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	35.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR1g [W/Kg]	0.005
Power Drift [dB]	0.13
Peak SAR (Extrapolated) [W/kg]	0.046
M2/M1 [%]	12.6
Dist 3dB Peak [mm]	2.3

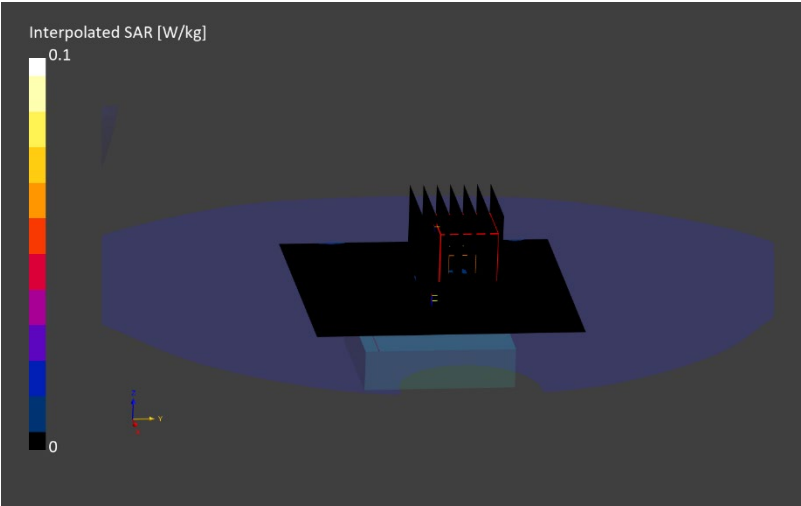

RF SAFETY LABORATORY

DUT: AA5170; SN: 00043

Test Conditions

Exposure Condition	Position, Test Distance [mm]	Band	Signal, UID	Ant.	Frequency [MHz]	ConvF (x,y,z)
Extremity	Flat, BACK, 0.00	NFC	CW, 0	NFC	13.600	14.3, 16.56,15.27

Test Setup

Test Date	Ambient Temp [°C]	TSL Temp [°C]	Measurement SW	Phantom	Type	Cond. [S/m]	TSL Perm.	Probe, Cal. Date	DAE, Cal. Date
2026-05-20	22.8	23.4	16.4.0.5005	ELI V8.0 – 2216	Head Simulating Liquid	0.752	52.9	EX3DV4 – SN7872, 2025-08-08	DAE4ip Sn1843, 2025-07-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Grading Ratio	N/A	1.5
MAIA	Y	Y

Measurement Results

psSAR10g [W/Kg]	0
Power Drift [dB]	0.09
Peak SAR (Extrapolated) [W/kg]	0.003
M2/M1 [%]	12.0
Dist 3dB Peak [mm]	0.0

