

Test Report 2025-81

Version B

Issued 29 Dec 2025

Project GCL-0885

Model Identifier: AA5206

Primary Test Standard(s):

CFR 47, FCC Part 15.247

RSS-247 Issue 4

Garmin Compliance Lab

Garmin International

1200 E 151st Street

Olathe Kansas 66062 USA

Client-supplied Information

FCC ID: IPH-A5206

IC ID: 1792A-A5206



See section 6 of this report regarding the presence or absence of accreditation logos or marks on this cover page.

1. Summary

The equipment or product described in section 5 of this report was tested at the Garmin Compliance Lab according to standards listed in section 6. This report focuses on the Bluetooth low energy, ANT and IEEE802.11 radios treated as DTS devices. The results are as follows.

Parameter	Description	Key Performance Values	Result	Data starts at page
Radio Modulation	Summary of the kinds of communication this radio can achieve, as stated by the client. [RSS-GEN at Annex A item10b]	Digitally modulated spread spectrum at rates as high as 72.2 Mbps.	Reported	N/A
Hopping Channels	The radio manages its use of channels appropriately. [15.247(a)(1); RSS-247 at 5.1]	N/A. The radios described in this report are not subjected to the Frequency Hopping rules.	N/A	N/A
DTS Bandwidth	The nature of the radio signal is broadband, being at least 500 kHz wide. [15.247(a)(2); RSS-247 at 5.2(a)]	The 6 dB bandwidth is 781.5 kHz or greater.	PASS	13
Other Bandwidths	Regulatory agencies also require the reporting of signal bandwidths using alternate processes. [2.202; RSS-GEN at 6.7]	These values are reported but have no actual performance requirements.	Reported	16
Transmit Power	The transmit power presented to the antenna is no greater than 1 Watt or 30 dBm. The effective radiated power is limited to 4 Watts or 36 dBm EIRP. [15.247(b); RSS-247 at 5.4(d)]	The maximum transmit power is 17.21 dBm or 52.61 mW.	PASS	23
Antenna Gain	The radio should not focus too much energy in any direction. Unless additional rules are applied, the antenna gain is no greater than 6 dBi. [15.247(b)(4) and (c)]	NT. The client stated that the antenna gain was -2.26 dBi and will document antenna gain separately.	NT	NT
Unwanted (Spurious) Emissions	The radio should not provide too much radio energy to the antenna at frequencies beyond its intended frequency band. [15.247(d); 15.209, RSS-247 at 5.5, RSS-Gen at 8.9]	Emissions outside the band must meet the 'Class B' limits of 15.209 or be reduced at least 30 dB from in-band levels. The margin to the 'Class B' limit was 1.90 dB or greater.	PASS	26
Adjacent Restricted Bands	The radio must not emit in certain designated restricted frequency bands to the transmission band above a set of limit values. This entry focuses on bands adjacent to the operating band. [15.247(d) and 15.205; RSS-247 at 3.3]	Emissions in the adjacent restricted bands were at least 1.31 dB below the applicable limits. Compliance for the remaining restricted bands is demonstrated by the spurious emission data.	PASS	80

Power Spectral Density	The radio must not focus too much radio energy in a narrow frequency band. [15.247(e); RSS-247 at 5.2(b)]	The limit is 8 dBm in a 3 kHz band. The strongest emission level was 7.97 dBm in a band of at least 20 kHz equal to -0.27 dBm in 3 kHz.	PASS	102
Hybrid Systems	A radio that is both frequency hopping and digitally modulated should satisfy a combination of system rules. [15.247(f); RSS-247 at 5.3]	N/A. The radios described in this report are not subjected to the Hybrid System rules.	N/A	N/A
Frequency Hopping Rules	Frequency hopping systems have additional functional requirements. [15.247(g) and (h); RSS-247 at 5.1]	N/A. The radios described in this report are not subjected to the Frequency Hopping rules.	N/A	N/A
Radio Safety	The radio emissions must meet public health & safety guidelines related to human exposure. [15.247(i) and 1.1307; RSS-Gen at 3.4]	NT. Client will report radio energy safety results separately.	NT	NT
Frequency Stability	The radio tuning must be robust over a range of temperature and supply voltage conditions. [RSS-Gen at 6.11]	Radio emissions remained within the allowed radio band under all environmental conditions tested.	NT	NT
Unwanted Emissions (Mains Conducted)	While transmitting, the emissions conducted into the power mains must not be too strong. [15.207, RSS-Gen at 8.8]	Emissions other than the fundamental and harmonics must meet the 'Class B' limits. The measured emissions had at least 15.09 dB of margin.	PASS	106

NT (Not Tested) means the requirement may or may not be applicable, but the relevant measurement or test was not performed as part of this test project.

N/A (Not Applicable) means the lab judged that the test sample is exempt from the requirement.

Table 1: Summary of results

Report Organization

For convenience of the reader, this report is organized as follows:

1. Summary
2. Test Background
3. Report History and Approval
4. Test Sample Modifications and Special Conditions
5. Description of Equipment Tested
6. Test Standards Applied
7. Measurement Instrumentation Uncertainty
8. Selected Examples of Calculations
9. Environmental Conditions During Test
10. 3m RF Chamber Block Diagrams

Annex: Test records are provided for each type of test, following the order and page numbering stated in the summary table. Concluding notes appear on the final page of this report.

Due to confidentiality, certain material (such as test setup photographs) has been removed from this report and placed in GCL Test Report 2025-83. That report is treated as a part of this document by way of this reference.

2. Test Background

2.1 The Test Lab

The testing reported here was performed at the Garmin Compliance Lab, an organization within Garmin International, located at 1200 E 151st St, Olathe Kansas, USA. The contact telephone number is +1.913.397.8200.

2.2 The Client

The testing was performed on behalf of the Garmin design group, a separate organization located at 1200 E 151st St, Olathe Kansas, USA. Witnesses from the business group included: None.

2.3 Other Information

Test Sample received: 14 Nov 2025

Test Start Date: 17 Nov 2025

Test End Date: 07 Dec 2025

The data in this test report apply only to the specific samples tested.

Upon receipt all test samples were believed to be properly assembled and ready for testing.

3. Report History and Approval

This report was written by Majid Farah and initially issued on 23 Dec 2025 as Version A.

Version B, issued on 29 Dec 2025, added FCC "Lab Registration Number" in section 6.4. This version includes a revision to the 6 dB DTS bandwidth test record on page 13 to clarify the laboratory's justification for identifying the worst-case scenario. Version B was written by Majid Farah.

Report Technical Review:

Majid Farah
Senior EMC Engineer



GCL only

Report Approval:

Shruti Kohli
Senior Manager Operations



GCL only

4. Test Sample Modifications and Special Conditions

The following special conditions or usage attributes were judged during test to be necessary to achieve compliance with one or more of the standards listed in section 6 of this report:
None.

The following modifications to the test sample(s) were made, and are judged necessary to achieve compliance with one or more of the standards listed in section 6 of this report:

Modification 1

Detailed Description: All samples firmware was updated from version 6.01 to 6.03.

Date applied: 01 Dec 2025 at 12.00 noon

Reason for this modification: Power reduction for IEEE802.11 for g mode ch.11 and 12, n mode ch. 11, 12, and 13 to meet restricted band limits.

The following tests were performed without this modification being present, and the presence or absence of the modification is judged by the lab and client to have no significant effect on these specific tests, or that the changes created more margin to the limits: all tests not related to IEEE 802.11 g and n modes; tests for g and n modes on channels where no power change was made; conducted transmit power, occupied bandwidth, DTS bandwidth, power spectral density, band edge gap measurement.

5. Description of the Equipment Tested

5.1 Unique Identification

Product Model	AA5206
Serial Numbers Tested	3621679832, 3621679818, 3621679383

The product tested is a mobile device for collecting and sharing data with the user and nearby electronic devices.

The client affirmed that the test samples will be representative of production in all relevant aspects.

5.2 Key Parameters

EUT Input Power:	5 Vdc
I/O Ports:	USB
Radio Transceivers:	IEEE 802.11 b/g/n, Bluetooth, Bluetooth Low Energy, ANT, NFC
Radio Receivers:	GPS L1, Galileo E1, BeiDou, GLONASS
Primary Functions:	Data collection and communication
Typical use:	Body worn
Highest internal frequency:	2.484 GHz
Highest digital frequency:	192 MHz
Firmware Revision	6.03

5.3 Operating modes

During test, the EUT was operated in one or more of the following modes.

M4 (BleTx): Bluetooth Low Energy radio transmitting consistently on a selected channel at 1 Mbps or 2 Mbps.

M6 (AntTx): ANT radio transmitting consistently on a selected channel.

M8 (WiFiTx): The IEEE 802.11 b/g/n radio transmitting consistently on a selected channel, with a specified modulation type, and data rate.

M11 (RxWiFi): The IEEE 802.11 b/g/n radio was set to receive signals on a selected channel, with a specified modulation type, and data rate.

M13 (RxBle): Bluetooth Low Energy radio was set to receive signals on a selected channel at 1 Mbps or 2 Mbps.

M14 (RxANT): ANT radio was set to receive signals on a selected channel.

M15 (NfcRead): The NFC 13.56 MHz transceiver is in type A-“reader periodic” mode, and is actively linked to a companion NFC Tag.

M16 (NfcTest): The NFC 13.56 MHz transceiver transmitting consistently a type A modulation.

M17 (NfcIdle): The NFC 13.56 MHz transceiver is in type A-“reader periodic” mode, but not actively linked to a companion device.


M18 (Gnss): The Global Navigation Satellite System receiver is monitoring the GNSS bands, attempting to detect a constellation and determine location. Unless otherwise noted, the EUT was provided simulated GNSS signals representing one of more constellation types. In addition, the EUT was reporting signal levels and satellite data to an attached computer to monitor link health.

5.4 EUT Arrangement

During test, the EUT components and associated support equipment were selected including the following arrangement sets.

A1: The test sample is attached to a Mains-powered device connected that provides dc power to the sample and user data over a cable. See the block diagram in Figure 1.

A2: The test sample is attached to a Mains-powered device connected that provides dc power to the sample over a cable but no user data. See the block diagram in Figure 1.

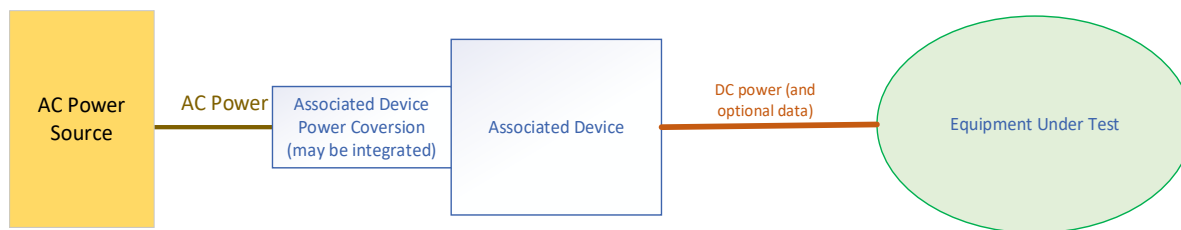

*This interconnect drawing is not to scale.
It does not indicate the placement of devices.*

Figure 1: Block diagram of equipment arrangement A1 and A2

A3: The test sample operates from its battery and no external physical connections. No block diagram is needed for this arrangement.

5.5 Associated Equipment (AE) used

Description	Manufacturer	Model	Serial Number
USB C power adaptor	Phihong (Garmin)	AQ27A-59CFA	362-00118-00
Laptop	Dell	Precision 5540	3JYG33
AC/DC Power Adapter	Dell	HA130PM130	0V363H-CH200-78G-0DC1-A01
NFC tag	Garmin	Approach CT1	part# 010-03908-00

Table 2: List of associated equipment that may have been used during test

5.6 Cables used

Description	From	To	Length	EMC Treatment
USB C to custom cable	Power and/or Data source	EUT	0.5 m	None

Table 3: List of cables that may have been used during test

6. Test Standards Applied

6.1. Accredited Standards

The following test or measurement standards were applied and are within the scope of the lab's accreditation. All results in this report that cite these standards are presented as Accredited results consistent with ISO/IEC 17025.

CFR 47, FCC Part 15, Subpart C
ANSI C63.10: 2020 and ANSI C63.10: 2020 +Cor 1: 2023
RSS-GEN Issue 5 Amd 2
RSS-247 Issue 4

6.2 Non-accredited Standards

The following test or measurement standards were applied and are either outside the scope of the lab's accreditation, or were performed in such a way that results are not presented as being fully accredited.

FCC Part 2.202
TRC-43 Issue 3

6.3 Variances

The following variances were applied to standards cited in this section.

Where different test standards cover the same test parameter or phenomenon, and the standards have compatible differences, the stricter of the requirements is typically applied. For example, a consolidated limit may be applied to emission tests selecting the strictest of the limits at each frequency. Likewise, if one standard requires a vertical antenna sweep with boresighting and another does not, swept motion with boresighting will typically be used as it is the more stringent requirement.

Some standards that apply an Average detector provide a variety of methods to handle time-averaging, especially where the transmission is not continuous and the Duty Cycle (DC) is below a value such as 98%. The basic GCL process is to begin by applying an Average detector to the emission with the receiver in Max-Hold data mode. This Max Average method is worst-case compared to any of the methods of time-averaging provided. If the Max Average result complies with the limit, that result is provided in the test record and the emission judged to be compliant without additional detail. If the Max Average result is near or above the limit at one or more emission frequencies, then one of the appropriate time-averaging methods is applied to determine final compliance. When time-averaging is used, the test record will indicate which method of time-averaging was used.

Some standards ask for measurements made with a 'Time Domain Power' function, but that function is not defined in the standards. GCL addresses this gap as follows. Staff capture a zero-span Average detector data record of emission power, with a timespan covering a transmission burst. When the maximum power in the data record is clearly below the limit, this value will be reported. When the maximum power in the data record is near or above the limit, then the average of the power (in linear units) during a transmission burst is calculated and reported.

DISCLAIMER: In some test activities, the operation of a test or the result of a test depends on data provided by the client. The Garmin Compliance Lab disclaims responsibility for any error in the processes, results, or judgments in this report arising from incorrect client-provided data.

6.4 Laboratory Accreditation

The Garmin Compliance Lab, an organization within Garmin International, is registered with the US Federal Communication Commission (FCC) as:

Lab Registration Number: 273575
FCC Designation Number: US1311

The Garmin Compliance Lab, an organization within Garmin International, is recognized by the Canada Department of Innovation, Science, and Economic Development (ISED) under:

Company Number: 1792A
CAB Identifier: US0233

The Garmin Compliance Lab, an organization within Garmin International, is accredited by A2LA, Certificate No. 6162.01. The presence of the A2LA logo on the cover of this report indicates this is an accredited ISO/IEC 17025 test report. If the logo is absent, this report is not issued as an accredited report. Other marks and symbols adjacent to the A2LA logo are accreditation co-operations of which A2LA is a member under a mutual recognition agreement, and to which the Garmin Compliance Lab has been sublicensed.

7. Measurement Instrumentation Uncertainty

The lab has analyzed the sources of measurement instrumentation uncertainty. The analysis concludes that the actual measurement values cited in this report are accurate within the U_{LAB} intervals shown below with approximately 95% statistical confidence. Where the report shows a judgment that a test sample passes a test against a published limit based on these measured values, that judgment has a statistical confidence of 97.5% or greater. Measurement Instrumentation Uncertainty is one component of over-all measurement uncertainty, and other uncertainty components are not considered as part of this analysis.

The primary benchmark for measurement instrumentation uncertainty (MIU) in an electromagnetic compatibility (EMC) test lab is the set of U_{CISPR} values published in CISPR 16-4-2. In all cases where a U_{CISPR} value is published by CISPR, the analysis shows that U_{LAB} – this lab's estimated MIU – is better than the U_{CISPR} benchmark.

The secondary benchmark for MIU in an EMC lab performing radio transceiver tests is a set of uncertainty limit values published in various ETSI standards. In this report, U_{ETSI} is the most restrictive of the values found in the ETSI EN standards listed in section 5 of this report. The analysis principles are described in the ETSI TR documents listed there. In most cases U_{LAB} is better than the U_{ETSI} benchmark. Where U_{LAB} exceeds the U_{ETSI} benchmark cited here, that entry is preceded by an asterisk. When required by the ETSI EN standards, excess uncertainty will be added to the measurand before comparison to a limit. In an individual test report, staff may re-evaluate that excess uncertainty based on the uncertainty of the method used and the uncertainty limits of the actual ETSI EN standard being applied, and the revised uncertainty values will be shown in the test report.

Some measurement uncertainties analyzed and reported here are not addressed in CISPR 16-4-2 or the ETSI standards, as indicated by the entry 'None.'

Test Type	U_{LAB}	U_{CISPR}	U_{ETSI}
Conducted DC voltage	0.09% + 2 x LSDPV	None	1%
Conducted AC voltage below 500 Hz	1.0% + 3 x LSDPV	None	2%
Conducted Emissions, Mains Voltage	0.10% + 10 mV	None	None
Conducted Emissions, Mains Current	0.10% + 3 mA	None	None
Conducted Emissions, Mains Power	0.15% + 100 mW	None	None
Conducted Emissions, Power Mains, 9 kHz to 150 kHz	1.70 dB	3.8 dB	None
Conducted Emissions, Power Mains, 150 kHz to 30 MHz	1.48 dB	3.4 dB	None
Conducted Emissions, Cat 6 LCL, 150 kHz to 30 MHz	1.57 dB	5 dB	None
Conducted Emissions, Cat 5 LCL, 150 kHz to 30 MHz	3.06 dB	5 dB	None
Conducted Emissions, Cat 3 LCL, 150 kHz to 30 MHz	4.27 dB	5 dB	None
Radiated Emissions, below 30 MHz	0.88 dB	None	6 dB
Radiated Emissions, 30 MHz to 1000 MHz	2.79 dB	6.3 dB	6 dB
Radiated Emissions, 1 GHz to 18 GHz	2.54 dB	5.2 & 5.5 dB	6 dB
Radiated Emissions, 18 GHz to 26.5 GHz	2.68 dB	None	6 dB
Radiated Emissions, 26.5 GHz to 40 GHz	3.17 dB	None	6 dB
*Radio Signal Frequency Accuracy	1.55×10^{-7}	None	1.0×10^{-7}
Radio Signal Occupied Bandwidth	0.95%	None	5%
Radio Power or Power Spectral Density	0.98 dB	None	1 dB
Temperature	0.38 °C	None	1 °C
Barometric Pressure	0.38 kPa	None	None
Relative Humidity	2.85% RH	None	±5% RH
Signal Timing	The greater of these three... 0.63 µsec 0.01% of value 0.5 x LSDPV	None	None

Note: LSDPV stands for the Least Significant Digit Place Value reported. In the value 1470 msec, the least significant digit is the 7. It has a 10 msec place value. The LSDPV is thus 10 msec and the maximum error due to roundoff would be 5 msec. If the time value were reported as 1470 msec, the underscore indicates that the 0 is a significant figure and the error due to roundoff would be 0.5 msec. All digits provided to the right of a decimal point radix are significant.

8. Selected Example Calculations

Certain regulators require samples of the calculations that lead from the raw measurement to the final result for AC Mains conducted and unintended radiated emissions. The assumption is that the lab performs raw measurements, then adds, subtracts, multiplies, or divides based on transducer factors, amplifier gains, and losses in the signal transmission path. In this lab, our CISPR 16 Receiver does not work that way. The calibration factors and losses and gains are provided to the receiver as detailed data files. These factors are applied in the RF measurement path prior to the detector. But as a step in the lab measurement process, staff frequently verify that these factors are applied correctly. They make a measurement with the factors applied inside the receiver, then they disable the factors and remeasure the result manually adding in the various relevant factors.

The transmission loss is measured including the combined losses and gains of preamplifiers, cables, and any band-selective filters. In many cases above 1 GHz it is a negative value, indicating that the preamplifier gain is greater than these other losses.

Here are examples of these calculations. The data in these examples was not taken as part of this project:

8.1 AC Mains conducted emissions at 22 MHz

(Raw measurement) + (AMN factor) + (transmission loss) = Result

$$(7.145 \text{ dB}\mu\text{V}) + (9.812 \text{ dB}) + (0.216 \text{ dB}) = 17.173 \text{ dB}\mu\text{V}$$

8.2 Radiated Emissions at 630 MHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(2.25 \text{ dB}\mu\text{V}) + (27.80 \text{ dB/m}) + (2.89 \text{ dB}) = 32.94 \text{ dB}\mu\text{V/m}$$

8.3 Radiated Emissions at 2.7 GHz

(Raw measurement) + (Antenna factor) + (transmission loss) = Result

$$(43.72 \text{ dB}\mu\text{V}) + (32.22 \text{ dB/m}) + (-36.09 \text{ dB}) = 39.85 \text{ dB}\mu\text{V/m}$$

9. Environmental Conditions During Test

Environmental conditions in the test lab were monitored during the test period. Temperature and humidity are controlled by an air handling system. As information to the reader, the conditions were observed at the values or within the ranges noted below. For any tests where environmental conditions are critical to test results and require further constraints or details, the test records in the annex may provide more specific information.

Temperature:	20.6 to 22.9 °C
Relative Humidity:	41.5% to 49.3% (non-condensing)
Barometric Pressure	96.7 to 99.2 kPa

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
Barometer	Traceable	6453	240300703	9-Apr-2024	9-Apr-2027

Table 4: Environmental monitoring device

10. 3m RF Chamber Block Diagrams

The 3m chamber has three basic configurations which are shown in the figures below. These figures are not to scale.

Figure 1 shows a semi anechoic setup which is typically used for frequencies below 1 GHz. In this example, the antenna is mounted on a mast capable of 1-4 m elevation changes. If a preamplifier or RF filter is used, they are located at or just below floor level. The receiver is outside the chamber, typically in an adjacent separate shielded room.

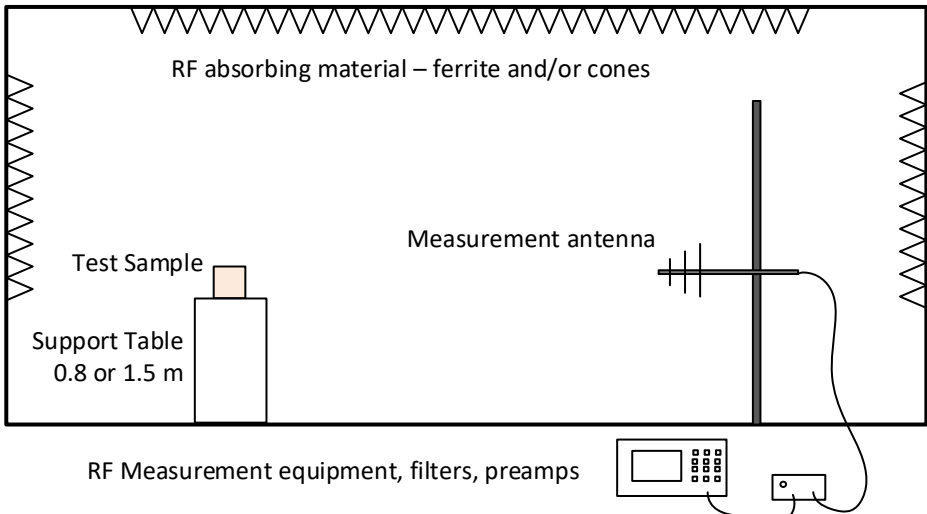


Figure 1: Typical configuration for measurements below 1 GHz

Figure 2 shows an FSOATS setup which is typically used for frequencies above 1 GHz but below an upper limit such as 14 or 18 GHz. In this example, the antenna is mounted on a mast capable of 1-4 m elevation changes and bore sighting. If a preamplifier or RF filter is used, they are located at or just below floor level. The receiver is outside the chamber, typically in an adjacent separate shielded room.

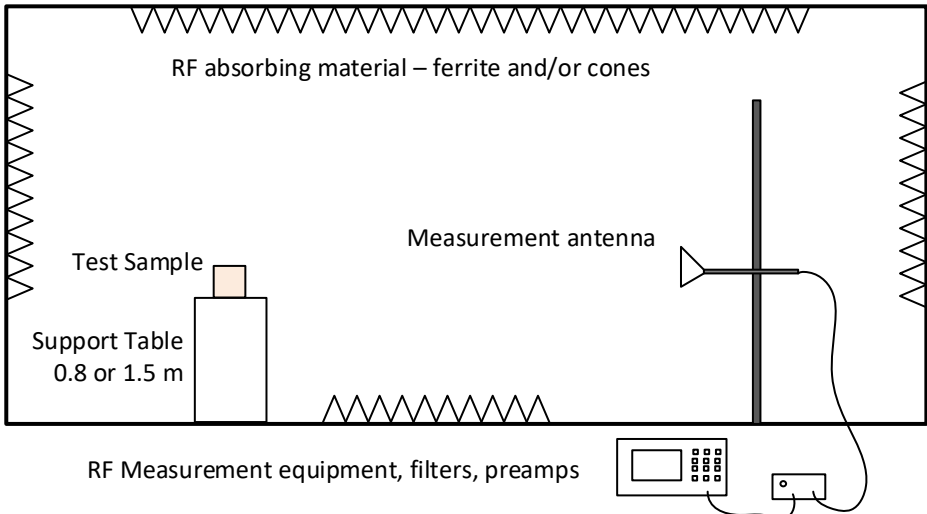


Figure 2: Typical configuration for measurements between 1 GHz and 14 GHz

Figure 3 shows an alternate FSOATS setup which is typically used for frequencies above 14 GHz. In this example, the antenna is mounted on a mast capable of 1-4 m elevation changes and bore sighting. A preamplifier is located on the mast just behind the antenna. The receiver is located in the chamber near floor level but outside the antenna beam. The receiver may be operated manually by an operator in the chamber and or remotely via an Ethernet connection.

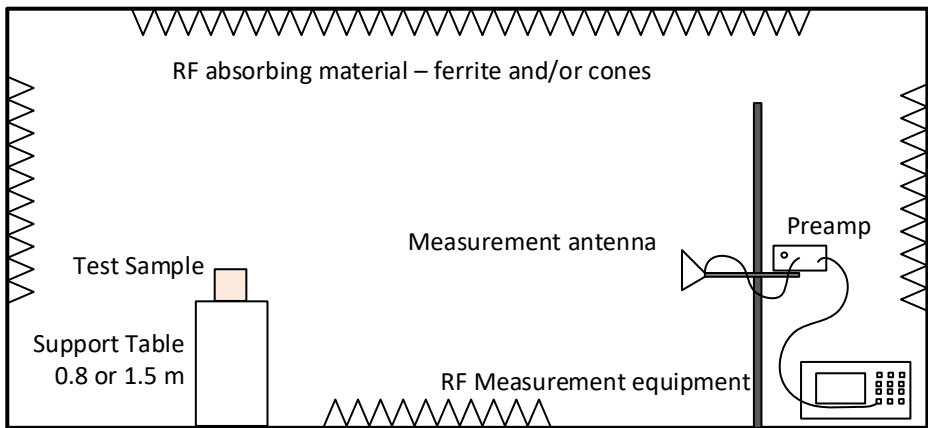


Figure 3: Typical configuration for measurements above 14 GHz

ANNEX

The remainder of this report is an Annex containing individual test data records. These records are the basis for the judgments summarized in section 1 of this report. The Annex ends with a set of concluding notes regarding use of the report.

Test Record

Transmitter Bandwidth Tests

Test IDs TR11, TR12, TR13

Project GCL-0885

Test Date(s) 19 Nov 2025
Test Personnel Jim Solum

Product Model AA5206
Serial Number tested 3621679383

Operating Mode M4 (BleTx), M6 (AntTx), M8 (Wi-FiTx)
Arrangement A2
Input Power 5Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Radio Protocol Bluetooth Low Energy (BLE), ANT, IEEE 802.11b
Radio Band 2400 to 2483.5 MHz

Pass/Fail Judgment: PASS

Test record created by: Majid Farah
Date of this record: 29 Dec 2025

The original record was in Version A. Version B of this test record describes the identification of the “worst-case” conditions as required by the applicable standard.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026

Table TR11.1: List of test equipment used

Test Software Used: Keysight PXE firmware version A.33.03

Test Method

During this test the transmitter output is fed directly, or through RF attenuators, to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified portion of the total power observed, and also identify parameters such as the edge frequencies for that bandwidth and the center frequency error. The spectrum is scanned many times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Laboratories are permitted to justify worst-case operational scenarios in which parameters such as data rate, bandwidth, modulation, coding rate, and number of data streams may vary. In the following measurements, the lowest data rate for each modulation, corresponding to the 99% occupied bandwidth (OBW), is considered the worst-case condition. Accordingly, BLE 1 Mbps and IEEE 802.11b represent the worst-case scenarios.

Test Setup

This block diagram shows the test equipment setup.

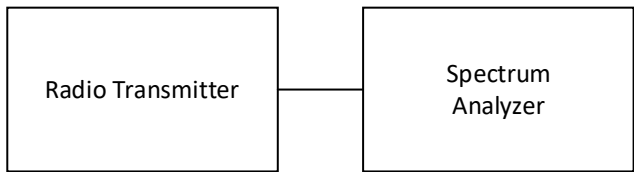


Figure TR11.1: Test setup

Test Data

The data for each test is summarized below, followed by the spectral data for each case highlighted in yellow.

The DTS Bandwidth is measured using a spectrum analyzer operating with a defined resolution bandwidth. The analysis finds the smallest continuous range of frequencies containing all emissions within 6 dB of the highest value. The requirement is that the DTS Bandwidth be greater than 500 kHz. As such the lowest measured bandwidth is worst case. All radios reported here are judged to have met this requirement.

	2402	2440	2480
BLE 1 Mbps	781.5	805.4	892.1
ANT	820.9	803.4	865.7

Table TR11.2: Summary of bandwidth data in kHz for ANT and BLE modes

	Ch1	Ch6	Ch11	Ch13
B1	9.640	10.110	10.140	9.697

Table TR11.3: Summary of bandwidth data in MHz for IEEE 802.11 WiFi modes

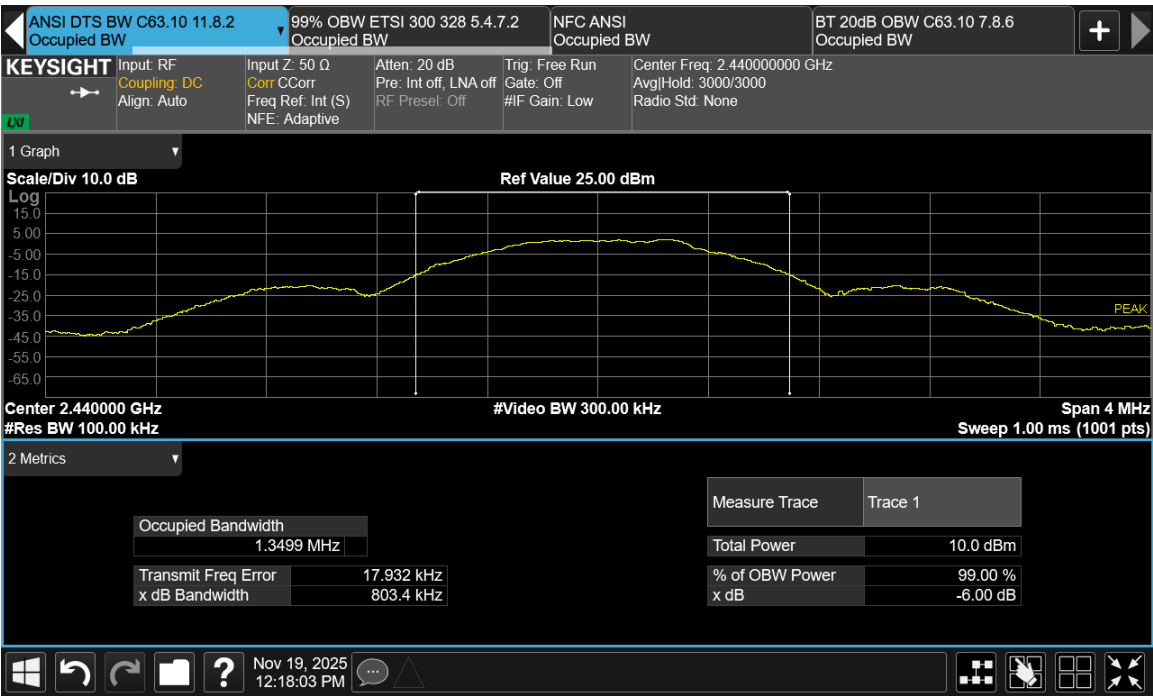


Figure TR11.2: Bandwidth data for ANT at mid channel (2440 MHz)

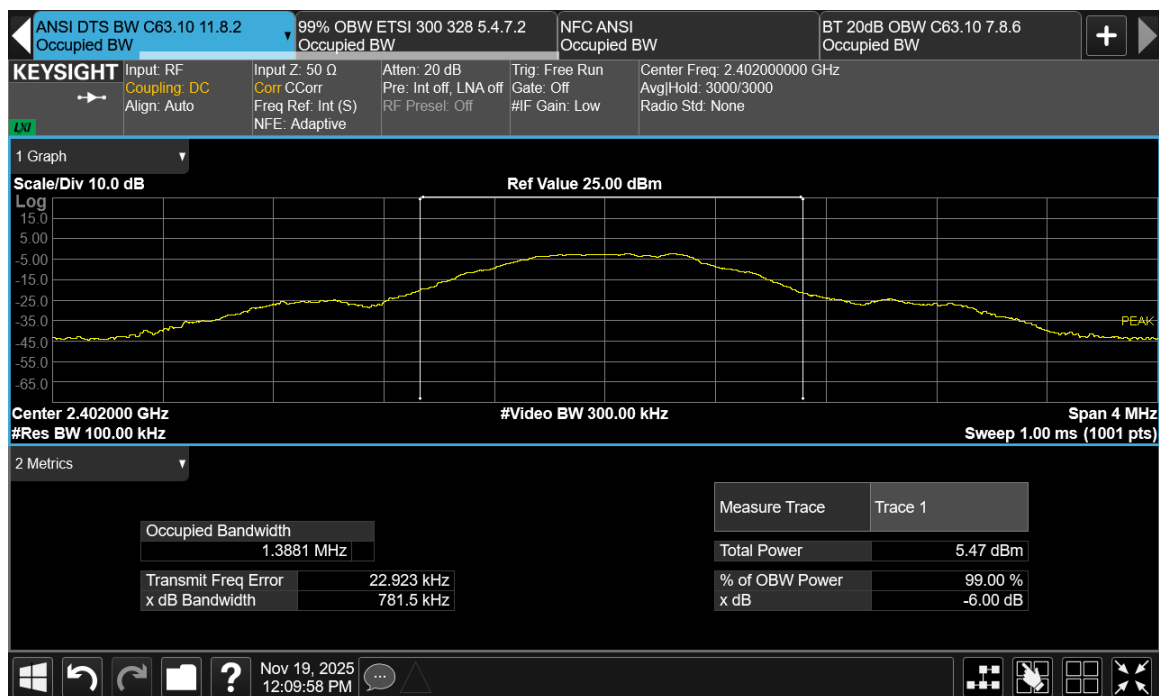


Figure TR11.3: Bandwidth data for BLE 1 Mbps at low channel (2402 MHz)

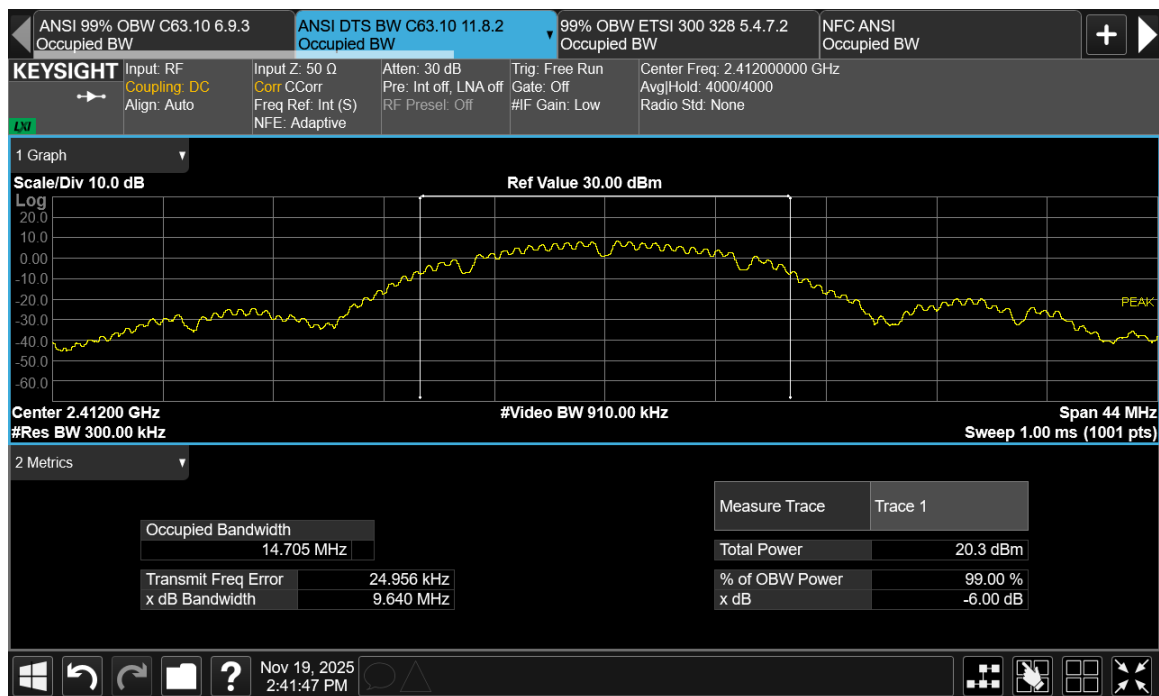


Figure TR11.4: Bandwidth data for 802.11b 1 Mbps at channel 1

This line is the end of the test record.

Test Record
Transmitter Bandwidth Tests
Test IDs TR15, TR16, TR17
Project GCL0885

Test Date(s) 19 Nov 2025
Test Personnel Jim Solum

Product Model AA5206
Serial Number tested 3621679383

Operating Mode M4(BleTx), M6(AntTx), M8(WiFiTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 2.202, ANSI C63.10, TRC-43, RSS-GEN (as noted in Section 6 of the report).

Radio Protocol Bluetooth Low Energy (BLE), ANT, IEEE 802.11 b/g/n (WiFi)
Radio Band 2480 to 2483.5 MHz

Pass/Fail Judgment: Reported

Test record created by: Jim Solum
Date of this record: 04 Dec 2025

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026

Table TR15.1 Equipment Used

Software used: Keysight PXE software A.33.03

Background

There are regulatory requirements to present two additional types of bandwidth analyses: 99% Occupied Bandwidth and Necessary Bandwidth. There are no limits or functional requirements around these data, beyond a reporting requirement. The contents of this test record are for information, and do not affect compliance of the devices that are the subject of this report.

For BLE operating at 2 Mbps, the lowest operating frequency was 2404 MHz, and the highest operating frequency was 2478 MHz. For all other Bluetooth, BLE, and ANT radios reported here, the lowest operating frequency was 2402 MHz, and the highest operating frequency was 2480 MHz.

Test Setup

This block diagram shows the test equipment setup.

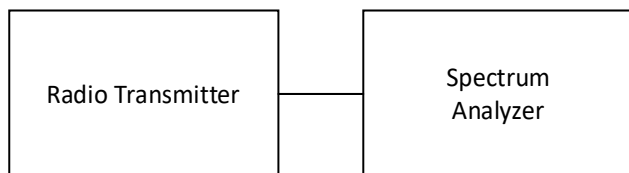


Figure TR15.1: Test setup

Occupied Bandwidth, 99% Test Method

During this test the transmitter output is fed directly, or through RF attenuators, to the spectrum analyzer. The analyzer has a built-in capability to identify the minimum bandwidth that contains a specified percentage of the total power observed. The spectrum is scanned hundreds of times so that the varied effects of modulation are appropriately assessed. Since the focus is on the relative distribution of energy across a range of frequencies, the absolute amplitudes recorded during this test are not relevant and may not include cable losses or attenuation factors.

Occupied Bandwidth, 99% Test Data

The data for each type of bandwidth is summarized below, followed by the spectral data for the cases highlighted in yellow. The analysis threshold for this test was the bandwidth containing 99% of the observed power using the ANSI C63.10 method. The standards require testing a frequency near the bottom, middle, and top of the band. The measured bandwidth data are in bold font and have MHz as their units of measure.

	2402 (04)	2440	2480 (78)
BLE 1 Mbps	1.425	1.328	1.387
BLE 2 Mbps	2.482	2.501	2.481
ANT	1.283	1.318	1.338

Table TR15.2: Summary of 99% Occupied Bandwidth Data for ANT and BLE modes

	Ch1	Ch6	Ch11	Ch13
B1	NT	15.229	NT	NT
B2	14.762	15.231	15.817	14.405
B5.5	NT	14.777	NT	NT
B11	NT	14.862	NT	NT
G6	16.460	17.085	16.788	16.196
G9	NT	17.022	NT	NT
G12	NT	16.935	NT	NT
G18	NT	16.774	NT	NT
G24	NT	16.696	NT	NT
G36	NT	16.740	NT	NT
G48	NT	16.635	NT	NT
G54	NT	16.643	NT	NT
NMCS0	NT	17.695	NT	NT
NMCS1	17.109	17.755	17.539	16.888
NMCS2	NT	17.709	NT	NT
NMCS3	NT	17.656	NT	NT
NMCS4	NT	17.602	NT	NT
NMCS5	NT	17.561	NT	NT
NMCS6	NT	17.588	NT	NT
NMCS7	NT	17.526	NT	NT

Table TR15.3: Summary of 99% Occupied Bandwidth Data for IEEE 802.11 b/g/n modes

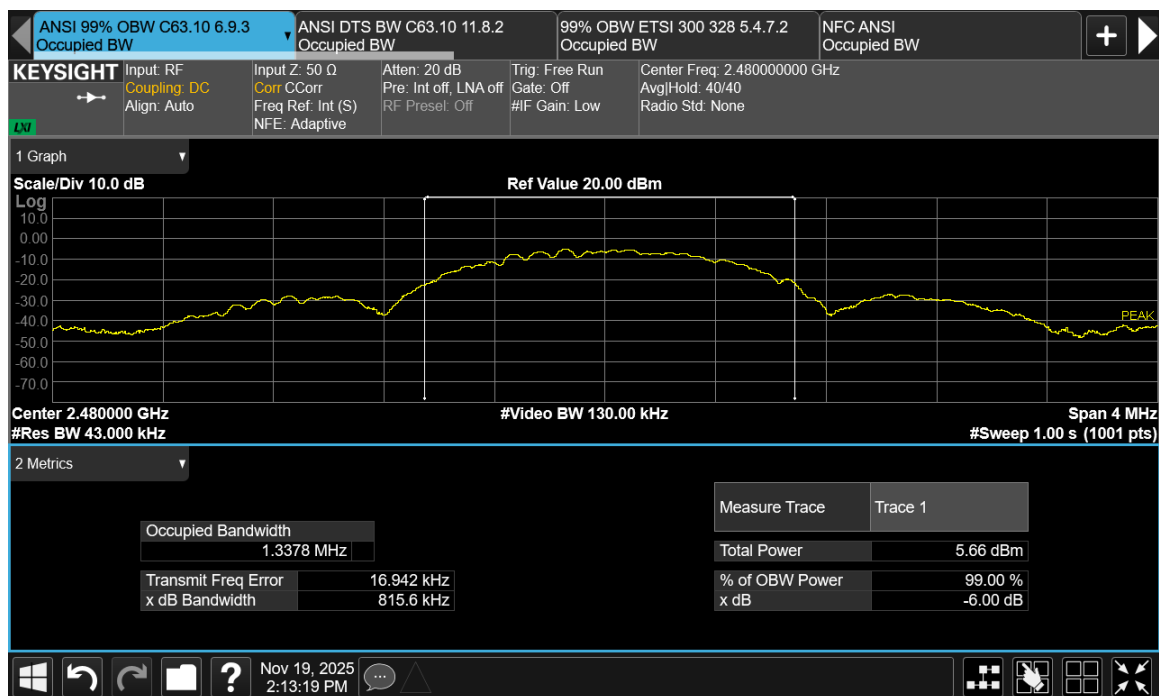


Figure TR15.2: Occupied bandwidth data for ANT at high channel (2480 MHz)

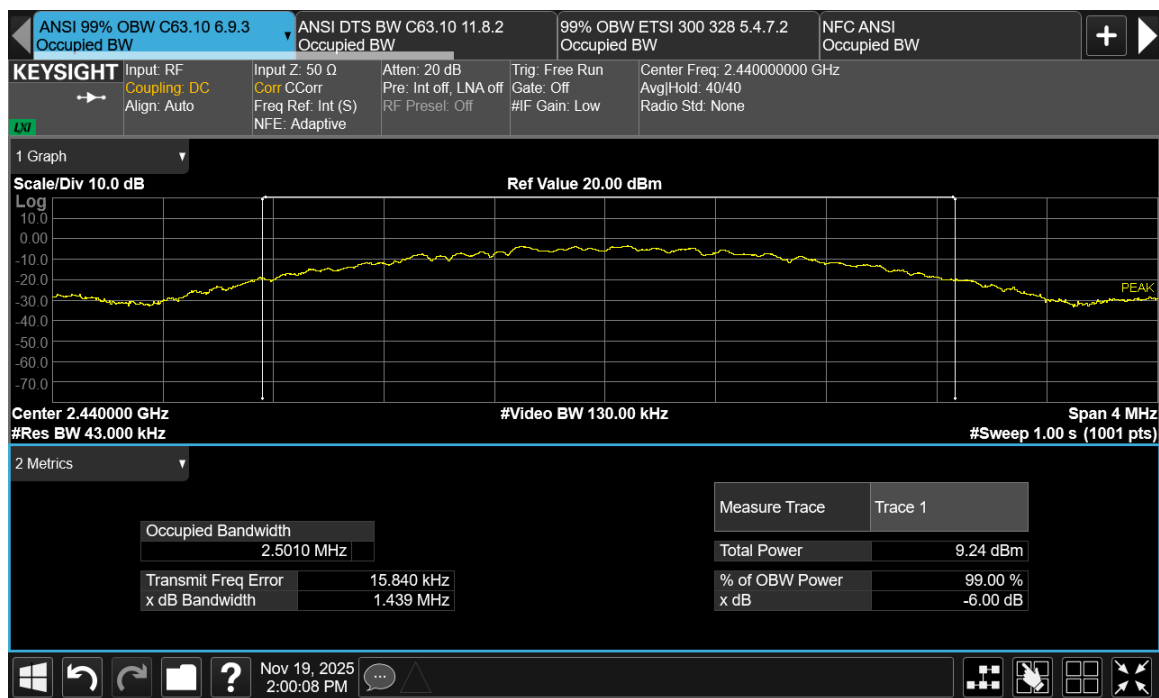


Figure TR15.3: Occupied bandwidth data for BLE 2 Mbps at mid channel (2440 MHz)

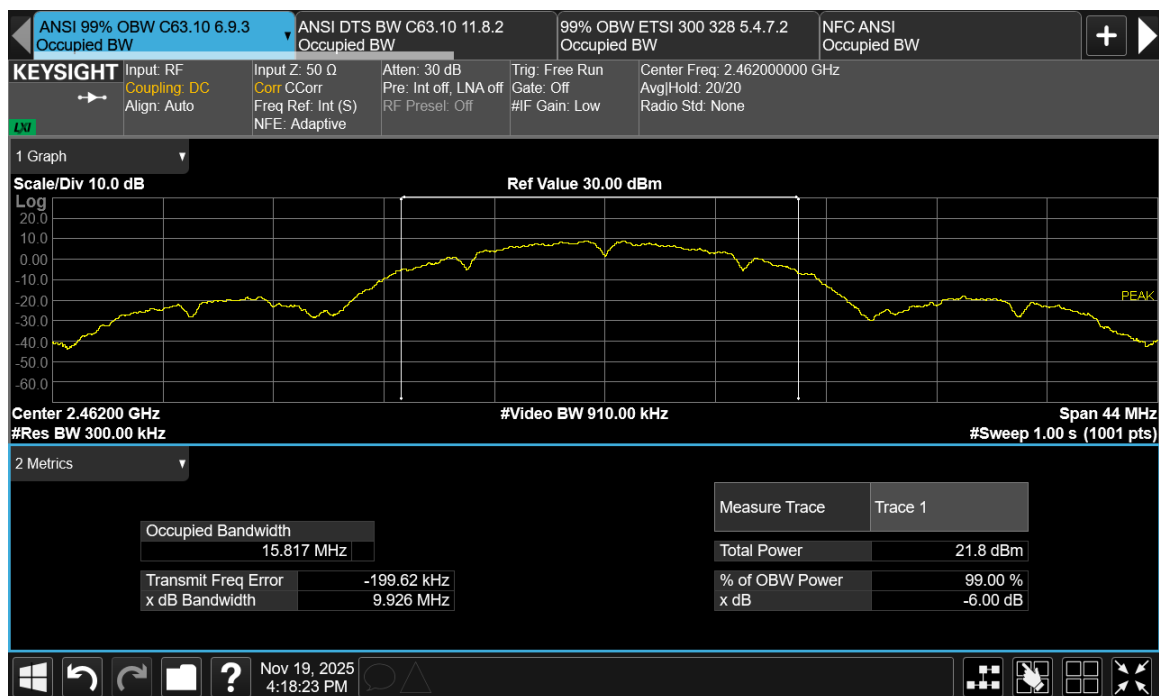


Figure TR15.4: Occupied bandwidth data for 802.11b 2 Mbps at channel 11

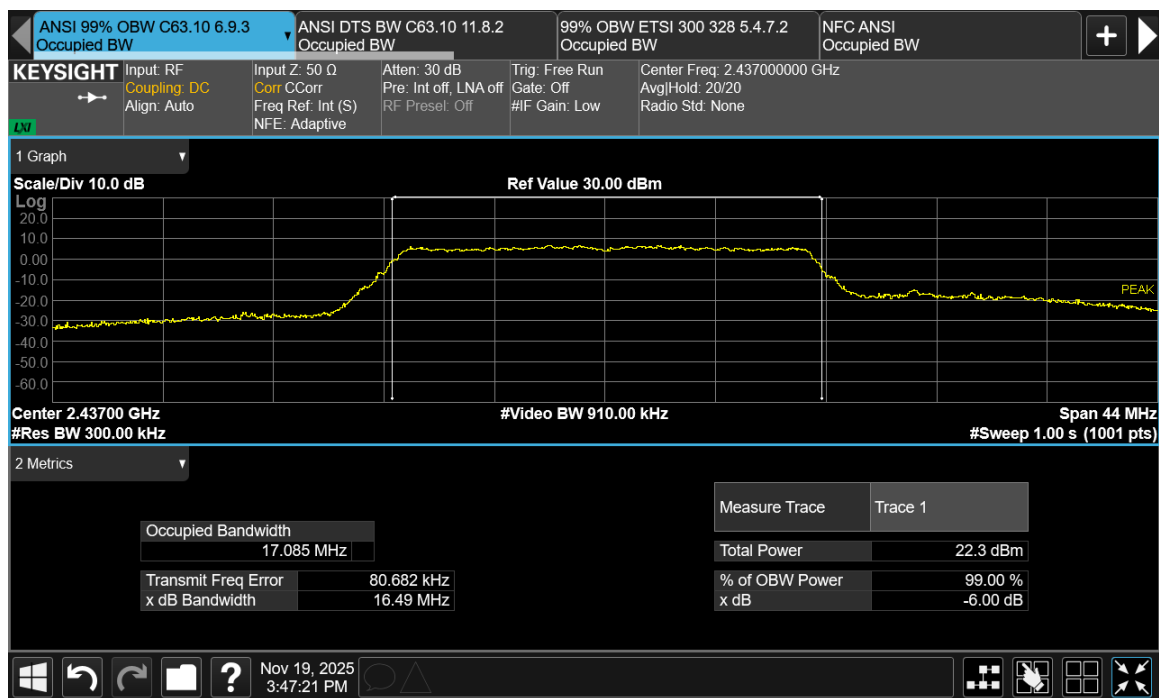


Figure TR15.5: Occupied bandwidth data for 802.11g 6 Mbps at channel 6

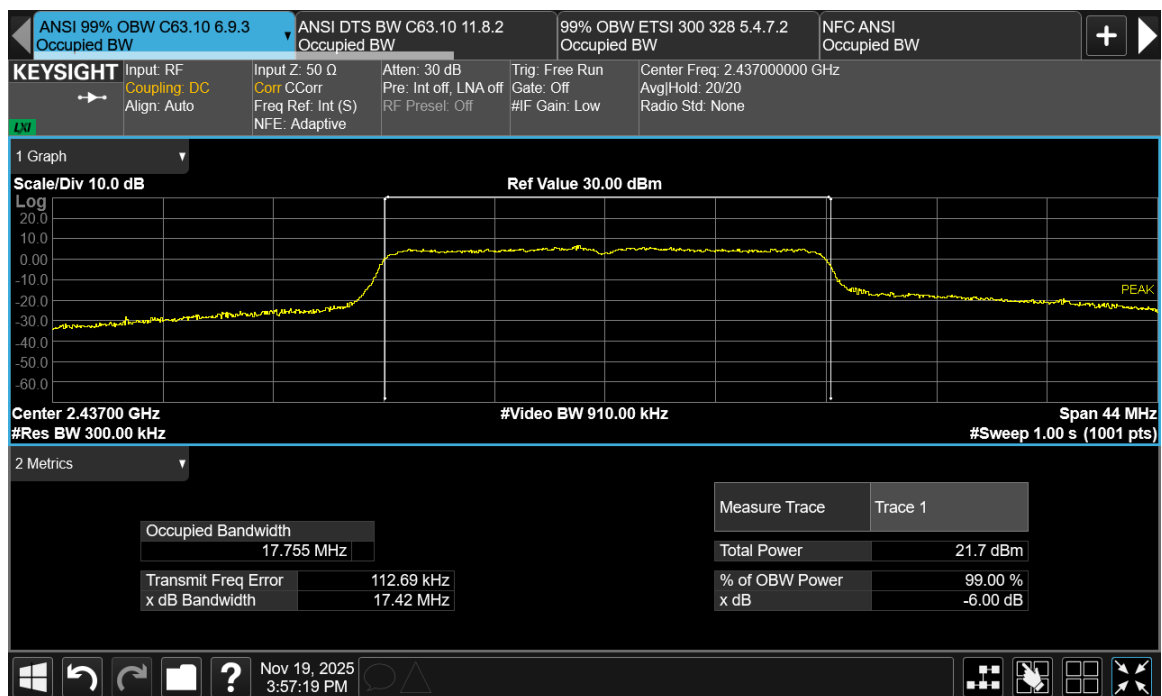


Figure TR15.6: Occupied bandwidth data for 802.11n MCS1 at channel 6

Necessary Bandwidth Calculations

The Necessary Bandwidth is a theoretical value based on the specifications for a communication protocol, rather than the hardware implementation and a subsequent lab measurement. The analysis methods in FCC Part 2.202 and TRC-43 are the same for NFC, Bluetooth, ANT, and IEEE 802.11b WiFi. However, they differ for IEEE 802.11g and 11n systems because the Canadian TRC-43 standard provides different analysis methods for Orthogonal Frequency Division Multiplexing systems (OFDM). The tables below will show the analysis for most of the radios signals as a combined approach, then separately analyze the results for IEEE 802.11g and n systems. The tables below may include radio protocols that are not part of the product being evaluated.

NFC (Near Field Communication) at 13.56 MHz uses continuous wave telegraphy without tone modulation. The bit rate 'B' in the FCC and TRC equations is split into two parts here. B is the baud rate. C is a coding factor. C=1 for Miller encoding where the transition speed is as high as the bit rate, or C=2 for Manchester encoding where the transition speed is as high as twice the bit rate). K is a factor set to 3 for non-fading circuits under the standards. The Necessary Bandwidth, B_N is then:

$$B_N = BCK$$

Radio Type	B (kbaud)	C	K	B_N (kHz)
NFC A	106	1	3	318.0
NFC B	212	2	3	1272.0
NFC B	424	2	3	2544.0

Table TR15.100: Necessary Bandwidth for NFC

The radio modulation schemes for Ant, for the various Bluetooth protocols, and for IEEE 802.11 b WiFi are a mix of Phase Shift Key (PSK) and Quadrature Amplitude Modulation (QAM) techniques. The Necessary Bandwidth calculations use the equations from 47CFR Part 2.202(g) table section 6. We have set the variable K=1, which leaves the equation for both PSK and QAM as:

$$B_N = 2R / \log_2(S)$$

where B_N is the Necessary Bandwidth, R is the bit rate, and S is the number of signaling states.

Radio Type	R Mbps	K	S	LogBase2 of (S)	B_N (MHz)
ANT / ANT+	1	1	2	1	2

Table TR15.101: Necessary Bandwidth for ANT and ANT+ Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	Method	R Mbps	K	S	LogBase2 of (S)	B _N (MHz)
Bluetooth	BR	GFSK	1	1	2	1	2
	EDR2	Pi/4 DPSK	2	1	4	2	2
	EDR3	8DPSK	3	1	8	3	2
BLE	1Mbps	GFSK	1	1	2	1	2
	2Mbps	DQPSK	2	1	4	2	2

Table TR15.102: Necessary Bandwidth for Bluetooth Radio Protocols (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	B _N (MHz)
802.11 b	1	1	1	2	1	2
	2	2	1	4	2	2
	5.5	5.5	1	4	2	5.5
	11	11	1	4	2	11

Table TR15.103: Necessary Bandwidth for IEEE 802.11 b Radio Protocol (FCC and TRC-43)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	B _N (MHz)
802.11 a/g	6	6	1	2	1	12
	9	9	1	2	1	18
	12	12	1	4	2	12
	18	18	1	4	2	18
	24	24	1	16	4	12
	36	36	1	16	4	18
	48	48	1	64	6	16
	54	54	1	64	6	18
802.11 n/ac	MCS0	7.2	1	2	1	14.4
	MCS1	14.4	1	4	2	14.4
	MCS2	21.7	1	4	2	21.7
	MCS3	28.9	1	16	4	14.5
	MCS4	43.3	1	16	4	21.7
	MCS5	57.8	1	64	6	19.3
	MCS6	65	1	64	6	21.7
	MCS7	72.2	1	64	6	24.1
	MCS8	86.7	1	256	8	21.7

Table TR15.104: Necessary Bandwidth for IEEE 802.11 a, g, n, and ac 20 MHz Radio Protocols (FCC)

Radio Type	Sub-type	R Mbps	K	S	LogBase2 of (S)	B _N (MHz)
802.11 n/ac	MCS0	15	1	2	1	30.0
	MCS1	30	1	4	2	30.0
	MCS2	45	1	4	2	45.0
	MCS3	60	1	16	4	30.0
	MCS4	90	1	16	4	45.0
	MCS5	120	1	64	6	40.0
	MCS6	135	1	64	6	45.0
	MCS7	150	1	64	6	50.0
	MCS8	180	1	256	8	45.0
	MCS9	200	1	256	8	50.0

Table TR15.105: Necessary Bandwidth for IEEE 802.11 n and ac 40 MHz Radio Protocols (FCC)

As a note, the bit rate for IEEE 802.11 n or ac WiFi is calculated based on the IEEE standard's short guard interval of 400 nsec. If only the long guard interval of 800 nsec were implemented, the bit rates would decrease by a small amount.

The TRC-43 method for OFDM signals simply multiplies the number of subcarriers, K, and the subcarrier spacing, N_s. In both cases, N_s is 312.5 kHz. The count of subcarriers includes nulls. So for example, 802.11 n uses 4 pilot subcarriers, 52 data subcarriers, and one null suppressed subcarrier in the middle for 57 total subcarrier channels.

$$B_N = N_s * K$$

Radio Type	Mode	N _s (MHz)	K	B _N (MHz)
802.11a/g	20 MHz	0.3125	53	16.6
802.11n/ac	20 MHz	0.3125	57	17.8
802.11n/ac	40 MHz	0.3125	117	36.6

Table TR15.106: Necessary Bandwidth for IEEE 802.11 a, g, n, and ac Radio Protocols (TRC-43)

This line is the end of the test record.

Test Record

Transmitter Power, Duty Cycle

Test IDs TR03a, TR04a, TR05

Project GCL0885

Test Date(s) 17, 18 Nov 2025
Test Personnel Jim Solum

Product Model AA5206
Serial Number 3621679383

Operating Mode M4(BleTx), M6(AntTx), M8(WiFiTx),
Arrangement A2
Input Power 5Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Antenna Gain -2.26 dBi, as reported by the client
Radio Protocol Bluetooth Low Energy, ANT, IEEE 802.11b/g/n

Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 26 Nov 2025

Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
RF Power Sensor	Keysight	U2063XA	MY65340001	29-Oct-2025	29-Oct-2026

Table TR03a.1: List of test equipment used

Software used: Keysight BenchVue 2024; KeysightPowerAnalysisV2.xlsx

Test Method

The basic test standards provide options for the time evaluation test method. The following test methods were applied.

ANSI C63.10: 11.9.2.3.2 (Gated average power with broadband power meter)

Duty Cycle data will be included if it is relevant to test methods used for other standards such as Average Detector methods in the ANSI standards that apply duty cycle correction.

Transmit Power and Timing Data

Each measurement is made conducted from the antenna port with the transmitter on a specified channel and in a selected transmission protocol. Where standards cited here apply harmonized test methods and different limits, the more strict limit has applied.

This test record will show results based on one or more of the following methods of analyzing the same set of raw power data vs. time. The ANSI peak power method looks for the highest power in the data record, with results in dBm units. The ANSI gated average power method determines the average power in the data record but only during times when the transmitter is keyed on, with results in dBm units. Under the US and Canadian rules a limit of 30 dBm is applied independent of which ANSI method is used. RF exposure limits are not addressed in this test record. Many of these standards also care about duty cycle, the portion of the time when the transmitter was actually transmitting. That is presented as a percentage, and no limit applies. All of these results are drawn from the same trace of Tx power data. The results are shown below.

ANSI Power

Frequency	(MHz)	2402	2403	2404	2440	2476	2478	2479	2480
BT Low Energy	1 Mbps	-0.24	NT	4.05	4.14	3.85	-0.06	NT	-0.54
BT Low Energy	2 Mbps	NT	NT	3.67	4.14	3.85	-0.07	NT	NT
ANT	----	-0.23	-0.22	4.04	4.14	NT	4.22	-0.06	-0.08

Table TR03a.2: Transmit Power, ANSI (Average Power) method, in dBm for BLE1 Mbps, BLE2 Mbps and ANT

Mode	Speed	1	6	10	11	12	13
B	1	NT	16.47	NT	NT	NT	NT
B	2	NT	16.39	NT	NT	NT	NT
B	5.5	17.00	16.50	17.21	17.14	13.16	12.39
B	11	NT	16.44	NT	NT	NT	NT
G	6	NT	14.51	NT	NT	NT	NT
G	9	NT	14.42	NT	NT	NT	NT
G	12	14.86	14.78	14.75	13.79	12.48	11.16
G	18	NT	13.75	NT	NT	NT	NT
G	24	NT	14.44	NT	NT	NT	NT
G	36	NT	11.54	NT	NT	NT	NT
G	48	NT	10.51	NT	NT	NT	NT
G	54	NT	10.45	NT	NT	NT	NT
N	MCS0	13.98	14.27	14.50	13.52	11.18	10.09
N	MCS1	NT	14.34	NT	NT	NT	NT
N	MCS2	NT	14.38	NT	NT	NT	NT
N	MCS3	NT	14.04	NT	NT	NT	NT
N	MCS4	NT	11.36	NT	NT	NT	NT
N	MCS5	NT	10.48	NT	NT	NT	NT
N	MCS6	NT	10.44	NT	NT	NT	NT
N	MCS7	NT	9.01	NT	NT	NT	NT

Table TR03a.3: Transmit Power, ANSI Average Power method, in dBm for IEEE 802.11 B,G, N

Other Power Analyses

Frequency	(MHz)	2402	2403	2404	2440	2476	2478	2479	2480
BT Low Energy	1 Mbps	99.6%	NT	99.6%	99.6%	99.6%	99.6%	NT	99.6%
BT Low Energy	2 Mbps	NT	NT	99.6%	99.6%	99.6%	99.6%	NT	NT
ANT	----	99.6%	99.6%	99.6%	99.6%	NT	99.6%	99.6%	99.6%

Table TR03a.4: BLE1 Mbps, BLE2 Mbps and ANT

Mode	Speed	1	6	10	11	12	13
B	1	NT	99.6%	NT	NT	NT	NT
B	2	NT	99.6%	NT	NT	NT	NT
B	5.5	99.6%	99.6%	99.6%	99.6%	99.6%	99.6%
B	11	NT	99.6%	NT	NT	NT	NT
G	6	NT	99.8%	NT	NT	NT	NT
G	9	NT	99.8%	NT	NT	NT	NT
G	12	99.8%	99.8%	99.8%	99.8%	99.8%	99.8%
G	18	NT	99.8%	NT	NT	NT	NT
G	24	NT	99.8%	NT	NT	NT	NT
G	36	NT	99.8%	NT	NT	NT	NT
G	48	NT	99.8%	NT	NT	NT	NT
G	54	NT	99.8%	NT	NT	NT	NT
N	MCS0	99.8%	99.8%	99.8%	99.8%	98.0%	99.8%
N	MCS1	NT	99.8%	NT	NT	NT	NT
N	MCS2	NT	99.1%	NT	NT	NT	NT
N	MCS3	NT	98.8%	NT	NT	NT	NT
N	MCS4	NT	99.8%	NT	NT	NT	NT
N	MCS5	NT	99.8%	NT	NT	NT	NT
N	MCS6	NT	99.0%	NT	NT	NT	NT
N	MCS7	NT	99.8%	NT	NT	NT	NT

Table TR03a.5: Duty cycle for IEEE 802.11b/g/n

Setup Diagram

The following block diagrams show how the EUT and test equipment is arranged for test.

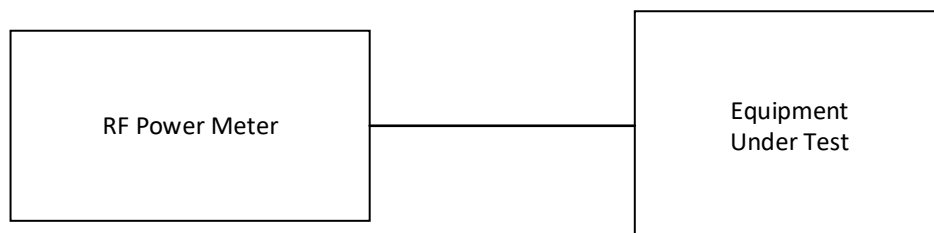


Figure TR03a.1: Test equipment setup

This line is the end of the test record.

Test Record

Radiated Emission Test RE21

Project GCL0885

Test Date(s) 05 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M6 (AntTx) (2480 MHz)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: DTS: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 9 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 05 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Loop antenna, amplified	Schwarzbeck	FMZB 1519B	00174	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE21.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, RE 150k to 30M Signal Maximization Tool V1 2021Mar17.xlsx,

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, and in the three loop antenna polarizations. The loop antenna was positioned at a 1.5 m height. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the loop was set to the worst case orientation for that frequency and the turntable angle was explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna mast for tests that involve changes in antenna elevation. At 0° the turntable reference mark is pointed directly at the loop antenna location. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 9 kHz and 30 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Freq. MHz	3 m Level dBuV/m	Detector Type	Distance m	Dist Adj dB	Final Level dBuV/m	Limit dBuV/m	Margin dB	Peak 3 m dBuV/m	Peak Final dBuV/m	Pk Limit dBuV/m	Pk Margin dB	Antenna Orientation	Table Azimuth, deg
0.04905	41.66	Avg	300	80.00	-38.34	33.79	72.13	49.99	-30.01	53.79	83.81	Z	17
1.311	30.36	QP	30	40.00	-9.64	25.25	34.89	36.65	-3.35	None	None	X	-53

Table RE21.2: Emission summary

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

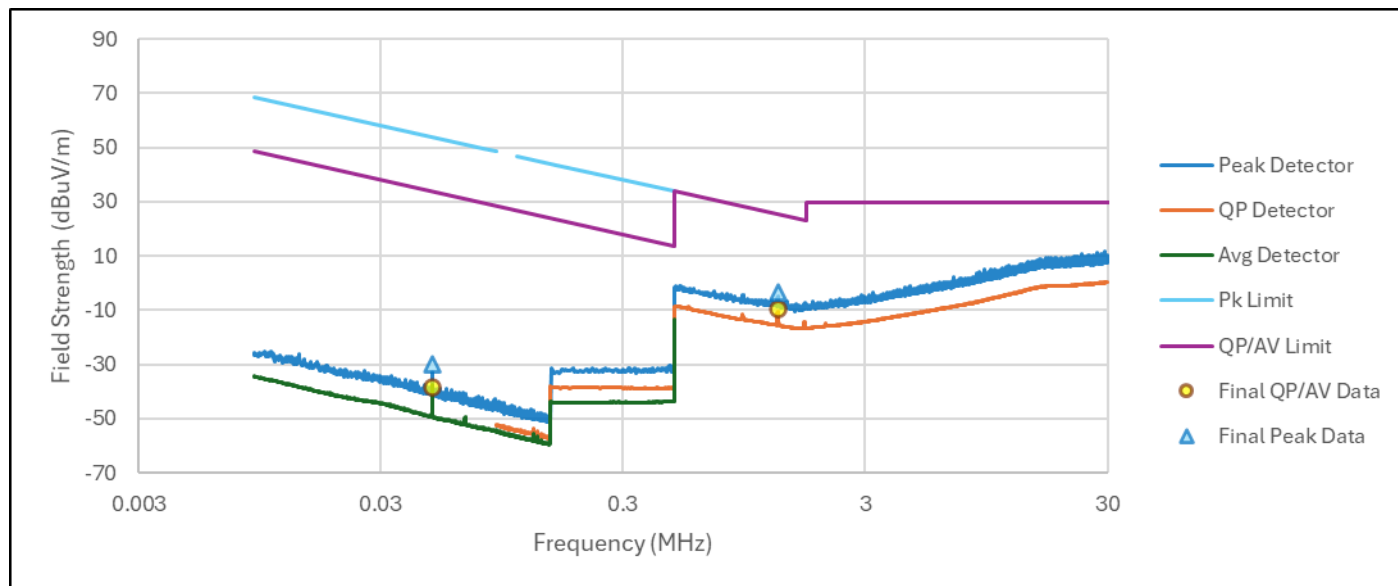


Figure RE21.1: Spectral data

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE21.2: EUT test setup, front view



Figure RE21.3: EUT test setup, second view (Z Antenna Orientation)

Image removed for client confidentiality.

See section 1 of this report
to identify the report where
the photos may be viewed.

Figure RE21.4: EUT test setup, second view (X Antenna Orientation)

This line is the end of the test record.

Test Record

Radiated Emission Test RE22

Project GCL0885

Test Date(s) 05 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M4 (BleTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 9 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 05 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Loop antenna, amplified	Schwarzbeck	FMZB 1519B	00174	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE22.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, RE 150k to 30M Signal Maximization Tool V1 2021Mar17.xlsx

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, and in the three loop antenna polarizations. The loop antenna was positioned at a 1.5 m height. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the loop was set to the worst case orientation for that frequency and the turntable angle was explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna mast for tests that involve changes in antenna elevation. At 0° the turntable reference mark is pointed directly at the loop antenna location. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 9 kHz and 30 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Freq.	3 m Level	Detector	Distance	Dist Adj	Final Level	Limit	Margin	Peak 3 m	Peak Final	Pk Limit	Pk Margin	Antenna	Table
MHz	dBuV/m	Type	m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	Orientation	Azimuth, deg
0.04905	41.59	Avg	300	80.00	-38.41	33.79	72.20	49.87	-30.13	53.79	83.92	Z	-152
1.311	30.10	QP	30	40.00	-9.90	25.25	35.15	36.24	-3.76	None	None	X	8

Table RE22.2: Emission summary (BLE, 1 Mbps, 2480 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

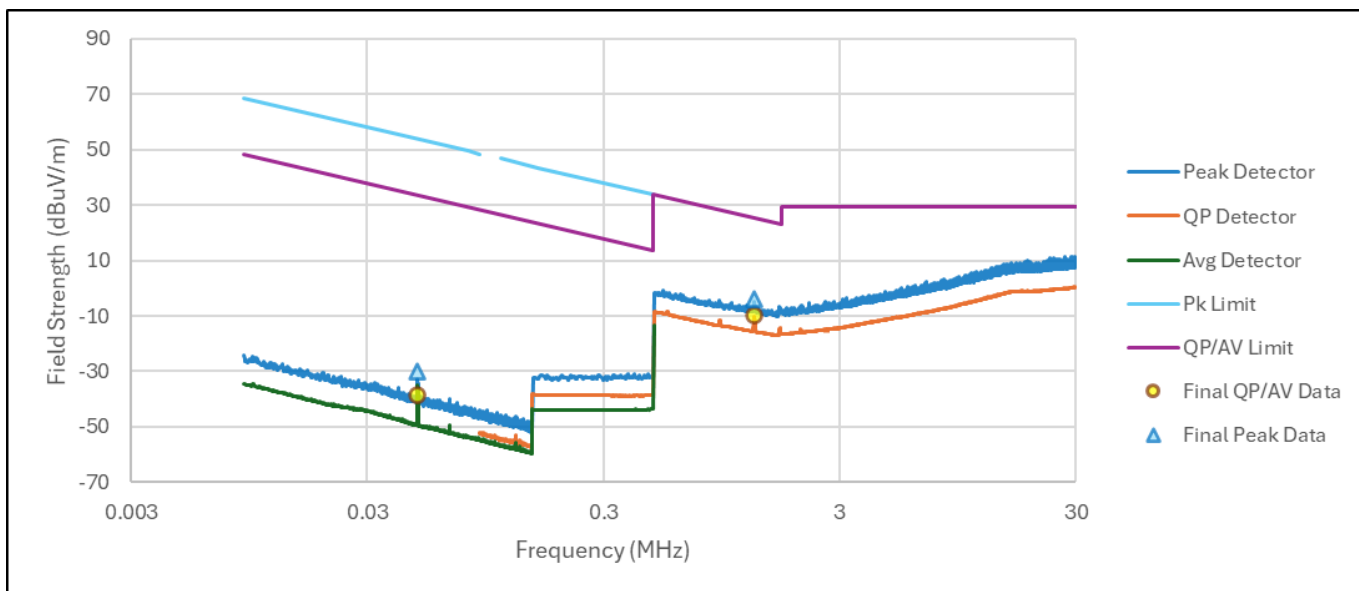


Figure RE22.1: Spectral data (BLE, 1 Mbps, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE22.2: EUT test setup, first view



Figure RE22.3: EUT test setup, second view

Image removed for client confidentiality.

See section 1 of this report
to identify the report where
the photos may be viewed.

Figure RE22.4: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE24

Project GCL0885

Test Date(s) 05 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M8 (WiFiTx)
Arrangement A2
Input Power USB 5

Test Standards: DTS: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 9 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 09 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Loop antenna, amplified	Schwarzbeck	FMZB 1519B	00174	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE24.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, RE 9k to 30M Signal Maximization Tool V1 2021Mar17.xlsx,

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, and in the three loop antenna polarizations. The loop antenna was positioned at a 1.5 m height. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the loop was set to the worst case orientation for that frequency and the turntable angle was explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna mast for tests that involve changes in antenna elevation. At 0° the turntable reference mark is pointed directly at the loop antenna location. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 9 kHz and 30 MHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Freq.	3 m Level	Detector	Distance	Dist Adj	Final Level	Limit	Margin	Peak 3 m	Peak Final	Pk Limit	Pk Margin	Antenna	Table
MHz	dBuV/m	Type	m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	Orientation	Azimuth, deg
0.0491	43.09	Avg	300	80.00	-36.91	33.78	70.69	51.14	-28.86	53.78	82.64	Z	159
1.3043	30.05	QP	30	40.00	-9.95	25.30	35.25	36.23	-3.77	None	None	X	-132

Table RE24.2: Emission summary (IEEE 802.11b, 1 Mbps, Ch1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

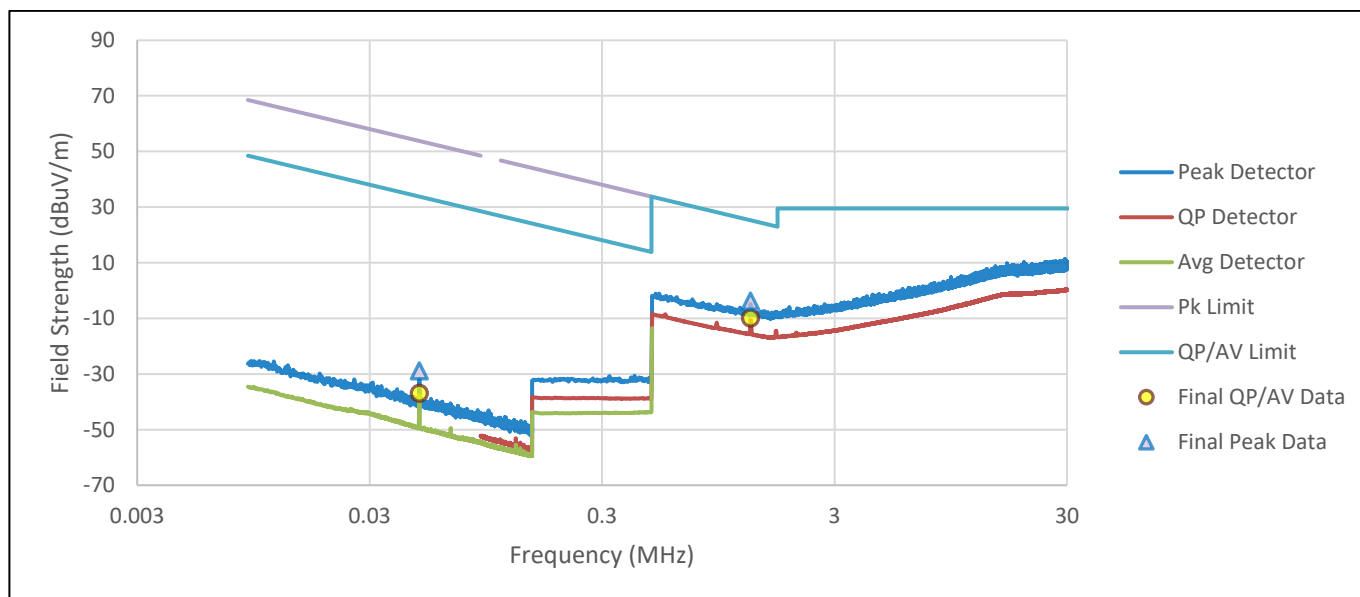


Figure RE24.1: Spectral data (IEEE 802.11b, 1 Mbps, Ch1)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE24.2: EUT test setup, first view

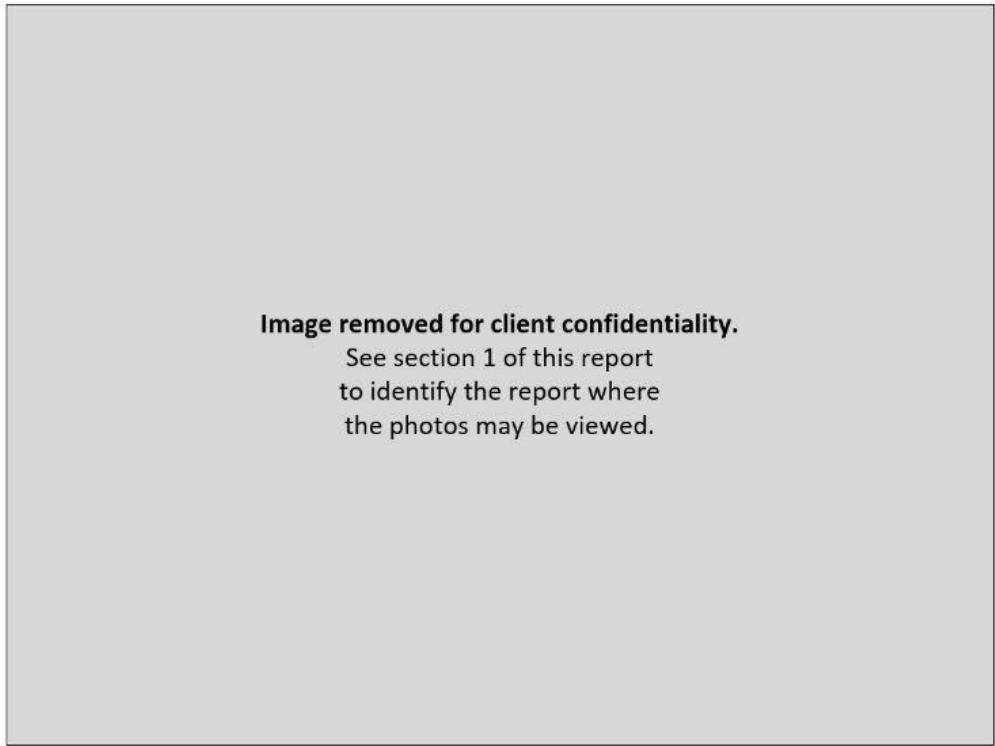


Figure RE24.3: EUT test setup, second view (Z orientation)

Image removed for client confidentiality.

See section 1 of this report
to identify the report where
the photos may be viewed.

Figure RE24.3: EUT test setup, second view (X orientation)

This line is the end of the test record.

Test Record

Radiated Emission Test RE49

Project GCL0885

Test Date(s) 03 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M6 (AntTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 1000 MHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 03 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE49.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 1 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μ V)	dB(1/m)	dB(μ V/m)	dB(μ V/m)	dB	cm	deg
		QP		QP	QP	QP		
184.590	H	4.6	17.9	22.5	43.5	21.0	166.5	59.0
44.160	V	12.2	15.2	27.4	40.0	12.6	100.0	205.0
71.880	V	10.5	14.2	24.7	40.0	15.3	116.0	359.0

Table RE49.2: Emission summary (ANT, 2480 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

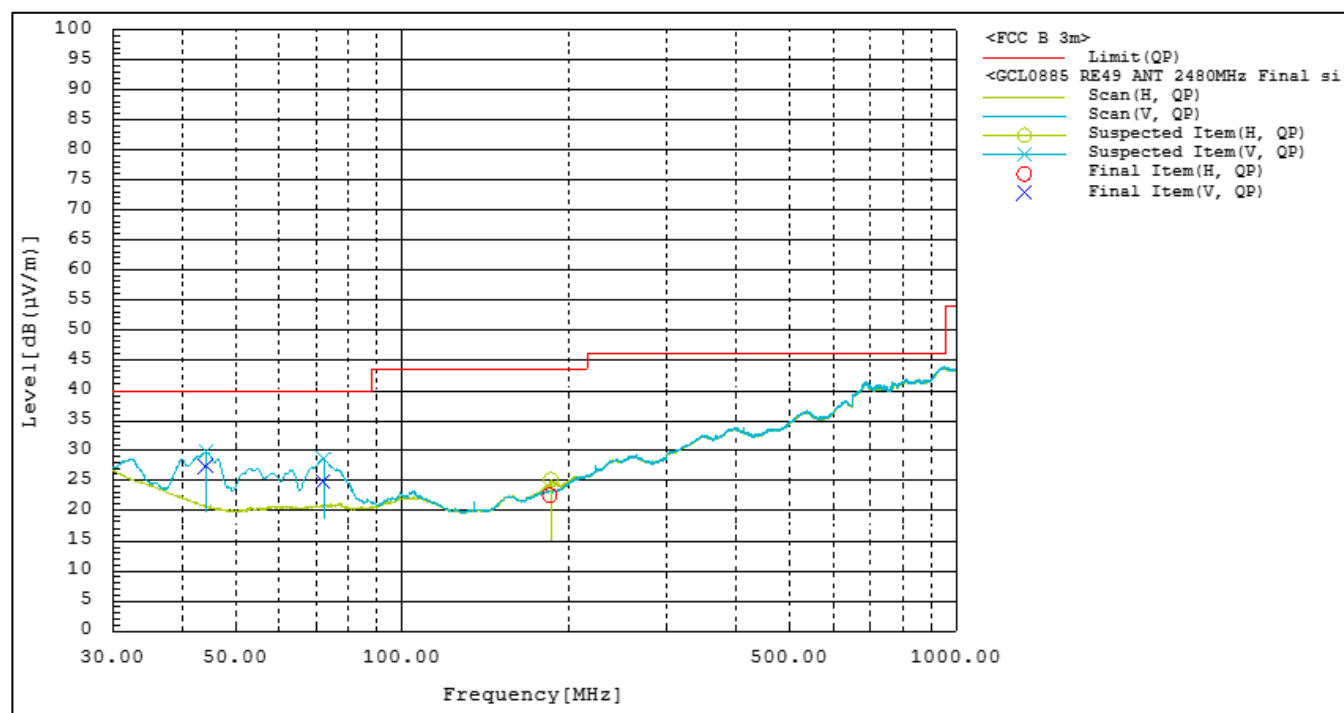


Figure RE49.1: Spectral data (ANT, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

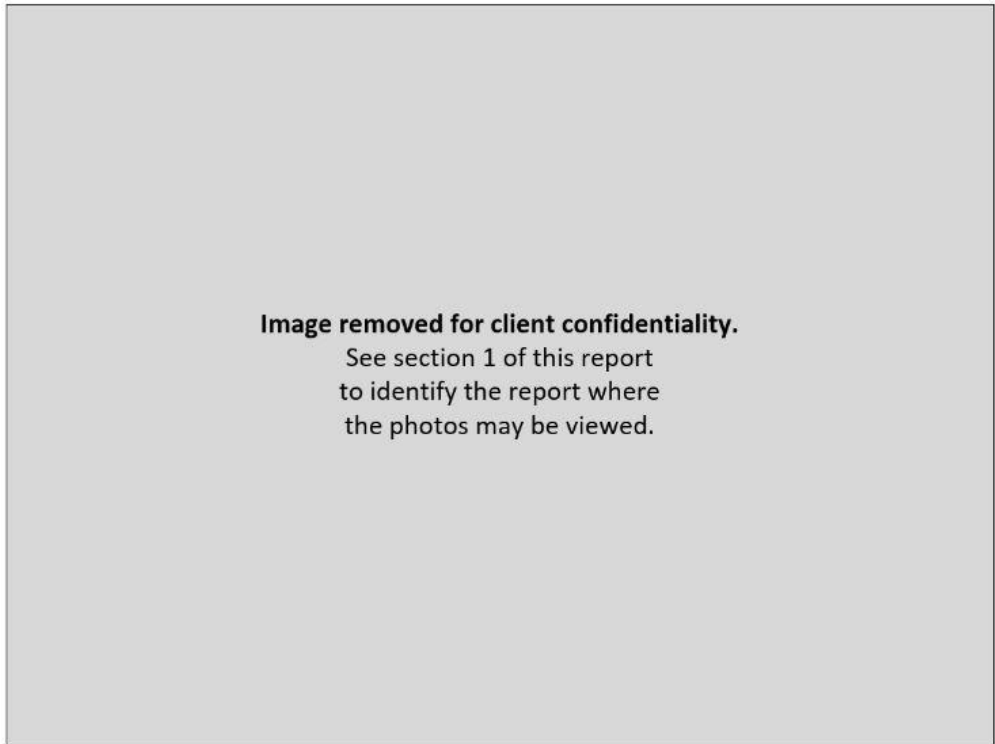


Figure RE49.2: EUT test setup, first view

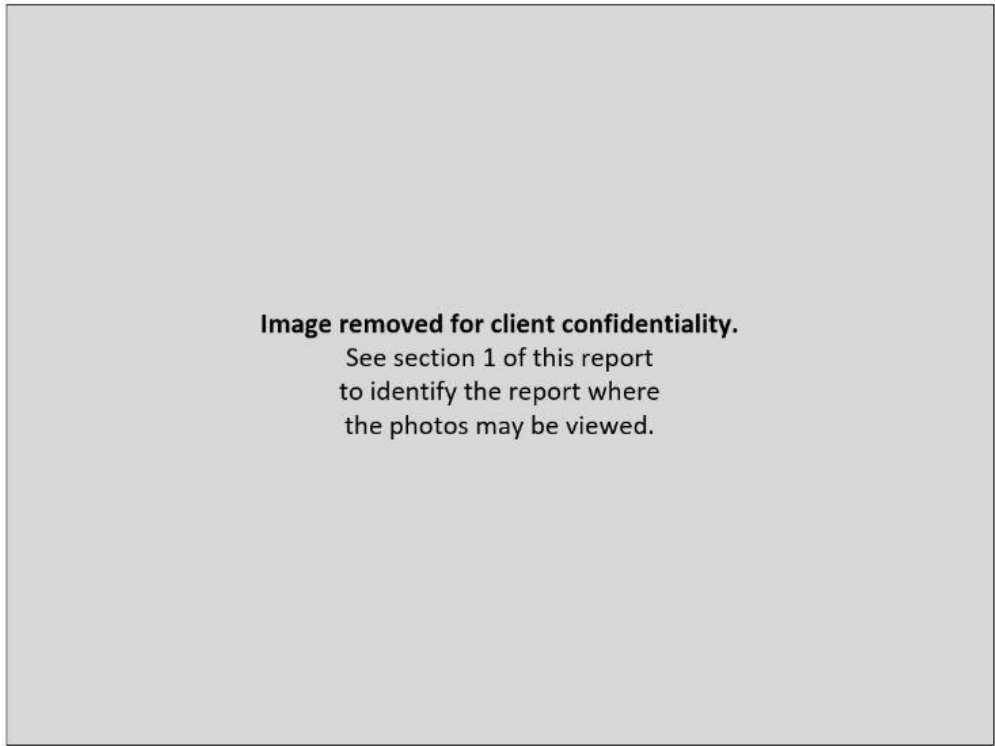


Figure RE49.3: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE51

Project GCL0885

Test Date(s) 03 Dec 2025
Test Personnel Vladimir Tolstik

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M4 (BleTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 1000 MHz
Pass/Fail Judgment: PASS

Test record created by: Vladimir Tolstik
Date of this record: 03 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE51.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 1 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μ V)	dB(1/m)	dB(μ V/m)	dB(μ V/m)	dB	cm	deg
		QP		QP	QP	QP		
44.190	V	12.0	15.2	27.2	40.0	12.8	100.0	205.0
72.150	V	10.6	14.2	24.8	40.0	15.2	100.0	0.0
405.930	V	3.3	27.2	30.5	46.0	15.5	290.6	104.0
812.280	V	4.7	34.2	38.9	46.0	7.1	258.1	138.0

Table RE51.2: Emission summary (BLE, 1 Mbps, 2480 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

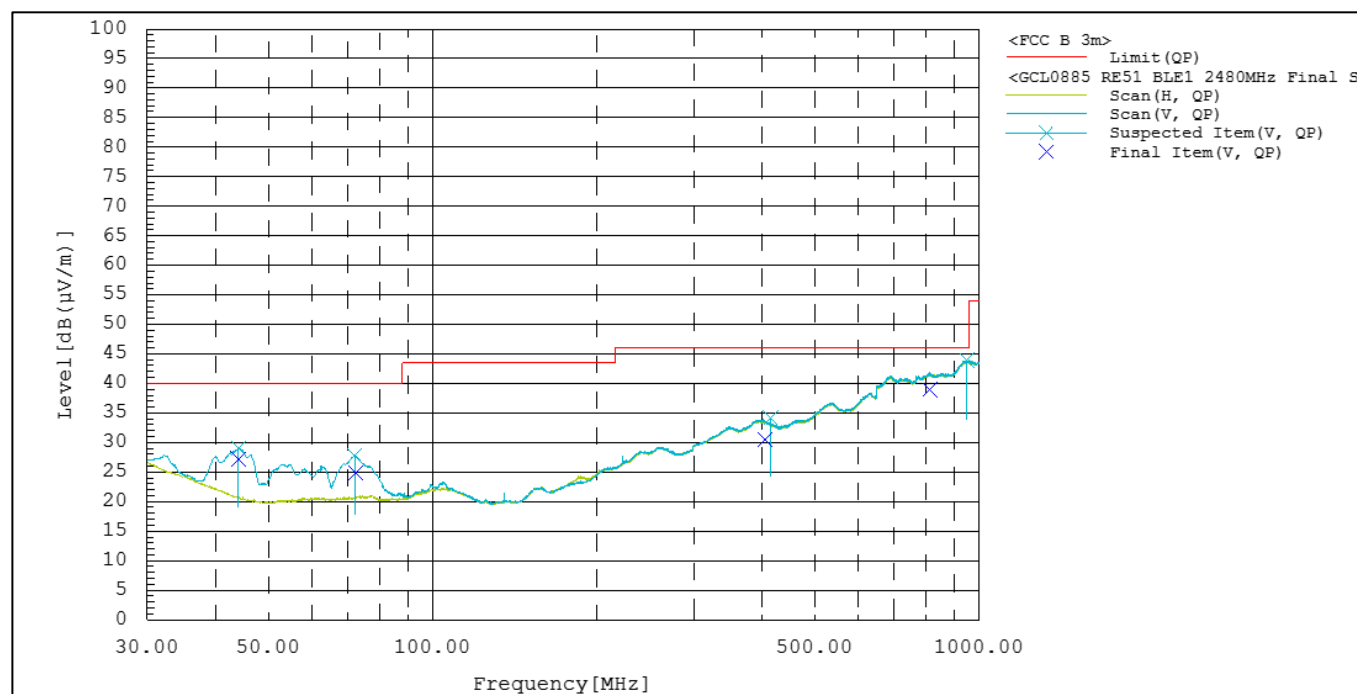


Figure RE51.1: Spectral data (BLE, 1 Mbps, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

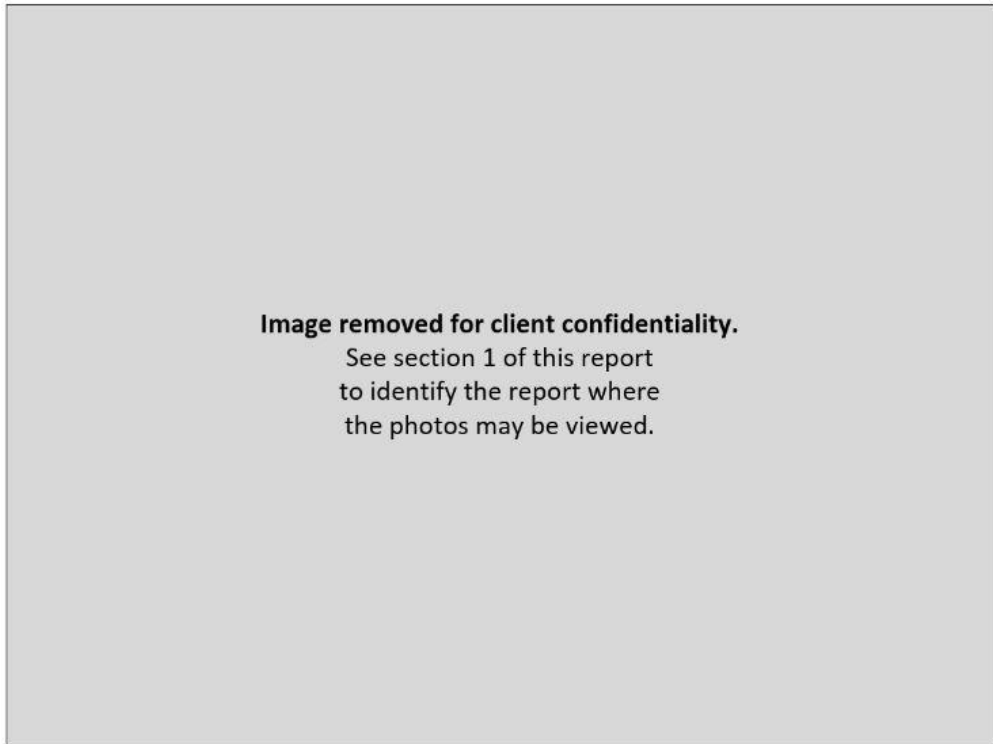


Figure RE51.2: EUT test setup, first view

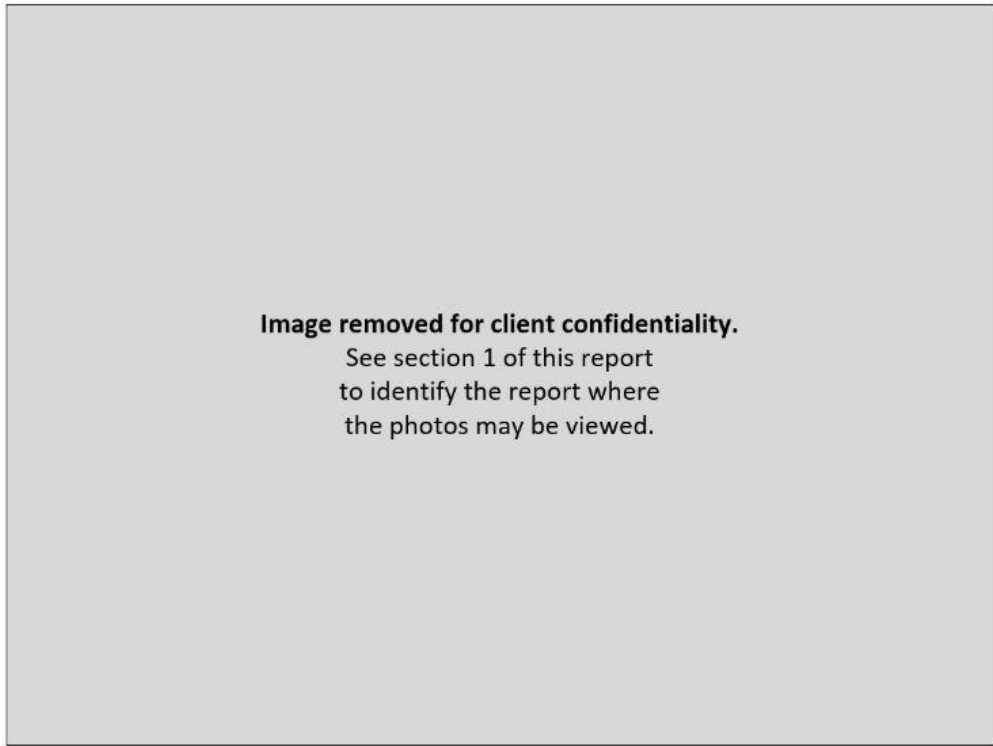


Figure RE51.3: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE53

Project GCL0885

Test Date(s) 03 Dec 2025
Test Personnel Vladimir Tolstik

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M8 (WiFitx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 30 MHz to 1000 MHz
Pass/Fail Judgment: PASS

Test record created by: Vladimir Tolstik
Date of this record: 05 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Biconilog, 30M-6 GHz	ETS Lindgren	3142E	00233201	18-Jul-2024	18-Jul-2026
SAC 3m, below 1 GHz	Frankonia	SAC3	F199004	11-Dec-2024	11-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027

Table RE53.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 30 MHz and 1 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μ V)	dB(1/m)	dB(μ V/m)	dB(μ V/m)	dB	cm	deg
		QP		QP	QP	QP		
44.190	V	12.5	15.2	27.7	40.0	12.3	100.0	201.0
72.030	V	11.1	14.2	25.3	40.0	14.7	106.3	359.0
649.980	V	3.7	31.4	35.1	46.0	10.9	187.5	352.0
811.440	H	4.3	34.2	38.5	46.0	7.5	261.0	14.0

Table RE53.2: Emission summary (IEEE 802.11b, 1 Mbps, Ch 1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

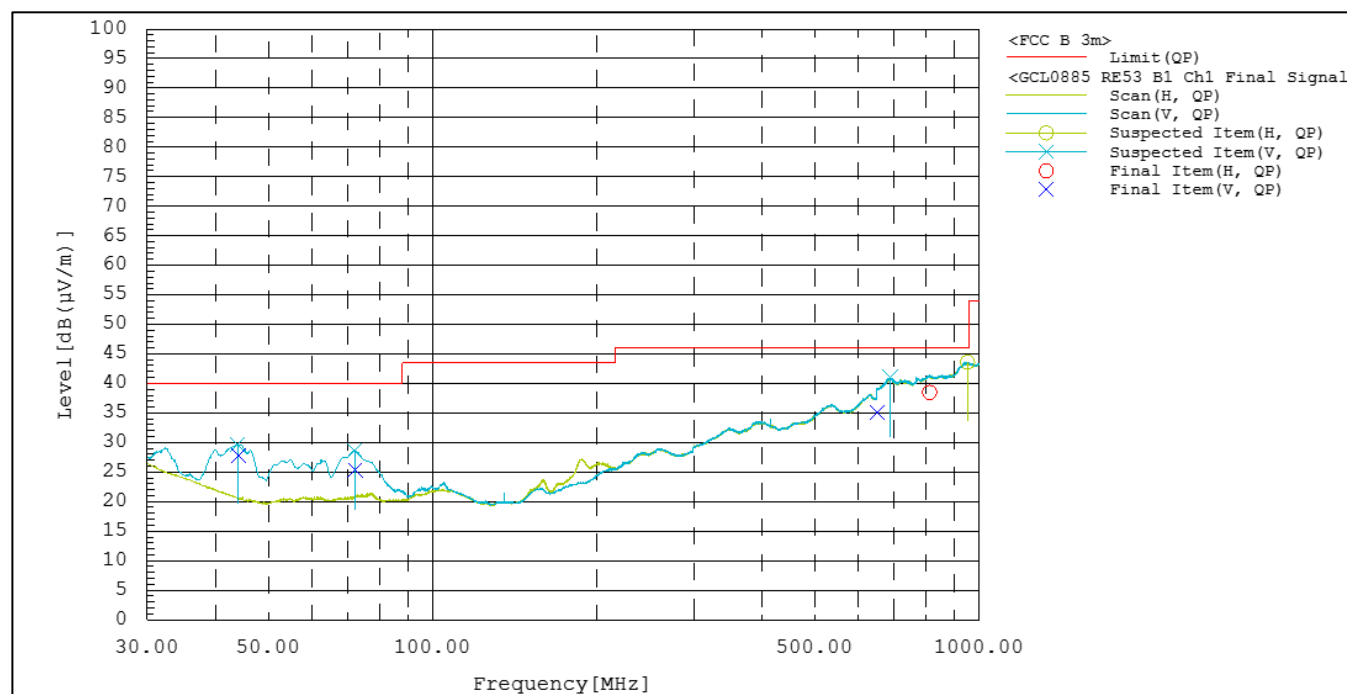


Figure RE53.1: Spectral data (IEEE 802.11b, 1 Mbps, Ch 1)

Frequency	Pol.	Reading	Factor	Level	Limit	Margin	Height	Angle
MHz		dB(μ V)	dB(1/m)	dB(μ V/m)	dB(μ V/m)	dB	cm	deg
		QP		QP	QP	QP		
44.130	V	12.9	15.2	28.1	40.0	11.9	100.0	123.0
71.850	V	11.4	14.2	25.6	40.0	14.4	100.0	0.0
813.420	V	4.5	34.2	38.7	46.0	7.3	257.1	171.0

Table RE53.3: Emission summary (IEEE 802.11g, 9 Mbps, Ch 1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

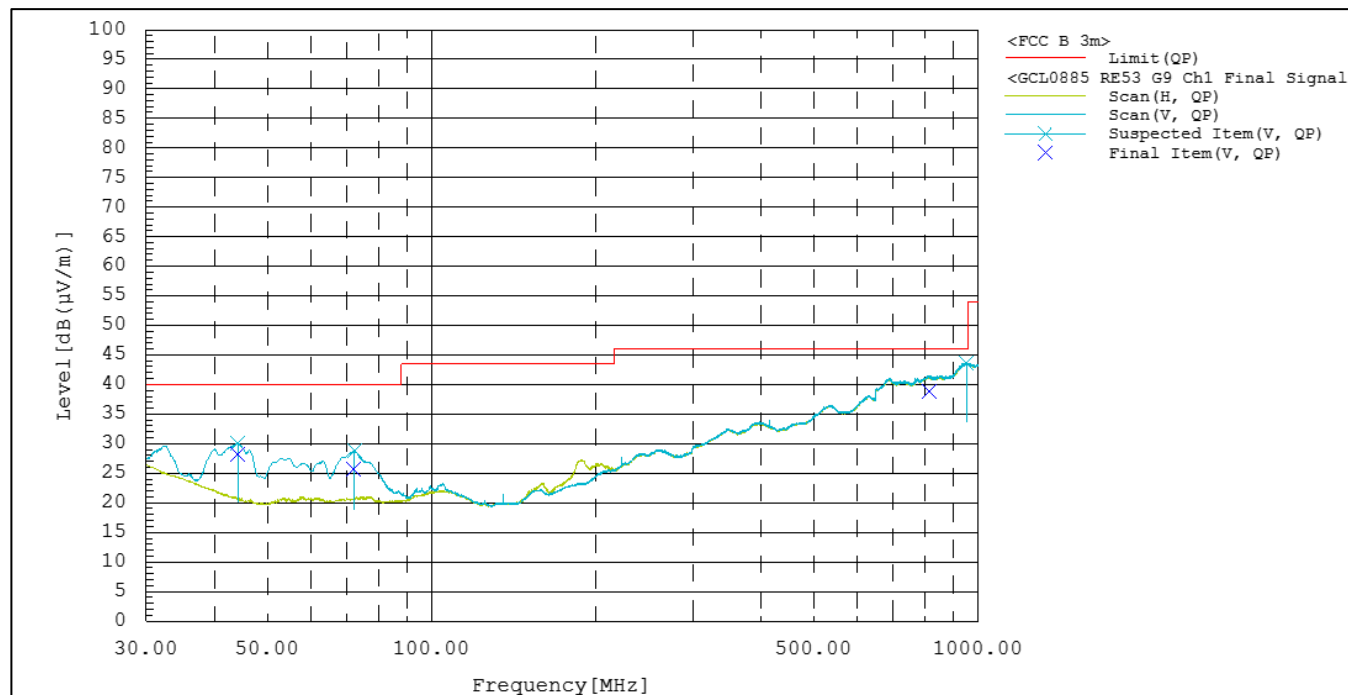


Figure RE53.2: Spectral data (IEEE 802.11g, 9 Mbps, Ch 1)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE53.3: EUT test setup, first view

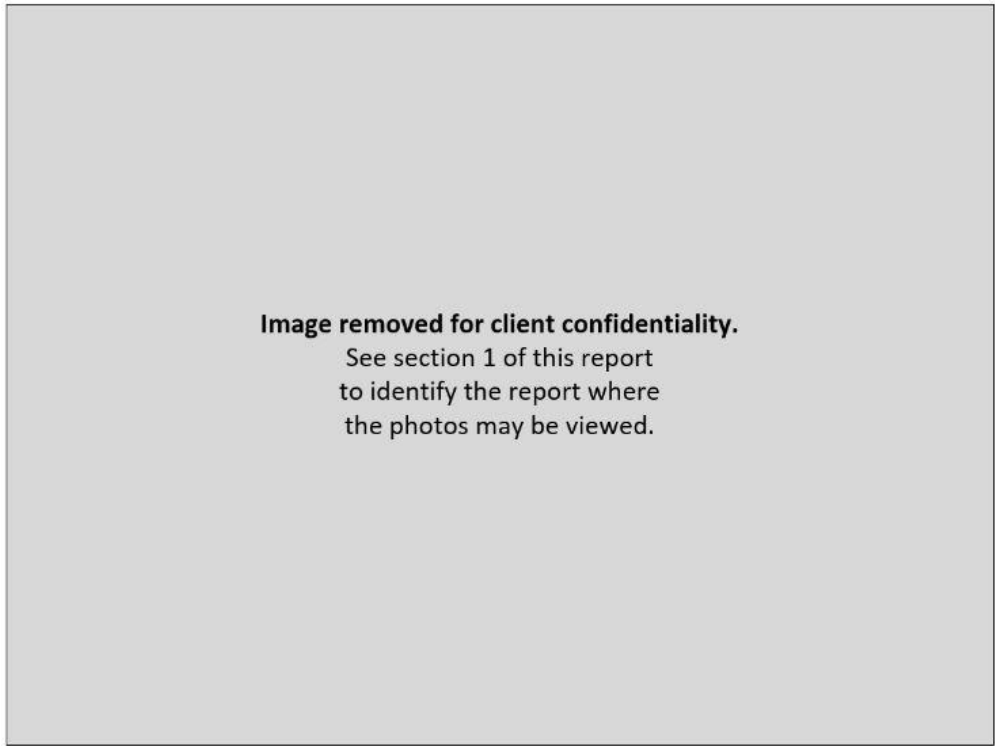


Figure RE53.4: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE10

Project GCL0885

Test Date(s) 26 Nov 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M6 (AntTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: DTS: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 1 GHz to 14 GHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 26 Nov 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/	1	Calibration	Not Required
3 GHz High Pass filter	Anatech Electronics	OKOR2	01	Calibration	Not Required

Table RE10.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025,01,00

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 1 GHz to 3.2 GHz frequency range, a Chebyshev 'Wifi' notch filter covering the 2.4 GHz ISM band was placed in series just before the preamplifier to ensure it operated in its linear range. This filter is accounted for in the system loss, so it appears in the prescan plots as high noise floor levels from 2400 – 2483 MHz. These are not failing emissions. A 3 GHz high pass filter was applied during testing between 3.2 GHz and 14 GHz to similarly protect the preamplifier.

In the 1 GHz to 14 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 1 GHz and 14 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the ANT radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
7205.524	H	30.6	42.3	8.2	38.8	50.5	54.0	74.0	15.2	23.5	296.0	6.0
9607.694	H	27.2	39.0	13.1	40.3	52.1	54.0	74.0	13.7	21.9	176.7	0.0

Table RE10.2: Emission summary (ANT, 2402MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

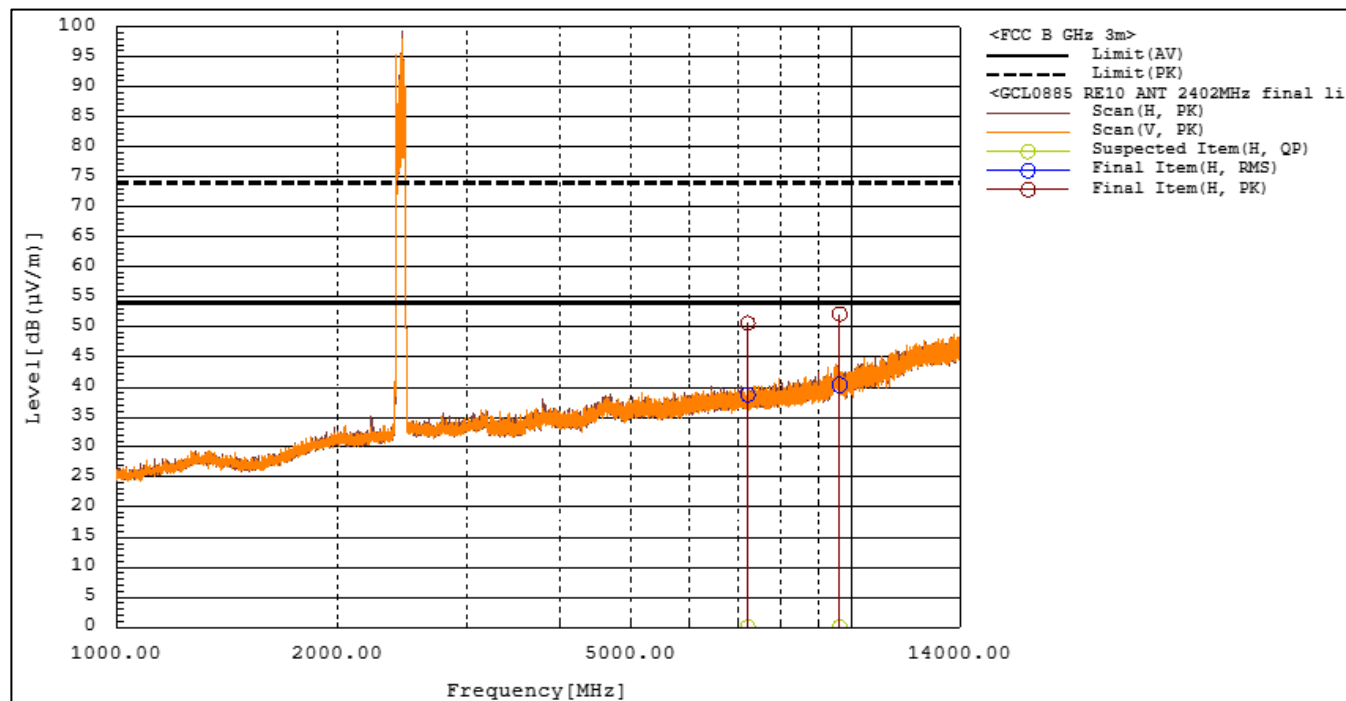


Figure RE10.1: Spectral data (ANT, 2402MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
7319.506	H	30.5	42.1	8.7	39.2	50.8	54.0	74.0	14.8	23.2	307.4	284.0
9759.613	H	28.0	39.8	12.6	40.6	52.4	54.0	74.0	13.4	21.6	202.8	286.0

Table RE10.3: Emission summary (ANT, 2440MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

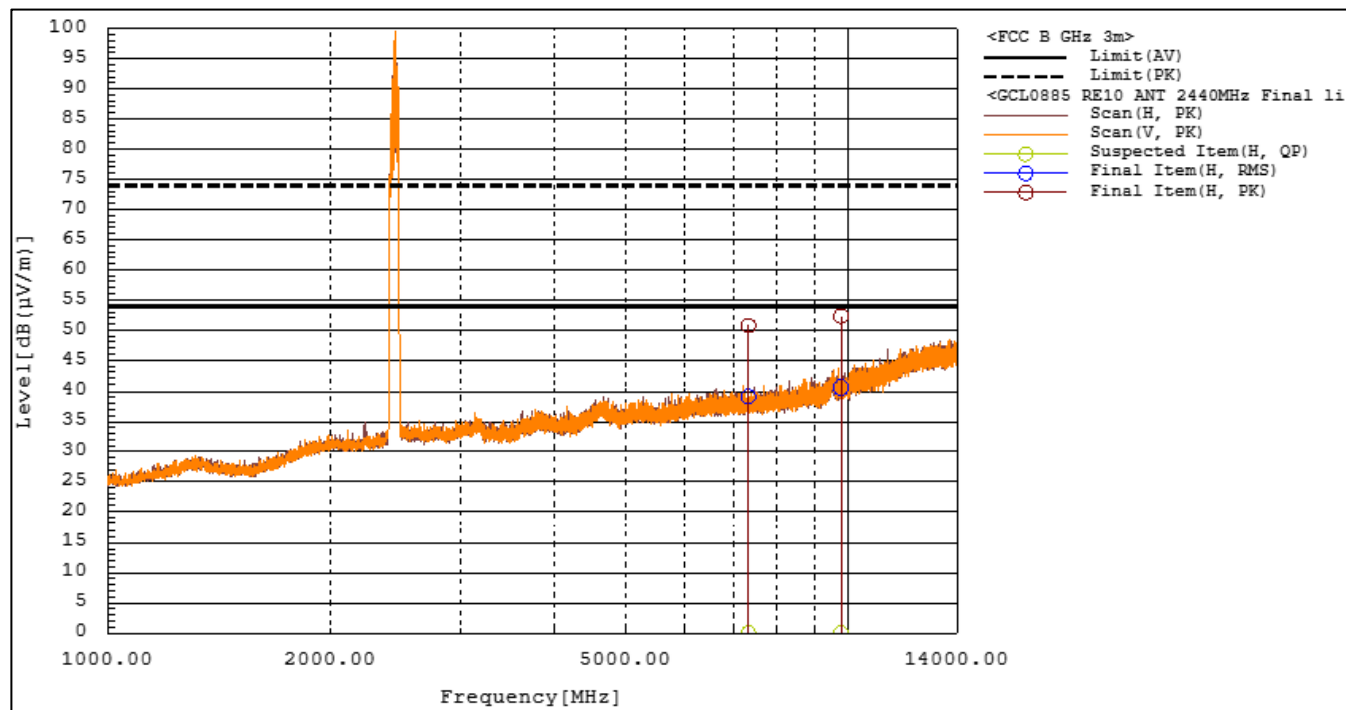


Figure RE10.2: Spectral data (ANT, 2440MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
7440.480	H	29.7	42.4	8.8	38.5	51.2	54.0	74.0	15.5	22.8	319.6	293.0
9920.458	H	27.8	40.1	13.4	41.2	53.5	54.0	74.0	12.8	20.5	195.2	294.0
1738.047	V	33.0	44.3	-4.3	28.7	40.0	54.0	74.0	25.3	34.0	278.3	142.0

Table RE10.4: Emission summary (ANT, 2480MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

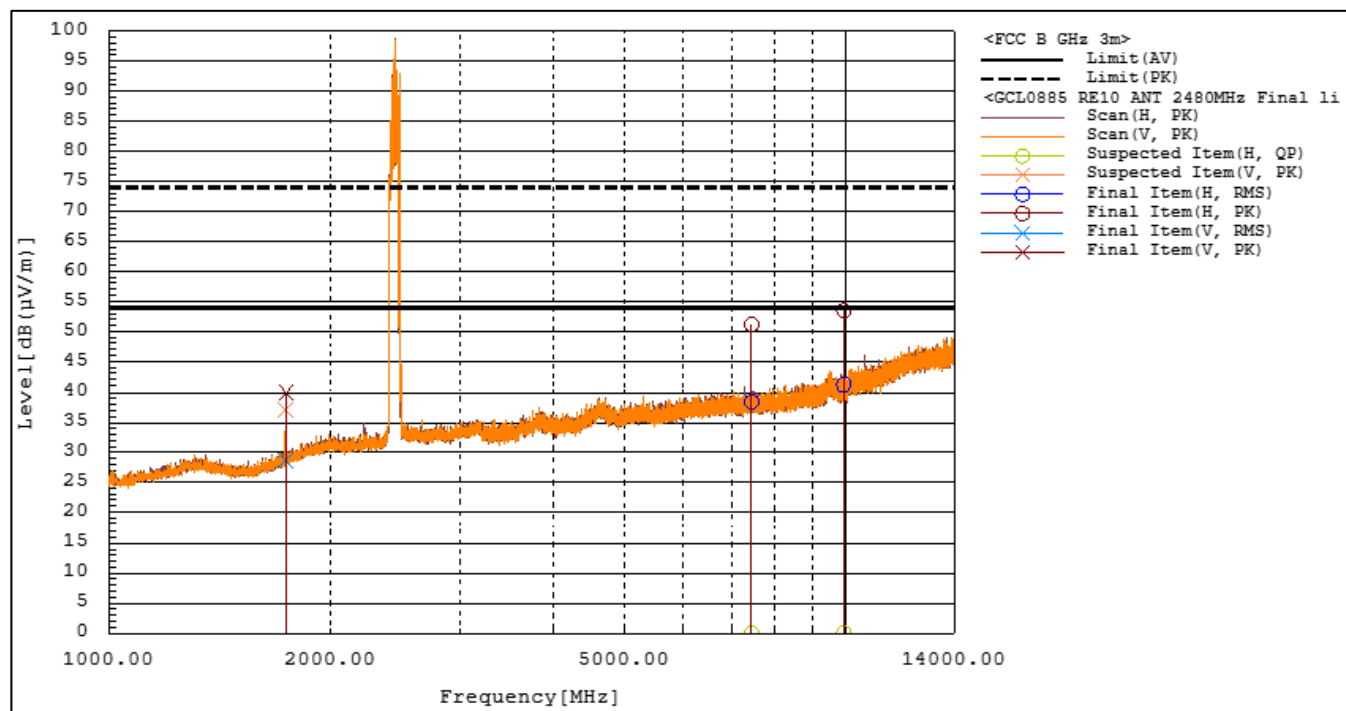


Figure RE10.3: Spectral data (ANT, 2480MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

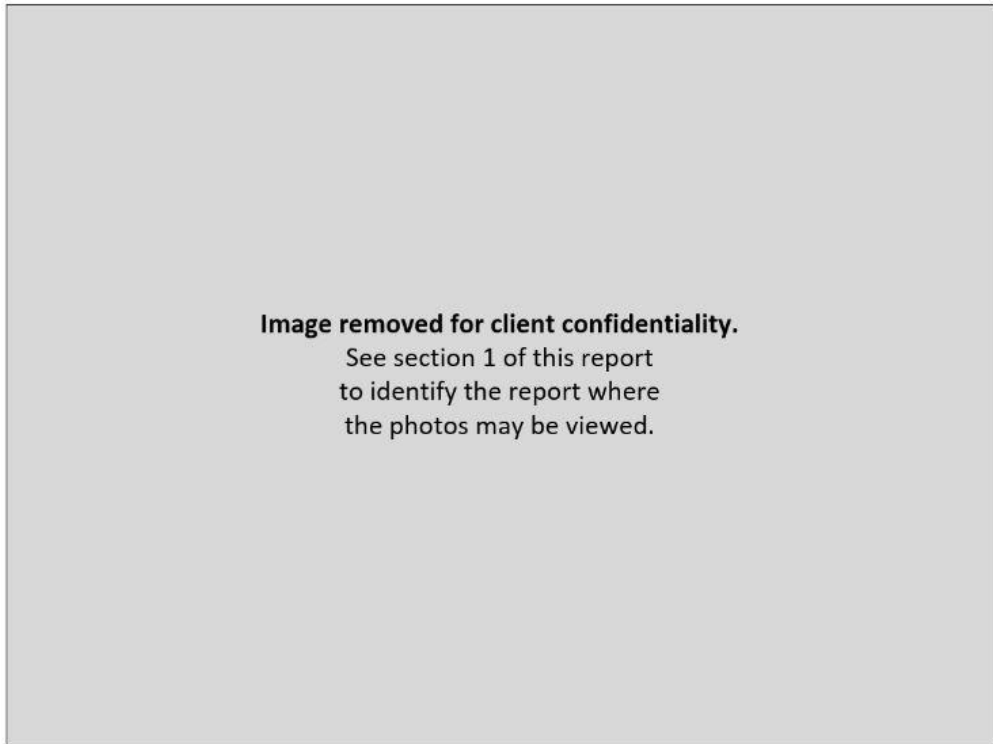


Figure RE10.4: EUT test setup, first view



Figure RE10.5: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE11

Project GCL0885

Test Date(s) 26 Nov 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M4 (BleTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: DTS: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 1 GHz to 14 GHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 26 Nov 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/	1	Calibration	Not Required
3 GHz High Pass filter	Anatech Electronics	OKOR2	01	Calibration	Not Required

Table RE11.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 1 GHz to 3.2 GHz frequency range, a Chebyshev 'Wifi' notch filter covering the 2.4 GHz ISM band was placed in series just before the preamplifier to ensure it operated in its linear range. This filter is accounted for in the system loss, so it appears in the prescan plots as high noise floor levels from 2400 – 2483 MHz. These are not failing emissions. A 3 GHz high pass filter was applied during testing between 3.2 GHz and 14 GHz to similarly protect the preamplifier.

In the 1 GHz to 14 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 1 GHz and 14 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary ($\text{wavelength} / 2 \pi$), 20 dB per decade beyond that distance boundary.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the BLE radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
1753.858	H	33.1	44.0	-4.1	29.0	39.9	54.0	74.0	25.0	34.1	319.3	113.0
1869.632	H	33.1	43.8	-2.8	30.3	41.0	54.0	74.0	23.7	33.0	297.4	31.0
7206.451	H	30.4	41.6	8.2	38.6	49.8	54.0	74.0	15.4	24.2	315.4	8.0
9608.078	H	27.3	39.6	13.1	40.4	52.7	54.0	74.0	13.6	21.3	184.4	293.0

Table RE11.2: Emission summary (BLE, 1Mbps, 2402 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

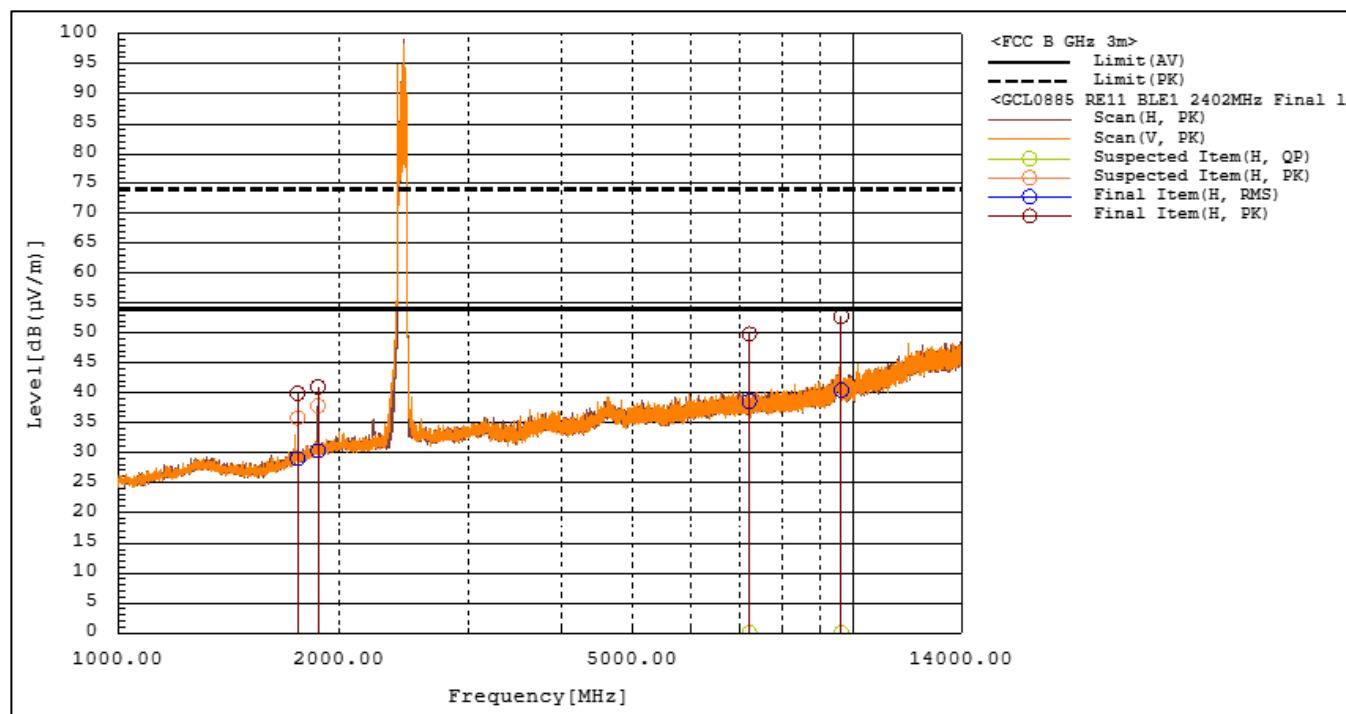


Figure RE11.1: Spectral data (BLE, 1Mbps, 2402 MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
7319.565	H	30.1	41.8	8.7	38.8	50.5	54.0	74.0	15.2	23.5	307.9	283.0
9759.507	H	27.8	41.1	12.6	40.4	53.7	54.0	74.0	13.6	20.3	338.5	36.0

Table RE11.3: Emission summary (BLE, 1Mbps, 2440 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

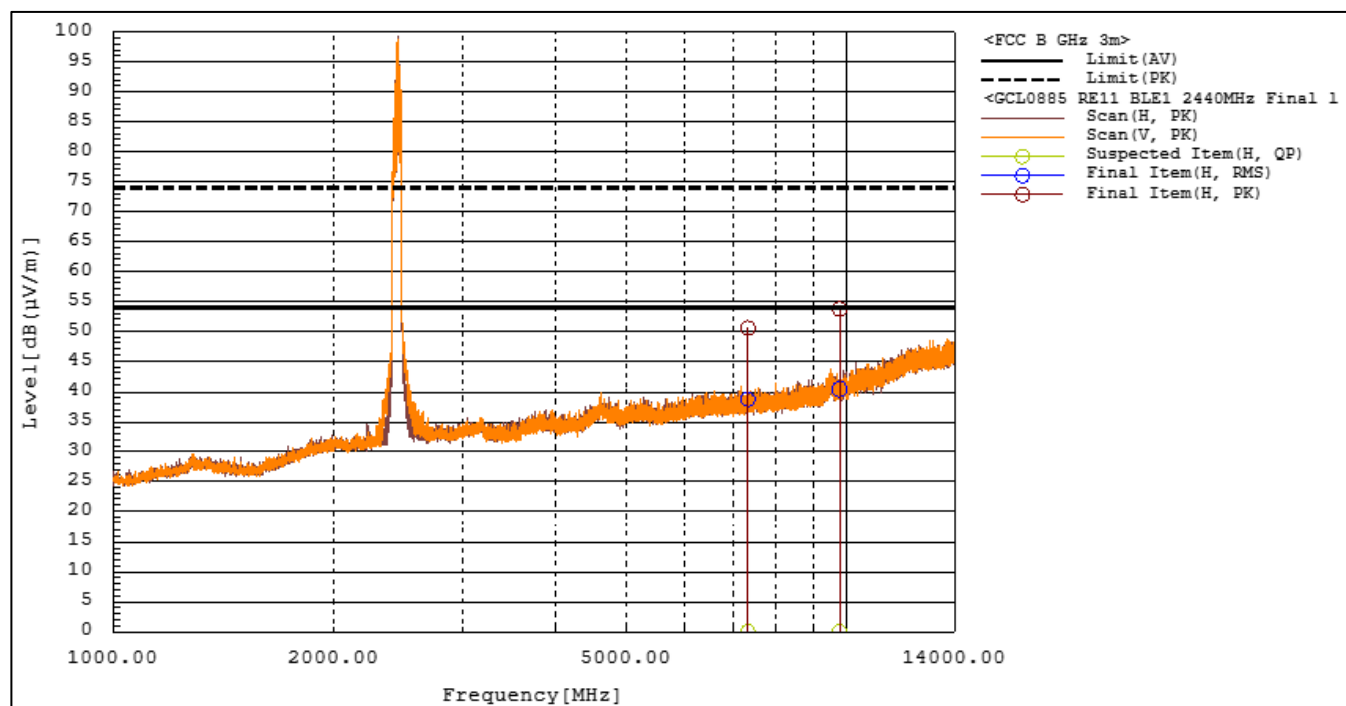


Figure RE11.2: Spectral data (BLE, 1Mbps, 2440 MHz)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
7439.871	H	29.7	41.5	8.8	38.5	50.3	54.0	74.0	15.5	23.7	287.5	295.0
9919.797	H	27.9	39.4	13.4	41.3	52.8	54.0	74.0	12.7	21.2	204.8	301.0

Table RE11.4: Emission summary (BLE, 1Mbps, 2480 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

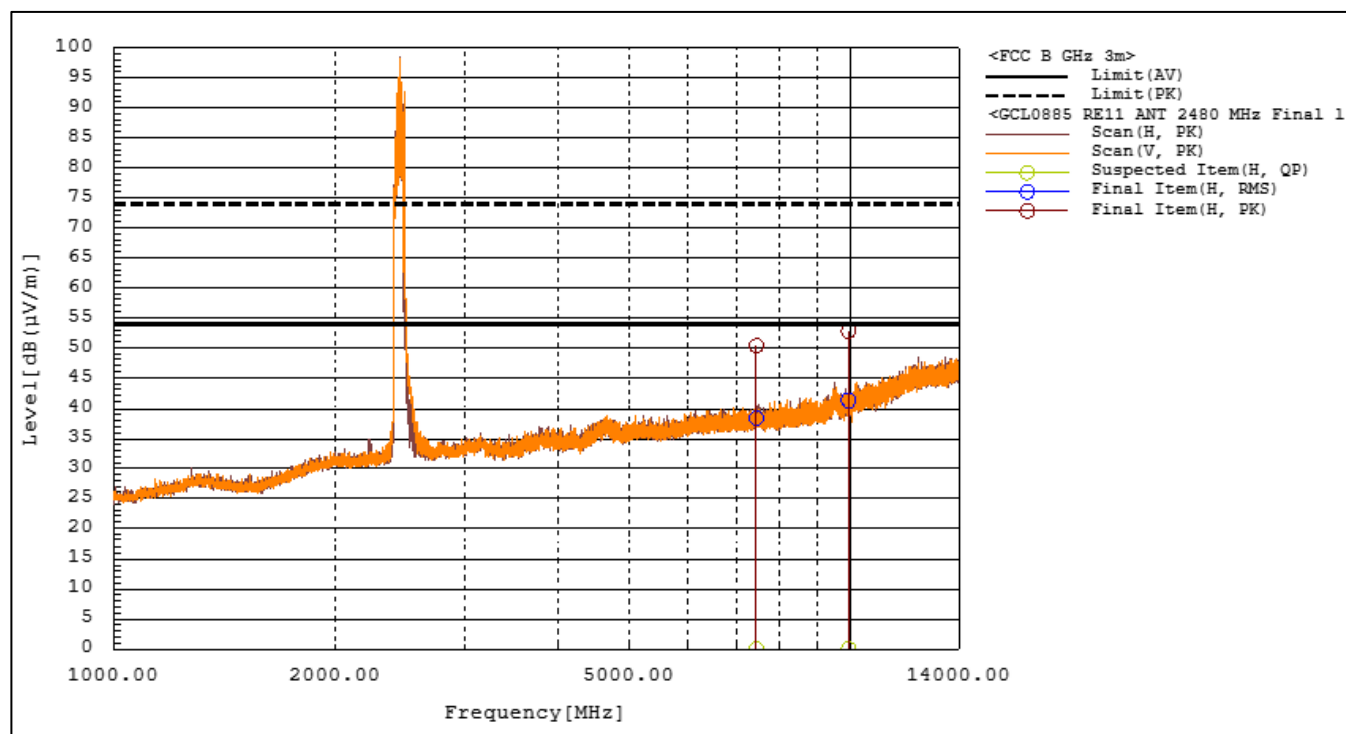


Figure RE11.3: Spectral data (2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE11.4: EUT test setup, first view

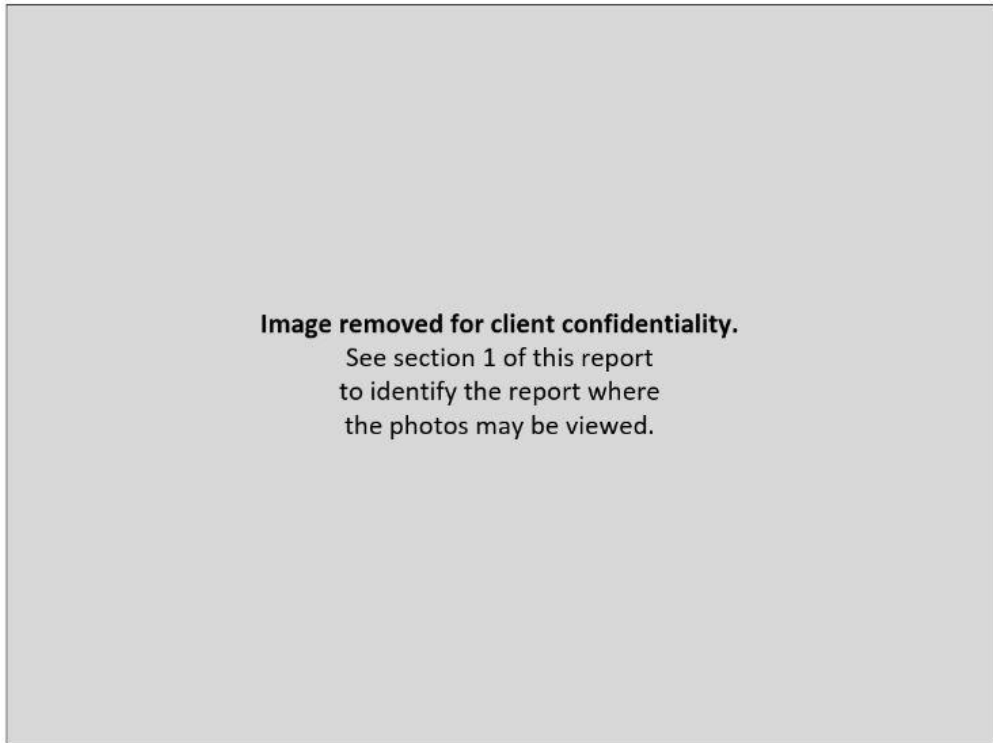


Figure RE11.5: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE13, 14 Project GCL0885

Test Date(s) 01 Dec 2025,
Test Personnel Vladimir Tolstik, David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M8 (Wi-FiTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 1 GHz to 14 GHz
Pass/Fail Judgment: PASS

Test record created by: Vladimir Tolstik
Date of this record: 01 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/	1	Calibration	Not Required
3 GHz High Pass filter	Anatech Electronics	OKOR2	01	Calibration	Not Required

Table RE13.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 1 GHz to 3.2 GHz frequency range, a Chebyshev 'Wifi' notch filter covering the 2.4 GHz ISM band was placed in series just before the preamplifier to ensure it operated in its linear range. This filter is accounted for in the system loss, so it appears in the prescan plots as high noise floor levels from 2400 – 2483 MHz. These are not failing emissions. A 3 GHz high pass filter was applied during testing between 3.2 GHz and 14 GHz to similarly protect the preamplifier.

In the 1 GHz to 14 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 1 GHz and 14 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted in yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary ($\text{wavelength} / 2 \pi$), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
2217.955	H	35.0	48.9	-2.2	32.8	46.7	54.0	74.0	21.2	27.3	301.9	130.0
4824.156	H	36.8	48.9	4.9	41.7	53.8	54.0	74.0	12.3	20.2	219.3	28.0
13645.074	V	32.6	48.6	19.5	52.1	68.1	54.0	74.0	1.9	5.9	110.6	95.0

Table RE13.2: Emission summary (IEEE 802.11b, 1 Mbps, Ch 1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

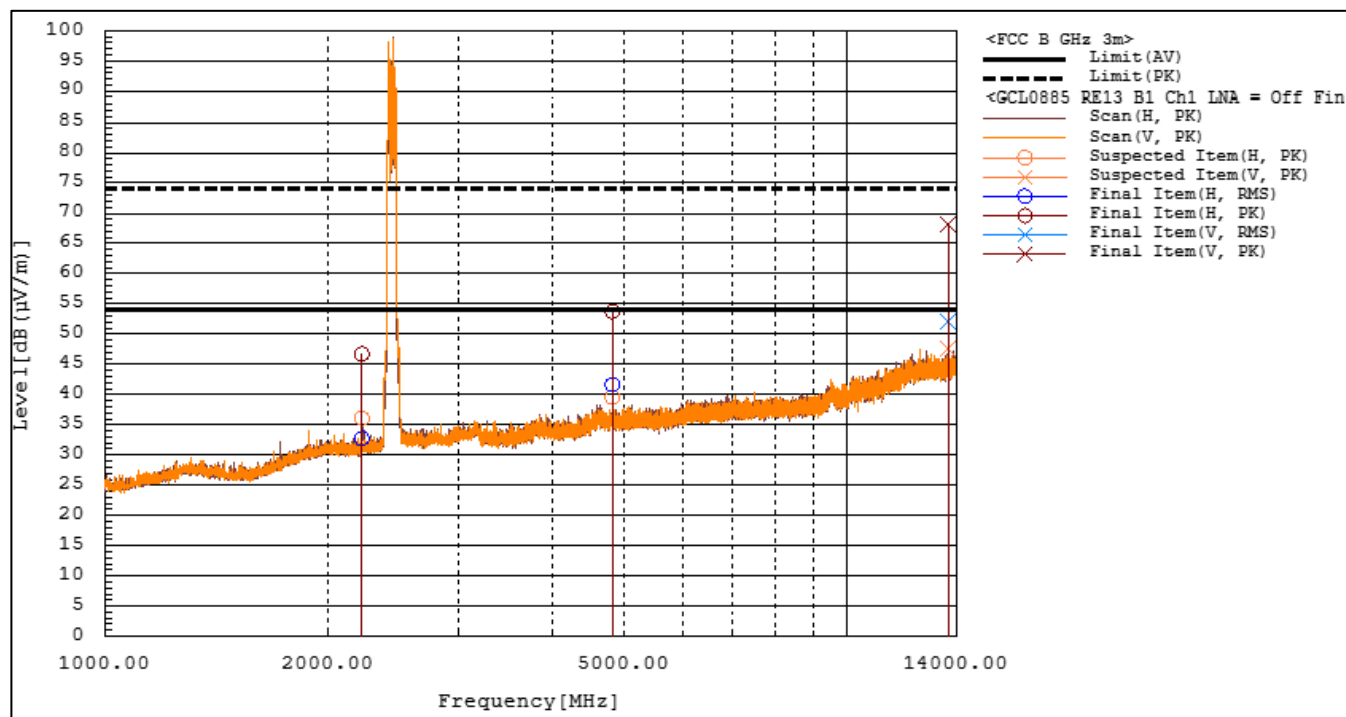


Figure RE13.1: Spectral data (IEEE 802.11b, 1 Mbps, Ch 1)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
1725.549	H	33.7	46.0	-4.5	29.2	41.5	54.0	74.0	24.8	32.5	124.4	313.0
2217.462	H	35.0	48.7	-2.2	32.8	46.5	54.0	74.0	21.2	27.5	301.9	310.0
4874.051	H	39.8	49.8	4.8	44.6	54.6	54.0	74.0	9.4	19.4	104.5	343.0

Table RE13.3: Emission summary (IEEE 802.11b, 1 Mbps, Ch 6)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

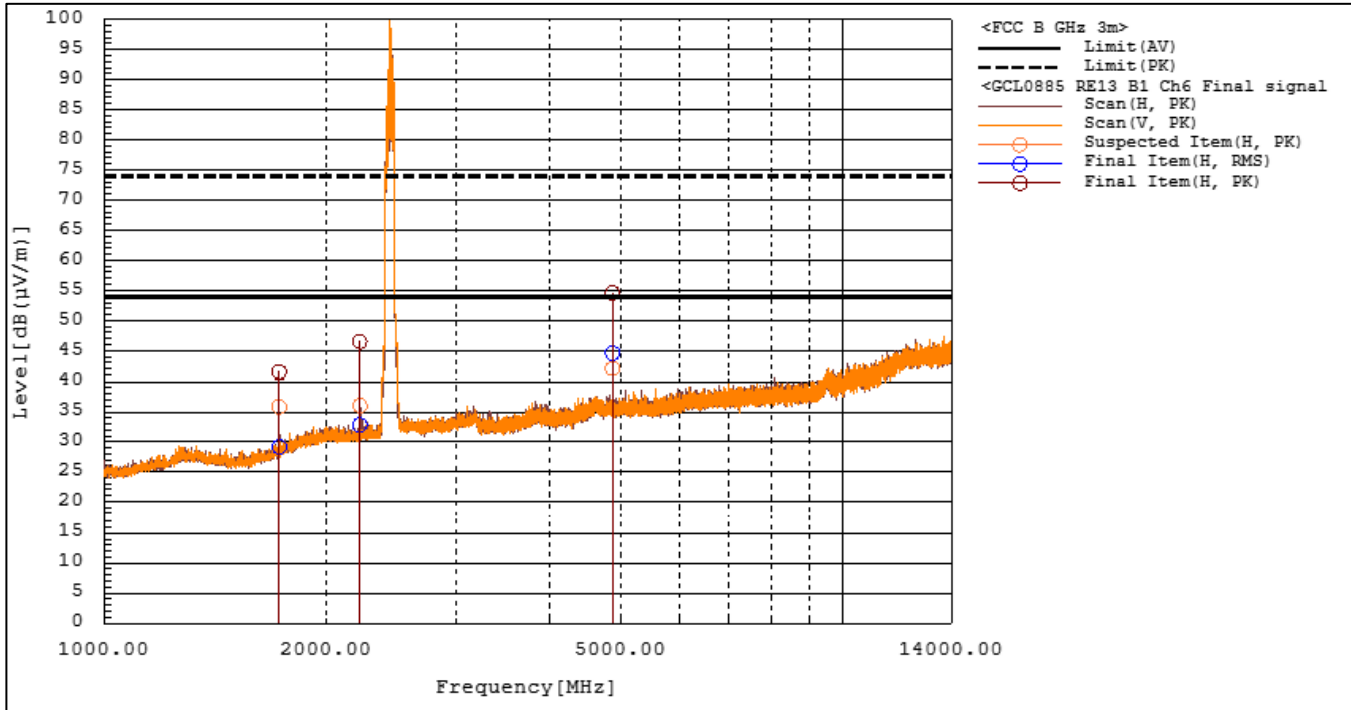


Figure RE13.2: Spectral data (IEEE 802.11b, 1 Mbps, Ch 6)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
2216.786	H	34.9	48.3	-2.3	32.6	46.0	54.0	74.0	21.4	28.0	301.9	307.0
3910.715	V	34.7	48.9	2.1	36.8	51.0	54.0	74.0	17.2	23.0	266.2	55.0
4924.016	V	35.7	48.8	4.8	40.5	53.6	54.0	74.0	13.5	20.4	110.7	341.0

Table RE13.4: Emission summary (IEEE 802.11b, 1 Mbps, Ch 11)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

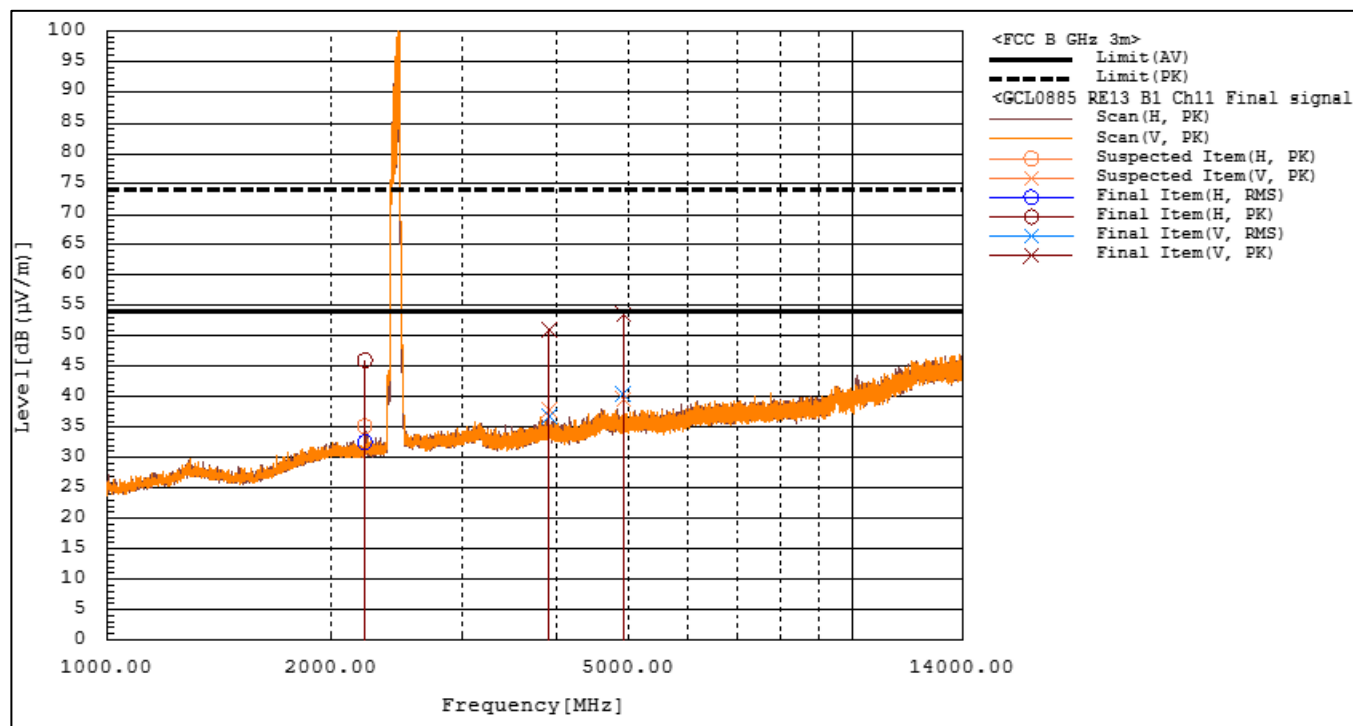


Figure RE13.3: Spectral data (IEEE 802.11b, 1 Mbps, Ch 11)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
2220.622	H	34.7	47.8	-2.2	32.5	45.6	54.0	74.0	21.5	28.4	301.7	313.0
3793.862	H	35.3	49.6	1.9	37.2	51.5	54.0	74.0	16.8	22.5	367.2	93.0
4944.069	H	37.4	49.2	4.9	42.3	54.1	54.0	74.0	11.7	19.9	105.2	343.0

Table RE13.5: Emission summary (IEEE 802.11b, 1 Mbps, Ch 13)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

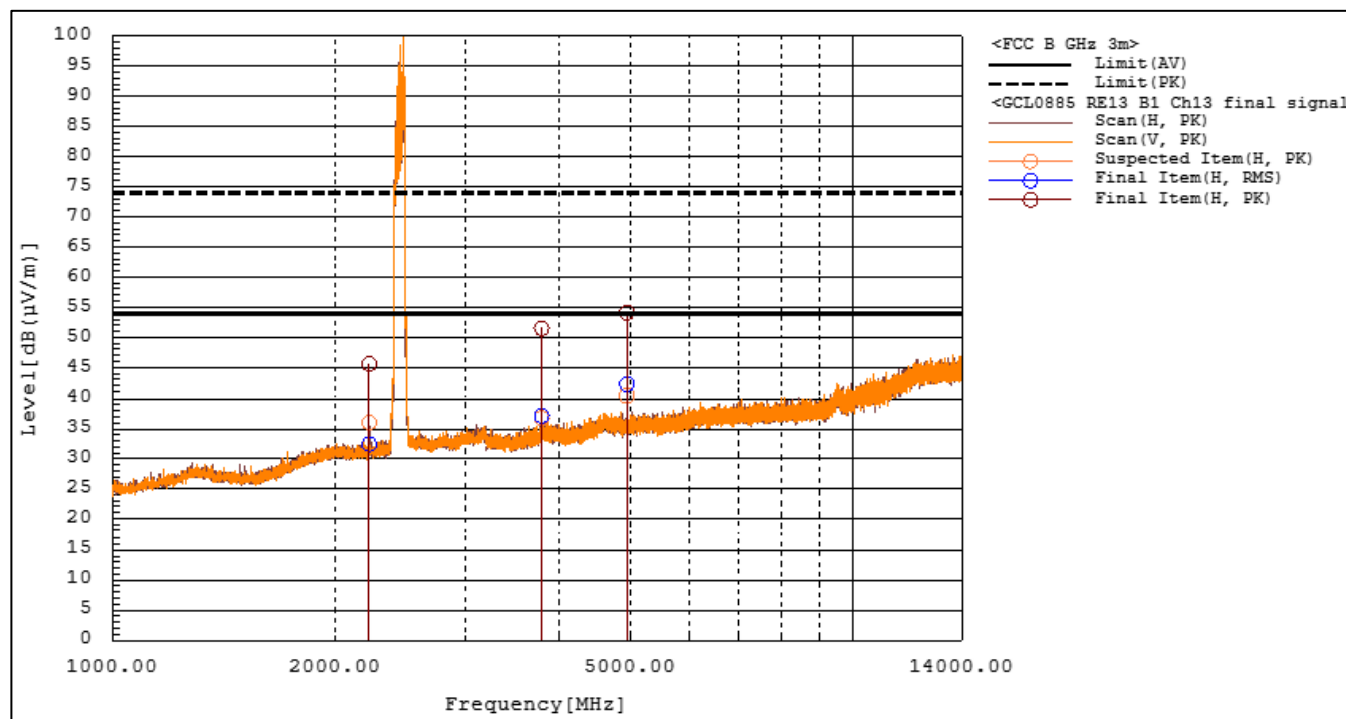


Figure RE13.4: Spectral data (IEEE 802.11b, 1 Mbps, Ch 13)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
4826.661	H	35.1	49.5	4.9	40.0	54.4	54.0	74.0	14.0	19.6	142.2	34.0
7235.750	H	32.8	47.0	8.3	41.1	55.3	54.0	74.0	12.9	18.7	355.0	282.0
9647.534	H	30.7	46.3	13.1	43.8	59.4	54.0	74.0	10.2	14.6	118.1	250.0

Table RE13.6: Emission summary (IEEE 802.11g, 9 Mbps, Ch 1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

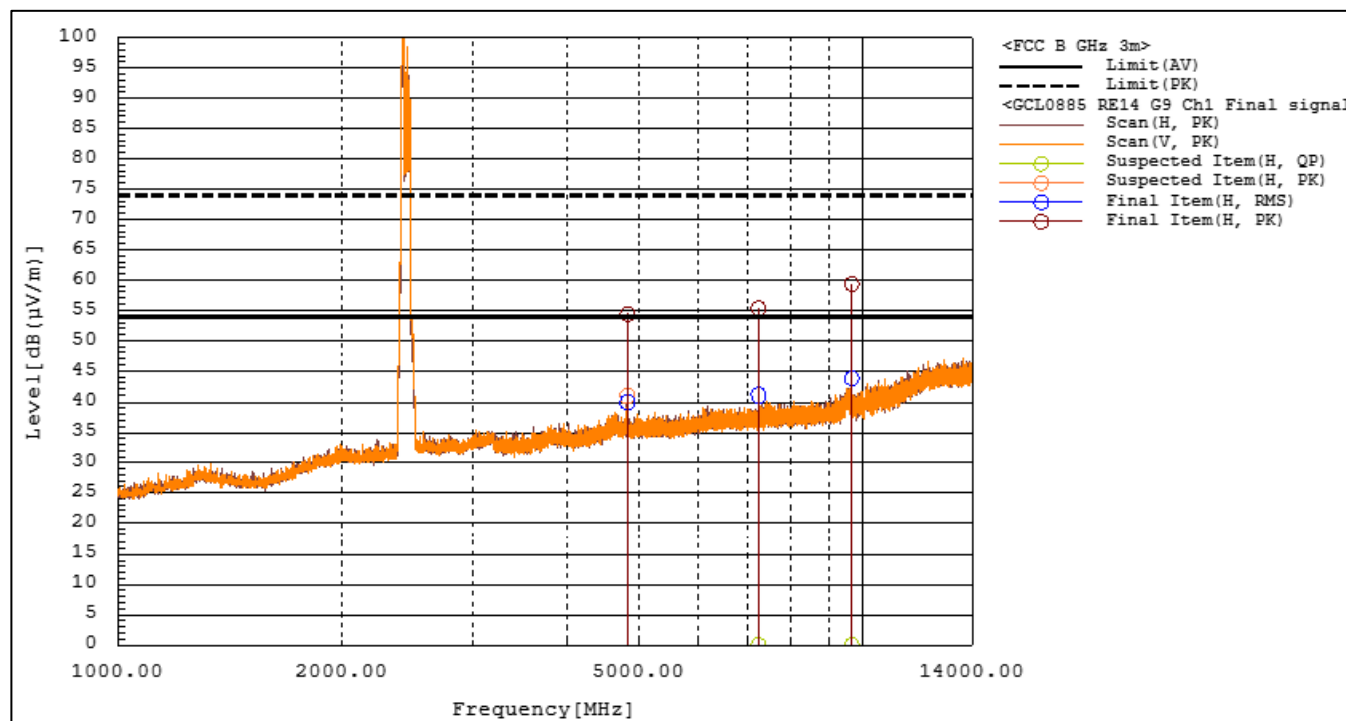


Figure RE13.5: Spectral data (IEEE 802.11g, 9 Mbps, Ch 1)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
4874.635	H	36.3	48.6	4.8	41.1	53.4	54.0	74.0	12.9	20.6	124.3	343.0
7310.742	H	32.3	47.9	8.7	41.0	56.6	54.0	74.0	13.0	17.4	193.7	0.0
9747.534	H	30.6	45.8	12.5	43.1	58.3	54.0	74.0	10.9	15.7	144.1	305.0

Table RE13.7: Emission summary (IEEE 802.11g, 9 Mbps, Ch 6)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

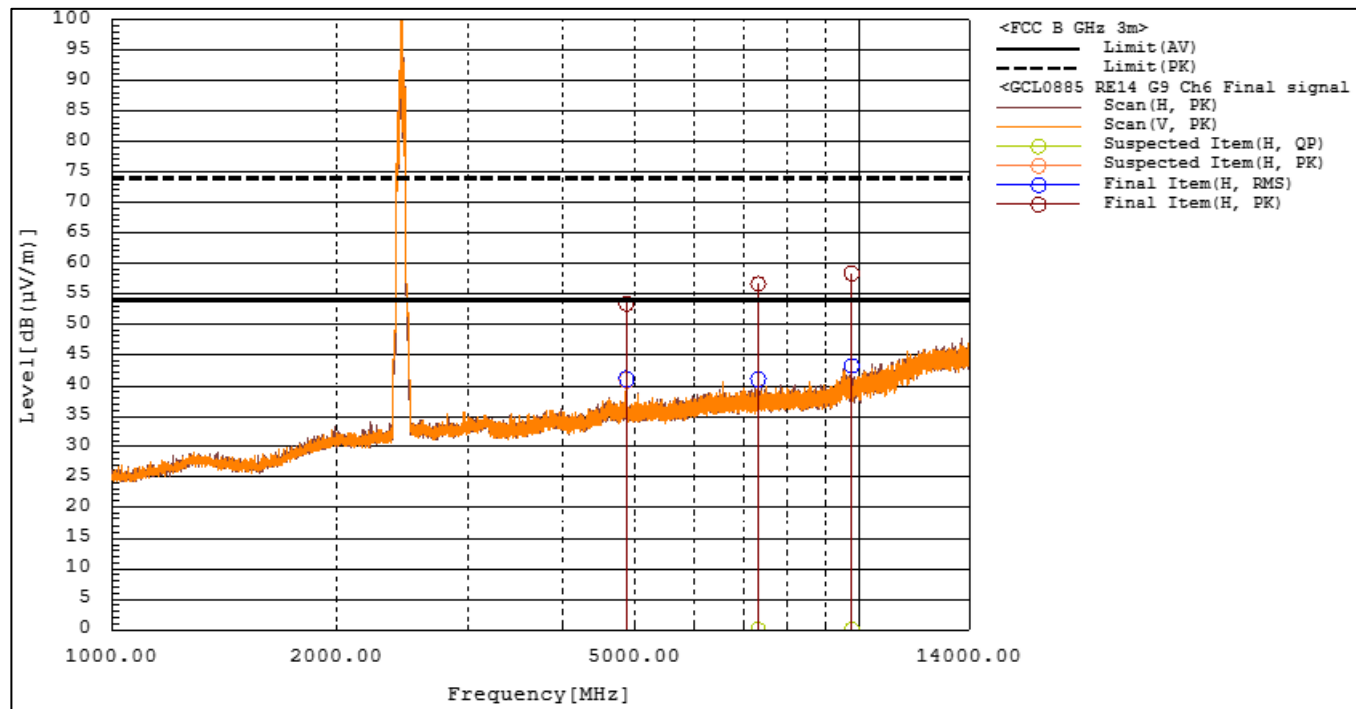


Figure RE13.6: Spectral data (IEEE 802.11g 9 Mbps, Ch 6)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
4922.140	V	33.8	47.8	4.8	38.6	52.6	54.0	74.0	15.4	21.4	195.6	6.0
7385.535	V	32.8	46.9	8.6	41.4	55.5	54.0	74.0	12.6	18.5	106.6	336.0
9848.478	V	30.1	45.7	13.5	43.6	59.2	54.0	74.0	10.4	14.8	193.4	170.0

Table RE13.8: Emission summary (IEEE 802.11g 9 Mbps, Ch 11)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

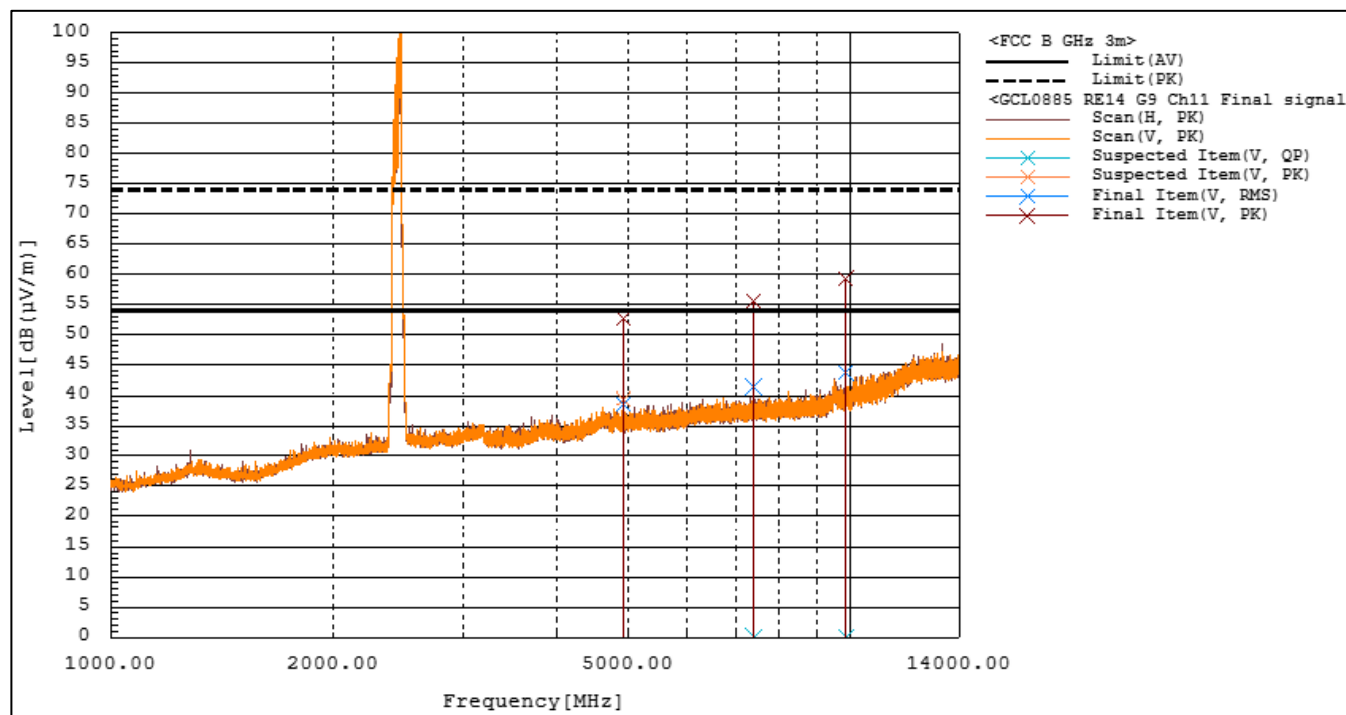


Figure RE13.7: Spectral data (IEEE 802.11g 9 Mbps, Ch 11)

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
1727.357	V	33.6	46.3	-4.5	29.1	41.8	54.0	74.0	24.9	32.2	359.0	200.0
4625.096	H	34.2	48.7	4.8	39.0	53.5	54.0	74.0	15.0	20.5	238.6	124.0
7415.869	V	32.1	46.3	8.7	40.8	55.0	54.0	74.0	13.2	19.0	375.0	11.0

Table RE13.9: Emission summary (IEEE 802.11g 9 Mbps, Ch 13)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

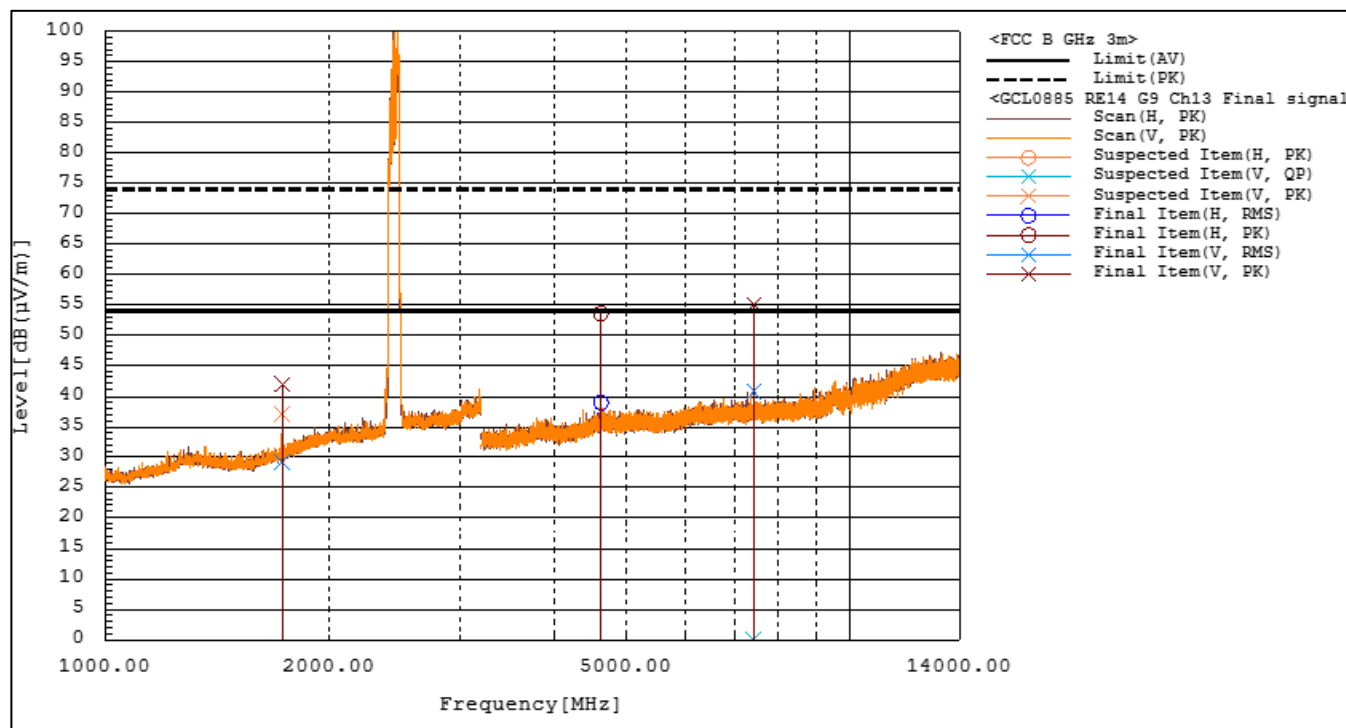


Figure RE13.8: Spectral data (IEEE 802.11g 9 Mbps, Ch 13)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE13.9: EUT test setup, first view

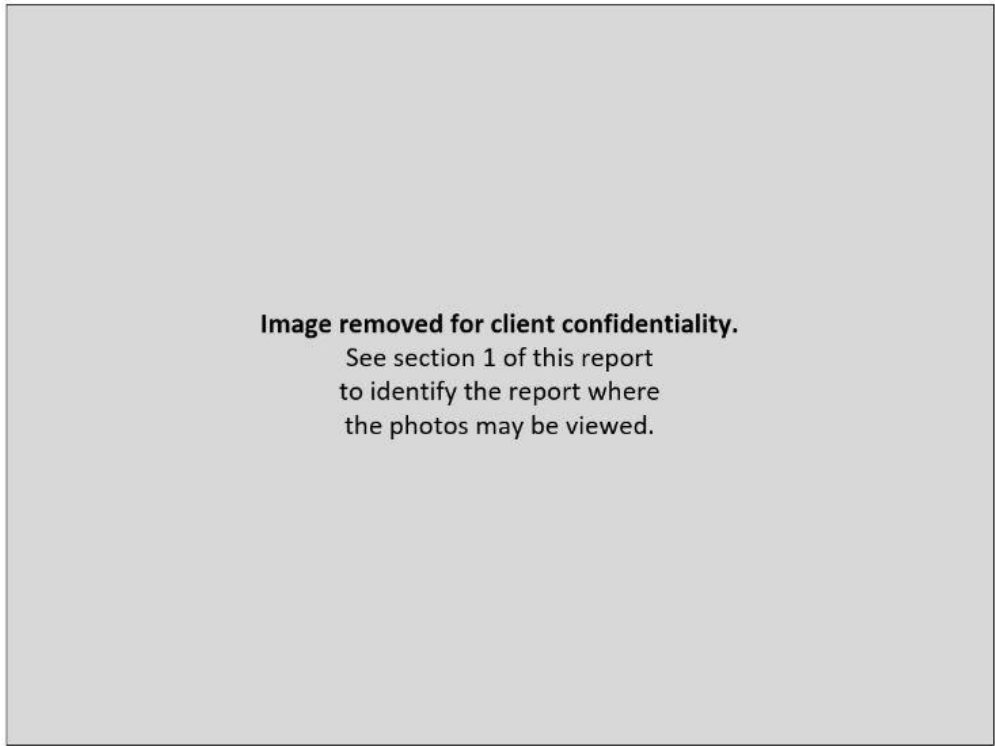


Figure RE13.10: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE16

Project GCL0885

Test Date(s) 07 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M4 (BleTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 14 GHz to 25 GHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 09 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Antenna, Horn, 10-40 GHz	ETS Lindgren	3116C	00259186	8-May-2025	8-May-2027
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 14 GHz to 40 GHz	Com-Power	PAM-840A	461364	Calibration	Not Required

Table RE16.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 14 GHz to 26.5 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

.At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 14 GHz and 25 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
21368.038	H	25.5	37.4	12.1	37.6	49.5	54.0	74.0	16.4	24.5	100.0	180.0

Table RE16.2: Emission summary (BLE, 1 Mbps, 2480 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

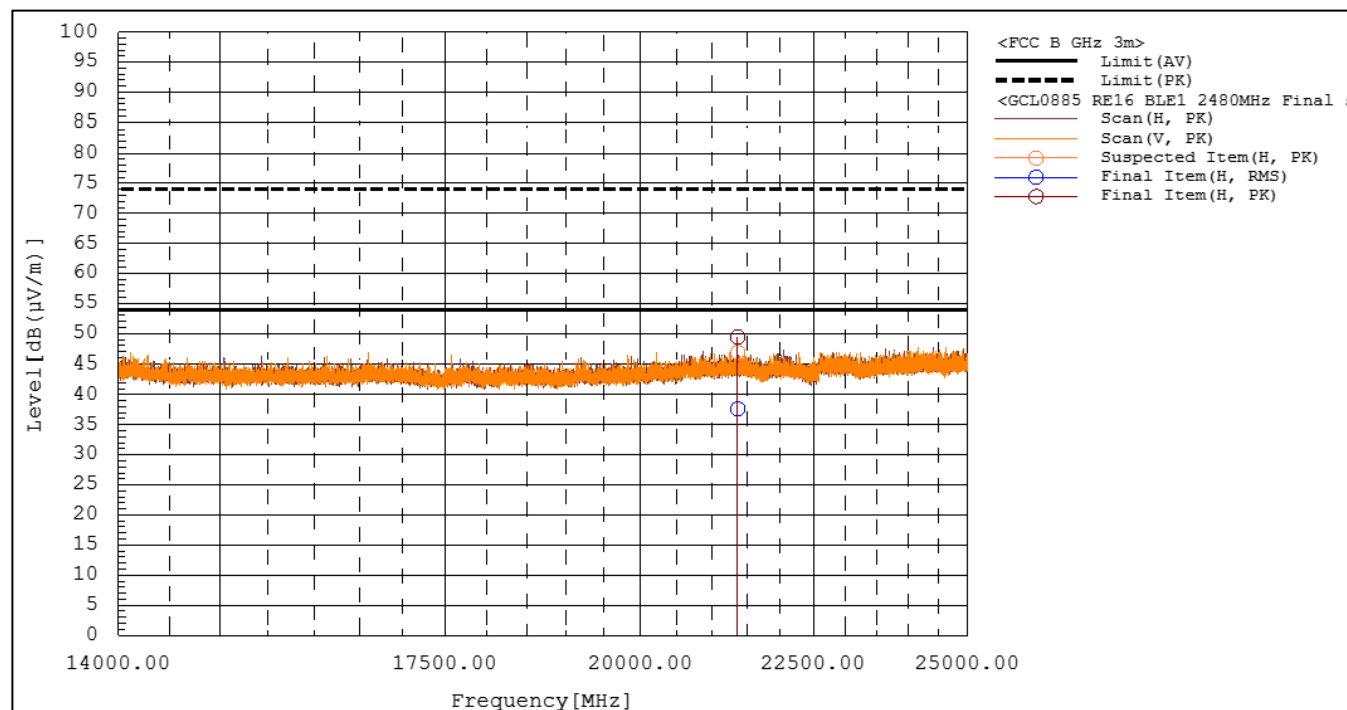


Figure RE16.1: Spectral data (BLE, 1 Mbps, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE16.2: EUT test setup, first view

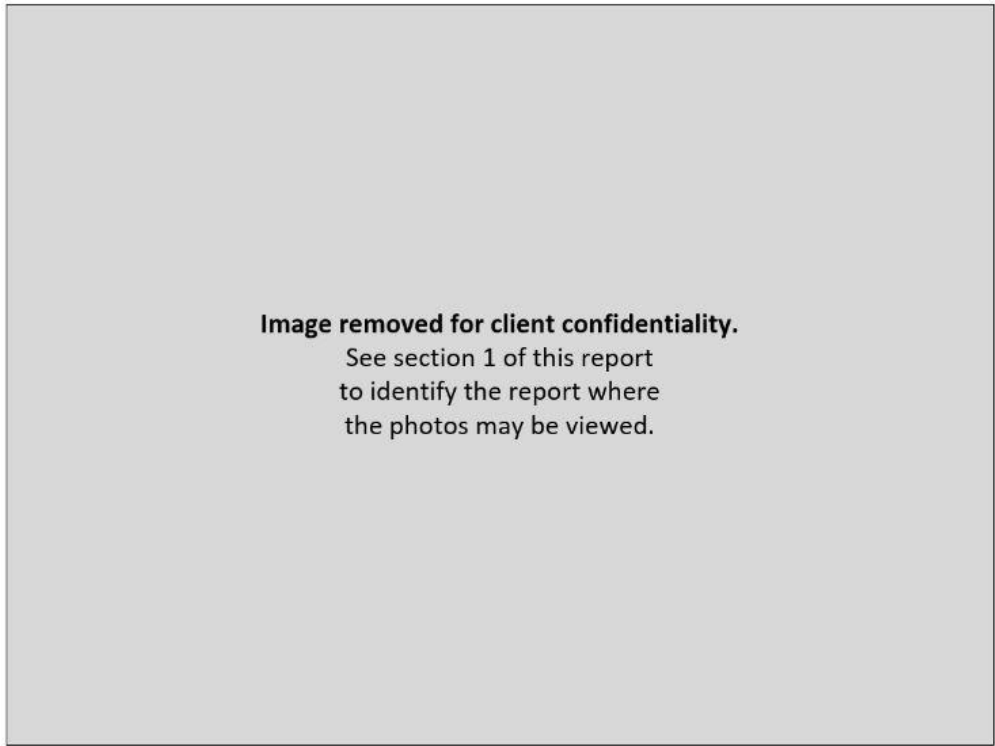


Figure RE16.3: EUT test setup, second view

This line is the end of the test record.

Test Record
Radiated Emission Test RE17
Project GCL0885

Test Date(s) 07 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M8 (WiFitx)
Arrangement A2
Input Power USB 5

Test Standards: DTS: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 14 GHz to 25 GHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 09 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Antenna, Horn, 10-40 GHz	ETS Lindgren	3116C	00259186	8-May-2025	8-May-2027
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 14 GHz to 40 GHz	Com-Power	PAM-840A	461364	Calibration	Not Required

Table RE17.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 14 GHz to 26.5 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters.

At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 14 GHz and 25 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the WIFI radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
22021.722	H	25.1	36.9	12.5	37.6	49.4	54.0	74.0	16.4	24.6	100.0	180.0

Table RE17.2: Emission summary (IEEE 802.11b, 1 Mbps, Ch 1)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

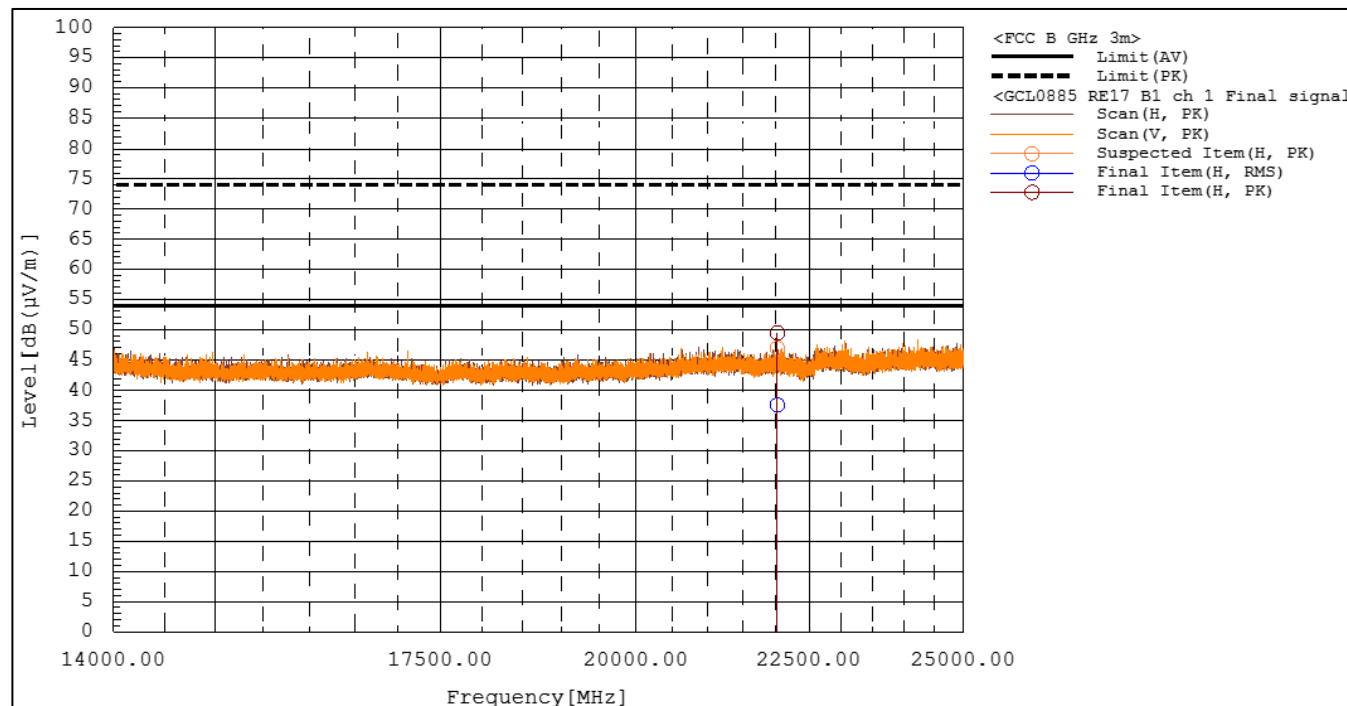


Figure RE17.1: Spectral data (IEEE 802.11b, 1 Mbps, Ch 1)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE17.2: EUT test setup, first view



Figure RE17.3: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE18

Project GCL0885

Test Date(s) 07 Dec 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M6 (AntTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report).

Frequency Range: 14 GHz to 25 GHz
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 09 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Antenna, Horn, 10-40 GHz	ETS Lindgren	3116C	00259186	8-May-2025	8-May-2027
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 14 GHz to 40 GHz	Com-Power	PAM-840A	461364	Calibration	Not Required

Table RE18.1: Test Equipment Used

Software Used: Keysight PXE software A.41.06, EPX test software Version 2025.01.000

Test Data

For test standards that require reorienting the test sample, preliminary scans were taken in those alternate orientations to find the orientation that produced that largest field at the receive antenna. With intentional radiators, that highest field is usually found at the carrier frequency. The alternate orientations are typically described as X, Y, and Z and explained with a photograph. Subsequent testing was done using on the orientation identified in this way.

The radiated emission test process continued with a preliminary scan at multiple turntable angles, antenna heights, and both antenna polarizations. Where the test standard requires cable manipulation, this was done at one of more likely worst case frequencies selected by the test personnel while observing the receiver display. At each of the frequencies selected for final measurements, the turntable angle, antenna height, and antenna polarization were explored to find the worst-case settings. Final field strength measurements were taken in that set of positions. Full maximization was not performed at frequencies that are noise floor measurements included per the test standard requirements.

In the 14 GHz to 26.5 GHz frequency range, pre-scan spectral data was taken at 1 meter and extrapolated to a 3 meter distance. Final measurements were made at 3 meters
At azimuth angle 180° the 'front' reference mark of the turntable is pointed Southward. At 270° the reference mark points West. At 90° it points East. At 173° the turntable reference mark is pointed directly at the antenna. The

designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The table shows the selected final measurement data between 14 GHz and 25 GHz. It includes at least the six strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit at 3m. Any unintentional radio emission limits are not applied to intentional radio signals.

Test limits for electric fields above 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m with a factor of 20 dB per decade of distance. Test limits for electric or magnetic fields below 30 MHz that are stated for a distance other than 3 m are adjusted to 3 m. The conservative method of ANSI C63.10 clause 6.4.4.1 is applied: 40 dB per decade for distances within the boundary (wavelength / 2 Pi), 20 dB per decade beyond that distance boundary.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the ANT radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	Pol.	Reading		Factor	Level		Limit		Margin		Height	Angle
MHz		dB(μ V)		dB(1/m)	dB(μ V/m)		dB(μ V/m)		dB		cm	deg
		RMS	PK		RMS	PK	AV	PK	RMS	PK		
22631.860	H	24.7	36.5	12.8	37.5	49.3	54.0	74.0	16.5	24.7	100.0	180.0

Table RE18.2: Emission summary (ANT, 240 MHz)

The graph below shows the background spectrum observed during pre-scan, as well as the final data points from the table above.

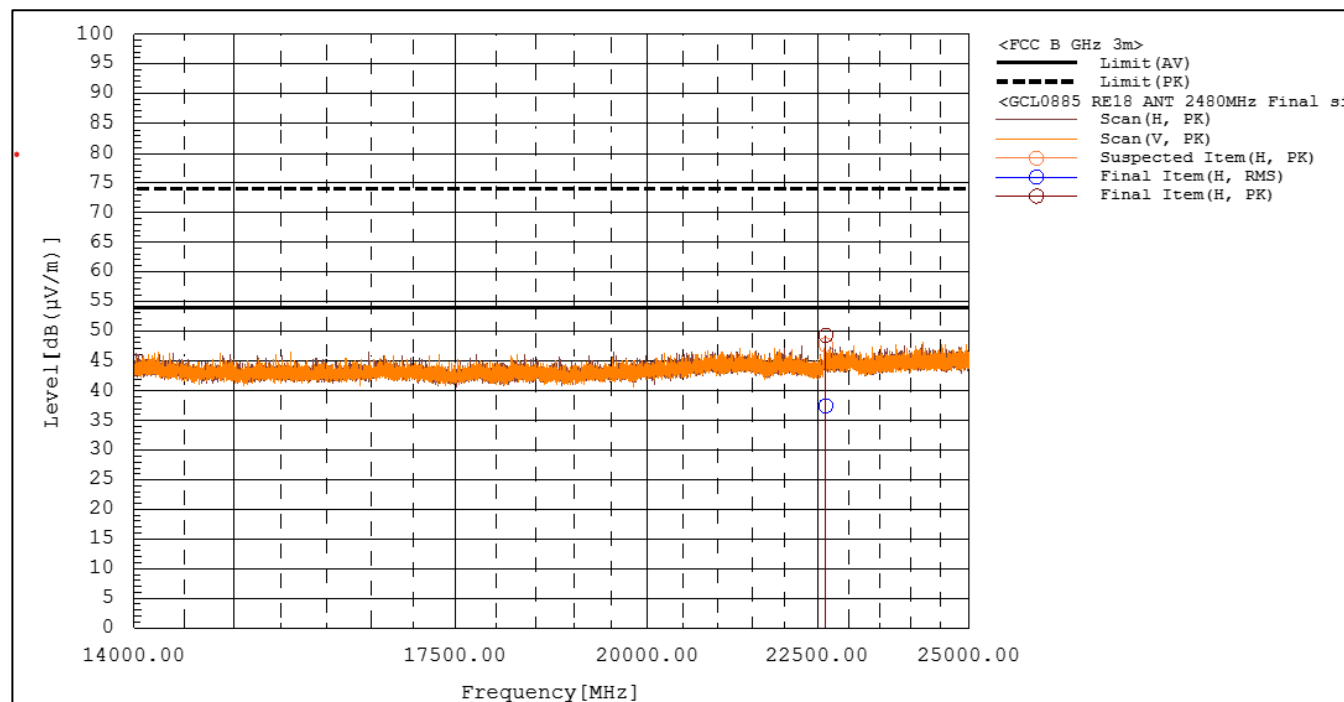


Figure RE18.1: Spectral data (ANT, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE18.2: EUT test setup, first view

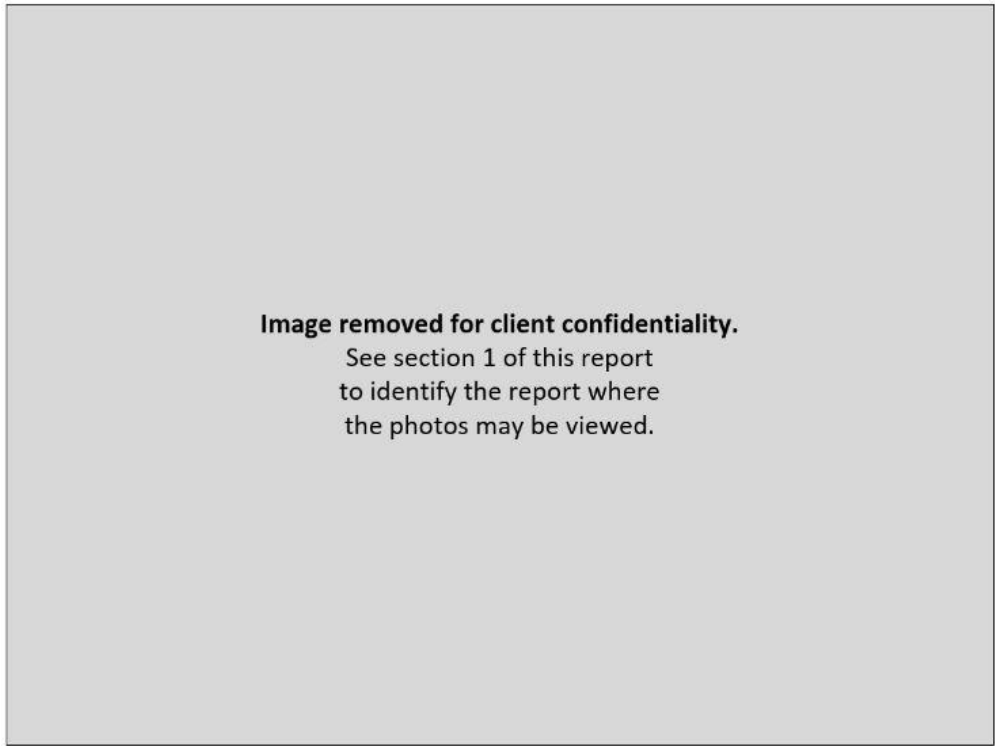


Figure RE18.3: EUT test setup, second view

This line is the end of the test record.

Test Record

Radiated Emission Test RE01

Project GCL0885

Test Date(s) 11 Nov 2025
01 Dec 2025 (N1 Ch11, G24 Ch12, & N4 Ch13)

Test Personnel Vladimir Tolstik

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M8 (WiFitx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-247, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: Restricted Bands (2310-2390 MHz, 2483.5-2500 MHz)

Pass/Fail Judgment: PASS

Test record created by: Aditya Prakash
Date of this record: 8 December 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	24-Oct-2024	29-Nov-2025
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/	1	Calibration	Not Required

Table RE01.1: Test Equipment Used

Software Used: Keysight PXE receiver software A.41.06 (44G), A.32.06 (26G); FCC Restricted Band 2p4GHz Data Analysis Template v2a 2025May27; RE Signal Maximization Tool v2025May27.xlsx

Test Data

US and Canadian laws contain dozens of bands where radio operation is restricted. Compliance with most of those band restrictions is typically demonstrated by a series of spurious emission tests covering a very wide span of frequencies from kilohertz to Gigahertz. This test record focuses on restricted bands that are immediately adjacent to the authorized band in which the test sample radio operate. It shows whether the modulation products are sufficiently suppressed to meet the restricted band requirements.

This restricted band investigation began with a benchtop setup wherein the emissions in the restricted bands were observed from a modified test sample with an RF output cable replacing the onboard antenna. The actual emission levels within restricted bands in many of the test sample's available transmission modes are too low to be reliably measured in the radiated environment. By applying the required peak and average detectors and bandwidths to the signals direct from the transmitter, lab staff identified the worst-case operational modes. These were then measured using an unmodified unit in the required radiated environment.

The radiated emission test began with a preliminary scan in each restricted band at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Final field strength measurements were taken in that set of positions.

Restricted band measurements in the lower band were made while the transmitter was tuned to channels 1 and 2. Measurements in the upper band were made while the transmitter was tuned to channels 11,12 and 13. Measurement data for additional channels may be present in this record.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between the FCC restricted bands. It includes a the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC restricted band 'Class B' Limit at 3 m listed at 15.209 and RSS-Gen clause 8.9.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.). The duty cycle for the Wi-Fi radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2389.3	54	74	37.79	51.72	16.21	22.28	-62	3582	VERT	RMS	0.00
2390	54	74	37.99	51.32	16.01	22.68	-62	3582	VERT	RMS	0.00

Table RE01.2: FCC restricted bands from 2200 to 2390 MHz (IEEE 802.11b, 1 Mbps, Ch1)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2390	54	74	45.83	64.15	8.17	9.86	-62	3582	VERT	RMS	0.00

Table RE01.3: FCC restricted bands from 2200 to 2390 MHz (IEEE 802.11g, 18 Mbps, Ch1)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	42.51	55.63	11.49	18.37	-145	1000	VERT	RMS	0.00

Table RE01.4: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch10)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.8	54	74	49.77	66.29	4.23	7.71	-145	1000	VERT	RMS	0.00
2483.5	54	74	50.06	66.55	3.94	7.45	-145	1000	VERT	RMS	0.00

Table RE01.5: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11n, 3 Mbps, Ch10)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	43.31	56.88	10.69	17.12	-145	1000	VERT	RMS	0.00

Table RE01.6: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch11)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	50.96	70.19	3.04	3.81	-145	1000	VERT	RMS	0.00

Table RE01.7: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11n, 1 Mbps, Ch11)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	48.83	59.40	5.17	14.60	-145	1000	VERT	RMS	0.00
2484.3	54	74	50.50	58.67	3.50	15.33	-145	1000	VERT	RMS	0.00

Table RE01.8: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch12)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	51.38	67.00	2.62	7.00	-145	1000	VERT	RMS	0.00
2484.5	54	74	50.61	66.81	3.39	7.19	-145	1000	VERT	RMS	0.00

Table RE01.9: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11g, 24 Mbps, Ch12)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	48.80	66.35	5.20	7.66	-145	1000	VERT	RMS	0.00
2486.8	54	74	52.69	61.25	1.31	12.75	-145	1000	VERT	RMS	0.00

Table RE01.10: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch13)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	51.26	69.60	2.74	4.40	-145	1000	VERT	RMS	0.00
2483.5	54	74	51.32	69.44	2.68	4.56	-145	1000	VERT	RMS	0.00

Table RE01.11: FCC restricted bands from 2483.5 to 2500 MHz (IEEE 802.11n, 4 Mbps, Ch13)

The graphs below show the background spectrum observed during pre-scan, as well as the final data points from the table above.

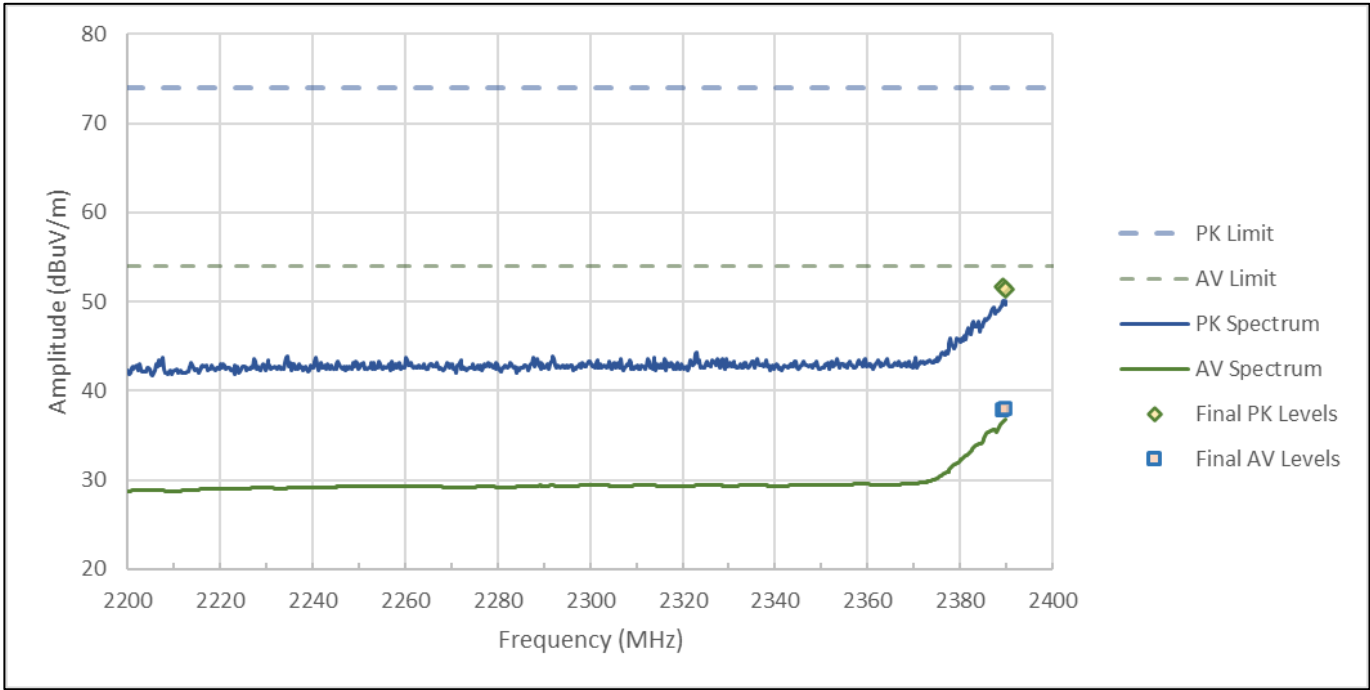


Figure RE01.1: FCC restricted band spectral data from 2200 to 2390 MHz (IEEE 802.11b, 1 Mbps, Ch1)

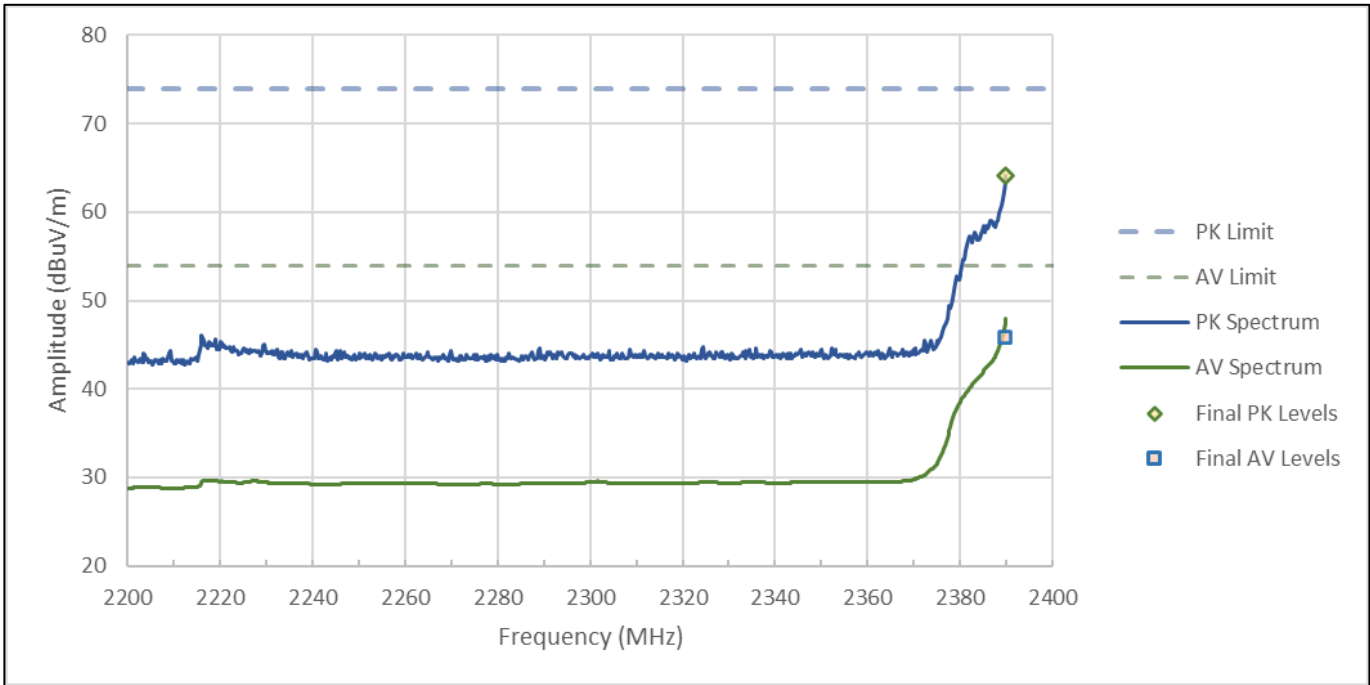


Figure RE01.2: FCC restricted band spectral data from 2200 to 2390 MHz (IEEE 802.11g, 18 Mbps, Ch1)

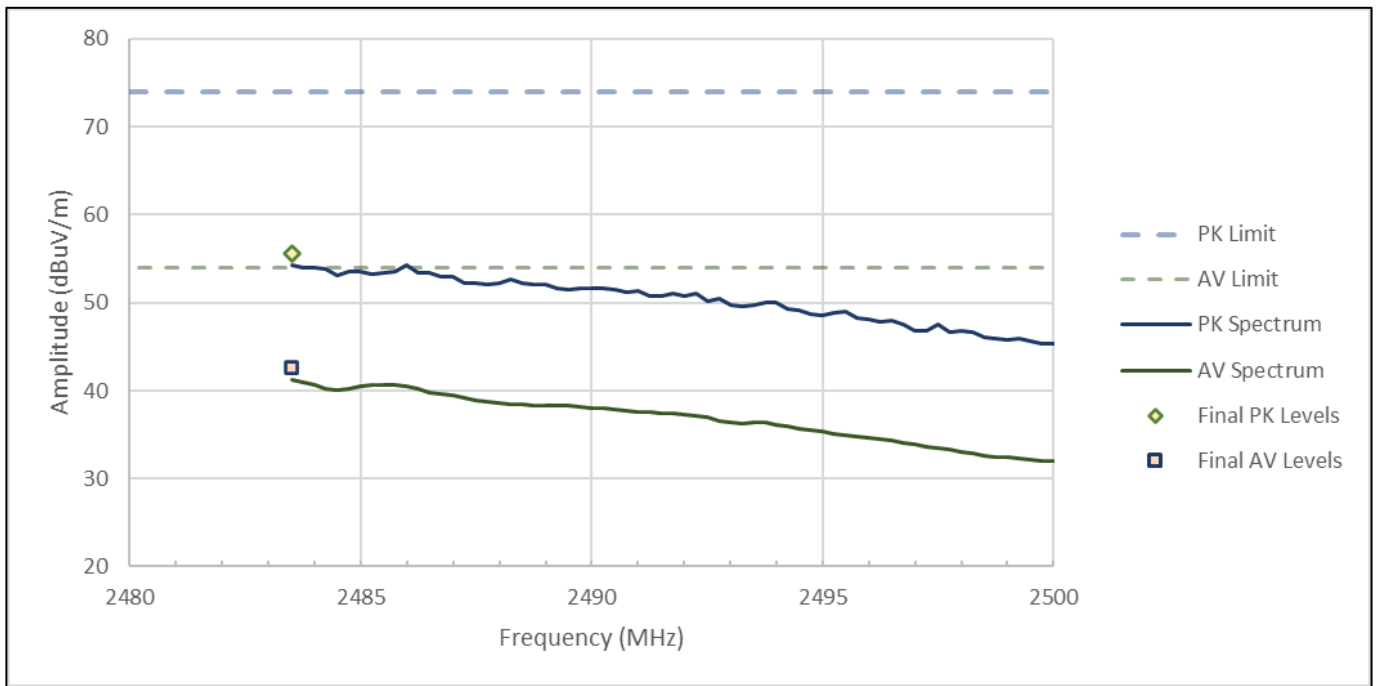


Figure RE01.3: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch10)

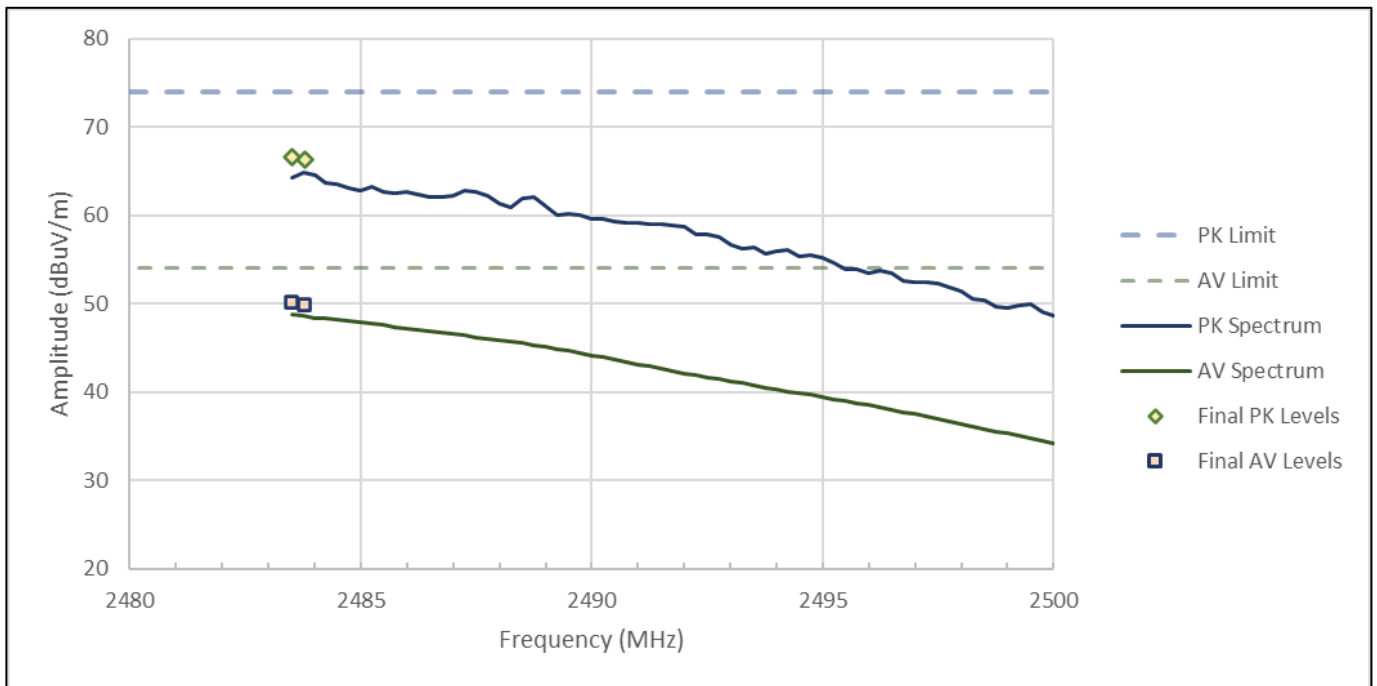


Figure RE01.4: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11n, 3 Mbps, Ch10)

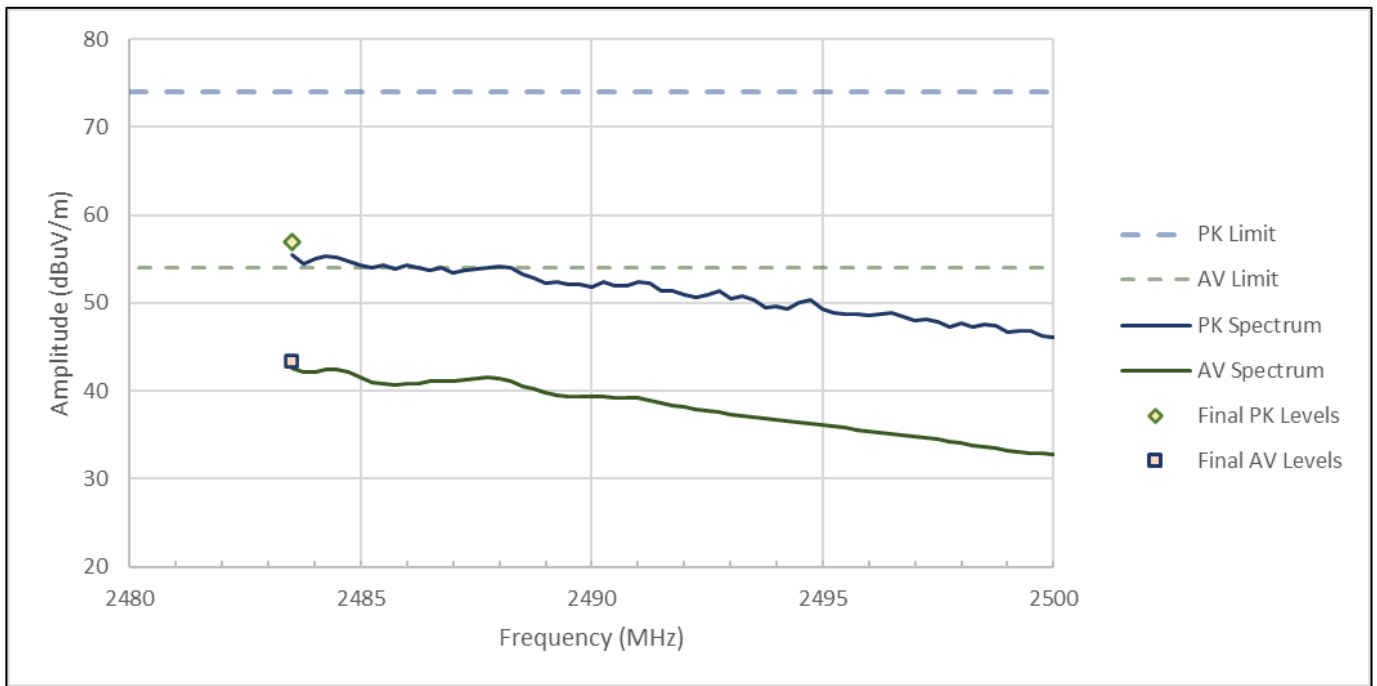


Figure RE01.5: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch11)

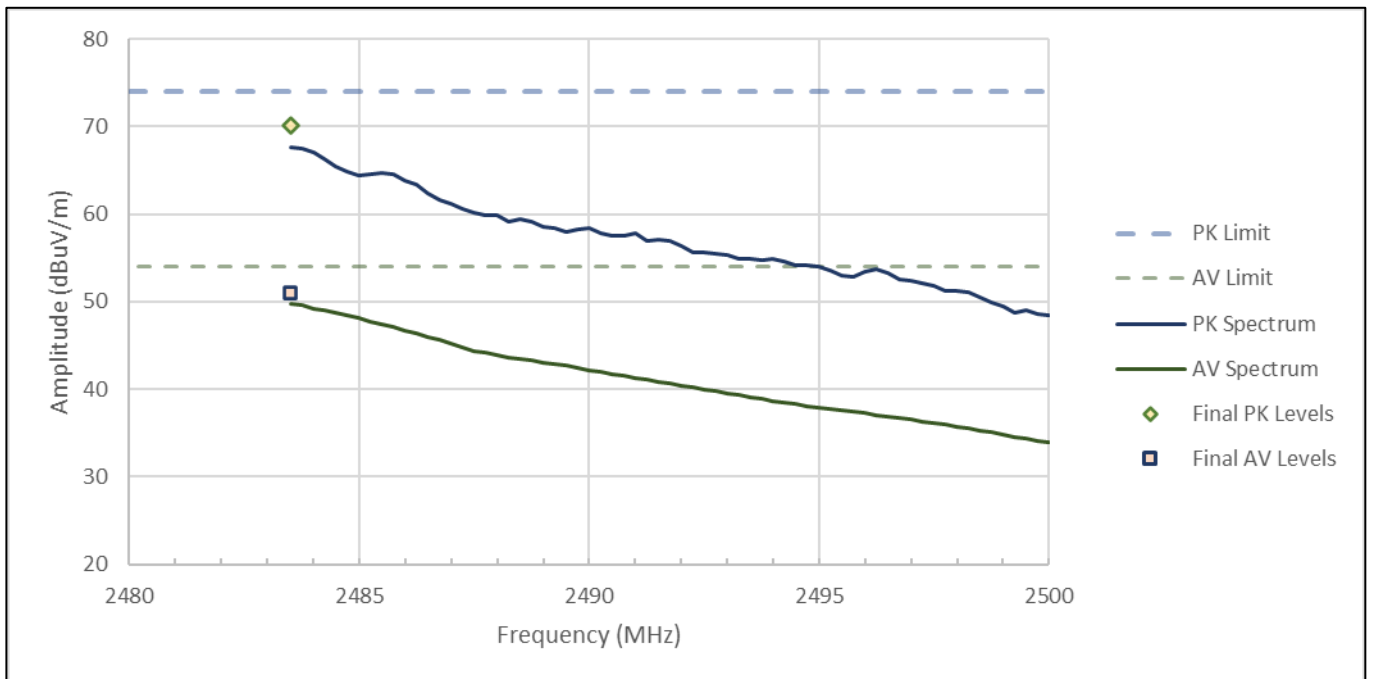


Figure RE01.6: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11n, 1 Mbps, Ch11)

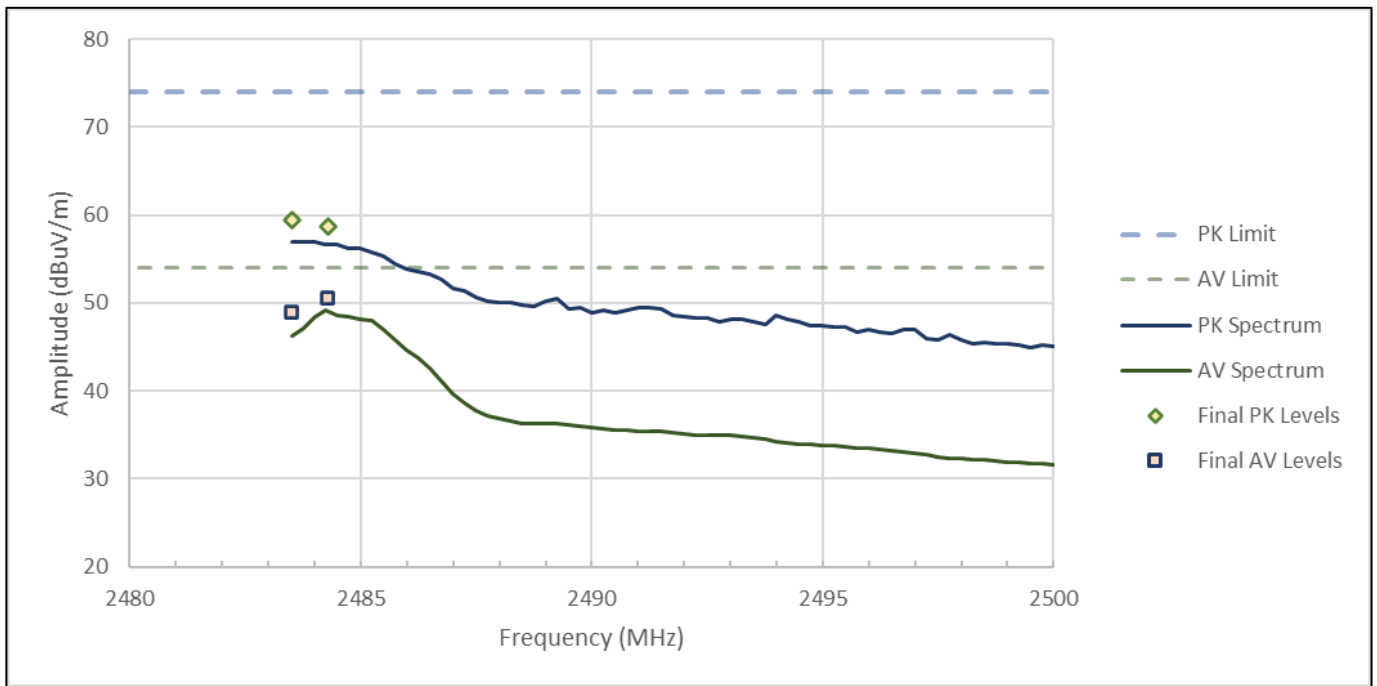


Figure RE01.7: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch12)

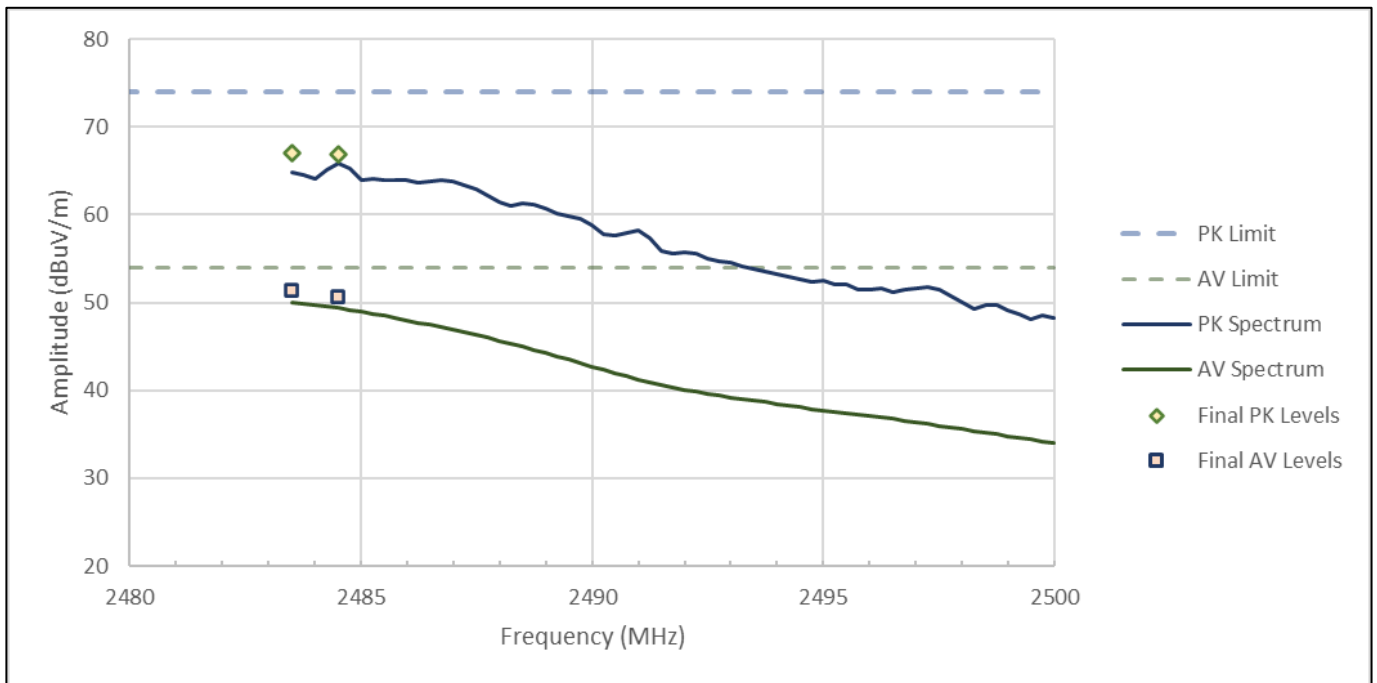


Figure RE01.8: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11g, 24 Mbps, Ch12)

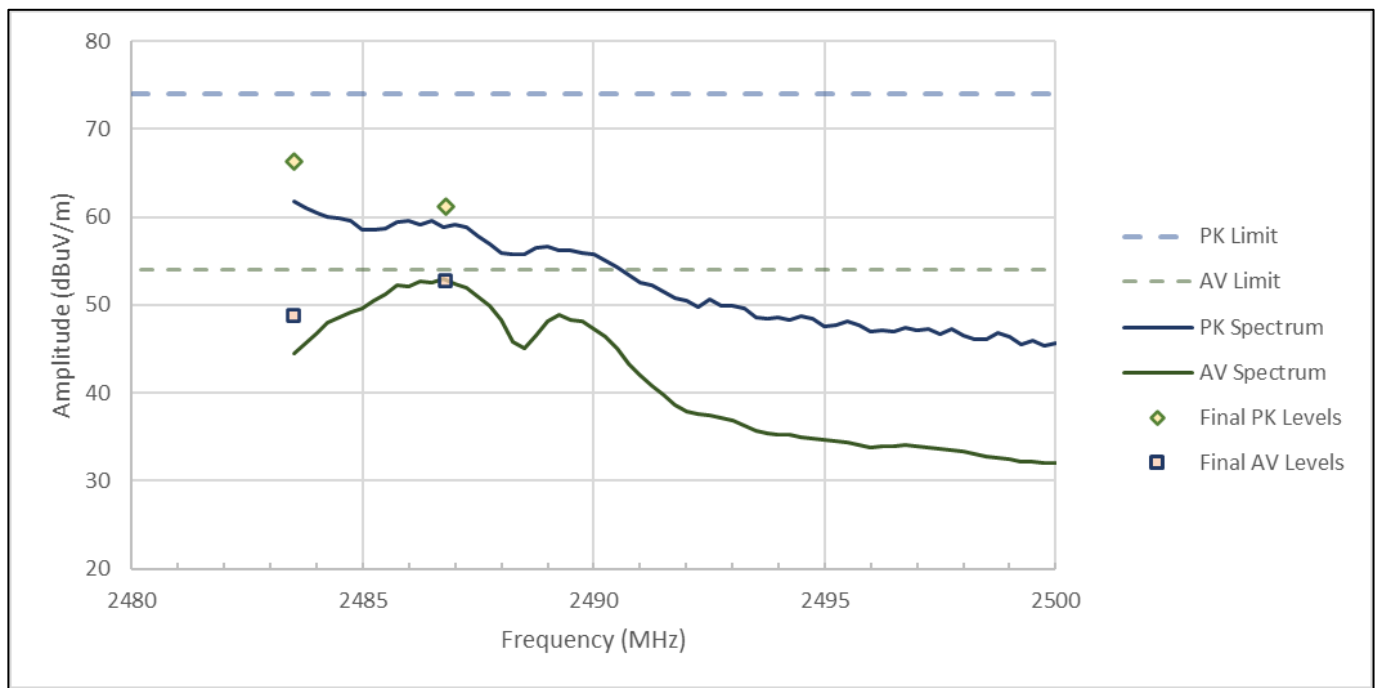


Figure RE01.9: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11b, 1 Mbps, Ch13)

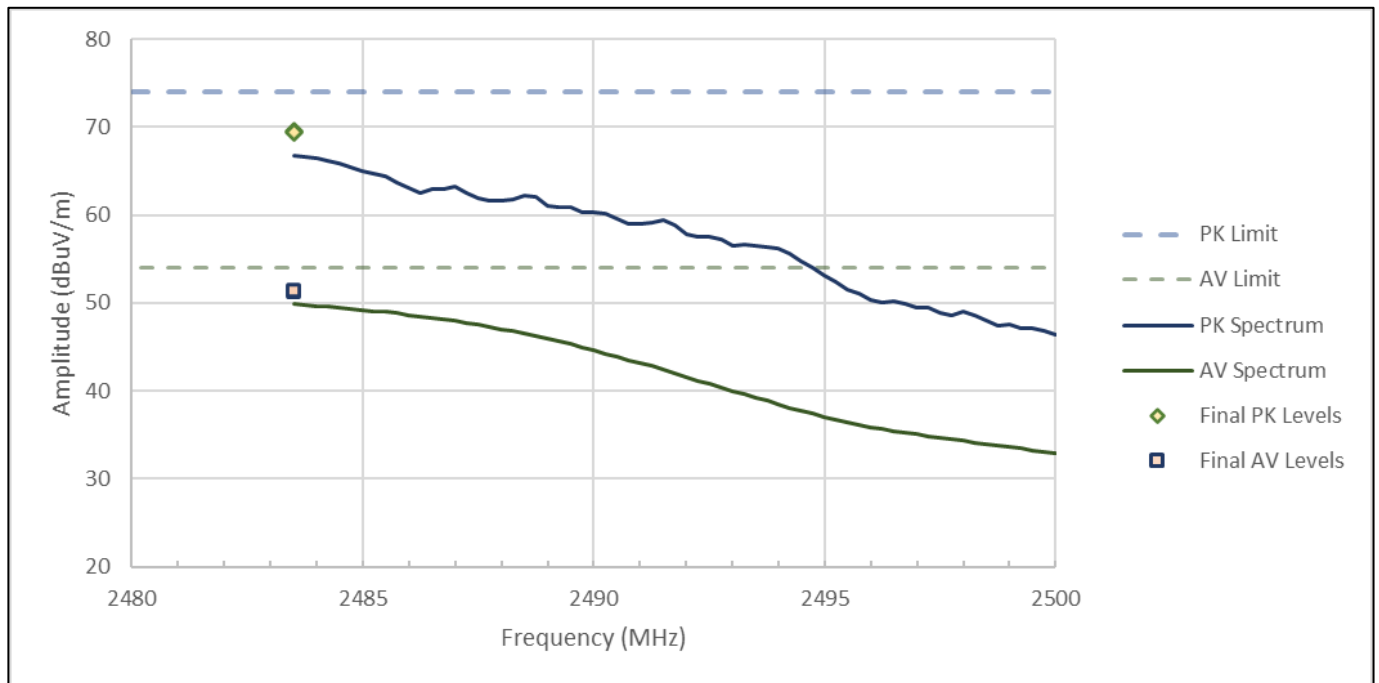


Figure RE01.10: FCC restricted band spectral data from 2483.5 to 2500 MHz (IEEE 802.11n, 4 Mbps, Ch13)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE01.11: EUT test setup, primary view



Figure RE01.12: EUT test setup, reverse view

Image removed for client confidentiality.

See section 1 of this report
to identify the report where
the photos may be viewed.

Figure RE01.13: EUT test setup, close up view

This line is the end of the test record.

Test Record

Radiated Emission Test RE03

Project GCL0885

Test Date(s) 25 November 2025
Test Personnel Vladimir Tolstik

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M4 (BleTx)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-247, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: Restricted Bands (2310-2390 MHz, 2483.5-2500 MHz)
Pass/Fail Judgment: PASS

Test record created by: Aditya Prakash
Date of this record: 8 December 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY65140100	21-Nov-2025	21-Nov-2026
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/1		Calibration	Not Required

Table RE03.1: Test Equipment Used

Software Used: Keysight PXE receiver software A.41.06, FCC Restricted Band 2p4GHz Data Analysis Template v2a 2025May27, RE Signal Maximization Tool v2025May27.xlsx

Test Data

US and Canadian laws contain dozens of bands where radio operation is restricted. Compliance with most of those band restrictions is typically demonstrated by a series of spurious emission tests covering a very wide span of frequencies from kilohertz to Gigahertz. This test record focuses on restricted bands that are immediately adjacent to the authorized band in which the test sample radio operate. It shows whether the modulation products are sufficiently suppressed to meet the restricted band requirements.

The radiated emission test began with a preliminary scan in each restricted band at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Final field strength measurements were taken in that set of positions.

Restricted band measurements in the lower band were made while the transmitter was tuned to its lowest frequency of 2402 MHz for the 1 Mbps data rate, and 2404 MHz for the 2 Mbps data rate. Measurements in the upper band were made while the transmitter was tuned to its highest frequency of 2480 MHz for the 1 Mbps data rate, and 2478 MHz for the 2 Mbps data rate.

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between the FCC restricted bands. It includes a the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC restricted band 'Class B' Limit at 3 m listed at 15.209 and RSS-Gen clause 8.9.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the Bluetooth Low Energy radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2390	54	74	35.30	62.67	18.71	11.33	-134	1599	VERT	RMS	0.00
2390	54	74	35.30	62.78	18.70	11.22	-134	1599	VERT	RMS	0.00

Table RE03.2: FCC restricted bands from 2200 to 2390 MHz (BLE, 1 Mbps, 2402 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2390	54	74	34.38	66.15	19.62	7.85	-134	1599	VERT	RMS	0.00
2388.3	54	74	34.85	65.40	19.15	8.60	-134	1599	VERT	RMS	0.00

Table RE03.3: FCC restricted bands from 2200 to 2390 MHz (BLE, 1 Mbps, 2404 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	41.51	68.53	12.50	5.47	-138	2111	VERT	RMS	0.00
2484	54	74	42.38	67.95	11.62	6.05	-138	2111	VERT	RMS	0.00

Table RE03.4: FCC restricted band from 2483.5 to 2500 MHz (BLE, 1 Mbps, 2476 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	42.51	71.74	11.49	2.26	-138	2111	VERT	RMS	0.00
2483.5	54	74	42.53	71.56	11.47	2.44	-138	2111	VERT	RMS	0.00

Table RE03.5: FCC restricted band from 2483.5 to 2500 MHz (BLE, 1 Mbps, 2480 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2389.8	54	74	37.55	67.39	16.45	6.61	-134	1599	VERT	RMS	0.00
2389.5	54	74	37.43	67.28	16.57	6.72	-134	1599	VERT	RMS	0.00

Table RE03.6: FCC restricted band from 2200 to 2390 MHz (BLE, 2 Mbps, 2404 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	45.11	68.02	8.89	5.98	-138	2111	VERT	RMS	0.00
2484	54	74	45.09	67.34	8.91	6.66	-138	2111	VERT	RMS	0.00

Table RE03.7: FCC restricted band from 2483.5 to 2500 MHz (BLE, 2 Mbps, 2476 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.5	54	74	46.79	66.91	7.21	7.09	-138	2111	VERT	RMS	0.00
2483.5	54	74	46.79	66.95	7.22	7.05	-138	2111	VERT	RMS	0.00

Table RE03.8: FCC restricted band from 2483.5 to 2500 MHz (BLE, 2 Mbps, 2478 MHz)

The graphs below show the background spectrum observed during pre-scan, as well as the final data points from the table above.

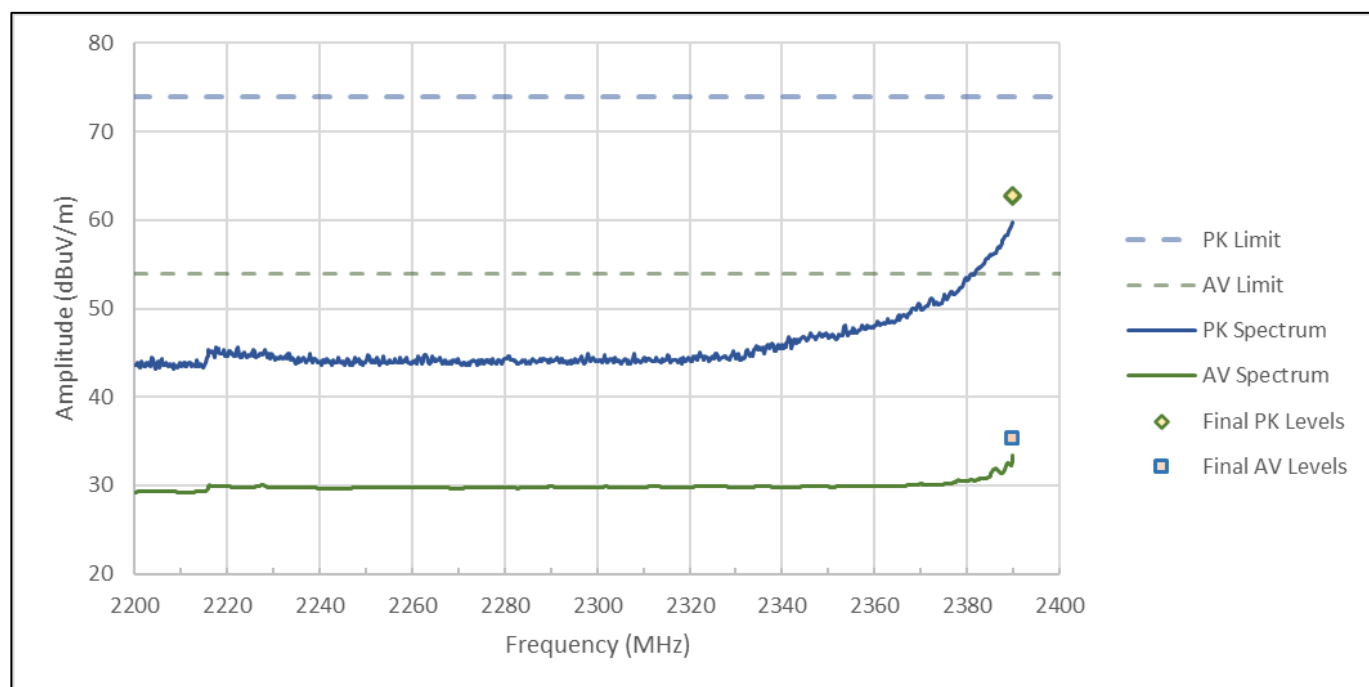


Figure RE03.1: FCC restricted band spectral data from 2200 to 2390 MHz (BLE, 1 Mbps, 2402 MHz)

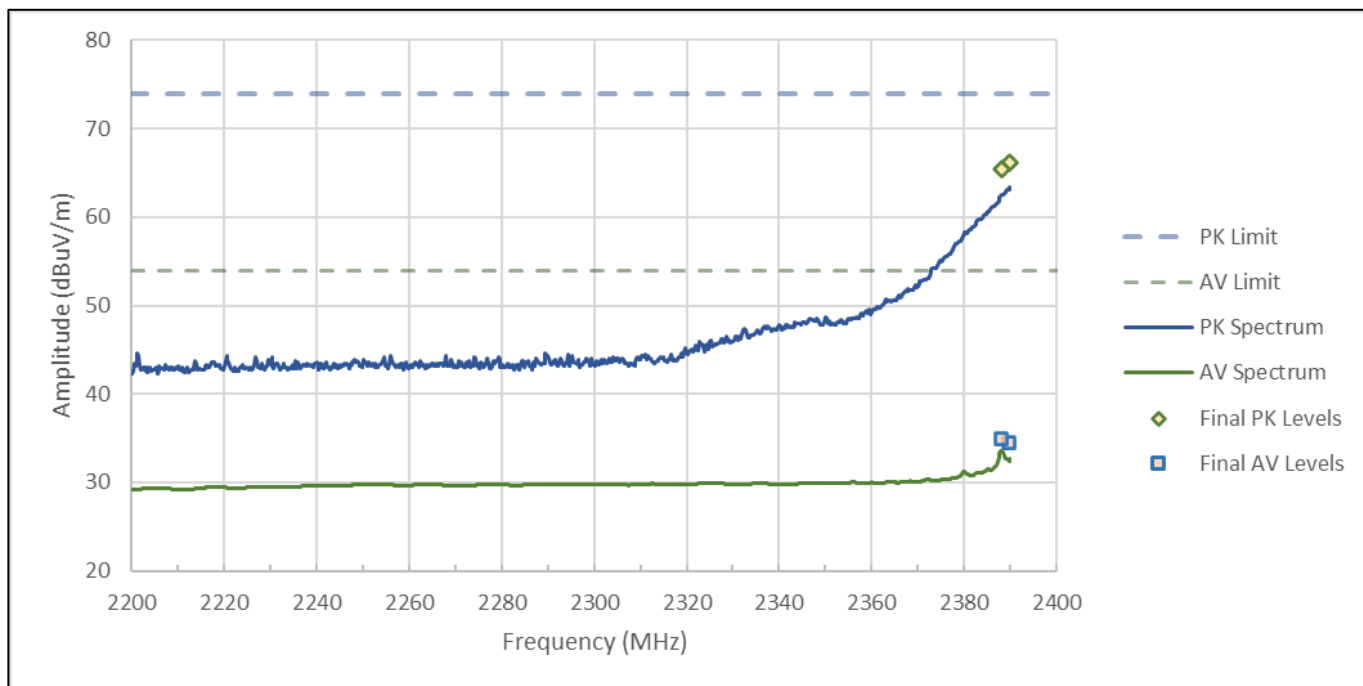


Figure RE03.2: FCC restricted band spectral data from 2200 to 2390 MHz (BLE, 1 Mbps, 2404 MHz)

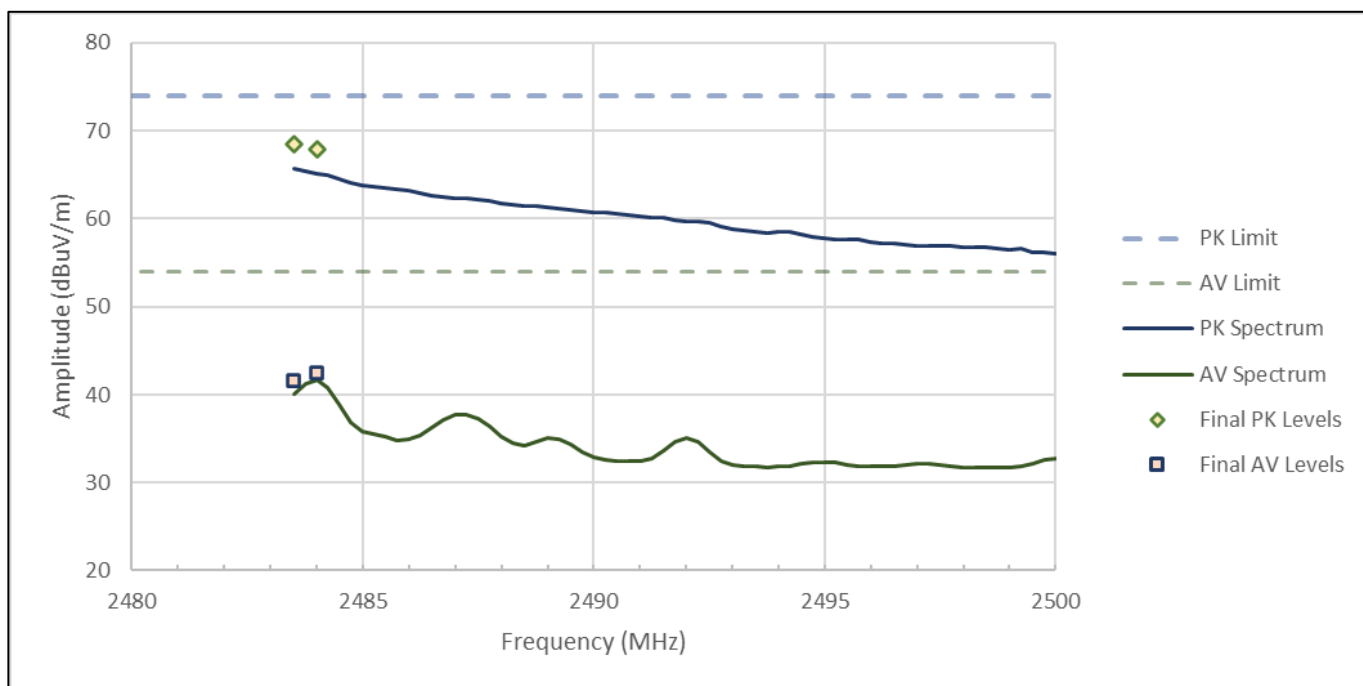


Figure RE03.3: FCC restricted band spectral data from 2483.5 to 2500 MHz (BLE, 1 Mbps, 2476 MHz)

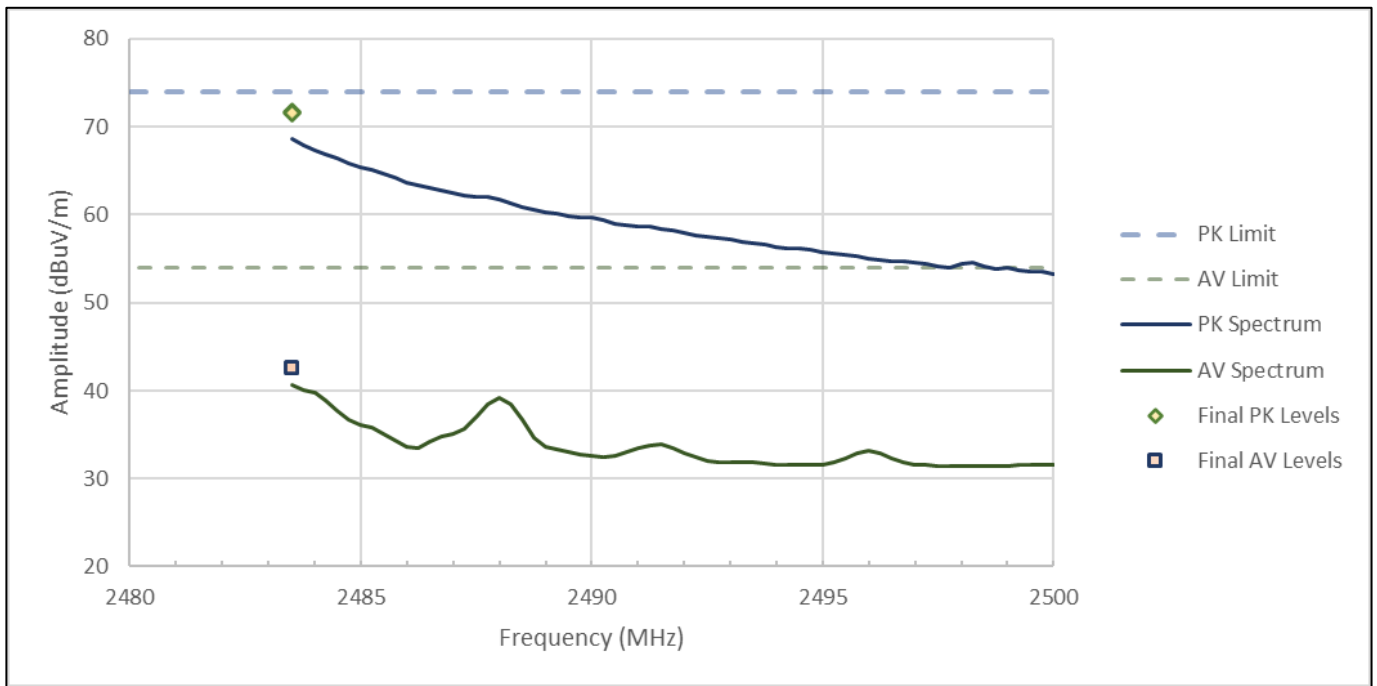


Figure RE03.4: FCC restricted band spectral data from 2483.5 to 2500 MHz (BLE, 1 Mbps, 2480 MHz)

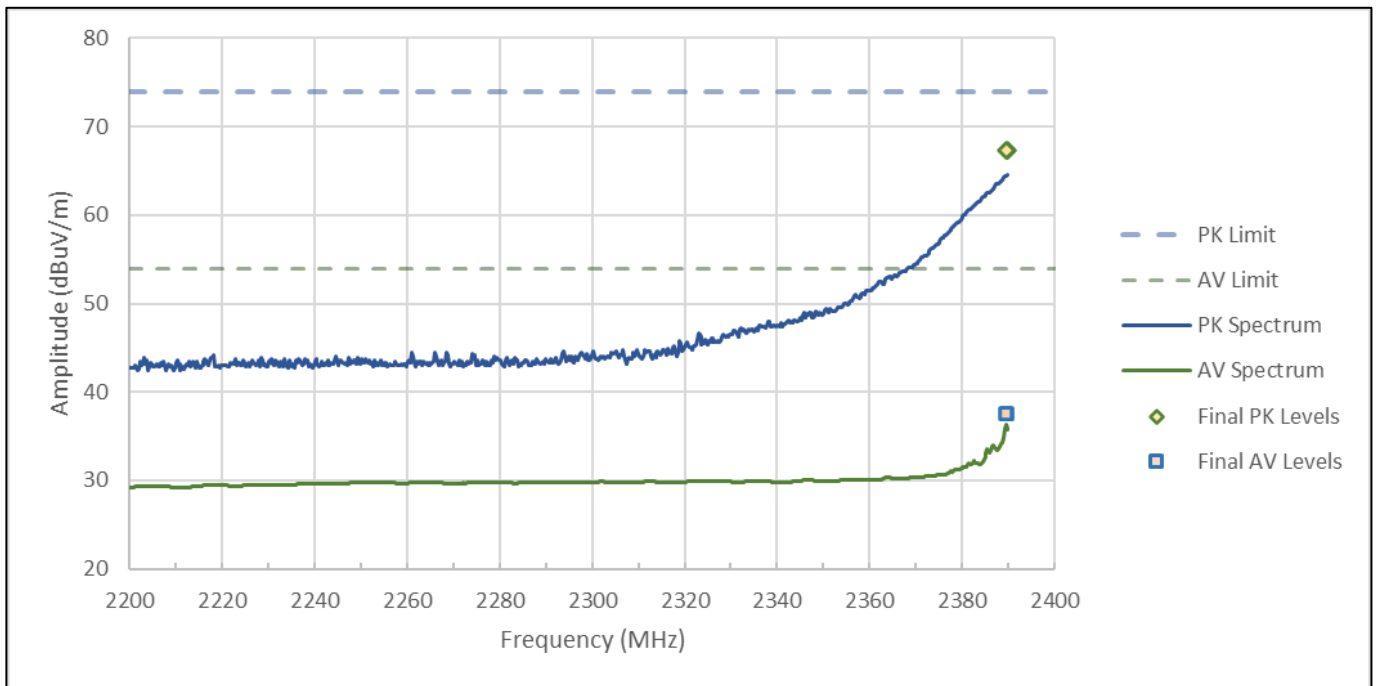


Figure RE03.5: FCC restricted band spectral data from 2200 to 2390 MHz (BLE, 2 Mbps, 2404 MHz)

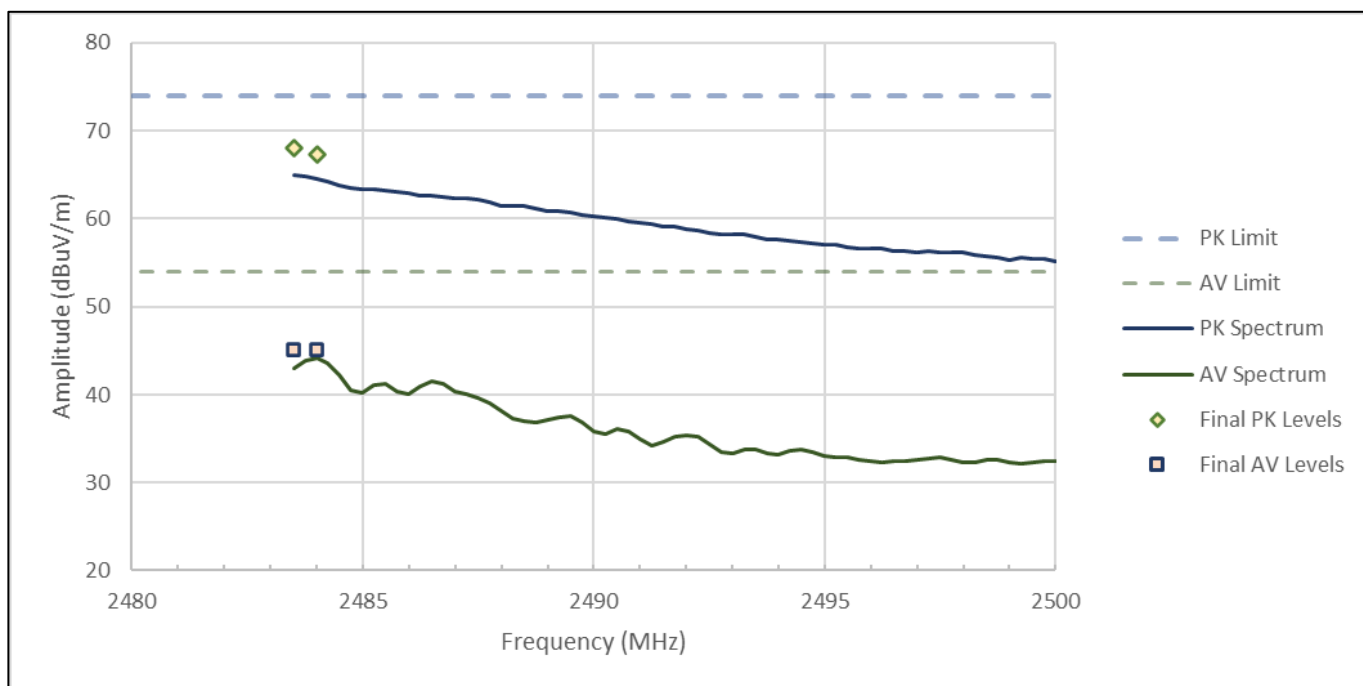


Figure RE03.6: FCC restricted band spectral data from 2483.5 to 2500 MHz (BLE, 2 Mbps, 2476 MHz)

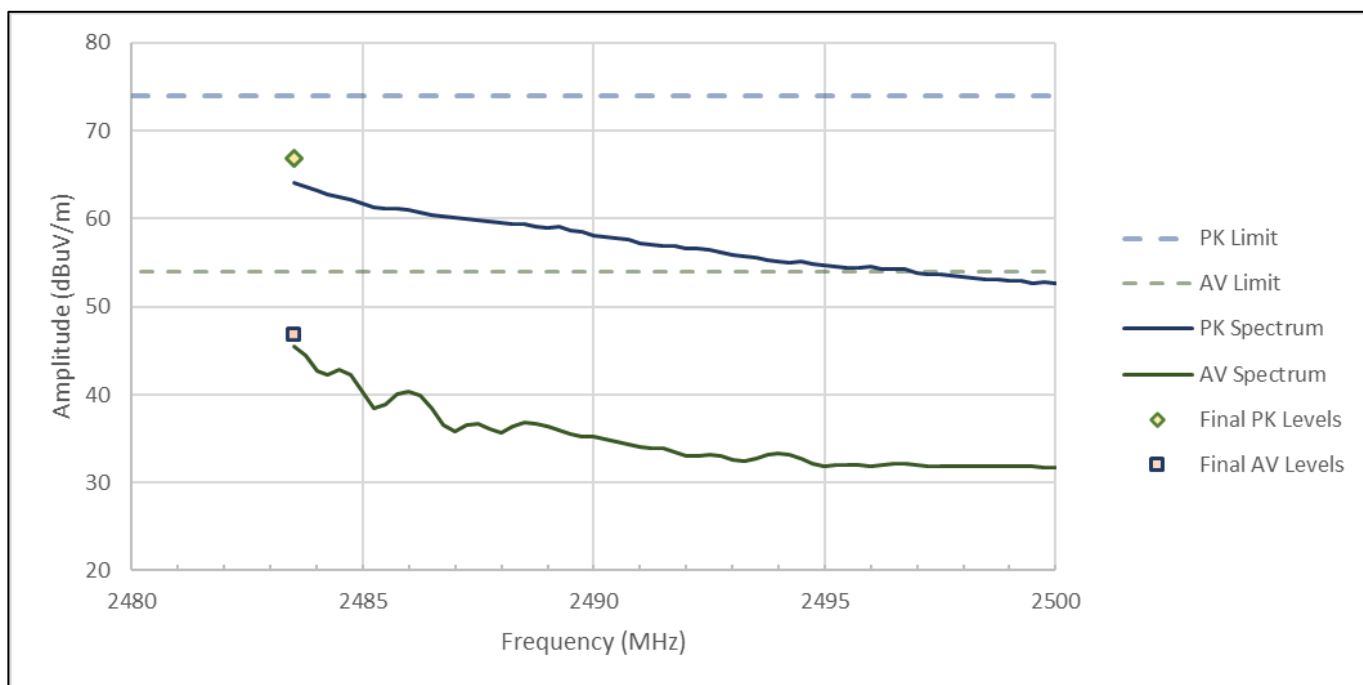


Figure RE03.7: FCC restricted band spectral data from 2483.5 to 2500 MHz (BLE, 2 Mbps, 2478 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure RE03.6: EUT test setup, primary view

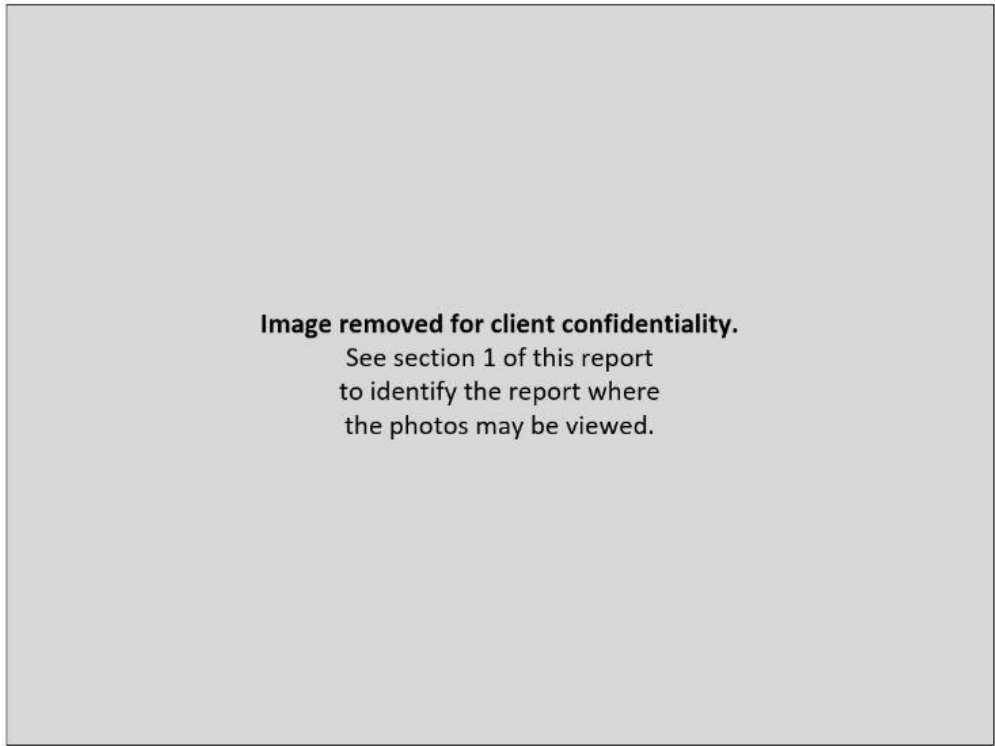


Figure RE03.7: EUT test setup, reverse view

This line is the end of the test record.

Test Record

Radiated Emission Test RE04

Project GCL0885

Test Date(s) 26 Nov 2025
Test Personnel David Kerr

Product Model AA5206
Serial Number tested 3621679832

Operating Mode M6 (AntTx) (2402, 2404, 2478, 2480 MHz)
Arrangement A2
Input Power USB 5 Vdc

Test Standards: FCC Part 15.247; RSS-247; RSS-GEN; ANSI C63.10 (as noted in Section 6 of the report)

Frequency Range: Restricted Bands (2200-2300 MHz, 2310-2390 MHz, 2483.5-2500 MHz)
Pass/Fail Judgment: PASS

Test record created by: David A Kerr
Date of this record: 26 Nov 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 26 GHz	Keysight	N9048B	MY59290135	24-Oct-2024	29-Nov-2025
Antenna, Horn, 1-18 GHz	ETS Lindgren	3117	00259208	30-May-2024	30-May-2026
FSOATS 3m, above 1 GHz	Frankonia	SAC3	F199004	13-Dec-2024	13-Dec-2027
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013783	26-Jun-2024	26-Jun-2027
Preamplifier, 500 MHz 18 GHz	Com-Power	PAM-118A	18040133	Calibration	Not Required
Wifi Filter	K&L	8NSL26-2437/E82.2-0/1		Calibration	Not Required

Table RE04.1: Test Equipment Used

Software Used

Keysight PXE receiver software A.32.06, Signal Maximization Tool v2025May27.xlsx, FCC Restricted Band 2p4GHz Data Analysis Template v2a 2025May27.xlsx

Test Data

US and Canadian laws contain dozens of bands where radio operation is restricted. Compliance with most of those band restrictions is typically demonstrated by a series of spurious emission tests covering a very wide span of frequencies from kilohertz to Gigahertz. This test record focuses on restricted bands that are immediately adjacent to the authorized band in which the test sample radio operate. It shows whether the modulation products are sufficiently suppressed to meet the restricted band requirements.

The radiated emission test began with a preliminary scan in each restricted band at multiple turntable angles, antenna heights, and both antenna polarizations. For test standards that require reorienting the test sample, further preliminary scans were taken in those alternate orientations typically described as X, Y, and Z. Subsequent testing was done using on the orientation(s) producing the highest result relative to the test limit. Final field strength measurements were taken in that set of positions.

Restricted band measurements in the lower band were made while the transmitter was tuned to its lowest frequency of 2402 and 2404 MHz. Measurements in the upper band were made while the transmitter was tuned to its highest frequency of 2478 and 2480 MHz

At azimuth angle 0° the 'front' reference mark of the turntable is pointed Southward. At 90° the reference mark points West. At -90° it points East. At -7° the turntable reference mark is pointed directly at the antenna. The designation of the X, Y, and Z orientations of the test sample are sample dependent, so these are reported by use of photographs.

The tables show the selected final measurement data between the FCC restricted bands. It includes a the strongest emissions observed relative to the test limit, along with other data points of interest. Where a data point is highlighted is yellow, this is an aid to indicate the data point(s) with the least margin to the test limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC restricted band 'Class B' Limit at 3 m listed at 15.209 and RSS-Gen clause 8.9.

Emissions within the restricted bands were measured with an averaging process described in the ANSI C63.10 methods noted in this paragraph. (See also section 6.3 of this test report.) The duty cycle for the ANT radio had a duty cycle of 98% or greater and so the trace-averaging method of clause 11.12.2.5.1 was applied.

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2390	54	74	35.00	49.20	19.01	24.80	-135	1608	VERT	RMS	0.00

Table RE04.2: FCC restricted bands from 2200 to 2390 MHz (ANT, 2402 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2216	54	74	30.75	44.12	23.25	29.88	-138	1577	VERT	RMS	0.00
2388	54	74	35.09	48.47	18.91	25.54	-138	1577	VERT	RMS	0.00

Table RE04.3: FCC restricted bands from 2200 to 2390 MHz (ANT, 2404 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2486	54	74	44.52	55.36	9.48	18.65	-139	1670	VERT	RMS	0.00

Table RE04.4: FCC restricted band from 2483.5 to 2500 MHz (ANT, 2478 MHz)

Frequency	Avg Limit	Pk Limit	Avg Level	Pk Level	Av Margin	Pk Margin	Azimuth	Height	Polarity	Avg Type	DC Adjust
(MHz)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(degree)	(mm)	---	---	(dB)
2483.8	54	74	40.95	53.21	13.05	20.79	-140	1667	VERT	RMS	0.00
2488	54	74	41.74	52.43	12.26	21.57	-140	1667	VERT	RMS	0.00

Table RE04.5: FCC restricted band from 2483.5 to 2500 MHz (ANT, 2480 MHz)

The graphs below show the background spectrum observed during pre-scan, as well as the final data points from the tables above.

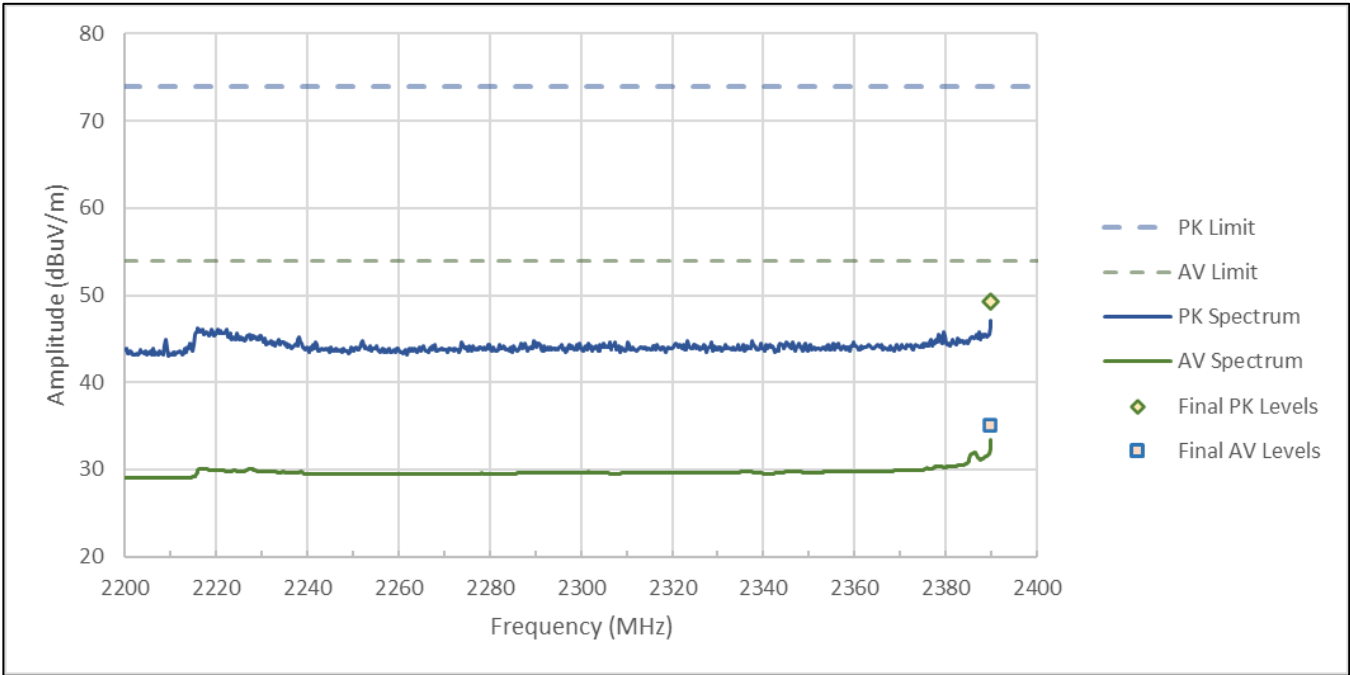


Figure RE04.1: FCC restricted band spectral data from 2200 to 2390 MHz (ANT, 2402 MHz)

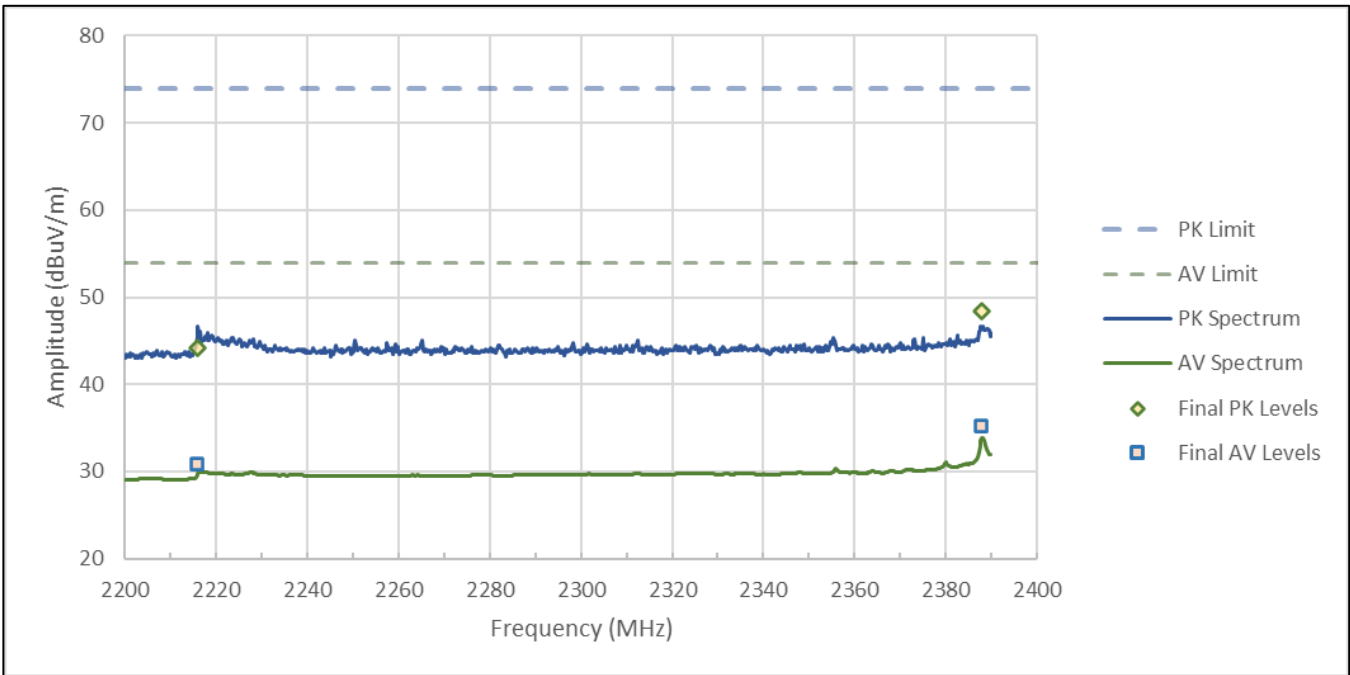


Figure RE04.2: FCC restricted band spectral data from 2200 to 2390 MHz (ANT, 2404 MHz)

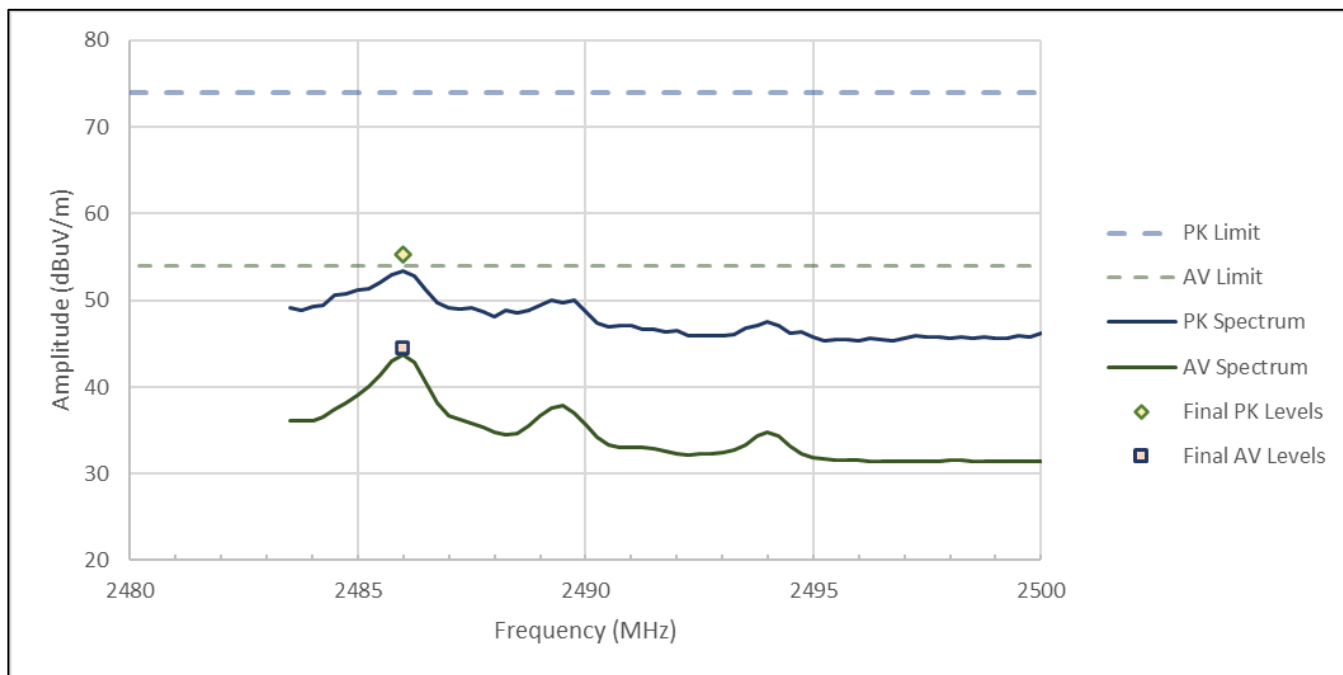


Figure RE04.3: FCC restricted band spectral data from 2483.5 to 2500 MHz (ANT, 2478 MHz)

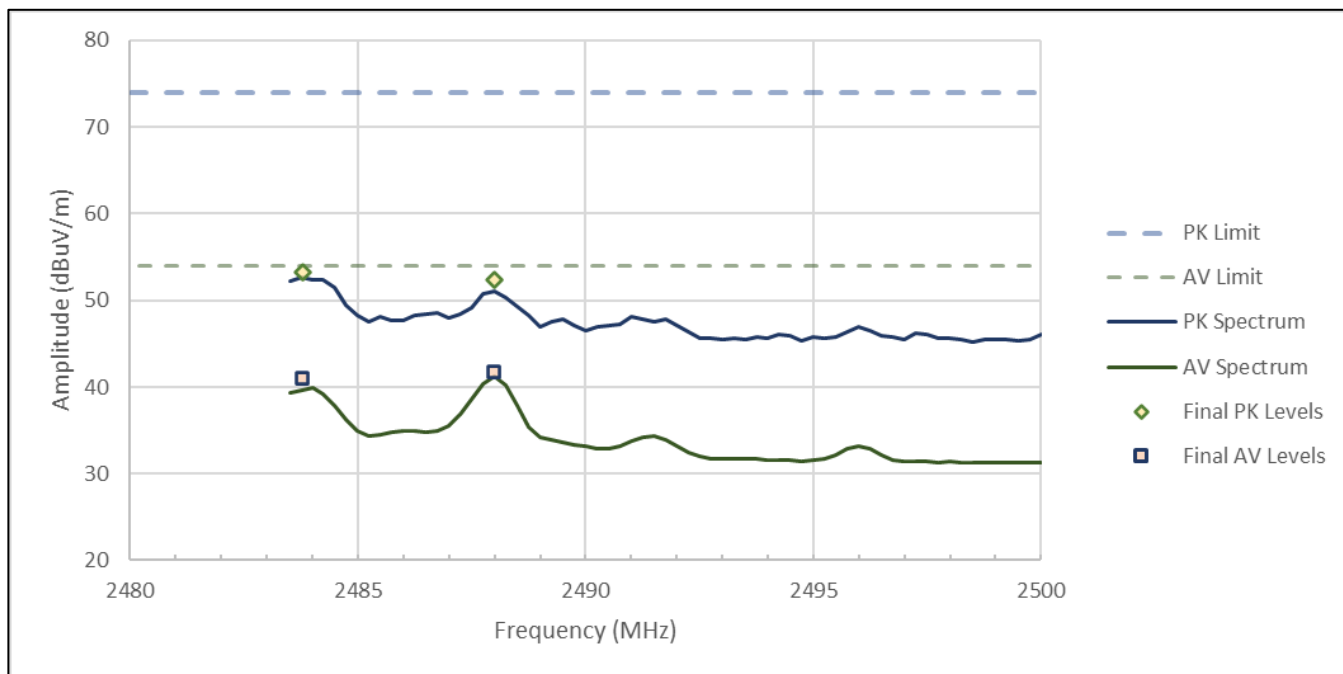


Figure RE04.4: FCC restricted band spectral data from 2483.5 to 2500 MHz (ANT, 2480 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

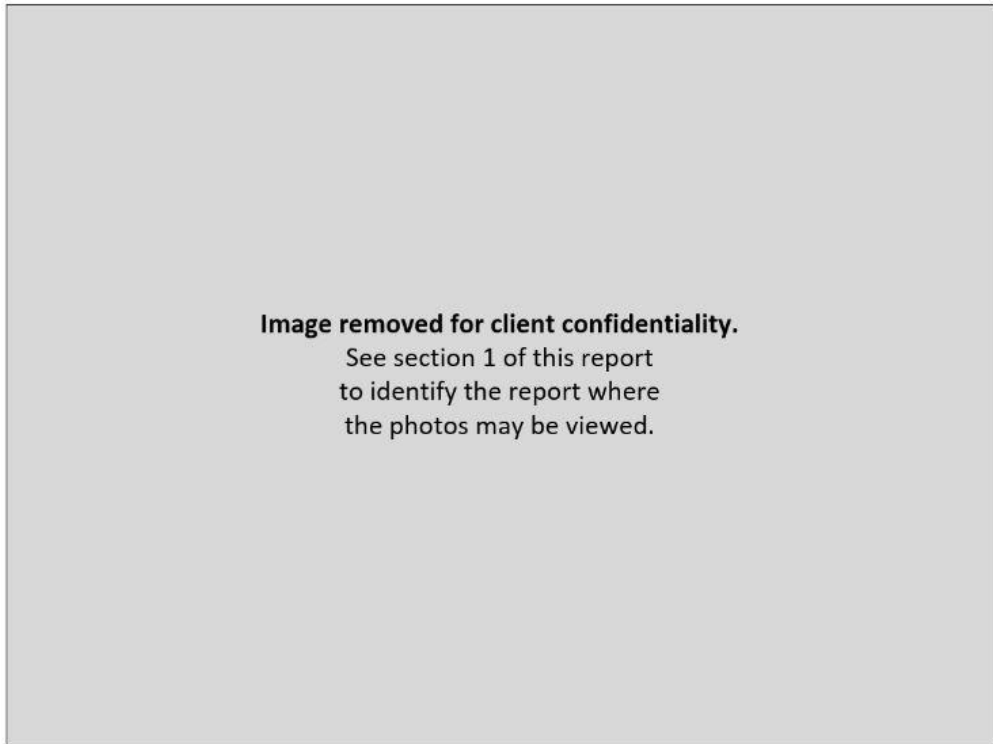


Figure RE04.5: EUT test setup, primary view

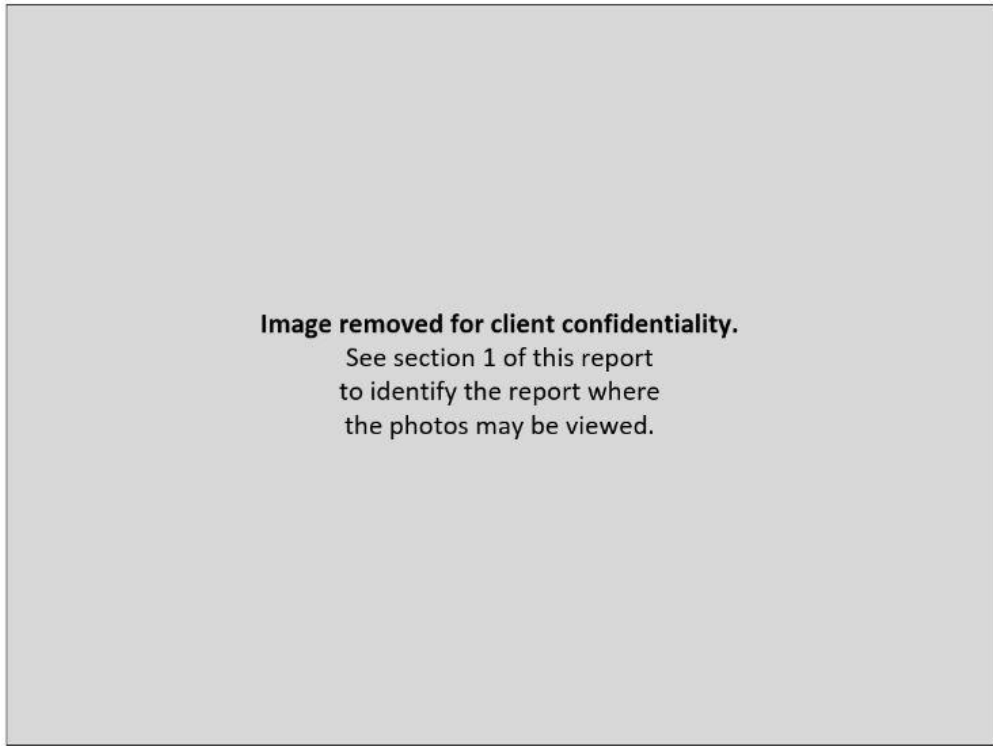


Figure RE04.6: EUT test setup, reverse view

This line is the end of the test record.

Test Record

Transmitter Power Spectral Density

Test IDs TR30, TR31, TR32

Project GCL-0885

Test Date(s) 24 Nov 2025
Test Personnel Jim Solum

Product Model AA5206
Serial Number tested 3621679383

Operating Mode M4 (BleTx), M6 (AntTx), M8 (WiFiTx)
Arrangement A2
Input Power 5Vdc

Test Standards: FCC Part 15, ANSI C63.10, RSS-GEN, RSS-247 (as noted in Section 6 of the report).

Antenna Gain -2.26 dBi, as reported by the client
Radio Protocol Bluetooth Low Energy (BLE), ANT, IEEE 802.11 b/g/n (WiFi)

Pass/Fail Judgment: PASS

Test record created by: Jim Solum
Date of this record: 04 Dec 2025
Original record, Version A.

Test Equipment Used

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026

Table TR30.1: Test equipment used

Software Used: Keysight PXE software A.33.03

Test Method

The basic test standards provide options for the test method. The following test methods were applied.
ANSI C63.10: PKPSD (11.10.2)

Test Setup

This block diagram shows the test equipment setup.

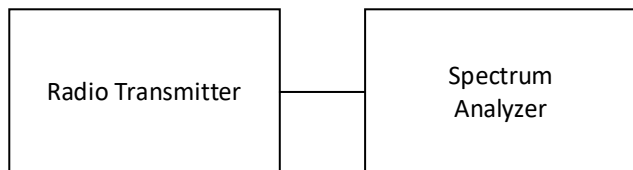


Figure TR30.1: Test setup

Test Data

Each measurement is made conducted from the antenna port with the transmitter on a specified channel and in a selected transmission protocol. The results include the effects of any measurement cable losses. Results reported are in units of dBm/Bandwidth and do not include the effect of antenna gain. The standard limit is 8 dBm / 3 kHz, and meeting the limit with a wider resolution bandwidths is permitted. All data met the limit using a 3 kHz resolution

bandwidth for Bluetooth Low Energy (BLE) ant ANT modes and a 20 kHz resolution bandwidth for IEEE 802.11 b/g/n (WiFi)

The highest PSD levels for each mode are highlighted in yellow, and graphical results are provided for those cases.

	2402	2440	2480
BLE 1 Mbps	-17.43	-13.81	-17.75
ANT	-17.97	-10.75	-17.54

Table TR30.2: Summary of results for BLE and ANT (3 kHz RBW)

	Ch1	Ch6	Ch11	Ch13
B1	7.72	7.22	7.97	3.16
G9	-0.71	-1.14	-1.85	-5.08
NMCS0	-2.31	-2.42	-3.04	-5.94

Table TR30.3: Summary of results for IEEE 802.11 b/g/n (WiFi) (20 kHz RBW)

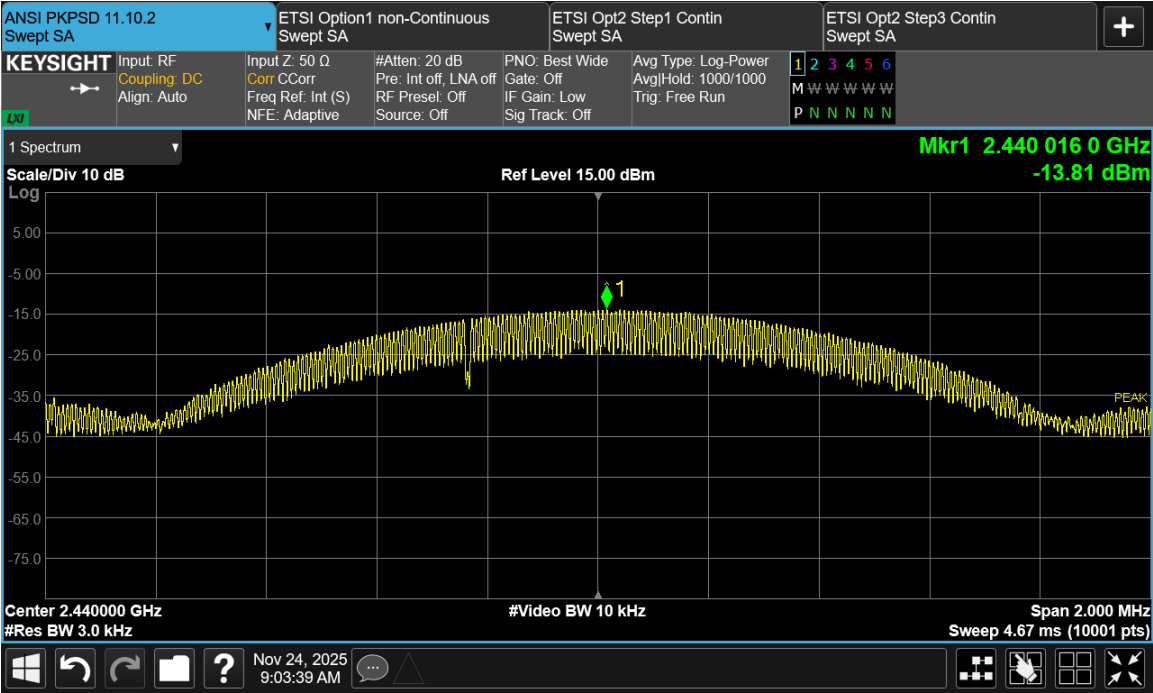


Figure TR30.2: Test data for BLE 1 Mbps at 2440 MHz

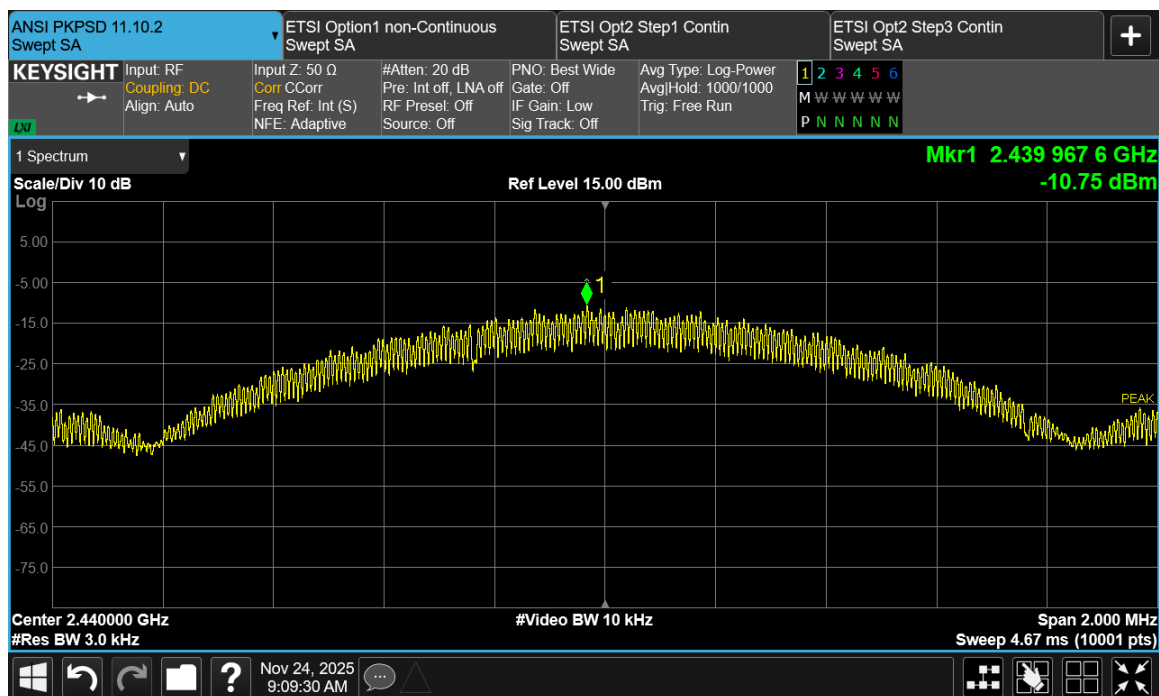


Figure TR30.3: Test data for ANT at 2440 MHz

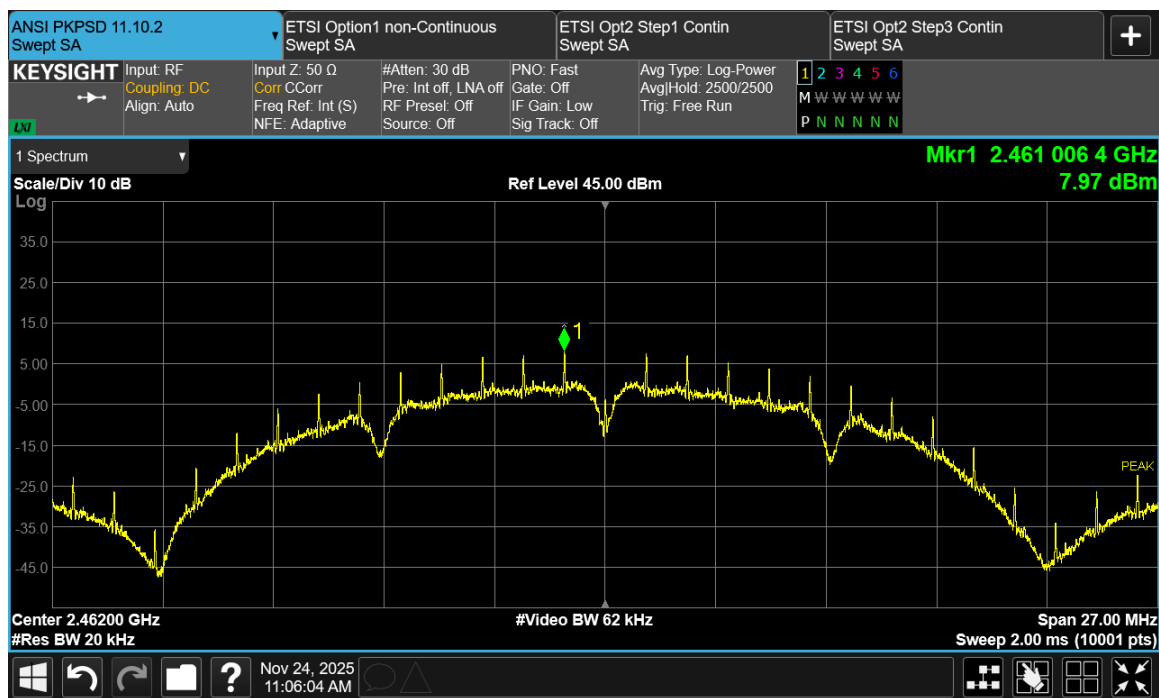


Figure TR30.4: Test data for IEEE 802.11b 1 Mbps at channel 11

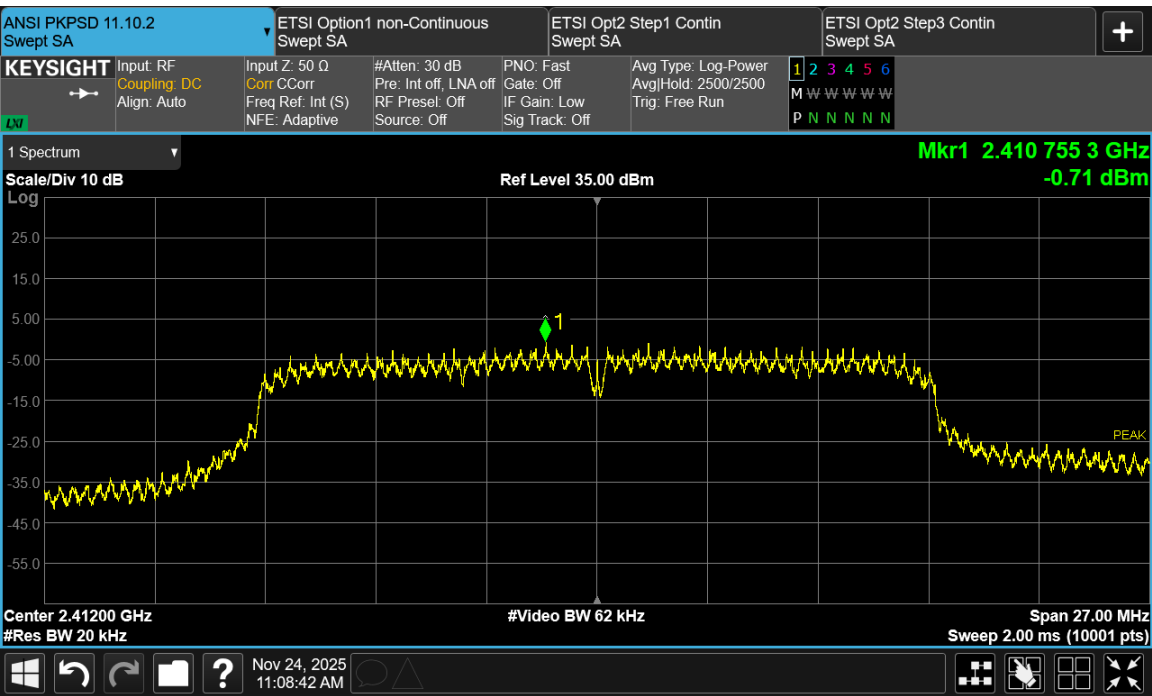


Figure TR30.5: Test data for IEEE 802.11g 9 Mbps at channel 1

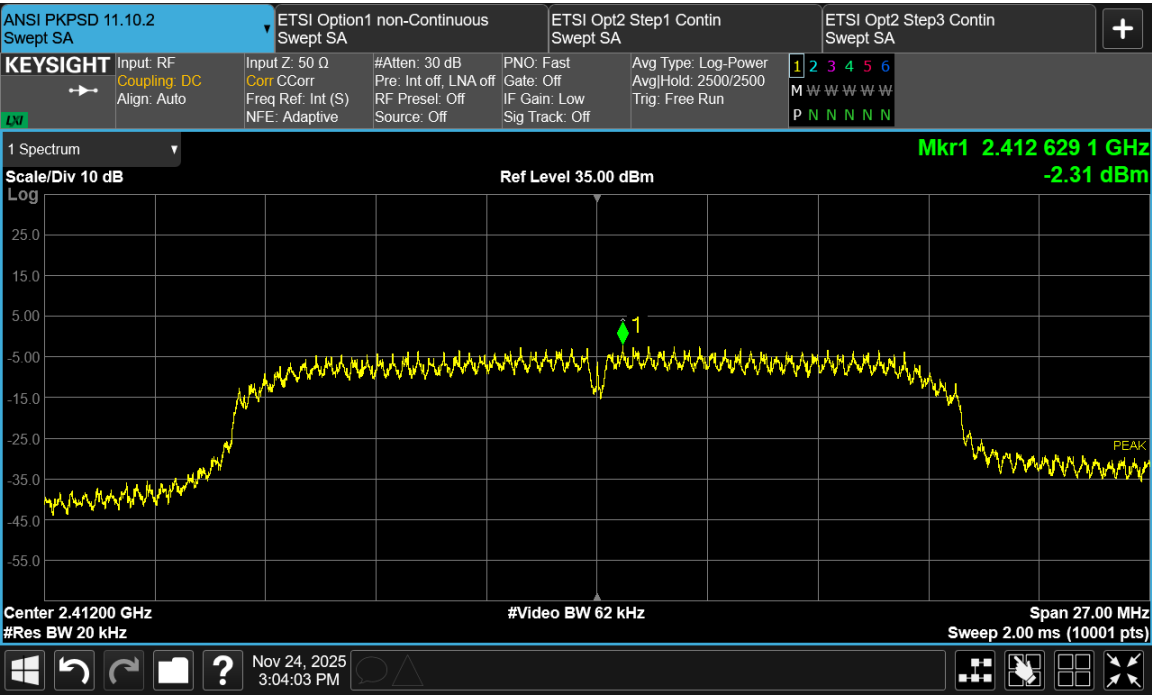


Figure TR30.6: Test data for IEEE 802.11n 1 MCS0 at channel 1

This line is the end of the test record.

Test Record

Conducted Emissions Mains Test CE01 Project GCL0885

Test Date(s) 05-Dec-2025
Test Personnel Andy Heier

Product Model AA5206
Serial Number tested 3621679818

Operating Mode M4 (BleTx)
Arrangement A2
Input Power 120 Vac 60 Hz

Test Standards: FCC Part 15, ANSI C63.10, RSS-247, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: 150 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: Andy Heier
Date of this record: 05 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013782	26-Jun-2024	26-Jun-2027
LISN multiline; 20A 50uH	Com-Power	LIN-120C	20160005	3-Apr-2024	1-Apr-2027
Coaxial Power Cable	Garmin	RG214/U	20230124-01	3-Apr-2024	1-Apr-2027

Table CE01.1: Test Equipment Used

Software Used

Keysight PXE software A.33.03, CE Mains 150k to 30M Data Analysis V3a 2025Oct23.xlsx

Test Data

The conducted emission test process began with a set of preliminary scans on both power conductors using both Quasi-Peak and Average detectors across the frequency range. Where the test standard requires cable manipulation, one or more likely worst case frequencies selected by the test personnel. Cables were manipulated to find the maximal signal strength while observing the receiver levels at those selected frequencies. At each of the frequencies selected for final measurements, Quasi-peak and Average detector readings were taken on each conductor.

The table shows the selected final measurement data. It includes at least the six strongest emissions observed relative to the limit lines, along with other data points of interest. The yellow highlight indicate the data points with the least margin to the quasi-peak detector limit and the average detector limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	QP Limit	AV Limit	L1 QP	L2 QP	L1 AV	L2 AV	QP Margin	AV Margin
(kHz)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dB)	(dB)
503	56.00	46.00	33.81	29.70	29.92	25.34	22.19	16.08
30000	60.00	50.00	28.67	29.11	23.49	23.80	30.89	26.20

Table CE01.2: Emission summary (BLE, 1 Mbps, 2440 MHz)

The graph below shows preliminary scan data as continuous curves. Superimposed are the final measurement data points reported in the table above.

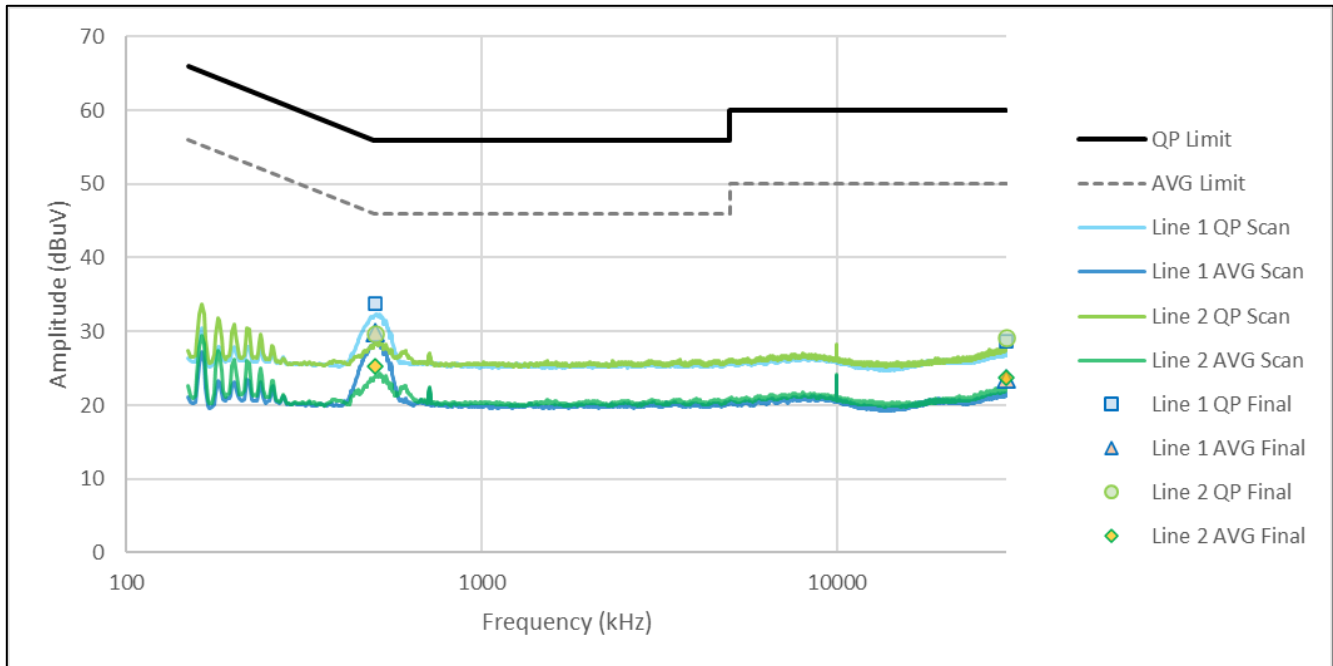


Figure CE01.1: Spectral data (BLE, 1 Mbps, 2440 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

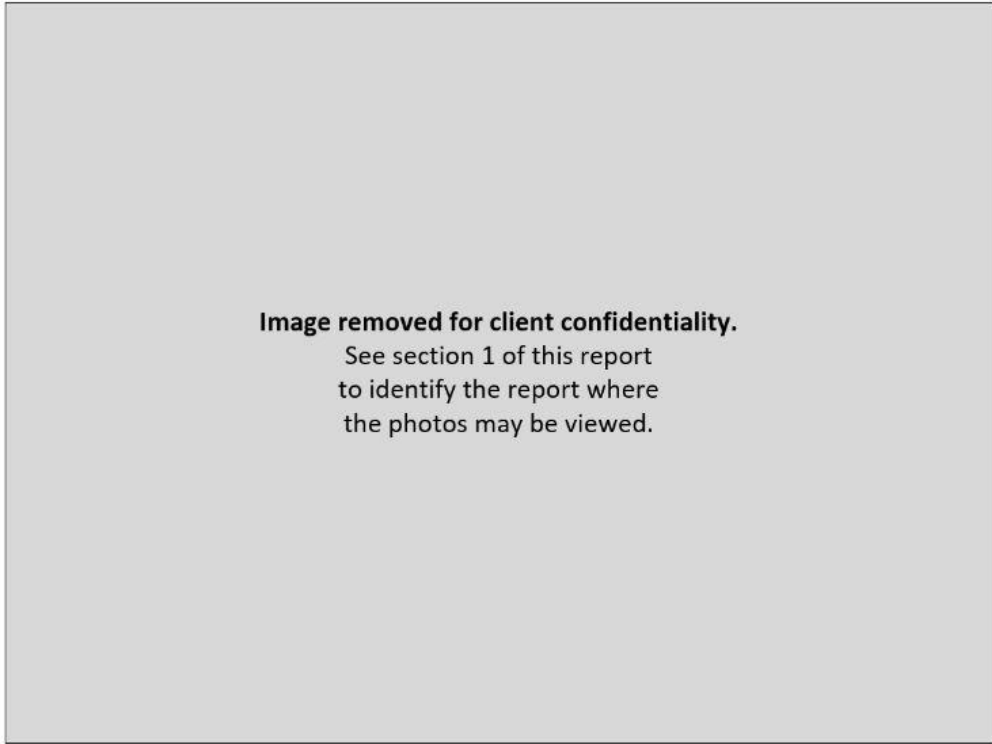


Figure CE01.2: Test setup, first view

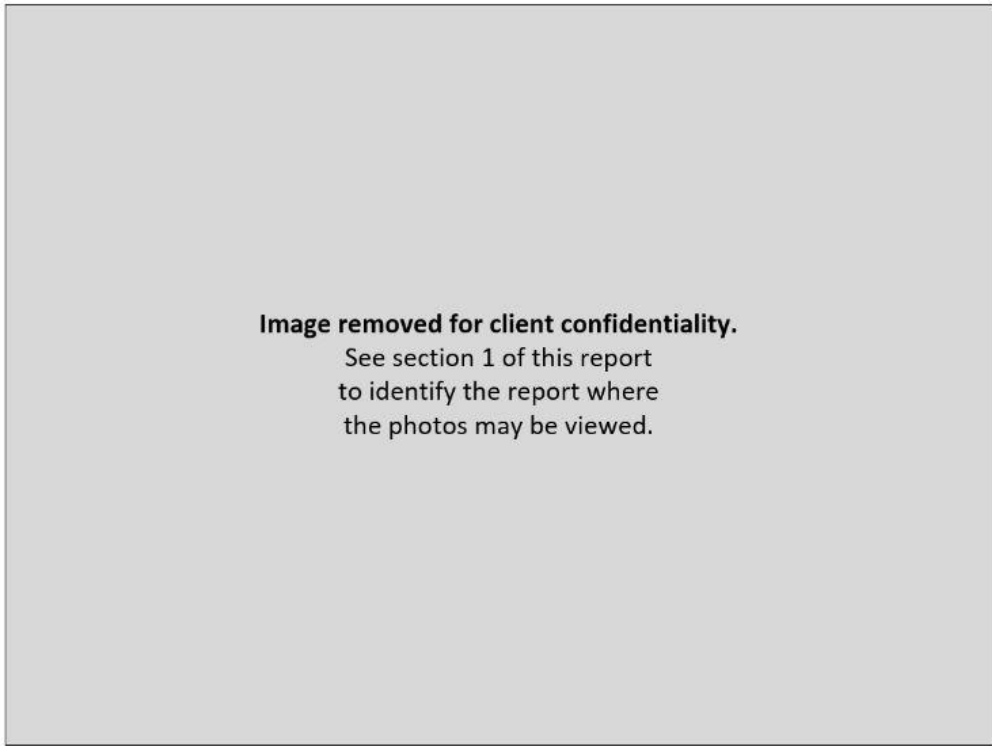


Figure CE01.3: Test setup, second view

This line is the end of the test record.

Test Record

Conducted Emissions Mains Test CE03

Project GCL0885

Test Date(s) 04-Dec-2025
Test Personnel Andy Heier

Product Model AA5206
Serial Number tested 3621679818

Operating Mode M5 (AntTx)
Arrangement A2
Input Power 120 Vac 60 Hz

Test Standards: FCC Part 15, ANSI C63.10, RSS-247, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: 150 kHz to 30 MHz

Pass/Fail Judgment: PASS

Test record created by: Andy Heier
Date of this record: 04 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013782	26-Jun-2024	26-Jun-2027
LISN multiline; 20A 50uH	Com-Power	LIN-120C	20160005	3-Apr-2024	1-Apr-2027
Coaxial Power Cable	Garmin	RG214/U	20230124-01	3-Apr-2024	1-Apr-2027

Table CE03.1: Test Equipment Used

Software Used

Keysight PXE software A.33.03, CE Mains 150k to 30M Data Analysis V3a 2025Oct23.xlsx

Test Data

The conducted emission test process began with a set of preliminary scans on both power conductors using both Quasi-Peak and Average detectors across the frequency range. Where the test standard requires cable manipulation, one or more likely worst case frequencies selected by the test personnel. Cables were manipulated to find the maximal signal strength while observing the receiver levels at those selected frequencies. At each of the frequencies selected for final measurements, Quasi-peak and Average detector readings were taken on each conductor.

The table shows the selected final measurement data. It includes at least the six strongest emissions observed relative to the limit lines, along with other data points of interest. The yellow highlight indicate the data points with the least margin to the quasi-peak detector limit and the average detector limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	QP Limit	AV Limit	L1 QP	L2 QP	L1 AV	L2 AV	QP Margin	AV Margin
(kHz)	(dB μ V)	(dB μ V)	(dB μ V)	(dB μ V)	(dB μ V)	(dB μ V)	(dB)	(dB)
503	56.00	46.00	33.93	29.23	30.10	24.67	22.07	15.90
8023	60.00	50.00	27.79	28.07	22.04	22.44	31.93	27.56

Table CE03.2: Emission summary (ANT, 2440 MHz)

The graph below shows preliminary scan data as continuous curves. Superimposed are the final measurement data points reported in the table above.

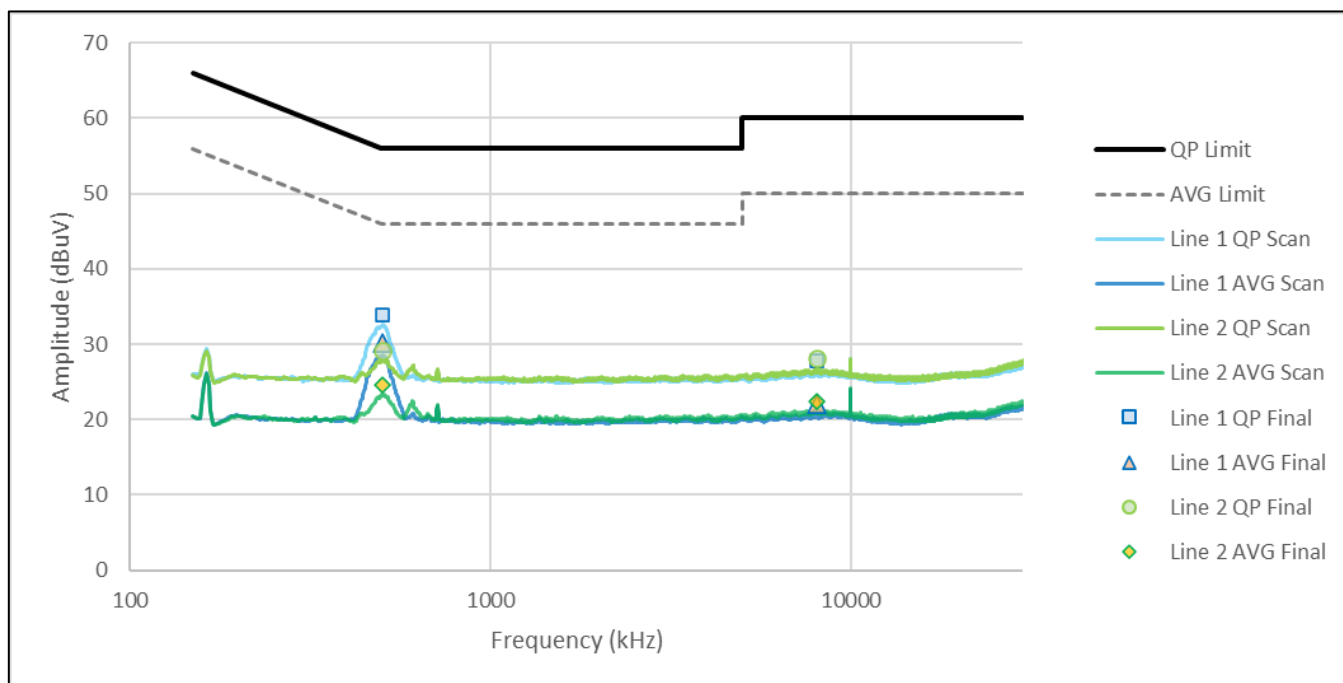


Figure CE03.1: Spectral data (ANT, 2440 MHz)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.



Figure CE03.2: Test setup, first view

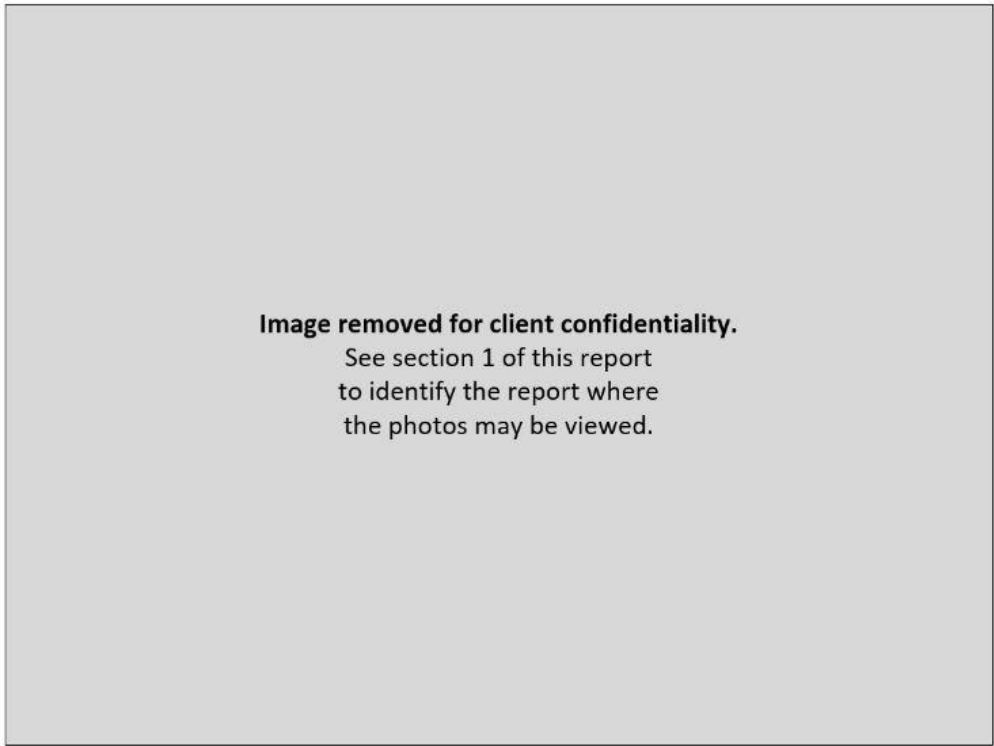


Figure CE03.3: Test setup, second view

This line is the end of the test record.

Test Record

Conducted Emissions Mains Test CE04 Project GCL0885

Test Date(s) 04-Dec-2025
Test Personnel Andy Heier

Product Model AA5206
Serial Number tested 3621679818

Operating Mode M7 (WiFitx)
Arrangement A2
Input Power 120 Vac 60 Hz

Test Standards: FCC Part 15, ANSI C63.10, RSS-247, RSS-GEN (as noted in Section 6 of the report).

Frequency Range: 150 kHz to 30 MHz
Pass/Fail Judgment: PASS

Test record created by: Andy Heier
Date of this record: 04 Dec 2025

Original record, Version A.

Test Equipment

Description	Make	Model #	Serial #	Last Cal/Ver	Next Due
PXE Receiver 44 GHz	Keysight	N9048B	MY62220139	4-Sep-2025	4-Sep-2026
Tape Measure, 1-3/16 in x 33 ft	Crecent Lufkin	L1135CME-02	GMN0013782	26-Jun-2024	26-Jun-2027
LISN multiline; 20A 50uH	Com-Power	LIN-120C	20160005	3-Apr-2024	1-Apr-2027
Coaxial Power Cable	Garmin	RG214/U	20230124-01	3-Apr-2024	1-Apr-2027

Table CE04.1: Test Equipment Used

Software Used

Keysight PXE software A.33.03, CE Mains 150k to 30M Data Analysis V3a 2025Oct23.xlsx

Test Data

The conducted emission test process began with a set of preliminary scans on both power conductors using both Quasi-Peak and Average detectors across the frequency range. Where the test standard requires cable manipulation, one or more likely worst case frequencies selected by the test personnel. Cables were manipulated to find the maximal signal strength while observing the receiver levels at those selected frequencies. At each of the frequencies selected for final measurements, Quasi-peak and Average detector readings were taken on each conductor.

The table shows the selected final measurement data. It includes at least the six strongest emissions observed relative to the limit lines, along with other data points of interest. The yellow highlight indicate the data points with the least margin to the quasi-peak detector limit and the average detector limit. A positive margin value indicates that the emission was below the test limit. The test limit is the FCC Class B Limit.

In this test, fewer than six emissions were observed within 20 dB of the limit. The relevant emissions were measured, including one or more noise floor signals as judged appropriate to the spectrum.

Frequency	QP Limit	AV Limit	L1 QP	L2 QP	L1 AV	L2 AV	QP Margin	AV Margin
(kHz)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dB)	(dB)
503	56.00	46.00	33.67	28.39	29.96	23.92	22.33	16.04
30000	60.00	50.00	28.65	29.18	23.31	23.77	30.82	26.23

Table CE04.2: Emission summary (IEEE 802.11b, 5.5 Mbps, Ch 6)

The graph below shows preliminary scan data as continuous curves. Superimposed are the final measurement data points reported in the table above.

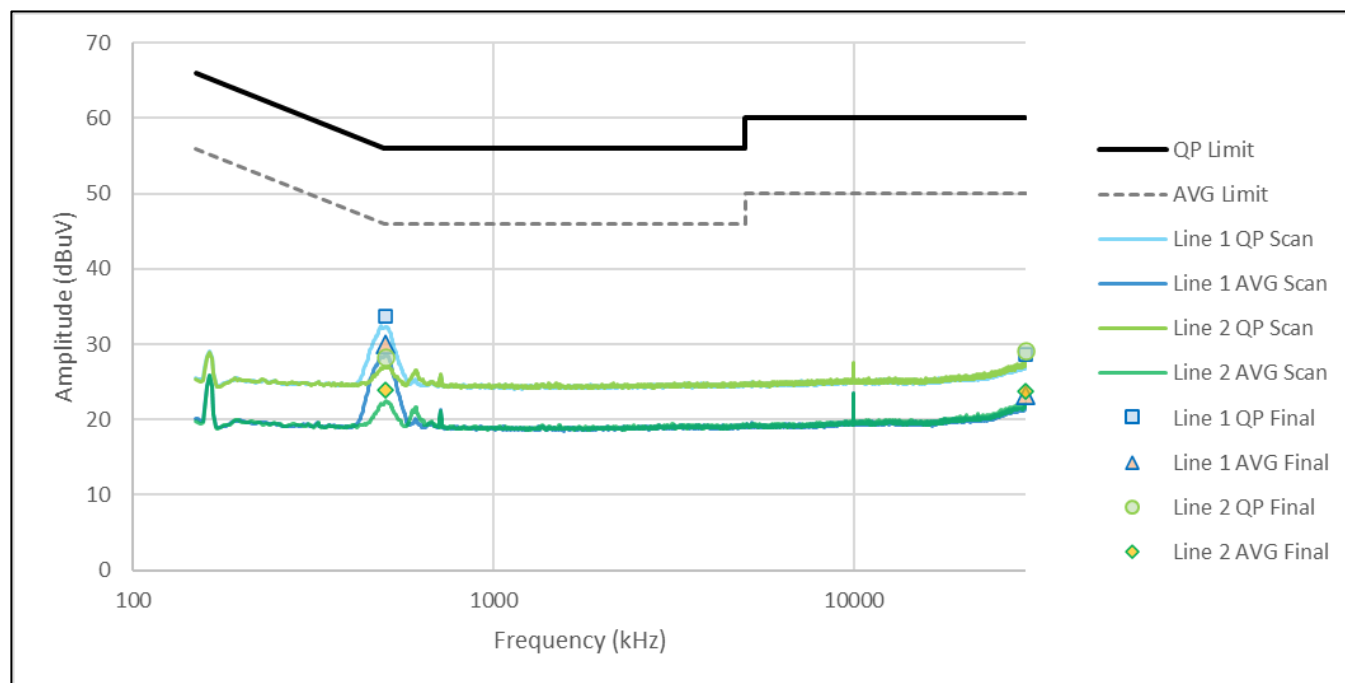


Figure CE04.1: Spectral data (IEEE 802.11b, 5.5 Mbps, Ch 6)

Setup Photographs

The following photographs show the EUT configured and arranged in the manner in which it was measured.

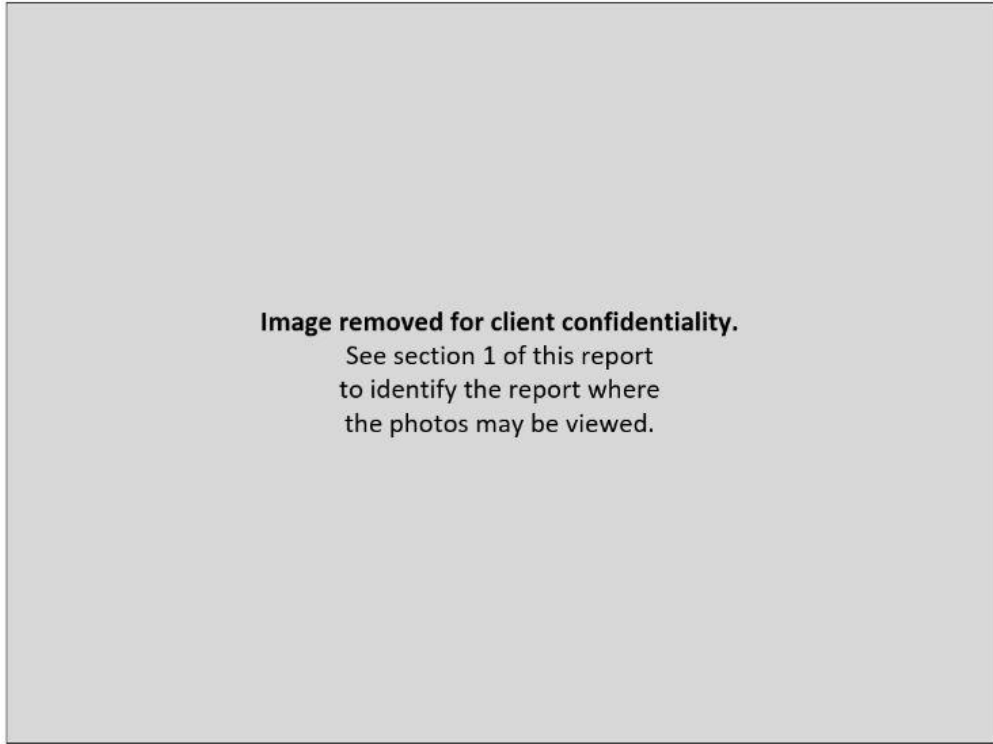


Figure CE04.2: Test setup, first view

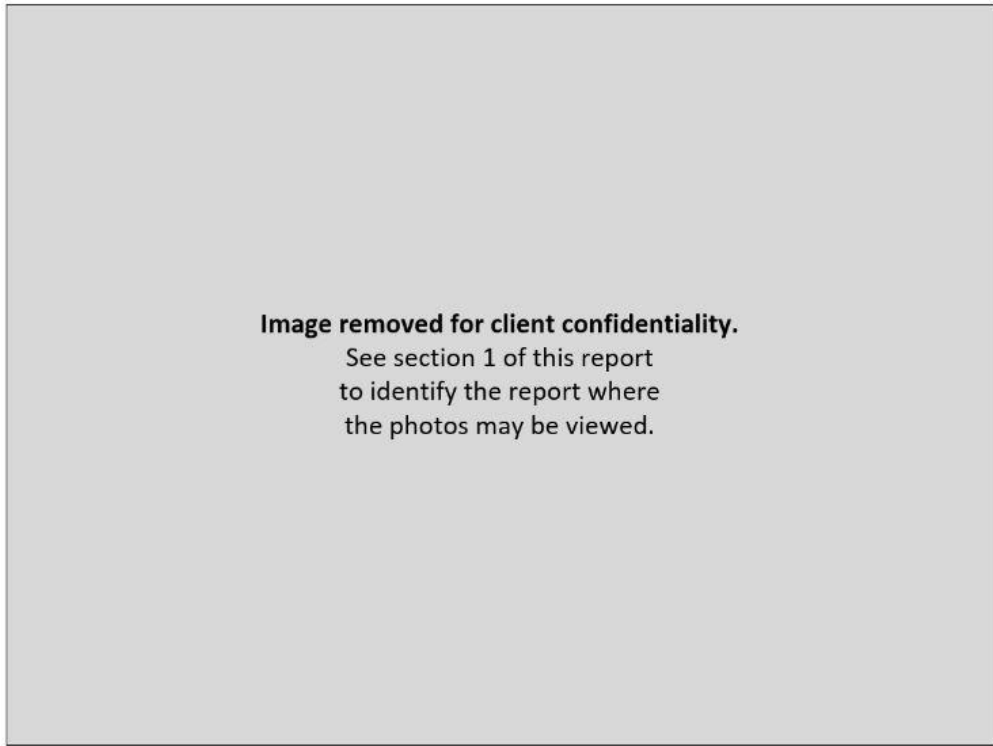


Figure CE04.3: Test setup, second view

This line is the end of the test record.

Concluding Notes

This report stands as an integrated record of the tests performed and must be copied or distributed in its complete form. The reproduction of selected pages or sections separate from the complete report would require specific approval from the manager of the Garmin Compliance Lab.

This is the final page of the report.