

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.843$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.33, 7.49, 7.02) @ 2480 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet Computer/Main Ant/Edge 1/Bluetooth_DH5_ch78_0mm /Area Scan (6x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0701 W/kg

Tablet Computer/Main Ant/Edge 1/Bluetooth_DH5_ch78_0mm /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.577 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.0713 W/kg

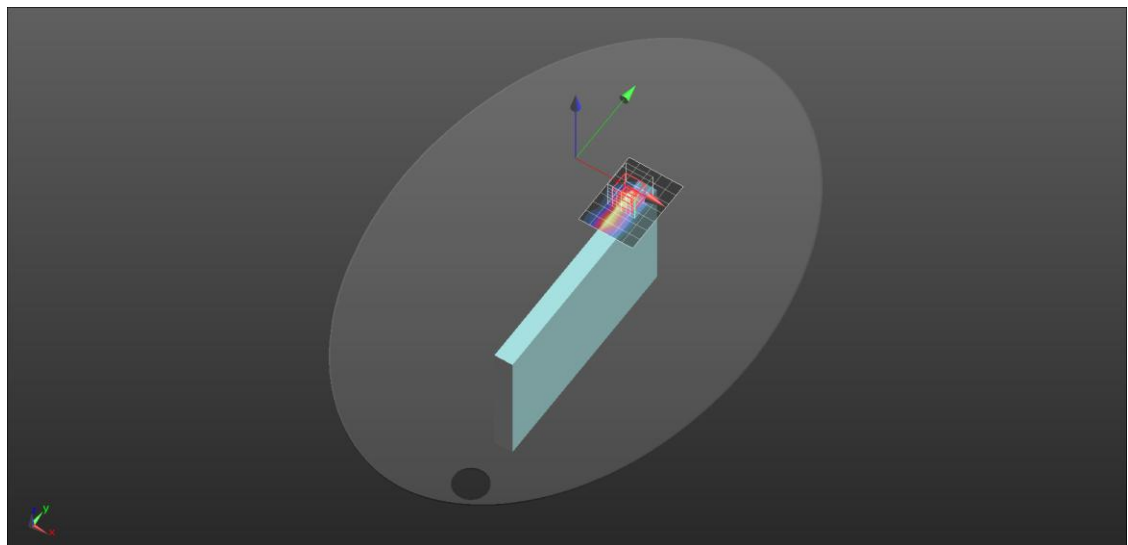

WLAN 2.4G

Frequency: 2422 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2422$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 39.024$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.33, 7.49, 7.02) @ 2422 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet Computer/Main Ant/Edge 1/802.11n40_ch3_0mm

/Area Scan (6x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.48 W/kg

Tablet Computer/Main Ant/Edge 1/802.11n40_ch3_0mm

/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.39 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.468 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 1.87 W/kg

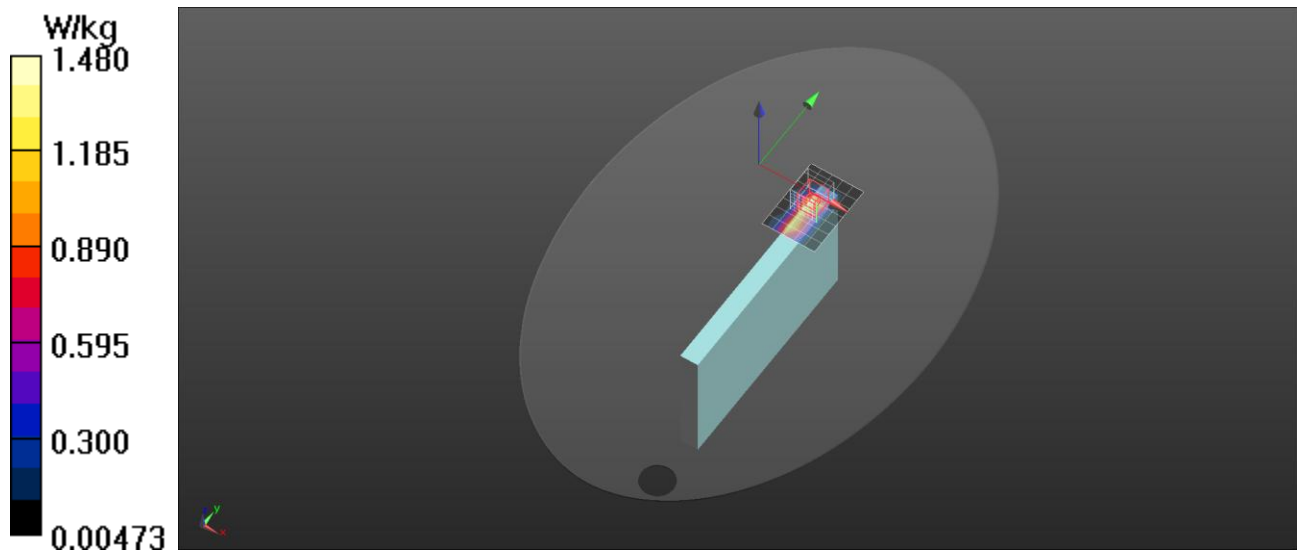

WLAN 5G

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.832$ S/m; $\epsilon_r = 35.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(5.21, 5.32, 4.99) @ 5290 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch58_0mm

/Area Scan (7x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.07 W/kg

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch58_0mm

/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.047 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 6.48 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 3.04 W/kg

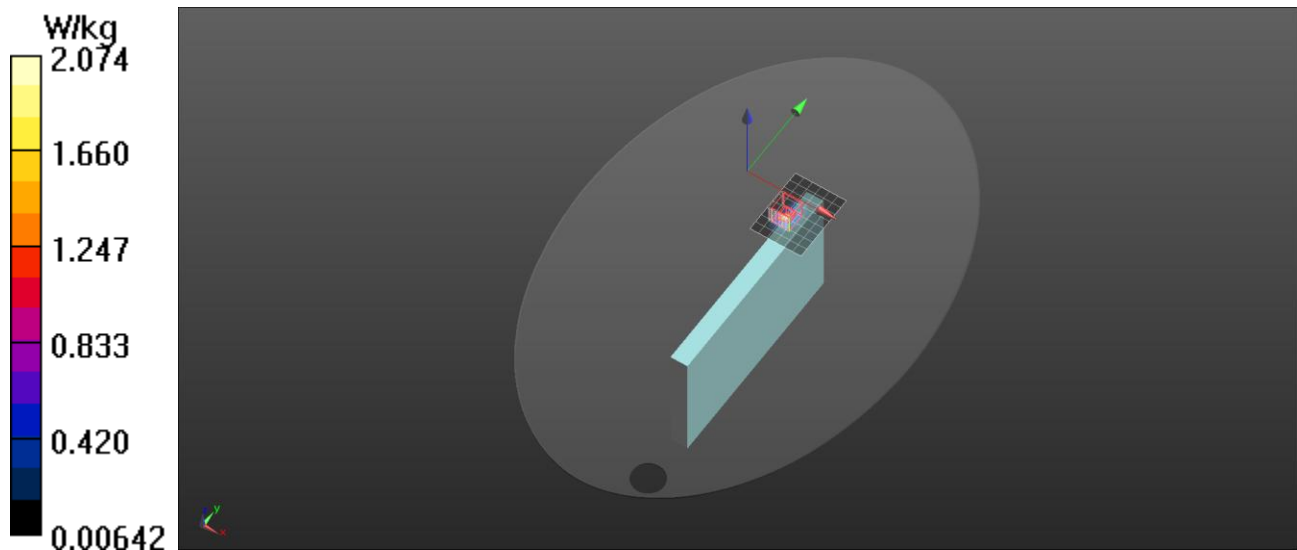

WLAN 5G

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.308$ S/m; $\epsilon_r = 34.528$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24

- Probe: EX3DV4 - SN7369; ConvF(4.9, 5, 4.68) @ 5690 MHz; Calibrated: 2025/5/21

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch138_0mm

/Area Scan (7x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.08 W/kg

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch138_0mm

/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.094 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 3.57 W/kg

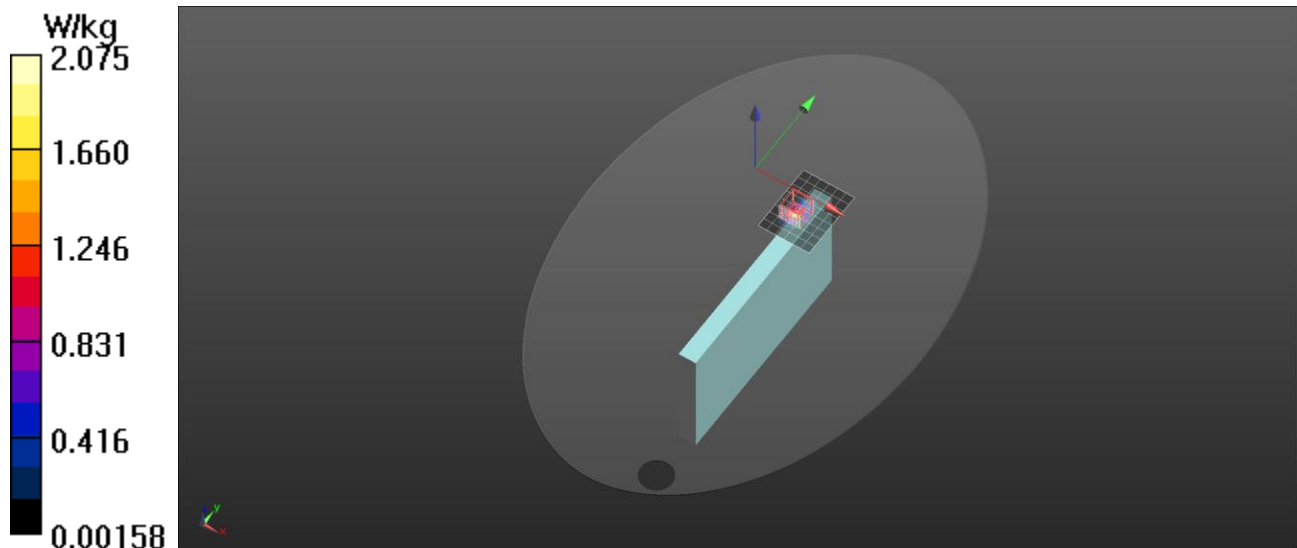

WLAN 5G

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.406$ S/m; $\epsilon_r = 34.316$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24

- Probe: EX3DV4 - SN7369; ConvF(4.94, 5.04, 4.73) @ 5775 MHz; Calibrated: 2025/5/21

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch155_0mm

/Area Scan (7x9x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.37 W/kg

Tablet Computer/Main Ant/Edge 1/802.11ac80_ch155_0mm

/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.362 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 7.20 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 3.46 W/kg

