

FCC Radio Test Report

FCC ID: IR5DS16P

Report No. : BTL-FCCP-3-2602T011
Equipment : Tablet
Model Name : DS16P
Brand Name : MilDef Crete Inc.
Applicant : MilDef Crete Inc.
Address : 7F, No. 250, Sec.3, Peishen Rd., Shenkeng District, New Taipei City, Taiwan
Manufacturer : MilDef Crete Inc.
Address : 7F, No. 250, Sec.3, Peishen Rd., Shenkeng District, New Taipei City, Taiwan
Factories : MilDef Crete Inc.
Address : 7F, No. 250, Sec.3, Peishen Rd., Shenkeng District, New Taipei City, Taiwan

Radio Function : WLAN 2.4 GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2020+Cor.1-2023

Date of Receipt : 2026/2/4
Date of Test : 2026/3/23 ~ 2026/4/14
Issued Date : 2026/5/29

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Brett Shen
 Brett Shen, Engineer

Approved by : Jerry Chuang
 Jerry Chuang, Vice Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
1.4	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	7
2	GENERAL INFORMATION	8
2.1	DESCRIPTION OF EUT	8
2.2	TEST MODES	10
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4	SUPPORT UNITS	12
3	AC POWER LINE CONDUCTED EMISSIONS TEST	13
3.1	LIMIT	13
3.2	TEST PROCEDURE	13
3.3	DEVIATION FROM TEST STANDARD	13
3.4	TEST SETUP	14
3.5	TEST RESULT	14
4	RADIATED EMISSIONS TEST	15
4.1	LIMIT	15
4.2	TEST PROCEDURE	16
4.3	DEVIATION FROM TEST STANDARD	16
4.4	TEST SETUP	16
4.5	EUT OPERATING CONDITIONS	18
4.6	TEST RESULT – 9KHZ TO 30 MHZ	18
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	18
4.8	TEST RESULT – ABOVE 1 GHZ	18
5	OUTPUT POWER TEST	19
5.1	LIMIT	19
5.2	TEST PROCEDURE	19
5.3	DEVIATION FROM TEST STANDARD	19
5.4	TEST SETUP	19
5.5	EUT OPERATING CONDITIONS	19
5.6	TEST RESULT	19
6	LIST OF MEASURING EQUIPMENTS	20
7	EUT TEST PHOTO	21
8	EUT PHOTOS	21
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	22
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	25
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	30
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	33
APPENDIX E	OUTPUT POWER	124

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2602T011	R00	Original Report.	2026/5/5	Invalid
BTL-FCCP-3-2602T011	R01	Revised report to address TCB's comments.	2026/5/29	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.247(a)	Bandwidth	NOTE (3)	Pass	-----
15.247(b)	Output Power	APPENDIX E	Pass	-----
15.247(e)	Power Spectral Density	NOTE (3)	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	NOTE (3)	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This item is demonstrated to full compliance referring to the test report number 200611-03.TR04 of the integrated module (model name: AX210NGW, FCC ID: PD9AX210NG), according to KDB 996369 D02 Q1 a) 2).
- (4) The radiated emissions are tested to demonstrate full compliance of both module integrated into the host and host itself.
- (5) The output power of integrated module have been reduced, therefore, the full output power tests are performed and recorded.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC RN: 674415) (FCC DN: TW0659)

☐ C05 ☐ CB08 ☐ CB11 ☐ SR10 ☒ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC RN: 674415) (FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC RN: 674415) (FCC DN: TW0659)

☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. AC power line conducted emissions test:

Test Site	Measurement Frequency Range	U_{Lab} (dB)	U_{CISPR} (dB)
SR05	150 kHz ~ 30 MHz	3.22	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB21 (3m)	0.03 ~ 0.2	4.35
	0.2 ~ 1	4.78
	1 ~ 6	5.45
	6 ~ 18	5.04
	18 ~ 26	4.03
	26 ~ 40	4.33

C. Conducted test :

Test Item	U
Output power	0.8412 dB

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 52 %	AC 120V	Easton Tsai
Radiated emissions below 1 GHz	Refer to data	AC 120V	Mark Wang
Radiated emissions above 1 GHz	Refer to data	AC 120V	Mark Wang
Output Power	24.1 °C, 61 %	AC 120V	Easton Tsai

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

For SISO Mode Bottom Wi-Fi Antenna:

Test Software Version	DRTU.08662.23.150.0					
Mode	2412 MHz	2442 MHz	2462 MHz	2467 MHz	2472 MHz	Data Rate
IEEE 802.11b	20.25	24	21.25	18.75	17.25	1 Mbps
IEEE 802.11g	19.25	24	24	24	24	6 Mbps

For SISO Mode Top Wi-Fi Antenna:

Test Software Version	DRTU.08662.23.150.0					
Mode	2412 MHz	2442 MHz	2462 MHz	2467 MHz	2472 MHz	Data Rate
IEEE 802.11b	20	20	20	18.75	16.5	1 Mbps
IEEE 802.11g	19.25	20.5	18.5	14.5	12.875	6 Mbps

For MIMO Mode:

Test Software Version	DRTU.08662.23.150.0					
Mode	2412 MHz	2442 MHz	2462 MHz	2467 MHz	2472 MHz	Data Rate
IEEE 802.11n (HT20)	24	21.375	24	24	24	MCS 0
IEEE 802.11ax (HE20)	24	21.125	24	24	11	MCS 0
Mode	2422 MHz	2442 MHz	2452 MHz	2457 MHz	2462 MHz	Data Rate
IEEE 802.11n (HT40)	14.75	24	15.5	24	24	MCS 0
IEEE 802.11ax (HE40)	14.5	24	15.625	24	24	MCS 0

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Tablet
Model Name	DS16P
Brand Name	MilDef Crete Inc.
Model Difference	N/A
Power Source	DC Voltage supplied from AC/DC adapter.
Power Rating	I/P: 100-240V~50-60Hz 1.2A MAX. O/P: 19.0V 4.74A 90.06W
Products Covered	1* Adapter: Adapter Tech / ATS090-P190
WIFI+BT Module	Intel® Wi-Fi 6E AX210 / AX210NGW
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2412 MHz ~ 2472 MHz
Maximum Output Power - SISO mode	IEEE 802.11b_ Bottom Wi-Fi Antenna: 23.86 dBm (0.2432 W) IEEE 802.11b_ Top Wi-Fi Antenna: 22.82 dBm (0.1914 W) IEEE 802.11g_ Bottom Wi-Fi Antenna: 24.17 dBm (0.2612 W) IEEE 802.11g_ Top Wi-Fi Antenna: 24.53 dBm (0.2838 W)
Maximum Output Power - MIMO mode	IEEE 802.11n (HT20): 24.50 dBm (0.2815 W) IEEE 802.11n (HT40): 24.99 dBm (0.3152 W) IEEE 802.11ax (HE20): 24.24 dBm (0.2652 W) IEEE 802.11ax (HE40): 24.58 dBm (0.2871 W)
Test Model	DS16P
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	06	2437	11	2462
02	2417	07	2442	12	2467
03	2422	08	2447	13	2472
04	2427	09	2452		
05	2432	10	2457		

(3) Table for Filed Antenna:

Antenna	Manufacture	Part Number	Type	Connector	Operation Frequency (MHz)	Gain (dBi)
Top Wi-Fi	MilDef Crete Inc.	G983-000045	PIFA	IPEX	2412-2472	1.01
					5180-5250	1.87
					5745-5825	4.62
Bottom Wi-Fi	MilDef Crete Inc.	G980109231	PIFA	N/A	2412-2472	1.08
					5180-5250	-2.15
					5745-5825	-2.06

Note:

- (1) Antenna gain higher is used for testing.
- (2) The EUT incorporates a SISO and MIMO function. Physically, the EUT provides one/two completed transmitters and receivers (1T1R/2T2R).
- (3) For SISO mode,
The maximum antenna gain is 1.08 dBi < 6 dBi.
The Direction gain is less than 6 dBi, so output power limits will not be reduced.
- (4) For MIMO mode,
The Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 4.06 \text{ dBi} < 6 \text{ dBi}$.
- (5) The Direction gain is less than 6 dBi, so output power limits will not be reduced.

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

Operating Mode \ TX Mode	1TX	2TX
IEEE 802.11b	V (Top Wi-Fi or Bottom Wi-Fi)	-
IEEE 802.11g	V (Top Wi-Fi or Bottom Wi-Fi)	-
IEEE 802.11n (HT20)	-	V (Top Wi-Fi + Bottom Wi-Fi)
IEEE 802.11n (HT40)	-	V (Top Wi-Fi + Bottom Wi-Fi)
IEEE 802.11ax (HE20)	-	V (Top Wi-Fi + Bottom Wi-Fi)
IEEE 802.11ax (HE40)	-	V (Top Wi-Fi + Bottom Wi-Fi)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11b	12	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/11/12/13	Bandedge
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
	IEEE 802.11ax (HE20)		
	IEEE 802.11n (HT40)	03/09/10/11	
	IEEE 802.11ax (HE40)		
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/07/11/12/13	Harmonic
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
	IEEE 802.11ax (HE20)		
	IEEE 802.11n (HT40)	03/07/09/10/11	
	IEEE 802.11ax (HE40)		
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11b	12	-
Output Power	IEEE 802.11b	01/07/11/12/13	-
	IEEE 802.11g		
	IEEE 802.11n (HT20)		
	IEEE 802.11ax (HE20)		
	IEEE 802.11n (HT40)	03/07/09/10/11	
	IEEE 802.11ax (HE40)		


NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (4) For IEEE 802.11ax modes, refer to TCB Workshop presentations on October 3, 2018, after evaluated, all testing are performed under fully loaded conditions (Full RU). In the test data, only the partially loaded conditions data are marked with tones.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

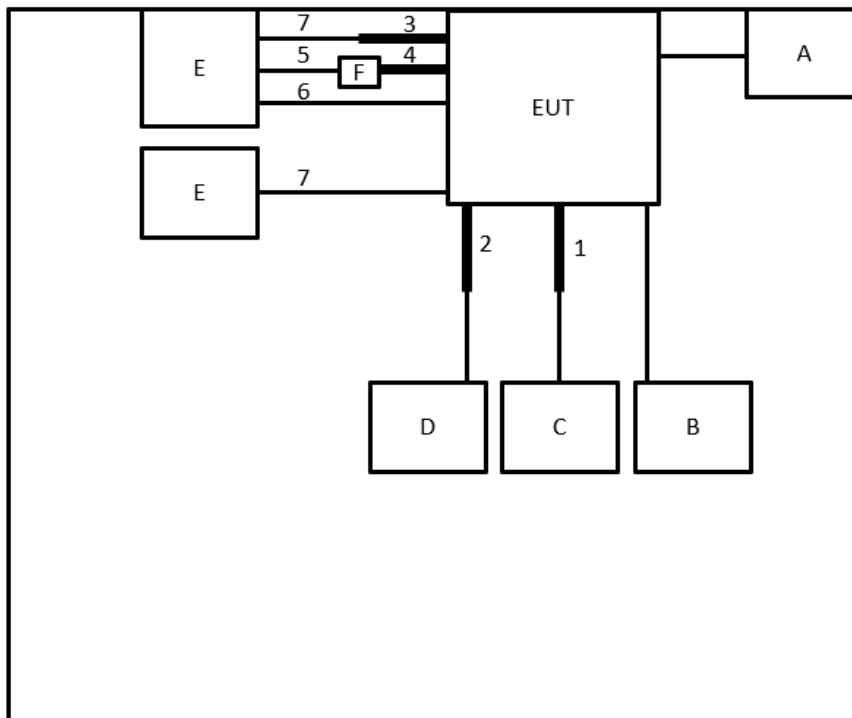

Radiated Emissions Test

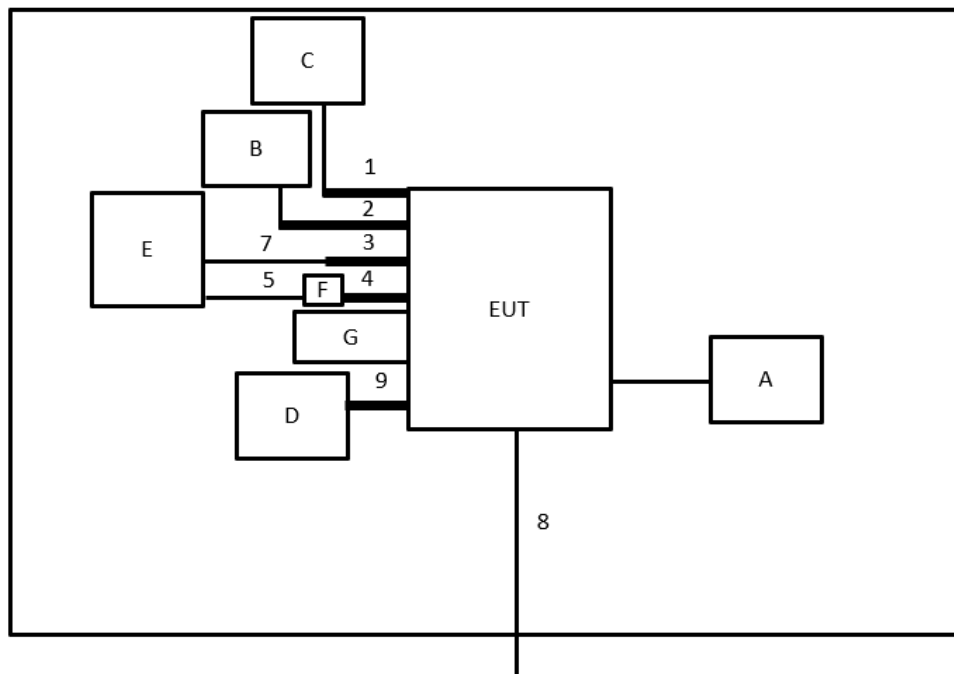

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	Adapter Tech	ATS090-P190	N/A	Supplied by test requester
B	Mouse	N/A	N/A	N/A	Furnished by test lab.
C	Earphone	N/A	N/A	N/A	Furnished by test lab.
D	Keyboard	N/A	N/A	N/A	Furnished by test lab.
E	NB	N/A	N/A	N/A	Furnished by test lab.
F	RS232 changer	N/A	N/A	N/A	Furnished by test lab.
G	USB	N/A	N/A	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1m	Audio Cable	Supplied by test requester
2	N/A	N/A	1m	USB Cable	Supplied by test requester
3	N/A	N/A	1m	LAN Cable	Supplied by test requester
4	N/A	N/A	1m	RS232 Cable	Supplied by test requester
5	N/A	N/A	1m	RS232 Cable	Furnished by test lab.
6	N/A	N/A	1.5m	USB to Type-C	Furnished by test lab.
7	N/A	N/A	1m	LAN Cable	Furnished by test lab.
8	N/A	N/A	20M	RJ45 Cable	Furnished by test lab.
9	N/A	N/A	0.1M	USB-C to USB 3.0 CABLE	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

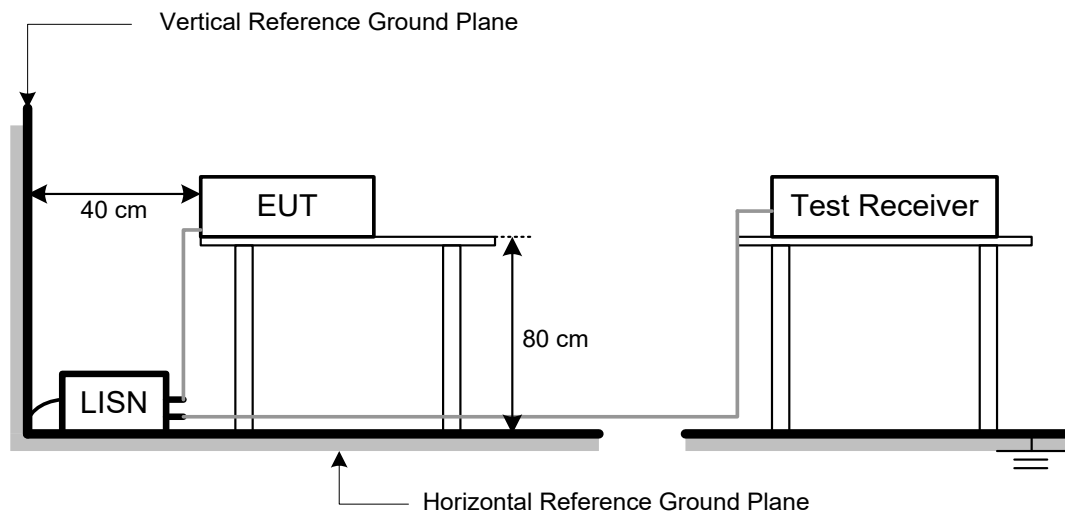

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB/m)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	54	=	-32.78

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE

- The measuring distance of 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 30MHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP

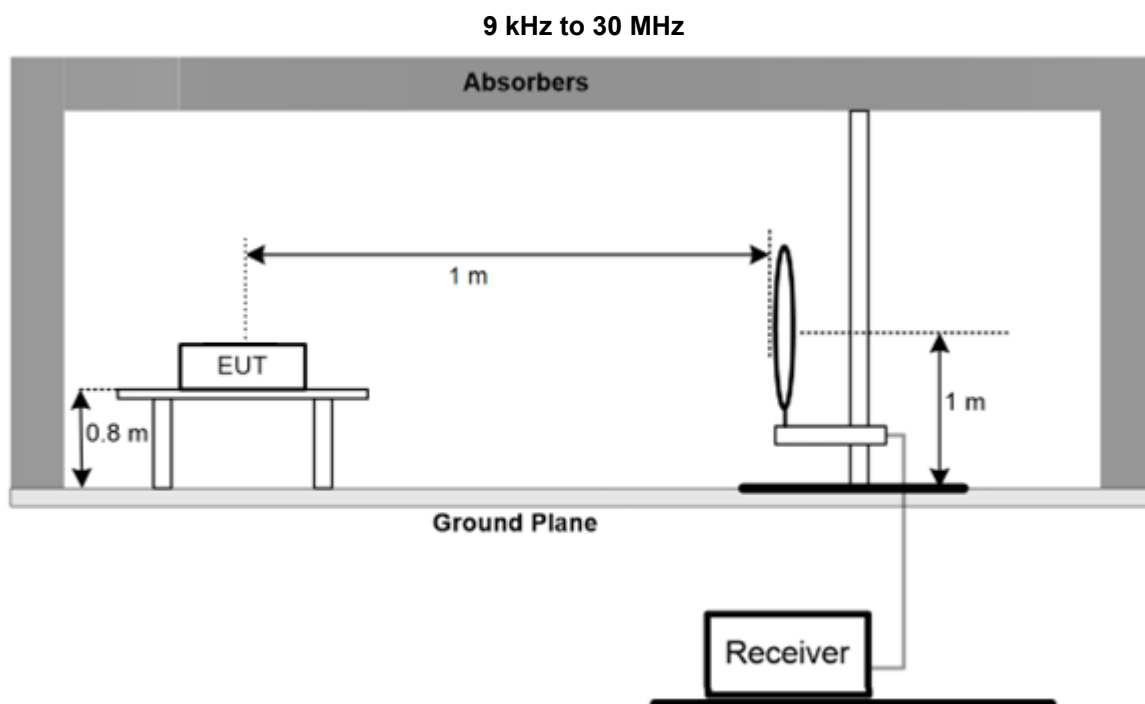

30 MHz to 1 GHz

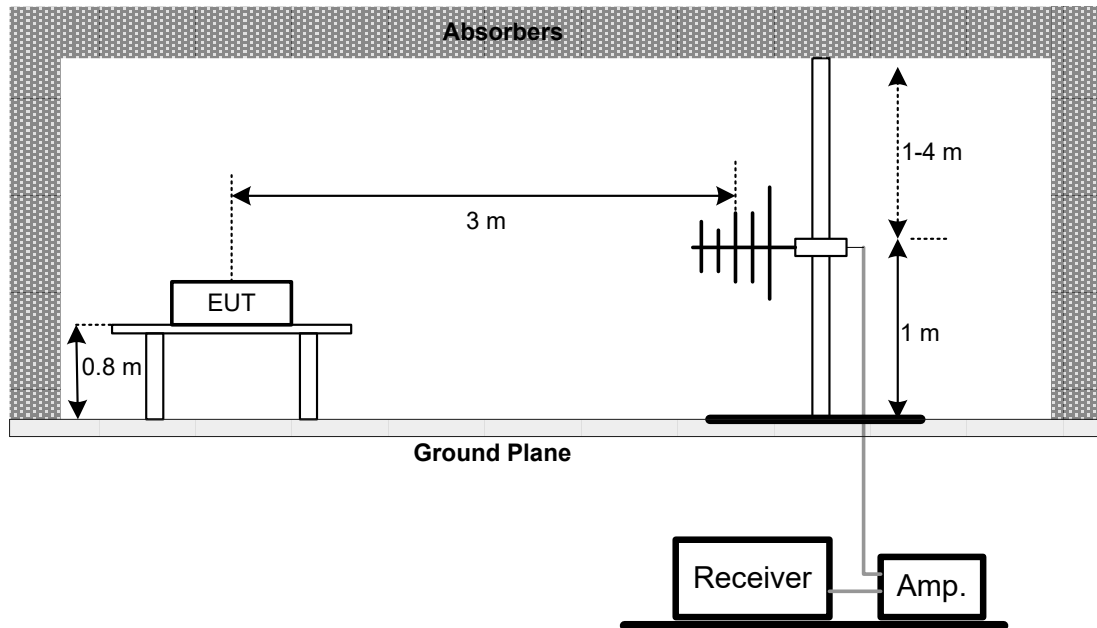

Above 1 GHz

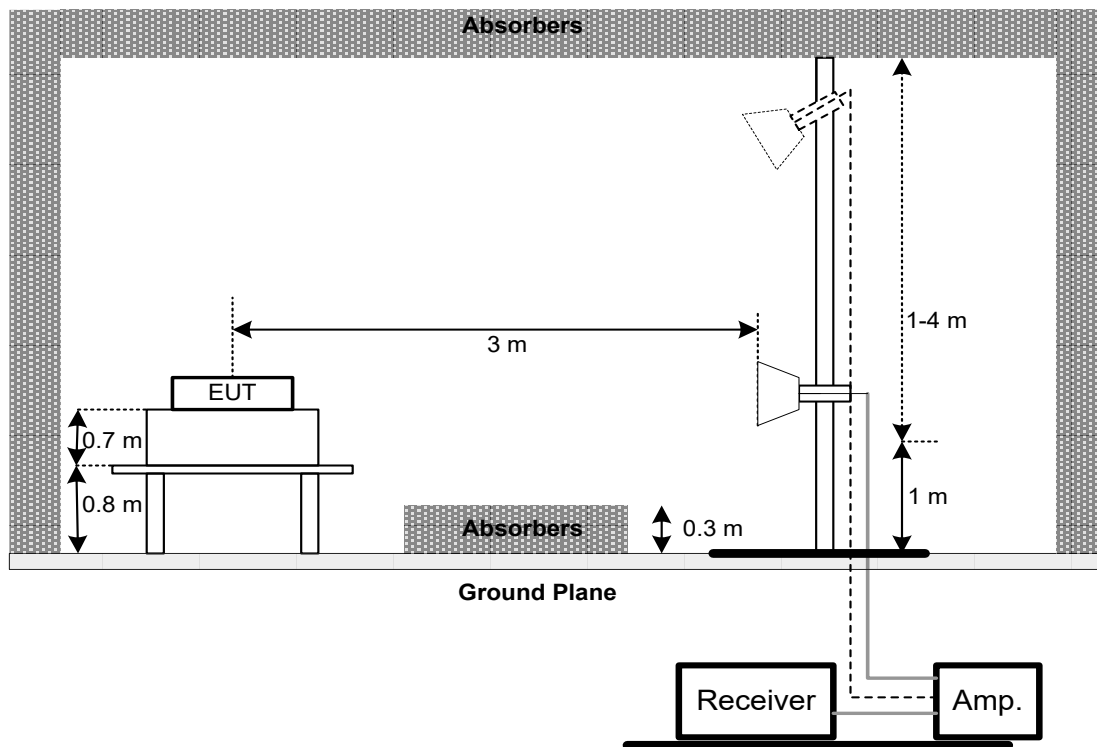

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – 9kHz TO 30 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHz TO 1 GHz

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHz

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 OUTPUT POWER TEST

5.1 LIMIT

Section	Test Item	Limit
15.247(b)	Maximum Output Power	1 Watt or 30dBm


5.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.
- Subclause 11.9.1.1 of ANSI C63.10 is applied. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

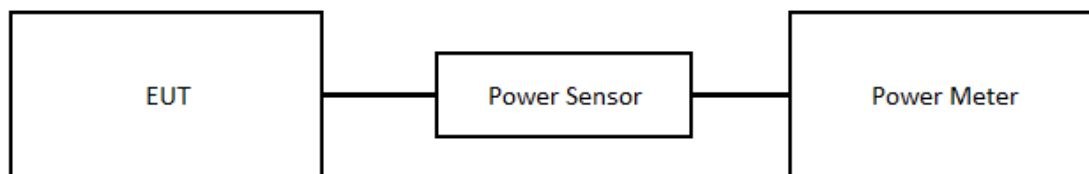

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101497	2025/5/20	2026/5/19
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2025/7/31	2026/7/30
3	EMI Test Receiver	R&S	ESR3	102950	2025/4/14	2026/4/13
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2025/9/3	2026/9/2
2	Preamplifier	EMCI	EMC118A45SE	980819	2026/3/4	2027/3/3
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2025/9/3	2026/9/2
4	Preamplifier	EMCI	EMC001340	980579	2025/9/3	2026/9/2
5	Test Cable	EMCI	EMC104-SM-1000	180809	2026/3/4	2027/3/3
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2026/3/4	2027/3/3
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2025/10/15	2026/10/14
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2026/2/12	2027/2/11
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2025/9/1	2026/8/31
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2025/7/4	2026/7/3
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2025/7/4	2026/7/3
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2026/3/11	2027/3/10
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2026/3/11	2027/3/10
16	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Single Channel Pk Power Meter	Keysight	N1911A	MY63450010	2025/9/16	2026/9/15
2	Peak and Average Power Sensor	Keysight	E9327	MY63310007	2025/9/16	2026/9/15

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

7 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2602T011-FCCP-1 (APPENDIX-TEST PHOTOS).

8 EUT PHOTOS

Please refer to document Appendix No.: EP-2602T011-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2026/3/24
Test Frequency	-	Phase	Line

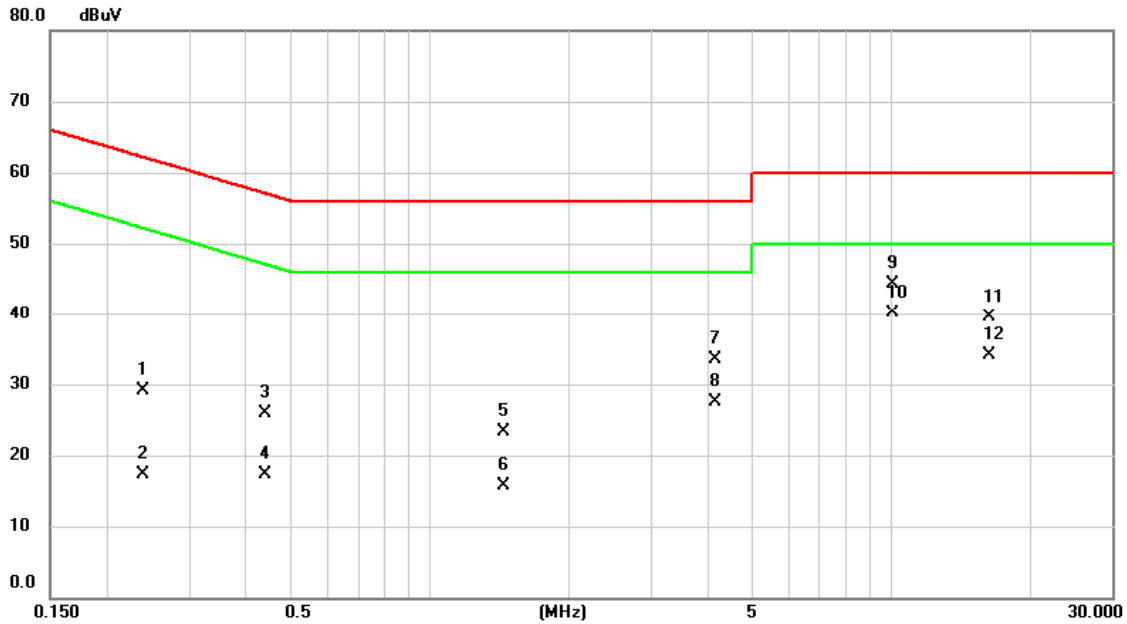


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2378	19.64	9.56	29.20	62.17	-32.97	QP	
2		0.2378	7.76	9.56	17.32	52.17	-34.85	AVG	
3		0.4402	16.37	9.54	25.91	57.06	-31.15	QP	
4		0.4402	7.69	9.54	17.23	47.06	-29.83	AVG	
5		1.4438	13.81	9.58	23.39	56.00	-32.61	QP	
6		1.4438	6.15	9.58	15.73	46.00	-30.27	AVG	
7		4.1415	23.71	9.72	33.43	56.00	-22.57	QP	
8		4.1415	17.87	9.72	27.59	46.00	-18.41	AVG	
9		10.1018	34.52	9.86	44.38	60.00	-15.62	QP	
10	*	10.1018	30.23	9.86	40.09	50.00	-9.91	AVG	
11		16.2285	29.49	9.93	39.42	60.00	-20.58	QP	
12		16.2285	24.24	9.93	34.17	50.00	-15.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2026/3/24
Test Frequency	-	Phase	Neutral

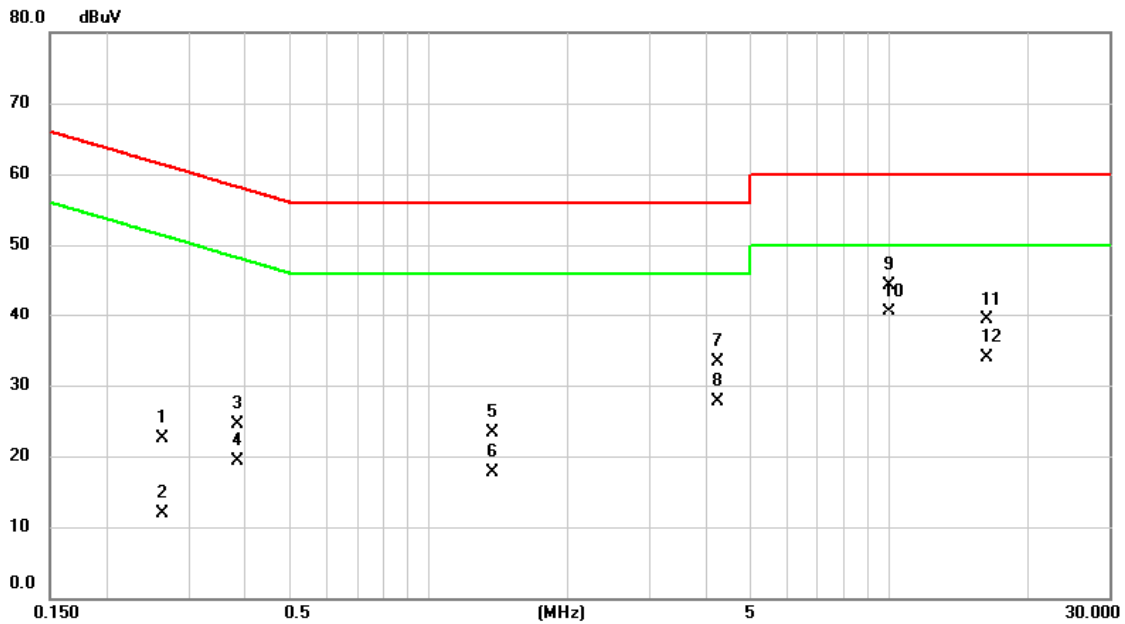

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2625	12.96	9.51	22.47	61.35	-38.88	QP	
2		0.2625	2.37	9.51	11.88	51.35	-39.47	AVG	
3		0.3862	14.92	9.50	24.42	58.15	-33.73	QP	
4		0.3862	9.87	9.50	19.37	48.15	-28.78	AVG	
5		1.3763	13.84	9.56	23.40	56.00	-32.60	QP	
6		1.3763	8.17	9.56	17.73	46.00	-28.27	AVG	
7		4.2270	23.70	9.69	33.39	56.00	-22.61	QP	
8		4.2270	17.98	9.69	27.67	46.00	-18.33	AVG	
9		9.9938	34.53	9.82	44.35	60.00	-15.65	QP	
10	*	9.9938	30.62	9.82	40.44	50.00	-9.56	AVG	
11		16.2285	29.30	9.93	39.23	60.00	-20.77	QP	
12		16.2285	23.95	9.93	33.88	50.00	-16.12	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Vertical
Temp	25°C	Hum.	55 %

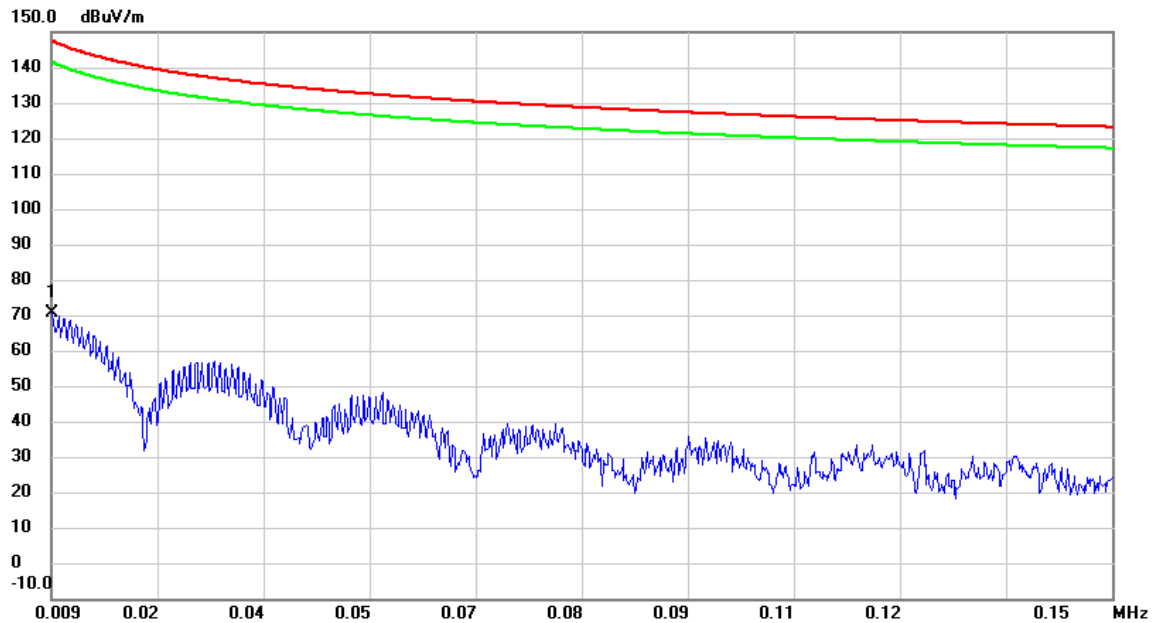


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0091	33.77	36.74	70.51	147.50	-76.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Vertical
Temp	25°C	Hum.	55 %

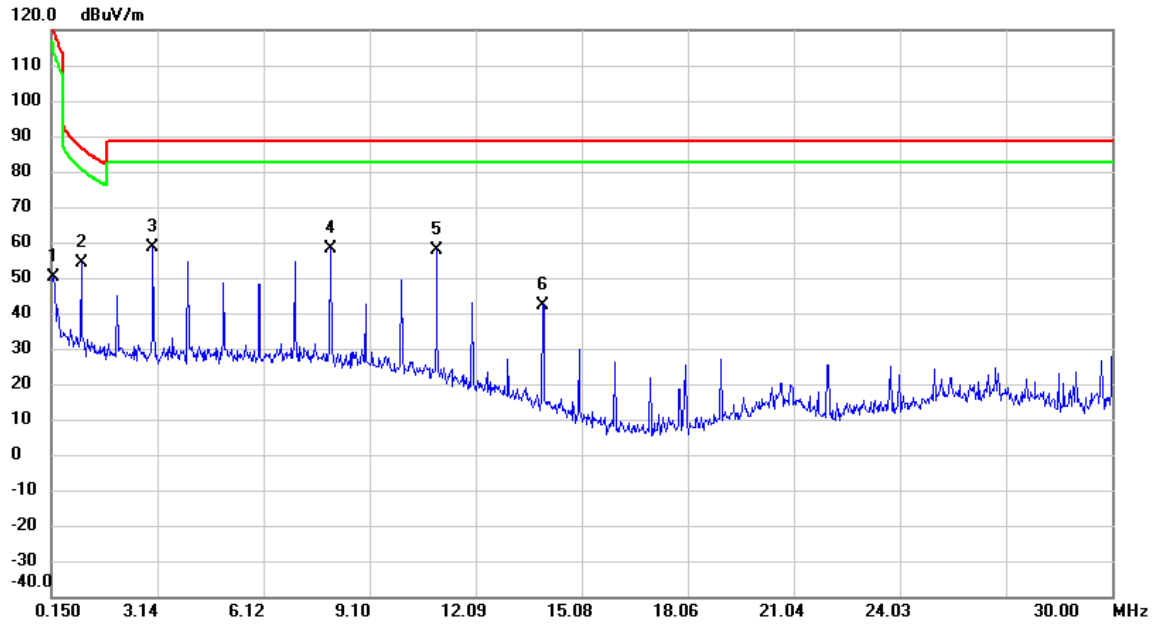


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1907	37.14	13.00	50.14	121.08	-70.94	AVG	
2		0.9997	53.69	0.66	54.35	86.68	-32.33	QP	
3	*	3.0006	61.97	-3.30	58.67	88.62	-29.95	QP	
4		8.0004	60.95	-2.92	58.03	88.62	-30.59	QP	
5		11.0004	60.23	-2.56	57.67	88.62	-30.95	QP	
6		13.9994	45.20	-2.83	42.37	88.62	-46.25	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Horizontal
Temp	25°C	Hum.	55 %

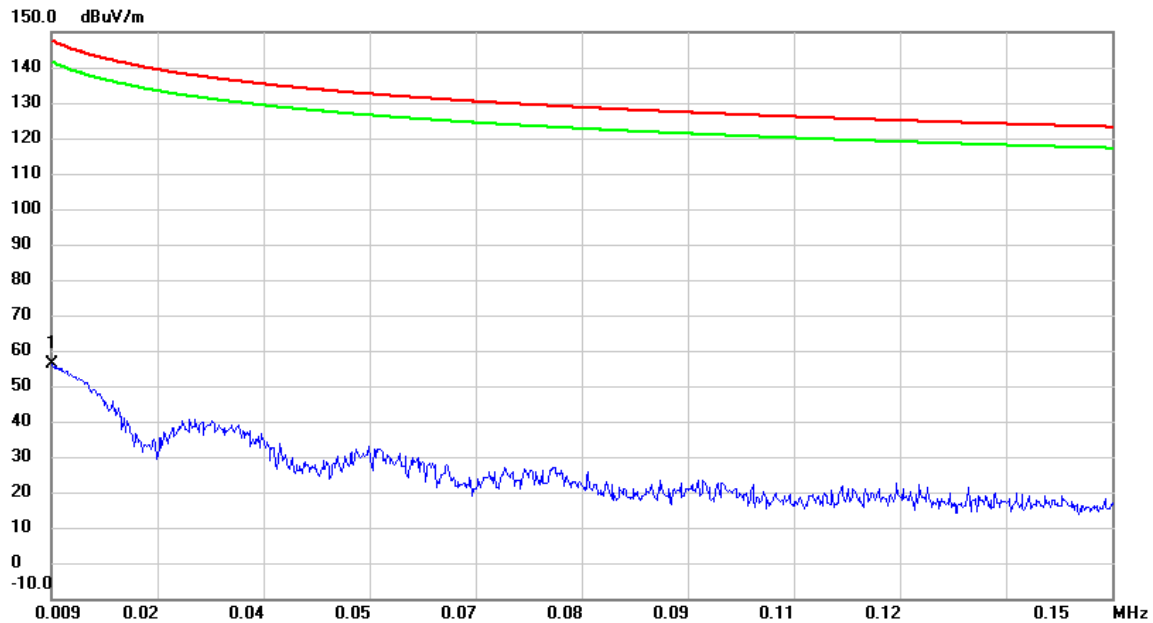


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0090	19.31	36.75	56.06	147.60	-91.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Horizontal
Temp	25°C	Hum.	55 %

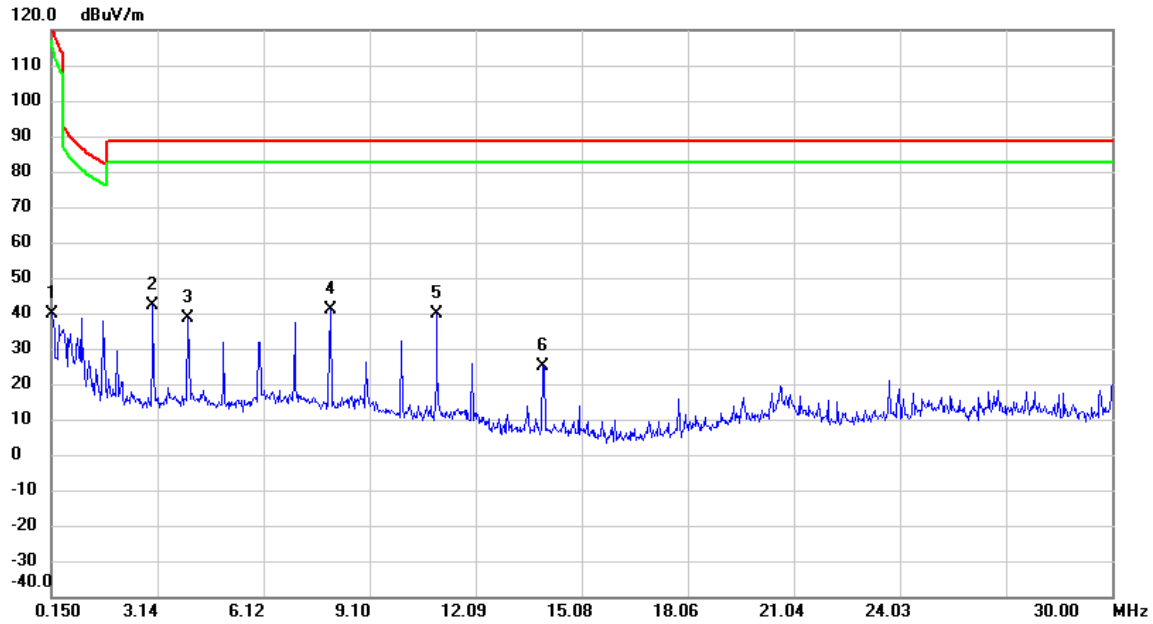

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	24.94	14.98	39.92	123.16	-83.24	AVG	
2	*	2.9997	45.36	-3.30	42.06	88.62	-46.56	QP	
3		4.0007	41.86	-3.44	38.42	88.62	-50.20	QP	
4		8.0006	43.93	-2.92	41.01	88.62	-47.61	QP	
5		11.0004	42.21	-2.56	39.65	88.62	-48.97	QP	
6		13.9994	27.76	-2.83	24.93	88.62	-63.69	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Vertical
Temp	25°C	Hum.	55 %

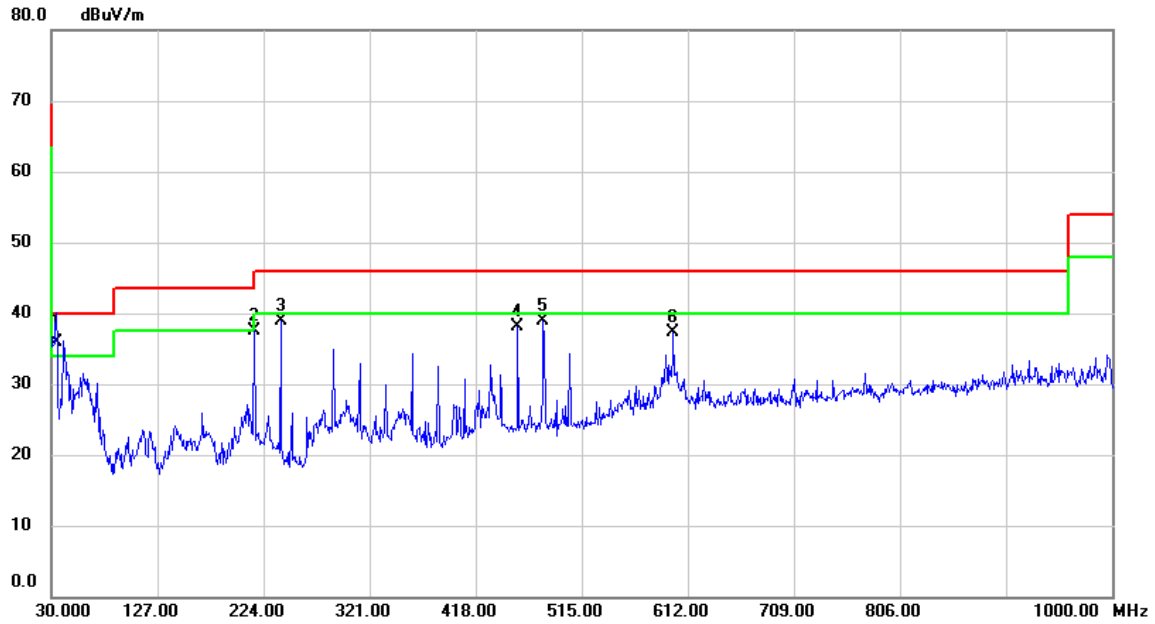


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	34.4943	48.56	-12.68	35.88	40.00	-4.12	QP	
2		216.0136	52.63	-15.11	37.52	46.00	-8.48	peak	
3		240.0050	51.89	-13.07	38.82	46.00	-7.18	peak	
4		456.0240	44.91	-6.83	38.08	46.00	-7.92	peak	
5		480.0153	45.26	-6.43	38.83	46.00	-7.17	peak	
6		598.5493	41.34	-4.00	37.34	46.00	-8.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/2
Test Frequency	2467MHz	Polarization	Horizontal
Temp	25°C	Hum.	55 %

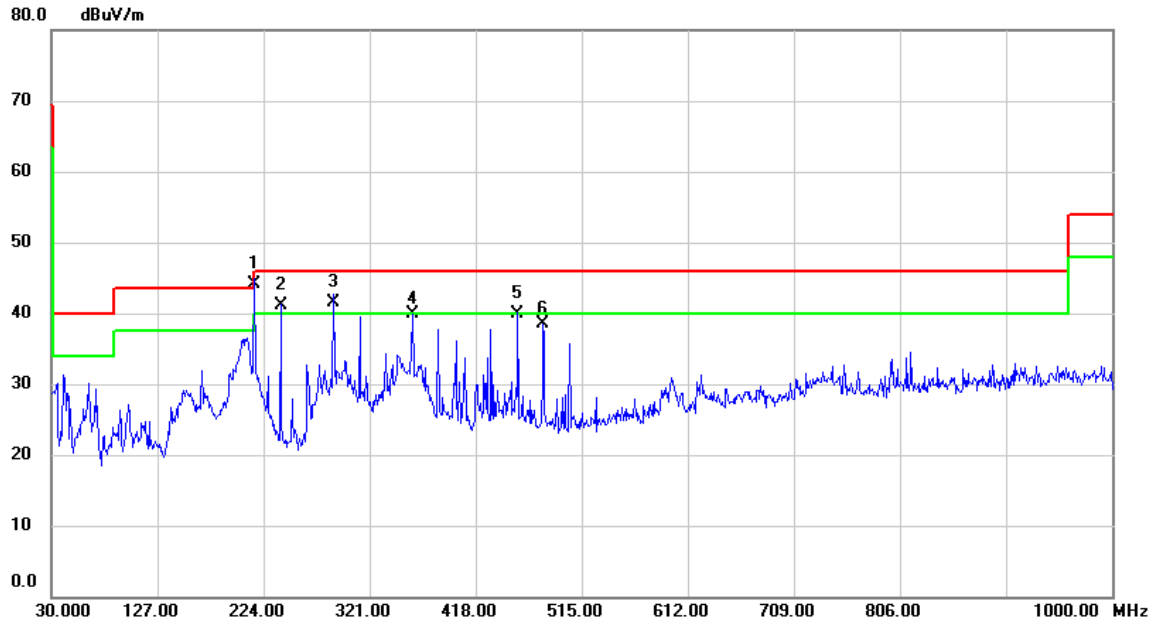

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	216.0137	59.19	-15.11	44.08	46.00	-1.92	QP	
2	!	240.0050	54.10	-13.07	41.03	46.00	-4.97	QP	
3	!	287.9877	52.70	-11.23	41.47	46.00	-4.53	QP	
4		359.9940	49.54	-9.60	39.94	46.00	-6.06	peak	
5		456.0240	46.73	-6.83	39.90	46.00	-6.10	QP	
6		480.0153	44.89	-6.43	38.46	46.00	-7.54	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

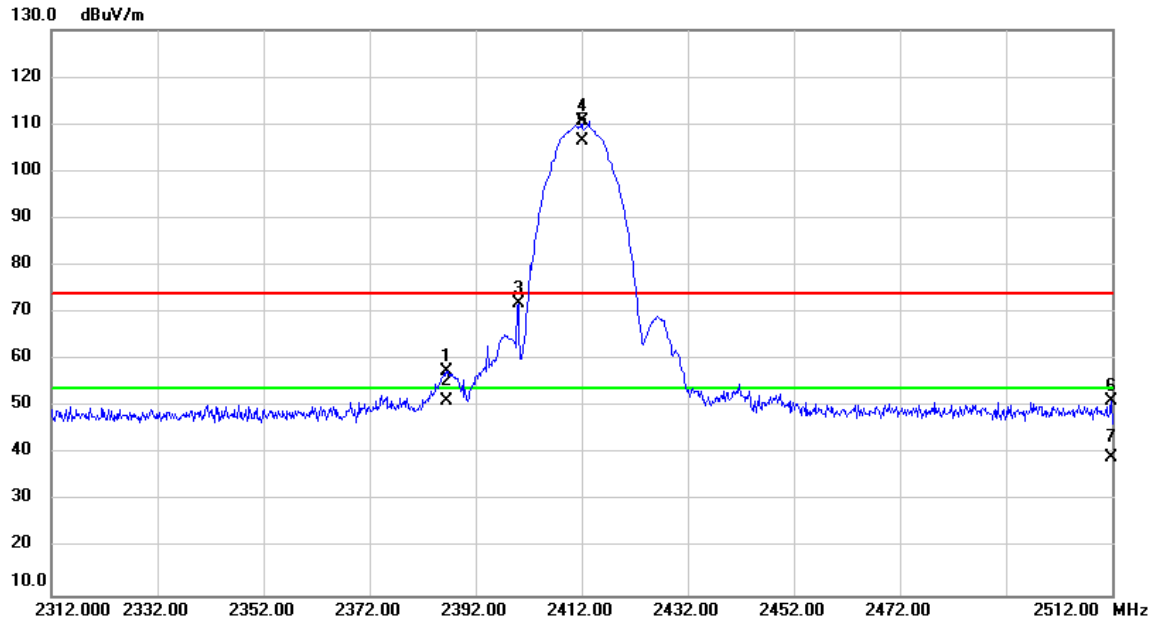


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2386.660	62.34	-4.76	57.58	74.00	-16.42	peak	
2		2386.660	56.16	-4.76	51.40	54.00	-2.60	AVG	
3		2400.000	76.65	-4.70	71.95	74.00	-2.05	peak	No Limit
4	X	2412.000	115.31	-4.66	110.65	74.00	36.65	peak	No Limit
5	*	2412.000	111.10	-4.66	106.44	54.00	52.44	AVG	No Limit
6		2511.893	55.56	-4.22	51.34	74.00	-22.66	peak	
7		2511.893	43.35	-4.22	39.13	54.00	-14.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

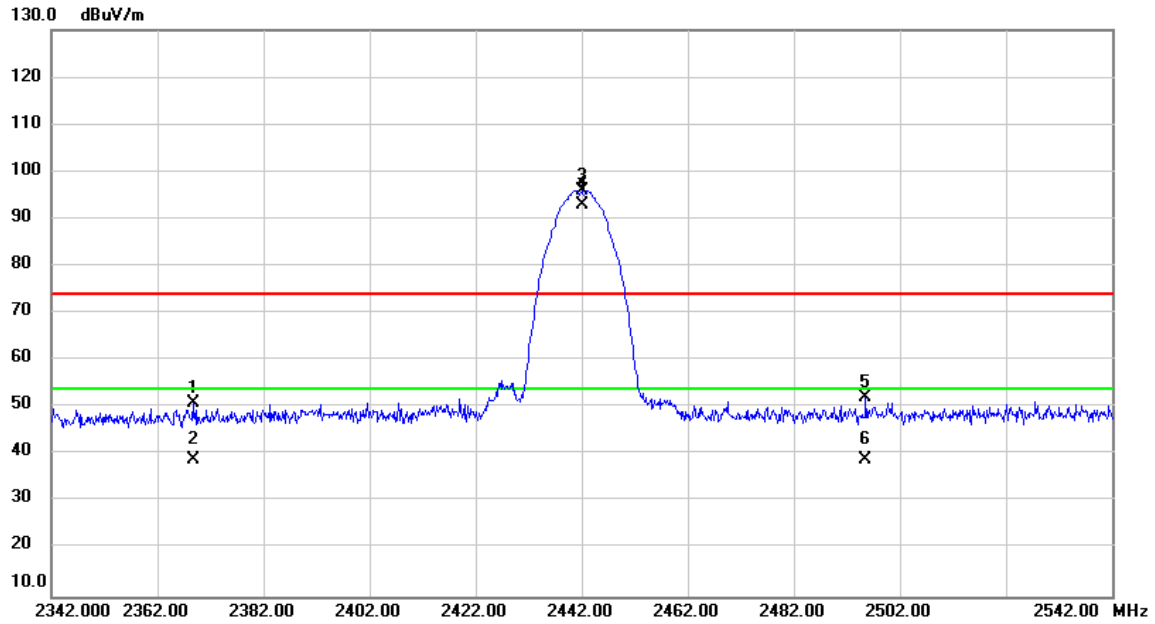


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2368.767	55.72	-4.83	50.89	74.00	-23.11	peak	
2		2368.767	43.72	-4.83	38.89	54.00	-15.11	AVG	
3	X	2442.000	100.58	-4.52	96.06	74.00	22.06	peak	No Limit
4	*	2442.000	97.36	-4.52	92.84	54.00	38.84	AVG	No Limit
5		2495.533	56.34	-4.30	52.04	74.00	-21.96	peak	
6		2495.533	43.39	-4.30	39.09	54.00	-14.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

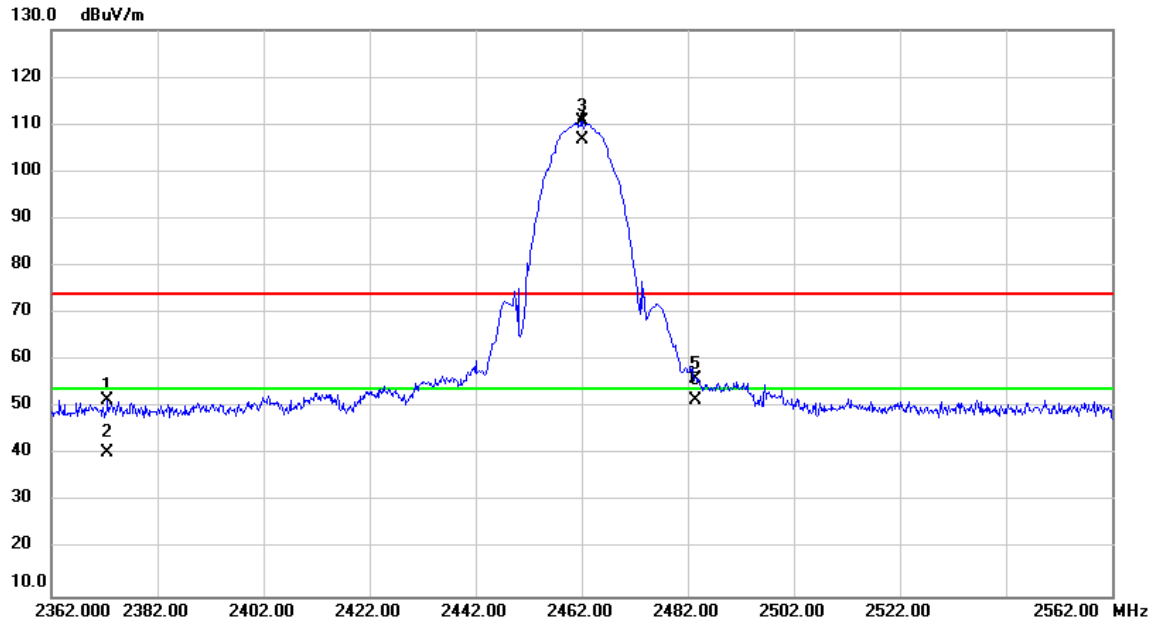


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2372.613	56.28	-4.81	51.47	74.00	-22.53	peak	
2		2372.613	45.27	-4.81	40.46	54.00	-13.54	AVG	
3	X	2462.000	115.03	-4.45	110.58	74.00	36.58	peak	No Limit
4	*	2462.000	111.34	-4.45	106.89	54.00	52.89	AVG	No Limit
5		2483.500	60.46	-4.35	56.11	74.00	-17.89	peak	
6		2483.500	55.79	-4.35	51.44	54.00	-2.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

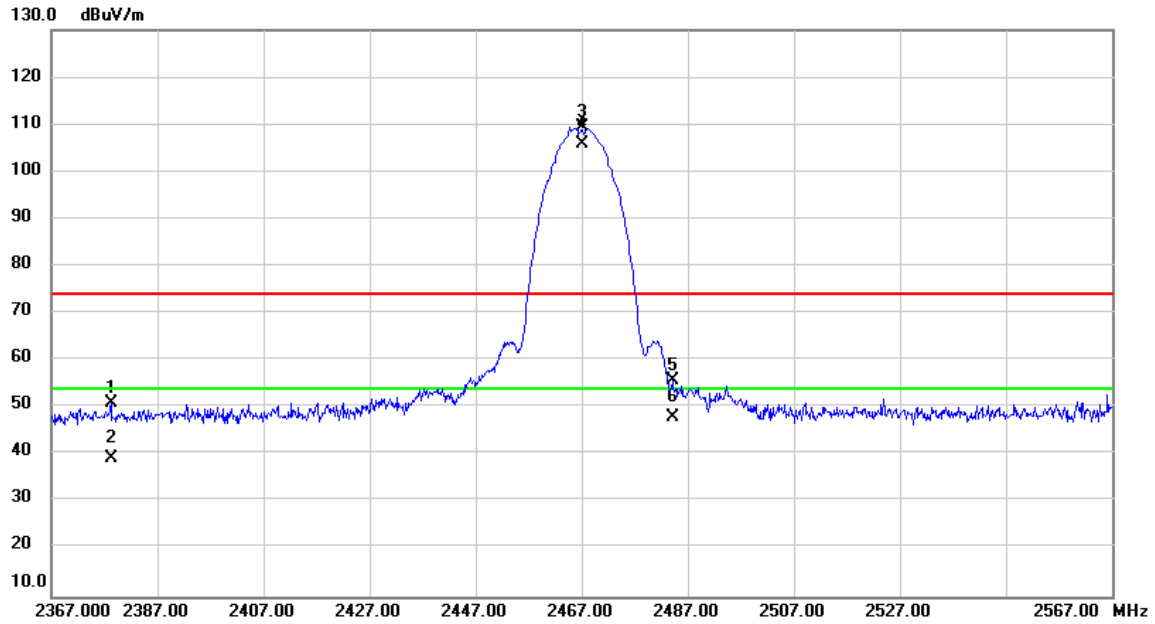


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2378.213	55.78	-4.79	50.99	74.00	-23.01	peak	
2		2378.213	44.07	-4.79	39.28	54.00	-14.72	AVG	
3	X	2467.000	113.95	-4.42	109.53	74.00	35.53	peak	No Limit
4	*	2467.000	110.19	-4.42	105.77	54.00	51.77	AVG	No Limit
5		2484.133	60.17	-4.34	55.83	74.00	-18.17	peak	
6		2484.133	52.34	-4.34	48.00	54.00	-6.00	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

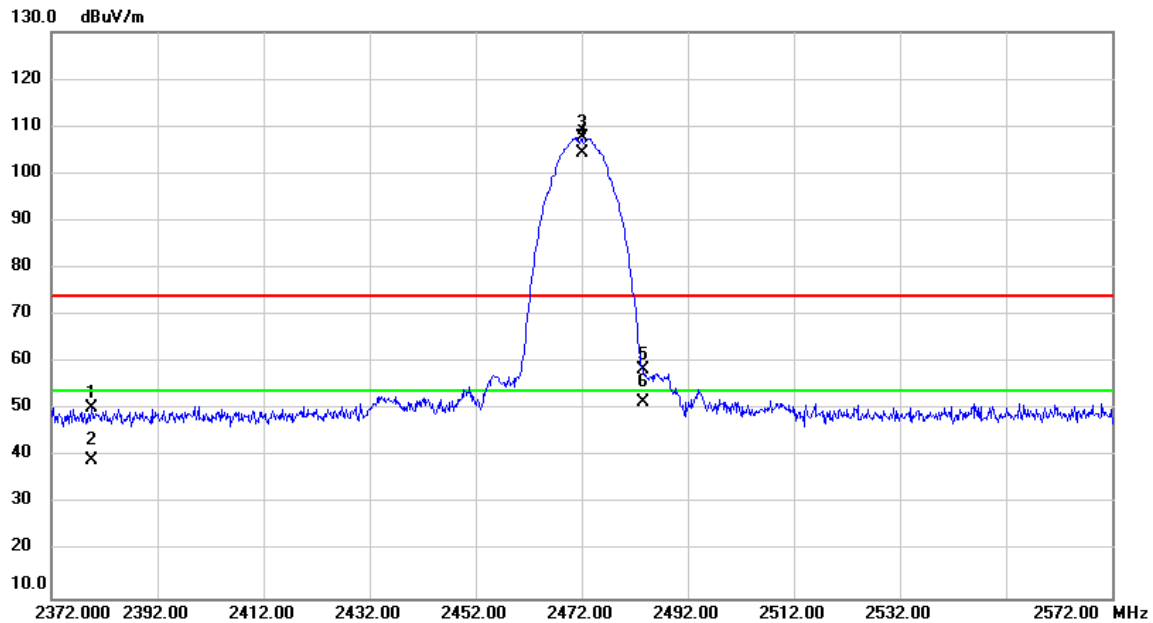


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2379.733	55.25	-4.78	50.47	74.00	-23.53	peak	
2		2379.733	43.91	-4.78	39.13	54.00	-14.87	AVG	
3	X	2472.000	111.98	-4.40	107.58	74.00	33.58	peak	No Limit
4	*	2472.000	108.84	-4.40	104.44	54.00	50.44	AVG	No Limit
5		2483.500	62.92	-4.35	58.57	74.00	-15.43	peak	
6		2483.500	55.80	-4.35	51.45	54.00	-2.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

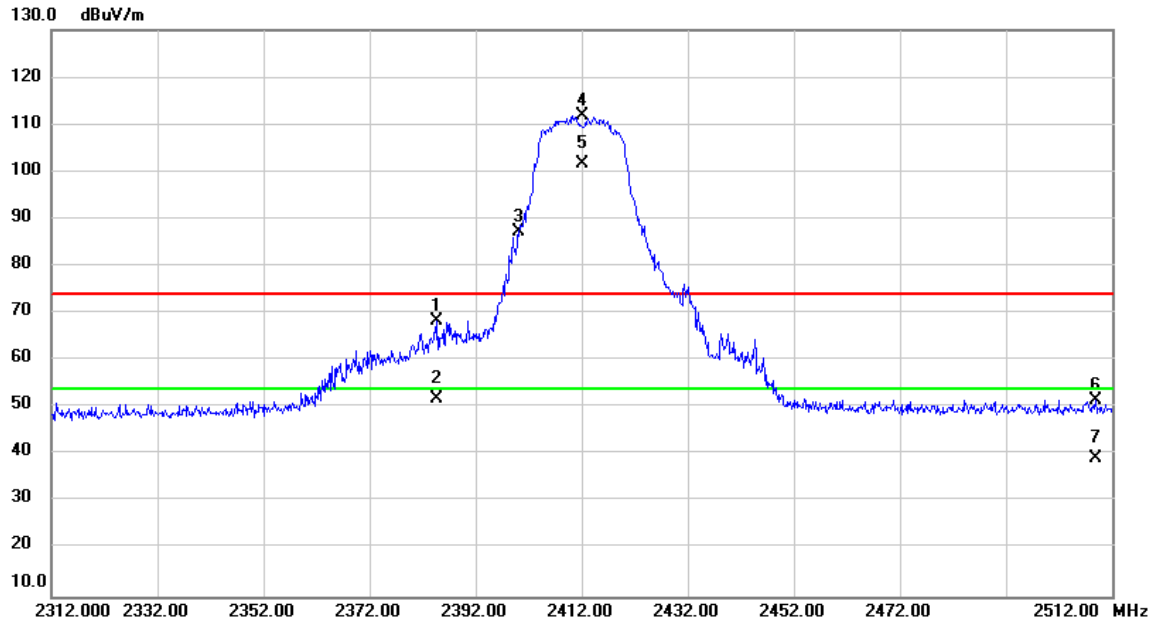


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2384.740	73.07	-4.77	68.30	74.00	-5.70	peak	
2		2384.740	56.56	-4.77	51.79	54.00	-2.21	AVG	
3	X	2400.000	91.98	-4.70	87.28	74.00	13.28	peak	
4	X	2412.000	116.61	-4.66	111.95	74.00	37.95	peak	No Limit
5	*	2412.000	106.28	-4.66	101.62	54.00	47.62	AVG	No Limit
6		2508.953	55.80	-4.24	51.56	74.00	-22.44	peak	
7		2508.953	43.54	-4.24	39.30	54.00	-14.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

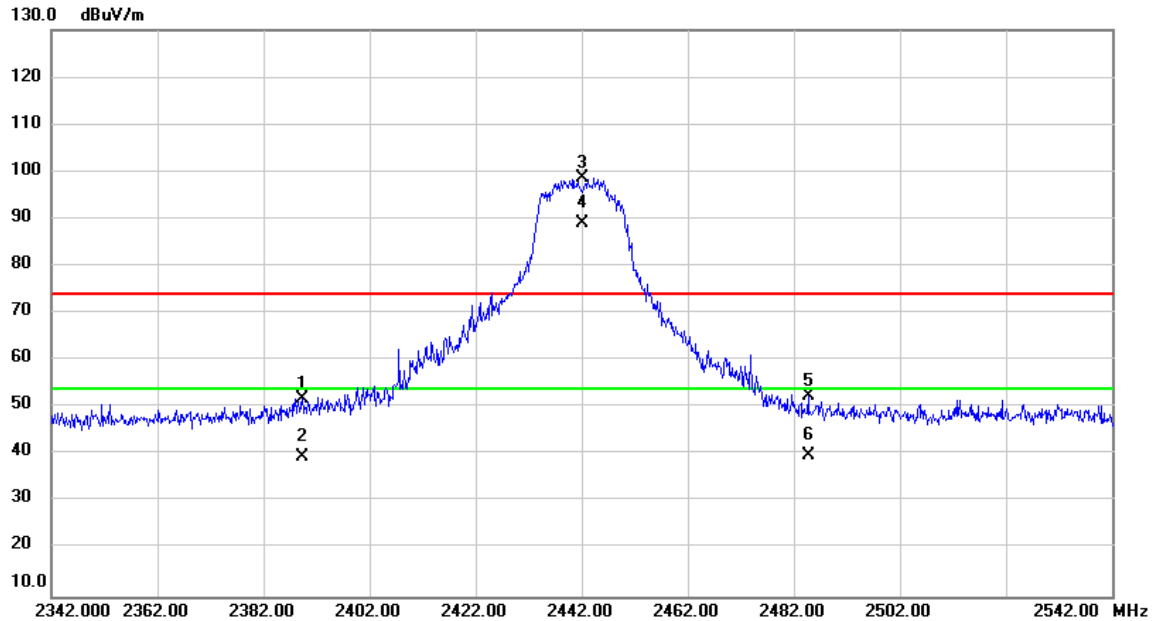


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.247	56.69	-4.74	51.95	74.00	-22.05	peak	
2		2389.247	44.31	-4.74	39.57	54.00	-14.43	AVG	
3	X	2442.000	103.32	-4.52	98.80	74.00	24.80	peak	No Limit
4	*	2442.000	93.52	-4.52	89.00	54.00	35.00	AVG	No Limit
5		2484.740	56.74	-4.34	52.40	74.00	-21.60	peak	
6		2484.740	44.27	-4.34	39.93	54.00	-14.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

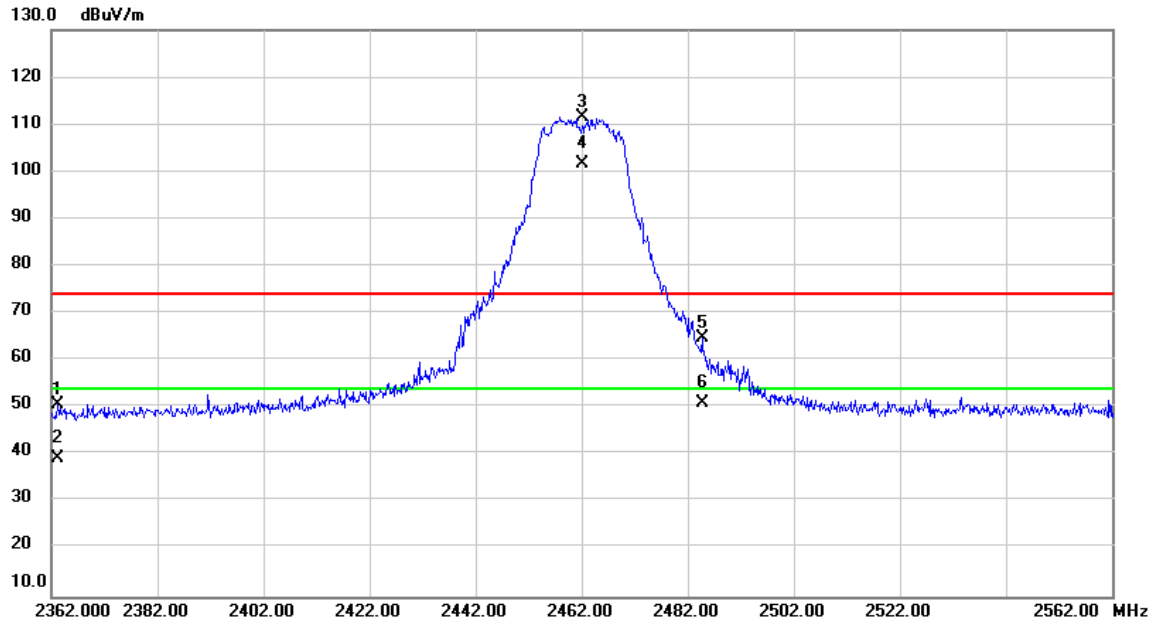


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2363.247	55.59	-4.85	50.74	74.00	-23.26	peak	
2		2363.247	44.08	-4.85	39.23	54.00	-14.77	AVG	
3	X	2462.000	116.08	-4.45	111.63	74.00	37.63	peak	No Limit
4	*	2462.000	106.24	-4.45	101.79	54.00	47.79	AVG	No Limit
5		2484.693	69.22	-4.34	64.88	74.00	-9.12	peak	
6		2484.693	55.38	-4.34	51.04	54.00	-2.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

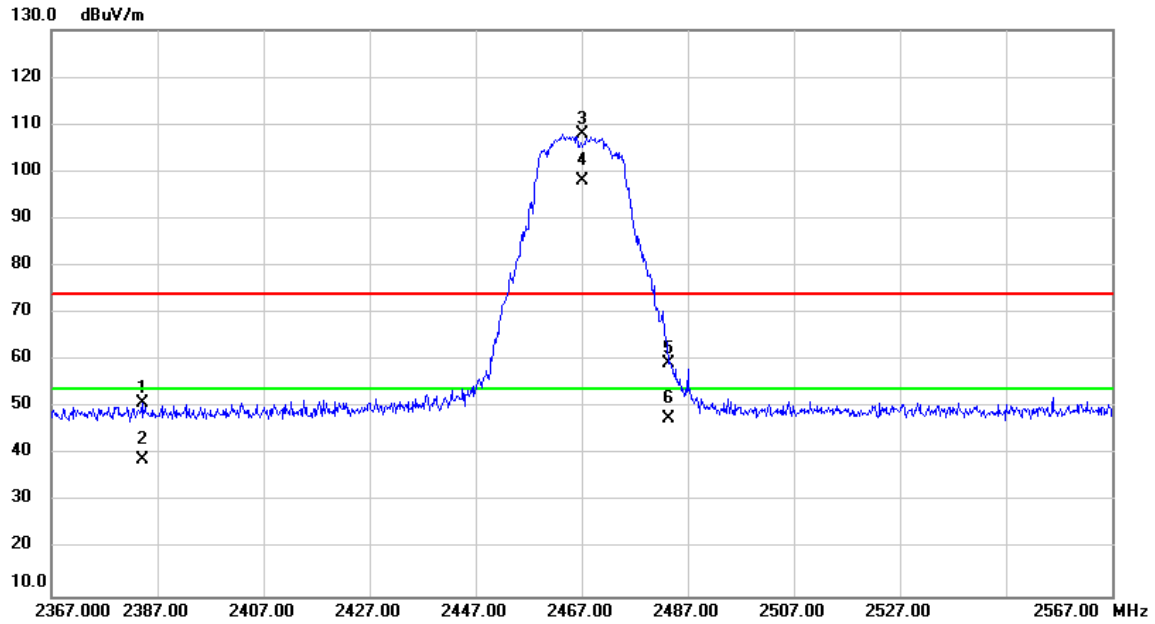


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2384.160	55.65	-4.77	50.88	74.00	-23.12	peak	
2		2384.160	43.58	-4.77	38.81	54.00	-15.19	AVG	
3	X	2467.000	112.48	-4.42	108.06	74.00	34.06	peak	No Limit
4	*	2467.000	102.49	-4.42	98.07	54.00	44.07	AVG	No Limit
5		2483.500	63.57	-4.35	59.22	74.00	-14.78	peak	
6		2483.500	52.11	-4.35	47.76	54.00	-6.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

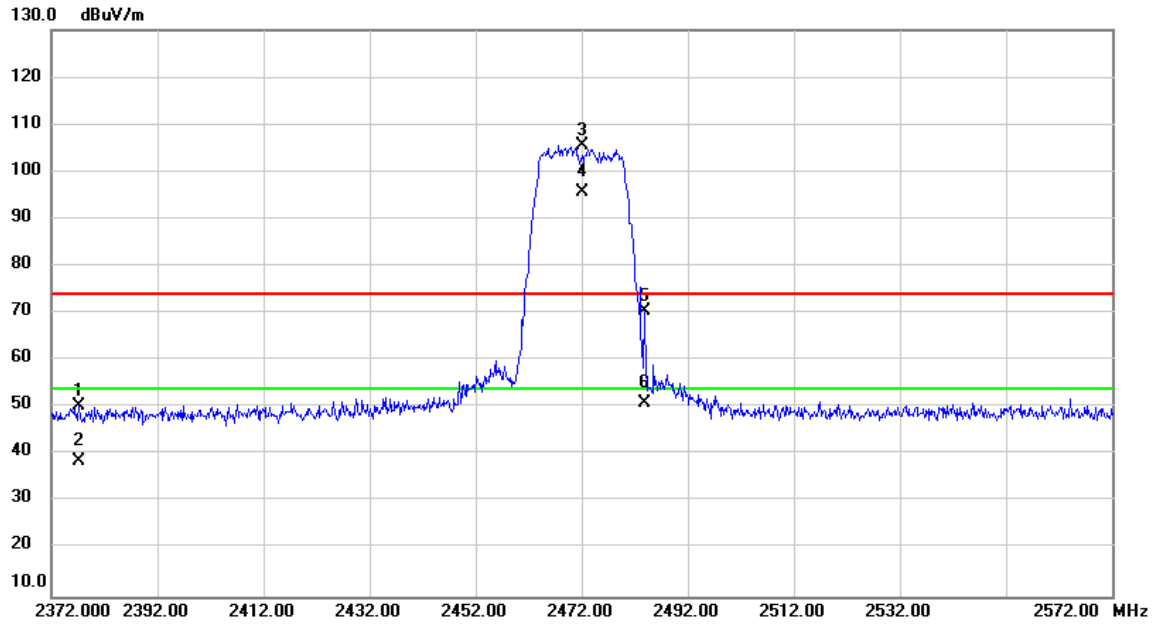


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2377.113	55.12	-4.80	50.32	74.00	-23.68	peak	
2		2377.113	43.36	-4.80	38.56	54.00	-15.44	AVG	
3	X	2472.000	109.80	-4.40	105.40	74.00	31.40	peak	No Limit
4	*	2472.000	99.94	-4.40	95.54	54.00	41.54	AVG	No Limit
5		2483.887	74.67	-4.34	70.33	74.00	-3.67	peak	
6		2483.887	55.42	-4.34	51.08	54.00	-2.92	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

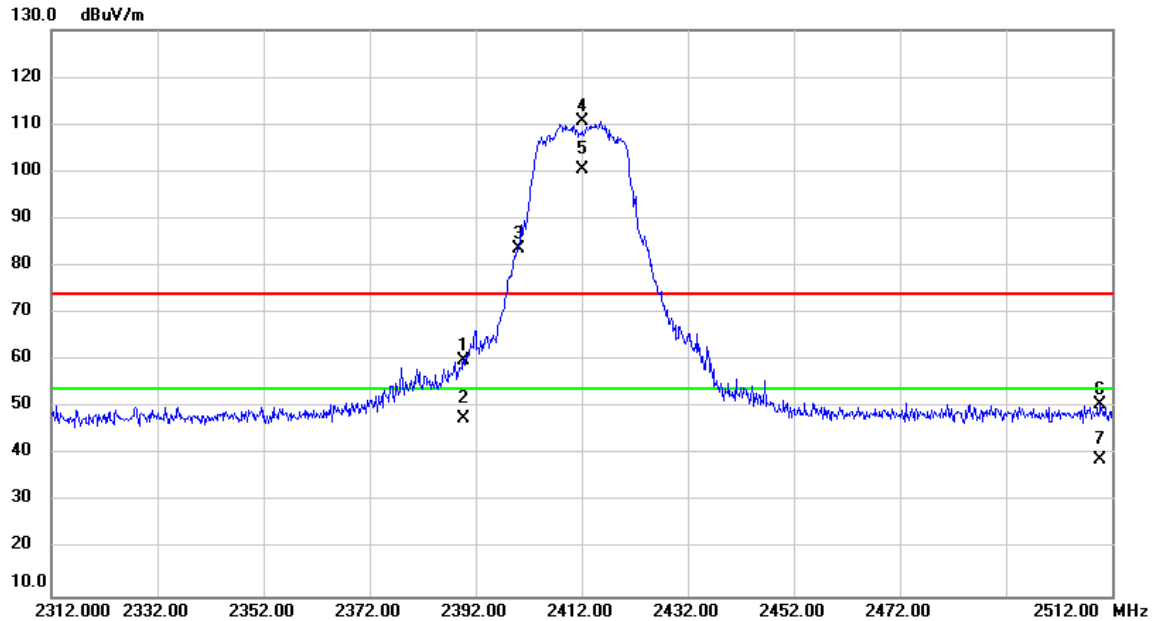


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.773	64.55	-4.74	59.81	74.00	-14.19	peak	
2		2389.773	52.53	-4.74	47.79	54.00	-6.21	AVG	
3	X	2400.000	88.29	-4.70	83.59	74.00	9.59	peak	No Limit
4	X	2412.000	115.22	-4.66	110.56	74.00	36.56	peak	No Limit
5	*	2412.000	105.17	-4.66	100.51	54.00	46.51	AVG	No Limit
6		2509.827	55.02	-4.23	50.79	74.00	-23.21	peak	
7		2509.827	43.25	-4.23	39.02	54.00	-14.98	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

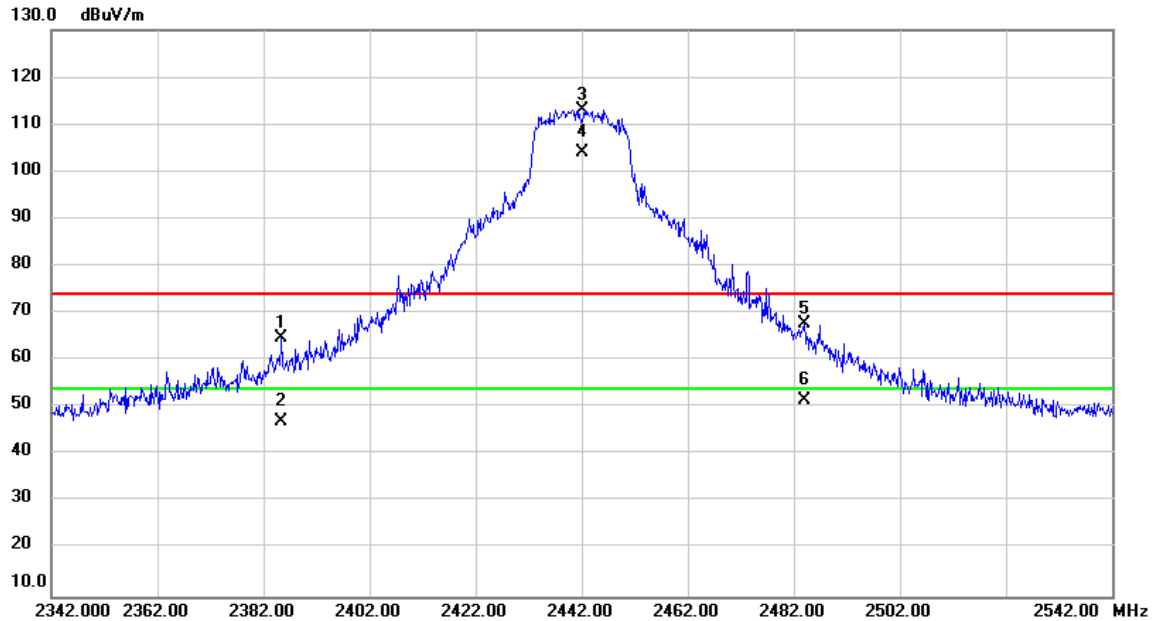


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2385.413	69.66	-4.77	64.89	74.00	-9.11	peak	
2		2385.413	51.83	-4.77	47.06	54.00	-6.94	AVG	
3	X	2442.000	117.69	-4.52	113.17	74.00	39.17	peak	No Limit
4	*	2442.000	108.42	-4.52	103.90	54.00	49.90	AVG	No Limit
5		2483.913	72.11	-4.34	67.77	74.00	-6.23	peak	
6		2483.913	56.00	-4.34	51.66	54.00	-2.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

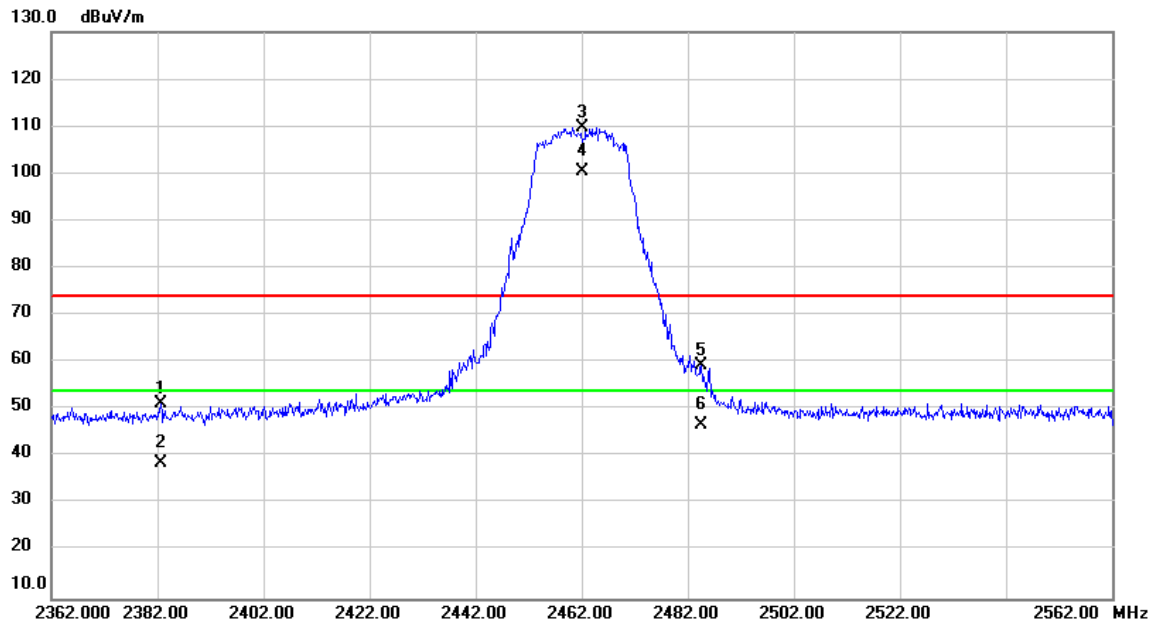


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2382.600	56.02	-4.76	51.26	74.00	-22.74	peak	
2		2382.600	43.54	-4.76	38.78	54.00	-15.22	AVG	
3	X	2462.000	114.31	-4.45	109.86	74.00	35.86	peak	No Limit
4	*	2462.000	104.80	-4.45	100.35	54.00	46.35	AVG	No Limit
5		2484.407	63.62	-4.34	59.28	74.00	-14.72	peak	
6		2484.407	50.97	-4.34	46.63	54.00	-7.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

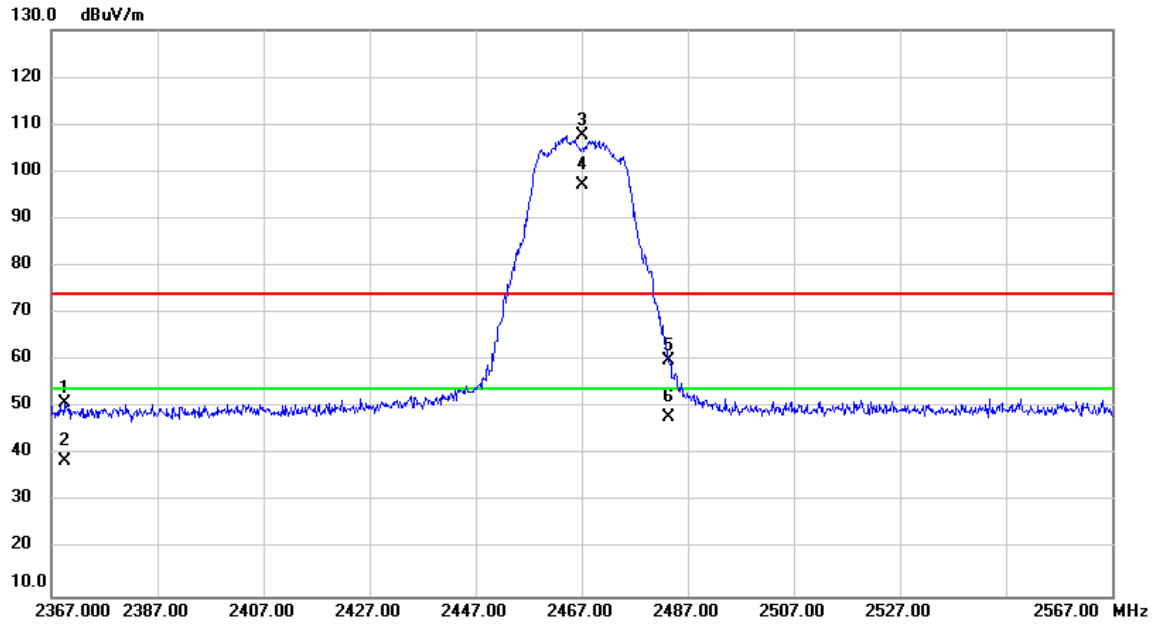


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2369.660	55.79	-4.83	50.96	74.00	-23.04	peak	
2		2369.660	43.56	-4.83	38.73	54.00	-15.27	AVG	
3	X	2467.000	111.99	-4.42	107.57	74.00	33.57	peak	No Limit
4	*	2467.000	101.63	-4.42	97.21	54.00	43.21	AVG	No Limit
5		2483.507	64.42	-4.35	60.07	74.00	-13.93	peak	
6		2483.507	52.33	-4.35	47.98	54.00	-6.02	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

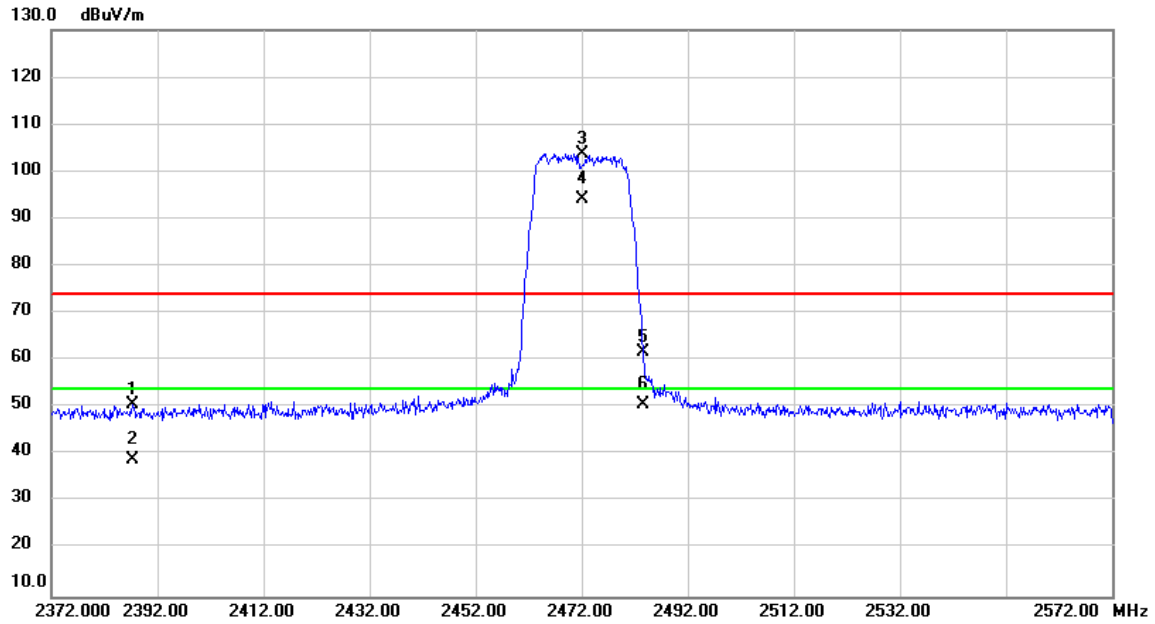


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2387.320	55.33	-4.76	50.57	74.00	-23.43	peak	
2		2387.320	43.60	-4.76	38.84	54.00	-15.16	AVG	
3	X	2472.000	108.28	-4.40	103.88	74.00	29.88	peak	No Limit
4	*	2472.000	98.63	-4.40	94.23	54.00	40.23	AVG	No Limit
5		2483.500	66.11	-4.35	61.76	74.00	-12.24	peak	
6		2483.500	54.96	-4.35	50.61	54.00	-3.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

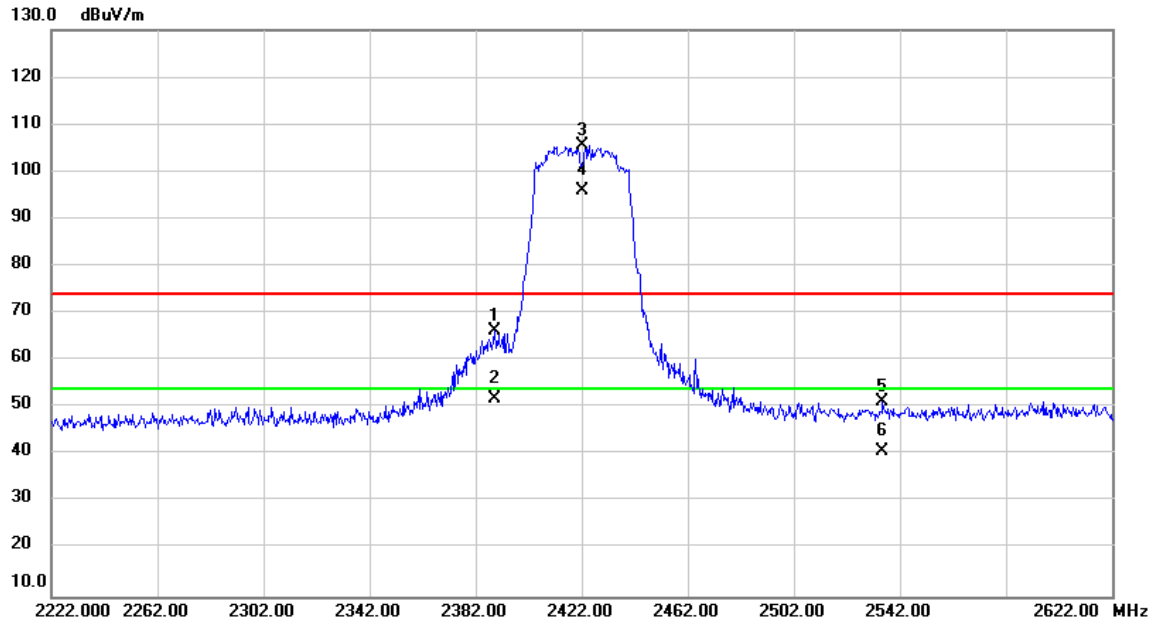


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2389.200	70.91	-4.74	66.17	74.00	-7.83	peak	
2		2389.200	56.62	-4.74	51.88	54.00	-2.12	AVG	
3	X	2422.000	110.03	-4.61	105.42	74.00	31.42	peak	No Limit
4	*	2422.000	100.50	-4.61	95.89	54.00	41.89	AVG	No Limit
5		2535.427	55.35	-4.11	51.24	74.00	-22.76	peak	
6		2535.427	44.75	-4.11	40.64	54.00	-13.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

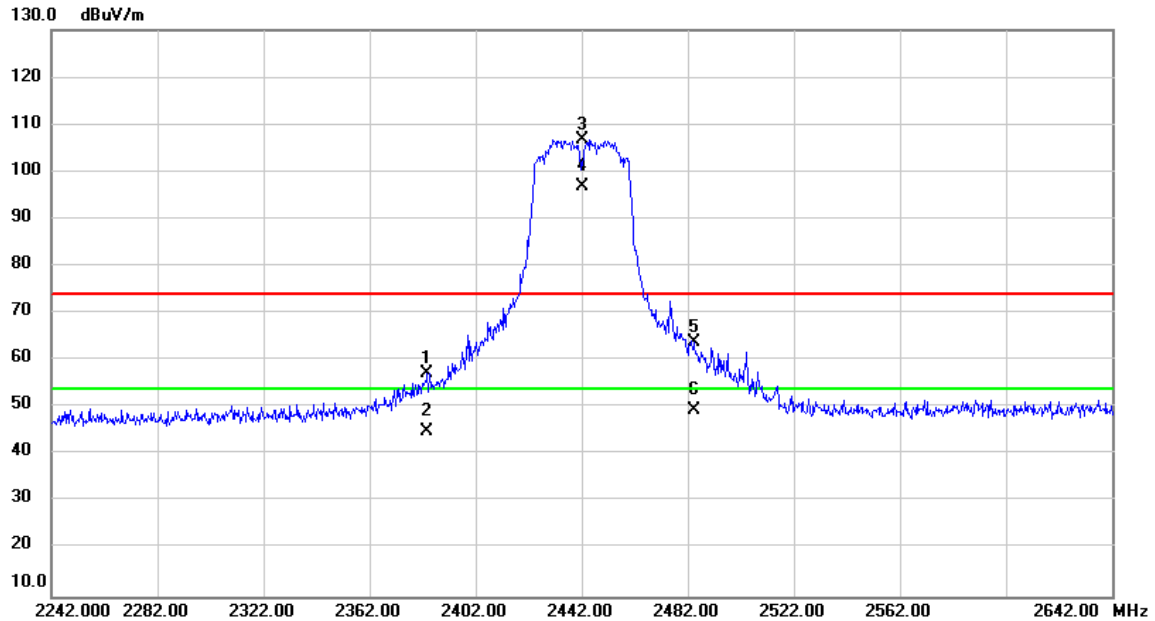


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2383.787	61.92	-4.77	57.15	74.00	-16.85	peak	
2		2383.787	49.70	-4.77	44.93	54.00	-9.07	AVG	
3	X	2442.000	111.40	-4.52	106.88	74.00	32.88	peak	No Limit
4	*	2442.000	101.52	-4.52	97.00	54.00	43.00	AVG	No Limit
5		2484.240	68.23	-4.34	63.89	74.00	-10.11	peak	
6		2484.240	53.90	-4.34	49.56	54.00	-4.44	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

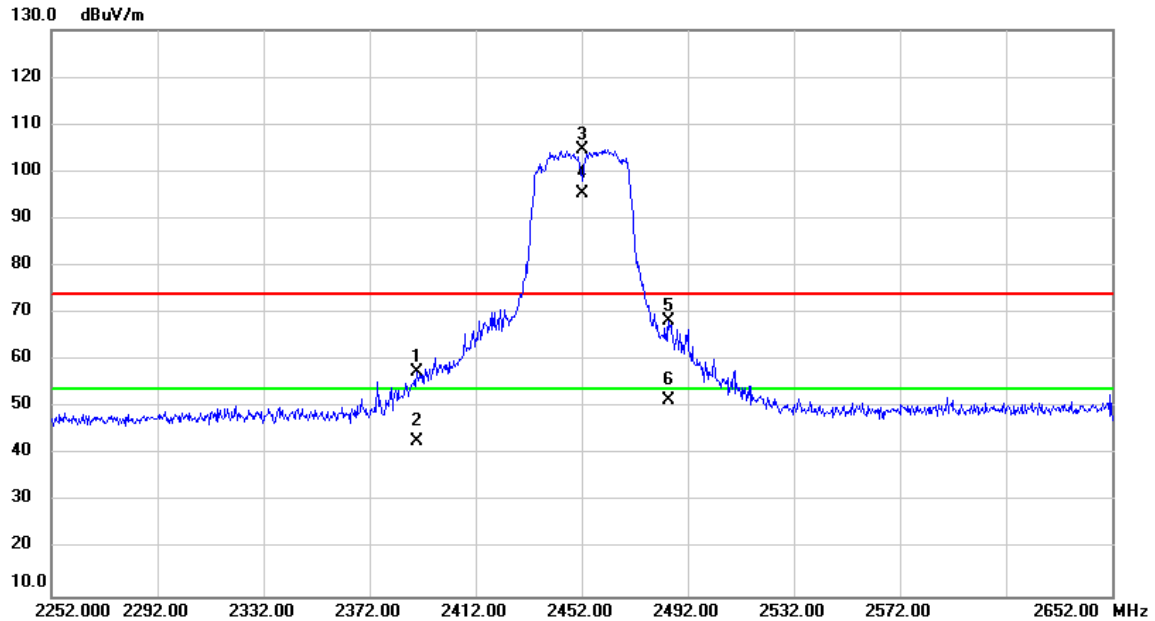


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.920	62.29	-4.74	57.55	74.00	-16.45	peak	
2		2389.920	47.70	-4.74	42.96	54.00	-11.04	AVG	
3	X	2452.000	109.11	-4.48	104.63	74.00	30.63	peak	No Limit
4	*	2452.000	99.78	-4.48	95.30	54.00	41.30	AVG	No Limit
5		2484.880	72.62	-4.34	68.28	74.00	-5.72	peak	
6		2484.880	55.94	-4.34	51.60	54.00	-2.40	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

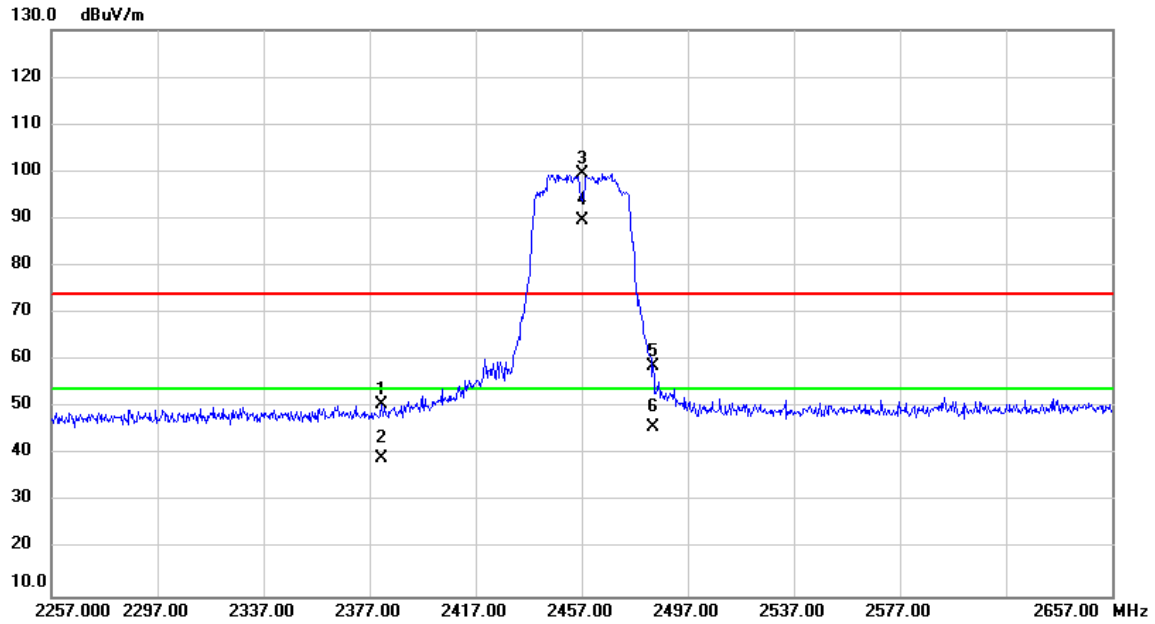


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2381.387	55.34	-4.78	50.56	74.00	-23.44	peak	
2		2381.387	43.89	-4.78	39.11	54.00	-14.89	AVG	
3	X	2457.000	104.09	-4.46	99.63	74.00	25.63	peak	No Limit
4	*	2457.000	94.10	-4.46	89.64	54.00	35.64	AVG	No Limit
5		2484.080	63.04	-4.34	58.70	74.00	-15.30	peak	
6		2484.080	50.32	-4.34	45.98	54.00	-8.02	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

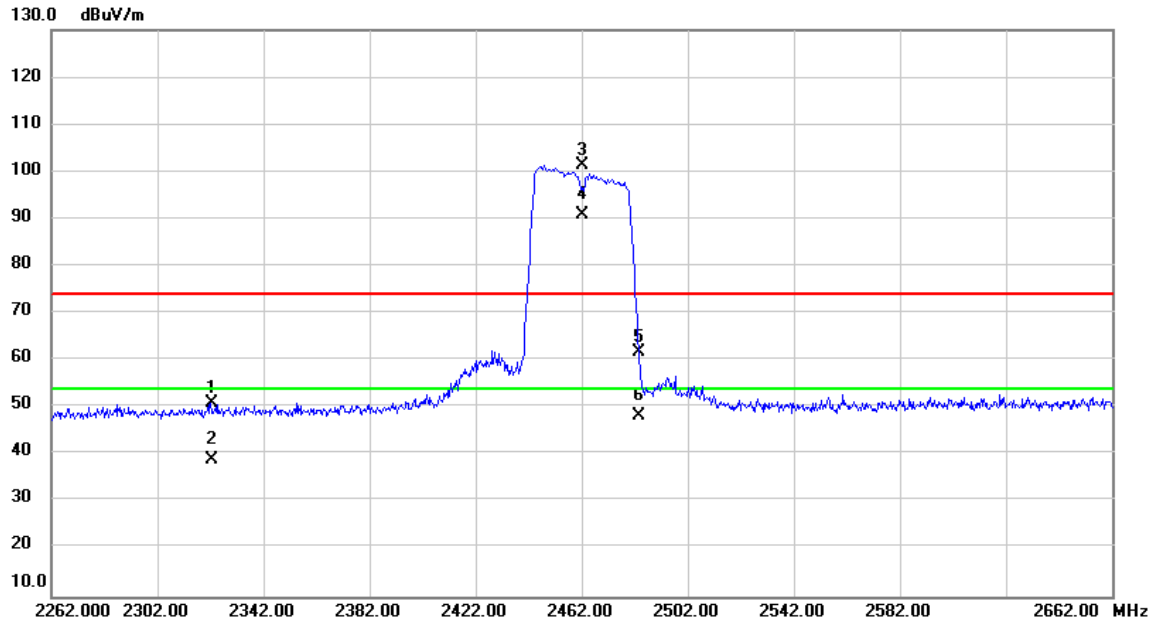


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2322.267	56.01	-5.03	50.98	74.00	-23.02	peak	
2		2322.267	44.09	-5.03	39.06	54.00	-14.94	AVG	
3	X	2462.000	105.87	-4.45	101.42	74.00	27.42	peak	No Limit
4	*	2462.000	95.23	-4.45	90.78	54.00	36.78	AVG	No Limit
5		2483.500	66.24	-4.35	61.89	74.00	-12.11	peak	
6		2483.500	52.46	-4.35	48.11	54.00	-5.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

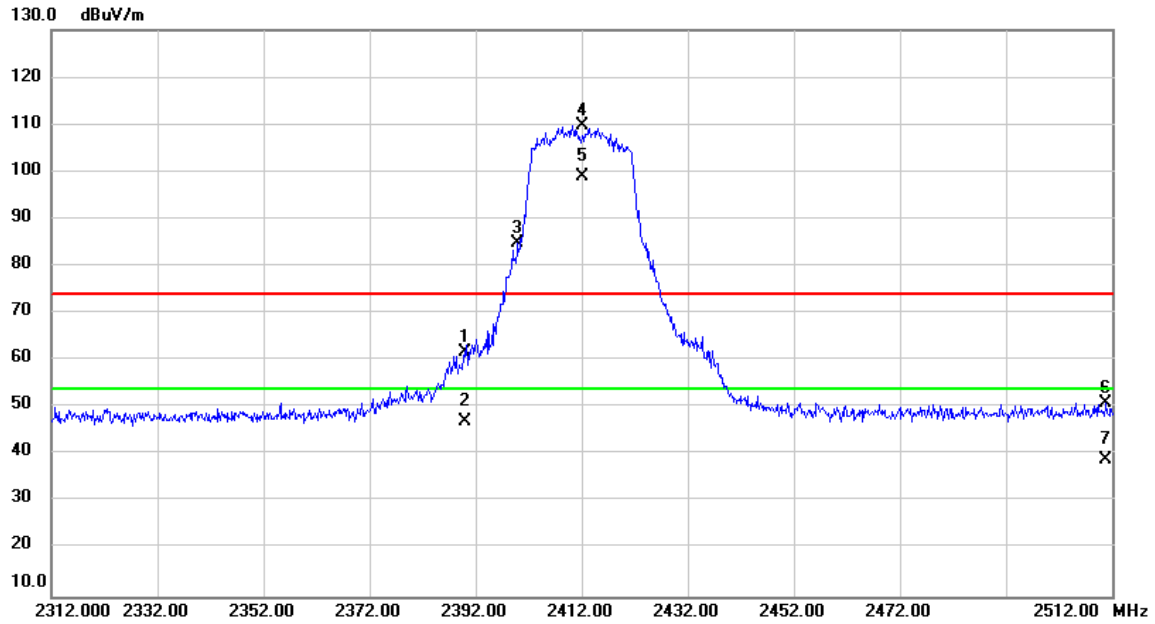


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.880	66.63	-4.74	61.89	74.00	-12.11	peak	
2		2389.880	51.85	-4.74	47.11	54.00	-6.89	AVG	
3	X	2399.953	89.70	-4.70	85.00	74.00	11.00	peak	No Limit
4	X	2412.000	114.53	-4.66	109.87	74.00	35.87	peak	No Limit
5	*	2412.000	103.74	-4.66	99.08	54.00	45.08	AVG	No Limit
6		2510.813	55.28	-4.23	51.05	74.00	-22.95	peak	
7		2510.813	43.20	-4.23	38.97	54.00	-15.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

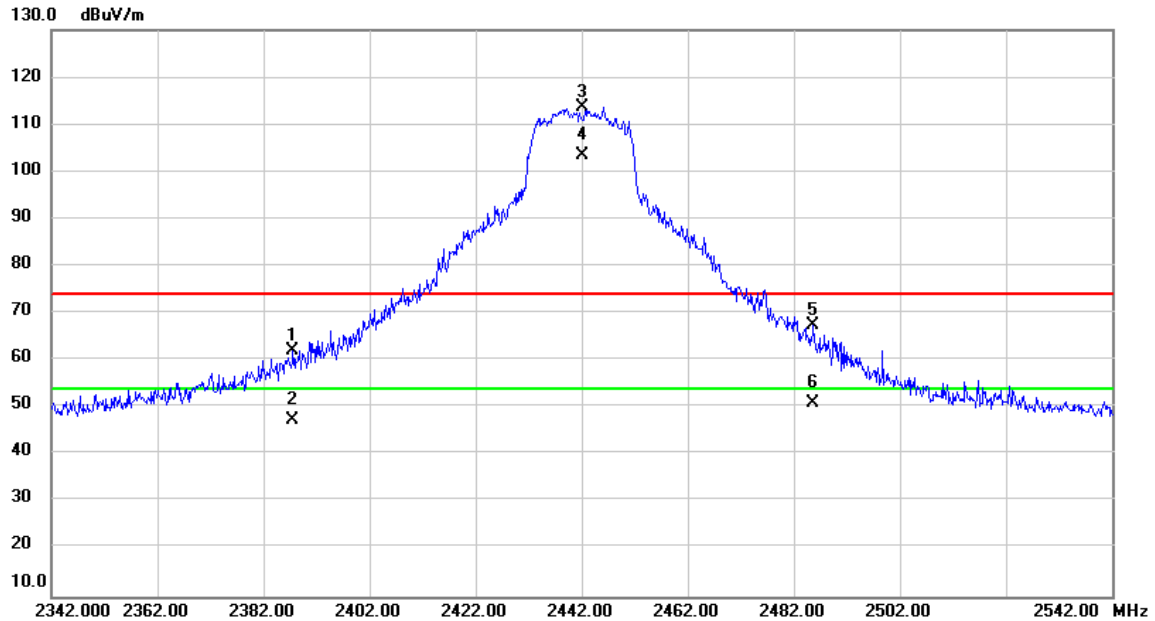


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2387.447	66.95	-4.76	62.19	74.00	-11.81	peak	
2		2387.447	51.96	-4.76	47.20	54.00	-6.80	AVG	
3	X	2442.000	118.24	-4.52	113.72	74.00	39.72	peak	No Limit
4	*	2442.000	107.84	-4.52	103.32	54.00	49.32	AVG	No Limit
5		2485.613	71.88	-4.34	67.54	74.00	-6.46	peak	
6		2485.613	55.30	-4.34	50.96	54.00	-3.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

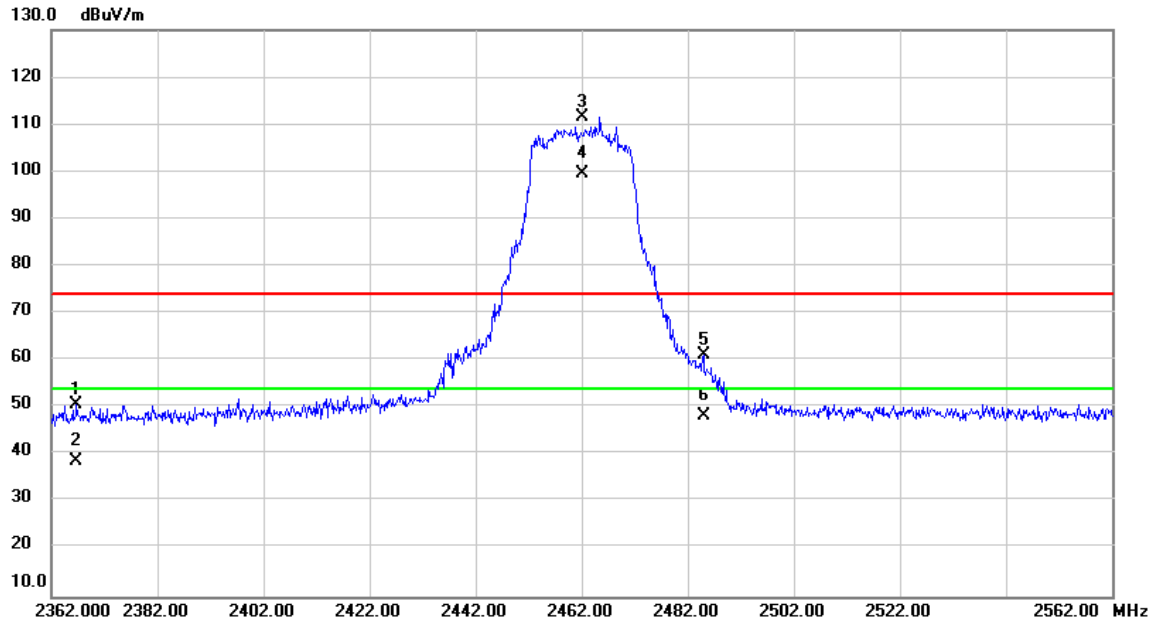


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2366.773	55.47	-4.85	50.62	74.00	-23.38	peak	
2		2366.773	43.63	-4.85	38.78	54.00	-15.22	AVG	
3	X	2462.000	116.11	-4.45	111.66	74.00	37.66	peak	No Limit
4	*	2462.000	104.09	-4.45	99.64	54.00	45.64	AVG	No Limit
5		2484.953	65.56	-4.34	61.22	74.00	-12.78	peak	
6		2484.953	52.66	-4.34	48.32	54.00	-5.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

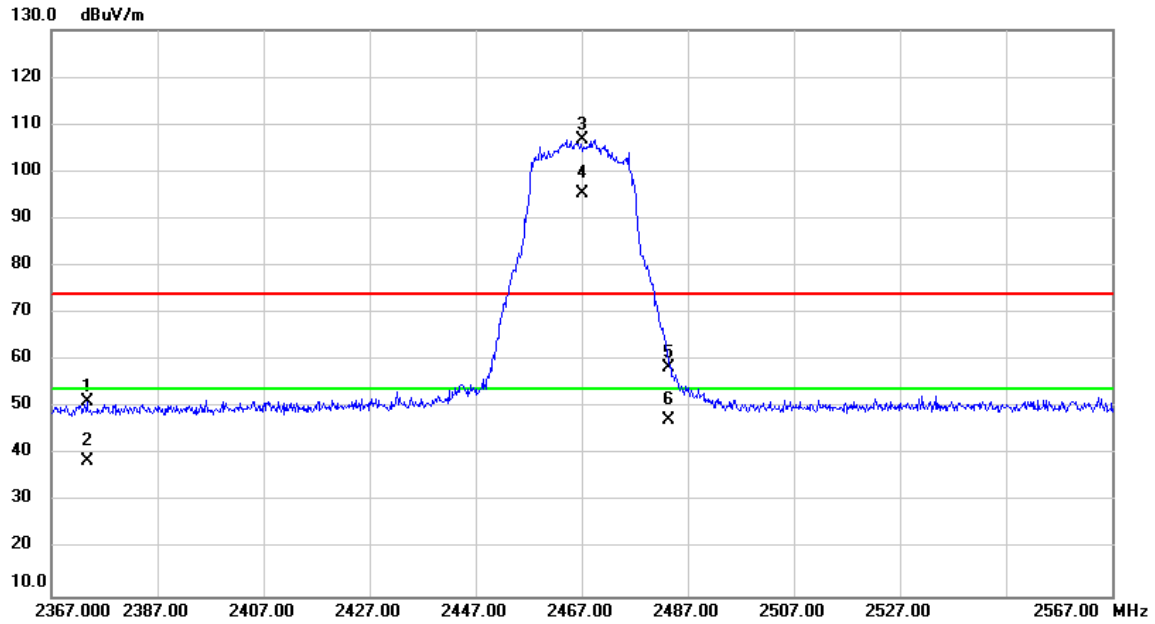


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2373.680	56.18	-4.80	51.38	74.00	-22.62	peak	
2		2373.680	43.43	-4.80	38.63	54.00	-15.37	AVG	
3	X	2467.000	111.31	-4.42	106.89	74.00	32.89	peak	No Limit
4	*	2467.000	99.77	-4.42	95.35	54.00	41.35	AVG	No Limit
5		2483.500	62.66	-4.35	58.31	74.00	-15.69	peak	
6		2483.500	51.75	-4.35	47.40	54.00	-6.60	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

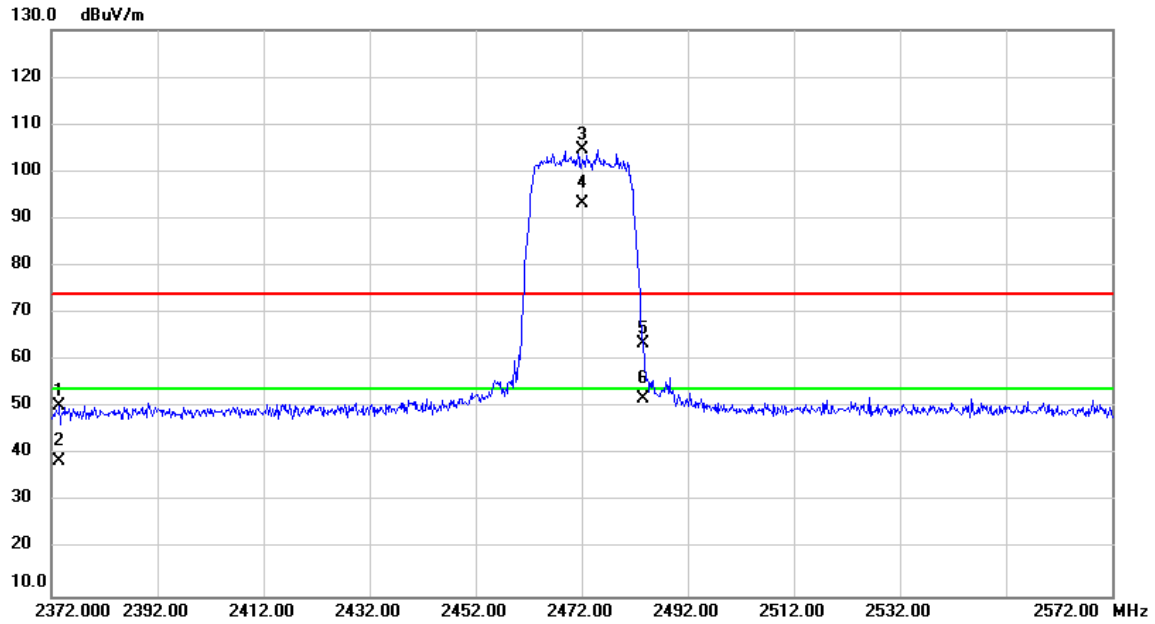


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2373.453	55.24	-4.81	50.43	74.00	-23.57	peak	
2		2373.453	43.57	-4.81	38.76	54.00	-15.24	AVG	
3	X	2472.000	109.07	-4.40	104.67	74.00	30.67	peak	No Limit
4	*	2472.000	97.72	-4.40	93.32	54.00	39.32	AVG	No Limit
5		2483.500	67.95	-4.35	63.60	74.00	-10.40	peak	
6		2483.500	56.10	-4.35	51.75	54.00	-2.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

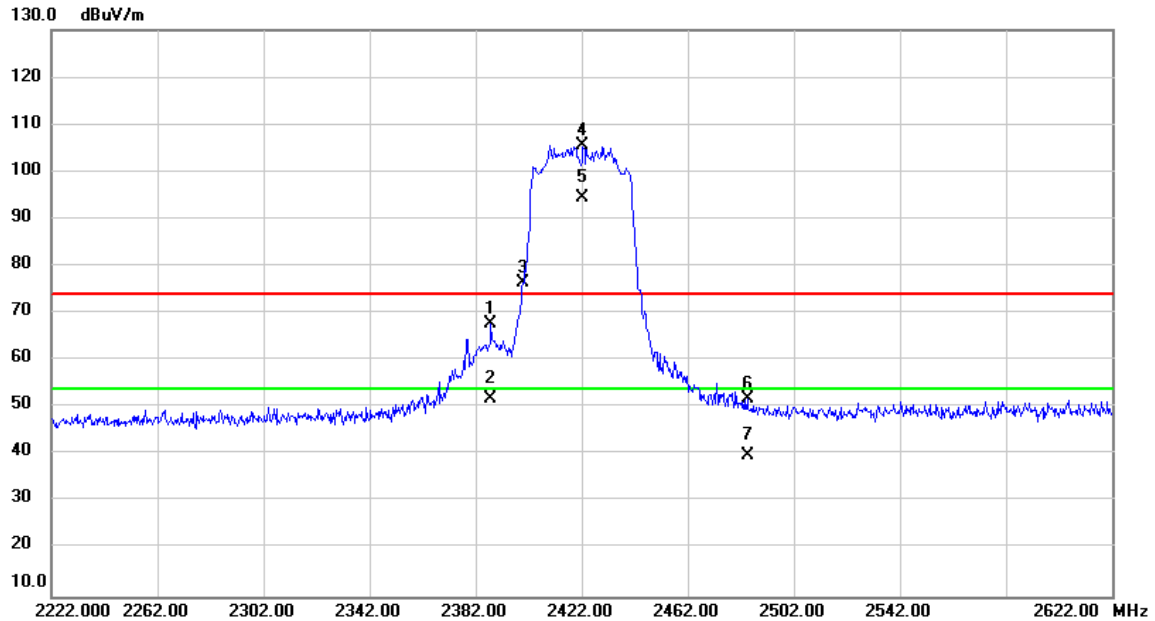


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2387.693	72.36	-4.75	67.61	74.00	-6.39	peak	
2		2387.693	56.51	-4.75	51.76	54.00	-2.24	AVG	
3	X	2400.000	81.17	-4.70	76.47	74.00	2.47	peak	No Limit
4	X	2422.000	110.30	-4.61	105.69	74.00	31.69	peak	No Limit
5	*	2422.000	98.97	-4.61	94.36	54.00	40.36	AVG	No Limit
6		2484.720	56.15	-4.34	51.81	74.00	-22.19	peak	
7		2484.720	44.16	-4.34	39.82	54.00	-14.18	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

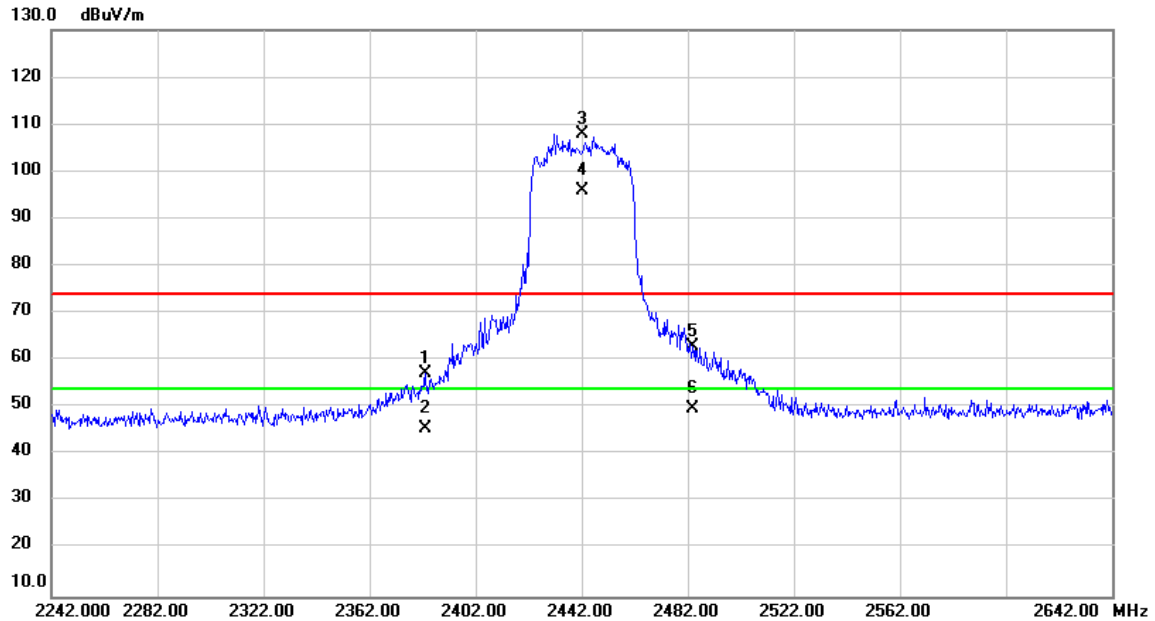


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2383.067	62.01	-4.76	57.25	74.00	-16.75	peak	
2		2383.067	50.42	-4.76	45.66	54.00	-8.34	AVG	
3	X	2442.000	112.50	-4.52	107.98	74.00	33.98	peak	No Limit
4	*	2442.000	100.40	-4.52	95.88	54.00	41.88	AVG	No Limit
5		2484.000	67.18	-4.34	62.84	74.00	-11.16	peak	
6		2484.000	54.11	-4.34	49.77	54.00	-4.23	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

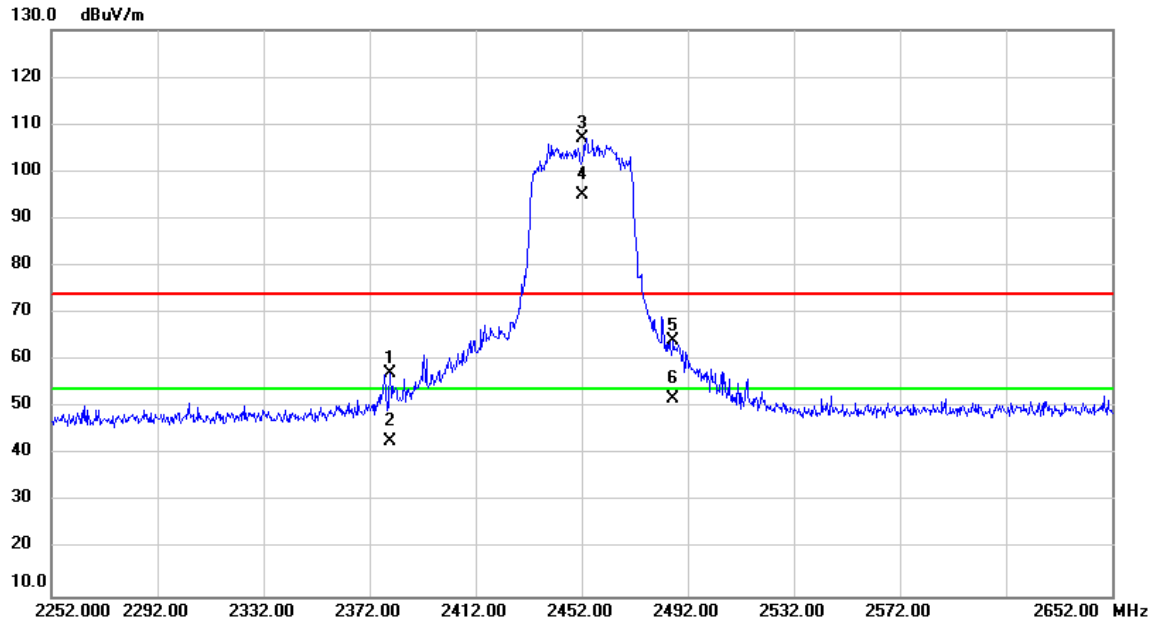


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2379.907	62.04	-4.78	57.26	74.00	-16.74	peak	
2		2379.907	47.53	-4.78	42.75	54.00	-11.25	AVG	
3	X	2452.000	111.57	-4.48	107.09	74.00	33.09	peak	No Limit
4	*	2452.000	99.48	-4.48	95.00	54.00	41.00	AVG	No Limit
5		2486.467	68.43	-4.34	64.09	74.00	-9.91	peak	
6		2486.467	56.04	-4.34	51.70	54.00	-2.30	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

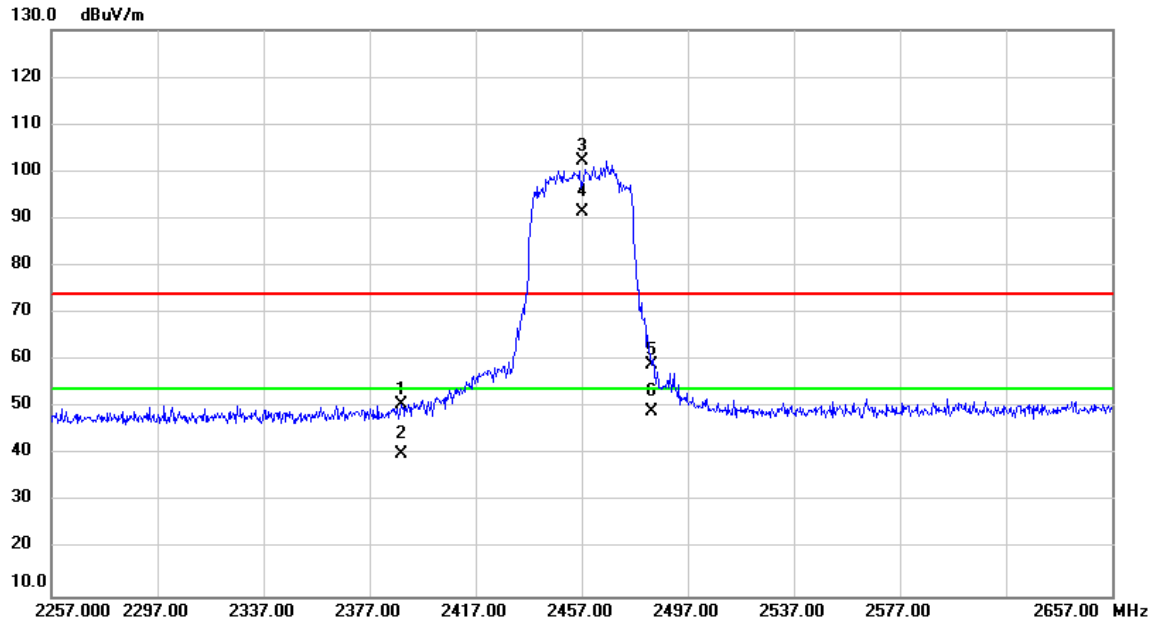


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.133	55.49	-4.74	50.75	74.00	-23.25	peak	
2		2389.133	44.77	-4.74	40.03	54.00	-13.97	AVG	
3	X	2457.000	106.62	-4.46	102.16	74.00	28.16	peak	No Limit
4	*	2457.000	96.03	-4.46	91.57	54.00	37.57	AVG	No Limit
5		2483.500	63.27	-4.35	58.92	74.00	-15.08	peak	
6		2483.500	53.57	-4.35	49.22	54.00	-4.78	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

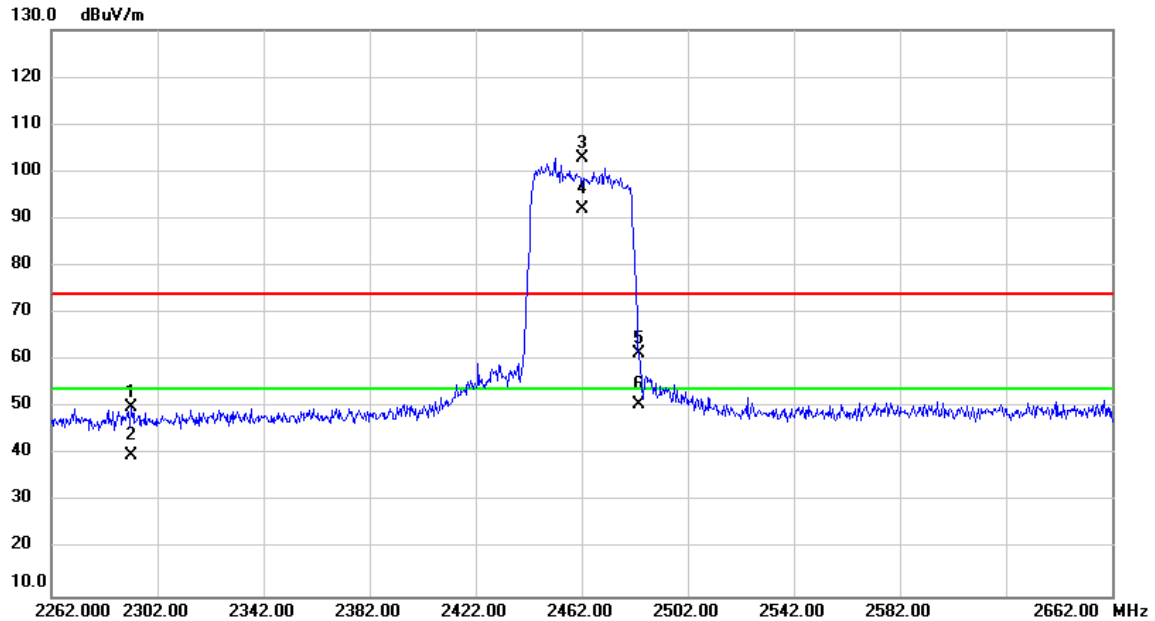


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2292.173	55.13	-5.16	49.97	74.00	-24.03	peak	
2		2292.173	45.02	-5.16	39.86	54.00	-14.14	AVG	
3	X	2462.000	107.27	-4.45	102.82	74.00	28.82	peak	No Limit
4	*	2462.000	96.37	-4.45	91.92	54.00	37.92	AVG	No Limit
5		2483.720	65.74	-4.34	61.40	74.00	-12.60	peak	
6		2483.720	54.88	-4.34	50.54	54.00	-3.46	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

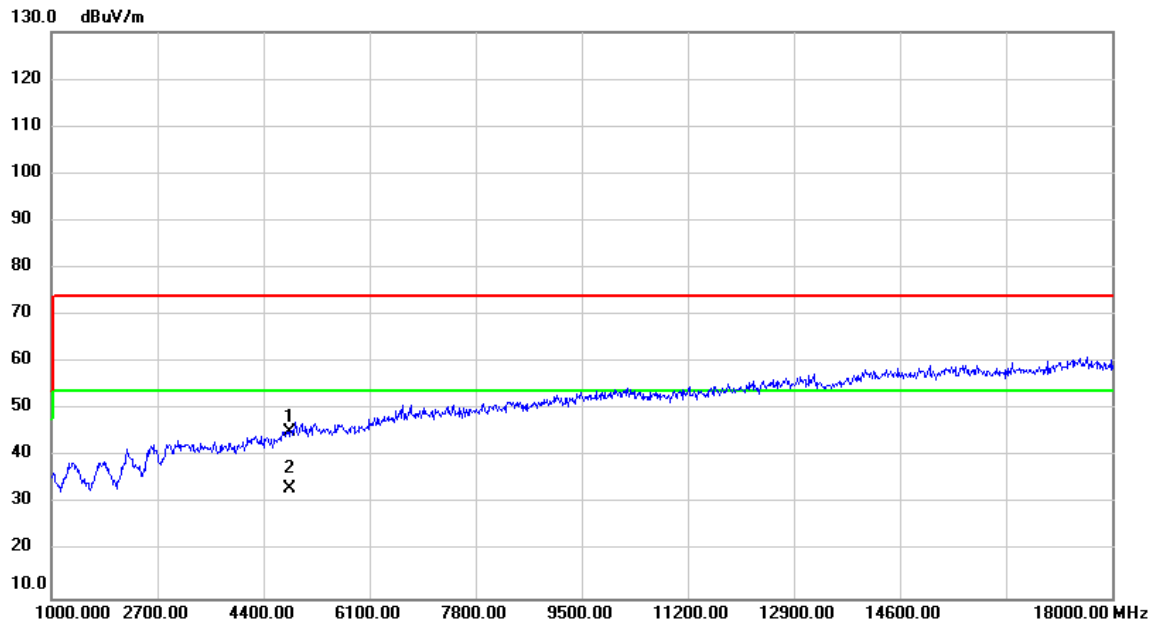


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	43.79	1.43	45.22	74.00	-28.78	peak	
2	*	4824.000	31.91	1.43	33.34	54.00	-20.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

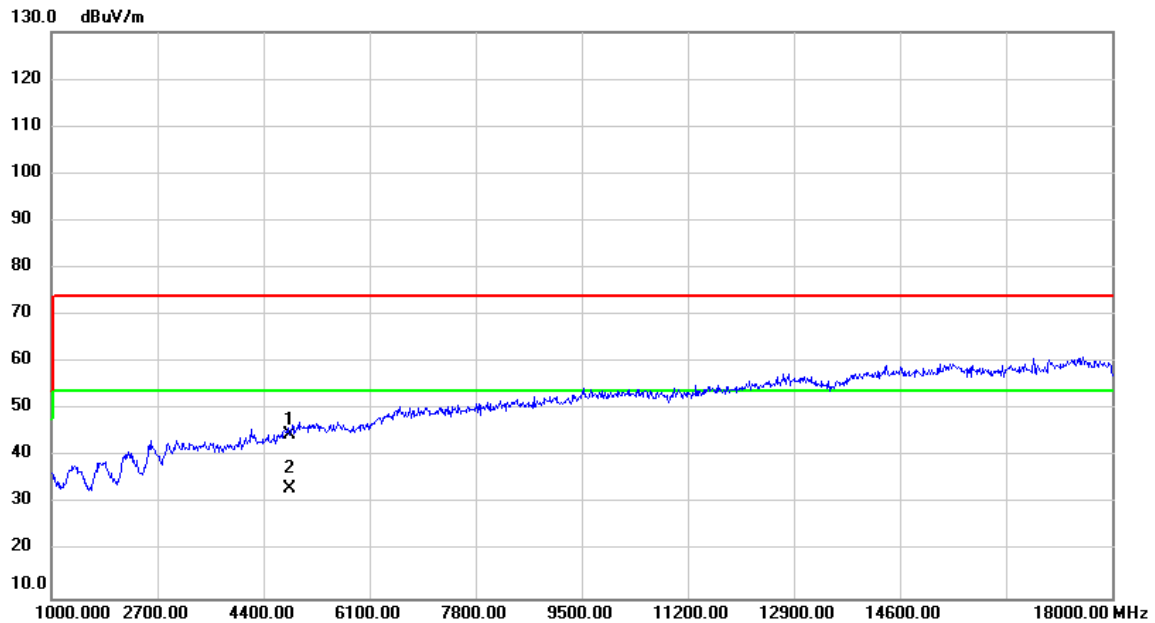


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	43.15	1.43	44.58	74.00	-29.42	peak	
2	*	4824.000	31.92	1.43	33.35	54.00	-20.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	54 %

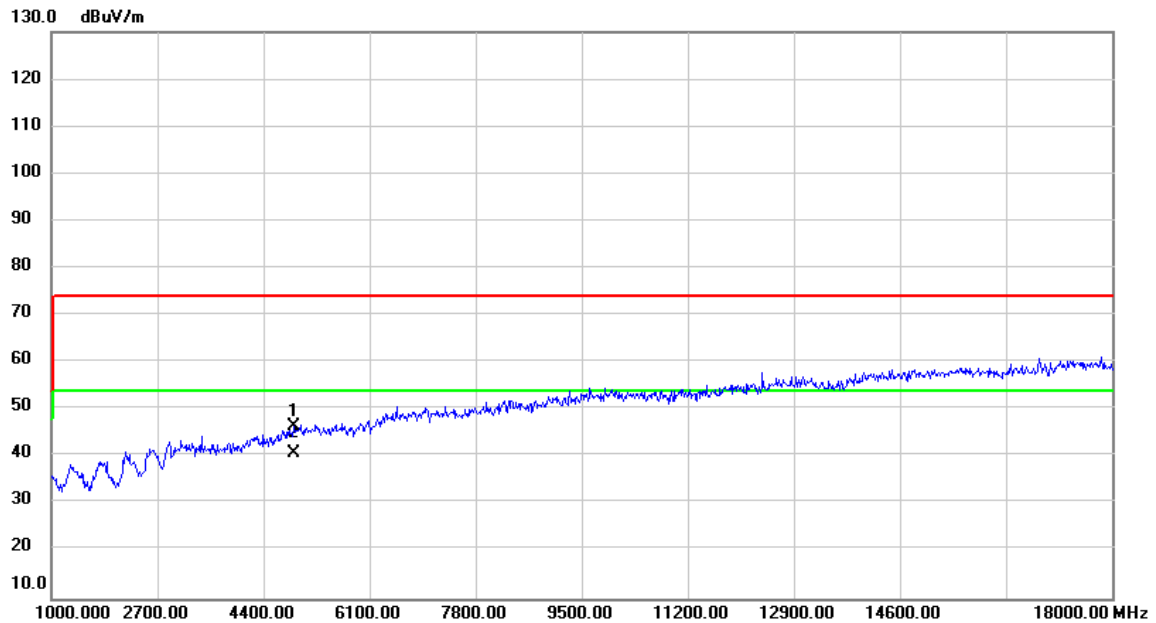


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	44.76	1.71	46.47	74.00	-27.53	peak	
2	*	4884.000	39.01	1.71	40.72	54.00	-13.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/14
Test Frequency	2442MHz	Polarization	Horizontal
Temp	26°C	Hum.	54 %

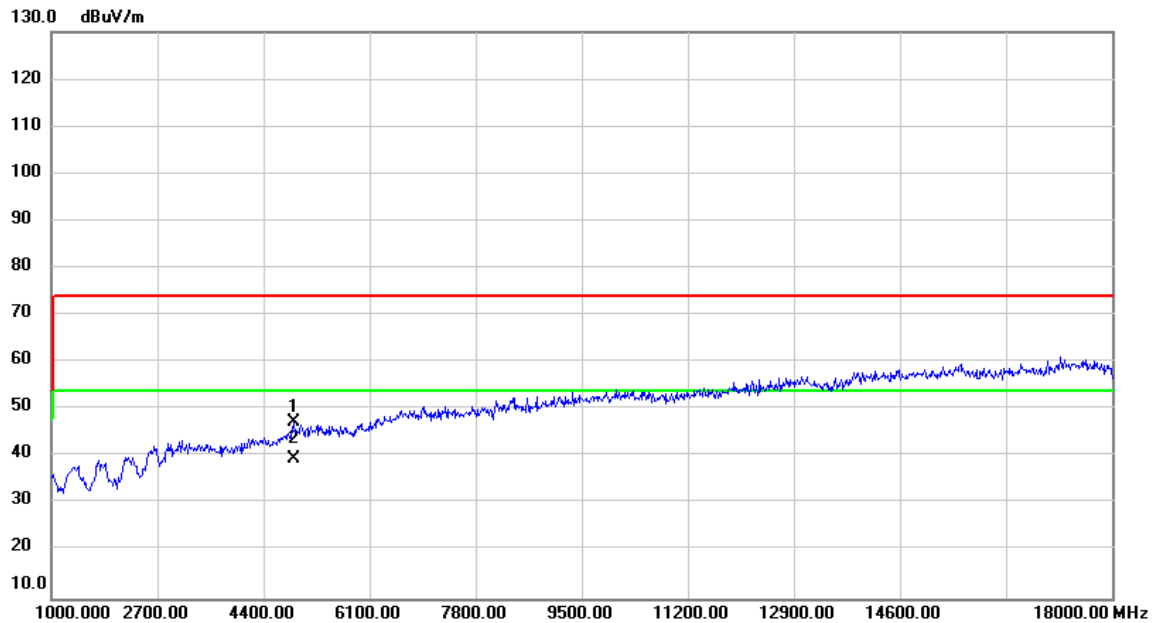


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4884.000	45.79	1.71	47.50	74.00	-26.50	peak	
2	*	4884.000	37.88	1.71	39.59	54.00	-14.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

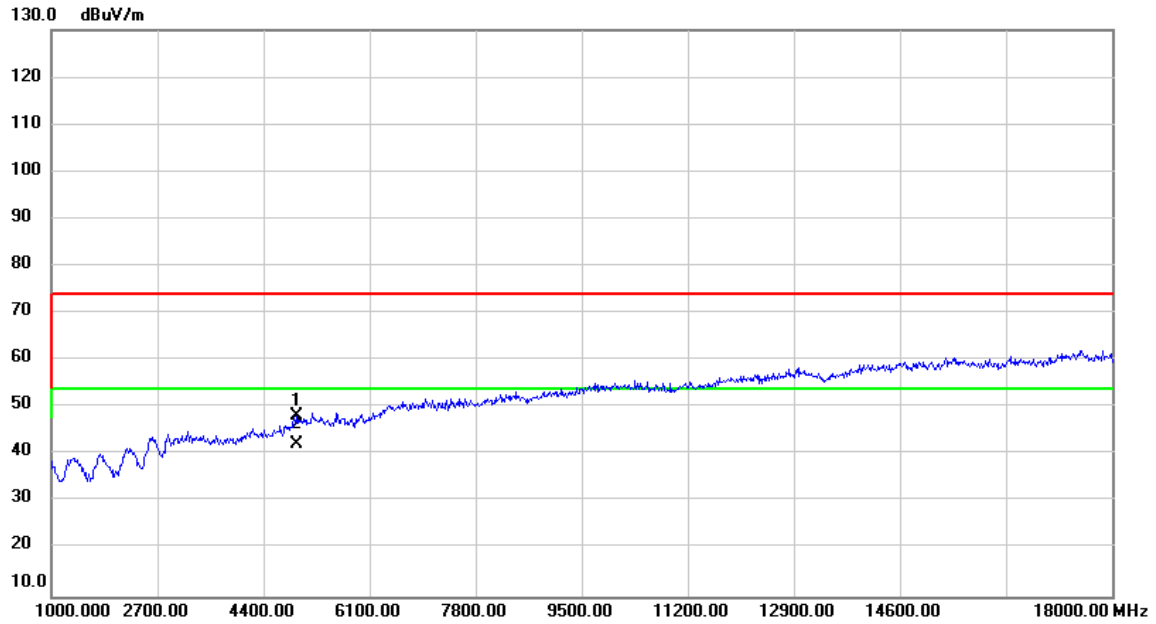


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	46.48	1.89	48.37	74.00	-25.63	peak	
2	*	4924.000	40.26	1.89	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

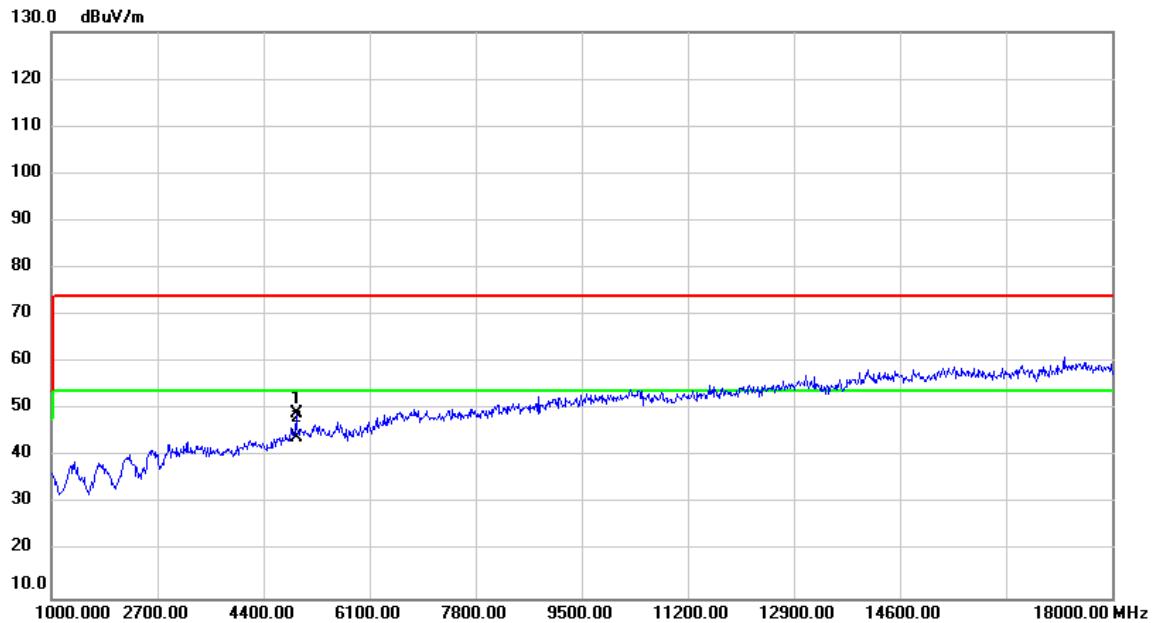


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	47.25	1.89	49.14	74.00	-24.86	peak	
2	*	4924.000	42.13	1.89	44.02	54.00	-9.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

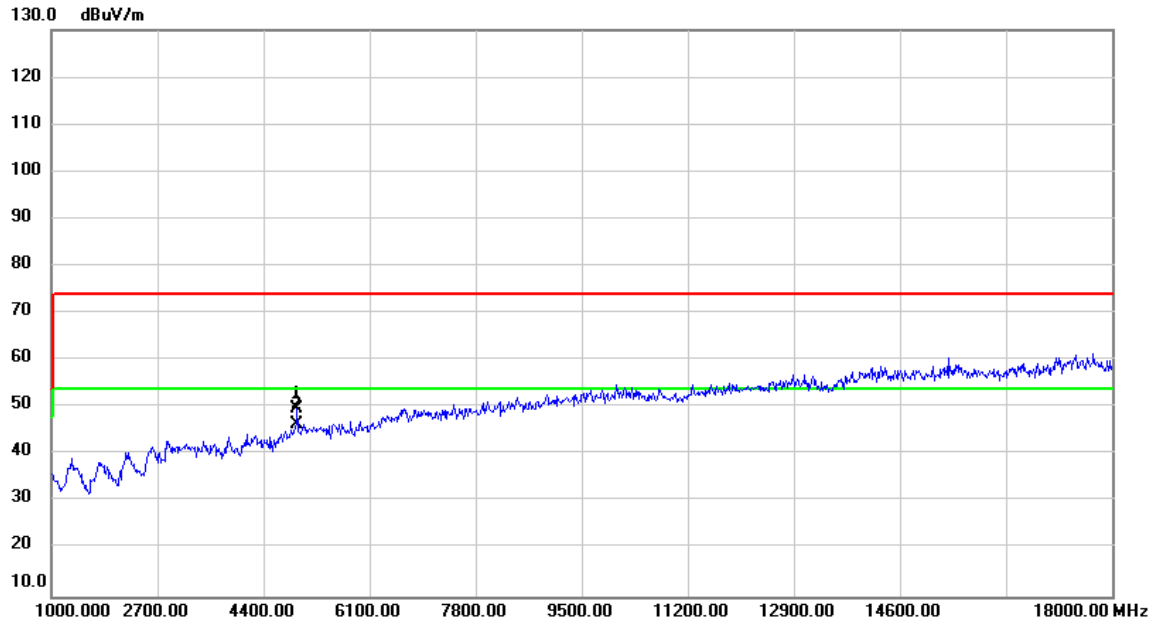


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4934.000	47.93	1.94	49.87	74.00	-24.13	peak	
2	*	4934.000	44.40	1.94	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

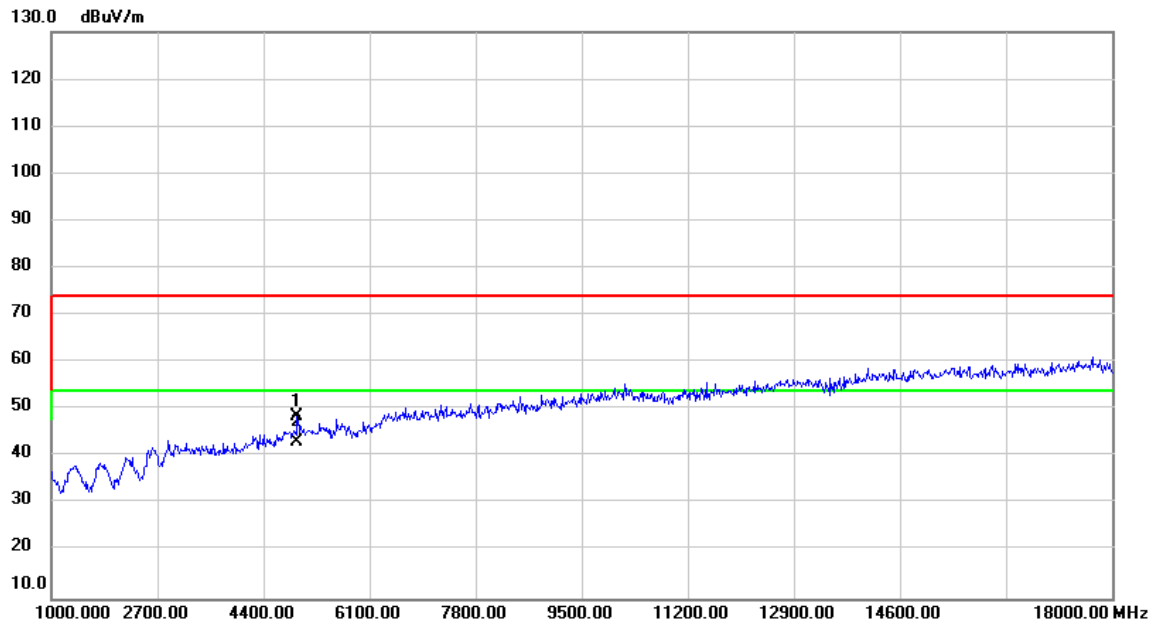


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4934.000	46.73	1.94	48.67	74.00	-25.33	peak	
2	*	4934.000	41.35	1.94	43.29	54.00	-10.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

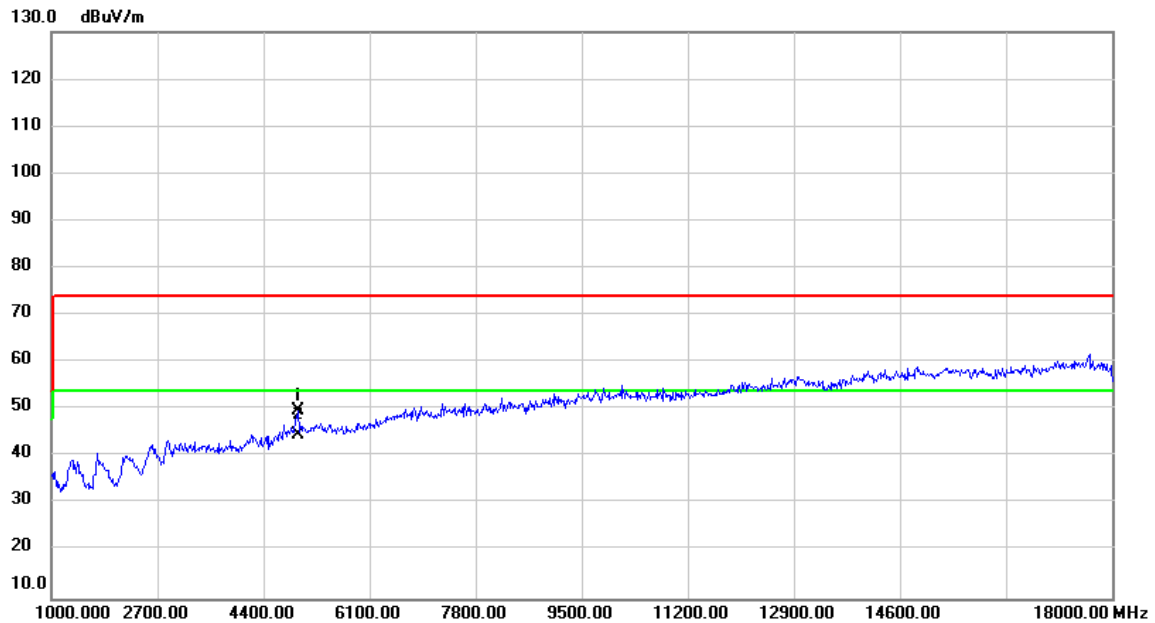


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4944.000	47.80	1.98	49.78	74.00	-24.22	peak	
2	*	4944.000	42.57	1.98	44.55	54.00	-9.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

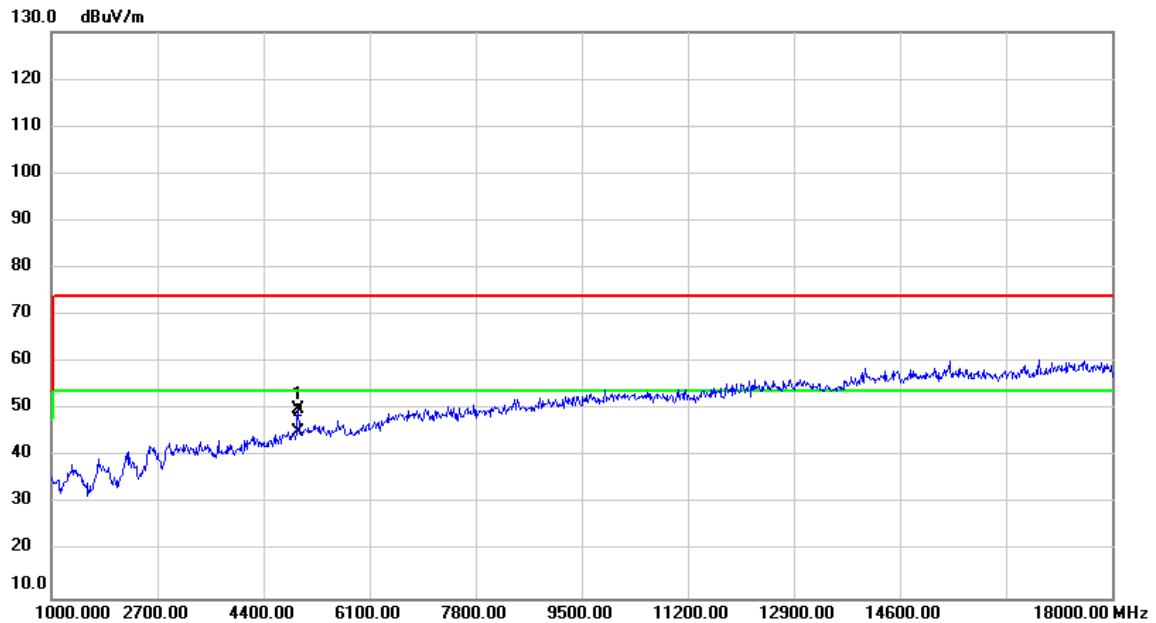


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4944.000	48.01	1.98	49.99	74.00	-24.01	peak	
2	*	4944.000	43.17	1.98	45.15	54.00	-8.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

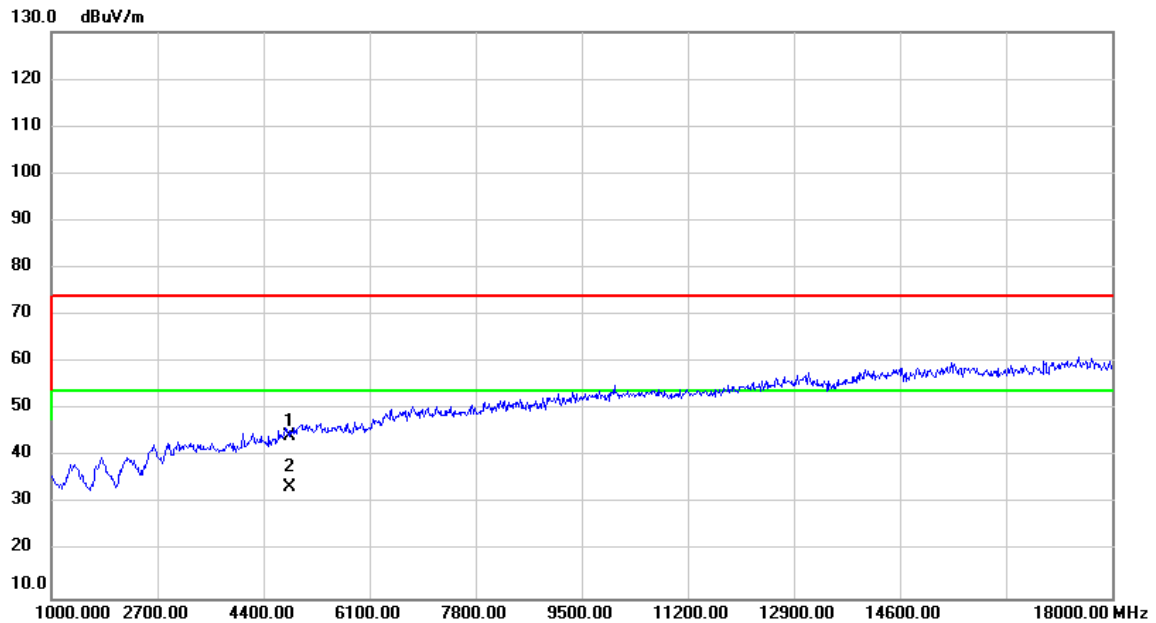


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	42.84	1.43	44.27	74.00	-29.73	peak	
2	*	4824.000	32.00	1.43	33.43	54.00	-20.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2412MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

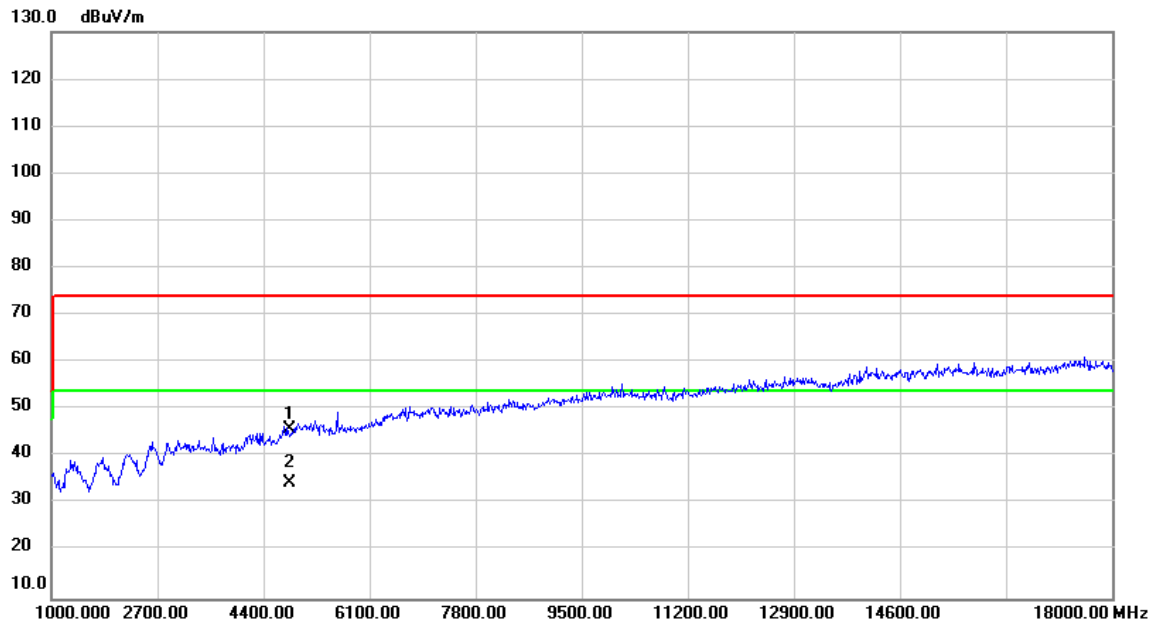


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	44.50	1.43	45.93	74.00	-28.07	peak	
2	*	4824.000	32.93	1.43	34.36	54.00	-19.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2442MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

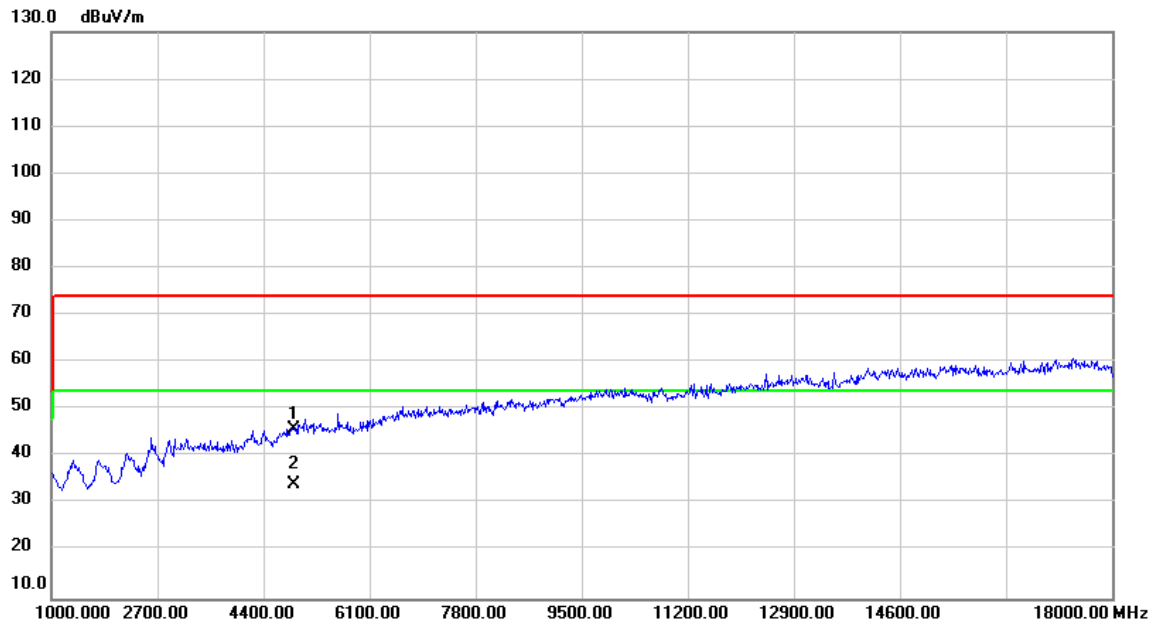


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4884.000	44.07	1.71	45.78	74.00	-28.22	peak	
2	*	4884.000	32.40	1.71	34.11	54.00	-19.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2442MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

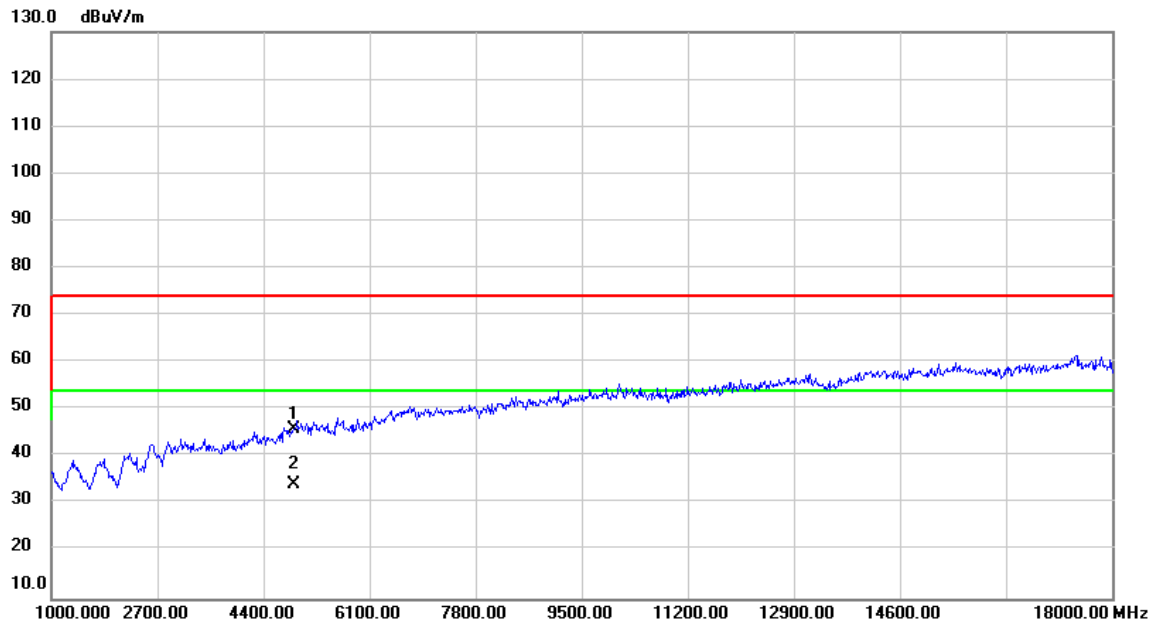


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	44.10	1.71	45.81	74.00	-28.19	peak	
2	*	4884.000	32.53	1.71	34.24	54.00	-19.76	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

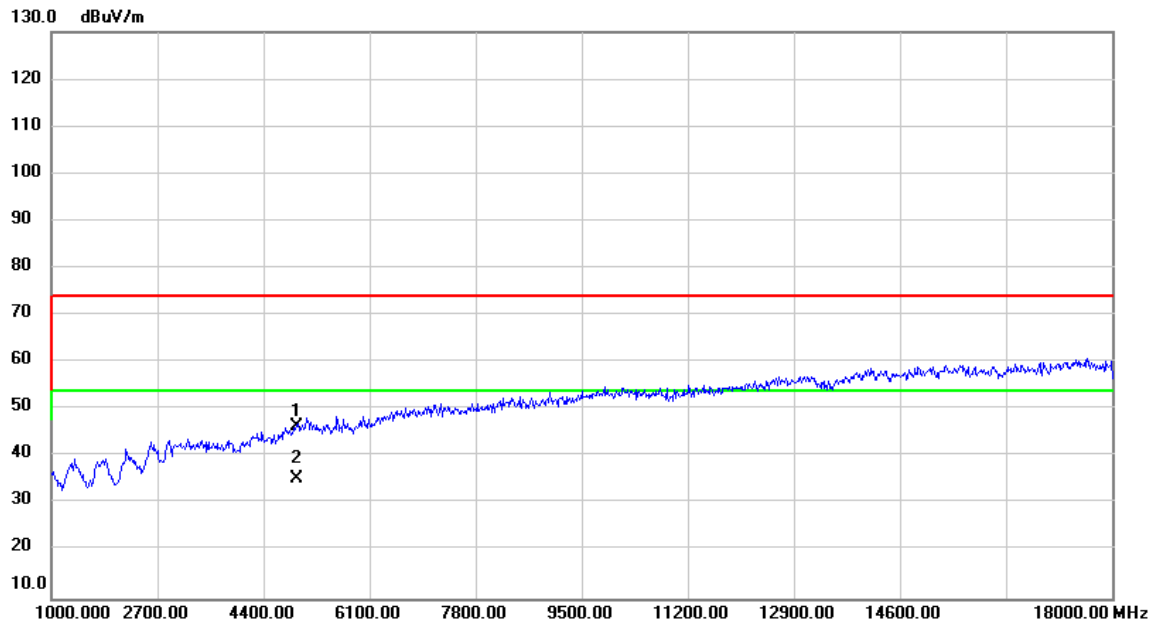


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	44.42	1.89	46.31	74.00	-27.69	peak	
2	*	4924.000	33.31	1.89	35.20	54.00	-18.80	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

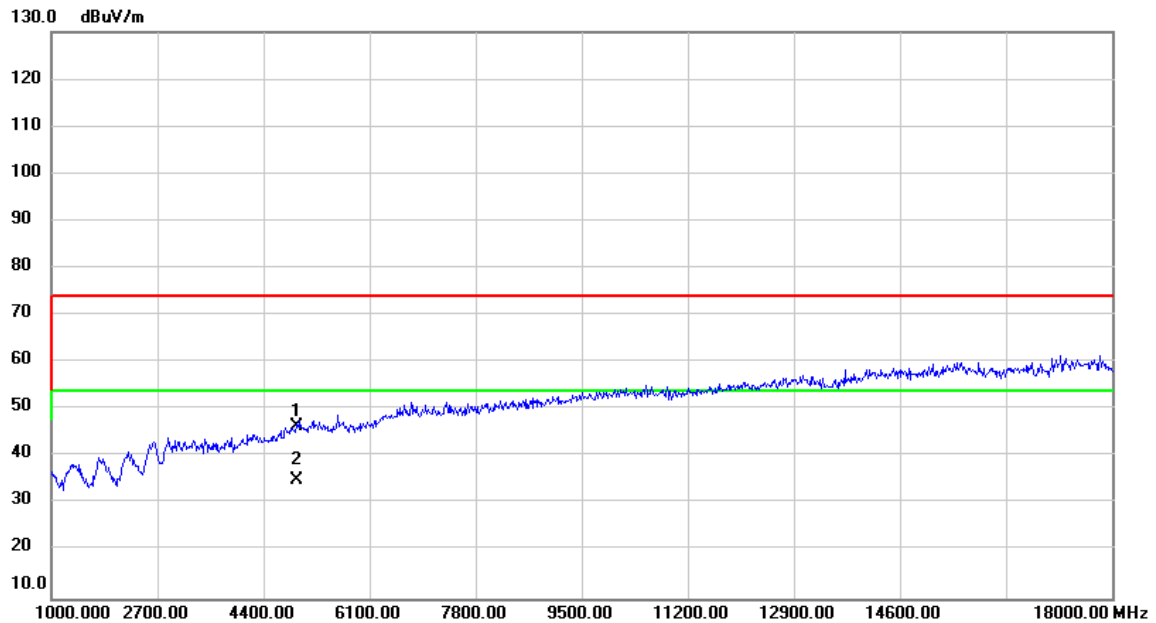


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	44.44	1.89	46.33	74.00	-27.67	peak	
2	*	4924.000	33.02	1.89	34.91	54.00	-19.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

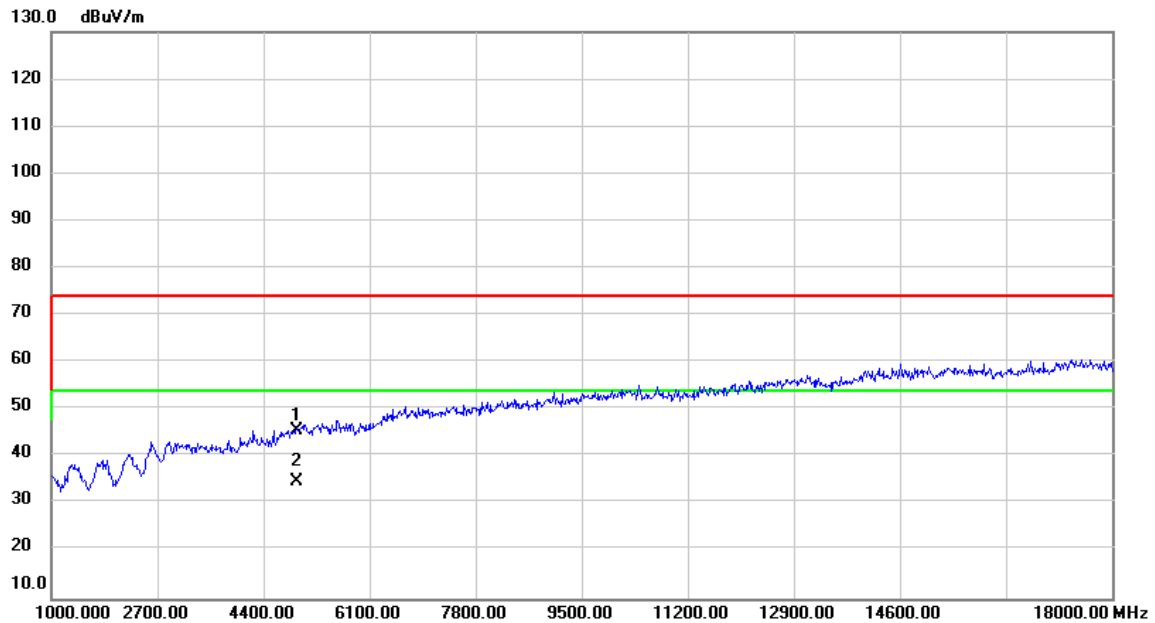


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4934.000	43.57	1.94	45.51	74.00	-28.49	peak	
2	*	4934.000	32.94	1.94	34.88	54.00	-19.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

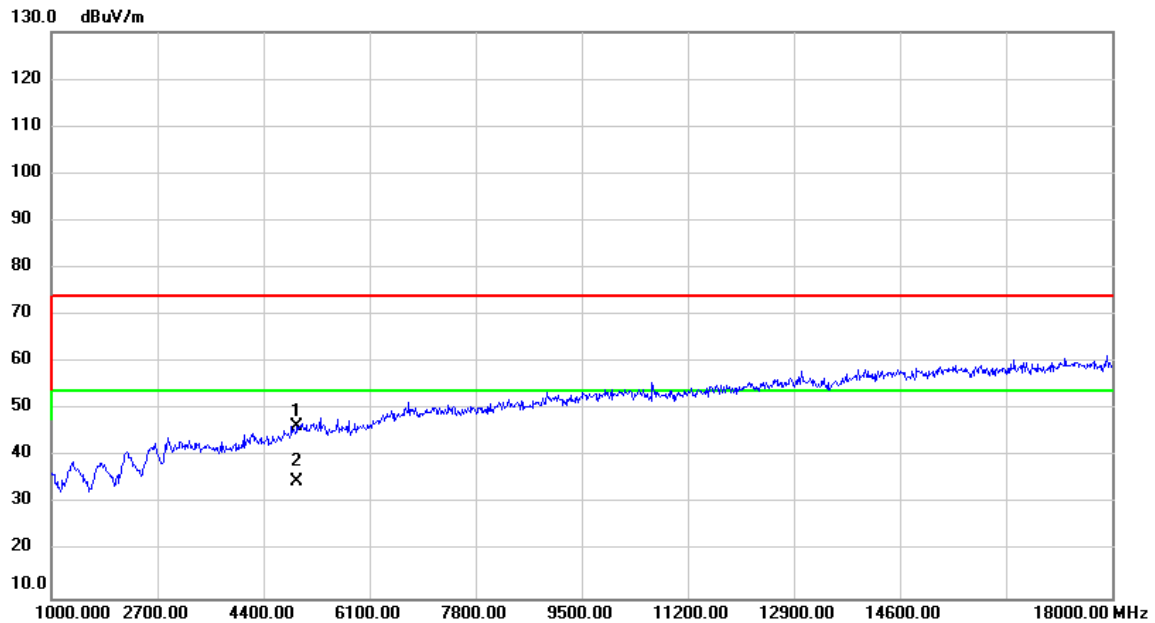


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4934.000	44.52	1.94	46.46	74.00	-27.54	peak	
2	*	4934.000	32.93	1.94	34.87	54.00	-19.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

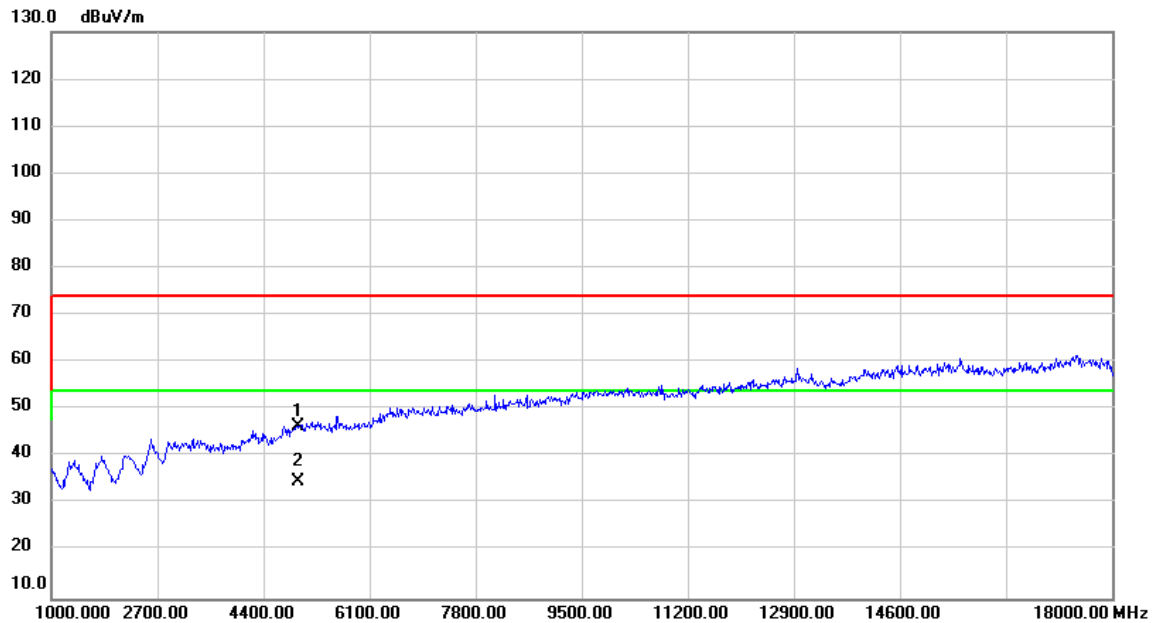


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4944.000	44.49	1.98	46.47	74.00	-27.53	peak	
2	*	4944.000	32.64	1.98	34.62	54.00	-19.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

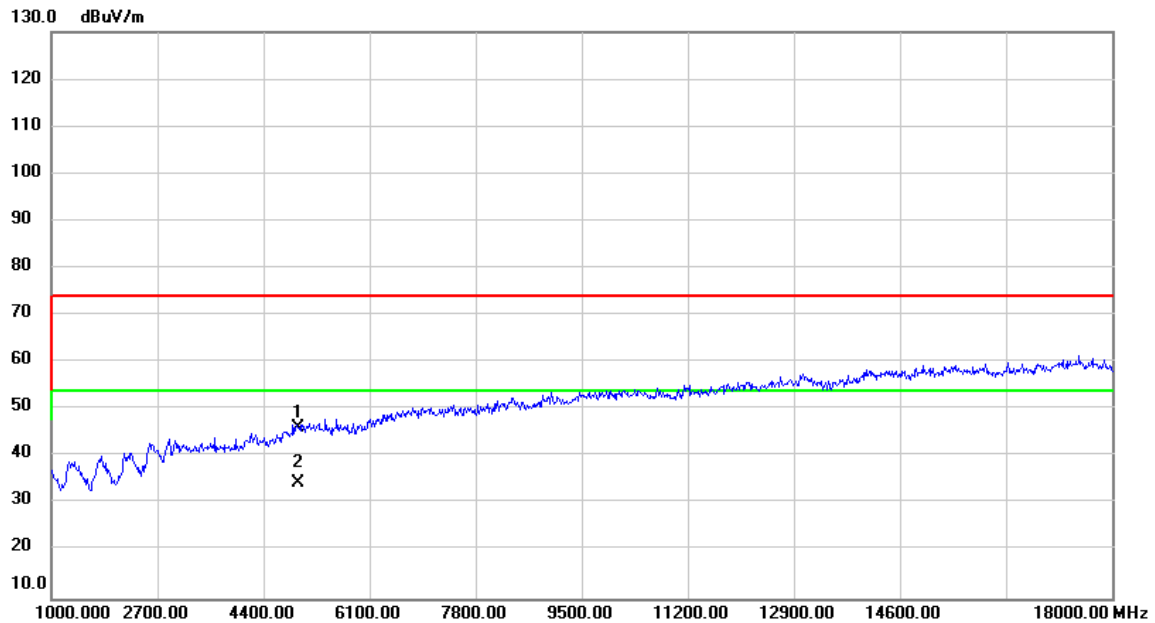


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4944.000	44.22	1.98	46.20	74.00	-27.80	peak	
2	*	4944.000	32.54	1.98	34.52	54.00	-19.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

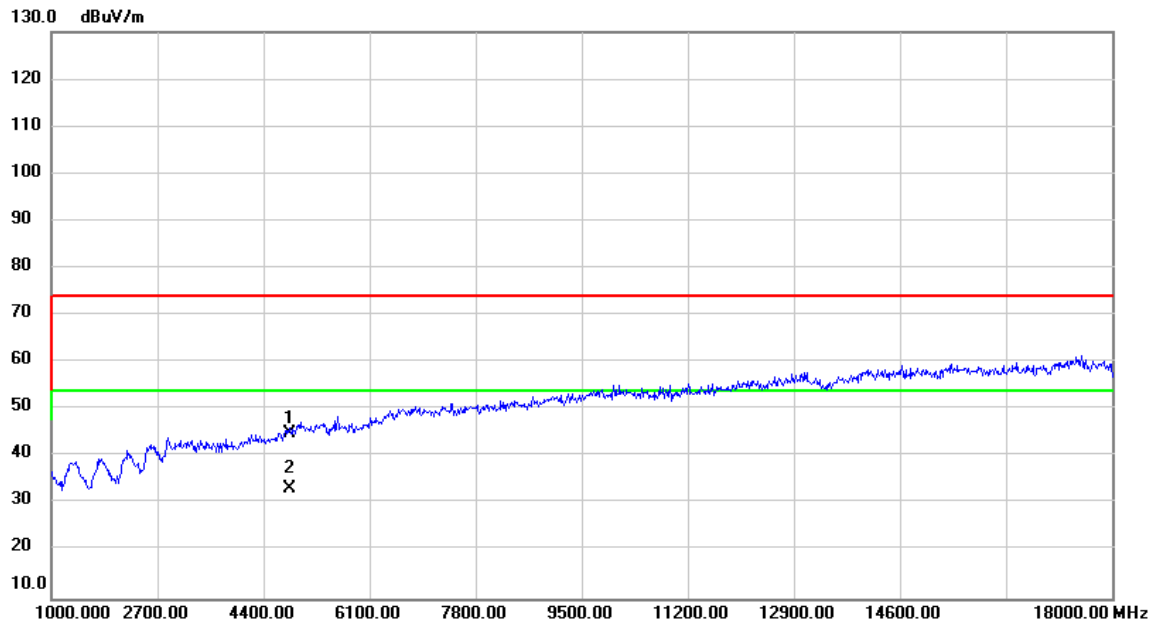


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	43.43	1.43	44.86	74.00	-29.14	peak	
2	*	4824.000	31.89	1.43	33.32	54.00	-20.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

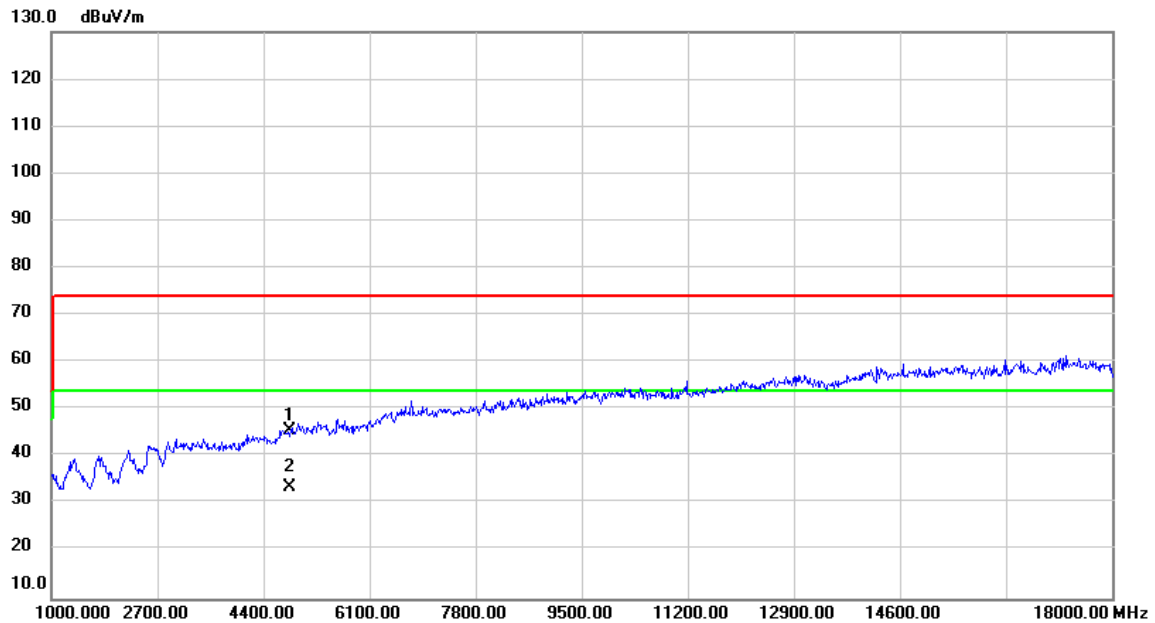


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	44.09	1.43	45.52	74.00	-28.48	peak	
2	*	4824.000	32.11	1.43	33.54	54.00	-20.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

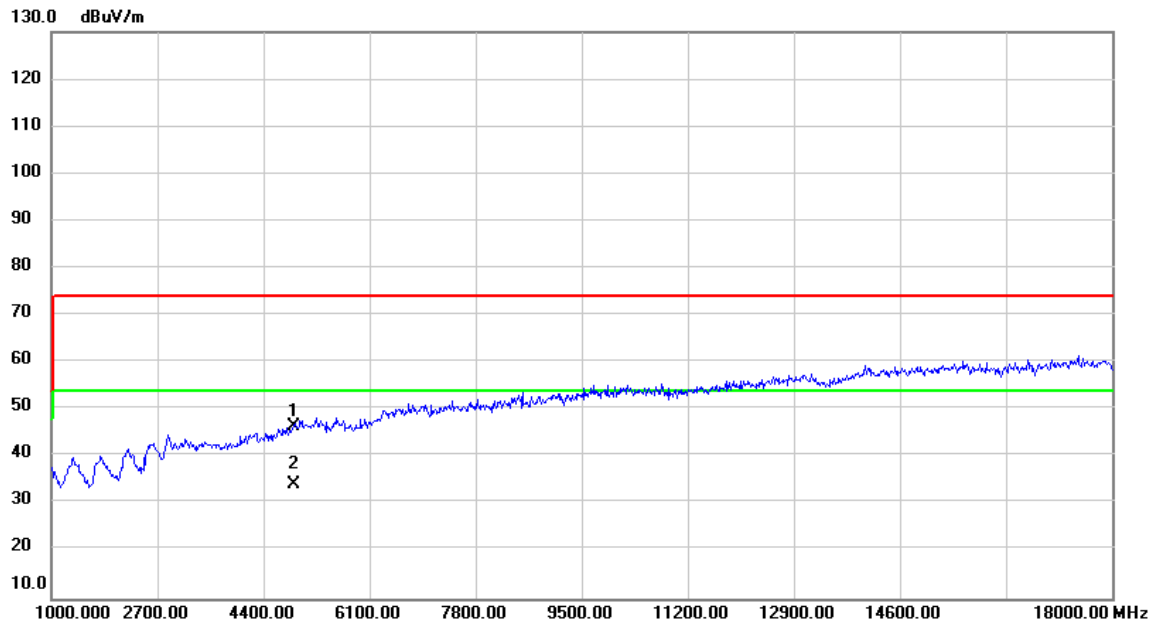


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	44.67	1.71	46.38	74.00	-27.62	peak	
2	*	4884.000	32.31	1.71	34.02	54.00	-19.98	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

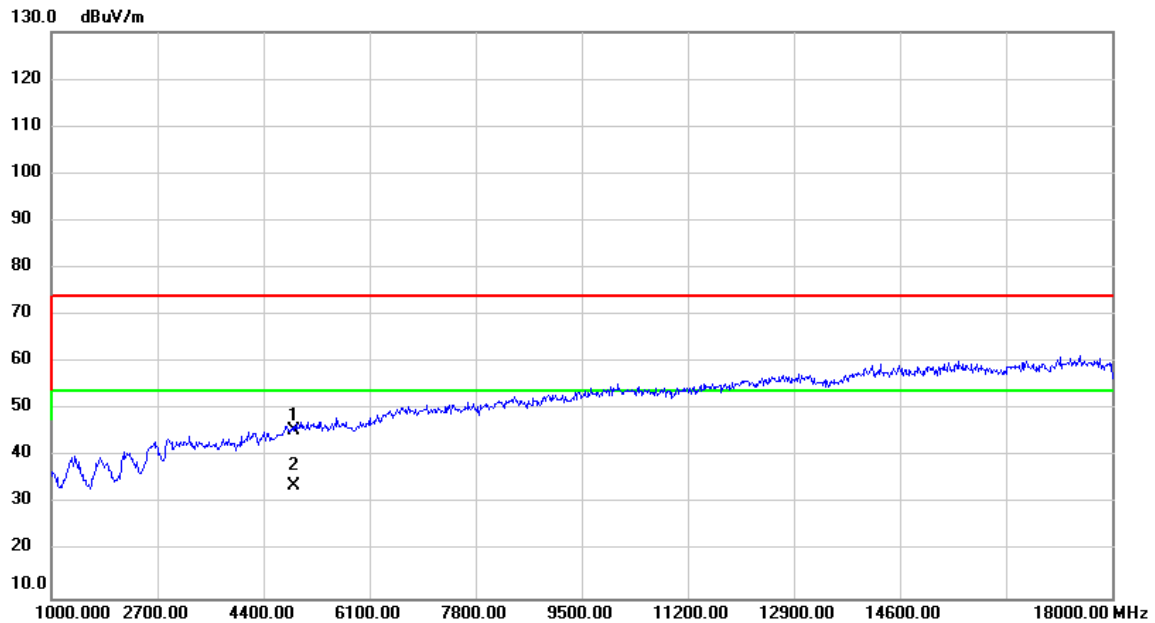


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	43.94	1.71	45.65	74.00	-28.35	peak	
2	*	4884.000	32.29	1.71	34.00	54.00	-20.00	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

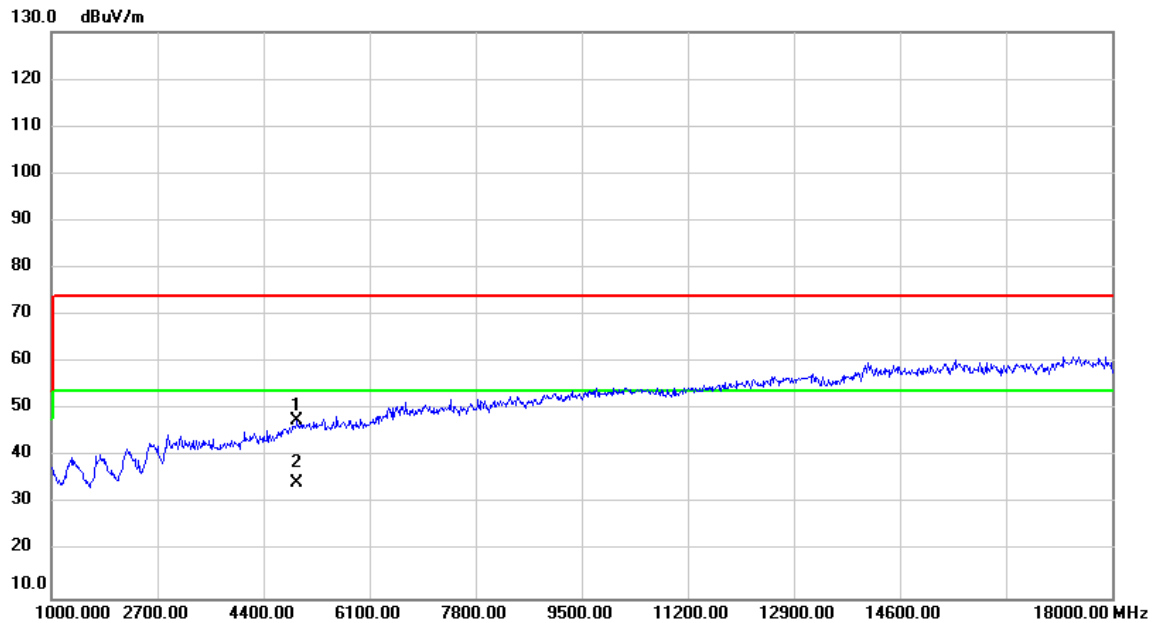


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	45.67	1.89	47.56	74.00	-26.44	peak	
2	*	4924.000	32.56	1.89	34.45	54.00	-19.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

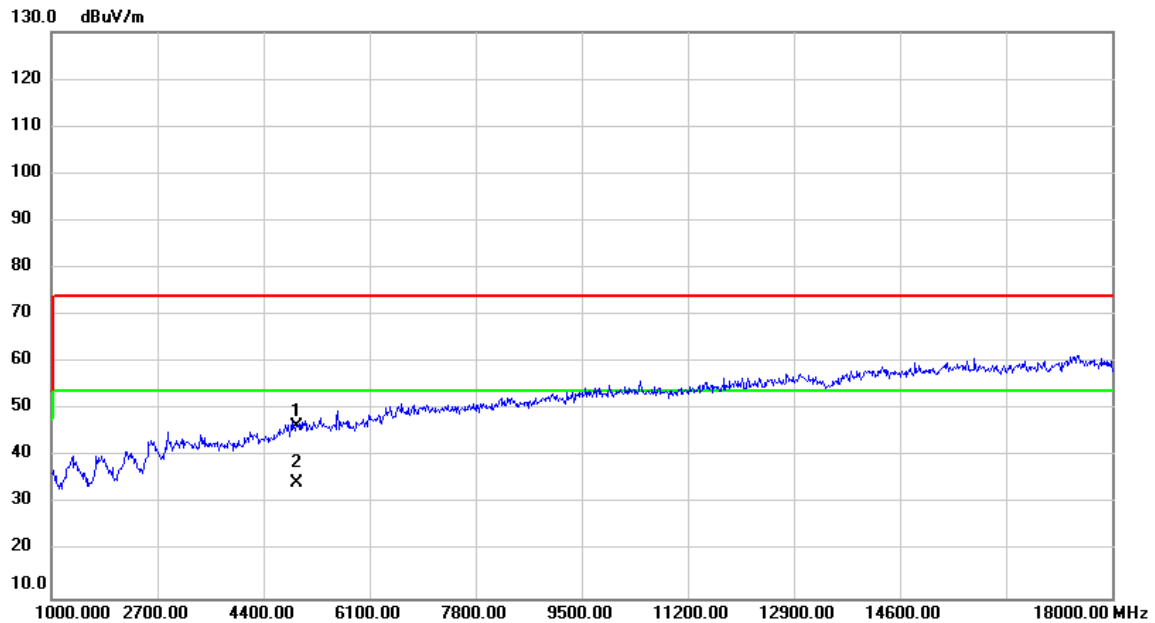


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	44.66	1.89	46.55	74.00	-27.45	peak	
2	*	4924.000	32.58	1.89	34.47	54.00	-19.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

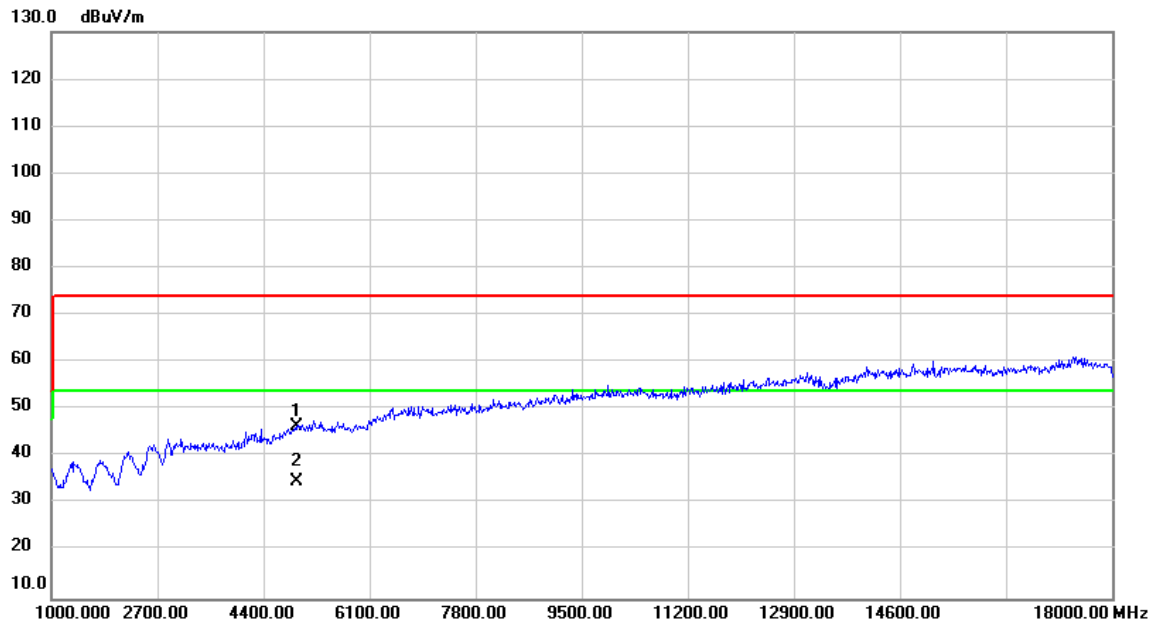


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4934.000	44.60	1.94	46.54	74.00	-27.46	peak	
2	*	4934.000	32.94	1.94	34.88	54.00	-19.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

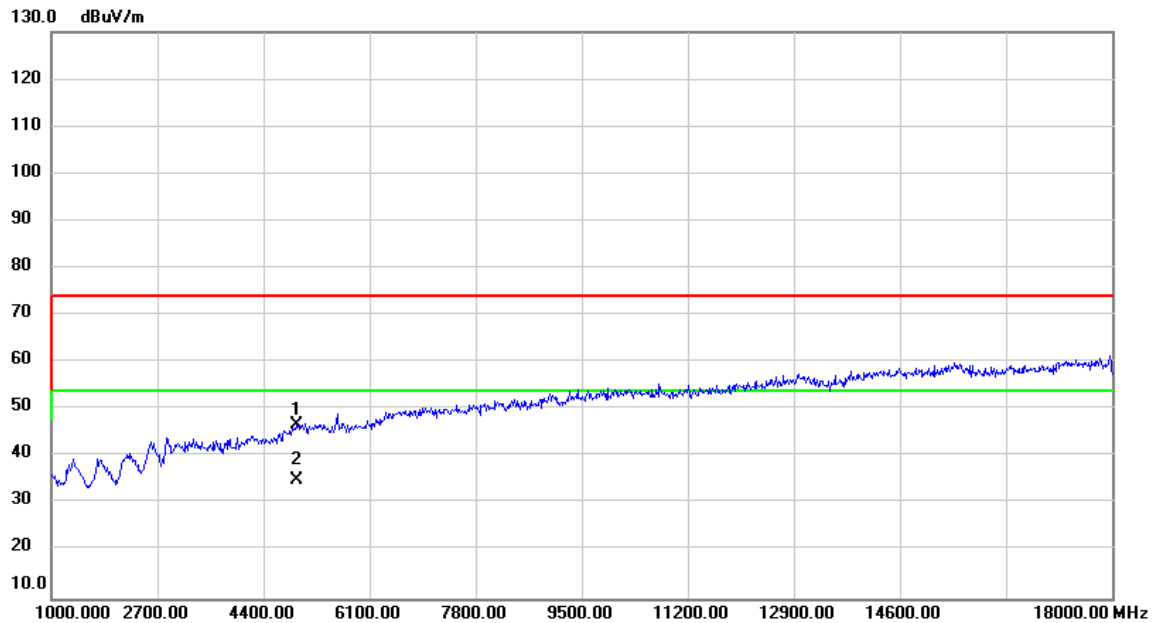


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4934.000	44.78	1.94	46.72	74.00	-27.28	peak	
2	*	4934.000	33.02	1.94	34.96	54.00	-19.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

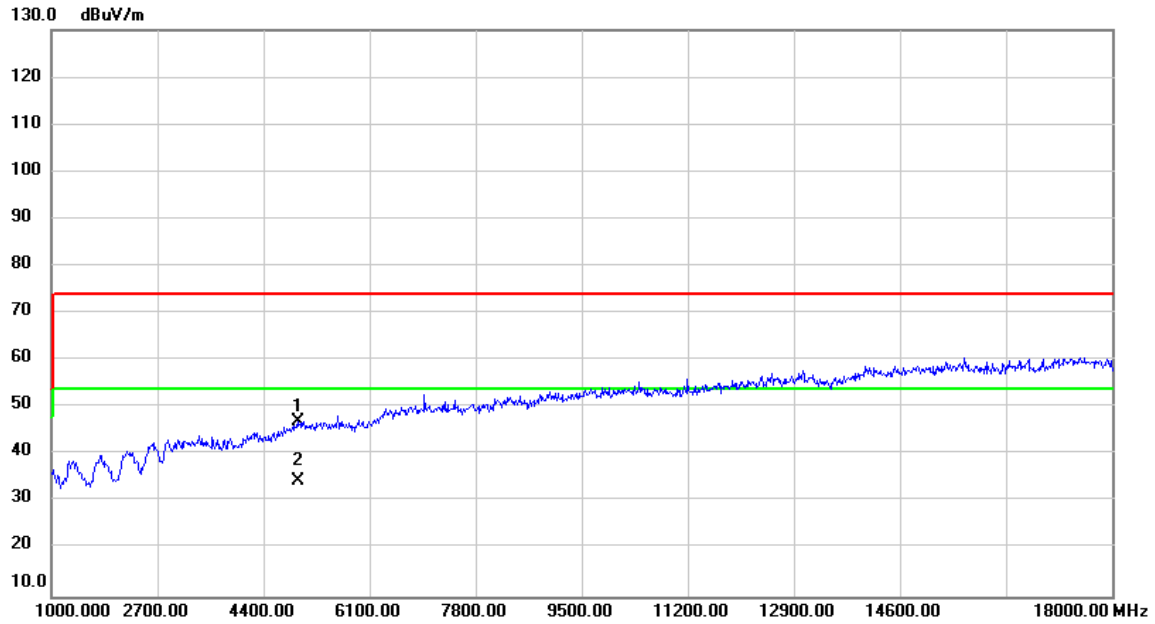


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4944.000	45.13	1.98	47.11	74.00	-26.89	peak	
2	*	4944.000	32.51	1.98	34.49	54.00	-19.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

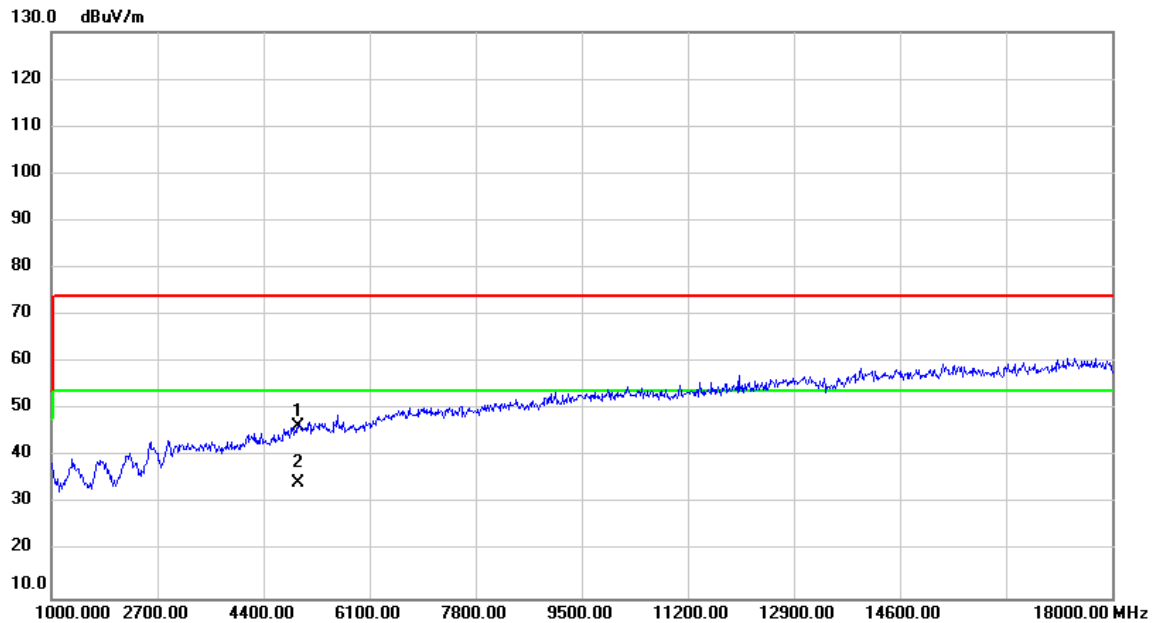


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4944.000	44.39	1.98	46.37	74.00	-27.63	peak	
2	*	4944.000	32.51	1.98	34.49	54.00	-19.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

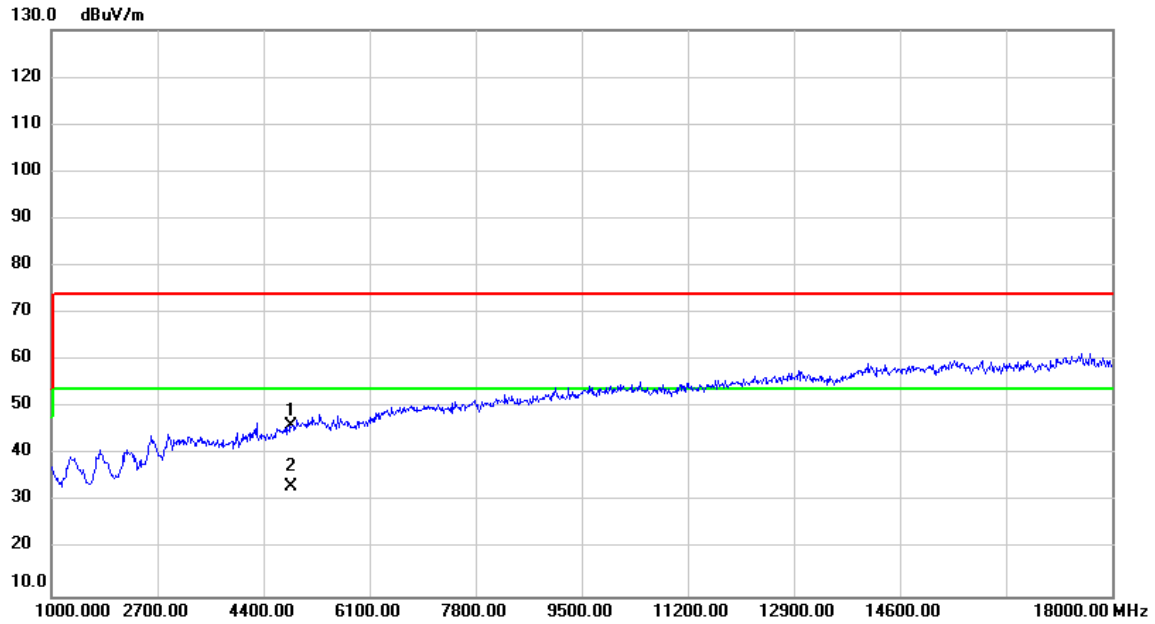


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4844.000	44.60	1.52	46.12	74.00	-27.88	peak	
2	*	4844.000	31.70	1.52	33.22	54.00	-20.78	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

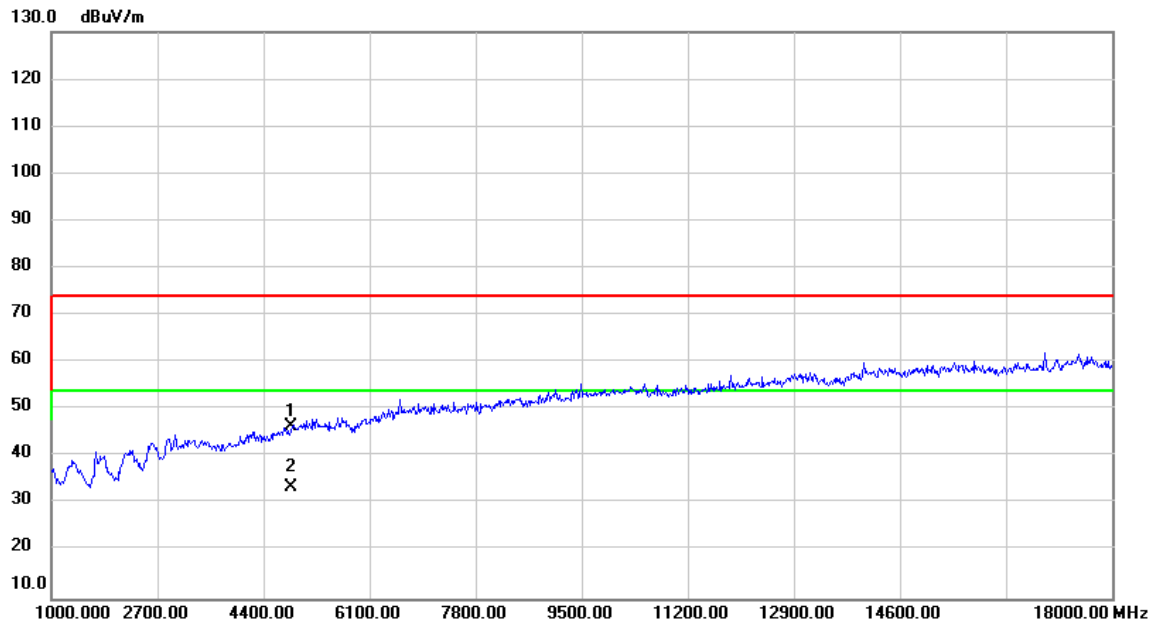


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4844.000	45.06	1.52	46.58	74.00	-27.42	peak	
2	*	4844.000	31.97	1.52	33.49	54.00	-20.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

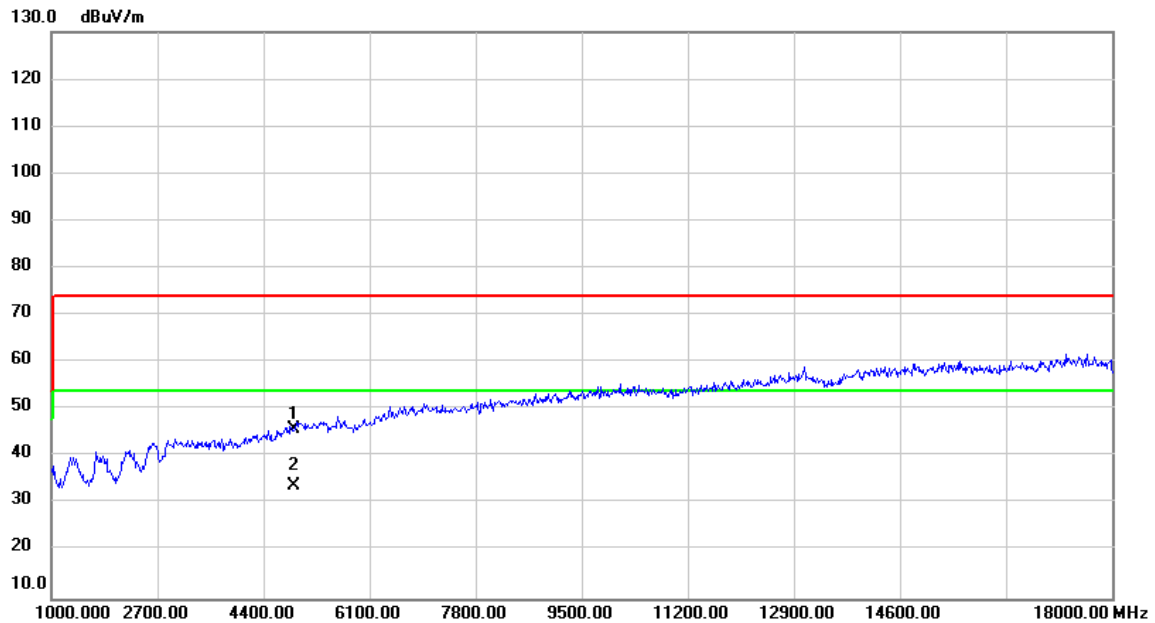


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	44.24	1.71	45.95	74.00	-28.05	peak	
2	*	4884.000	32.09	1.71	33.80	54.00	-20.20	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

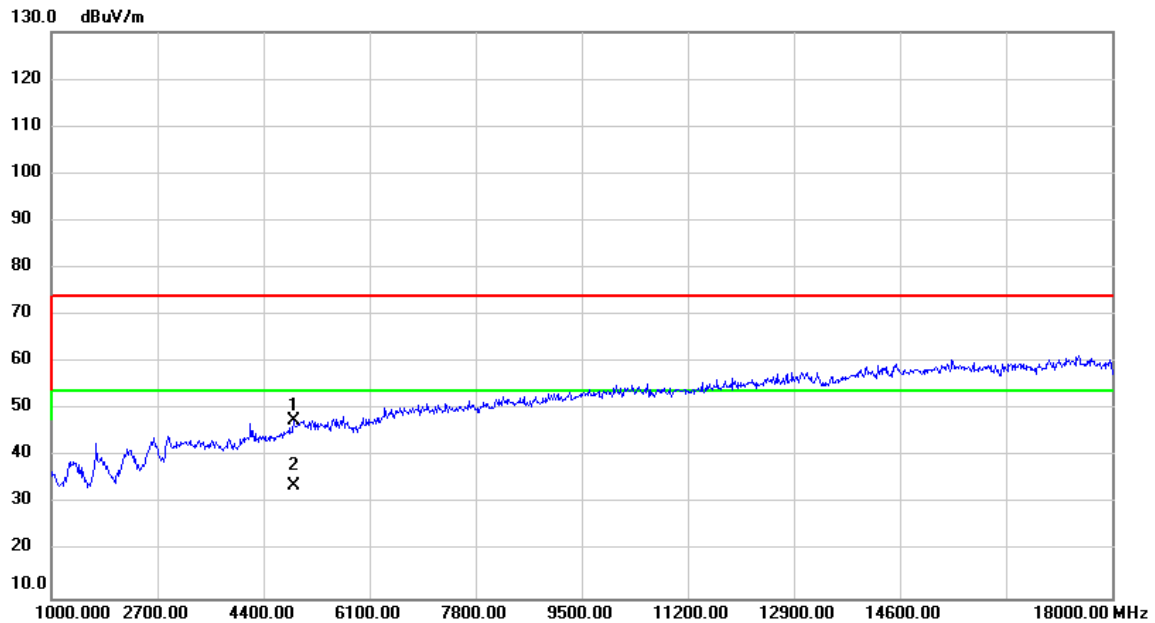


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	46.03	1.71	47.74	74.00	-26.26	peak	
2	*	4884.000	32.23	1.71	33.94	54.00	-20.06	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

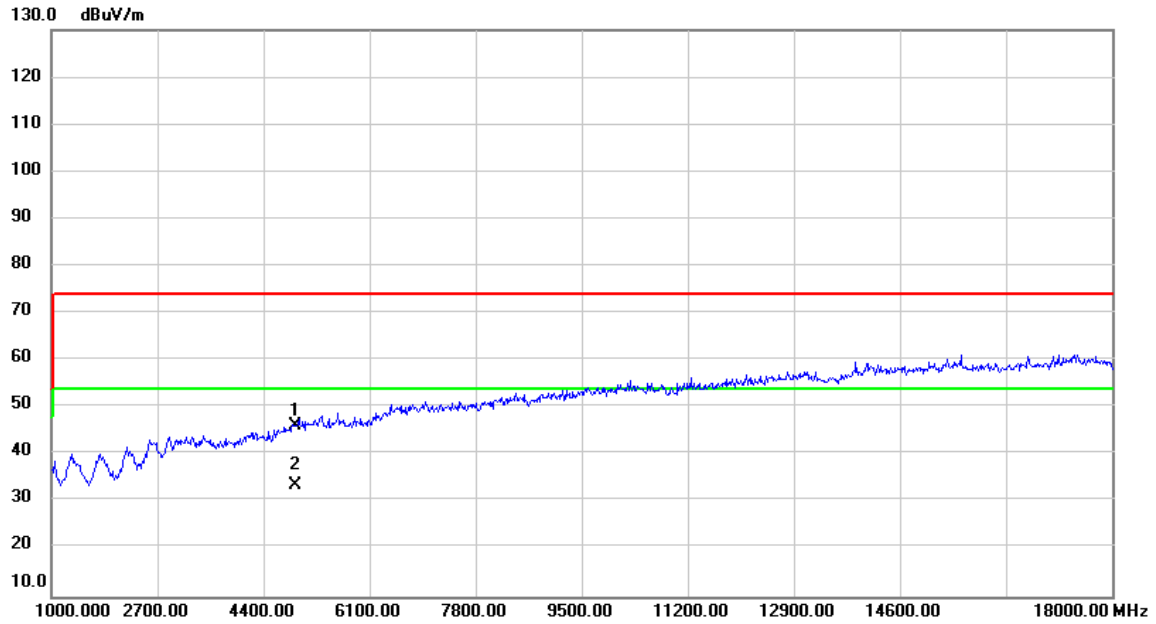


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4904.000	44.21	1.80	46.01	74.00	-27.99	peak	
2	*	4904.000	31.83	1.80	33.63	54.00	-20.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

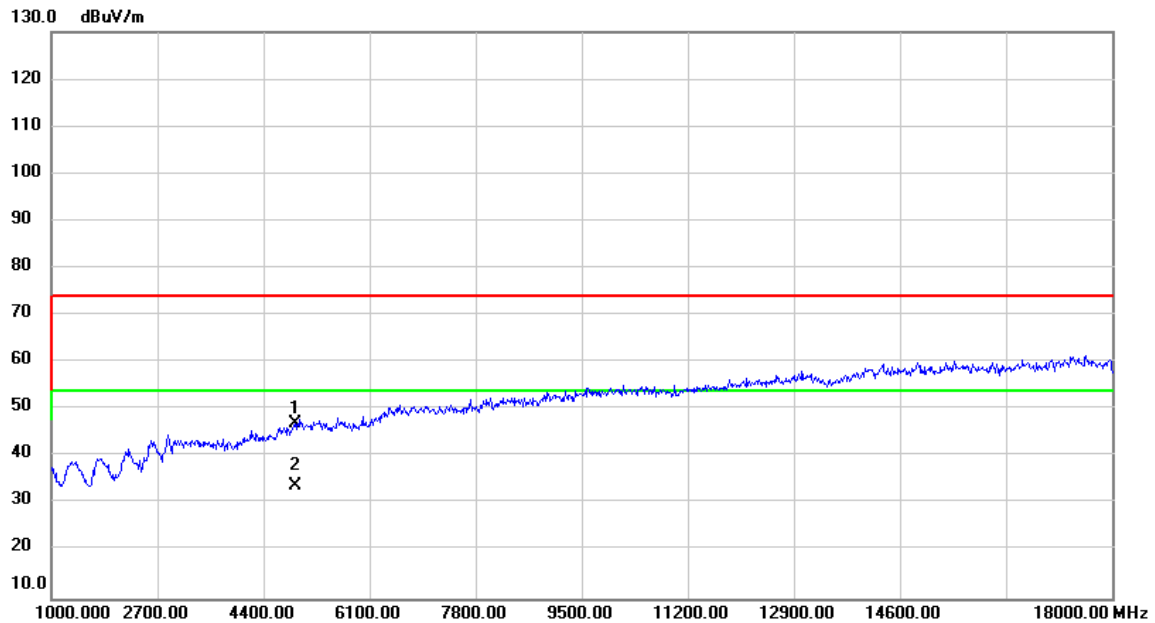


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4904.000	45.22	1.80	47.02	74.00	-26.98	peak	
2	*	4904.000	31.94	1.80	33.74	54.00	-20.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

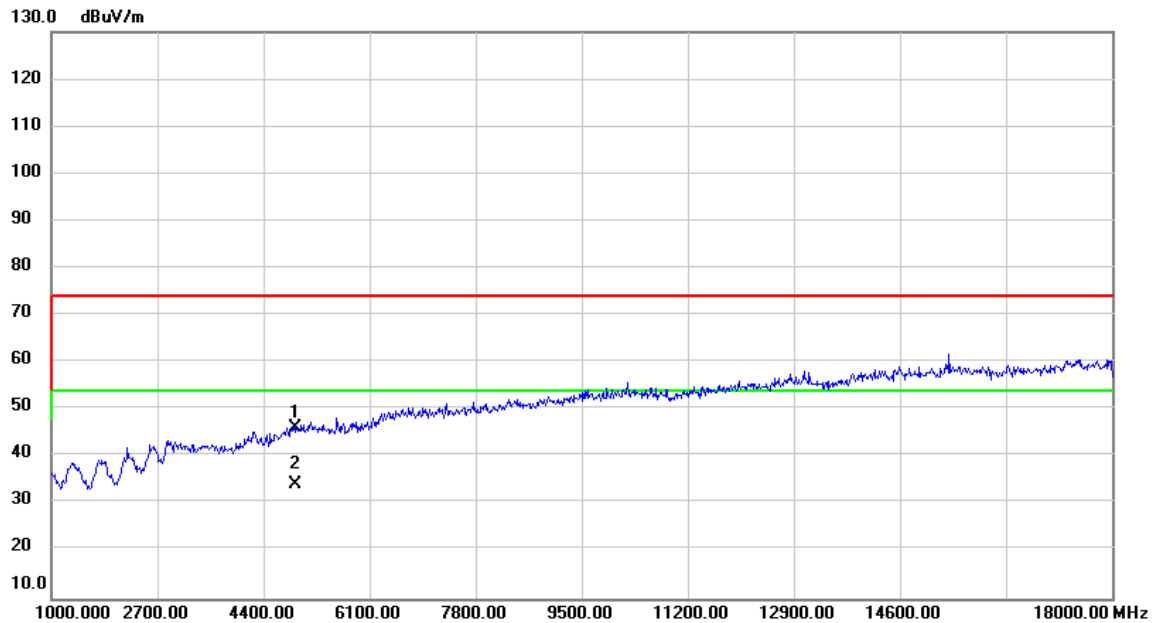


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4914.000	44.36	1.85	46.21	74.00	-27.79	peak	
2	*	4914.000	32.36	1.85	34.21	54.00	-19.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

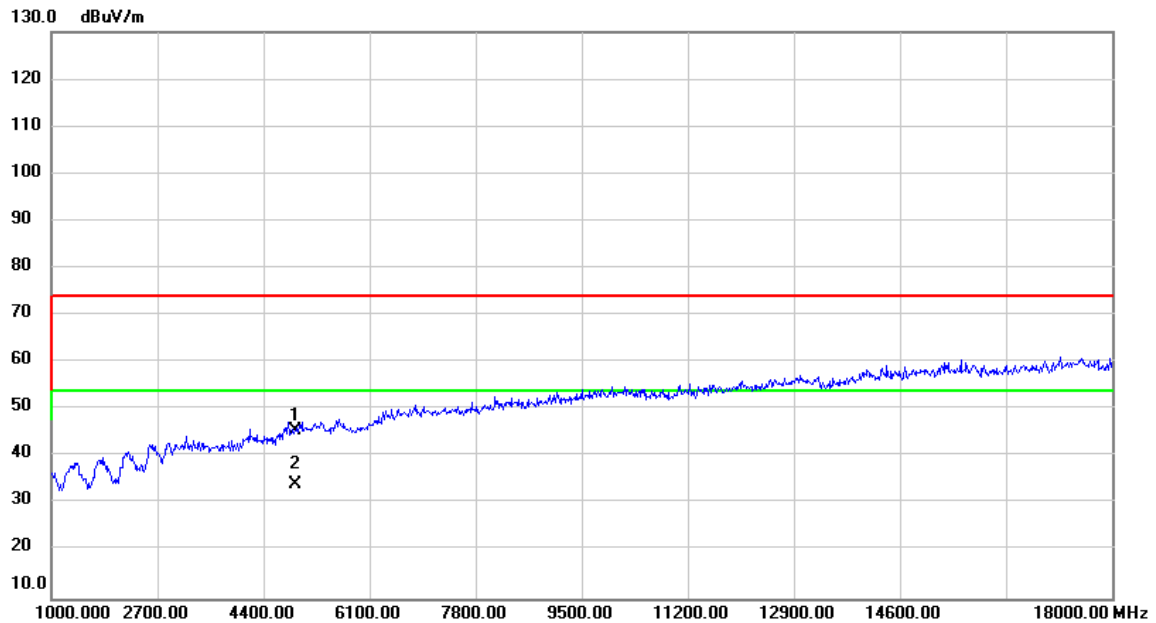


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4914.000	43.59	1.85	45.44	74.00	-28.56	peak	
2	*	4914.000	32.33	1.85	34.18	54.00	-19.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

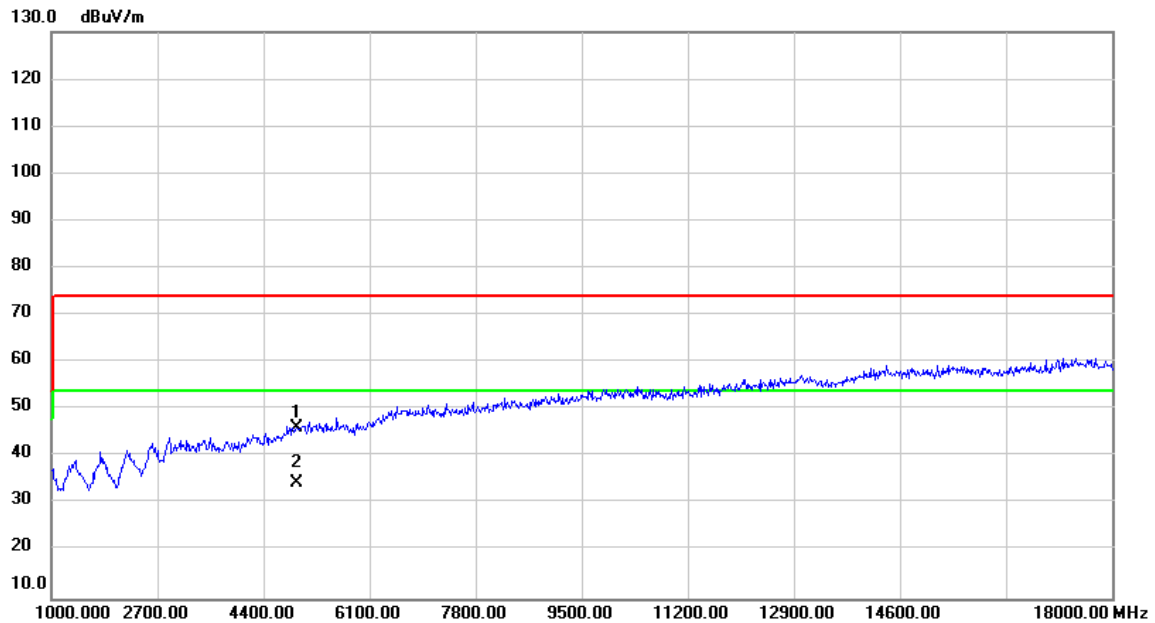


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	44.19	1.89	46.08	74.00	-27.92	peak	
2	*	4924.000	32.57	1.89	34.46	54.00	-19.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

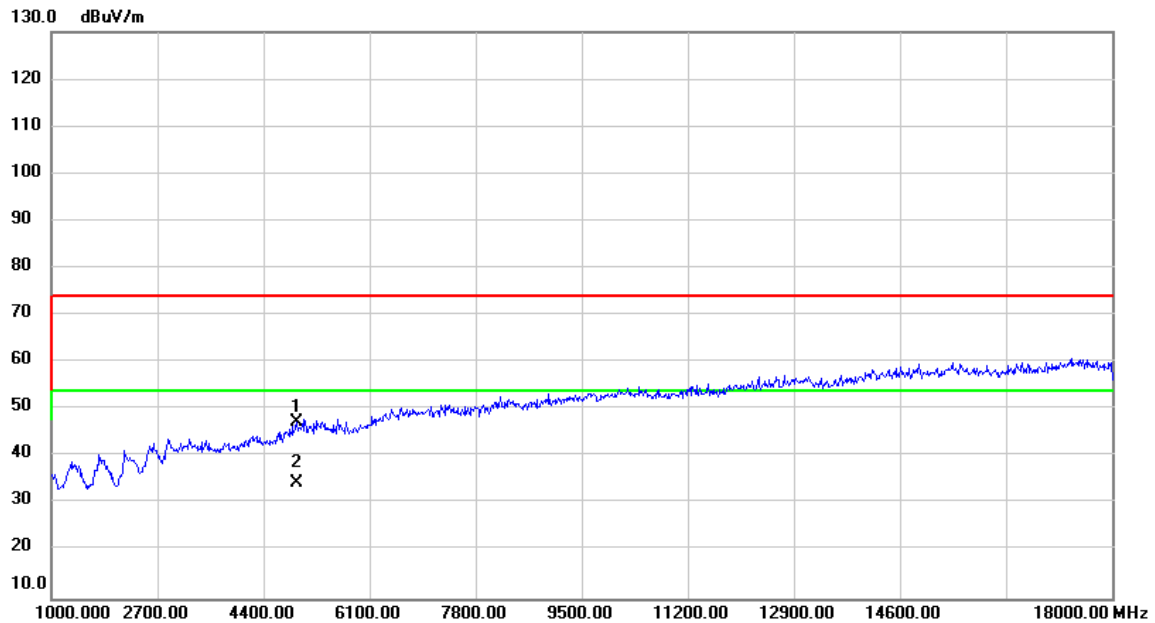


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	45.60	1.89	47.49	74.00	-26.51	peak	
2	*	4924.000	32.58	1.89	34.47	54.00	-19.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

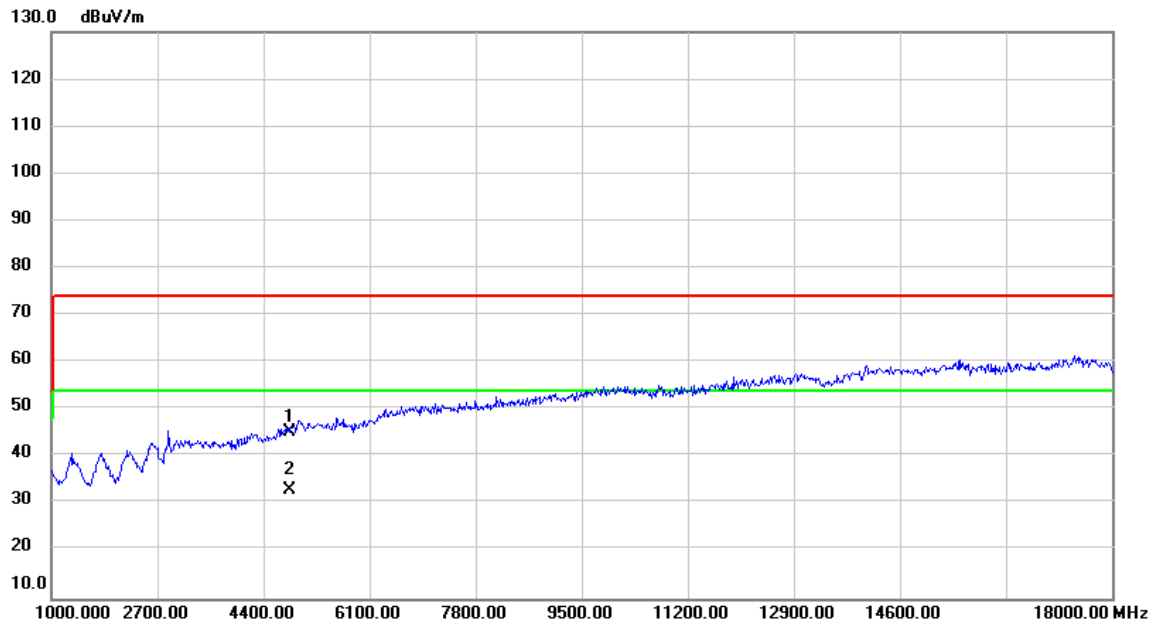


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	43.94	1.43	45.37	74.00	-28.63	peak	
2	*	4824.000	31.63	1.43	33.06	54.00	-20.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2412MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

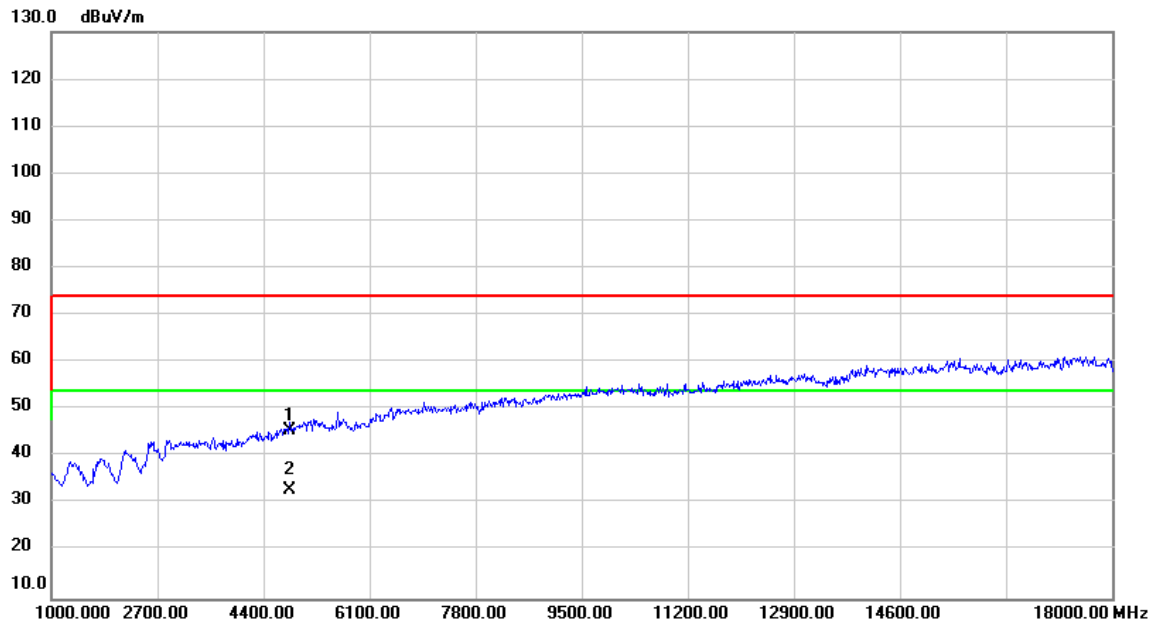


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	44.26	1.43	45.69	74.00	-28.31	peak	
2	*	4824.000	31.49	1.43	32.92	54.00	-21.08	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

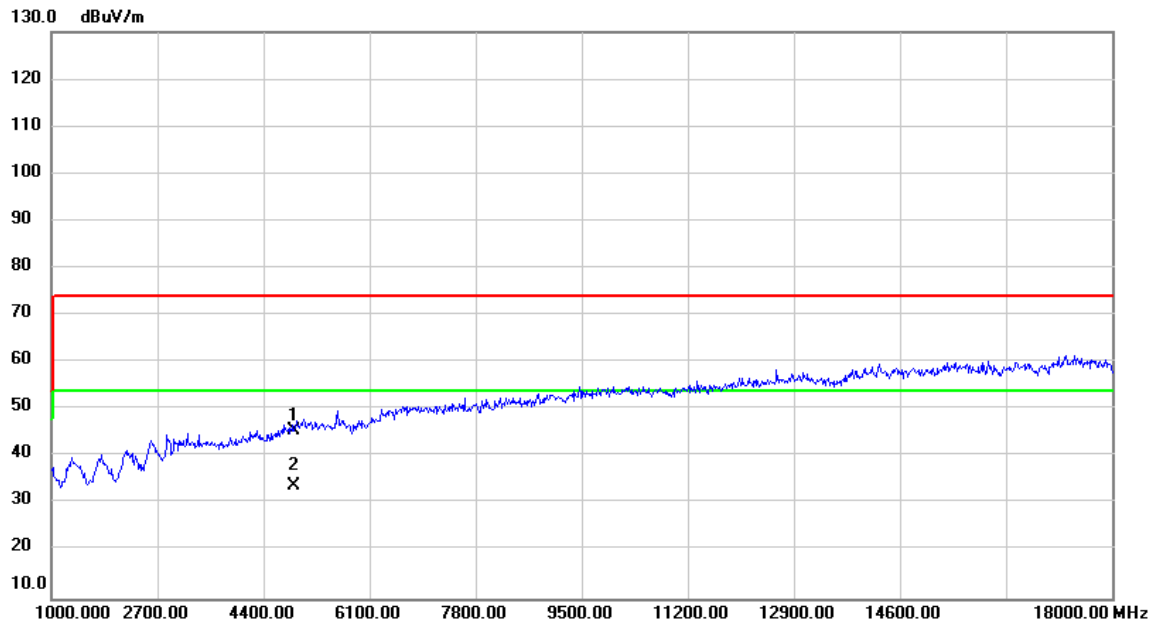


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4884.000	43.88	1.71	45.59	74.00	-28.41	peak	
2	*	4884.000	32.15	1.71	33.86	54.00	-20.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

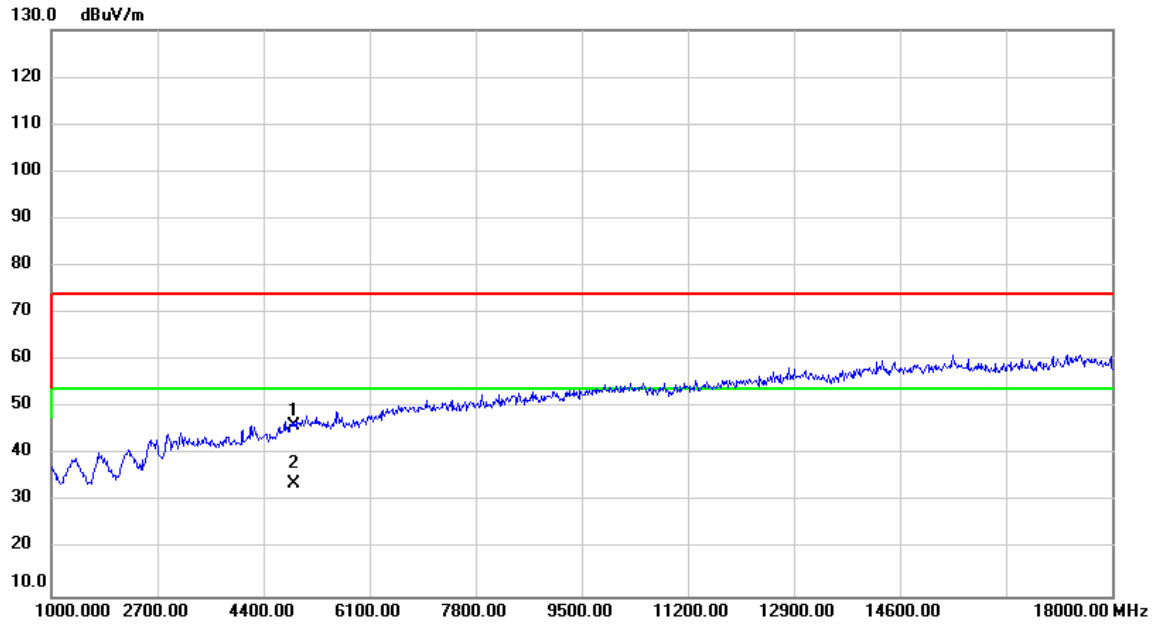


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	44.58	1.71	46.29	74.00	-27.71	peak	
2	*	4884.000	32.10	1.71	33.81	54.00	-20.19	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

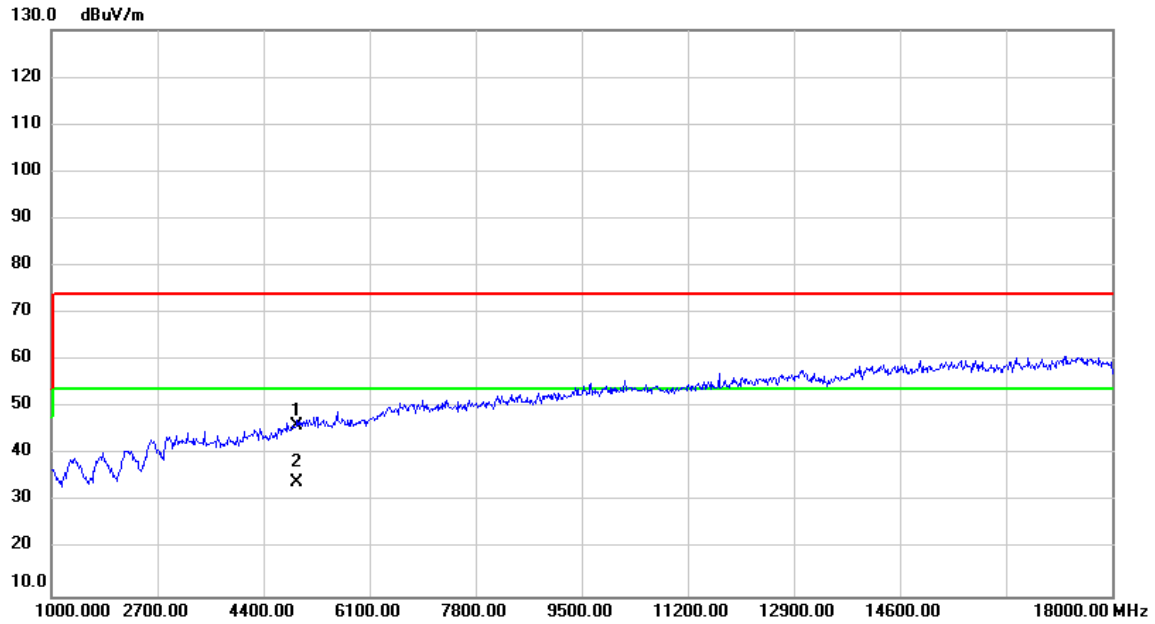


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	44.16	1.89	46.05	74.00	-27.95	peak	
2	*	4924.000	32.25	1.89	34.14	54.00	-19.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/3/30
Test Frequency	2462MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

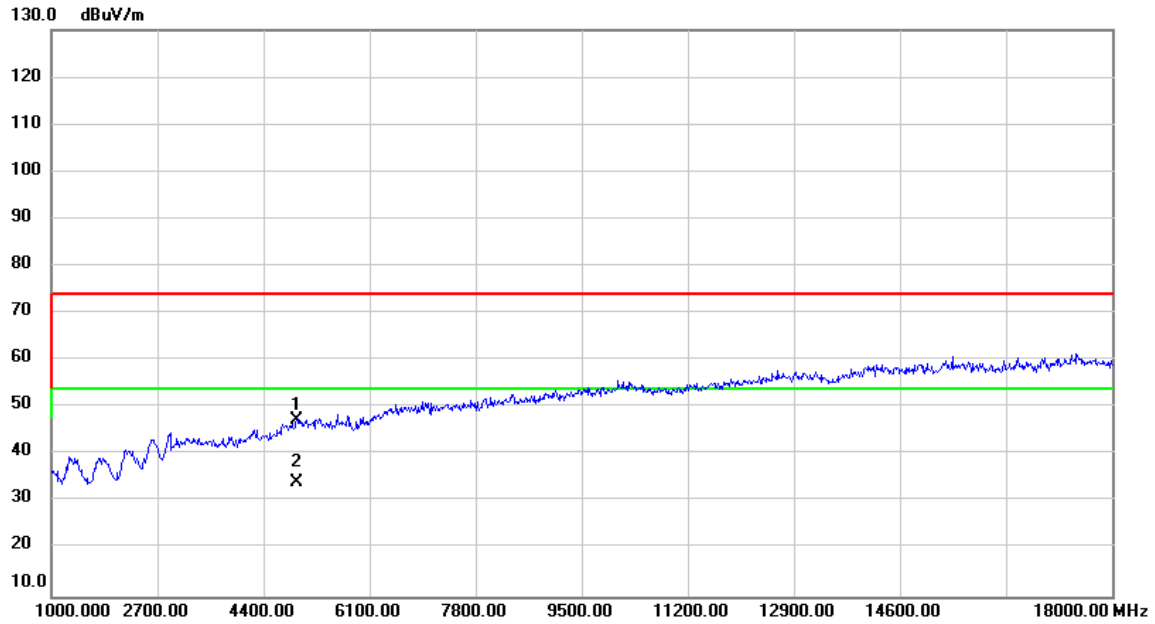


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	45.50	1.89	47.39	74.00	-26.61	peak	
2	*	4924.000	32.40	1.89	34.29	54.00	-19.71	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

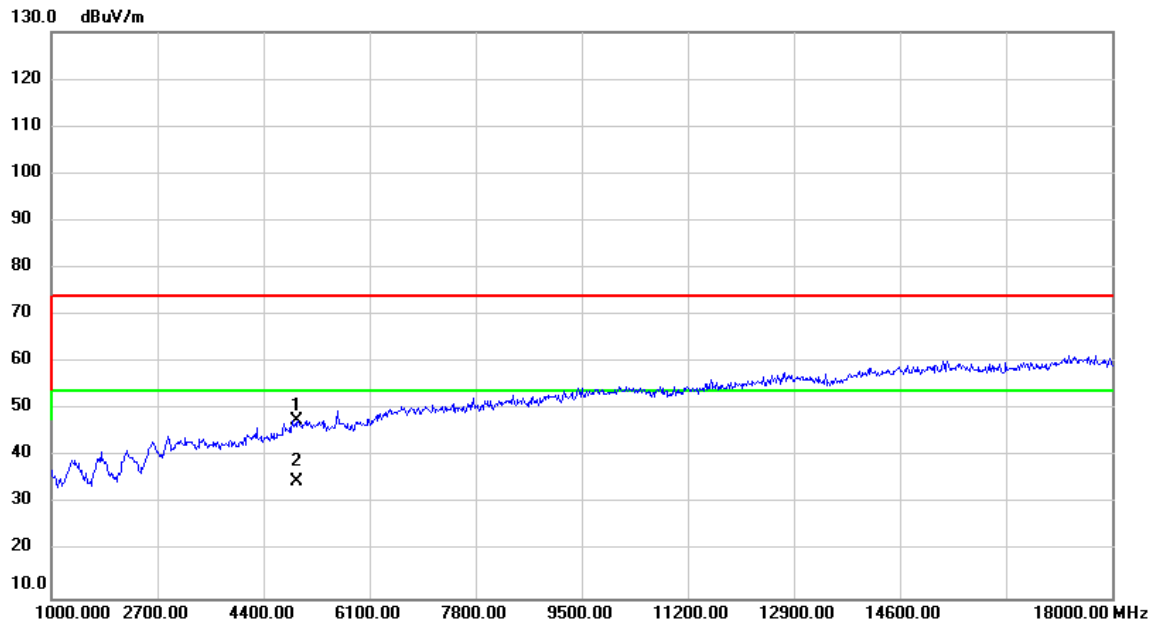


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4934.000	45.67	1.94	47.61	74.00	-26.39	peak	
2	*	4934.000	32.90	1.94	34.84	54.00	-19.16	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2467MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

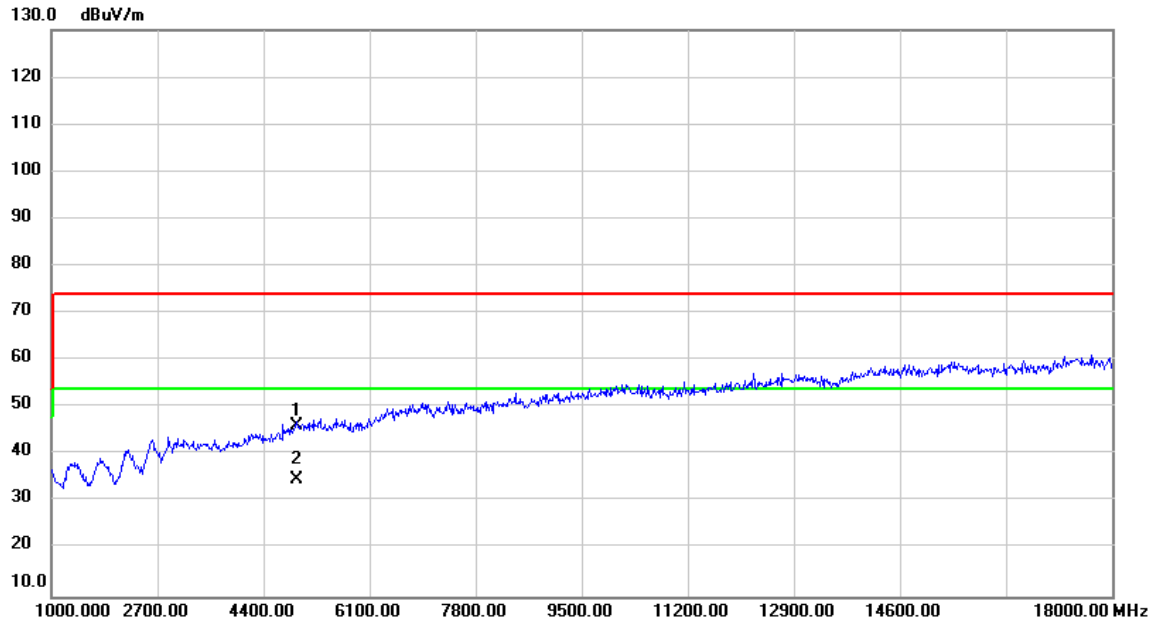


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4934.000	44.36	1.94	46.30	74.00	-27.70	peak	
2	*	4934.000	32.90	1.94	34.84	54.00	-19.16	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

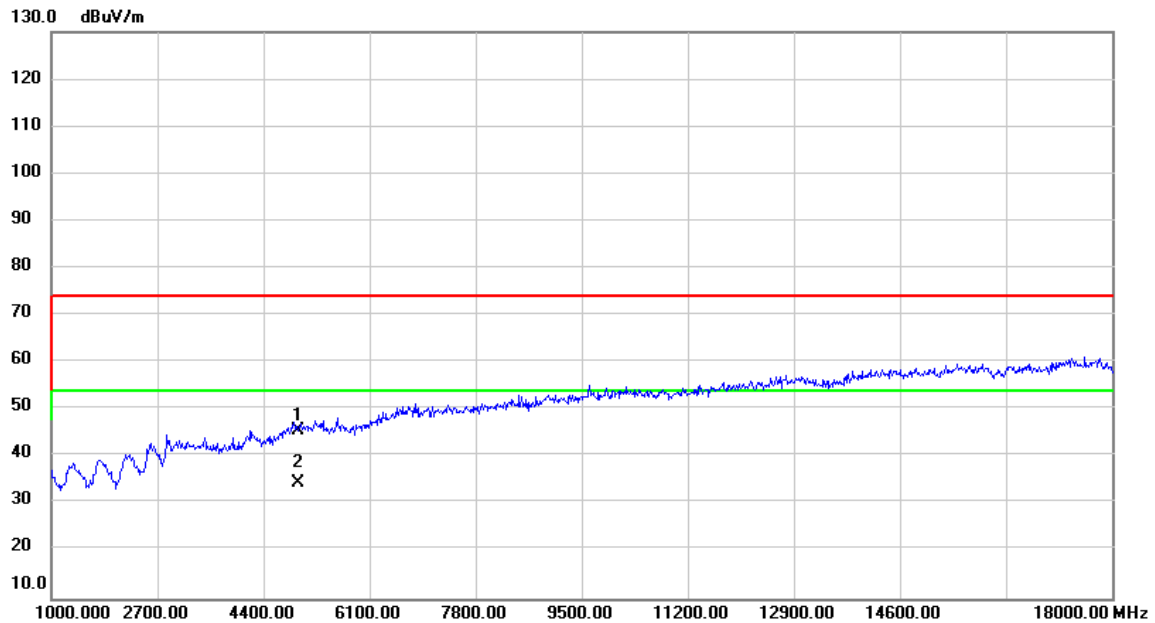


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4944.000	43.59	1.98	45.57	74.00	-28.43	peak	
2	*	4944.000	32.44	1.98	34.42	54.00	-19.58	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2026/4/1
Test Frequency	2472MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

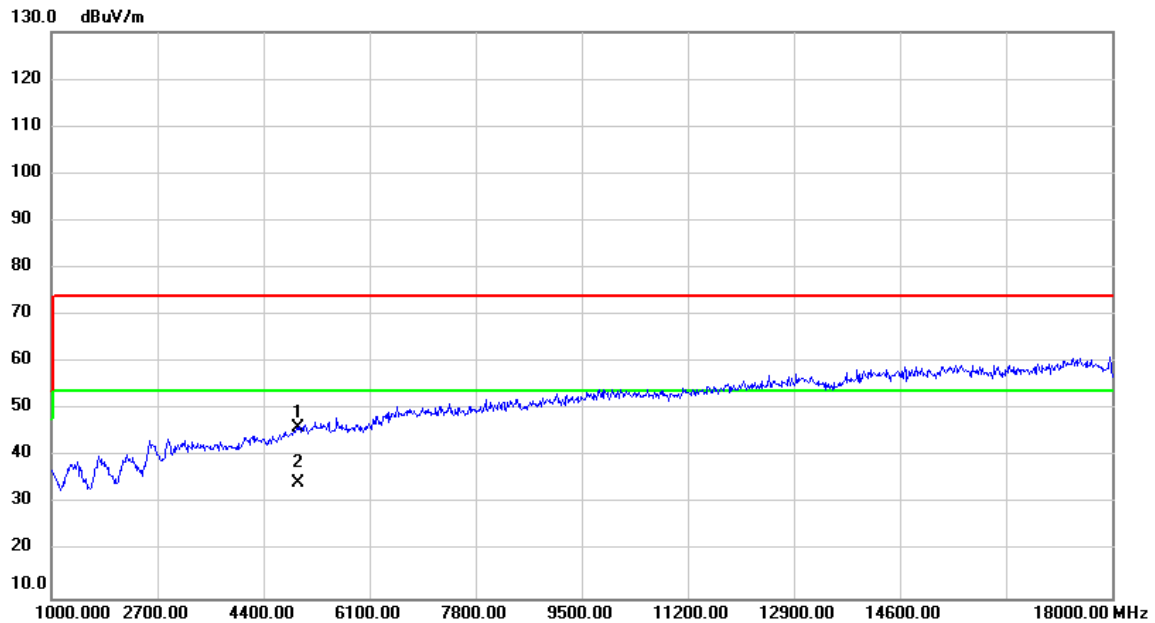


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4944.000	44.23	1.98	46.21	74.00	-27.79	peak	
2	*	4944.000	32.45	1.98	34.43	54.00	-19.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

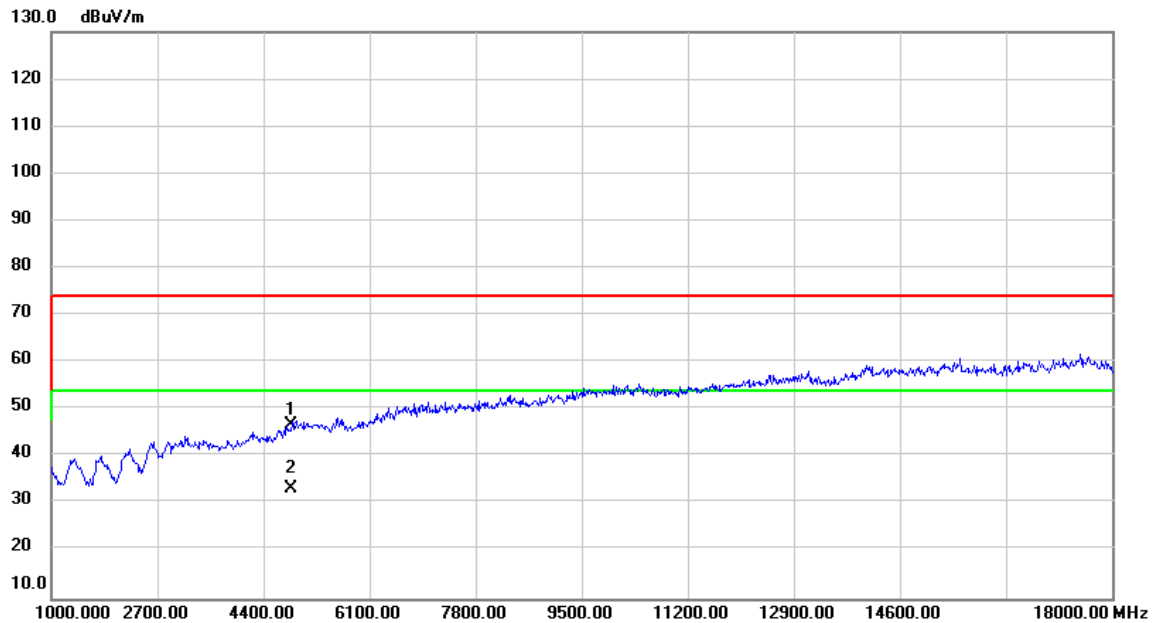


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4844.000	45.14	1.52	46.66	74.00	-27.34	peak	
2	*	4844.000	31.80	1.52	33.32	54.00	-20.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2422MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

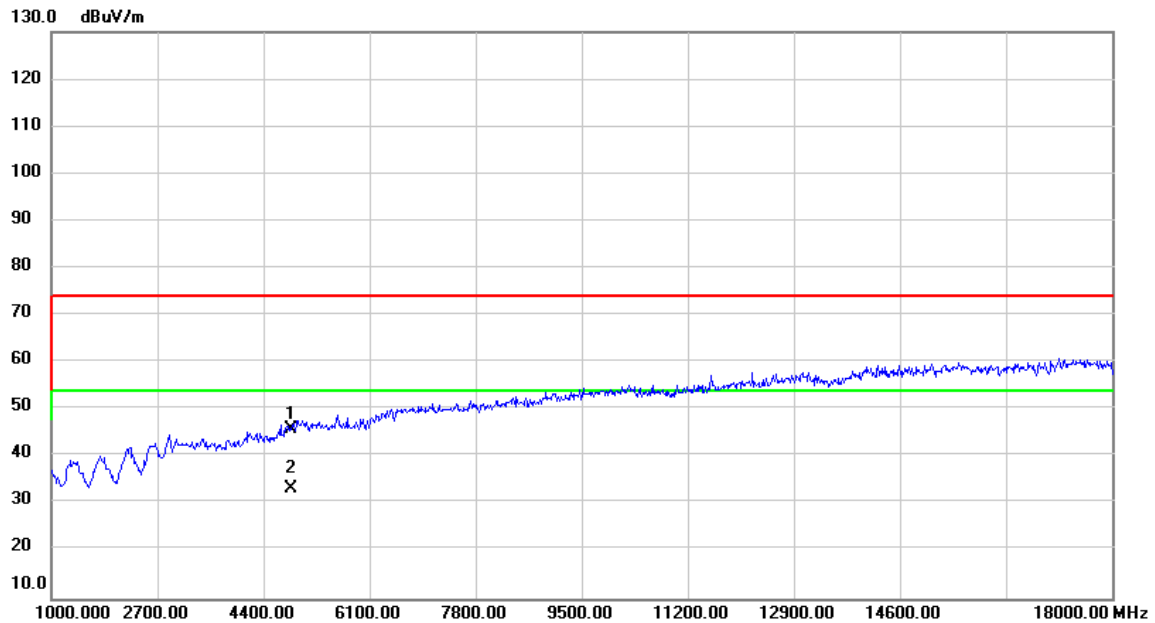


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4844.000	44.31	1.52	45.83	74.00	-28.17	peak	
2	*	4844.000	31.82	1.52	33.34	54.00	-20.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

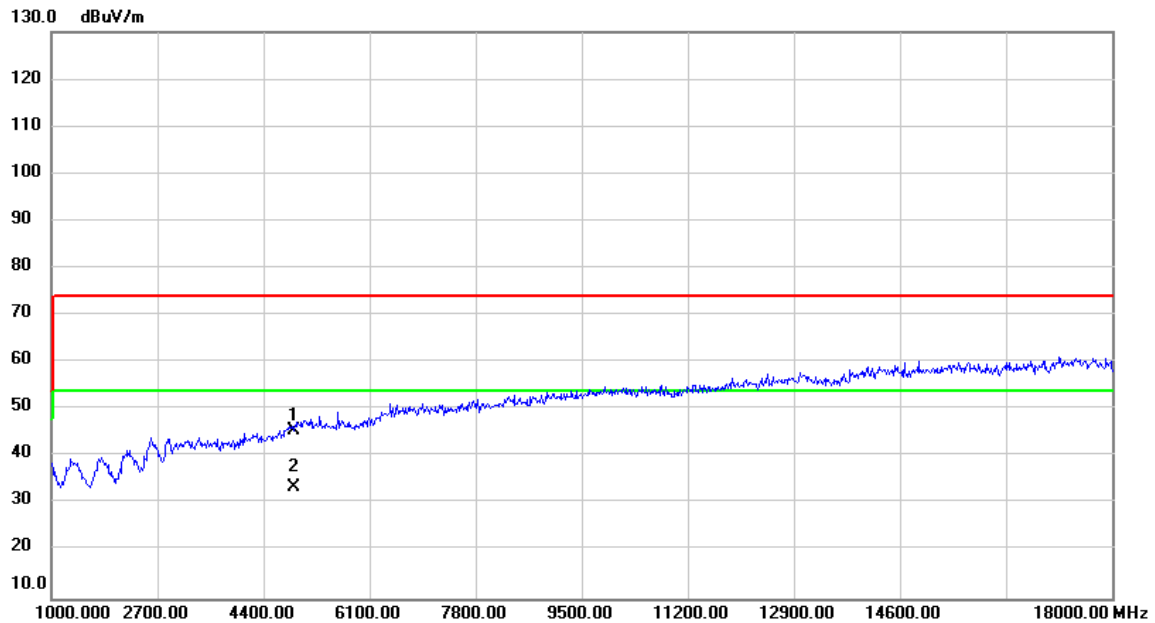


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	43.84	1.71	45.55	74.00	-28.45	peak	
2	*	4884.000	31.97	1.71	33.68	54.00	-20.32	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2442MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

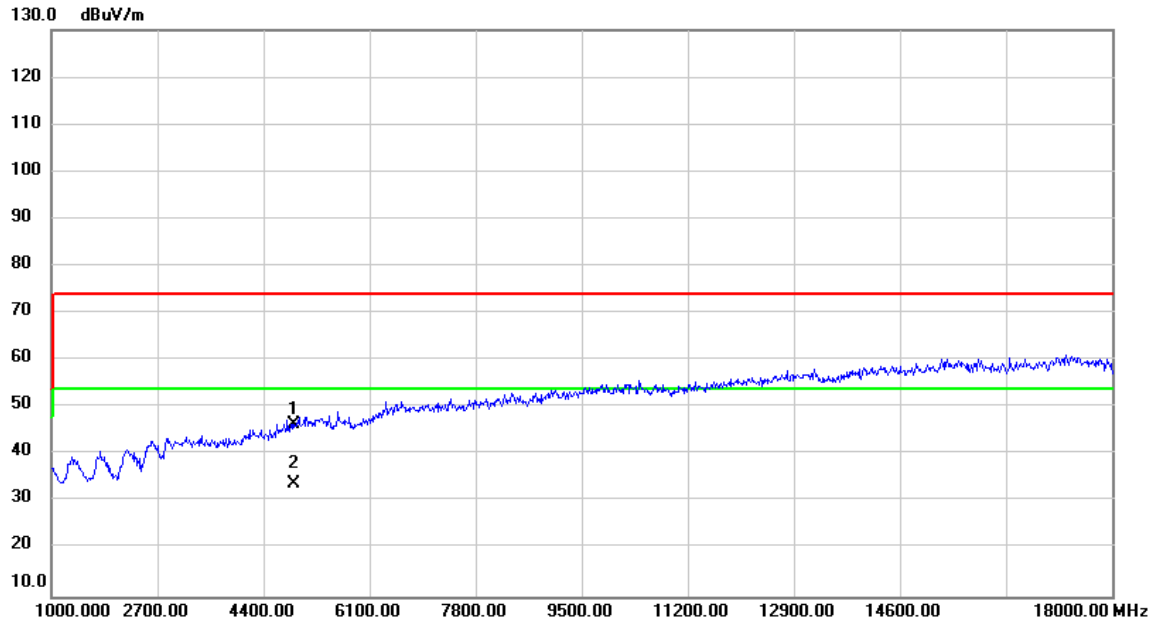


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	44.86	1.71	46.57	74.00	-27.43	peak	
2	*	4884.000	32.05	1.71	33.76	54.00	-20.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Vertical
Temp	26°C	Hum.	58 %

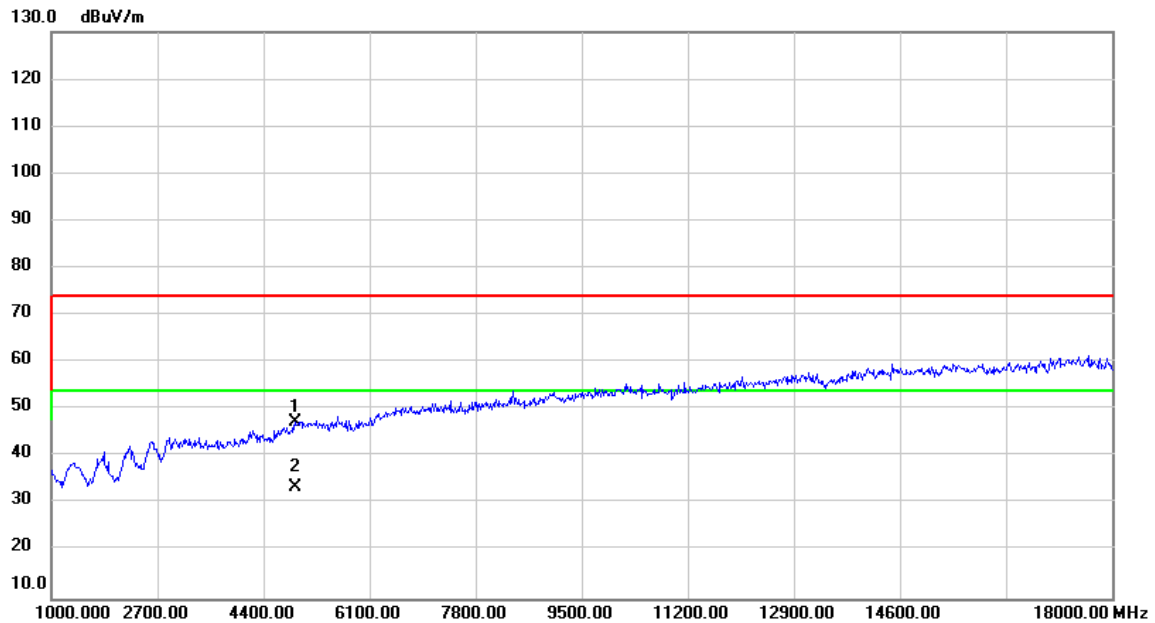


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4904.000	45.40	1.80	47.20	74.00	-26.80	peak	
2	*	4904.000	31.82	1.80	33.62	54.00	-20.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/3/30
Test Frequency	2452MHz	Polarization	Horizontal
Temp	26°C	Hum.	58 %

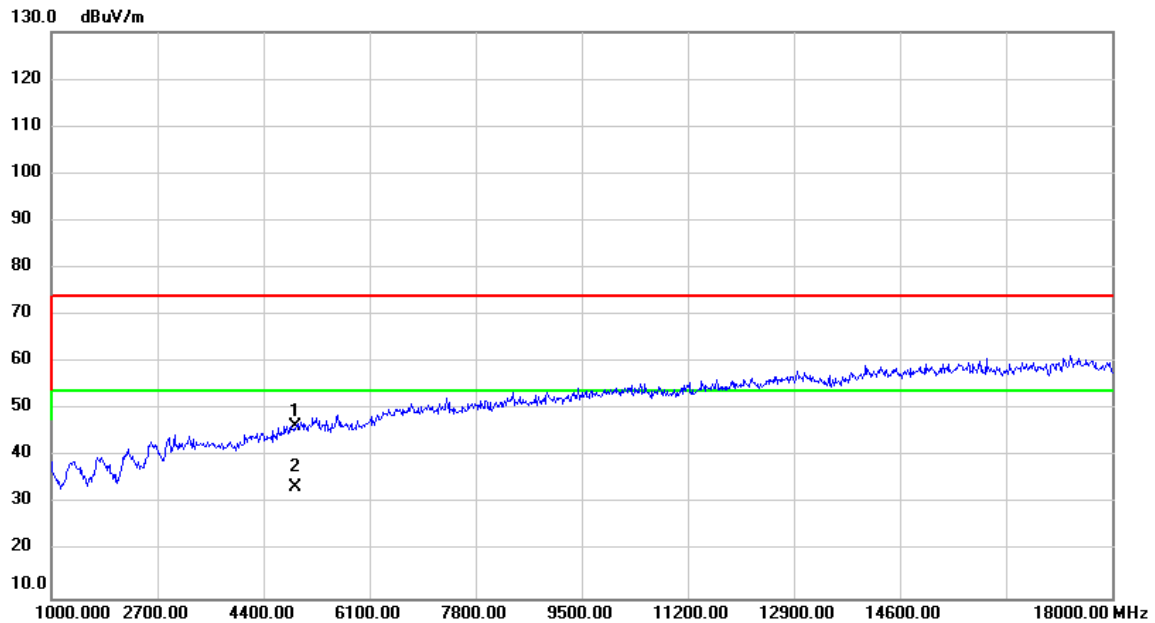


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4904.000	44.74	1.80	46.54	74.00	-27.46	peak	
2	*	4904.000	31.77	1.80	33.57	54.00	-20.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

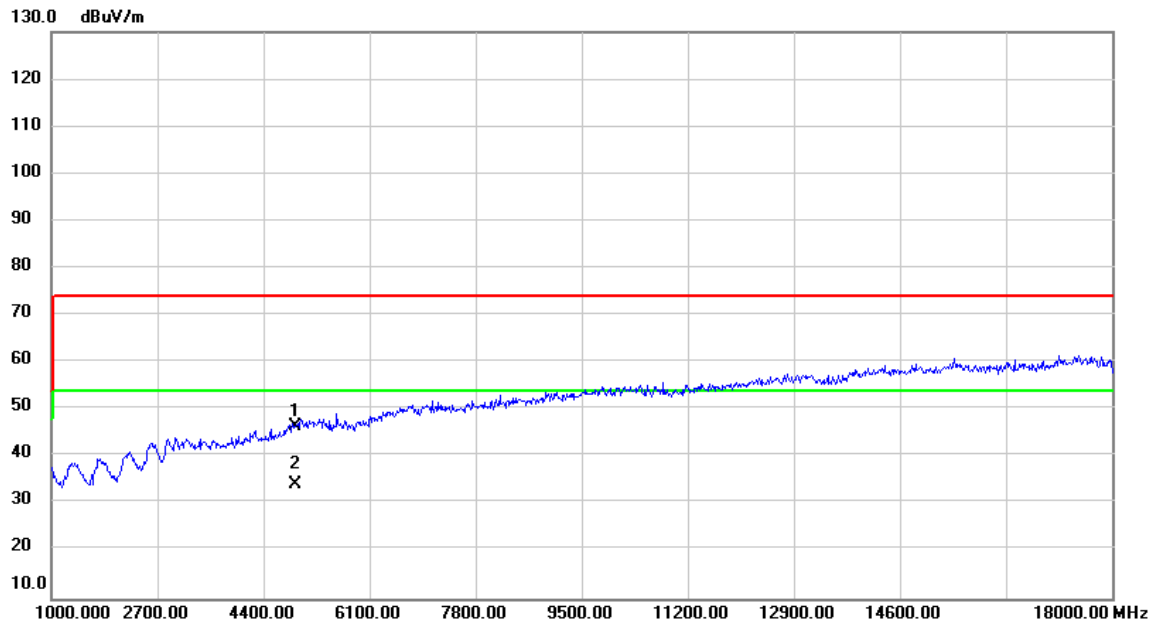


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4914.000	44.60	1.85	46.45	74.00	-27.55	peak	
2	*	4914.000	32.28	1.85	34.13	54.00	-19.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2457MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

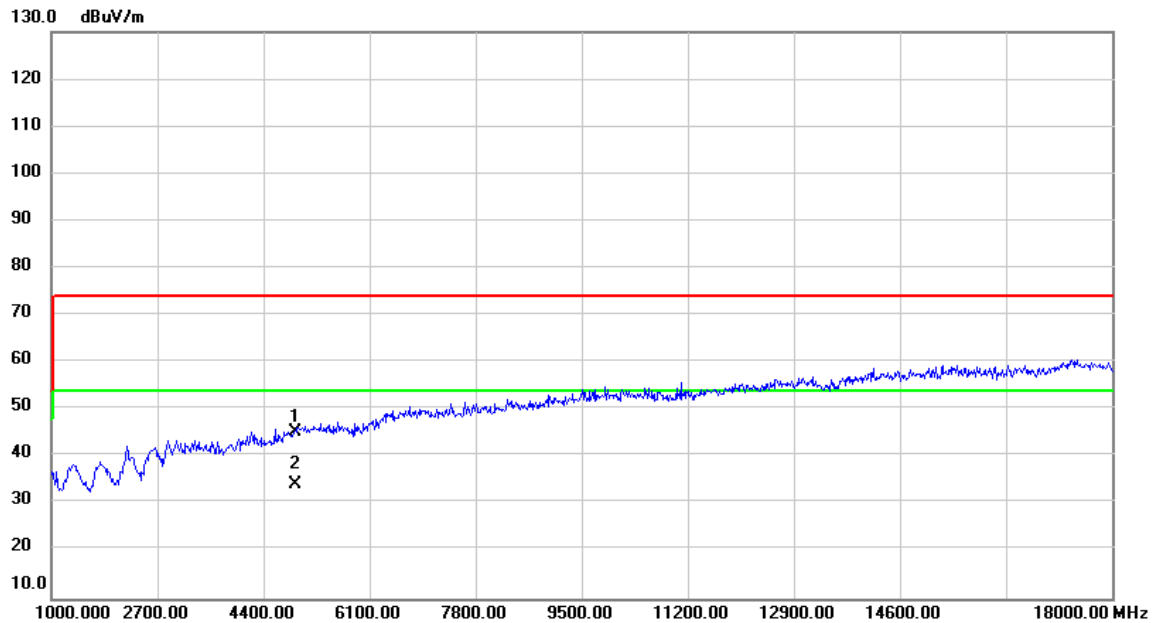


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4914.000	43.45	1.85	45.30	74.00	-28.70	peak	
2	*	4914.000	32.24	1.85	34.09	54.00	-19.91	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Vertical
Temp	23°C	Hum.	60 %

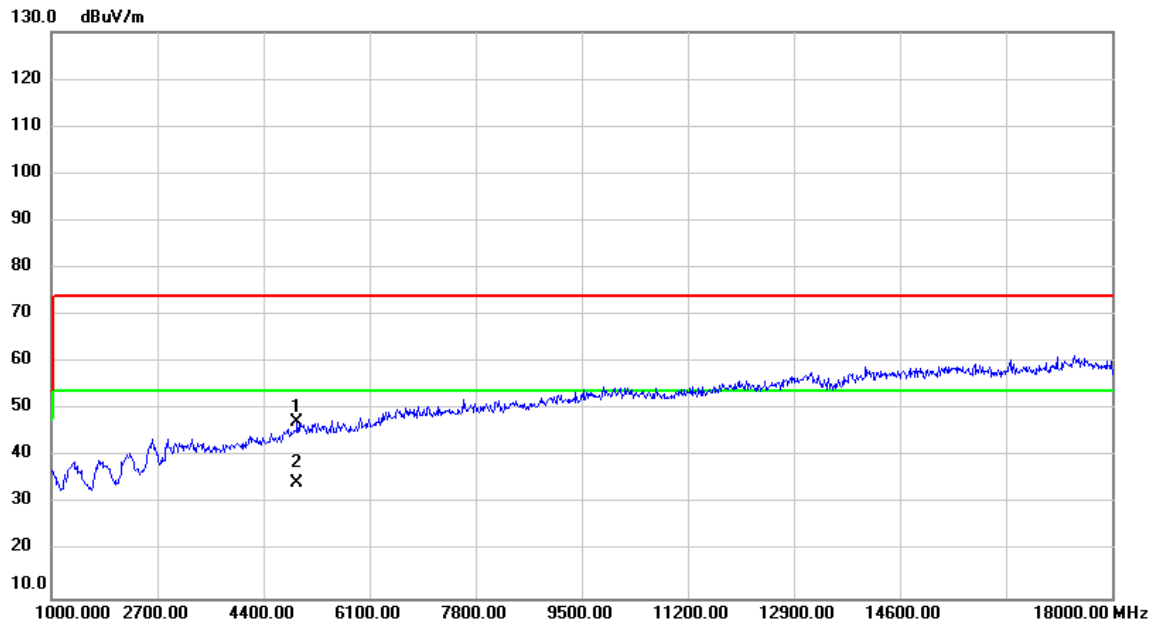


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	45.35	1.89	47.24	74.00	-26.76	peak	
2	*	4924.000	32.62	1.89	34.51	54.00	-19.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2026/4/1
Test Frequency	2462MHz	Polarization	Horizontal
Temp	23°C	Hum.	60 %

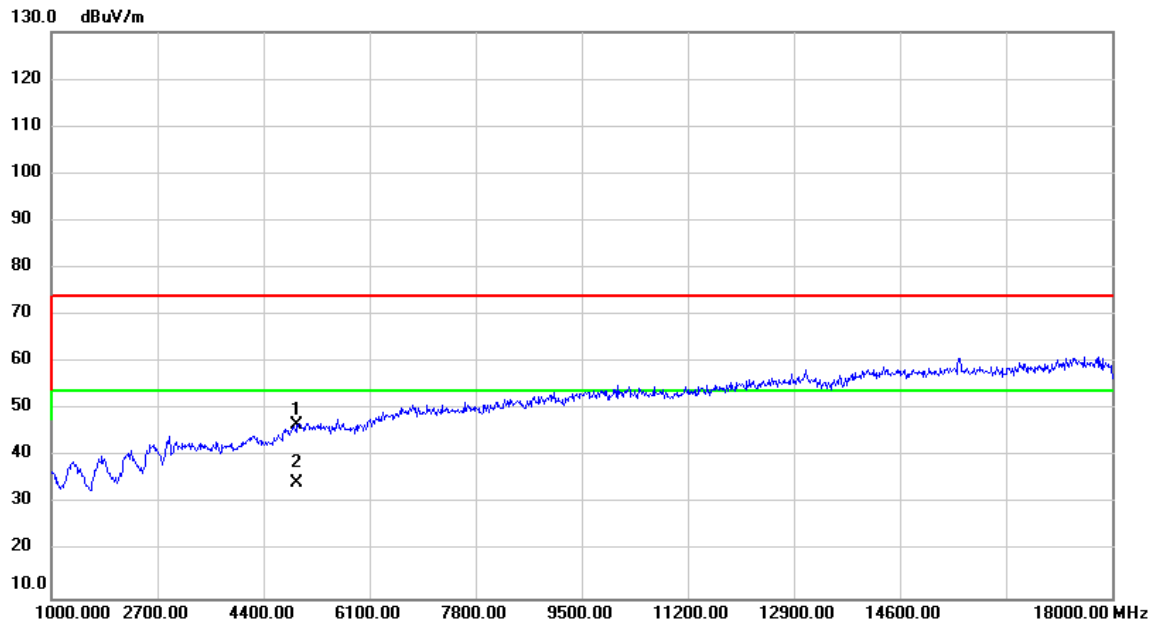

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	44.81	1.89	46.70	74.00	-27.30	peak	
2	*	4924.000	32.52	1.89	34.41	54.00	-19.59	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E OUTPUT POWER

SISO mode:

Test Mode	IEEE 802.11b_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	------------------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	21.85	0.1531	30.00	1.0000	Pass
2442	23.86	0.2432	30.00	1.0000	Pass
2462	23.13	0.2056	30.00	1.0000	Pass
2467	21.68	0.1472	30.00	1.0000	Pass
2472	19.69	0.0931	30.00	1.0000	Pass

Test Mode	IEEE 802.11b_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---------------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	22.60	0.1820	30.00	1.0000	Pass
2442	22.82	0.1914	30.00	1.0000	Pass
2462	22.45	0.1758	30.00	1.0000	Pass
2467	21.03	0.1268	30.00	1.0000	Pass
2472	19.24	0.0839	30.00	1.0000	Pass

Test Mode	IEEE 802.11g_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	------------------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	21.95	0.1567	30.00	1.0000	Pass
2442	24.17	0.2612	30.00	1.0000	Pass
2462	21.42	0.1387	30.00	1.0000	Pass
2467	17.93	0.0621	30.00	1.0000	Pass
2472	17.32	0.0540	30.00	1.0000	Pass

Test Mode	IEEE 802.11g_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---------------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	22.64	0.1837	30.00	1.0000	Pass
2442	24.53	0.2838	30.00	1.0000	Pass
2462	21.32	0.1355	30.00	1.0000	Pass
2467	17.83	0.0607	30.00	1.0000	Pass
2472	16.51	0.0448	30.00	1.0000	Pass

MIMO mode:

Test Mode	IEEE 802.11n (HT20)_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	20.24	0.1057	30.00	1.0000	Pass
2442	21.52	0.1419	30.00	1.0000	Pass
2462	19.69	0.0931	30.00	1.0000	Pass
2467	16.73	0.0471	30.00	1.0000	Pass
2472	15.85	0.0385	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	--	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	20.16	0.1038	30.00	1.0000	Pass
2442	21.45	0.1396	30.00	1.0000	Pass
2462	19.56	0.0904	30.00	1.0000	Pass
2467	16.67	0.0465	30.00	1.0000	Pass
2472	15.51	0.0356	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_ Total	Tested Date	2026/3/23
-----------	----------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	23.21	0.2094	30.00	1.0000	Pass
2442	24.50	0.2815	30.00	1.0000	Pass
2462	22.64	0.1835	30.00	1.0000	Pass
2467	19.71	0.0935	30.00	1.0000	Pass
2472	18.69	0.0740	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	16.83	0.0482	30.00	1.0000	Pass
2442	22.02	0.1592	30.00	1.0000	Pass
2452	17.55	0.0569	30.00	1.0000	Pass
2457	14.16	0.0261	30.00	1.0000	Pass
2462	15.55	0.0359	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	--	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	16.96	0.0497	30.00	1.0000	Pass
2442	21.93	0.1560	30.00	1.0000	Pass
2452	17.28	0.0535	30.00	1.0000	Pass
2457	14.11	0.0258	30.00	1.0000	Pass
2462	15.12	0.0325	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_ Total	Tested Date	2026/3/23
-----------	----------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	19.91	0.0979	30.00	1.0000	Pass
2442	24.99	0.3152	30.00	1.0000	Pass
2452	20.43	0.1103	30.00	1.0000	Pass
2457	17.15	0.0518	30.00	1.0000	Pass
2462	18.35	0.0684	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20)_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	--	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	20.60	0.1148	30.00	1.0000	Pass
2442	21.19	0.1315	30.00	1.0000	Pass
2462	19.76	0.0946	30.00	1.0000	Pass
2467	16.91	0.0491	30.00	1.0000	Pass
2472	13.98	0.0250	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20)_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	20.37	0.1089	30.00	1.0000	Pass
2442	21.26	0.1337	30.00	1.0000	Pass
2462	19.81	0.0957	30.00	1.0000	Pass
2467	16.87	0.0486	30.00	1.0000	Pass
2472	13.97	0.0249	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20)_ Total	Tested Date	2026/3/23
-----------	-----------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2412	23.50	0.2237	30.00	1.0000	Pass
2442	24.24	0.2652	30.00	1.0000	Pass
2462	22.80	0.1903	30.00	1.0000	Pass
2467	19.90	0.0977	30.00	1.0000	Pass
2472	16.99	0.0499	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40)_ Bottom Wi-Fi Antenna	Tested Date	2026/3/23
-----------	--	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	16.36	0.0433	30.00	1.0000	Pass
2442	21.62	0.1452	30.00	1.0000	Pass
2452	17.84	0.0607	30.00	1.0000	Pass
2457	13.82	0.0241	30.00	1.0000	Pass
2462	14.74	0.0298	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40)_ Top Wi-Fi Antenna	Tested Date	2026/3/23
-----------	---	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	16.28	0.0425	30.00	1.0000	Pass
2442	21.52	0.1419	30.00	1.0000	Pass
2452	17.68	0.0585	30.00	1.0000	Pass
2457	13.65	0.0232	30.00	1.0000	Pass
2462	14.82	0.0303	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40)_ Total	Tested Date	2026/3/23
-----------	-----------------------------	-------------	-----------

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
2422	19.33	0.0857	30.00	1.0000	Pass
2442	24.58	0.2871	30.00	1.0000	Pass
2452	20.77	0.1193	30.00	1.0000	Pass
2457	16.75	0.0473	30.00	1.0000	Pass
2462	17.79	0.0601	30.00	1.0000	Pass

End of Test Report