
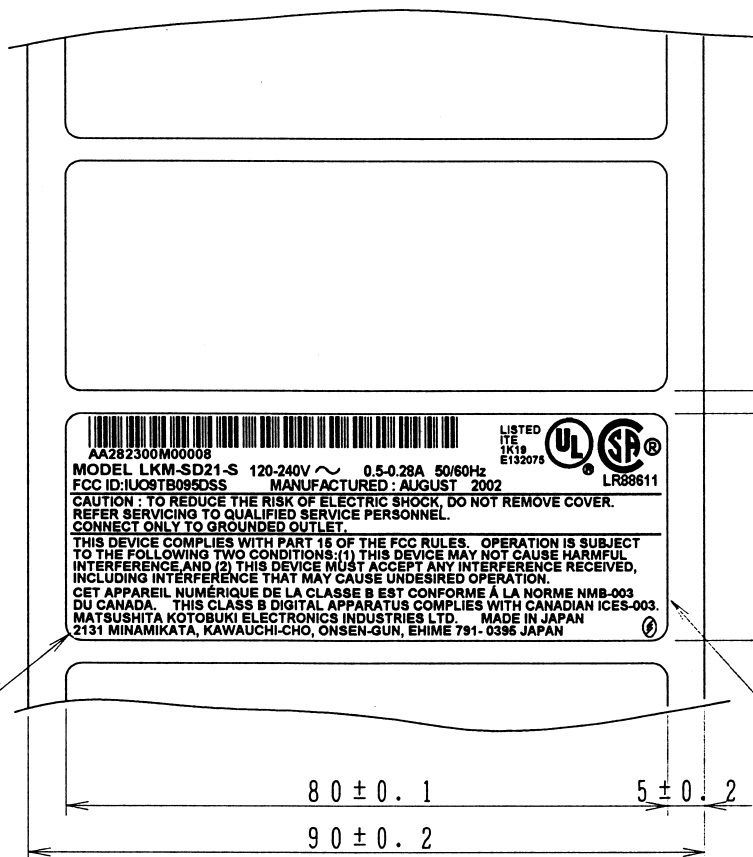


Tolerans (±)	Sym.	Date	Revision	Signed	Checked
From 0 to 4 0.10					
From 4 to 16 0.20					
From 16 to 63 0.30					
From 63 to 250 0.50					
From 250 to 1000 0.80					

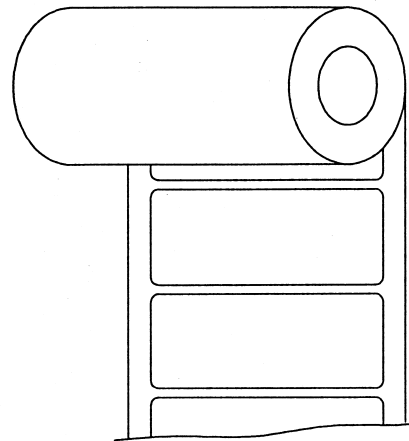


Base: Yellow
Text, Line: Black

NOTES

1. USE UL AND CSA APPROVED MATERIAL.

BASE: FR1013-50 (LINTEC) PET Film
ADHESIVE: ACRYLIC EMULSION

				1		LKM-SD21-S
Sym.	Process	Material & Size		qty.	Remark	Model
CAD No.						Parts No.
Scale	Designed	Drawn	Traced	Checked	Approval	
1 : 1	T. Ochi	T. Ochi				Name
	Sep 2 2002	Sep 2 2002				No.
						RATING LABEL



普通寸法 (mm)	GT-3
0以上 4以下	0.10
4電圧 16以下	0.20
16電圧 63以下	0.30
63電圧 250以下	0.50
250電圧 1000以下	0.80

RATING LABEL

POWER SW

POWER CONNECTOR

日付	符号	内容	担当

SCSI CONNECTOR

432±0.5

430±0.5 (without screw)

22.15±0.2

2x4-M4 (DEPTH 4mmMAX)

650±1

(22.5±0.3)

(31±0.3)

31.8±0.3

3±0.3

7±0.2

MOUNT PLATE

483.6±0.5

467.6±0.5

LED WINDOW

LED WINDOW

LCD

OPEN BUTTON

材質	規格	加工	重量	寸法	部品
1	設計	製造	検査	承認	品番
4	設計	製造	検査	承認	品番
	02.05.20	02.05.20			

02.05.20	1Uライブラリー	1	宮本
日付	適用機種	員数	設計

LKM-SD21-S

製品外形主要寸法図

FCC LABEL

