


| Tolerans (±)          | Sym. | Date | Revision | Signed | Checked |
|-----------------------|------|------|----------|--------|---------|
| From 0 to 4 0.10      |      |      |          |        |         |
| From 4 to 16 0.20     |      |      |          |        |         |
| From 16 to 63 0.30    |      |      |          |        |         |
| From 63 to 250 0.50   |      |      |          |        |         |
| From 250 to 1000 0.80 |      |      |          |        |         |

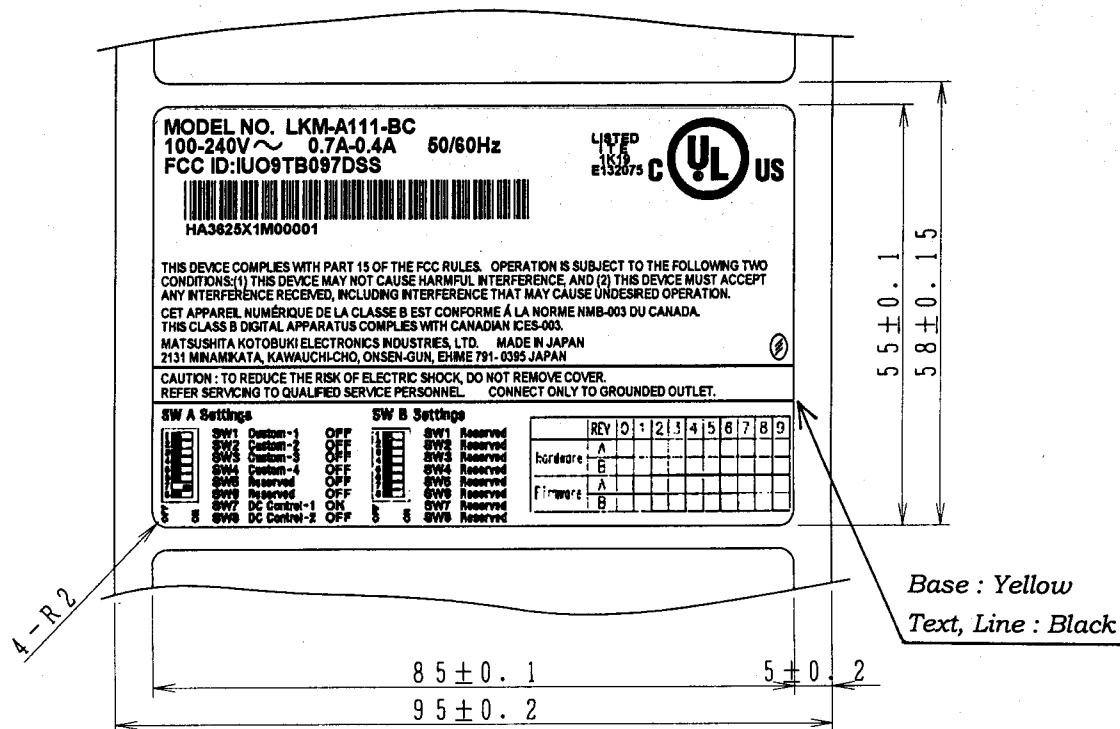

#### NOTES


1. USE UL AND CSA APPROVED MATERIAL.

BASE : FR1013-50 (LINTEC) PET Film  
ADHESIVE : ACRYLIC EMULSION

|         |               |                 |        |         |          |              |
|---------|---------------|-----------------|--------|---------|----------|--------------|
| Sym.    | Process       | Material & Size | 1      | qty.    | Remark   | LKM-A111-BC  |
| CAD No. |               |                 |        |         |          | Model        |
| Scale   | Designed      | Drawn           | Traced | Checked | Approval | Parts No.    |
| 1:1     | T. Ochi       | T. Ochi         |        |         |          | Name         |
|         | Jun. 25, 2003 | Jun. 25, 2003   |        |         |          | No.          |
|         |               |                 |        |         |          | RATING LABEL |



## LKM-A111-BC

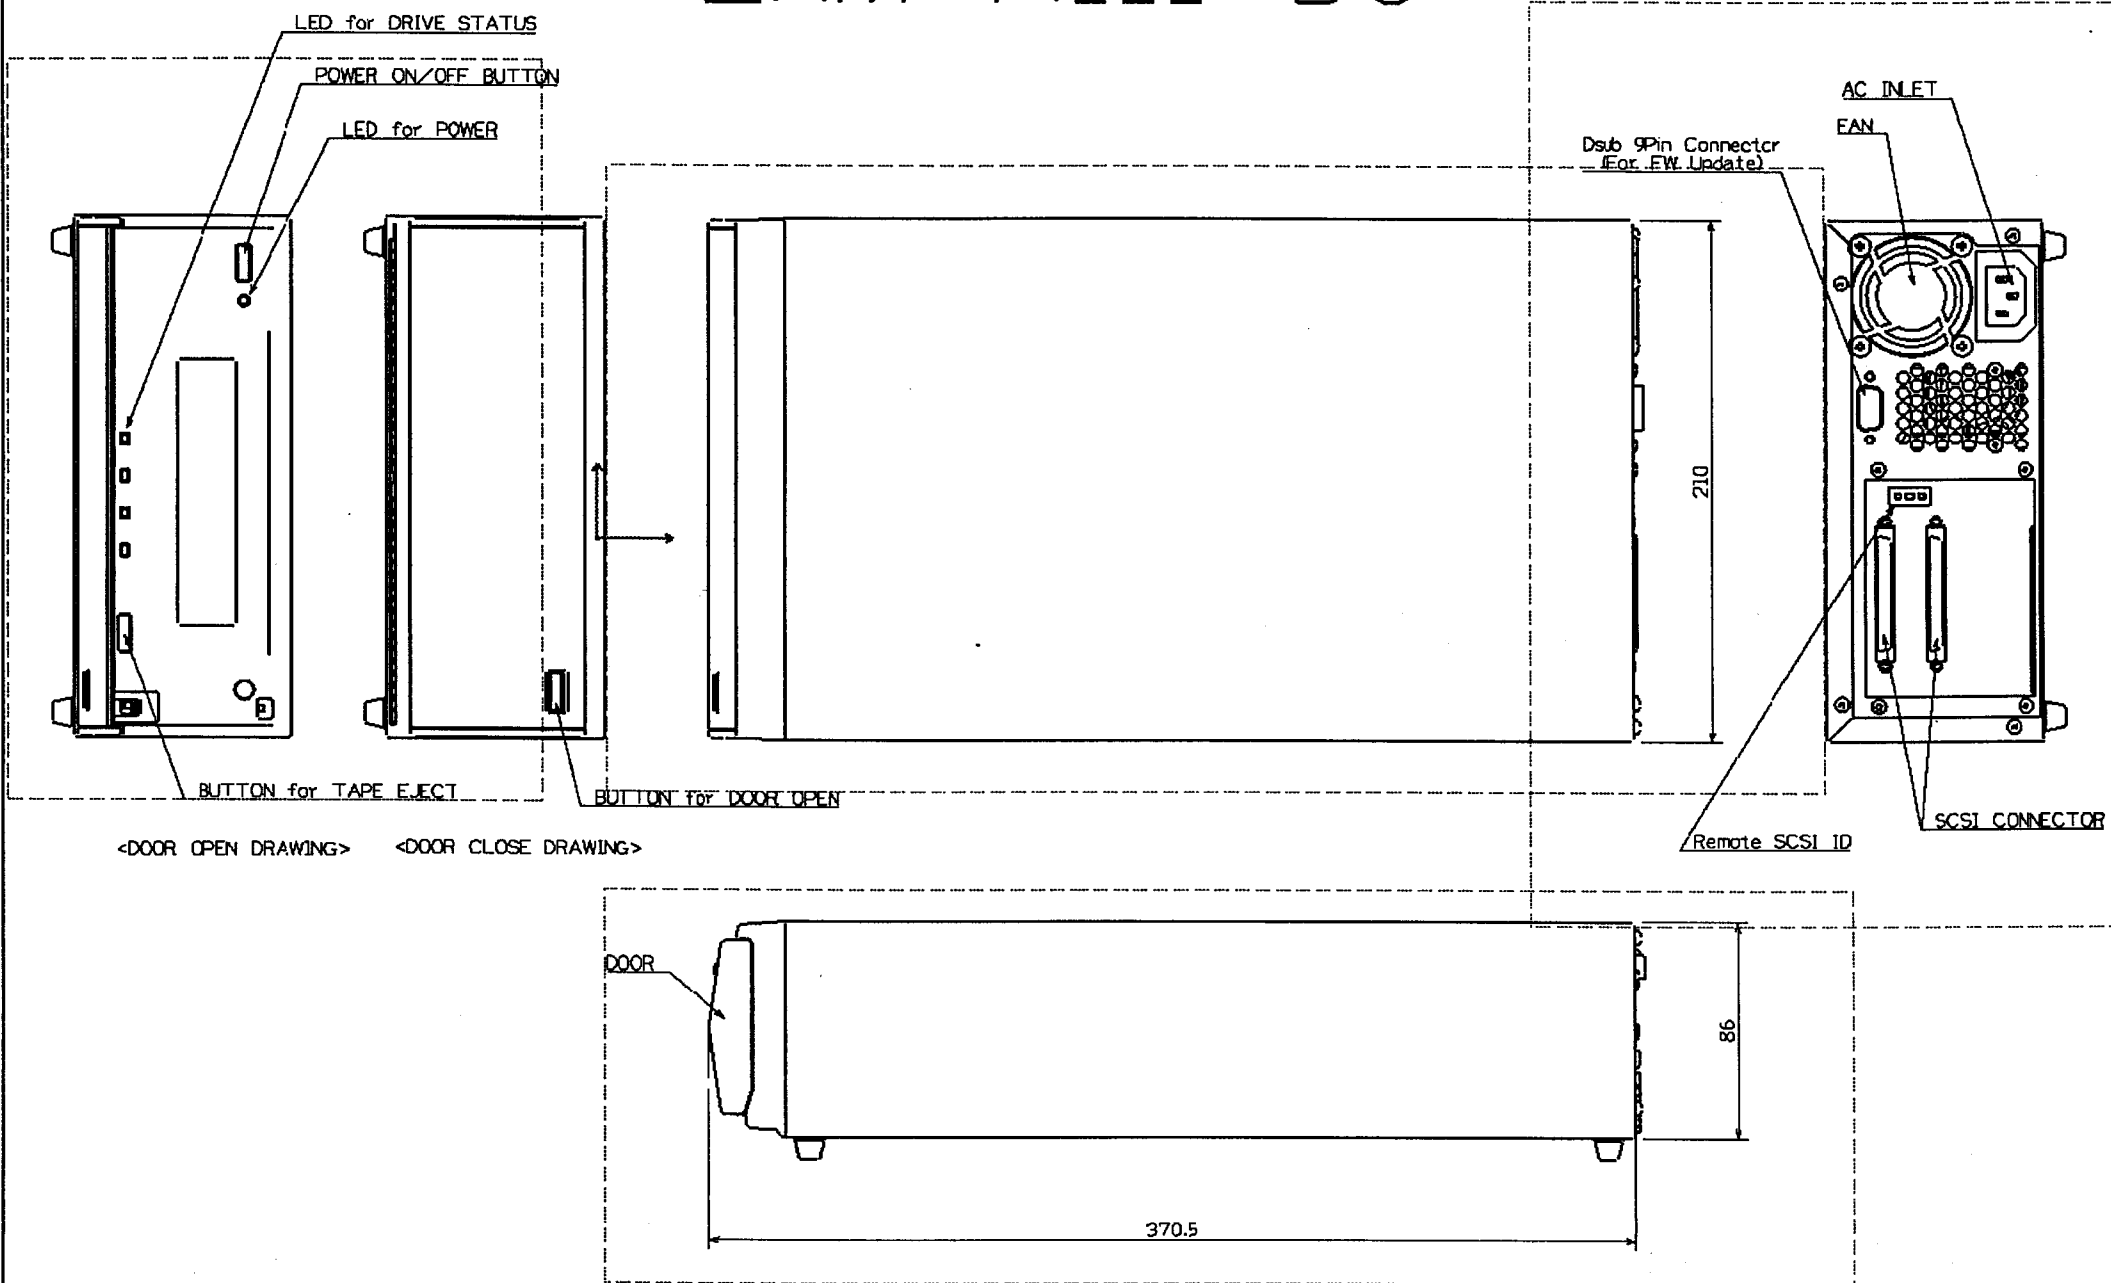

# LKM-A111-BC SAFETY LABEL POSITION

