

ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

TEST REPORT

For

APPLICATION of CERTIFICATION

For

PROGRESS INSTRUMENTS, INC.
807 Northwest Commerce Drive
Lee's Summit, Missouri 64081

Ralph Garvin,
Design Engineer

MODEL: SPEEDSTER
Field Disturbance Monitor
Frequency 24.125 GHz
FCC ID: IUWSPEEDSTER

Test Date: March 15, 2001

Certification Date: March 15, 2001

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
ROGERS LABS, INC.
4405 West 259th Terrace
Louisburg, KS 66053
Phone: (913) 837-3214
FAX: (913) 837-3214

TABLE OF CONTENTS

FORWARD:	3
1) APPLICABLE STANDARDS & TEST PROCEDURES	3
2.1033(b) Application for Certification	4
2) EQUIPMENT TESTED	5
3) EQUIPMENT FUNCTION AND TESTING PROCEDURES	5
4) EQUIPMENT AND CABLE CONFIGURATIONS	5
Conducted Emission Test Procedure	5
Radiated Emission Test Procedure	5
5) LIST OF TEST EQUIPMENT	6
6) UNITS OF MEASUREMENTS	7
7) TEST SITE LOCATIONS	7
8) SUBPART B – UNINTENTIONAL RADIATORS	7
Conducted EMI.....	7
Radiated EMI.....	7
Data: EUT and System Radiated Emissions (9 Highest) :	10
Summary of Results for Conducted Emissions:	10
Summary of Results for Radiated Emissions:	10
Statement of Modifications:	10
9) SUBPART C - INTENTIONAL RADIATORS	11
15.203 Antenna Requirements	11
Restricted Bands of Operation Per 15.205.....	11
Data 15.205:.....	11
15.209 Radiated Emissions Limits; General Requirements.....	12
Radiated EMI.....	12
Data 15.209:.....	13
Summary of Results for Radiated Emissions:	13
15.245 Operation in the Band 24,075-24,175 MHz	13
Radiated Emissions of Intentional Radiator:.....	18
Statement of Modifications:	18

FORWARD:

The following is submitted for consideration in obtaining a Grant of Certification for low power intentional radiators operated under CFR 47, paragraph 15.245.

Name of Applicant:

PROGRESS INSTRUMENTS, INC.
807 Northwest Commerce Drive
Lee's Summit, Missouri 64081

Model: SPEEDSTER Speed monitor

FCC I.D.: IUWSPEEDSTER

Frequency Range: 24,075 MHz to 24,175 MHz

Maximum Operating Power: 2,500 mV/m @ 3 Meters (128 dBμV/m @ 3 meters)

1) Applicable Standards & Test Procedures

a) In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 1999, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, Part 15C Paragraph 15.245, and FCC Document FCC98-58 the following is submitted:

b) Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-1992 Document.

2.1033(b) Application for Certification

- (1) Manufacturer:
PROGRESS INSTRUMENTS, INC.
807 Northwest Commerce Drive
Lee's Summit, Missouri 64081
- (2) Identification: Model: SPEEDSTER
FCC I.D.: IUWSPEEDSTER
- (3) Instruction Book:
Refer to the instruction manual furnished with this application for details.
- (4) Description of Circuit Functions:
Refer to the circuit description furnished with this application for details.
- (5) Block Diagram with Frequencies:
Refer to exhibit for block diagram furnished with this application for details.
- (6) Report of Measurements:
Follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to appendix of this report and exhibits furnished with this application for photographs of equipment.
- (8) Brief description of peripheral equipment used with EUT.
The EUT has no provision to interface with any other device.
- (9) Transition Provisions of 15.37 are not being requested.
- (10) Direct Sequence Spread Spectrum:
Not Applicable.
- (11) Not Applicable. The EUT is not a Scanning Receiver.

2) Equipment Tested

<u>EQUIPMENT</u>	<u>MODEL/PART#</u>	<u>FCC I.D.</u>
EUT	SPEEDSTER	IUWSPEEDSTER

3) Equipment Function and Testing Procedures

The EUT is a 24.125 GHz field disturbance sensor, radio frequency transmitter used to monitor, measure, and display the speed of a moving object. It was designed for the baseball enthusiast wishing to know how fast pitches were thrown but may be used in many situations. The unit uses the 24.125 GHz radio frequency field in its vicinity to detect and measure changes in that field resulting from the movement of objects within its range. Changes to the field are used to measure projectile speed and display the information on the LCD screen located at the rear of the device. The EUT is operated from an AA battery pack and has no provision for connection to the utility power system. Since the EUT is battery operated, no line conducted emissions testing was performed.

4) Equipment and Cable Configurations

Conducted Emission Test Procedure

The test setup, including the EUT, was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. Since the EUT is battery operated, no line conducted emissions testing was performed.

Radiated Emission Test Procedure

The EUT was placed on a rotatable 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by

5) List of Test Equipment

HP 8591 EM ANALYZER SETTINGS		
CONDUCTED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
9 kHz	30 kHz	Peak / Quasi Peak
RADIATED EMISSIONS:		
RBW	AVG. BW	DETECTOR FUNCTION
120 kHz	300 kHz	Peak / Quasi Peak
HP 8562A ANALYZER SETTINGS		
RBW	VIDEO BW	DETECTOR FUNCTION
100 kHz	100 kHz	PEAK
1 MHz	1 MHz	Peak / Average

<u>EQUIPMENT</u>	<u>MFG.</u>	<u>MODEL</u>	<u>CAL.</u>	<u>DATES</u>	<u>DUE.</u>
LISN	Comp. Design	1762	10/00		10/01
Antenna	ARA	BCD-235-B	10/00		10/01
Antenna	EMCO	3147	10/00		10/01
Antenna	EMCO	3143	4/00		4/01
Analyzer	HP	8591EM	7/00		7/01
Analyzer	HP	8562A	2/01		2/02

6) Units of Measurements

Conducted EMI: Data is in dB μ V; dB referenced to one microvolt.

Radiated EMI: Data is in dB μ V/m; dB/m referenced to one microvolt per meter.

7) Test Site Locations

Conducted EMI: The AC powerline conducted emissions tests were performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI: The radiated emissions tests were performed at Rogers Labs, Inc. 3 meter Open Area Test Site (OATS).

Site Approval: Refer to Appendix for FCC Site Approval FCC registration number 90910

NVLAP Accredited: Lab Code 200087-0.

8) SUBPART B – Unintentional Radiators

Conducted EMI

The EUT is battery operated only and has no provision to connect to utility power. Therefore no conducted emissions testing was performed.

Radiated EMI

The EUT was arranged in a typical equipment configuration and operated in a standard mode. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest

Sample Calculations:

Progress Instruments, Inc.
MODEL: SpeedSTER
Test #: 010306 FCCID#: IUWSPEEDSTER
Test to: FCC Parts 2 and 15c


MARKER
185.0 MHz
29.32 dBμV

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 185.0 MHz
29.32 dBuV

LOG REF 80.0 dB μ V

10
dB/
#ATN
0 dB

VA SB
SC FC
CORR

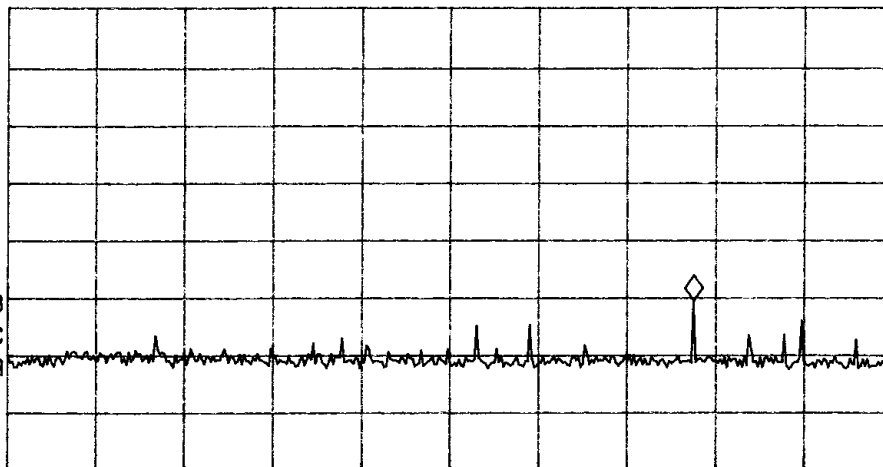

```

START 30.0 MHz                                STOP 230.0 MHz
#IF BW 120 kHz      AVG BW 300 kHz      SWP 41.7 msec

```

Figure 1 Radiated Emissions taken in screen room.


MARKER
298 MHz
38.78 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP
MKR 298 MHz
38.78 dBuV

LOG REF 80.0 dB μ V

10
dB/
#ATN
0 dB

MA SB
SC FC
CORR

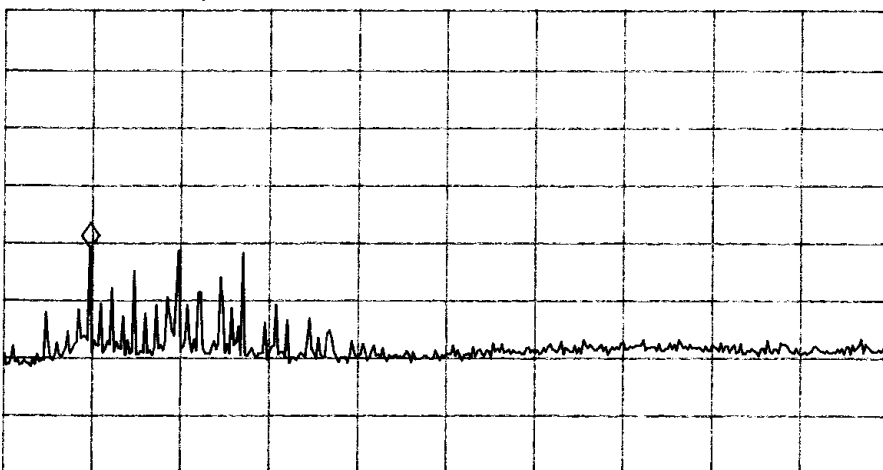

```
START 200 MHz                                STOP 1.200 GHz
#IF BW 120 kHz          AVG BW 300 kHz        SWP 208 msec
```

Figure 2 Radiated Emissions taken in screen room.

NOTE: No conducted emissions measurements taken for this battery operated device.

Data: EUT and System Radiated Emissions (7 Highest) :

Frequency In MHz	FSM Hor. (dBμV) Quasi-Peak	FSM Vert. (dBμV) Quasi-Peak	Ant. Fact. (dB)	Amp. Gain (dB)	Comp. Hor. (dBμV/m) @ 3m	Comp. Vert. (dBμV/m) @ 3 m	FCC Limit (dBμV)
245.8	51.5	61.1	12.0	35	28.5	38.1	46.0
270.4	52.4	60.7	12.7	35	30.1	38.4	46.0
295.0	61.9	51.4	13.6	35	40.5	26.3	46.0
319.6	50.9	45.6	14.9	35	30.8	25.5	46.0
344.2	49.8	47.8	15.3	35	30.1	28.1	46.0
393.4	56.2	53.9	16.5	35	37.7	35.4	46.0
467.1	52.2	48.4	18.0	35	35.2	31.4	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

Summary of Results for Conducted Emissions:

The conducted emissions for the EUT meet the requirements for FCC Part 15B CLASS B Digital Devices.

Summary of Results for Radiated Emissions:

The radiated emissions for the EUT meet the requirements for FCC Part 15B CLASS B Digital Devices. The EUT had a 5.5 dB minimum margin below the limit. Other emissions were present with amplitudes at least 10 dB below the limit.

Statement of Modifications:

No modifications to the EUT were required for the unit to meet the FCC Part 15B CLASS B emissions standards. There were no deviations to the specifications.

9) Subpart C - Intentional Radiators

As per CFR Part 15, Subpart C. The following information is submitted:

15.203 Antenna Requirements

The unit is produced with a permanently attached antenna. The antenna is not replaceable or user serviceable. The requirements of 15.203 are met; there are no deviations or exceptions to the specification.

Restricted Bands of Operation Per 15.205

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Sample Calculations:

$$\begin{aligned}\text{Computed Quasi-Peak (dB}\mu\text{V/m @ 3m)} &= \text{FSM(dB}\mu\text{V)} + \text{A.F.(dB)} - \text{Gain(dB)} \\ &= 51.5 + 12.0 - 35 \\ &= 28.5\end{aligned}$$

Data 15.205:

Radiated Emissions In Restricted Bands:

Emission Frequency (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
245.8	51.5	61.1	12.0	35	28.5	38.1	46.0
270.4	52.4	60.7	12.7	35	30.1	38.4	46.0

No other emissions found in the restricted bands.

15.209 Radiated Emissions Limits; General Requirements**Radiated EMI**

The EUT was arranged in a typical equipment configuration and operated in a standard mode. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 50 GHz for the preliminary testing. The highest radiated emission was then re-maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open field test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 100 GHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Log Periodic from 200 MHz to 5 GHz and/or Biconilog from 30 MHz to 1000 MHz; and pyramidal horns and or mixers from 4 GHz to 100 GHz.

Sample Calculations:

RFS = Radiated Field Strength

$\text{dB}\mu\text{V/m @ 3m} = \text{dB}\mu\text{V} + \text{A.F.} - \text{Amplifier Gain}$

$$\begin{aligned}\text{dB}\mu\text{V/m @ 3m} &= 51.5 + 12.0 - 35 \\ &= 28.5\end{aligned}$$

Data 15.209:

Data: EUT and System Radiated Emissions (9 Highest):

Frequency In MHz	FSM Hor. (dBµV) Quasi-Peak	FSM Vert. (dBµV) Quasi-Peak	Ant. Fact. (dB)	Amp. Gain (dB)	Comp. Hor. (dBµV/m) @ 3m	Comp. Vert. (dBµV/m) @ 3 m	FCC Limit (dBµV)
245.8	51.5	61.1	12.0	35	28.5	38.1	46.0
270.4	52.4	60.7	12.7	35	30.1	38.4	46.0
295.0	61.9	51.4	13.6	35	40.5	26.3	46.0
319.6	50.9	45.6	14.9	35	30.8	25.5	46.0
344.2	49.8	47.8	15.3	35	30.1	28.1	46.0
393.4	56.2	53.9	16.5	35	37.7	35.4	46.0
467.1	52.2	48.4	18.0	35	35.2	31.4	46.0

Other emissions present had amplitudes at least 10 dB below the limit.

Summary of Results for Radiated Emissions:

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 5.5 dB minimum margin below the limits. Other emissions were present with amplitudes at least 10 dB below the FCC Limits.

15.245 Operation in the Band 24,075-24,175 MHz

The power output was measured on an open field test site @ 3 meters. Data was taken per Paragraph 2.1046(a) and 15.245.

(a) The EUT was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. The amplitude of the carrier frequency was measured using a spectrum analyzer. The amplitude of the emission was then recorded from the analyzer display.

(b) Emissions radiated outside of the specified bands below 17.7 GHz, as specified in 15.205, shall not exceed the field strength limits shown in 15.209. Harmonic emissions above 17.7 GHz shall not exceed the following field strength

limits: For field disturbance sensors, 7.5 mV/m. The

Emissions were measured in dB μ V/m and converted to dB μ V/m @ 3 meters using the following equation.

$$\begin{aligned} \text{dB}\mu\text{v/m@ } 3\text{m} &= \text{FSM} + \text{A.F.} - \text{AMP. GAIN} & \mu\text{V/M} &= 10^{((\text{dB}\mu\text{v/m}/20))} \\ &= 67.5 + 22.0 & &= 29.85\text{E3 } \mu\text{V/M} \\ &= 89.5 \end{aligned}$$

Frequency (MHz)	FSM IN HOR dBμV	FSM IN VERT dBμV	ANT FACT dB	CFS LEVEL IN dBμV/m @ 3m HOR	CFS LEVEL IN dBμV/m @ 3m VERT	Limit dBμV/m @ 3m
24,125	67.5	82.8	22.0	89.5	104.8	128.0

Frequency (MHz)	FSM IN HOR dBμV	FSM IN VERT dBμV	ANT FACT dB	CFS LEVEL IN dBμV/m @ 3m HOR	CFS LEVEL IN dBμV/m @ 3m VERT	Limit dBμV/m @ 3m
48,250	23.0	28.0	35.0	58.0	63.0	77.5
72,375	26.0	28.0	35.0	61.0	63.0	77.5
96,500	23.0	26.0	39.8	62.8	65.8	77.5

Refer to Figures 3 through 9 showing plots taken in the screen room from the spectrum analyzer at a distance of 1 meter. The band edges are protected due to the frequency of operation.

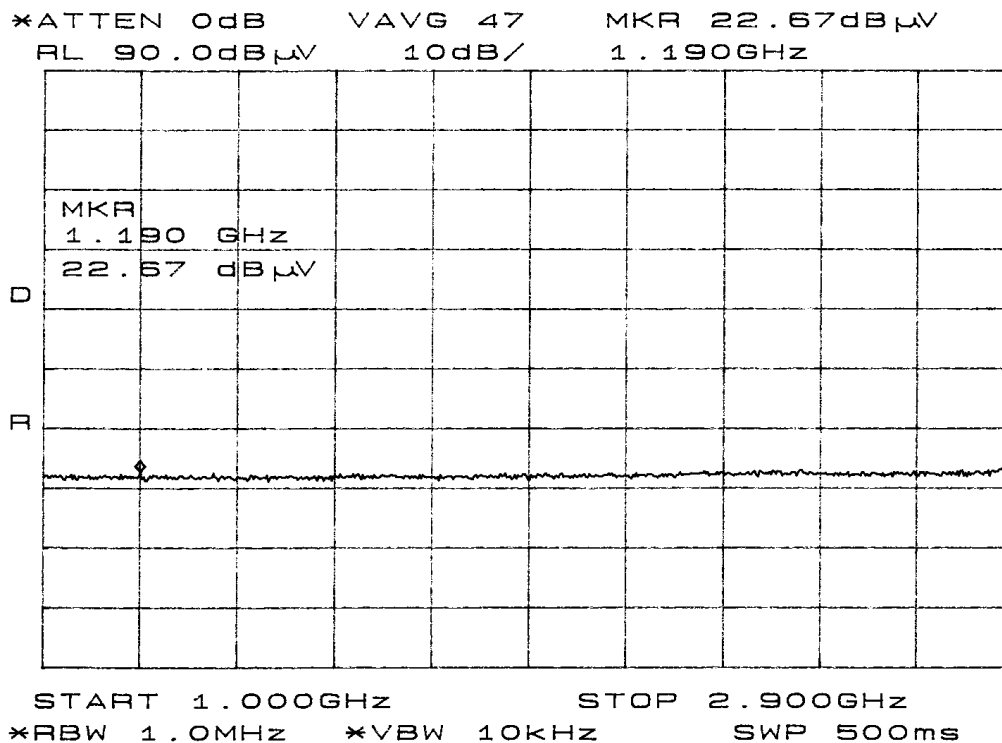


Figure 3 Radiated Emissions taken in screen room.

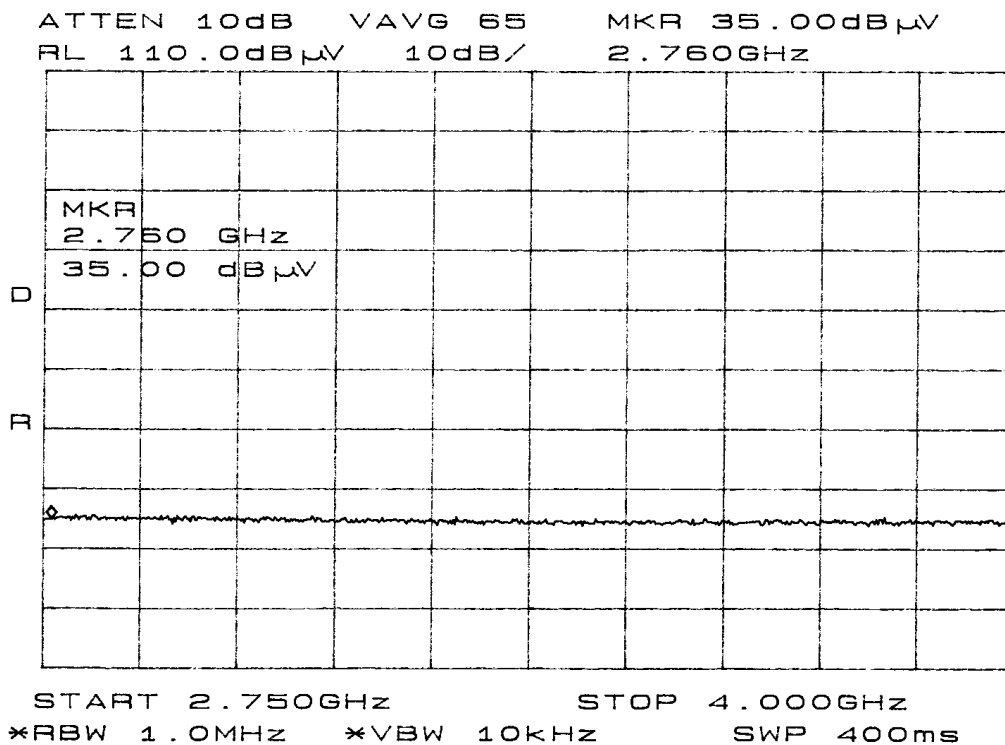


Figure 4 Radiated Emissions taken in screen room.

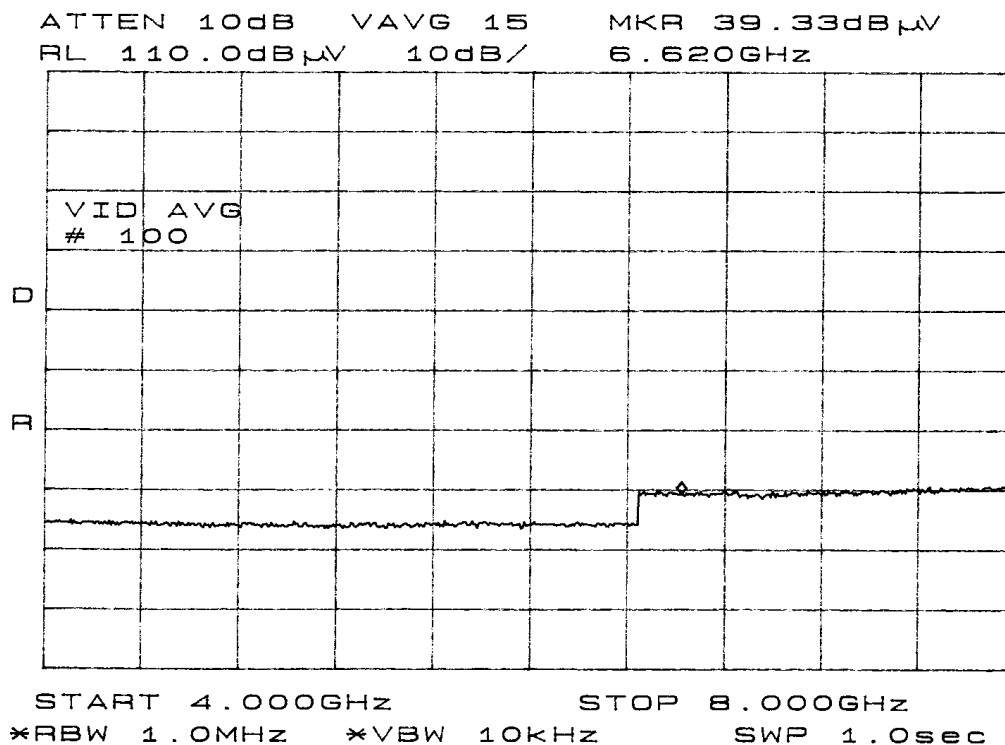


Figure 5 Radiated Emissions taken in screen room.

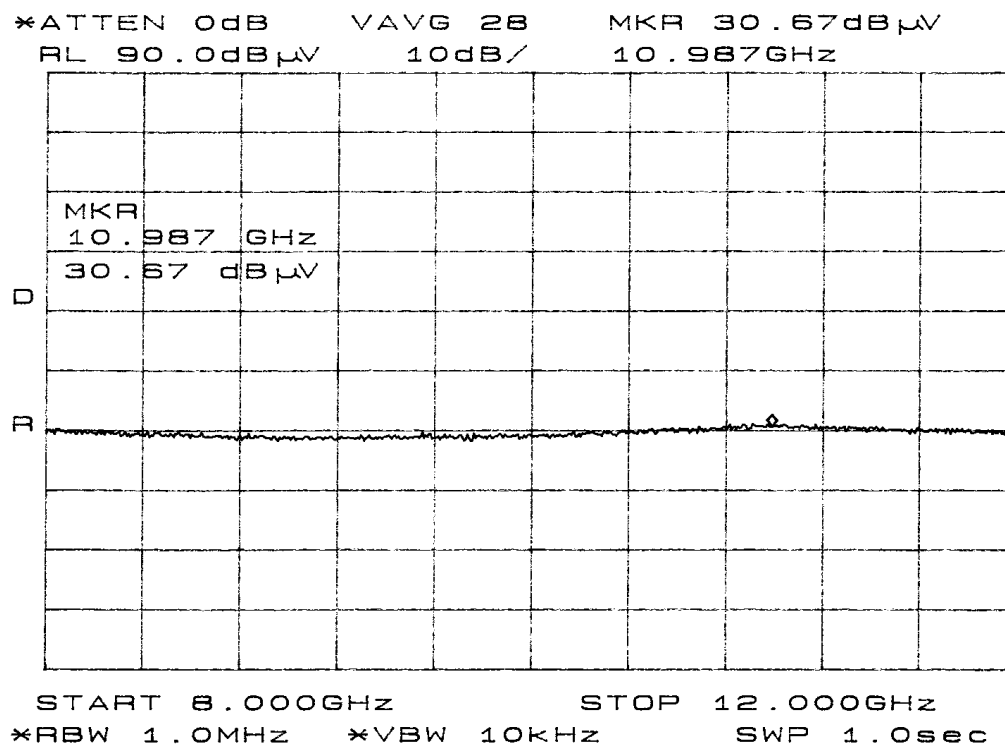
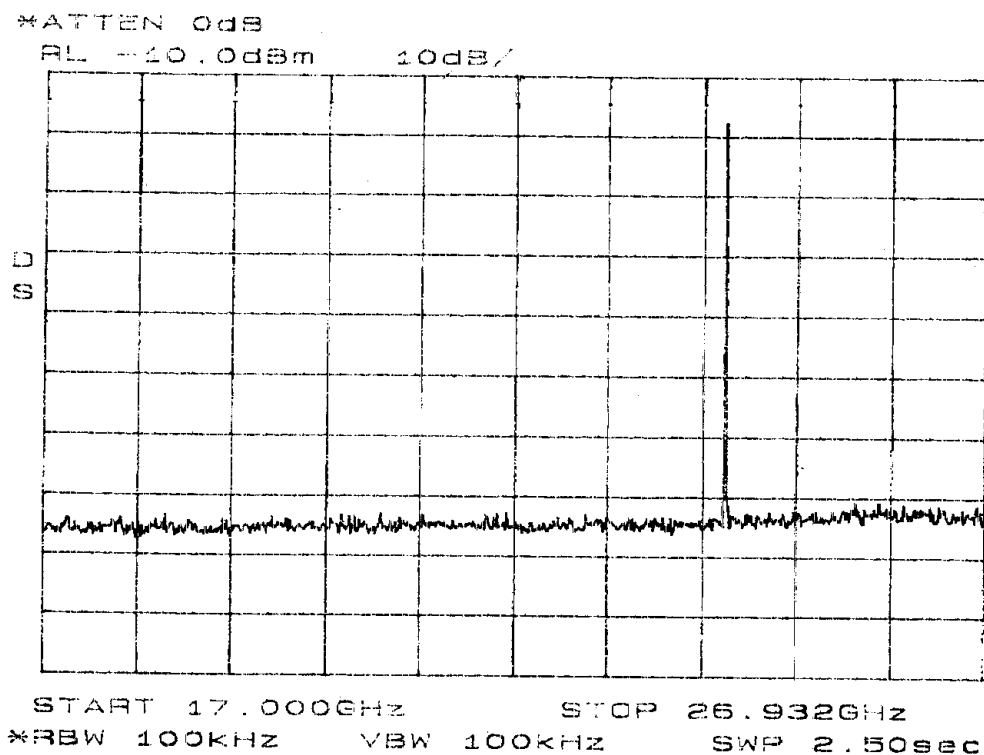
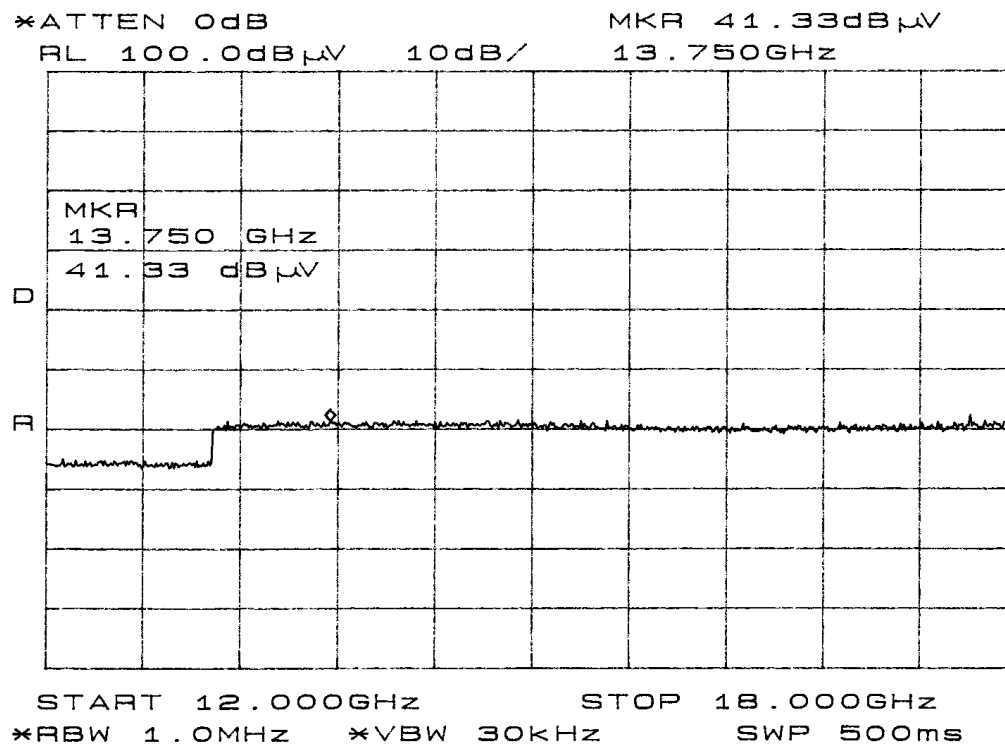


Figure 6 Radiated Emissions taken in screen room.



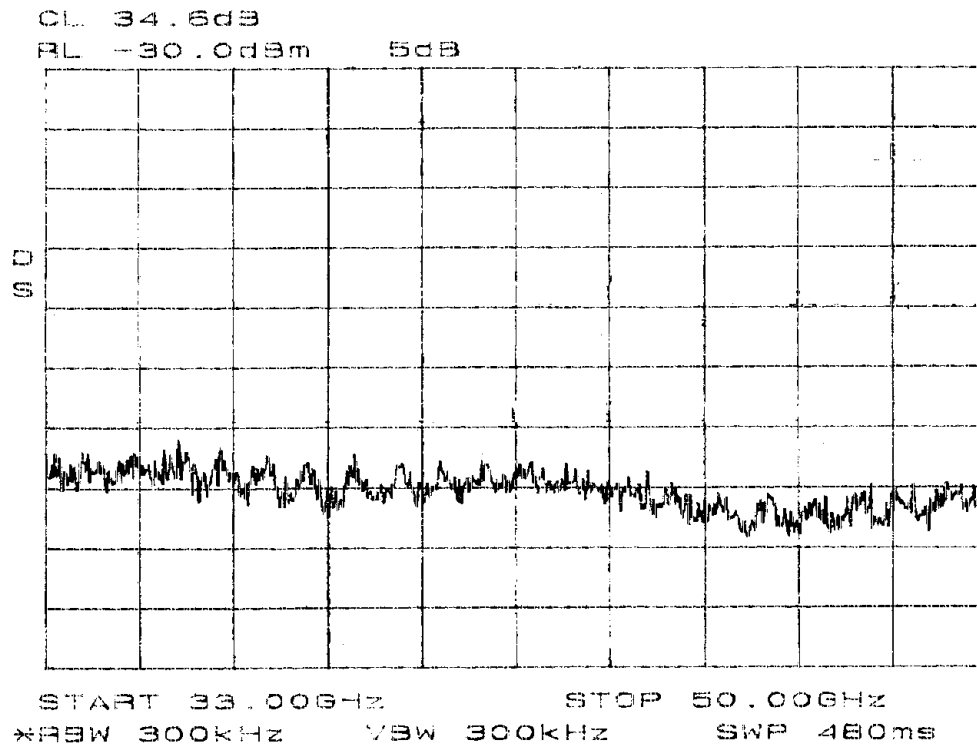


Figure 9 Radiated Emissions taken in screen room.

Radiated Emissions of Intentional Radiator:

The EUT had a 24.2 dB margin below the limits. The radiated emissions for the EUT meet the requirements for FCC Part 15C, paragraph 15.245, Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 10 dB below the FCC Limits. The specification of 15.245 are met, there are no deviations or exceptions to the requirements.

Statement of Modifications:

No modifications to the EUT were required for the unit to meet the FCC Part 15B CLASS B emissions standards. There were no deviations to the specifications.

APPENDIX

Model: SPEEDSTER

1. Photographs of Radiated Emissions Test Set Up
2. Photographs of Case Side and Back
3. Photograph Inside of Case
4. Photographs Printed Circuit Board
5. Photographs Printed Circuit Board
6. Rogers Qualifications
7. Test Equipment List
8. FCC Site Approval Letter


PROGRESS INSTRUMENTS, INC.
MODEL: SPEEDSTER
PHOTOGRAPHS OF RADIATED EMISSIONS TEST SET UP





PROGRESS INSTRUMENTS, INC.
MODEL: SPEEDSTER
PHOTOGRAPHS OF CASE SIDE AND BACK



PROGRESS INSTRUMENTS, INC.
MODEL: SPEEDSTER
PHOTOGRAPH OF INSIDE CASE

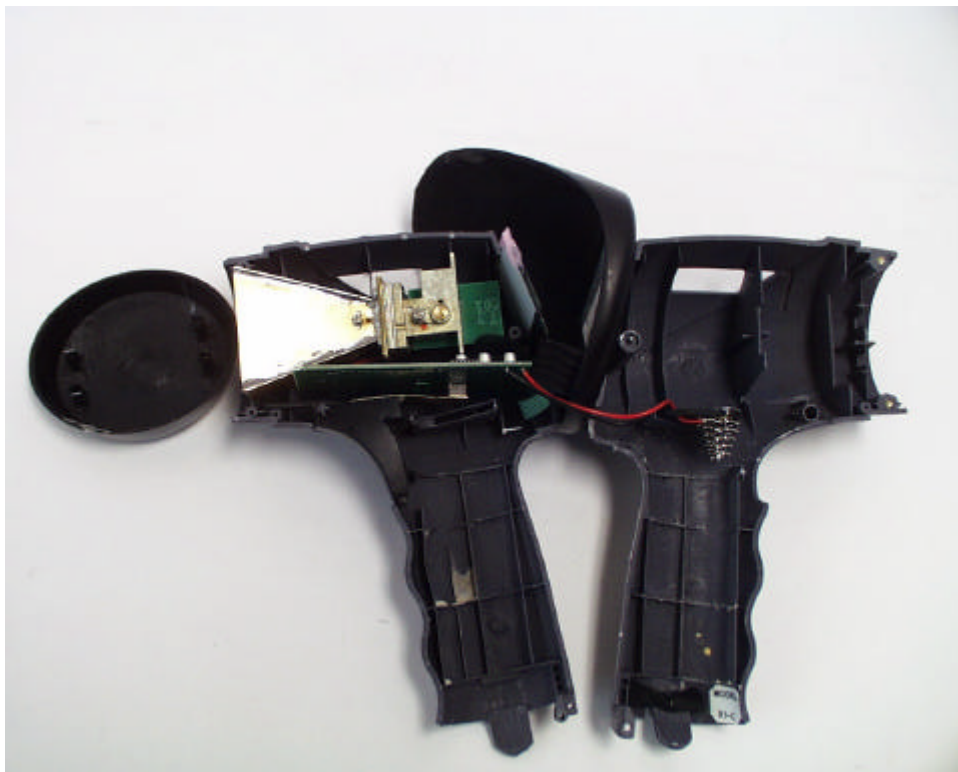

PROGRESS INSTRUMENTS, INC.
MODEL: SPEEDSTER
PHOTOGRAPHS OF PRINTED CIRCUIT BOARD

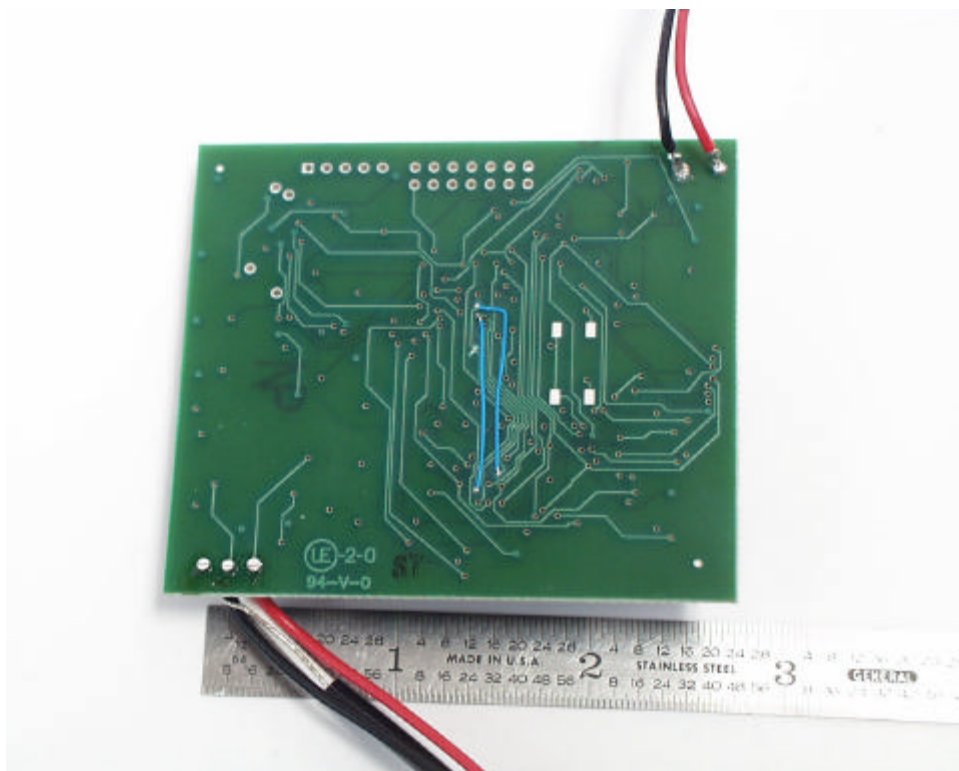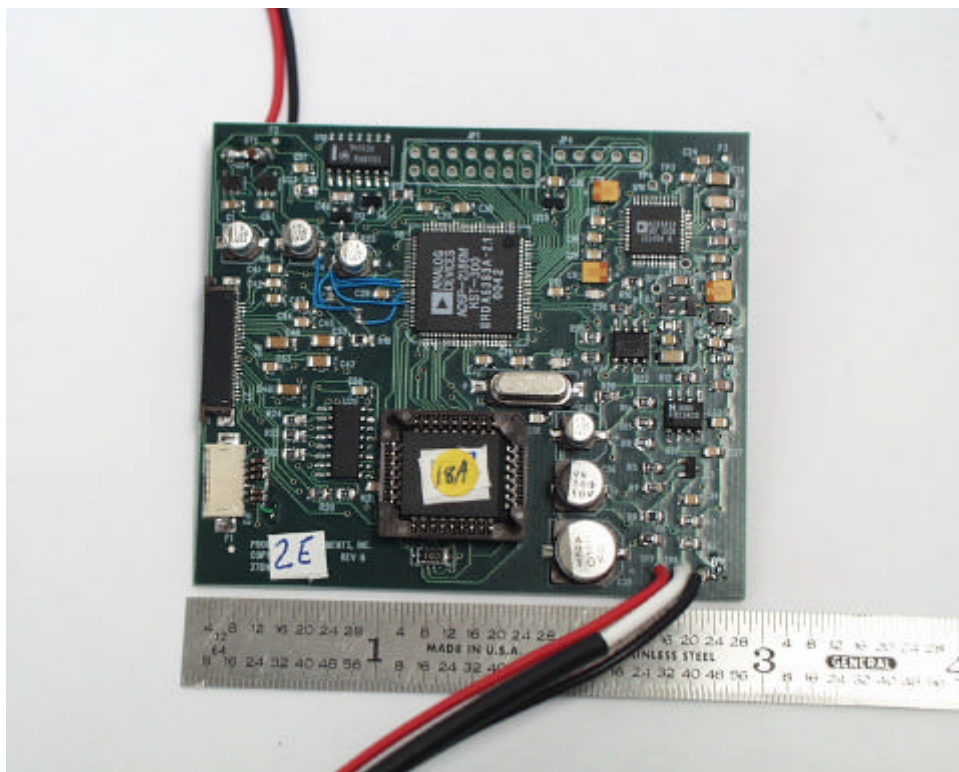



ROGERS LABS, INC.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214

Progress Instruments, Inc.
MODEL: SpeedSTER
Test #: 010306 FCCID#: IUWSPEEDSTER
Test to: FCC Parts 2 and 15c

Page 23 of 27

CERTIFICATION\PROGRESSSPEEDSTER.doc 04/09/2001

PROGRESS INSTRUMENTS, INC.
MODEL: SPEEDSTER
PHOTOGRAPHS OF PRINTED CIRCUIT BOARD

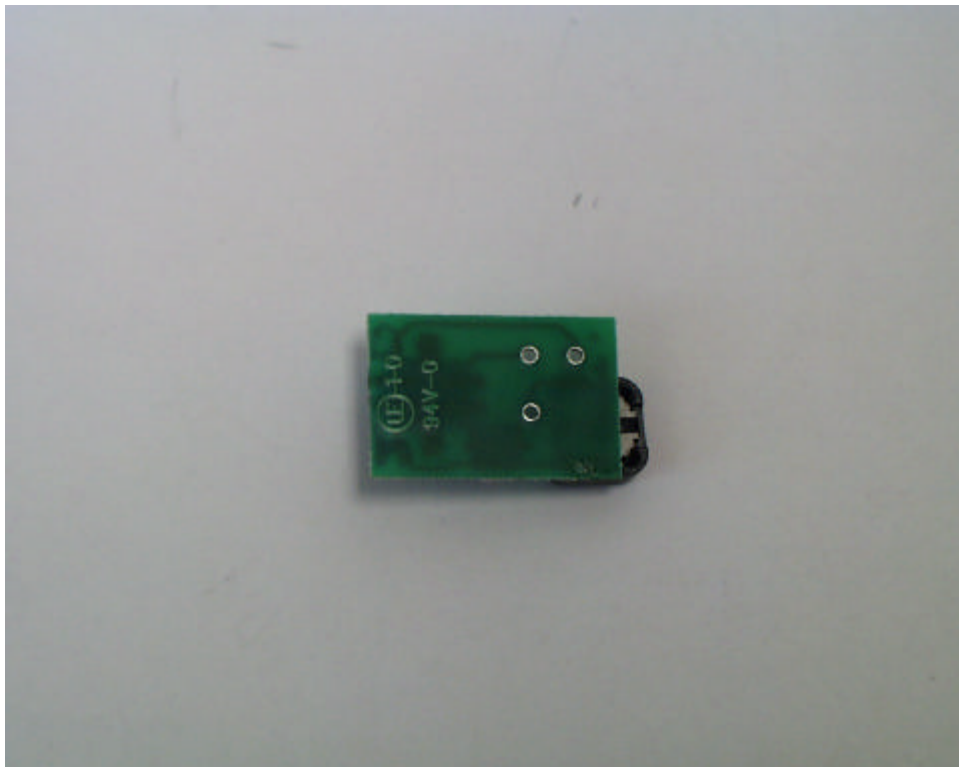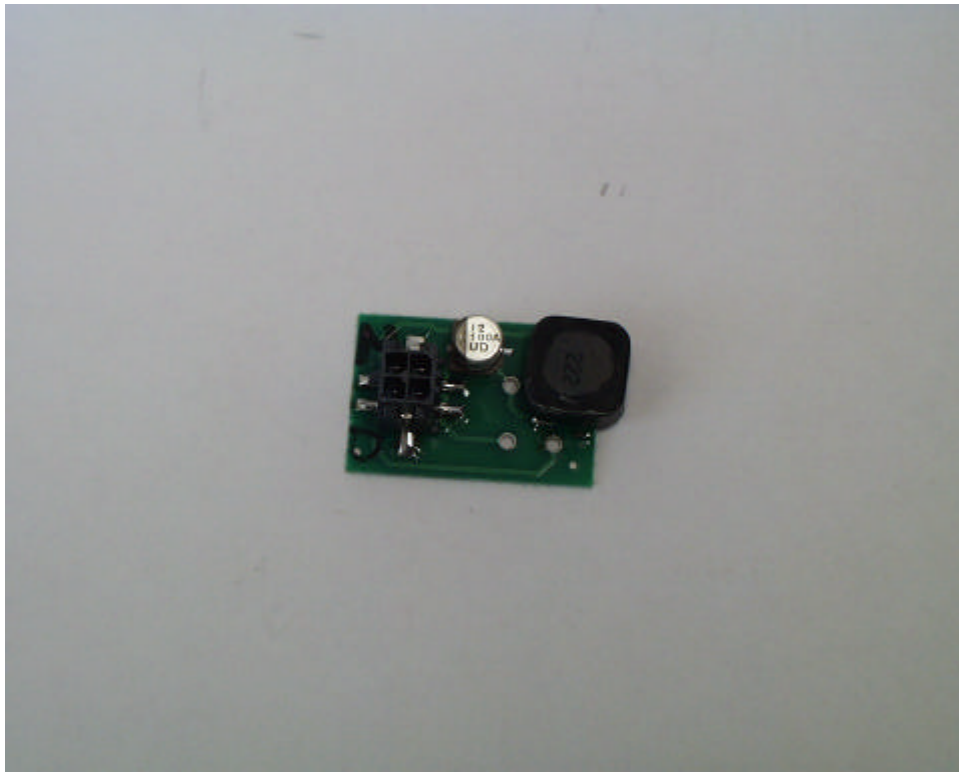

QUALIFICATIONS
Of
SCOT D. ROGERS, ENGINEER
ROGERS LABS, INC.


Mr. Rogers has approximately 13 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

POSITIONS HELD:

Systems Engineer:	A/C Controls Mfg. Co., Inc. 6 Years
Electrical Engineer:	Rogers Consulting Labs, Inc. 5 Years
Electrical Engineer:	Rogers Labs, Inc. Current

EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.


Scot D. Rogers

March 15, 2001
Date

1/11/00

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD. 21046

December 08, 2000

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot D. Rogers


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Listing: December 08, 2000

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, E-Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips
Electronics Engineer